

This exploded view diagram illustrates the components of the HP Z440 G2 Mini PC and their assembly sequence. The components are labeled as follows:

- DC1**: Power supply cable.
- DC2**: Another power supply cable.
- 351**: Front bezel.
- 353**: Rear bezel.
- 354**: Cable with a connector.
- 355**: Square base plate.
- 356**: Small cable or connector.
- 360 x6**: Six screws for the base plate.
- 361 x6**: Six screws for the bezels.
- 363 x2**: Two mounting brackets.
- 370**: Main system board.
- 371**: Cable connected to the system board.
- 372 x2**: Two cables connected to the system board.
- 501, 502, 503, 504, 505, 506, 507**: A stack of memory modules.

The diagram shows the relative positions of these components, indicating how they fit together to form the complete device.



created date:2016-05-18

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
	DC1	E3A-0214-00	DC CORD		1	K4,K3
	DC2	E3A-0215-00	DC CORD		1	E1
	DGB1	CB-16DNXSOC7KN	DIGITAL IO PWB ASSY	XJA-042K-07	1	K4
	DGB1	CB-16DNXSOC6KN	DIGITAL IO PWB ASSY	XJA-042K-06	1	K3
	DGB1	CB-16DNXSOC4EN	DIGITAL IO PWB ASSY	XJA-042E-04	1	E1
△	F1	QMFZ064-150-J1	FUSE	15A	1	
	FC1	E3F-0111-00	FLAT CABLE		1	
	FC2	EF0AD0550X4BC	FLAT CABLE		1	
	FC3	EF0AD0560X4BC	FLAT CABLE		1	
	FPC1	E3F-0128-00	FLAT CABLE		1	
	LCD1	B3H-0014-10	LCD		1	
	PA1	A6C-0005-0Y	PANEL		1	K4
	PA1	A6C-0005-0X	PANEL		1	K3
	PA1	A6C-0005-0Z	PANEL		1	E1
	TP1	W0C-0197-00	TOUCH PANEL		1	
	VME1	FD2-3A00NXN	DVD MECHANISM		1	
	WH1	E3F-0116-00	WIRING HARNESS		1	
	WH2	E3F-0112-00	WIRING HARNESS		1	
	WH3	E3F-0119-00	WIRING HARNESS		1	K4,E1
	WH3	E3F-0118-00	WIRING HARNESS		1	K3
	A	VKZ4539-054	MINI SCREW		2	
	B	LV45552-003A	SPECIAL SCREW		4	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	43	K4,K3
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	44	E1
	D	LV45522-001A	SPECIAL SCREW		2	
	E	QYSDST2006ZA	TAP SCREW	M2 x 6mm	3	
	F	QYSDST2005ZA	TAP SCREW	M2 x 5mm	4	
	G	LV44159-005A	MINI SCREW		4	
	H	VKZ4777-015	MINI SCREW		6	
	K	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	2	
	L	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	M	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	2	
	N	QYSPSG3008ZA	TAP SCREW	M3 x 8mm	2	
	P	QYSPST2614ZA	TAP SCREW	M2.6 x 14mm	2	
	Q	QYNTS2600ZA	NUT	M2.6	2	
	222	QQR0490-001	NOISE FILTER		1	
	223	GE40101-001A	PIN CAP		3	K4,K3
	223	GE40101-001A	PIN CAP		6	E1
	224	E3A-0217-00	CORD W.PINJACK		1	
	225	E3A-0277-00	CORD W.PINJACK		1	E1
	227	F0K-0070-00	FANMOTOR		1	
	251	A2B-0008-0D	DRESSING PANEL		1	
	252	B1K-0027-10	LIGHTING B ASSY		1	
	254	K2A-0001-02	KNOB		1	
	255	K2A-0002-00	KNOB		1	
	256	K2A-0003-02	KNOB		1	
	257	K2K-0112-11	KNOB BASE		1	
	258	K2K-0120-10	KNOB ASSY		1	
	259	K2K-0140-0L	KNOB ASSY		1	K4,K3
	259	K2K-0140-0M	KNOB ASSY		1	E1
	260	W1A-0003-00	LENS		1	
	264	F1K-0005-00	BLIND PLATE		1	
	351	J2C-0006-00	MOUNTING ASSY		1	
	353	B9H-0001-00	ESCUTCHEON		1	
	354	QAL1550-001	ANTENNA		1	
	355	LV45939-001A	GPS BRACKET		1	
	356	QAN0137-001	MICROPHONE		1	
	360	QYSTSP5008ZA	SCREW	M5 x 8mm	6	K4,K3
	361	QYSSSP5008ZA	SCREW	M5 x 8mm	6	K4,K3
	363	D1A-0007-00	LEVER		2	
	370	E3A-0236-00	CORD WITH PLUG		1	K4
	370	E3A-0238-00	CORD WITH PLUG		1	E1
	371	E3A-0235-00	CORD WITH PLUG		1	K3
	372	LV45959-001A	CAP		1	K4,E1
	372	LV45959-001A	CAP		2	K3
	501	B5A-1048-00	INST.MANUAL		1	K4,K3
	501	B5A-1049-00	INST.MANUAL		1	E1
	502	B5A-1048-01	INST.MANUAL		1	K4,K3
	502	B5A-1049-01	INST.MANUAL		1	E1
	503	B5A-1048-02	INST.MANUAL		1	K4,K3
	503	B5A-1049-02	INST.MANUAL		1	E1
	504	B5A-1049-03	INST.MANUAL		1	E1
	505	B5A-1049-04	INST.MANUAL		1	E1
	506	B5A-1049-05	INST.MANUAL		1	E1
	507	B5A-1049-06	INST.MANUAL		1	E1
	701	-----	VIDEO CNTL PWB ASSY	NO SERVICE PART	1	K4
	701	-----	VIDEO CNTL PWB ASSY	NO SERVICE PART	1	K3
	701	-----	VIDEO CNTL PWB ASSY	NO SERVICE PART	1	E1
	702	-----	VIDEO PWB ASSY	NO SERVICE PART	1	K4,K3
	702	-----	VIDEO PWB ASSY	NO SERVICE PART	1	E1
	703	-----	AUDIO PWB ASSY	NO SERVICE PART	1	K4
	703	-----	AUDIO PWB ASSY	NO SERVICE PART	1	K3
	703	-----	AUDIO PWB ASSY	NO SERVICE PART	1	E1
	710	-----	TOP PLATE	NO SERVICE PART	1	
	711	-----	BRACKET	NO SERVICE PART	1	
	712	-----	BRACKET	NO SERVICE PART	1	
	713	-----	COOLING RUBBER	NO SERVICE PART	1	
	714	-----	BRACKET	NO SERVICE PART	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	715	-----	HEAT SINK	NO SERVICE PART	1	
	716	-----	BRACKET	NO SERVICE PART	1	
	717	-----	SUB CHASSIS	NO SERVICE PART	1	
	718	-----	CHASSIS	NO SERVICE PART	1	
	719	-----	SIDE PLATE	NO SERVICE PART	1	
	720	-----	SIDE PLATE	NO SERVICE PART	1	
	721	-----	REAR PANEL	NO SERVICE PART	1	K4
	721	-----	REAR PANEL	NO SERVICE PART	1	K3
	721	-----	REAR PANEL	NO SERVICE PART	1	E1
	728	-----	CONDUCT CUSHION	NO SERVICE PART	1	K4,K3
	753	-----	BRACKET ASSY	NO SERVICE PART	1	
	761	-----	CONDUCT CUSHION	NO SERVICE PART	2	
	762	-----	SHEET	NO SERVICE PART	1	
	763	-----	SHEET	NO SERVICE PART	1	
	769	-----	SPACER(H)	NO SERVICE PART	1	

EXPLODED VIEW (DVD MECHANISM: FD2-3A00NXN)

Block No.MJMM

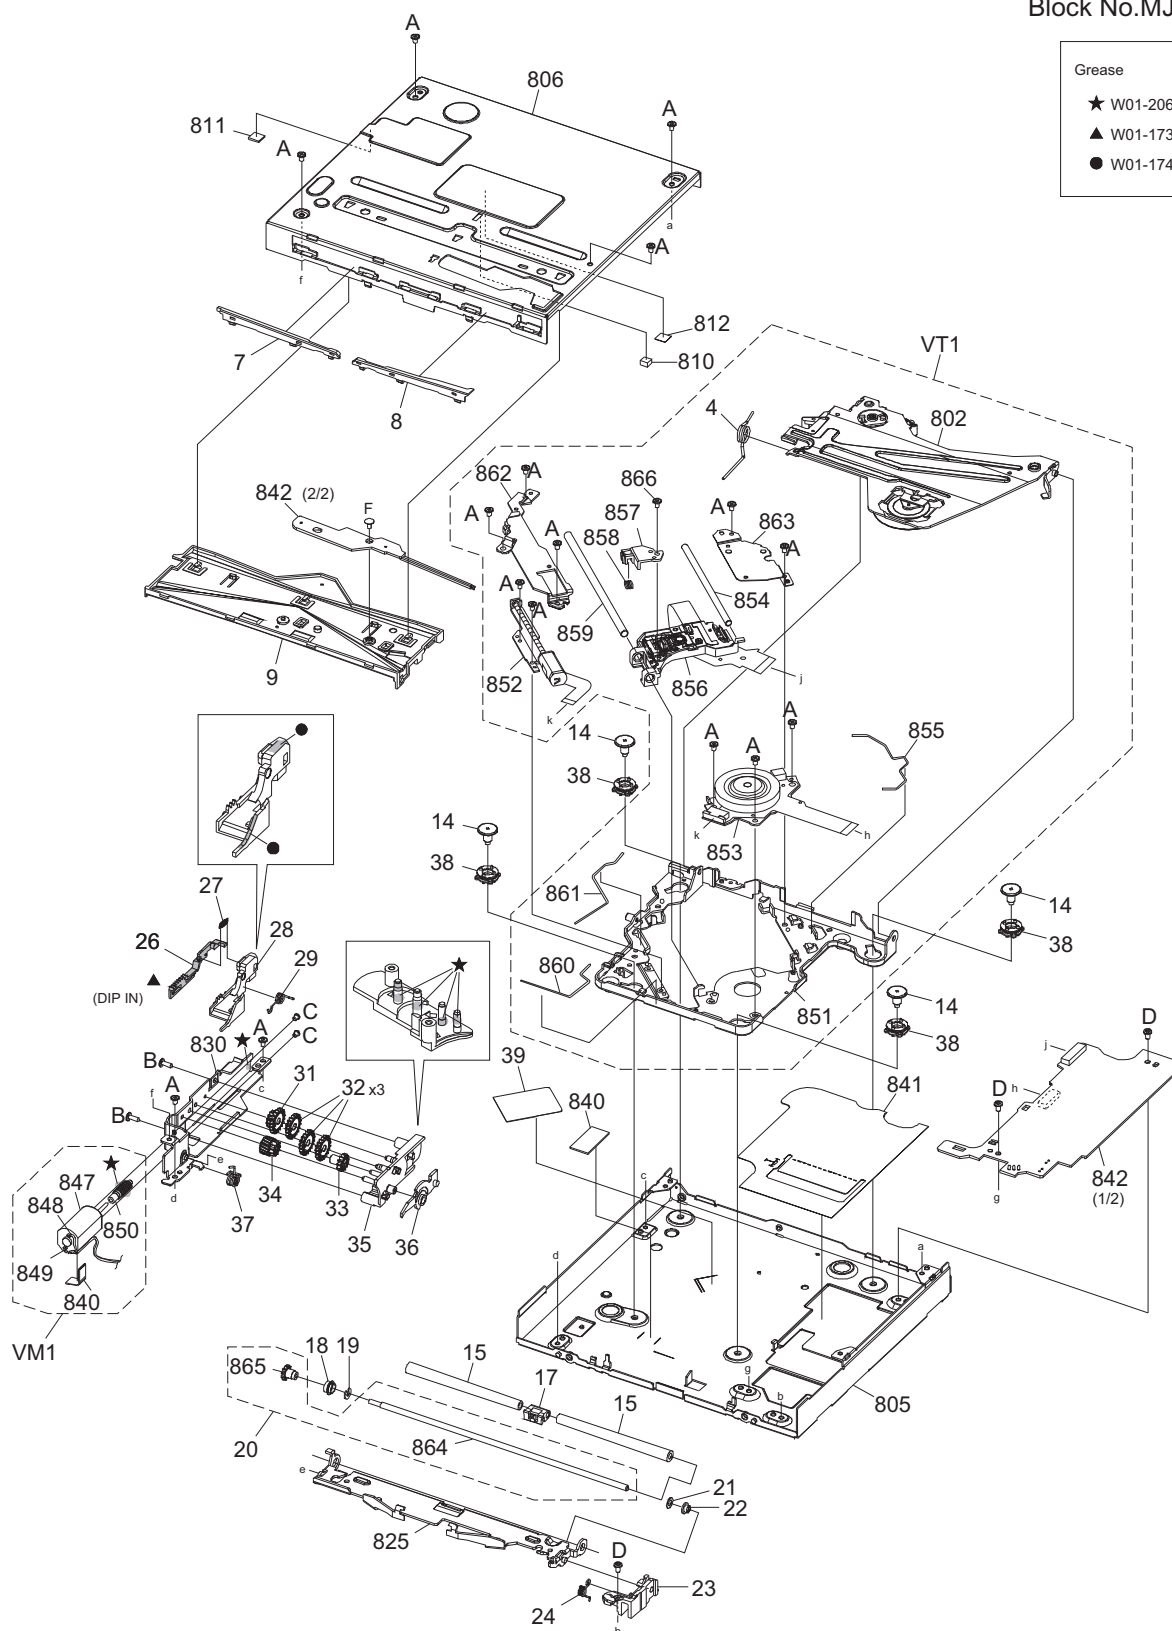

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (DVD MECHANISM: FD2-3A00NXN) <MJMM>						
	VM1	CM-FD2-ALM	LOADING M ASSY		1	
	VT1	CM-FD2-ATM2	TM ASSY		1	
	A	LV44959-002A	SPECIAL SCREW		16	
	B	LV45727-001A	GEAR SCREW		2	
	C	QYSPSPU1425MA	SCREW	M1.4 x 2.5mm	2	
	D	VKZ4539-054	MINI SCREW		3	
	F	LV44586-001A	SPECIAL SCREW		1	
	4	LV45709-002A	CLAMP SPRING		1	
	7	LV23006-002A	GUIDE 2 L		1	
	8	LV23007-002A	GUIDE 2 R		1	
	9	LV11842-004A	DISC GUIDE		1	
	14	LV45704-001A	DAMPER SHAFT		4	
	15	LV45724-001A	RUBBER ROLLER		2	
	17	LV37652-002A	SHAFT GUIDE		1	
	18	LV39938-001A	GEAR RETAINER		1	
	19	LV45730-001A	ROLLER C WASHER		1	
	20	CM-FD2-AROS	RO SHAFT ASSY		1	
	21	LV45731-001A	ROLLER WASHER		1	
	22	LV45718-001A	ROLLER RETAINER		1	
	23	LV23003-002A	ROLLER HOLDER		1	
	24	LV45982-001A	ROLLER SPG R2		1	
	26	LV39932-002A	TRIGGER SLIDER		1	
	27	LV45715-001A	TRIGGER SPRING		1	
	28	LV23004-004A	SLIDER		1	
	29	LV39935-003A	SLIDER SPRING		1	
	31	LV39929-001A	DRIVE GEAR 4		1	
	32	LV39928-001A	DRIVE GEAR 3		3	
	33	LV39927-001A	DRIVE GEAR 2		1	
	34	LV39926-001A	DRIVE GEAR 1		1	
	35	LV23005-001A	GEAR HOLDER		1	
	36	LV39923-002A	UD LEVER		1	
	37	LV45983-001A	ROLLER SPG L2		1	
	38	LV39934-001A	DAMPER		4	
	39	LV45719-001A	PU FPC SHEET		1	
	802	-----	CLAMP ARM ASSY	NO SERVICE PART	1	
	805	-----	BOTTOM CHASSIS	NO SERVICE PART	1	
	806	-----	TOP CHASSIS	NO SERVICE PART	1	
	810	-----	CLAMPER CUSHION	NO SERVICE PART	1	
	811	-----	CL A CUSHION B	NO SERVICE PART	1	
	812	-----	CL A CUSHION A	NO SERVICE PART	1	
	825	-----	ROLLER ARM	NO SERVICE PART	1	
	830	-----	GEAR BKT	NO SERVICE PART	1	
	840	-----	SPACER(H)	NO SERVICE PART	2	
	841	-----	BOTTOM SHEET	NO SERVICE PART	1	
	842	-----	FE BOARD ASSY	NO SERVICE PART	1	
	847	-----	LOADING MOTOR	NO SERVICE PART	1	
	848	-----	SIN TWIST WIRE	NO SERVICE PART	1	
	849	-----	SIN TWIST WIRE	NO SERVICE PART	1	
	850	-----	WORM GEAR	NO SERVICE PART	1	
	851	-----	TM CHASSIS ASSY	NO SERVICE PART	1	
	852	-----	FEED MOTOR	NO SERVICE PART	1	
	853	-----	SPINDLE MOTOR	NO SERVICE PART	1	
	854	-----	SUB SHAFT	NO SERVICE PART	1	
	855	-----	SUB SHAFT SP	NO SERVICE PART	1	
	856	-----	PICK UP	NO SERVICE PART	1	
	857	-----	PICKUP ARM	NO SERVICE PART	1	
	858	-----	PICKUP ARM SP	NO SERVICE PART	1	
	859	-----	SHAFT	NO SERVICE PART	1	
	860	-----	MAIN SHAFT SP 2	NO SERVICE PART	1	
	861	-----	MAIN SHAFT SP	NO SERVICE PART	1	
	862	-----	TM COVER MAIN	NO SERVICE PART	1	
	863	-----	TM COVER SUB	NO SERVICE PART	1	
	864	-----	ROLLER SHAFT	NO SERVICE PART	1	
	865	-----	ROLLER GEAR	NO SERVICE PART	1	
	866	-----	SCREW	NO SERVICE PART	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
VIDEO CNTL PWB ASSY (XJ1-119x-0x) <XJ1>						
	IC31	MP9943AGQ	ANALOG IC		1	
	IC51	MP9943AGQ	ANALOG IC		1	
	IC91	MP9942AGJ	ANALOG IC		1	
	IC92	TC7SET08FU-J-X	IC(DIGITAL)		1	
	IC110	BA2904WV	ANALOG IC		1	
	IC131	MP9942AGJ	ANALOG IC		1	K3
	IC132	TC7SET08FU-J-X	IC(DIGITAL)		1	K3
	IC150	BA2904WV	ANALOG IC		1	K3
	IC201	NJM2819ADL333	BIPOLAR IC		1	
	IC202	BD82032FVJ-G-X	IC		1	
	IC203	TPS2065CDBV	MOS IC		1	
	IC204	BD33KA5WFP	MOS IC		1	
	IC205	XC6223B331PG-X	IC		1	
	IC207	BD00C0AWFP	MOS IC		1	
	IC301	W3F-0173-00	MCU IC		1	
	IC302	XC6120N282N-G	MOS IC		1	
	IC303	TC7SH08FU-X	IC(DIGITAL)		1	
	IC304	BR24T32FVT-W	ROM IC		1	
	IC305	NJU7108F3	MOS IC		1	
	IC501	AK7738VQ	MOS IC		1	
	IC502	AK4388AET-X	IC		1	
	IC503	AK4388AET-X	IC		1	
	IC504	NJM2871BF05	ANALOG IC		1	
	IC506	AK4388AET-X	IC		1	
	IC507	XC6209B502PG-X	IC		1	
	IC508	BU33TD3WG	MOS IC		1	
	IC601	NJM4565V-X	IC		1	
	IC711	TC7SH08FU-X	IC(DIGITAL)		1	K4,K3
	IC712	TC7SZ125FUF	MOS IC		1	K4,K3
	IC713	TC7SH08FU-X	IC(DIGITAL)		1	E1
	IC714	TC7SZ125FUF	MOS IC		1	E1
	IC871	NJW1341VC3-W	IC		1	
	IC872	XC6209B502PG-X	IC		1	
	IC921	NJG1143UA2-W	IC		1	
	IC922	XC6213B332N-G	MOS IC		1	
	Q1	MTM98140-X	TRANSISTOR		1	
	Q3	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q4	LSCR523EBFS8	TRANSISTOR		1	
	Q5	LSAR523EBFS8	TRANSISTOR		1	
	Q6	LTA014TUBFS8	DIGI TRANSISTOR		1	
	Q7	LSCR523EBFS8	TRANSISTOR		1	
	Q8	LSAR523EBFS8	TRANSISTOR		1	
	Q9	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q10	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q11	LSCR523EBFS8	TRANSISTOR		1	
	Q12	LSAR523EBFS8	TRANSISTOR		1	
	Q91	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q110	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q111	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q112	LSCR523EBFS8	TRANSISTOR		1	
	Q113	LSAR523EBFS8	TRANSISTOR		1	
	Q114	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q115	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q116	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q117	LTA014YEBFS8	DIGI TRANSISTOR		1	
	Q131	LTC014YEBFS8	DIGI TRANSISTOR		1	K3
	Q150	LTC044EEBFS8	DIGI TRANSISTOR		1	K3
	Q151	LTC044EEBFS8	DIGI TRANSISTOR		1	K3
	Q152	LSCR523EBFS8	TRANSISTOR		1	K3
	Q153	LSAR523EBFS8	TRANSISTOR		1	K3
	Q154	LTC014YEBFS8	DIGI TRANSISTOR		1	K3
	Q155	LTC014YEBFS8	DIGI TRANSISTOR		1	K3
	Q156	LTC044EEBFS8	DIGI TRANSISTOR		1	K3
	Q157	LTA014YEBFS8	DIGI TRANSISTOR		1	K3
	Q301	2SB1689-X	TRANSISTOR		1	
	Q302	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q303	LSAR523EBFS8	TRANSISTOR		1	
	Q304	LSAR523EBFS8	TRANSISTOR		1	
	Q305	LTC044EEBFS8	DIGI TRANSISTOR		1	
	Q306	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q307	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q308	LTA014YEBFS8	DIGI TRANSISTOR		1	
	Q309	LTA014YEBFS8	DIGI TRANSISTOR		1	
	Q310	2SK3019-X	MOS FET		1	
	Q311	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q312	LTA014TEB-X	DIGI TRANSISTOR		1	
	Q313	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q314	LTC014EEBFS8	DIGI TRANSISTOR		1	
	Q315	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q316	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q317	LSCR523EBFS8	TRANSISTOR		1	
	Q318	LSAR523EBFS8	TRANSISTOR		1	
	Q319	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q501	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q502	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q711	LTC043TUBFS8	DIGI TRANSISTOR		1	K4,K3
	Q712	LTC043TUBFS8	DIGI TRANSISTOR		1	K4,K3
	Q713	LTA014YEBFS8	DIGI TRANSISTOR		1	K4,K3
	D1	RB080L-30-X	SB DIODE		1	
	D2	DA2J101	DIODE		1	
	D3	DZ2J160M	ZENER DIODE		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D5	DZ2J062M	ZENER DIODE		1	
	D6	DZ2J062M	ZENER DIODE		1	
	D91	DZ2J062M	ZENER DIODE		1	
	D131	DZ2J062M	ZENER DIODE		1	K3
	D201	GS1J-LTP	DIODE		1	
	D202	DA2J101	DIODE		1	
	D203	DA2J101	DIODE		1	
	D301	DA2J101	DIODE		1	
	D501	DA2J101	DIODE		1	
	D601	DZ2J110M	ZENER DIODE		1	
	D602	DZ2J110M	ZENER DIODE		1	
	D711	DZ2J056M	ZENER DIODE		1	E1
	D712	DZ2J056M	ZENER DIODE		1	K4,K3
	D713	DZ2J056M	ZENER DIODE		1	K4,K3
	C1	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C2	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C4	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C7	CD040CP1C222M	E CAPACITOR	2200uF 16V M	1	
	C31	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C32	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C33	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C34	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C35	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C36	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C37	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C38	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C40	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	
	C41	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C43	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C44	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C48	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	
	C51	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C52	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C53	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C54	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C55	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C56	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C57	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C58	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C60	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	
	C61	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C63	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C64	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C65	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C66	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C67	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C91	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C92	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C93	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C94	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C95	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C96	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C97	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C98	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C100	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	
	C101	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C103	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C104	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C105	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C110	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C111	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C112	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C113	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C114	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C131	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K3
	C132	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K3
	C133	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K3
	C134	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K3
	C135	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K3
	C136	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K3
	C137	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K3
	C138	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K3
	C140	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	K3
	C141	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	K3
	C143	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K3
	C144	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K3
	C145	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K3
	C150	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K3
	C151	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K3
	C152	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K3
	C153	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K3
	C154	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K3
	C201	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C202	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C203	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C204	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C205	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C206	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C207	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C208	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C209	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C210	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C211	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C215	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C216	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C252	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C253	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C254	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	K3
	C255	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	K3
	C256	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C257	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C258	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	K3
	C259	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C260	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	K3
	C301	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	
	C302	CC73HCH1H331J	C CAPACITOR	330pF 50V J	1	
	C303	NEZ0065-227X	E CAPACITOR	220uF	1	
	C304	NEZ0065-227X	E CAPACITOR	220uF	1	
	C305	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C306	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C307	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C308	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C309	CC73HCH1H330J	C CAPACITOR	33pF 50V J	1	
	C310	CC73HCH1H040C	C CAPACITOR	4pF 50V C	1	
	C311	CC73HCH1H080D	C CAPACITOR	8pF 50V D	1	
	C312	CC73HCH1H080D	C CAPACITOR	8pF 50V D	1	
	C313	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C314	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C315	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C316	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C317	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C318	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C319	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C320	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C321	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C322	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C328	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C329	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C330	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C331	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C332	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C333	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C334	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C337	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C339	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C340	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C341	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C342	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C343	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C344	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C345	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C346	CK730BY1A476K	C CAPACITOR	47uF 10V K	1	
	C501	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C502	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C503	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C504	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C505	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C506	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C507	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C510	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C511	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C512	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C513	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C514	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C515	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C520	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C521	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C522	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C523	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C524	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C525	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C526	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C527	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C528	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C529	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C530	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C531	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C532	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C533	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C534	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C535	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C536	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C537	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C538	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C539	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C540	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C541	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C542	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C543	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C544	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C545	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C549	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C550	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
	C551	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C552	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	

MODEL		MARK	MODEL		MARK	MODEL		MARK
DDX6703S		K4	DDX6903S		K3	DDX8016DABS		E1
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local		
	C553	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1			
	C554	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1			
	C558	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	1			
	C559	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	1			
	C560	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	1			
	C561	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1			
	C562	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1			
	C563	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1			
	C564	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1			
	C565	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1			
	C566	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1			
	C567	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1			
	C568	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1			
	C569	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1			
	C571	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1			
	C603	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1			
	C605	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1			
	C606	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1			
	C607	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1			
	C609	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1			
	C612	NCJ41CK-476X-A	C CAPACITOR	47uF 16V K	1			
	C613	CK730BY1A476K	C CAPACITOR	47uF 10V K	1			
	C615	CK73HBB1A683K	C CAPACITOR	0.068uF 10V K	1			
	C616	CK73HBB1A683K	C CAPACITOR	0.068uF 10V K	1			
	C617	NCJ41CK-476X-A	C CAPACITOR	47uF 16V K	1			
	C620	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1			
	C711	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1			
	C712	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1			
	C714	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C715	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1			
	C716	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1			
	C717	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1			
	C718	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1			
	C719	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1			
	C751	NEZ0068-227X	AS E CAPACITOR	220uF	1			
	C752	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1			
	C753	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1			
	C760	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1			
	C761	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1			
	C791	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1			
	C792	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1			
	C793	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1			
	C794	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1			
	C795	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1			
	C831	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1			
	C832	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1			
	C833	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1			
	C879	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C881	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C882	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C884	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C885	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C886	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C887	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C888	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C890	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1			
	C891	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C892	CE32BJ1C470M	E CAPACITOR	47uF 16V M	1			
	C893	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1			
	C895	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C896	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C897	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C898	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1			
	C899	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1			
	C922	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1			
	C923	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1			
	C924	NDCA1HG-2R7W	C CAPACITOR	2.7pF 50V G	1			
	C925	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C926	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1			
	C927	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C928	CC73HCH1H6R8D	C CAPACITOR	6.8pF 50V D	1			
	C929	CC73HCH1H090D	C CAPACITOR	9pF 50V D	1			
	C931	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	1			
	C932	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C933	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C934	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C935	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1			
	C936	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1			
	C937	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1			
	C938	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C939	CC73HCH1H020C	C CAPACITOR	2pF 50V C	1			
	C940	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	C951	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1			
	C952	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1			
	C953	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1			
	R1	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1			
	R2	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1			
	R3	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	1			
	R4	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1			
	R5	RK73HH1J513D	MG RESISTOR	51kΩ 1/16W D	1			
	R6	RK73HH1J333D	MG RESISTOR	33kΩ 1/16W D	1			
	R7	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1			

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R8	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R9	RK73HH1J822D	MG RESISTOR	8.2kΩ 1/16W D	1	
	R10	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R11	RK73HH1J244D	MG RESISTOR	240kΩ 1/16W D	1	
	R12	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R13	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R14	RK73HH1J304D	MG RESISTOR	300kΩ 1/16W D	1	
	R15	RK73HH1J304D	MG RESISTOR	300kΩ 1/16W D	1	
	R16	RK73HH1J822D	MG RESISTOR	8.2kΩ 1/16W D	1	
	R17	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R18	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	
	R19	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R20	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R31	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	
	R33	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R34	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R35	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R36	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R37	RK73HH1J222D	MG RESISTOR	2.2kΩ 1/16W D	1	
	R38	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	
	R39	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R40	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R41	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R51	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	
	R53	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R54	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R55	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R56	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R57	RK73HH1J222D	MG RESISTOR	2.2kΩ 1/16W D	1	
	R58	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	
	R59	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R60	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R61	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R62	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	
	R91	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	
	R92	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R94	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R95	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R96	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	
	R97	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R98	RK73HH1J222D	MG RESISTOR	2.2kΩ 1/16W D	1	
	R99	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	
	R100	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R101	RK73EB2E151J	MG RESISTOR	150Ω 1/4W J	1	
	R102	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R103	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R104	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R105	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R106	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R107	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R110	NRZ0133-R030X	MG RESISTOR	0.03Ω	1	
	R111	NRZ0133-R030X	MG RESISTOR	0.03Ω	1	
	R112	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R113	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R114	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R115	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R116	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R117	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R118	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R119	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R120	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R121	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R122	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R123	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	
	R124	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R125	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R127	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R129	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R131	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	K3
	R132	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3
	R134	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K3
	R135	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R136	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	K3
	R137	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	K3
	R138	RK73HH1J222D	MG RESISTOR	2.2kΩ 1/16W D	1	K3
	R139	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K3
	R140	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R141	RK73EB2E151J	MG RESISTOR	150Ω 1/4W J	1	K3
	R142	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K3
	R143	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R144	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K3
	R145	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K3
	R146	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3
	R147	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R150	NRZ0133-R030X	MG RESISTOR	0.03Ω	1	K3
	R151	NRZ0133-R030X	MG RESISTOR	0.03Ω	1	K3
	R152	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	K3
	R153	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K3
	R154	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	K3
	R155	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K3
	R156	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K3
	R157	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	K3

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R158	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K3
	R159	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	K3
	R160	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K3
	R161	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K3
	R162	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K3
	R163	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	K3
	R164	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R165	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K3
	R167	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R169	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R188	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R189	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R201	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R203	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R205	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R206	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R207	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R208	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R209	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R210	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R211	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R212	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R216	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R224	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R225	RK73HH1J822D	MG RESISTOR	8.2kΩ 1/16W D	1	
	R226	RK73HH1J821D	MG RESISTOR	820Ω 1/16W D	1	
	R227	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R228	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R301	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R306	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R307	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R308	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R309	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R310	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R311	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R312	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R313	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R314	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R315	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R316	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	
	R317	RK73HB1J154J	MG RESISTOR	150kΩ 1/16W J	1	
	R318	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R320	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R321	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R322	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R323	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R324	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R325	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R326	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R327	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R328	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R329	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R330	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R331	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R332	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R333	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R334	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R335	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R337	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R338	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R339	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R340	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R341	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R342	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R343	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R344	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R345	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R346	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	1	
	R347	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R348	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R349	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R350	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R351	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R352	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R356	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R357	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R358	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R359	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R360	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R361	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R362	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R363	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R365	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R366	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R367	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R368	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R369	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R370	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R371	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R372	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R373	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R374	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R375	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R376	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R377	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R378	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R379	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R380	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R381	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R382	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R383	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R384	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R385	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R386	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R387	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R388	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R389	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R390	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R391	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R392	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R393	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R395	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R396	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R400	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R401	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R402	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R403	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R404	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R405	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R406	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R407	RK73HH1J134D	MG RESISTOR	130kΩ 1/16W D	1	E1
	R409	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R410	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R411	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	K4,E1
	R411	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	K3
	R412	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	
	R413	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R415	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R418	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R419	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R420	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R421	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R422	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R423	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	1	
	R424	RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J	1	
	R425	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R426	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	
	R427	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R428	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	
	R429	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R430	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R431	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R432	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R433	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R434	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R435	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R437	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R503	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R504	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R506	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R507	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R508	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R510	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R511	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R512	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R513	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R514	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R515	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R518	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R519	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R520	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R521	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R522	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R523	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R524	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R531	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R532	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R533	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R534	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R535	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R536	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R538	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R539	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R540	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R541	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R542	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R543	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R544	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R545	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R546	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R547	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R550	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R551	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R552	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R553	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R554	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R555	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R556	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R558	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R559	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R560	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R561	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R562	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R563	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R564	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R565	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R566	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R567	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R568	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R569	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R570	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R573	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R574	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R575	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R576	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R577	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R578	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R579	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R582	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R583	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R584	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R585	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R586	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R588	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R589	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R590	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R591	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R592	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R593	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R594	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R595	RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1	
	R596	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R599	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R600	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R604	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R609	RK73HB1J203J	MG RESISTOR	20kΩ 1/16W J	1	
	R610	RK73HB1J203J	MG RESISTOR	20kΩ 1/16W J	1	
	R611	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R612	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	
	R614	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	
	R615	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R616	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R617	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R618	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R620	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R621	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R622	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R624	RK73HB1J752J	MG RESISTOR	7.5kΩ 1/16W J	1	
	R638	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R711	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	K4,K3
	R712	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	K4,K3
	R713	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K4,K3
	R714	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K4,K3
	R715	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R717	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R718	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K4,K3
	R719	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K4,K3
	R720	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	K4,K3
	R723	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4,K3
	R724	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R725	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R726	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	K4,K3
	R727	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	K4,K3
	R728	RK73HB1J362J	MG RESISTOR	3.6kΩ 1/16W J	1	K4,K3
	R729	RK73HB1J362J	MG RESISTOR	3.6kΩ 1/16W J	1	K4,K3
	R755	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R756	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R757	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R758	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R759	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R760	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R791	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R792	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R793	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R794	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R795	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R796	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R797	RK73HB1J620J	MG RESISTOR	62Ω 1/16W J	1	
	R821	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R822	RK73HB1J750D	MG RESISTOR	75Ω 1/16W D	1	
	R825	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R826	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R827	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R828	RK73HB1J750D	MG RESISTOR	75Ω 1/16W D	1	
	R831	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1
	R832	RK73HB1J750D	MG RESISTOR	75Ω 1/16W D	1	E1
	R833	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	E1
	R836	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	E1

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R837	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	E1
	R838	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	E1
	R839	RK73HB1J750J	MG RESISTOR	75Ω 1/16W J	1	
	R871	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R872	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R873	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R874	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R876	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R877	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R878	RK73HH1J391D	MG RESISTOR	390Ω 1/16W D	1	
	R879	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	
	R884	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R886	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R887	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R888	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R889	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	
	R890	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	
	R891	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R921	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R922	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R925	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R926	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R952	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R954	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R956	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R958	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R960	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R961	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R962	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R963	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	1	
	R964	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R965	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	1	
	R966	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	1	
	R967	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R968	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R970	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	L32	NQR0723-001X	CHOKE COIL		1	
	L52	NQR0723-001X	CHOKE COIL		1	
	L92	NQR0723-001X	CHOKE COIL		1	
	L132	NQR0723-001X	CHOKE COIL		1	K3
	L301	NQR0199-003X	FERRITE BEADS		1	
	L751	LR79Z0AG100M	CHIP INDUCTOR	10uH	1	
	L871	NQL77GK-100X	INDUCTOR	10uH K	1	
	L921	NQLP9AJ-27NX	INDUCTOR	27nH J	1	
	L922	NQLP7AG-8N2X	INDUCTOR	8.2nH G	1	
	L923	NQLZ021-9N1X	INDUCTOR	9.1nH	1	
	L924	NQR0593-001X	FERRITE BEADS		1	
	L925	NQR0593-001X	FERRITE BEADS		1	
	L926	NAX1261-001X	SAW FILTER		1	
	A921	NAU0020-001X	RF MODULE		1	
	A951	W0C-0167-00	CIRCUIT MODULE		1	
	CN1	QGA2001F1-04	W TO B CONNE	W-B (1-4)	1	
	CN201	QGA2001C1-02	W TO B CONNE	W-B (1-2)	1	
	CN251	QGA2001C1-05	W TO B CONNE	W-B (1-5)	1	
	CN252	QGA2015F1-10	W TO B CONNE	W-B (1-10)	1	
	CN301	QGA1002F1-08X	W TO B CONNE	W-B (1-8)	1	
	CN601	EB770AX-05C0A	B TO B CONNE		1	
	CN602	QGF0534F7-50X	FFC/FPC CONNE	FFC/FPC (1-50)	1	
	CN603	QGF0534F7-60X	FFC/FPC CONNE	FFC/FPC (1-60)	1	
	CN711	QGA2021F1-04	W TO B CONNE	W-B (1-4)	1	K4,K3
	CN751	QGF0536CA-35W	FFC/FPC CONNE	FFC/FPC (1-35)	1	
	CN801	QGA2001C1-05	W TO B CONNE	W-B (1-5)	1	E1
△	CN802	QGA2001C1-04	W TO B CONNE	W-B (1-4)	1	
△	F1	FZA10BZ-7R0	FUSE (CC)		1	
△	F711	F53-0513-08	PATTERN FUSE	4A	1	
△	F712	F53-0513-08	PATTERN FUSE	4A	1	
△	F713	F53-0513-08	PATTERN FUSE	4A	1	
△	F751	NMFZ031-1R0X-H	FUSE	1A	1	
△	F791	F53-0513-08	PATTERN FUSE	4A	1	
△	F801	F53-0513-08	PATTERN FUSE	4A	1	
△	F802	F53-0513-08	PATTERN FUSE	4A	1	
△	F832	F53-0513-08	PATTERN FUSE	4A	1	
	J601	QNS0307-001	3.5 JACK		1	
	J711	QNS0307-001	3.5 JACK		1	
	J791	QNS0291-001	3.5 JACK		1	
	J921	QNZ1055-001	COAXIAL JACK		1	
	VA251	SDV1005H26//0	VARIATOR		1	K3
	VA252	SDV1005H26//0	VARIATOR		1	K3
	VA253	SDV1005H26//0	VARIATOR		1	
	VA254	SDV1005H26//0	VARIATOR		1	
	VA711	NAF0043-8R0X	VARIATOR(ZNR)		1	
	VA712	NAF0043-8R0X	VARIATOR(ZNR)		1	
	VA713	NAF0043-8R0X	VARIATOR(ZNR)		1	
	VA791	NAF0043-8R0X	VARIATOR(ZNR)		1	
	VA792	NAF0043-8R0X	VARIATOR(ZNR)		1	
	VA793	NAF0044-270X	VARIATOR(ZNR)		1	
	VA794	NAF0044-270X	VARIATOR(ZNR)		1	
	VA823	NAF0044-270X	VARIATOR(ZNR)		1	
	VA824	NAF0044-270X	VARIATOR(ZNR)		1	
	VA832	NAF0044-270X	VARIATOR(ZNR)		1	E1
	VA835	NAF0044-270X	VARIATOR(ZNR)		1	
	VA836	NAF0043-8R0X	VARIATOR(ZNR)		1	E1

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	VA837	NAF0043-8R0X	VARISTOR(ZNR)		1	E1
	VA838	NAF0043-8R0X	VARISTOR(ZNR)		1	E1
	VA921	NAF0029-002X	ESD SUPPRESSOR		1	
	X301	NAX1248-001X	CRYSTAL		1	
	X302	NAX1137-001X	CRYSTAL		1	
	X501	NAX1204-001X	CRYSTAL		1	
	X921	L7J-0051-00	QUARTZ CRYSTAL		1	
	X922	NAX1248-001X	CRYSTAL		1	

DIGITAL IO PWB ASSY (XJA-042x-0x) <XJA>

IC501	TCC8930G-0CX	MPU IC		1	
IC503	W3F-0176-00	IC		1	
IC525	-----	ROM IC	NO SERVICE PART	1	
IC531	NT5CC256M16DD	DRAM IC		1	K4,K3
IC531	K4B4G1646EBY0	DRAM IC		1	E1
IC532	NT5CC256M16DD	DRAM IC		1	K4,K3
IC532	K4B4G1646EBY0	DRAM IC		1	E1
IC541	ML86250LAZ07F	MOS IC		1	
IC543	TC7WBL3305CFK	MOS IC		1	
IC544	TC7SH08FUJC	MOS IC		1	
IC545	TC7SH32FUJC	MOS IC		1	
IC563	MF1337S395901	MCU IC		1	
IC591	MP9943AGQ	ANALOG IC		1	
IC592	MP9943AGQ	ANALOG IC		1	
IC594	XC6223H251M-G	ANALOG IC		1	
IC595	BU18TD3WG	MOS IC		1	
IC596	BD00IC0EEFJ-M	ANALOG IC		1	
IC597	BD15KA5WFP-X	IC		1	
IC601	MP9943AGQ	ANALOG IC		1	
IC631	NJM2561F1	BIPOLAR IC		1	
IC651	BU17101AKV-M	MOS IC		1	E1
IC5402	TC7SH08FUJC	MOS IC		1	
IC5701	TPS2543RTE	MOS IC		1	
IC5702	USB82512AM-A	MOS IC		1	K3
IC5704	TPS2543RTE	MOS IC		1	K3
Q5603	LTC014YEBFS8	DIGI TRANSISTOR		1	
Q5604	LTC014YEBFS8	DIGI TRANSISTOR		1	
Q5605	LTC014YEBFS8	DIGI TRANSISTOR		1	
Q5606	LTC014YEBFS8	DIGI TRANSISTOR		1	
Q5607	LSAR523UBFS8	TRANSISTOR		1	
Q5608	LSC4617FP8/QR	TRANSISTOR		1	
Q6301	LTC014YEBFS8	DIGI TRANSISTOR		1	
C631	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
C632	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C633	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	
C5001	NBZ0063-107X	OS E CAPACITOR	100uF	1	
C5002	NBZ0063-107X	OS E CAPACITOR	100uF	1	
C5003	NBZ0063-107X	OS E CAPACITOR	100uF	1	
C5004	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5005	CK73HBB0J224K	C CAPACITOR	0.22uF 6.3V K	1	
C5006	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5007	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5008	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5009	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5010	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5014	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5015	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5016	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5018	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5019	CK73HBB0J224K	C CAPACITOR	0.22uF 6.3V K	1	
C5020	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
C5021	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5022	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5023	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5024	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5025	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5026	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5027	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5028	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5029	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5030	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5031	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5032	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5033	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5034	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5035	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5036	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5037	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5038	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5039	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5041	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5045	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5047	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5048	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5049	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5053	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5054	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5055	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5056	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5057	CC73HCH1H080D	C CAPACITOR	8pF 50V D	1	
C5058	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5061	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C5062	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C5063	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5065	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5066	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5067	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5068	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5069	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5071	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5072	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5073	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5074	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5075	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5076	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5077	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5078	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5079	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5080	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C5083	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5084	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5085	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5086	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5087	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5088	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5089	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5096	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5097	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5098	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5099	NBZ0063-107X	OS E CAPACITOR	100uF	1	
	C5100	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5102	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5103	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5104	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5201	NBZ0063-107X	OS E CAPACITOR	100uF	1	
	C5202	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5203	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5204	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5251	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C5252	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C5253	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5255	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5259	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5263	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C5269	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C5301	NBZ0063-107X	OS E CAPACITOR	100uF	1	
	C5302	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5303	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5304	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5305	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5306	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5307	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5308	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5309	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5311	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5312	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5313	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5314	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5315	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5316	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5317	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5318	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5319	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5320	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5321	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5322	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5323	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5324	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5325	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5326	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5327	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5328	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5329	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5330	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5331	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5332	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5333	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5334	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5335	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5336	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5337	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5338	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5339	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5340	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5341	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5342	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5343	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5344	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5345	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5346	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5347	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5348	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5349	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5350	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5351	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5352	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C5353	CK73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5354	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5355	CK73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5356	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5357	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5358	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5359	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5360	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5361	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5362	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5363	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5364	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5365	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5366	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5367	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5368	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5369	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5370	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5372	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5373	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5374	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5375	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5376	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5377	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5378	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5379	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5380	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5381	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5382	CC73HCH1H181J	C CAPACITOR	180pF 50V J	1	
	C5383	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5385	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5471	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5472	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5473	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5474	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C5479	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5480	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5481	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5482	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5484	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5485	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5486	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5487	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5488	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5489	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5490	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5491	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	
	C5493	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	
	C5494	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C5495	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C5496	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	
	C5497	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C5498	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	
	C5499	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C5500	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C5501	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C5502	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C5503	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C5504	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5505	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5506	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5507	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5508	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5509	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5510	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5511	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C5512	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C5513	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5514	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5515	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5516	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C5517	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C5518	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	
	C5519	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	
	C5520	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5521	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5523	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5524	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	
	C5530	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5632	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C5701	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5702	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K3
	C5703	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K3
	C5704	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K3
	C5705	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K3
	C5706	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K3
	C5707	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K3
	C5710	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K3
	C5711	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K3
	C5714	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K3
	C5716	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	K3
	C5717	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K3

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C5718	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	K3
	C5719	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K3
	C5720	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	K3
	C5721	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	K3
	C5730	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	K3
	C5901	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5902	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5903	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5904	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5905	CK73GXR1E224K	C CAPACITOR	0.22uF 25V K	1	
	C5907	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5908	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5909	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5910	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	
	C5911	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	
	C5912	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	
	C5913	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C5914	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5915	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5916	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5917	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5918	CK73GXR1E224K	C CAPACITOR	0.22uF 25V K	1	
	C5920	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5921	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5922	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5923	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1	
	C5924	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	
	C5925	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	
	C5926	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C5931	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C5932	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C5933	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C5934	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C5936	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C5937	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C5938	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C5940	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C5941	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C5961	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	
	C5962	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	
	C5963	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	
	C5971	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5972	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5973	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5974	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5975	CK73GXR1E224K	C CAPACITOR	0.22uF 25V K	1	
	C5976	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5977	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5978	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5979	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5980	CK73GXR1E224K	C CAPACITOR	0.22uF 25V K	1	
	C5981	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5982	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5983	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5984	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5985	CK73GXR1E224K	C CAPACITOR	0.22uF 25V K	1	
	C5986	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5987	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5988	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5989	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C5990	CK73GXR1E224K	C CAPACITOR	0.22uF 25V K	1	
	C5991	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5993	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C5994	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C5995	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1	
	C5996	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	
	C5997	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	
	C5998	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C6026	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C6027	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	
	C6028	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C6029	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C6030	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C6301	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
	C6501	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C6502	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	E1
	C6504	CK73HXR0J474K	C CAPACITOR	0.47uF 6.3V K	1	E1
	C6505	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	E1
	C6506	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C6507	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	E1
	C6508	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C6509	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	E1
	C6510	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C6511	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C6512	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	E1
	C6514	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	E1
	C6516	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C6517	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C6518	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	E1
	C6519	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	E1
	R2	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R6	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R570	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R581	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R631	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	
	R632	RK73HH1J750D	MG RESISTOR	75Ω 1/16W D	1	
	R633	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R5001	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5002	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R5003	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5005	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5007	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5008	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5012	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5014	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5015	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5016	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5017	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5019	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5020	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5021	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5023	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5024	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5025	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5027	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5028	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5029	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5030	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	
	R5031	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R5032	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5033	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5034	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R5035	RK73HH1J44R2D	MG RESISTOR	44.2Ω 1/16W D	1	
	R5036	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5037	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5038	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5039	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5040	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5043	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R5044	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	R5045	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5046	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5047	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5048	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5050	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5051	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5052	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5053	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5054	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5055	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5057	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R5058	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5060	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5061	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5063	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5064	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5065	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5066	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5068	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5070	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5071	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5072	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5073	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5076	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5078	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5079	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5081	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5083	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5089	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5090	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5091	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5093	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5095	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5098	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5100	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5102	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5103	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5105	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5109	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5111	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5112	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5113	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5114	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5115	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5116	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5120	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R5122	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5125	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5126	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5127	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5128	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K4,K3
	R5129	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5134	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5135	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5136	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R5137	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5139	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5140	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5149	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5150	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5151	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5201	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5203	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5204	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5205	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5206	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5220	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5221	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5222	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5223	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5224	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5225	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5226	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5227	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5231	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5232	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5233	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5234	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5236	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5237	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5238	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R5251	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5262	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5264	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5265	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5266	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5268	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5269	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5270	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5271	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5272	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5273	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5274	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5275	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5276	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5277	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5278	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	R5301	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5302	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5303	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5304	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5305	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R5306	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5307	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5308	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5309	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5310	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	
	R5311	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5312	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5313	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R5407	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5408	RK73HB1J390J	MG RESISTOR	39Ω 1/16W J	1	
	R5410	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R5411	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R5413	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5416	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5417	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5418	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5419	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5420	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5422	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	
	R5424	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	
	R5425	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	
	R5428	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5429	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R5430	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R5434	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5435	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5437	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5438	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5441	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5444	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5445	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5450	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5451	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5452	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5453	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5454	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5456	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5471	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5472	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R5473	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5474	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5481	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5482	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5483	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5484	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R5485	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5486	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5487	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5488	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5489	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5490	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5491	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5493	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5494	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5496	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5497	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5631	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5633	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5634	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5641	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	R5643	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5644	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5645	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5646	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5647	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5648	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5649	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5651	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5658	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5665	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5666	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R5667	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R5668	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5669	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5670	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R5672	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5679	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5703	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5704	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5705	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5707	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5708	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3
	R5709	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5710	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R5712	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5714	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3
	R5716	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K3
	R5717	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3
	R5718	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R5722	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4,E1
	R5723	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4,E1
	R5724	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K3
	R5725	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3
	R5726	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K3
	R5727	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R5728	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K3
	R5731	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R5732	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R5733	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R5734	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R5748	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3
	R5749	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3
	R5754	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3
	R5755	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3
	R5756	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3
	R5757	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3
	R5758	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R5759	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R5762	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3
	R5763	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3
	R5764	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K3
	R5765	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K3
	R5766	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3
	R5767	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K3
	R5769	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K3
	R5771	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5772	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5775	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5776	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5790	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K3
	R5791	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K3
	R5797	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5798	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5804	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5805	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5806	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5807	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5808	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5809	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5810	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5811	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5812	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5813	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5815	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5816	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5817	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5819	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5820	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R5821	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5822	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5824	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5825	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5826	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5827	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5828	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5829	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5830	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5831	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5832	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5833	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5834	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5835	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5836	RK73HB1J561J	MG RESISTOR	560Ω 1/16W J	1	
	R5837	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5838	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5839	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5840	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5841	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5842	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5843	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5844	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5845	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5846	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5847	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5853	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5855	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5856	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5857	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5858	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5859	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5863	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5882	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5883	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5884	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5885	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5887	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5888	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5889	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R5916	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R5917	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5918	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	
	R5919	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R5920	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R5921	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5922	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R5923	RK73HH1J222D	MG RESISTOR	2.2kΩ 1/16W D	1	
	R5924	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R5925	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	
	R5926	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R5927	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5928	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	
	R5929	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R5930	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	1	
	R5931	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5932	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R5933	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R5934	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R5935	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R5952	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R5954	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R5955	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	
	R5956	RK73HH1J751D	MG RESISTOR	750Ω 1/16W D	1	
	R5964	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R5967	RK73HB1J201J	MG RESISTOR	200Ω 1/16W J	1	
	R5970	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R5971	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R5987	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R5988	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	
	R5989	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R5990	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	1	
	R5991	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R5992	RK73HH1J912D	MG RESISTOR	9.1kΩ 1/16W D	1	
	R5993	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R5994	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R5995	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R6001	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6002	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6003	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6004	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6005	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6007	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R6009	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6010	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6011	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6012	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6013	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6014	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6015	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6016	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6018	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	K4,K3

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R6315	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R6317	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R6318	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R6319	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R6321	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R6322	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R6323	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R6324	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R6327	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R6329	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6330	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R6331	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R6505	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R6508	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R6510	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R6512	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1
	R6514	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R6516	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	E1
	RA5001	RK74HB1J103J	NET RESISTOR	10kΩ 1/16W J	1	
	RA5201	RK74HB1J473J	NET RESISTOR	47kΩ 1/16W J	1	
	RA5202	RK74HB1J473J	NET RESISTOR	47kΩ 1/16W J	1	
	L631	LB73G0BK-003	CHIP FERRITE		1	
	L5001	LB73G0BK-002	CHIP FERRITE		1	
	L5002	LB73G0BK-002	CHIP FERRITE		1	
	L5004	LB73G0BK-002	CHIP FERRITE		1	
	L5402	LB73G0BK-003	CHIP FERRITE		1	
	L5403	LB73G0BK-003	CHIP FERRITE		1	
	L5405	LB73G0BK-003	CHIP FERRITE		1	
	L5406	LB73G0BK-003	CHIP FERRITE		1	
	L5901	LR7920EW5R1N	CHIP INDUCTOR		1	
	L5902	LR7920HX5R1N	CHIP INDUCTOR		1	
	L5903	LR7920EW5R1N	CHIP INDUCTOR		1	
	L6001	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6002	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6003	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6004	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6005	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6006	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6007	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6008	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6009	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6010	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6011	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6012	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6013	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6014	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6015	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6016	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6017	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6018	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6019	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6020	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6021	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6022	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6023	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6024	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6025	NQLQ2EN-5R1X	INDUCTOR	5.1uH N	1	
	L6026	NQR0721-001X	FERRITE BEADS		1	K4,K3
	L6502	LB73H0BG-003	CHIP FERRITE		1	E1
	L6503	NQR0560-001X	EMI FILTER		1	E1
	CN527	EC720AT-0516B	FFC FPC CONNE		1	
	CN571	QGA2001F6-05X	W TO B CONNE	W-B (1-5)	1	
	CN572	QGA1501F4-03W	W TO B CONNE	W-B (1-3)	1	
	CN581	EB760AX-05C0B	B TO B CONNE		1	
	CN601	EC720AB-0570A	FFC FPC CONNE		1	
△	F5901	FZA10BF-R50	FUSE (CC)	0.5A	1	
△	F5902	FZA10BF-R50	FUSE (CC)	0.5A	1	
	VA6301	SDV1005H26//0	VARIATOR		1	
	VA6302	SDV1005H26//0	VARIATOR		1	
	VA6303	SDV1005H26//0	VARIATOR		1	
	X5001	NAX1179-001X	CRYSTAL		1	
	X5401	NAX1145-001X	CRYSTAL		1	
	X5701	NAX1179-001X	CRYSTAL		1	K3
AUDIO PWB ASSY (XJ6-054x-0x) <XJ6>						
	IC1	LV5680NPVC-H	MOS IC		1	
	IC41	XC6223B331PG-X	IC		1	
	IC101	JCV8031	IC		1	
	IC115	TC7SH17FUF	MOS IC		1	
	IC201	TDA7715	ANALOG IC		1	
	IC260	TC74HCT4053FT	MOS IC		1	K4,K3
	IC261	NJM2794RB2-X	IC		1	
	IC301	XC6223B331PG-X	IC		1	
	IC361	W3F-0174-00	IC(MCU)		1	E1
	IC511	TC7SET32FU-X	IC(DIGITAL)	OR	1	
	IC512	TC7SH17FUF	MOS IC		1	
	IC601	NJW1240V-X	IC		1	K3
	Q31	LSCR523UBFS8	TRANSISTOR		1	
	Q32	LSAR523UBFS8	TRANSISTOR		1	
	Q51	LTC024EUBFS8	DIGI TRANSISTOR		1	
	Q80	LTA014YEBFS8	DIGI TRANSISTOR		1	
	Q81	LSAR523UBFS8	TRANSISTOR		1	
	Q82	LSCR523UBFS8	TRANSISTOR		1	
	Q90	LTC024EUBFS8	DIGI TRANSISTOR		1	
	Q96	LSCR523UBFS8	TRANSISTOR		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q151	LTC014YUBFS8	DIGI TRANSISTOR		1	
	Q152	LTA043ZUBFS8	DIGI TRANSISTOR		1	
	Q155	LTC014YUBFS8	DIGI TRANSISTOR		1	
	Q156	LTA043ZUBFS8	DIGI TRANSISTOR		1	
	Q161	LTC043TUBFS8	DIGI TRANSISTOR		1	
	Q162	LTC043TUBFS8	DIGI TRANSISTOR		1	
	Q163	LTC043TUBFS8	DIGI TRANSISTOR		1	
	Q164	LTC043TUBFS8	DIGI TRANSISTOR		1	
	Q165	LTC043TUBFS8	DIGI TRANSISTOR		1	
	Q191	LTA043ZUBFS8	DIGI TRANSISTOR		1	
	Q193	LTC043TUBFS8	DIGI TRANSISTOR		1	
	Q194	LTC043TUBFS8	DIGI TRANSISTOR		1	
	Q551	RE1C002ZP-X	MOS FET		1	E1
	Q561	RE1C002ZP-X	MOS FET		1	E1
	Q571	LTC014YUBFS8	DIGI TRANSISTOR		1	E1
	D1	1N5402-BPC04	DIODE		1	
	D2	GS1J-LTP	DIODE		1	E1
	D11	RB161M-20	SCHOTTKY DIODE		1	
	D32	DZ2J110M	ZENER DIODE		1	
	D41	GS1J-LTP	DIODE		1	
	D42	GS1J-LTP	DIODE		1	K4,K3
	D43	GS1J-LTP	DIODE		1	
	D44	GS1J-LTP	DIODE		1	K4,K3
	D61	DZ2J062M	ZENER DIODE		1	
	D71	MC2846-X	SI DIODE		1	
	D80	DA2J101	DIODE		1	
	D90	DA2J101	DIODE		1	
	D96	DZ2J160M	ZENER DIODE		1	
	D101	MC2846-X	SI DIODE		1	
	D151	MC2846-X	SI DIODE		1	
	D155	MC2846-X	SI DIODE		1	
	D191	MC2846-X	SI DIODE		1	
	D202	DA2J101	DIODE		1	
	D203	MC2846-X	SI DIODE		1	
	D204	MC2846-X	SI DIODE		1	
	D205	MC2846-X	SI DIODE		1	
	D260	DA2J101	DIODE		1	
	D261	DZ2J047M	ZENER DIODE		1	
	D302	GS1J-LTP	DIODE		1	
	D381	DZ2J033M	ZENER DIODE		1	E1
	D552	MC2848-X	SI DIODE		1	E1
	C1	CD04AZ1C332M2	E CAPACITOR	3300uF 16V M	1	
	C11	CE32CB1V101M	E CAPACITOR	100uF 35V M	1	
	C12	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C13	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	
	C14	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	
	C15	CE32CB1A101M	E CAPACITOR	100uF 10V M	1	
	C16	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	
	C18	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C19	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C20	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	
	C21	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C23	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C24	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C25	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C26	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C27	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	
	C31	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C32	CK73GBB1H333K	C CAPACITOR	0.033uF 50V K	1	
	C41	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C42	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C51	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C52	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C71	NCJA1EK-104W-G	C CAPACITOR	0.1uF 25V K	1	
	C80	CK73GBB0J225K	C CAPACITOR	2.2uF 6.3V K	1	
	C90	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C96	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C97	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C100	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	
	C101	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C102	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C103	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C104	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C105	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C106	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C109	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C110	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C111	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C112	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C113	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C114	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C115	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C121	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C122	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C123	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C124	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C125	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C126	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C127	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C128	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C131	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C132	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C133	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C134	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C135	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C136	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C137	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C138	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C145	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C146	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C151	CE32CA1C100M	E CAPACITOR	10uF 16V M	1	
	C152	CE32CA1C100M	E CAPACITOR	10uF 16V M	1	
	C153	CK73EBB1C106K	C CAPACITOR	10uF 16V K	1	
	C154	CK73EBB1C106K	C CAPACITOR	10uF 16V K	1	
	C155	CK73EBB1C106K	C CAPACITOR	10uF 16V K	1	
	C171	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C172	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C173	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C174	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C175	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C177	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C191	CK73EBB1C106K	C CAPACITOR	10uF 16V K	1	
	C192	CK73EBB1C106K	C CAPACITOR	10uF 16V K	1	
	C195	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C196	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C197	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C201	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	
	C202	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C203	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C204	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	
	C205	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C206	CK73GBB0J105K	C CAPACITOR	1uF 6.3V K	1	
	C207	CK73GBB1A474K	C CAPACITOR	0.47uF 10V K	1	
	C208	CK73GBB0J105K	C CAPACITOR	1uF 6.3V K	1	
	C209	CK73GBB1A474K	C CAPACITOR	0.47uF 10V K	1	
	C211	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C212	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C213	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C214	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C215	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C216	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C217	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C218	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C219	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C220	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C221	CE32CA1C100M	E CAPACITOR	10uF 16V M	1	
	C222	CE32CA1C100M	E CAPACITOR	10uF 16V M	1	
	C223	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C224	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C225	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C227	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C228	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C229	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C264	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4,K3
	C265	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4,K3
	C266	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4,K3
	C267	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K4,K3
	C268	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	K4,K3
	C272	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4,K3
	C273	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4,K3
	C274	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4,K3
	C275	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C276	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C277	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C278	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	
	C279	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C280	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	
	C281	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C282	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C283	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4,K3
	C284	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4,K3
	C285	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	K4,K3
	C302	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	
	C303	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C304	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C305	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C306	CK73FBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C308	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C309	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C321	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C322	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C358	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C359	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	E1
	C361	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	E1
	C362	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C363	CK730AU0J474K	C CAPACITOR	0.47uF 6.3V K	1	E1
	C371	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	E1
	C501	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4,K3
	C502	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4,K3
	C503	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K4,K3
	C511	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C512	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C551	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	E1
	C561	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	E1

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C571	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	E1
	C601	CE32CA1C100M	E CAPACITOR	10uF 16V M	1	K3
	C602	CE32CA1C100M	E CAPACITOR	10uF 16V M	1	K3
	C603	CK73EBB1C106K	C CAPACITOR	10uF 16V K	1	K3
	C604	CK73EBB1C106K	C CAPACITOR	10uF 16V K	1	K3
	C605	CK73EBB1C106K	C CAPACITOR	10uF 16V K	1	K3
	C610	CK73EBB1C106K	C CAPACITOR	10uF 16V K	1	K3
	C611	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	K3
	C612	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K3
	C613	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K3
	C614	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K3
	C616	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K3
	C618	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	K3
	C619	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K3
	C713	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C714	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C715	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C716	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C721	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C722	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	R15	RK73GH2A273D	MG RESISTOR	27kΩ 1/10W D	1	
	R17	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	
	R18	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R19	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R23	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R24	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R25	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R27	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R31	RK73EB2E622J	MG RESISTOR	6.2kΩ 1/4W J	1	
	R32	RK73EB2E622J	MG RESISTOR	6.2kΩ 1/4W J	1	
	R33	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	
	R34	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R35	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	1	
	R36	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	
	R37	RK73EB2E153J	MG RESISTOR	15kΩ 1/4W J	1	
	R38	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E1
	R41	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	
	R42	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	K4,K3
	R51	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R52	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	
	R61	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	
	R72	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R73	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	
	R74	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R80	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R81	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R82	RK73FB2B103J	MG RESISTOR	10kΩ 1/8W J	1	
	R83	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R84	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R90	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R91	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R96	RK73FB2B752J	MG RESISTOR	7.5kΩ 1/8W J	1	
	R97	RK73HB1J753J	MG RESISTOR	75kΩ 1/16W J	1	
	R98	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R101	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1	
	R102	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1	
	R103	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1	
	R104	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1	
	R115	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R141	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R142	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R143	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R144	RK73HB1J751J	MG RESISTOR	750Ω 1/16W J	1	
	R145	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R146	RK73HB1J3R0J	MG RESISTOR	3Ω 1/16W J	1	
	R147	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R148	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R151	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R152	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R153	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R154	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R155	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R156	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R157	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R159	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R161	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R162	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R163	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R164	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R165	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R171	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R172	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R173	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R174	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R175	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R181	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,E1
	R182	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,E1
	R183	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,E1
	R184	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,E1
	R185	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,E1
	R191	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R192	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R193	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R194	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R195	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R196	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R201	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R202	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R204	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R205	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R206	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R209	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R213	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R214	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R215	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R217	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R218	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R223	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R224	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R225	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R264	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R265	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R266	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R274	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R275	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R276	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R279	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R280	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R281	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R283	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R284	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R285	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R290	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R291	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R293	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R294	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K4,K3
	R301	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R331	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4,K3
	R332	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4,K3
	R333	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4,K3
	R334	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4,K3
	R361	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	E1
	R362	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R363	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1
	R364	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R365	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R366	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R367	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	E1
	R371	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R372	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R373	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1
	R374	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R375	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R377	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	E1
	R378	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R379	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1
	R383	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R385	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E1
	R387	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	E1
	R391	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	E1
	R500	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K4,K3
	R501	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K4,K3
	R502	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K4,K3
	R503	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	K4,K3
	R504	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K4,K3
	R511	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R512	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R513	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R514	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	
	R515	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R516	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R517	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R551	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	E1
	R552	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	E1
	R553	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	E1
	R554	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	E1
	R555	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	E1
	R556	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	E1
	R557	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1
	R561	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	E1
	R562	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	E1
	R563	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	E1
	R564	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	E1
	R565	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	E1
	R566	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	E1
	R567	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	E1
	R611	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K3
	R612	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K3
	R614	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K3
	R615	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K3
	R616	RK73HB1J684J	MG RESISTOR	680kΩ 1/16W J	1	K3
	R824	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R825	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R967	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R968	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	L1	QQR1883-002	CHOKE COIL		1	
	L301	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L601	LK73G0AQ1R0K	M.CHIP INDUCTOR	1uH	1	K3
	A301	QAU0565-001	TUNER		1	K4,K3
	A301	QAU0567-001	TUNER		1	E1
	CN201	QGF0534F7-60X	FFC/FPC CONNE	FFC/FPC (1-60)	1	
	CN301	QGF0534F7-50X	FFC/FPC CONNE	FFC/FPC (1-50)	1	
	CN302	QGA2001C6-04X	W TO B CONNE	W-B (1-4)	1	
△	F171	F53-0513-08	PATTERN FUSE	4A	1	
△	F191	F53-0513-08	PATTERN FUSE	4A	1	
△	F500	FZA10BZ-3R0	FUSE (CC)		1	E1
△	F571	F53-0513-08	PATTERN FUSE	4A	1	
	J1	QNZ1064-001	CAR CONNECTOR		1	
	J151	QNN0889-001	PIN JACK		1	
	J191	QNS0307-001	3.5 JACK		1	
	J351	QNB0353-001	ANT TERMINAL		1	E1
	J501	QNZ0907-001	CIR CONNECTOR		1	
	J551	QNS0307-001	3.5 JACK		1	E1
	TH101	NAF0048-471X	P THERMISTOR		1	
	VA52	NAF0042-270X	VARISTOR(ZNR)		1	
	VA62	NAF0042-270X	VARISTOR(ZNR)		1	
	VA72	NAF0042-270X	VARISTOR(ZNR)		1	
	VA74	NAF0044-270X	VARISTOR(ZNR)		1	
	VA75	NAF0044-270X	VARISTOR(ZNR)		1	
	VA96	NAF0042-270X	VARISTOR(ZNR)		1	
	VA171	NAF0045-180X	VARISTOR(ZNR)		1	
	VA172	NAF0045-180X	VARISTOR(ZNR)		1	
	VA173	NAF0045-180X	VARISTOR(ZNR)		1	
	VA174	NAF0045-180X	VARISTOR(ZNR)		1	
	VA175	NAF0045-180X	VARISTOR(ZNR)		1	
	VA177	NAF0045-180X	VARISTOR(ZNR)		1	
	VA195	NAF0045-180X	VARISTOR(ZNR)		1	
	VA196	NAF0045-180X	VARISTOR(ZNR)		1	
	VA197	NAF0045-180X	VARISTOR(ZNR)		1	
	VA301	NAF0029-002X	ESD SUPPRESSOR		1	
	VA351	NAF0029-002X	ESD SUPPRESSOR		1	E1
	VA501	NAF0045-180X	VARISTOR(ZNR)		1	K4,K3
	VA502	NAF0045-180X	VARISTOR(ZNR)		1	K4,K3
	VA503	NAF0045-180X	VARISTOR(ZNR)		1	K4,K3
	VA511	NAF0042-270X	VARISTOR(ZNR)		1	
	VA512	NAF0042-270X	VARISTOR(ZNR)		1	
	VA513	NAF0042-270X	VARISTOR(ZNR)		1	
	VA551	NAF0042-270X	VARISTOR(ZNR)		1	E1
	VA561	NAF0042-270X	VARISTOR(ZNR)		1	E1
	VA571	NAF0042-270X	VARISTOR(ZNR)		1	E1
	W301	QAM1484-001	CAR CABLE		1	
VIDEO PWB ASSY (XJ8-024x-0x) <XJ8>						
	IC100	W3F-0175-00	MCU IC		1	
	IC102	BU4228F	ANALOG IC		1	
	IC103	XC6223B331PG-X	IC		1	
	IC105	74AHC1G32GW-X	IC(DIGITAL)		1	
	IC106	TC7SH17FUF	MOS IC		1	
	IC200	LM3481MMX-X	IC		1	
	IC201	TC7SH17FUF	MOS IC		1	
	IC202	XC6213B332N-G	MOS IC		1	
	IC300	NJM2831F92-X	SV-ANALOGUE IC		1	
	IC400	BU17102AKV-M	MOS IC		1	E1
	IC800	PIC95603	IR DETECT UNIT		1	
	Q100	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q101	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q200	LTA043ZEBFS8	DIGI TRANSISTOR		1	
	Q201	LSAR523UBFS8	TRANSISTOR		1	
	Q202	RTQ035N03-W	MOS FET		1	
	Q203	LSAR523UBFS8	TRANSISTOR		1	
	Q204	LSCR523UBFS8	TRANSISTOR		1	
	Q205	LSCR523UBFS8	TRANSISTOR		1	
	Q206	LSCR523UBFS8	TRANSISTOR		1	
	Q207	LSAR523UBFS8	TRANSISTOR		1	
	Q208	LSCR523UBFS8	TRANSISTOR		1	
	Q209	LSCR523UBFS8	TRANSISTOR		1	
	Q210	LSCR523UBFS8	TRANSISTOR		1	
	Q211	LSCR523UBFS8	TRANSISTOR		1	
	Q212	LSCR523UBFS8	TRANSISTOR		1	
	Q213	LTC043ZEBFS8	DIGI TRANSISTOR		1	
	Q214	LTC043ZEBFS8	DIGI TRANSISTOR		1	
	Q215	LSCR523UBFS8	TRANSISTOR		1	
	Q216	LSCR523UBFS8	TRANSISTOR		1	
	Q300	LSCR523UBFS8	TRANSISTOR		1	
	Q301	LSCR523UBFS8	TRANSISTOR		1	
	Q302	LSAR523UBFS8	TRANSISTOR		1	
	Q303	LTA014YEBFS8	DIGI TRANSISTOR		1	
	Q304	LTA014EEBFS8	DIGI TRANSISTOR		1	
	Q305	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q306	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q307	LSAR523UBFS8	TRANSISTOR		1	
	Q308	LSCR523UBFS8	TRANSISTOR		1	
	Q309	LSCR523UBFS8	TRANSISTOR		1	
	Q310	LTA014YEBFS8	DIGI TRANSISTOR		1	
	Q311	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q312	LSCR523UBFS8	TRANSISTOR		1	
	Q313	LSCR523UBFS8	TRANSISTOR		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q400	LSCR523UBFS8	TRANSISTOR		1	
	Q401	LSAR523UBFS8	TRANSISTOR		1	
	Q402	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q403	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q404	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q405	LTC014YEBFS8	DIGI TRANSISTOR		1	
	Q500	2SC5585-E-X	TRANSISTOR		1	
	Q501	2SC5585-E-X	TRANSISTOR		1	
	Q502	2SA2018/F-X	TRANSISTOR		1	
	Q503	2SA2018/F-X	TRANSISTOR		1	
	Q504	LTA014YEBFS8	DIGI TRANSISTOR		1	
	Q505	LSCR523UBFS8	TRANSISTOR		1	
	Q506	LSCR523UBFS8	TRANSISTOR		1	
	Q800	LSCR523UBFS8	TRANSISTOR		1	
	Q801	LSCR523UBFS8	TRANSISTOR		1	
	Q802	LSCR523UBFS8	TRANSISTOR		1	
	Q803	LTA014YEBFS8	DIGI TRANSISTOR		1	
	Q804	LTC014YEBFS8	DIGI TRANSISTOR		1	
	D100	RB521S-30	SCHOTTKY DIODE		1	
	D200	SJPB-L4	SCHOTTKY DIODE		1	
	D201	DA2J101	DIODE		1	
	D202	DA2J101	DIODE		1	
	D205	RB162M-60	SCHOTTKY DIODE		1	
	D206	RB162M-60	SCHOTTKY DIODE		1	
	D705	MC2850-1	DIODE ARRAY		1	
	D800	LTRBR8SF/Z1Z1X	LED		1	
	D801	LTRBR8SF/Z1Z1X	LED		1	
	D802	SML-D12V8W/NPQX	LED		1	
	D803	SML-D12V8W/NPQX	LED		1	
	C100	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C101	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C102	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C103	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C104	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C105	CC73HCH1H221J	C CAPACITOR	220pF 50V J	1	
	C106	CK73HBB1C473K	C CAPACITOR	0.047uF 16V K	1	
	C107	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C108	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C109	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C111	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C112	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C113	CK73GBB0J105K	C CAPACITOR	1uF 6.3V K	1	
	C114	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	
	C115	CK73GBB0J105K	C CAPACITOR	1uF 6.3V K	1	
	C116	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C117	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C119	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C120	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C121	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C123	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C124	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C125	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C126	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C200	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C203	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C204	CK730BG1E106K	C CAPACITOR	10uF 25V K	1	
	C205	CK730CW1E103K	C CAPACITOR	0.01uF 25V K	1	
	C206	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C207	CK730BG1E106K	C CAPACITOR	10uF 25V K	1	
	C208	CK730BG1E106K	C CAPACITOR	10uF 25V K	1	
	C209	CK730CW1A104K	C CAPACITOR	0.1uF 10V K	1	
	C210	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C211	CC73GCH1H391J	C CAPACITOR	390pF 50V J	1	
	C212	CK730AV0J105K	C CAPACITOR	1uF 6.3V K	1	
	C213	CK730BG1E106K	C CAPACITOR	10uF 25V K	1	
	C214	CK730CW1A104K	C CAPACITOR	0.1uF 10V K	1	
	C215	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C216	CK730AV0J105K	C CAPACITOR	1uF 6.3V K	1	
	C217	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	
	C218	CK730CW1E103K	C CAPACITOR	0.01uF 25V K	1	
	C219	CK730BG1E106K	C CAPACITOR	10uF 25V K	1	
	C220	CK730BG1E106K	C CAPACITOR	10uF 25V K	1	
	C221	CK730AV0J105K	C CAPACITOR	1uF 6.3V K	1	
	C224	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C225	CK730BG1E106K	C CAPACITOR	10uF 25V K	1	
	C300	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C301	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C302	CK730BF1E475K	C CAPACITOR	4.7uF 25V K	1	
	C303	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C304	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C305	CK730BG1E106K	C CAPACITOR	10uF 25V K	1	
	C306	CK73FXR1E225K	C CAPACITOR	2.2uF 25V K	1	
	C307	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C308	CK73GXR1E105K	C CAPACITOR	1uF 25V K	1	
	C400	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	E1
	C401	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	E1
	C405	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C407	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	E1
	C408	CK73HBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C409	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C410	CK730BF1E475K	C CAPACITOR	4.7uF 25V K	1	
	C411	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C412	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C413	CK730BF1E475K	C CAPACITOR	4.7uF 25V K	1	
	C414	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C415	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C416	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C417	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C418	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C419	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C420	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C421	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C422	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	C423	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C424	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C425	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C426	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C427	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C428	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C429	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C430	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C431	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C432	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C433	CK73HCH1H270J	C CAPACITOR	27pF 50V J	1	K4,K3
	C434	CK73GBB1A474K	C CAPACITOR	0.47uF 10V K	1	E1
	C435	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	E1
	C436	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	E1
	C437	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	E1
	C438	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	E1
	C440	CK73GBB1A105K	C CAPACITOR	1uF 10V K	1	E1
	C441	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C508	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	
	C701	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C702	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C800	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C801	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C802	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C809	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C810	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	
	C811	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C812	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	
	C815	CK73GBB1H104K	C CAPACITOR	0.1uF 50V K	1	
	C816	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
	R1	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R5	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R6	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R8	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R9	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R10	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R11	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R12	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R13	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R14	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R15	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R16	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R17	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R18	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R19	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R20	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R21	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R22	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R23	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R24	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R25	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R27	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R29	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R31	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R34	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R36	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R37	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R39	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R41	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R42	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R43	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R44	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R45	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R46	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R47	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R48	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R49	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R50	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R51	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R52	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R53	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R54	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R55	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R56	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R57	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R58	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K4,K3
	R60	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R62	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R63	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R65	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R67	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R68	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R69	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R70	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R71	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R72	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R73	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R74	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R75	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R76	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R77	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R78	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R79	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R80	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R81	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R82	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R83	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R84	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R100	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R101	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R102	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R103	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R104	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R105	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R106	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R107	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R108	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R109	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R110	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R111	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R112	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R113	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R114	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R115	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R116	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R117	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R120	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R121	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R122	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R123	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R125	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R126	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R127	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R128	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R129	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R130	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R131	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R132	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R133	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R134	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R135	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R136	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R137	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R138	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R139	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R140	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R141	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R142	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R143	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R144	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R145	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R146	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R148	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R149	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R150	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R151	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R164	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R165	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R167	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R179	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R200	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R201	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R203	RK73GB2A511J	MG RESISTOR	510Ω 1/10W J	1	
	R204	RK73GB2A511J	MG RESISTOR	510Ω 1/10W J	1	
	R207	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R208	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R209	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R210	RK73HH1J152D	MG RESISTOR	1.5kΩ 1/16W D	1	
	R211	RK73HH1J134D	MG RESISTOR	130kΩ 1/16W D	1	
	R212	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R213	RK73HH1J751D	MG RESISTOR	750Ω 1/16W D	1	
	R214	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R215	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	
	R216	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R217	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R218	NR20126-R033X	MG RESISTOR	0.033Ω 1/3W J	1	
	R219	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R220	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R221	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R222	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R223	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R224	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R225	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R227	RK73GB2A511J	MG RESISTOR	510Ω 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R228	RK73GB2A511J	MG RESISTOR	510Ω 1/10W J	1	
	R229	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R230	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R231	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R232	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R233	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R234	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R235	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R236	RK73GB2A511J	MG RESISTOR	510Ω 1/10W J	1	
	R237	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R238	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R239	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R240	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R241	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R242	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R243	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R244	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R245	RK73GB2A511J	MG RESISTOR	510Ω 1/10W J	1	
	R246	NRZ0134-560X	MG RESISTOR	56Ω	1	
	R247	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R248	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R249	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R250	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R251	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R252	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R253	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R254	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R255	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R256	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R257	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R271	NRZ0134-560X	MG RESISTOR	56Ω	1	
	R272	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R273	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R274	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R275	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R276	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R277	RK73GH2A361D	MG RESISTOR	360Ω 1/10W D	1	
	R300	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R301	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R302	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1	
	R303	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	
	R304	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R305	RK73HH1J332D	MG RESISTOR	3.3kΩ 1/16W D	1	
	R306	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R307	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R308	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R309	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R310	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R311	RK73HH1J621D	MG RESISTOR	620Ω 1/16W D	1	
	R312	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R313	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R314	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R315	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R316	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R317	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R318	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R319	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R320	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R321	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R400	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	E1
	R401	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R402	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R403	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R404	RK73HH1J913D	MG RESISTOR	91kΩ 1/16W D	1	
	R405	RK73HH1J184D	MG RESISTOR	180kΩ 1/16W D	1	
	R406	RK73HH1J434D	MG RESISTOR	430kΩ 1/16W D	1	
	R407	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	
	R408	RK73HH1J153D	MG RESISTOR	15kΩ 1/16W D	1	
	R409	RK73HH1J433D	MG RESISTOR	43kΩ 1/16W D	1	
	R411	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R412	RK73EB2E392J	MG RESISTOR	3.9kΩ 1/4W J	1	
	R415	RK73HH1J620D	MG RESISTOR	62Ω 1/16W D	1	
	R416	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1	
	R417	RK73HH1J430D	MG RESISTOR	43Ω 1/16W D	1	
	R418	RK73HH1J390D	MG RESISTOR	39Ω 1/16W D	1	
	R419	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R420	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1	
	R421	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	
	R422	RK73HH1J390D	MG RESISTOR	39Ω 1/16W D	1	
	R423	RK73HH1J430D	MG RESISTOR	43Ω 1/16W D	1	
	R424	RK73HH1J161D	MG RESISTOR	160Ω 1/16W D	1	
	R425	RK73HH1J820D	MG RESISTOR	82Ω 1/16W D	1	
	R426	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R427	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R428	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R429	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R430	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R431	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R432	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1
	R434	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R436	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R440	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1
	R441	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	E1

MODEL		MARK	MODEL		MARK	MODEL		MARK
DDX6703S		K4	DDX6903S		K3	DDX8016DABS		E1
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local		
R443		RK73HB1J180J	MG RESISTOR	18Ω 1/16W J	1	K4,K3		
R444		RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	E1		
R450		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R454		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R455		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R456		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R457		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R458		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R459		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R460		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R461		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R462		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R463		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R464		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R465		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R466		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R467		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	E1		
R478		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1			
R479		RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1			
R480		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1			
R482		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1			
R483		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1			
R484		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1			
R485		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1			
R486		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1			
R487		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1			
R488		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1			
R489		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1			
R490		RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1			
R517		RK73GH2A220D	MG RESISTOR	22Ω 1/10W D	1			
R518		RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1			
R519		RK73GH2A220D	MG RESISTOR	22Ω 1/10W D	1			
R520		RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1			
R521		RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1			
R522		RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1			
R523		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1			
R524		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1			
R525		RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1			
R526		RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1			
R527		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1			
R528		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1			
R529		RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1			
R530		RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1			
R531		RK73HH1J621D	MG RESISTOR	620Ω 1/16W D	1			
R532		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1			
R533		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1			
R534		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1			
R535		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1			
R536		RK73GB2A224J	MG RESISTOR	220kΩ 1/10W J	1			
R628		RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1			
R629		RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1			
R722		RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1			
R800		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1			
R801		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1			
R802		RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1			
R803		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1			
R804		RK73GH2A181D	MG RESISTOR	180Ω 1/10W D	1			
R805		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1			
R806		RK73GH2A181D	MG RESISTOR	180Ω 1/10W D	1			
R807		RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1			
R808		RK73GH2A181D	MG RESISTOR	180Ω 1/10W D	1			
R809		RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1			
R810		RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1			
R813		RK73HB1J361J	MG RESISTOR	360Ω 1/16W J	1			
R814		RK73GB2A111J	MG RESISTOR	110Ω 1/10W J	1			
R815		RK73GB2A201J	MG RESISTOR	200Ω 1/10W J	1			
R816		RK73GB2A111J	MG RESISTOR	110Ω 1/10W J	1			
R817		RK73GB2A111J	MG RESISTOR	110Ω 1/10W J	1			
R818		RK73GB2A201J	MG RESISTOR	200Ω 1/10W J	1			
R819		RK73GB2A111J	MG RESISTOR	110Ω 1/10W J	1			
R820		RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1			
R821		RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1			
R822		RK73GB2A512J	MG RESISTOR	5.1kΩ 1/10W J	1			
R823		RK73GB2A512J	MG RESISTOR	5.1kΩ 1/10W J	1			
R824		RK73GB2A221J	MG RESISTOR	220Ω 1/10W J	1			
R825		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1			
R826		RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1			
R827		RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1			
R828		RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1			
R829		RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1			
R830		RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1			
L100		LB73G0BF-002	CHIP FERRITE		1			
L200		LR79Z0FB220M	CHIP INDUCTOR		1			
L201		NQR0716-001X	FERRITE CORE		1			
L400		LB73G0BF-002	CHIP FERRITE		1	E1		
L401		NQR0560-001X	EMI FILTER		1	E1		
L404		NQR0717-001X	FERRITE CORE		1			
L501		LR73Z0AC100K	CHIP INDUCTOR	10uH	1			
L800		LB73G0BF-002	CHIP FERRITE		1			
L801		LB73G0BF-003	CHIP FERRITE		1			
CN1		EC720AB-0570A	FFC FPC CONNE		1			
CN100		QGF0545F2-10X	FFC/FPC CONNE	FFC/FPC (1-10)	1			

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	CN200	QGA3501F1-02X	CONNECTOR	W-B (1-2)	1	
	CN400	QGF0534F7-60X	FFC/FPC CONNE	FFC/FPC (1-60)	1	
	CN500	QGF1041C4-04W	FFC/FPC CONNE	FFC/FPC (1-4)	1	
	JS800	QSW1279-001	ROTARY ENCODER		1	
	S800	NSW0246-001X	TACT SWITCH		1	
	S801	NSW0246-001X	TACT SWITCH		1	
	S802	NSW0246-001X	TACT SWITCH		1	
	S803	NSW0246-001X	TACT SWITCH		1	
	VA500	NAF0042-270X	VARISTOR(ZNR)		1	
	VA501	NAF0042-270X	VARISTOR(ZNR)		1	
	VA502	NAF0042-270X	VARISTOR(ZNR)		1	
	VA503	NAF0042-270X	VARISTOR(ZNR)		1	
	VA800	NAF0042-270X	VARISTOR(ZNR)		1	

DVD MECHA PWB ASSY (LVA11172-04A) <L17>

IC1	AN41250A-X	IC		1	
IC2	M12L128168A6TG	SV-DRAM IC		1	
IC3	WZZ-0025-00	PROGRAMMED IC		1	
IC4	MN2DS0041MD	IC		1	
IC5	BD12KA5FP-X	IC		1	
IC6	XC6120N282N-G	IC		1	
IC8	MM1663DTE	MOS IC		1	
Q1	2SK3019-X	MOS FET		1	
Q2	2SK3019-X	MOS FET		1	
Q3	LSCR523EBFS8	TRANSISTOR		1	
Q4	2SB1709MG	TRANSISTOR		1	
Q5	LSCR523EBFS8	TRANSISTOR		1	
Q6	2SB1709MG	TRANSISTOR		1	
Q11	LTA014TEB-X	DIGI TRANSISTOR		1	
Q12	LTA014TEB-X	DIGI TRANSISTOR		1	
D1	TAN1102W-22-X	IR LED		1	
D4	TAN1102W-22-X	IR LED		1	
D5	1SS355VM-X	SI DIODE		1	
C1	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
C2	NCJ20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
C6	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
C7	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
C8	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
C10	CK730BU0J475K	C CAPACITOR	4.7uF 6.3V K	1	
C12	NCJ20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
C13	NCJ20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
C14	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C16	CK73HBB1C333K	C CAPACITOR	0.033uF 16V K	1	
C17	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C18	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
C19	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C20	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C21	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C22	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C23	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	
C24	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
C25	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
C26	CC73HCH1H102J	C CAPACITOR	1000pF 50V J	1	
C28	NCJ20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
C29	NCJ20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
C31	CK730BU0J475K	C CAPACITOR	4.7uF 6.3V K	1	
C33	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	
C34	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	
C35	CC73HCH1H681J	C CAPACITOR	680pF 50V J	1	
C36	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	
C37	NCJ20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
C38	NCJ20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
C45	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C47	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C48	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
C49	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C50	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
C51	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	
C52	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
C53	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
C55	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C56	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
C57	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
C58	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
C59	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C60	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C61	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C62	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C63	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C64	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C65	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C66	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C67	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C68	CK73HBB1E103K	C CAPACITOR	0.01uF 25V K	1	
C70	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
C71	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C74	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C75	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
C76	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
C77	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
C78	CK730BU0J475K	C CAPACITOR	4.7uF 6.3V K	1	
C79	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
C80	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
C81	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
C82	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C83	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	
	C84	NCJ20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
	C85	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C86	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C87	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C88	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C89	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C90	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C91	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C92	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C93	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C94	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C95	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C96	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C101	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C102	CK730BW0J226M	C CAPACITOR	22uF 6.3V M	1	
	C103	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C104	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C105	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	
	C112	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C115	CK730BS0J105K	C CAPACITOR	1uF 6.3V K	1	
	C120	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C121	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	R1	RK73GB2A561J	MG RESISTOR	560Ω 1/10W J	1	
	R2	RK73HB1J271J	MG RESISTOR	270Ω 1/16W J	1	
	R3	RK73HB1J301J	MG RESISTOR	300Ω 1/16W J	1	
	R4	RK73GB2A561J	MG RESISTOR	560Ω 1/10W J	1	
	R5	RK73HB1J163J	MG RESISTOR	16kΩ 1/16W J	1	
	R6	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R7	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R8	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R9	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R10	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R11	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R12	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R15	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R16	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R17	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R18	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	
	R19	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R20	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R21	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R22	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	
	R23	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	
	R25	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R27	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R28	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R29	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	
	R30	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	
	R31	RK73PB2H270J	MG RESISTOR	27Ω 1/2W J	1	
	R32	RK73HB1J203J	MG RESISTOR	20kΩ 1/16W J	1	
	R33	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R34	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R35	RK73PB2H270J	MG RESISTOR	27Ω 1/2W J	1	
	R51	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R52	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R53	NR20098-R27X	MG RESISTOR	0.27Ω	1	
	R54	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R55	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R56	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R57	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R58	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R59	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R60	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R61	RK73HB1J242J	MG RESISTOR	2.4kΩ 1/16W J	1	
	R62	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R63	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R64	RK73HB1J202J	MG RESISTOR	2kΩ 1/16W J	1	
	R65	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R66	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R69	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R70	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R73	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R74	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R75	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R76	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R77	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R78	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R79	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R80	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R81	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R82	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R86	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R92	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R95	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R96	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R105	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R106	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R107	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R108	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R113	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R114	NRSA6AD-5901W	MG RESISTOR	5.9kΩ 1/16W D	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK
DDX6703S	K4	DDX6903S	K3	DDX8016DABS	E1

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R120	RK73HB1J432J	MG RESISTOR	4.3k Ω 1/16W J	1	
	R121	RK73HB1J242J	MG RESISTOR	2.4k Ω 1/16W J	1	
	R122	RK73HB1J162J	MG RESISTOR	1.6k Ω 1/16W J	1	
	R123	RK73HB1J332J	MG RESISTOR	3.3k Ω 1/16W J	1	
	R125	RK73GB2A000J	MG RESISTOR	0 Ω 1/10W J	1	
	R128	RK73GB2A000J	MG RESISTOR	0 Ω 1/10W J	1	
	CN1	QGF0534F7-26X	FFC/FPC CONNE	FFC/FPC (1-26)	1	
	CN4	QGF0534F7-35X	FFC/FPC CONNE	FFC/FPC (1-35)	1	
	CN5	QGF0534F7-18X	FFC/FPC CONNE	FFC/FPC (1-18)	1	
	CN9	QGA1501F4-03W	W TO B CONNE	W-B (1-3)	1	
	PH1	PS1192HB-22-X	OPT TRANSMITTER		1	
	PH2	PS1192HB-22-X	OPT TRANSMITTER		1	
	S1	NSW0351-001X	LEVER SWITCH		1	
	TH1	NAD0055-103X	N THERMISTOR	10k Ω	1	
	X1	NAX1135-001X	CRYSTAL		1	