
EXPLODED VIEW (UNIT)

Block No.M1MM

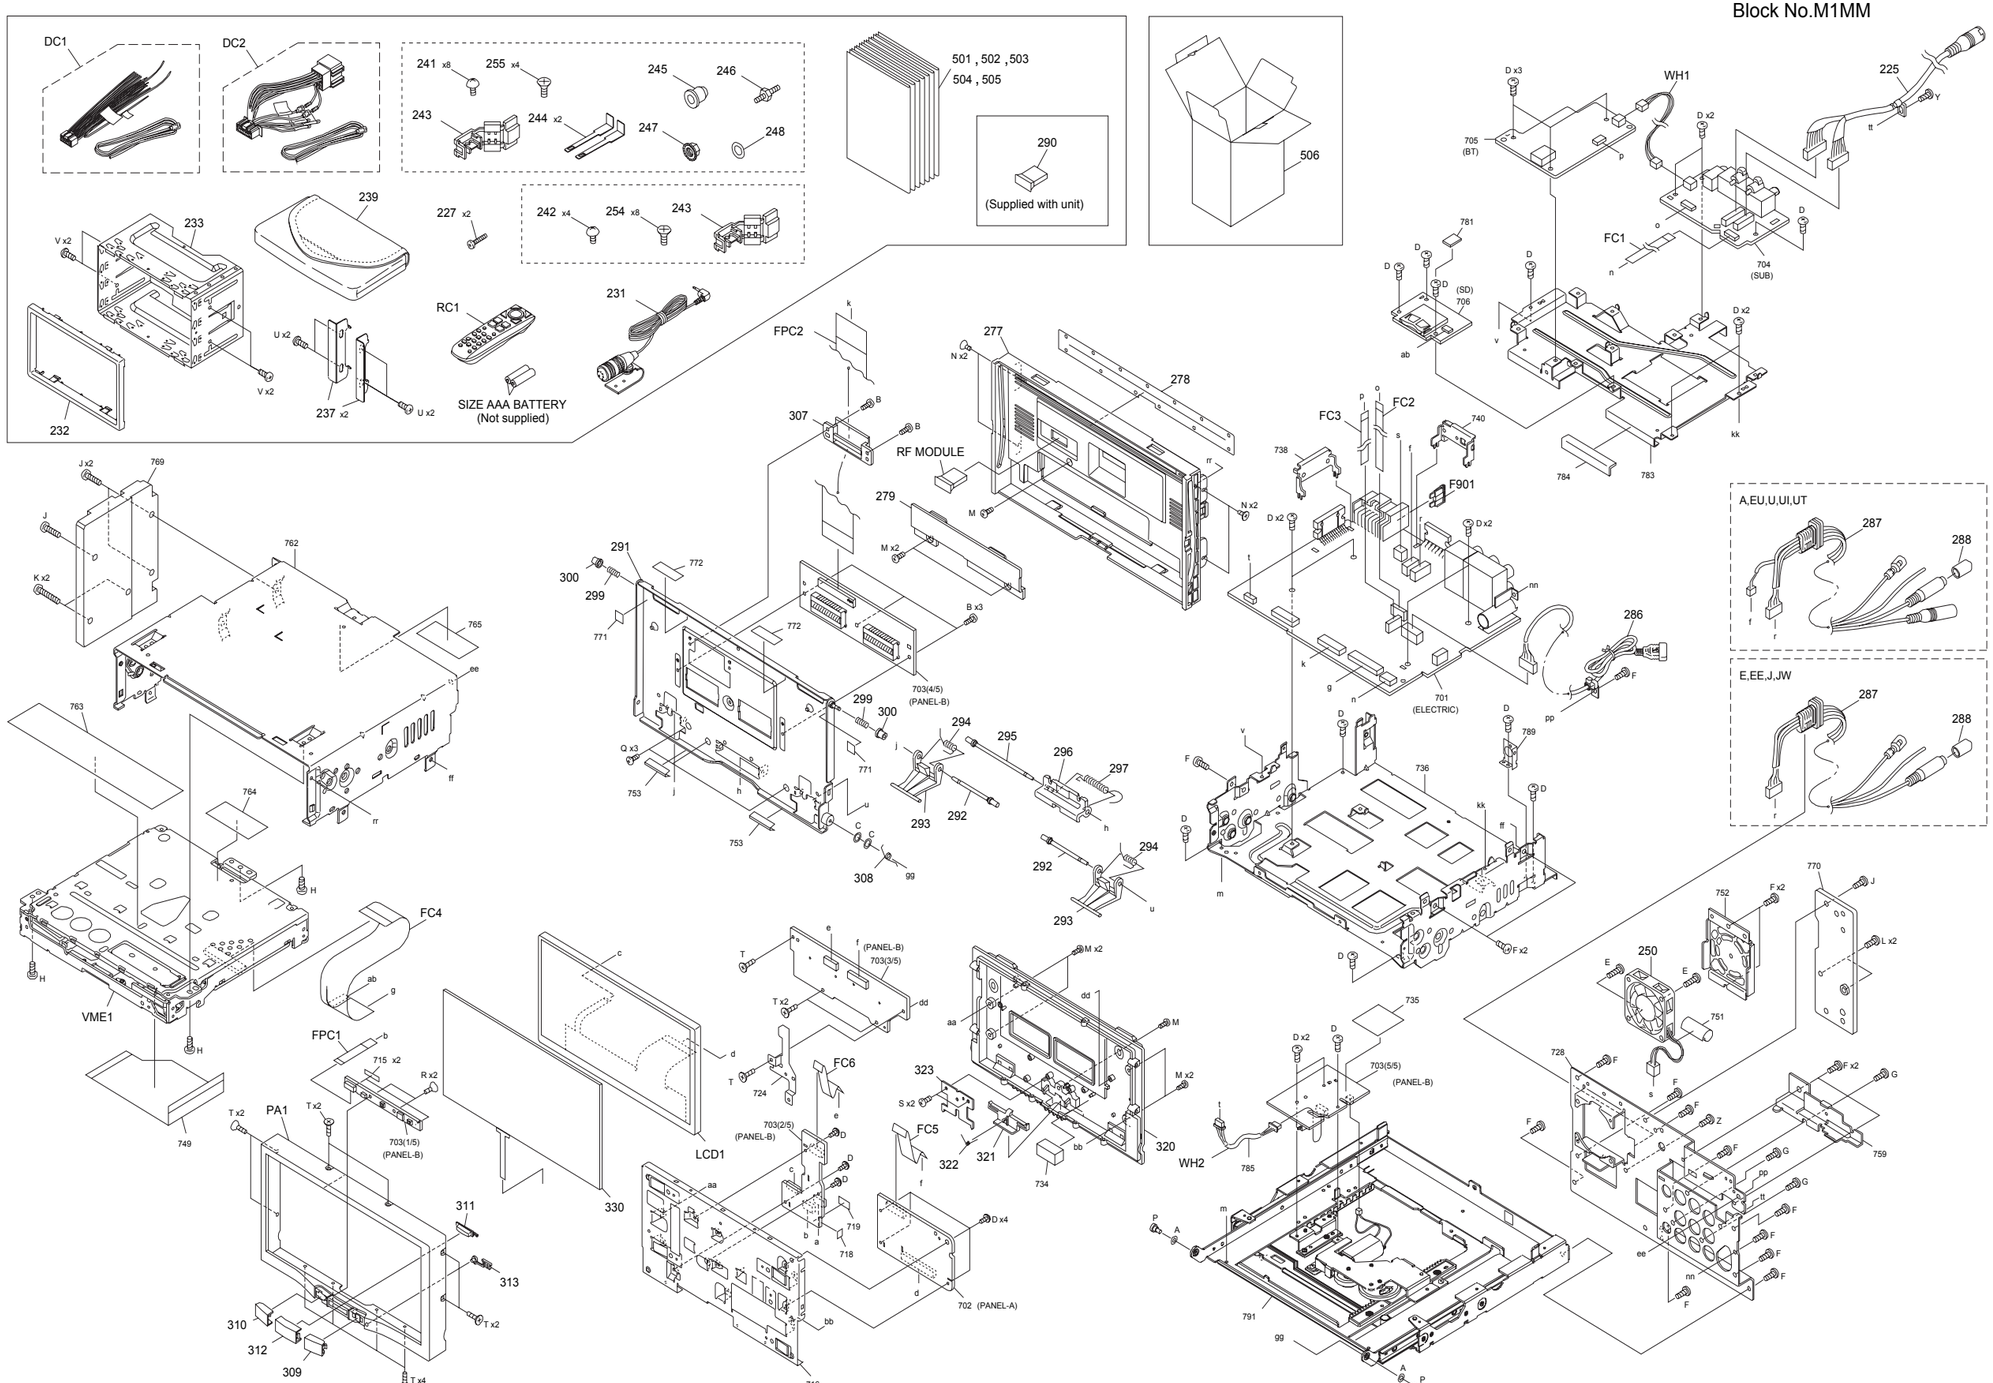

Parts with the exploded numbers larger than 700 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

EXPLODED VIEW (UNIT) <M1MM>


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
⚠	DC1	QAM1351-002	DC CORD		1	A,E,F,G,H,I
⚠	DC2	QAM1352-003	DC CORD		1	B,C,D
⚠	F901	QMFZ064-100-J1	FUSE	10A	1	
	FC1	QUQY05-1213BC-E	FFC WIRE	12pin 13cm	1	
	FC2	QUQY05-1405BC-E	FFC WIRE	14pin 5cm	1	
	FC3	QUQY05-12X8BC-E	FFC WIRE	12pin 8.5cm	1	
	FC4	WJT0284-001A-E	E-CARD WIRE		1	
	FC5	QUQY05-3007AC-E	FFC WIRE	30pin 7cm	1	
	FC6	QUQY05-1807AC-E	FFC WIRE	18pin 7cm	1	
	FPC1	QAL1302-001	FPC		1	
	FPC2	QAL1373-001	FPC		1	
	LCD1	QLD0721-001	LCD MODULE		1	
	PA1	LV11737-013A	FRONT PANEL		1	
	RC1	RM-RK256	REMOCON UNIT		1	A,B,C,D,F,G,H,I
	VME1	FMU-XS3-31D	DVD MECHANISM		1	
	WH1	WJJ1272-001A-E	E-SI C WIRE C-C		1	
	WH2	QJJ075-060801-E	SIN CR C-C W		1	
	A	LV45039-001A	WAVE WASHER		2	
	B	LV44159-004A	MINI SCREW		5	
	C	QYWFM628050	WASHER	8mm/6.2mm x 0.5mm	2	
	D	LV44615-003A	SPECIAL SCREW		31	
	E	LV45522-002A	SPECIAL SCREW		2	
	F	LV44800-002A	SPECIAL SCREW		18	
	G	QYSDSF3010ZA	TAP SCREW	M3 x 10mm	3	
	H	LV44800-004A	SPECIAL SCREW		3	
	J	GE40377-003A	SPECIAL SCREW		4	
	K	LV41200-007A	SPECIAL SCREW		2	
	L	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	2	
	M	QYSDST2006MA	TAP SCREW	M2 x 6mm	8	
	N	LV43819-008A	SPECIAL SCREW		4	
	P	LV44470-002A	SPECIAL SCREW		2	
	Q	QYSPSTU2045MA	TAP SCREW	M2 x 4.5mm	3	
	R	LV44464-001A	SPECIAL SCREW		2	
	S	QYSDSF2005ZA	TAP SCREW	M2 x 5mm	2	
	T	LV45065-003A	SPECIAL SCREW		14	
	U	QYSDSP5008ZA	SCREW	M5 x 8mm	4	A,G,H,I
	V	QYSSSP5008ZA	SCREW	M5 x 8mm	4	B,C,D,E,F
	Y	LV44800-002A	SPECIAL SCREW		1	A,C,D,G,H,I
	Z	LV44800-002A	SPECIAL SCREW		1	E
	225	QAM1421-002	CAR CABLE(NAVI)		1	A,C,D,G,H,I
	227	QYSDST2004ZA	TAP SCREW	M2 x 4mm	2	B,C,D,E,F
	231	QAN0109-001	MICROPHONE		1	
	232	LV22463-005A	TRIM PLATE		1	B,C,D,E,F,H
	233	LV22812-002A	SLEEVE ASSY		1	B,C,D,E,F
	237	LV36544-001A	TRANSPORT BKT		2	A,G,H,I
	239	LV45104-001A	SOFT CASE		1	
	241	QYSDSP5008ZA	SCREW	M5 x 8mm	8	B,C,D,E,F
	242	QYSDSP5008ZA	SCREW	M5 x 8mm	4	A,G,H,I
	243	LV41478-001A	CORD CONNECTER		1	
	244	LV45399-001A	HOOK		2	B,C,D,E,F
	245	VKZ4027-202	PLUG NUT		1	B,C,D,E,F
	246	GE40426-002A	MOUNT BOLT		1	B,C,D,E,F
	247	VKZ4328-003	LOCK NUT		1	B,C,D,E,F
	248	QYWWS53A008ZA	WASHER	0mm/5.3mm x	1	B,C,D,E,F
⚠	250	QAR0521-001	COOLING FAN		1	
	254	QYSSSP5008ZA	SCREW	M5 x 8mm	8	A,G,H,I
	255	QYSSSP5008ZA	SCREW	M5 x 8mm	4	B,C,D,E,F
	277	LV11796-010A	FRONT CHASSIS		1	A,B,C,D,G,H,I
	277	LV11796-009A	FRONT CHASSIS		1	E
	277	LV11796-011A	FRONT CHASSIS		1	F
	278	LV45134-003A	BLIND		1	
	279	LV22941-001A	FPC GUIDE		1	
	286	QAM1417-002	CAR CABLE(USB)		1	A,B,C,D,E,F,G,H
	286	QAM1520-001	CAR CABLE(USB)		1	I
	287	QAM1414-001	CAR CABLE(AV)		1	A,D,G,H,I
	287	QAM1415-001	CAR CABLE(AV)		1	B,C,E,F
	288	GE40101-001A	PIN CAP		1	
	290	QAU0526-003	RF MODULE		1	
	291	LV39522-001A	FRONT BKT ASSY		1	
	292	LV45031-001A	KICK SHAFT		2	
	293	LV37971-001A	KICK LEVER		2	
	294	LV45033-001A	KICK SPRING		2	
	295	LV45032-001A	HOLD SHAFT		1	
	296	LV37972-001A	HOLD LEVER		1	
	297	LV45034-001A	HOLD SPRING		1	
	299	LV44468-002A	SPRING		2	
	300	LV44469-001A	ROLLER		2	
	307	LV39523-001A	FPC COVER		1	
	308	LV44471-003A	TOR SPRING		1	
	309	LV39107-002A	REMOTE LENS R		1	
	310	LV39108-002A	REMOTE LENS L		1	
	311	LV22879-003A	BUTTON BASE		1	
	312	LV39109-002A	BUTTON COVER		1	
	313	LV39110-001A	RESET BUTTON		1	
	320	LV11521-004A	REAR COVER		1	
	321	LV37929-002A	D BUTTON		1	
	322	LV45035-001A	D BUTTON SPRING		1	
	323	LV37922-001A	D BUTTON COVER		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	330	QAL1307-001	TOUCH PANEL		1	
	501	GET0899-001A	INST BOOK	ENG	1	A
	501	GET0893-001A	INST BOOK	ENG GER FRE DUT	1	B
	501	GET0894-001A	INST BOOK	RUS UKR	1	C
	501	GET0895-001A	INST BOOK	ENG SPA RUS	1	D
	501	GET0892-001A	INST BOOK	ENG SPA FRE	1	E,F
	501	GET0896-001A	INST BOOK	ENG CHI(TAIWAN) THA	1	G
	501	GET0897-001A	INST BOOK	ENG	1	H
	501	GET0898-001A	INST BOOK	CHI(TAIWAN)	1	I
	502	GET0893-002A	INST BOOK	SPA ITA POR SWE	1	B
	502	GET0895-002A	INST BOOK	ENG ARA PER	1	D
	502	GET0892-002A	INST BOOK	POR	1	F
	503	GET0899-002A	INSTALL MANUAL	ENG	1	A
	503	GET0893-003A	INSTALL MANUAL	ENG GER FRE DUT	1	B
	503	GET0894-002A	INSTALL MANUAL	RUS UKR	1	C
	503	GET0895-003A	INSTALL MANUAL	ENG SPA RUS	1	D
	503	GET0892-003A	INSTALL MANUAL	ENG SPA FRE	1	E,F
	503	GET0896-002A	INSTALL MANUAL	ENG CHI(TAIWAN) THA	1	G
	503	GET0897-002A	INSTALL MANUAL	ENG	1	H
	503	GET0898-002A	INSTALL MANUAL	CHI(TAIWAN)	1	I
	504	GET0893-004A	INSTALL MANUAL	SPA ITA POR SWE	1	B
	504	GET0895-004A	INSTALL MANUAL	TUR ARA PER	1	D
	504	GET0892-004A	INSTALL MANUAL	POR	1	F
	505	GET0892-005A	SUB MANUAL	ENG SPA FRE	1	E
	506	GE35536-001A	INNER CARTON		1	A,D,G,H,I
	506	GE35541-001A	INNER CARTON		1	B,C
	506	GE35530-001A	INNER CARTON		1	E
	506	GE35533-001A	INNER CARTON		1	F

EXPLODED VIEW (PANEL MECHA ASSY)

Block No.M2MM

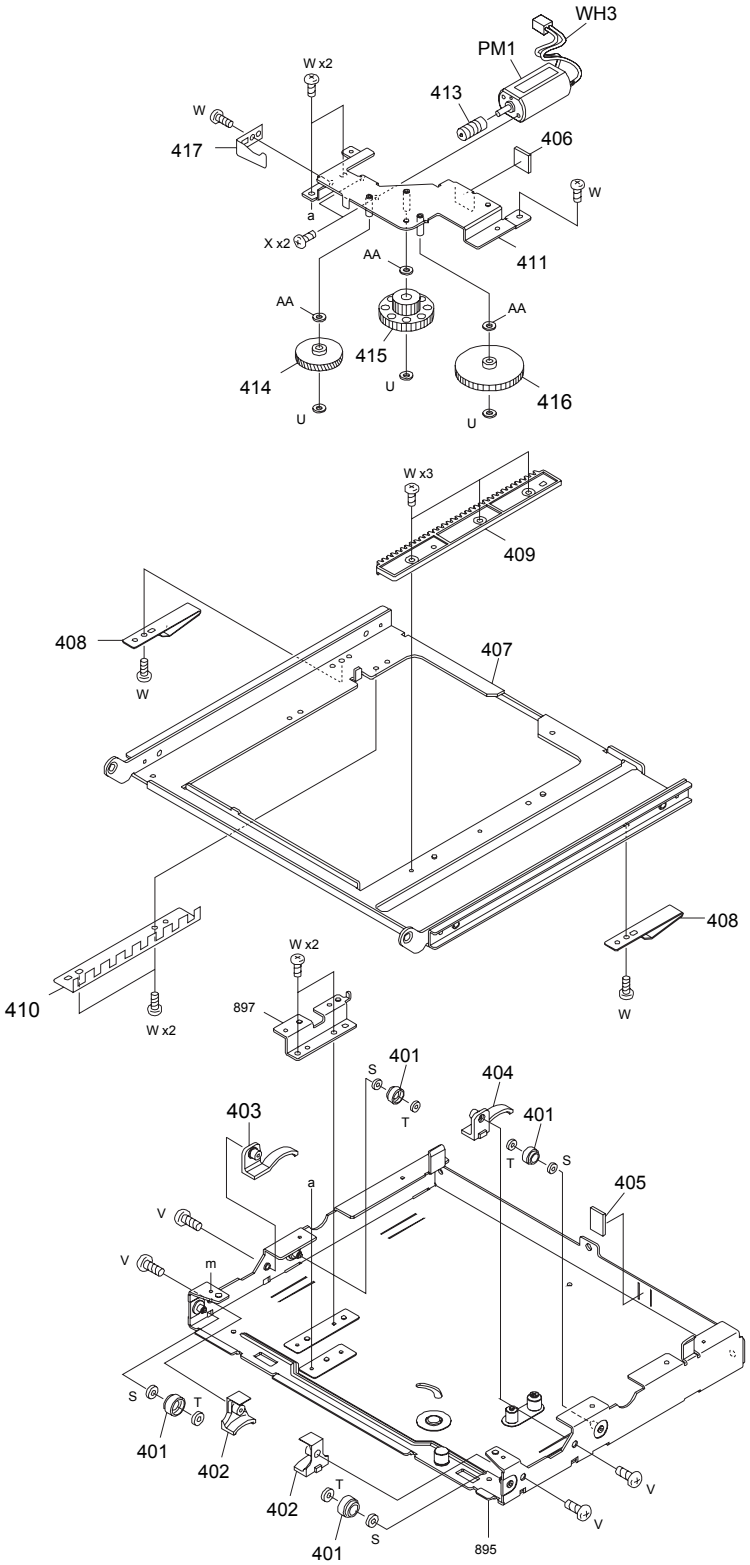

Parts with the exploded numbers larger than 800 are not supplied.


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

EXPLODED VIEW (PANEL MECHA ASSY) <M2MM>

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	PM1	QAR0378-002	FEED MOTOR		1	
	WH3	WJM0460-001A-E	E-SI C WIRE C-F		1	
	AA	QYWFM265013	WASHER	5mm/2.6mm x 0.13mm	3	
	S	QYWFM315013	WASHER	5mm/3.1mm x 0.13mm	4	
	T	QYWDL164035	SLIT WASHER	4mm/1.6mm x 0.35mm	4	
	U	QYWDM215025	SLIT WASHER	5mm/2.1mm x 0.25mm	3	
	V	QYSPSFT1745ZA	TAP SCREW	M1.7 x 4.5mm	4	
	W	LV44159-004A	MINI SCREW		13	
	X	QYSPSPT2020ZA	SCREW	M2 x 2mm	2	
	401	LV44666-003A	ROLLER(SLD)		4	
	402	LV36940-002A	RAIL GUIDE		2	
	403	LV37308-001A	GUIDE SPRING(L)		1	
	404	LV37309-001A	GUIDE SPRING(R)		1	
	405	LV40846-053A	SPACER(F)		1	
	406	LV40846-057A	SPACER(F)		1	
	407	LV36514-012A	DRIVE PLATE ASSY		1	
	408	LV44453-004A	FRICTION SPRING		2	
	409	LV36516-001A	RACK GEAR		1	
	410	LV36517-003A	PHOTO PLATE		1	
	411	LV36509-002A	DR.CHASSIS ASSY		1	
	413	LV44451-001A	WORM GEAR		1	
	414	LV36511-001A	SECOND GEAR		1	
	415	LV36512-001A	THIRD GEAR		1	
	416	LV36513-001A	FORTH GEAR		1	
	417	LV44452-001A	SPRING(WORM)		1	

EXPLODED VIEW (DVD MECHANISM: FMU-XS3-31D)

Block No.MJMM

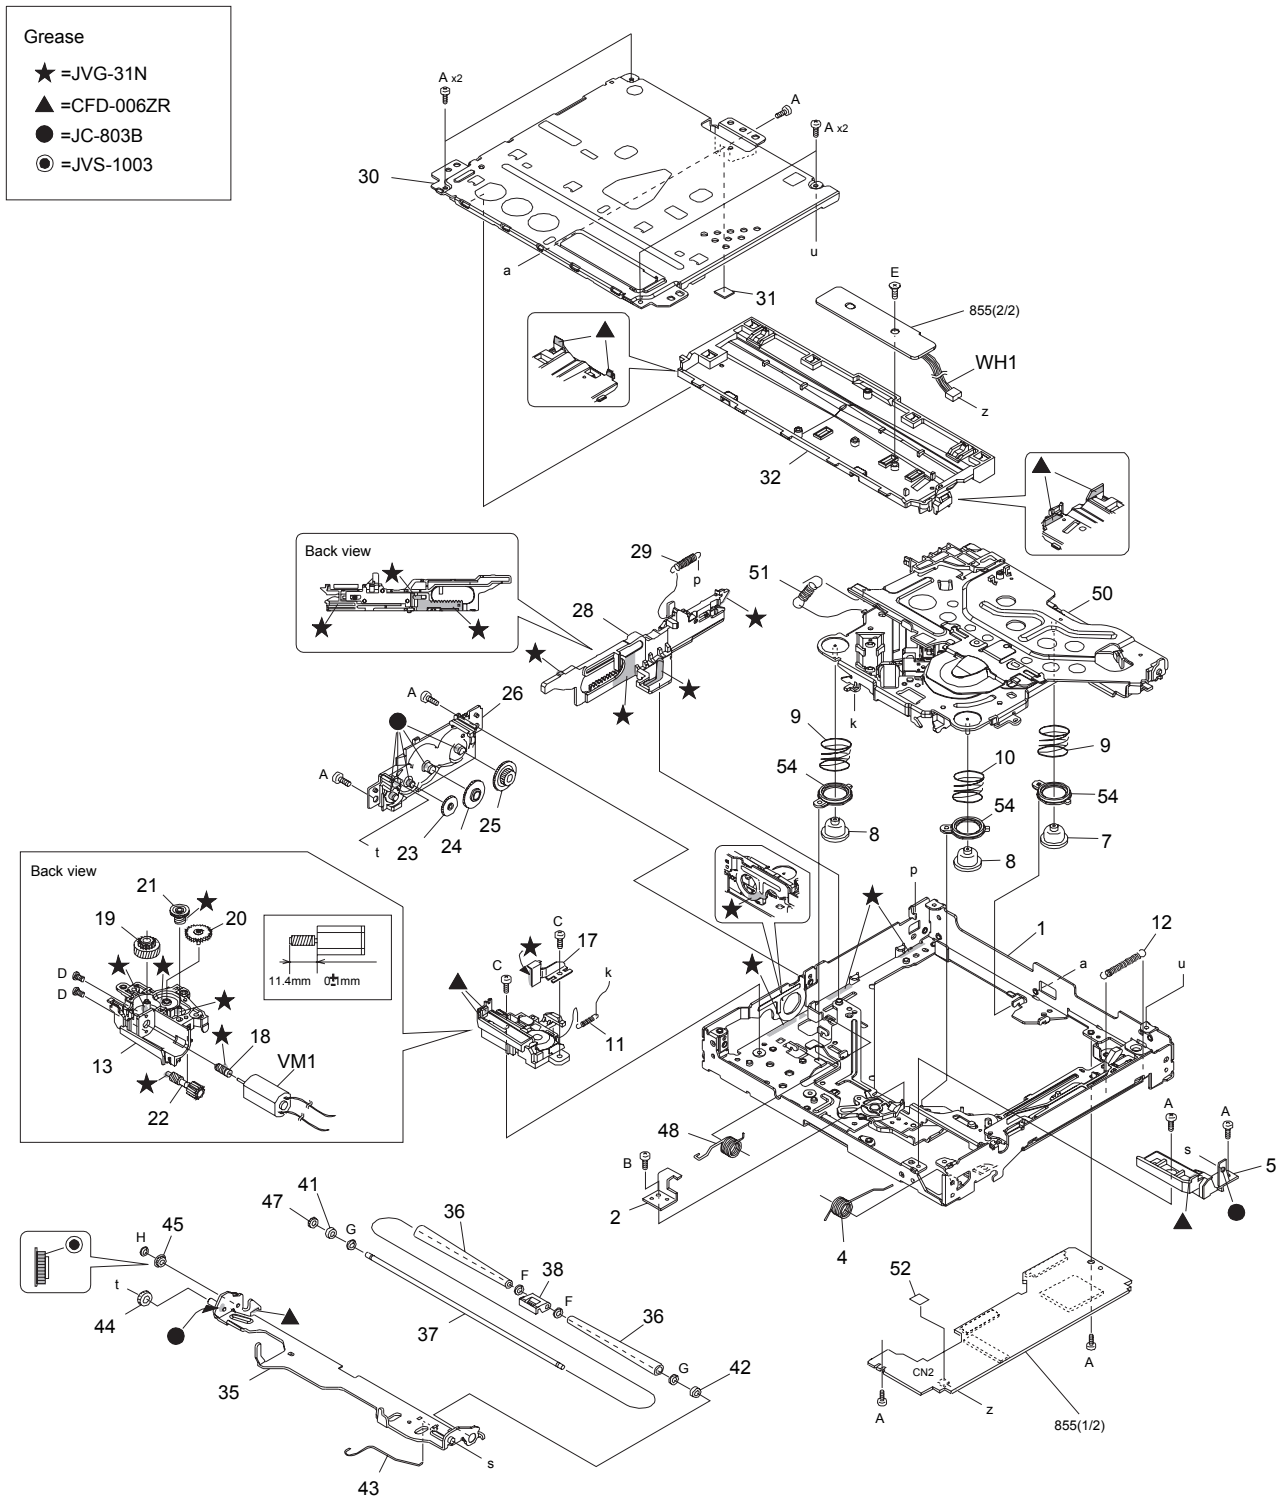

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

EXPLODED VIEW (DVD MECHANISM: FMU-XS3-31D) <MJMM>

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	VM1	QAR0531-001	LOADING MOTOR		1	
	WH1	WJS0108-001A-E	E-FL/RB WIRE		1	
	A	VKZ4539-054	MINI SCREW		11	
	B	LV44959-002A	SPECIAL SCREW		1	
	C	LV45135-001A	MINI TAP SCREW		2	
	D	QYSPSPU1425MA	SCREW	M1.4 x 2.5mm	2	
	E	LV44586-001A	SPECIAL SCREW		1	
	F	LV45252-001A	WASHER		2	
	G	LV44960-001A	SLIT WASHER		2	
	H	QYWDL1735250	SLIT WASHER	3.5mm/1.7mm x 0.25mm	1	
	1	LV11434-011A	FRAME UNIT		1	
	2	LV45021-001A	STOPPER		1	
	4	LV45249-002A	L A SPRING(R) 2		1	
	5	LV37639-002A	L ARM HOLDER		1	
	7	LV45639-002A	INSULATOR		1	
	8	LV45639-001A	INSULATOR		2	
	9	LV45074-001A	DAMPER SPRING B		2	
	10	LV45073-001A	DAMPER SPRING A		1	
	11	LV44897-002A	FLOATING SPRING		1	
	12	LV44894-001A	LOCK SLIDER SPRING		1	
	13	LV11436-001A	MOTOR HOLDER		1	
	17	LV37642-001A	MOTOR TH SPRING		1	
	18	LV37643-002A	MOTOR WORM GEAR		1	
	19	LV37644-002A	M WHEEL GEAR		1	
	20	LV37645-002A	M CONNECT GEAR		1	
	21	LV37646-001A	A WORM GEAR		1	
	22	LV37647-001A	A WHEEL GEAR		1	
	23	LV37648-001A	ACT GEAR		1	
	24	LV37649-001A	A CONNECT GAER		1	
	25	LV37650-001A	LOAD GAER		1	
	26	LV22553-003A	GEAR BASE		1	
	28	LV37688-002A	SLIDE CAM ASSY		1	
	29	LV45090-001A	S.CAM SPRING		1	
	30	LV11437-003A	TOP COVER		1	
	31	LV45719-001A	PU FPC SHEET		1	
	32	LV11600-001A	DISC PLATE 2		1	
	35	LV22735-001A	LOADING A AS 2		1	
	36	LV44902-002A	ROLLER		2	
	37	LV45244-001A	ROLLER SHAFT 2		1	
	38	LV37652-002A	SHAFT GUIDE		1	
	41	LV44904-001A	ROLLER COLLAR L		1	
	42	LV45221-001A	R. COLLAR R2		1	
	43	LV45235-001A	L ARM ROD		1	
	44	LV37653-001A	CONNECT GEAR		1	
	45	LV37654-001A	MIDDLE GEAR		1	
	47	LV37655-001A	ROLLER GAER		1	
	48	LV45248-001A	L A SPRING(L) 2		1	
	50	CM-FMUXM1D	TRA MECHA UNIT		1	
	51	LV44910-002A	CLAMPER SPRING		1	
	52	LV45289-002A	SPACER(P)		1	
	54	LV39479-002A	INSULATOR CAP		3	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN UNIT (LVA11037-5xA) <01>						
	IC11	TEF6614TV1S3-X	IC		1	
	IC101	TB2931HQ	IC		1	
	IC141	TDA7415CB	IC		1	
	IC152	TC7SH08FU-X	IC(DIGITAL)		1	A,C,D,E,G,H,I
	IC153	TC7SET08FU-J-X	IC(DIGITAL)		1	A,C,D,E,G,H,I
	IC191	NJM4565E-X	IC		1	
	IC261	NJM2584AM-X	IC		1	A,C,D,G,H,I
	IC701	JVM622D	IC(MCU)		1	
	IC721	R1EX24016ASAA-X	IC		1	
	IC731	XC6120N242NG-X	IC		1	
	IC801	LV5680P	IC		1	
	IC802	BD9673EFJ-X	IC		1	
	IC803	BA9743AFV-X	IC		1	
	IC821	XC6213B332NG-X	IC		1	
	IC831	BD9673EFJ-X	IC		1	
	IC851	BAJ5CC0FP-X	IC		1	
	IC931	RT3J33M-X	MOS FET ARRAY		1	A,D,G,H,I
	IC981	LB1641	IC		1	
	Q731	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q791	2SA812/5-6/-X	TRANSISTOR		1	
	Q801	LTC044EEB-X	DIGI TRANSISTOR		1	
	Q802	LTA044EEB-X	DIGI TRANSISTOR		1	
	Q803	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q804	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q805	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q821	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q822	LTC044EEB-X	DIGI TRANSISTOR		1	
	Q871	MTM98140-X	TRANSISTOR		1	
	Q872	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q873	LTC044EEB-X	DIGI TRANSISTOR		1	
	Q874	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q875	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q921	LSAR523UB-X	TRANSISTOR		1	
	Q922	LTC014YEB-X	DIGI TRANSISTOR		1	
	Q931	LTC014YEB-X	DIGI TRANSISTOR		1	A,D,G,H,I
	Q971	LSCR523UB-X	TRANSISTOR		1	
	Q972	LSCR523UB-X	TRANSISTOR		1	
	Q981	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q1121	IMX9-W	PAIR TRANSISTOR		1	
	Q1221	IMX9-W	PAIR TRANSISTOR		1	
	Q1301	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q1302	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q1341	IMX9-W	PAIR TRANSISTOR		1	
	Q1401	INC2002AC1-X	TRANSISTOR		1	
	Q1501	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q1502	LSCR523UB-X	TRANSISTOR		1	
	Q1503	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q1504	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q1505	LTC043ZEB-X	DIGI TRANSISTOR		1	
	Q1507	LTC043ZEB-X	DIGI TRANSISTOR		1	
	Q1508	LTC043ZEB-X	DIGI TRANSISTOR		1	
	Q1541	LTA014EEB-X	DIGI TRANSISTOR		1	E
	Q1542	LTC014YEB-X	DIGI TRANSISTOR		1	E
	Q1942	LSCR523UB-X	TRANSISTOR		1	
	Q1943	LTA014YEB-X	DIGI TRANSISTOR		1	
	Q1944	LSCR523UB-X	TRANSISTOR		1	
	Q1951	RT1N141U-X	DIGI TRANSISTOR		1	
	Q1961	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q6221	LTA043ZEB-X	DIGI TRANSISTOR		1	
	Q6222	LTA043ZEB-X	DIGI TRANSISTOR		1	
	Q6223	LTC043ZEB-X	DIGI TRANSISTOR		1	
	Q6224	LTC043ZEB-X	DIGI TRANSISTOR		1	
	Q8021	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q8022	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q8101	RSQ030P03-W	MOS FET		1	
	Q8102	2SC1623/5-6/-X	TRANSISTOR		1	
	Q8103	2SA812/5-6/-X	TRANSISTOR		1	
	Q8104	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q8201	RTQ035N03-W	MOS FET		1	
	Q8202	2SA812/5-6/-X	TRANSISTOR		1	
	Q8203	2SC1623/5-6/-X	TRANSISTOR		1	
	Q8301	2SC1623/5-6/-X	TRANSISTOR		1	
	D701	RKZ6.2B2KG-X	Z DIODE		1	
	D702	RKZ6.2B2KG-X	Z DIODE		1	
	D703	RKZ6.2B2KG-X	Z DIODE		1	
	D704	RKZ6.2B2KG-X	Z DIODE		1	
	D705	RKZ6.2B2KG-X	Z DIODE		1	
	D710	RKZ6.2B2KG-X	Z DIODE		1	
	D712	RKZ6.2B2KG-X	Z DIODE		1	
	D713	RKZ6.2B2KG-X	Z DIODE		1	
	D714	RKZ6.2B2KG-X	Z DIODE		1	
	D715	RKZ6.2B2KG-X	Z DIODE		1	
	D716	RKZ6.2B2KG-X	Z DIODE		1	
	D717	RKZ6.2B2KG-X	Z DIODE		1	
	D718	RKZ6.2B2KG-X	Z DIODE		1	
	D719	RKZ6.2B2KG-X	Z DIODE		1	
	D721	RKZ6.2B2KG-X	Z DIODE		1	
	D723	RKZ6.2B2KG-X	Z DIODE		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D724	RKZ6.2B2KG-X	Z DIODE		1	
	D725	RKZ6.2B2KG-X	Z DIODE		1	
	D726	RKZ6.2B2KG-X	Z DIODE		1	
	D727	RKZ6.2B2KG-X	Z DIODE		1	
	D728	RKZ6.2B2KG-X	Z DIODE		1	
	D821	CRS03-W	SB DIODE		1	
	D871	RKZ18B2KG-X	Z DIODE		1	
	D901	1N5402-BPC04	SI DIODE		1	
	D902	GS1J-LTP-X	SI DIODE		1	B,D,H
	D931	RKZ18B2KG-X	Z DIODE		1	A,D,G,H,I
	D932	RKZ18B2KG-X	Z DIODE		1	A,D,G,H,I
	D935	RKS801KF-X	SI DIODE		1	A,D,G,H,I
	D936	RKS801KF-X	SI DIODE		1	A,D,G,H,I
	D971	RKZ6.8B2KG-X	Z DIODE		1	
	D972	RKZ6.8B2KG-X	Z DIODE		1	
	D981	CRS03-W	SB DIODE		1	
	D982	RKZ5.6B2KG-X	Z DIODE		1	
	D1121	MC2836-X	DIODE		1	
	D1221	MC2836-X	DIODE		1	
	D1303	DA2J101-X	SI DIODE		1	
	D1304	DA2J101-X	SI DIODE		1	
	D1341	MC2836-X	DIODE		1	
	D1371	CRS03-W	SB DIODE		1	
	D1372	RKZ5.6B2KG-X	Z DIODE		1	
	D1401	MC2836-X	DIODE		1	
	D1402	MC2836-X	DIODE		1	
	D1403	MC2836-X	DIODE		1	
	D1501	MC2836-X	DIODE		1	
	D1502	MC2836-X	DIODE		1	
	D1503	MC2836-X	DIODE		1	
	D1504	MC2836-X	DIODE		1	
	D1911	CRS03-W	SB DIODE		1	
	D1912	CRS03-W	SB DIODE		1	
	D1921	MBRX130-TP-X	SB DIODE		1	A,D,E,F,G,H,I
	D1922	MBRX130-TP-X	SB DIODE		1	A,D,E,F,G,H,I
	D1931	MC2836-X	DIODE		1	
	D1941	DA2J101-X	SI DIODE		1	
	D1961	RKZ18B2KG-X	Z DIODE		1	
	D1971	RKZ6.2B2KG-X	Z DIODE		1	
	D7301	DA2J101-X	SI DIODE		1	
	D8001	RB051L-40-X	SB DIODE		1	
	D8011	CRS03-W	SB DIODE		1	
	D8021	RKZ6.2B2KG-X	Z DIODE		1	
	D8022	RKZ6.2B2KG-X	Z DIODE		1	
	D8031	RB051L-40-X	SB DIODE		1	
	D8101	RB051L-40-X	SB DIODE		1	
	D8106	RKZ6.2B2KG-X	Z DIODE		1	
	D8201	CRS03-W	SB DIODE		1	
	D8203	RB521S-30-X	SB DIODE		1	
	D8204	RB521S-30-X	SB DIODE		1	
	D8205	RB521S-30-X	SB DIODE		1	
	D8301	DA2J101-X	SI DIODE		1	
	D8501	DA2J101-X	SI DIODE		1	
	C1	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C8	NDCA1HJ-270W	C CAPACITOR	27pF 50V J	1	
	C9	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C10	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C12	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C13	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C14	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C16	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C17	QETN1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C18	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C19	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C20	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	1	
	C21	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C22	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C23	NDCA1HJ-100W	C CAPACITOR	10pF 50V J	1	
	C24	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C25	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C26	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C27	NDCA1HJ-150W	C CAPACITOR	15pF 50V J	1	
	C29	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C30	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C42	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C45	NDCA1HJ-7R0W	C CAPACITOR	7pF 50V J	1	
	C46	NDCA1HJ-2R0W	C CAPACITOR	2pF 50V J	1	
	C50	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C260	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C262	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,C,D,G,H,I
	C272	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,C,D,G,H,I
	C282	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,C,D,G,H,I
	C705	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C713	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C714	NDCA1HJ-220W	C CAPACITOR	22pF 50V J	1	
	C715	NDCA1HJ-220W	C CAPACITOR	22pF 50V J	1	
	C717	NDCA1HJ-120W	C CAPACITOR	12pF 50V J	1	
	C718	NDCA1HJ-100W	C CAPACITOR	10pF 50V J	1	
	C723	QETN1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C801	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C802	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	A,D,E,F,G,H,I
	C803	QETN1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C804	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C805	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C806	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C807	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C808	QETN1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C809	QETN1CM-227Z	E CAPACITOR	220uF 16V M	1	
	C810	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C812	QETN1HM-226Z	E CAPACITOR	22uF 50V M	1	
	C816	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C820	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C821	QETN1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C822	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C823	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C824	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C871	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C872	NCB31CK-334X	C CAPACITOR	0.33uF 16V K	1	
	C901	QEZ0769-278	E CAPACITOR	2700uF	1	
	C902	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	
	C904	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	
	C921	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C931	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	A,D,G,H,I
	C932	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	A,D,G,H,I
	C962	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C981	QETN1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C983	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C984	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C1101	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1102	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1106	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C1111	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1112	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1116	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C1121	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1122	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1131	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1132	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1141	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1142	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	1	
	C1151	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1158	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	E
	C1161	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1162	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1163	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1164	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1166	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1191	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1192	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1193	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C1194	NCBA1EK-682W	C CAPACITOR	6800pF 25V K	1	
	C1195	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C1201	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1202	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1206	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C1211	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1212	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1216	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C1221	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1222	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1231	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1232	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1241	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1242	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	1	
	C1251	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1258	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	E
	C1261	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1262	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1263	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1264	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1266	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1291	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1292	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1293	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C1294	NCBA1EK-682W	C CAPACITOR	6800pF 25V K	1	
	C1295	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C1301	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C1303	NDCA1HJ-820W	C CAPACITOR	82pF 50V J	1	
	C1304	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1306	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1308	NDCA1HJ-820W	C CAPACITOR	82pF 50V J	1	
	C1309	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C1312	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1313	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1351	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C1353	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	E
	C1354	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	A,C,D,E,G,H,I
	C1355	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	A,C,D,E,G,H,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1358	NCJ21CK-106X-A	C CAPACITOR	10uF 16V K	1	E
	C1364	NCJ21CK-106X-A	C CAPACITOR	10uF 16V K	1	
	C1367	NDCA1HJ-330W	C CAPACITOR	33pF 50V J	1	
	C1368	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1369	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1371	QETN1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C1373	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	1	
	C1374	NCB31CK-474X	C CAPACITOR	0.47uF 16V K	1	
	C1375	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	1	
	C1376	NCB31CK-474X	C CAPACITOR	0.47uF 16V K	1	
	C1378	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1380	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1391	QETN1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C1392	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1393	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1400	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1401	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C1402	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1911	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C1932	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C1941	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C1944	NCB31AK-225X	C CAPACITOR	2.2uF 10V K	1	
	C1952	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C1961	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C1963	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C6221	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C6222	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7088	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7089	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C7092	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C7093	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C7095	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7104	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7106	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7107	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7108	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7109	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7121	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7126	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7128	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7301	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7302	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C8003	QEKJ1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C8004	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8005	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C8006	NCBA1HK-682W	C CAPACITOR	6800pF 50V K	1	
	C8008	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C8009	QETN1AM-477Z	E CAPACITOR	470uF 10V M	1	
	C8010	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C8011	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C8033	QEKJ1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C8034	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8035	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C8036	NCBA1HK-682W	C CAPACITOR	6800pF 50V K	1	
	C8038	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C8039	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C8041	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C8101	NCB31CK-334X	C CAPACITOR	0.33uF 16V K	1	
	C8103	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C8106	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8107	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C8108	QETN1AM-477Z	E CAPACITOR	470uF 10V M	1	
	C8201	NCB31CK-474X	C CAPACITOR	0.47uF 16V K	1	
	C8203	NCBA1HK-222W	C CAPACITOR	2200pF 50V K	1	
	C8204	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C8205	NCBA1HK-391W	C CAPACITOR	390pF 50V K	1	
	C8206	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8207	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8208	QETN1HM-107Z	E CAPACITOR	100uF 50V M	1	
	C8209	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8210	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C8213	QETN1HM-226Z	E CAPACITOR	22uF 50V M	1	
	C8301	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C8302	NCBA1HK-272W	C CAPACITOR	2700pF 50V K	1	
	C8303	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C8304	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C8306	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C8501	NCB21EK-334X	C CAPACITOR	0.33uF 25V K	1	
	C8502	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	R1	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,F,G,H,I
	R14	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R16	NRSA6AJ-684W	MG RESISTOR	680kΩ 1/16W J	1	
	R19	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R21	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	
	R22	NRSA6AJ-684W	MG RESISTOR	680kΩ 1/16W J	1	
	R23	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R262	NRSA6AD-151W	MG RESISTOR	150Ω 1/16W D	1	
	R264	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	A,C,D,G,H,I
	R265	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	A,C,D,G,H,I
	R266	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	A,C,D,G,H,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R267	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	B,E,F
	R268	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	B,E,F
	R269	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	B,E,F
	R272	NRSA6AD-151W	MG RESISTOR	150Ω 1/16W D	1	
	R282	NRSA6AD-151W	MG RESISTOR	150Ω 1/16W D	1	
	R700	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R701	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	A,B,C,D,F,G,H,I
	R702	NRSA6AJ-243W	MG RESISTOR	24kΩ 1/16W J	1	A
	R702	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	1	B
	R702	NRSA6AJ-622W	MG RESISTOR	6.2kΩ 1/16W J	1	C
	R702	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	D,H
	R702	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	E
	R702	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	F
	R702	NRSA6AJ-912W	MG RESISTOR	9.1kΩ 1/16W J	1	G,I
	R703	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R704	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	
	R707	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R708	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R709	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R711	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R712	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	1	
	R714	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R715	NRSA6AJ-106W	MG RESISTOR	10MΩ 1/16W J	1	
	R722	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R723	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	A,D,G,H,I
	R724	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	B,C,E,F
	R725	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	B,F
	R725	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	E
	R726	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,C,D,G,H,I
	R726	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	B,F
	R729	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R734	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R735	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R741	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R743	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R747	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R749	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,G,H,I
	R750	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	F
	R752	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R758	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R765	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R766	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R774	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R776	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R777	NRSA6AJ-272W	MG RESISTOR	2.7kΩ 1/16W J	1	
	R778	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R790	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R792	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R796	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R797	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R798	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R799	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	1	
	R800	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R801	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	1	
	R803	NRSA63D-562X	MG RESISTOR	5.6kΩ 1/16W D	1	
	R806	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	1	
	R807	NRSA6AD-273W	MG RESISTOR	27kΩ 1/16W D	1	
	R808	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	1	
	R809	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J	1	
	R813	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	
	R815	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,D,E,F,G,H,I
	R871	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R872	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R873	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R874	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R875	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R921	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R922	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R931	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	A,D,G,H,I
	R932	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	A,D,G,H,I
	R933	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	1	A,D,G,H,I
	R934	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	1	A,D,G,H,I
	R935	NRSA02D-241X	MG RESISTOR	240Ω 1/10W D	1	A,D,G,H,I
	R936	NRSA02D-241X	MG RESISTOR	240Ω 1/10W D	1	A,D,G,H,I
	R937	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	A,D,G,H,I
	R938	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	A,D,G,H,I
	R939	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	A,D,G,H,I
	R940	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	A,D,G,H,I
	R941	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	A,D,G,H,I
	R942	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	A,D,G,H,I
	R943	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J	1	A,D,G,H,I
	R944	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J	1	A,D,G,H,I
	R945	NRSA02D-271X	MG RESISTOR	270Ω 1/10W D	1	A,D,G,H,I
	R946	NRSA02D-271X	MG RESISTOR	270Ω 1/10W D	1	A,D,G,H,I
	R961	NRSA6AJ-751W	MG RESISTOR	750Ω 1/16W J	1	
	R971	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	
	R972	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	
	R973	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R974	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R975	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R976	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	1	
	R981	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R982	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1101	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1102	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R1103	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1110	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,C,D,G,H,I
	R1111	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1112	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R1113	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1121	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1122	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1123	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1124	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1131	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1132	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1133	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1134	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1141	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1142	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1143	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1144	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1151	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1152	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1154	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	E
	R1191	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1192	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1193	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1194	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1195	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1196	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1201	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1202	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R1203	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1210	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,C,D,G,H,I
	R1211	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1212	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R1213	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1221	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1222	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1223	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1224	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1231	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1232	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1233	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1234	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1241	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1242	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1243	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1244	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1251	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1252	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1254	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	E
	R1291	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1292	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1293	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1294	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1295	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1296	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1301	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R1302	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1303	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1304	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	1	
	R1307	NRSA6AJ-430W	MG RESISTOR	43Ω 1/16W J	1	
	R1308	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R1309	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R1310	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,C,D,G,H,I
	R1311	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1314	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	A,C,D,E,G,H,I
	R1315	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,C,D,E,G,H,I
	R1316	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	A,C,D,E,G,H,I
	R1317	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	E
	R1318	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	B,F
	R1319	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,F
	R1325	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,C,D,G,H,I
	R1326	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	E
	R1327	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	A,C,D,E,G,H,I
	R1350	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	
	R1352	NRSA02J-470X	MG RESISTOR	47Ω 1/10W J	1	E
	R1356	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	E
	R1357	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	E
	R1358	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,C,D,G,H,I
	R1359	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	E
	R1360	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	E
	R1363	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	A,C,D,E,G,H,I
	R1364	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,C,D,E,G,H,I
	R1368	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R1369	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1370	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1371	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R1372	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R1373	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1374	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1375	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1391	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1392	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1393	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1394	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1401	NRSA02J-221X	MG RESISTOR	220Ω 1/10W J	1	
	R1402	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1403	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J	1	
	R1404	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1502	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1503	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1542	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	E
	R1912	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	
	R1921	NRSA02J-472X	MG RESISTOR	4.7kΩ 1/10W J	1	A,D,E,F,G,H,I
	R1931	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1932	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	1	
	R1933	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R1941	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1942	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R1944	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R1945	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1946	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1947	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1948	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R1952	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1953	NRSA6AJ-273W	MG RESISTOR	27kΩ 1/16W J	1	
	R1961	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1971	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R6221	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R6222	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R7008	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7011	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	E
	R7014	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	1	
	R7017	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7024	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7025	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7038	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7040	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7046	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R7047	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7048	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R7062	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7063	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7064	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7065	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R7066	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R7072	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R7073	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R7088	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7089	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7092	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7093	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7095	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7103	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7118	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R7119	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7121	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7122	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7130	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7201	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7202	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7301	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R7302	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7303	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R7304	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R7502	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7503	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R7504	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R7777	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8000	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R8001	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R8005	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	
	R8006	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8007	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	1	
	R8008	NRSA6AD-243W	MG RESISTOR	24kΩ 1/16W D	1	
	R8009	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8010	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8030	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8031	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R8032	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8033	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R8034	NRS181J-100X	MG RESISTOR	10Ω 1/8W J	1	
	R8036	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R8037	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	1	
	R8038	NRSA6AD-243W	MG RESISTOR	24kΩ 1/16W D	1	
	R8039	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R8041	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R8042	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8101	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	1	
	R8102	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J	1	
	R8103	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	1	
	R8104	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	1	
	R8105	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R8106	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R8107	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R8109	NRSA6AD-471W	MG RESISTOR	470Ω 1/16W D	1	
	R8110	NRSA6AD-122W	MG RESISTOR	1.2kΩ 1/16W D	1	
	R8111	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	
	R8115	NRSA6AJ-5R6W	MG RESISTOR	5.6Ω 1/16W J	1	
	R8201	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	1	
	R8202	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	1	
	R8203	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	1	
	R8204	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	1	
	R8205	NRSA6AJ-562W	MG RESISTOR	5.6kΩ 1/16W J	1	
	R8206	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J	1	
	R8207	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R8208	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8209	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	1	
	R8210	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D	1	
	R8211	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	
	R8212	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R8213	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R8214	NRSA6AJ-150W	MG RESISTOR	15Ω 1/16W J	1	
	R8215	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	1	
	R8216	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	
	R8217	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R8301	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R8302	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R8303	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	
	R8309	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R9993	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R9998	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R9999	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	RA131	NRB04CJ-392W	NET RESISTOR	3.9kΩ J	1	
	RA722	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	RA723	NRB04CJ-470W	NET RESISTOR	47Ω J	1	
	RA724	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	RA725	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	RA728	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	RA729	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA731	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	L1	QQR1872-001	RF COIL		1	
	L2	QQL244J-561Z	COIL	560uH J	1	
	L3	NQL093K-R27X	P COIL	0.27uH K	1	
	L5	QQL244J-561Z	COIL	560uH J	1	
	L6	NQL79GM-4R7X	COIL	4.7uH M	1	
	L8	NQL093K-R47X	P COIL	0.47uH K	1	
	L9	NQL093K-4R7X	P COIL	4.7uH K	1	
	L10	NQL093K-R47X	P COIL	0.47uH K	1	
	L11	NQL093K-1R8X	P COIL	1.8uH K	1	
	L801	NQL52EM-220X	COIL	22uH M	1	
	L901	QQR1883-002	CHOKE COIL		1	
	L902	NQL79GM-101X	COIL	100uH M	1	
	L961	NQR0682-001X	CHOKE COIL		1	
	L8001	NQLC8CM-220X	COIL	22uH M	1	
	L8002	NQL52EM-220X	COIL	22uH M	1	
	L8031	NQLC8CM-220X	COIL	22uH M	1	
	L8101	NQLC8CM-220X	COIL	22uH M	1	
	L8201	NQLC8CM-470X	COIL	47uH M	1	
	CN101	QGA2501C1-04	CONNECTOR	W-B (1-4)	1	
	CN103	QGF0536C3-12W	CONNECTOR	FFC/FPC (1-12)	1	
	CN104	QGF0536C3-14W	CONNECTOR	FFC/FPC (1-14)	1	
	CN105	QGF0534F6-50X	CONNECTOR	FFC/FPC (1-50)	1	
	CN108	QGF0534F6-12X	CONNECTOR	FFC/FPC (1-12)	1	
	CN109	QGA1002C1-06X	CONNECTOR	W-B (1-6)	1	
	CN111	QGA2001C1-05	CONNECTOR	W-B (1-5)	1	
	CN112	QGA2001C1-02	CONNECTOR	W-B (1-2)	1	
	CN116	QGF0567F1-45W	CONNECTOR	FFC/FPC (1-45)	1	
	CN119	QGA2501C1-03	CONNECTOR	W-B (1-3)	1	A,D,G,H,I
	CN901	QNZ0607-001	CAR CONNECTOR		1	
⚠	F151	NMFZ028-5R0X-J1	FUSE	5A	1	E
⚠	F801	NMFZ032-4R0X-H	FUSE	4A	1	
⚠	F831	NMFZ031-1R6X-H	FUSE	1.6A	1	
	J101	QNB0348-001	ANT TERMINAL		1	
	J151	QNZ0907-001	CIR CONNECTOR		1	E
	J1001	QNN0861-001	PIN JACK		1	
	J1003	QNS0301-002	3.5 JACK		1	
	K1	NQR0269-026X	FERRITE BEADS	10.500mA	1	E
	TH131	NAD0052-471X	P THERMISTOR	470Ω	1	
	VA111	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA121	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA131	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA151	NAF0034-270X	VARISTOR(ZNR)	27V	1	E

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	VA152	NAF0034-270X	VARISTOR(ZNR)	27V	1	E
	VA153	NAF0034-270X	VARISTOR(ZNR)	27V	1	E
	VA154	NAF0034-270X	VARISTOR(ZNR)	27V	1	E
	VA155	NAF0034-270X	VARISTOR(ZNR)	27V	1	E
	VA156	NAF0034-270X	VARISTOR(ZNR)	27V	1	E
	VA941	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	X1	QAX0952-001Z	CRYSTAL		1	
	X701	QAX0967-001Z	CRYSTAL		1	
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	

PANEL-A UNIT (LVA11039-51A) <02>

	IC401	MN103SH23	IC(MCU)		1	
	IC403	XC6120N272NG-X	IC		1	
	IC404	TC7SZ17FE-X	IC(DIGITAL)		1	
	IC405	XC6213B122NG-X	IC		1	
	IC431	A3V28S40FTP-G6	IC		1	
	IC441	JVM612E	PROGRAMED IC	IC441 IC451 will need to be replaced in pairs.	1	
	IC451	JVM613E	PROGRAMED IC	IC441 IC451 will need to be replaced in pairs.	1	
	IC501	NJM2831F92-X	IC		1	
	IC511	NJM2904V-X	IC		1	
	Q4601	LSAR523UB-X	TRANSISTOR		1	
	Q4611	LSAR523UB-X	TRANSISTOR		1	
	Q4621	LSAR523UB-X	TRANSISTOR		1	
	Q4631	LSAR523UB-X	TRANSISTOR		1	
	Q5201	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q5202	LSCR523UB-X	TRANSISTOR		1	
	Q5203	LSCR523UB-X	TRANSISTOR		1	
	Q5301	LSAR523UB-X	TRANSISTOR		1	
	Q5302	LSAR523UB-X	TRANSISTOR		1	
	D5201	DA2J101-X	SI DIODE		1	
	D5202	RKZ18B2KG-X	Z DIODE		1	
	C4001	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	1	
	C4002	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	1	
	C4010	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4013	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4019	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4020	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4028	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4038	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4039	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4049	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4051	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4055	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4056	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4057	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4062	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4066	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4067	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4069	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4074	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4075	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4085	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4094	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C4095	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4097	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4103	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4106	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4107	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4120	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4121	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4122	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4129	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C4135	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4145	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4154	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C4155	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C4157	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4160	NDCA1HJ-330W	C CAPACITOR	33pF 50V J	1	
	C4161	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	1	
	C4163	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4164	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4165	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4166	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4168	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M	1	
	C4169	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4171	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4172	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4173	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4176	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4177	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4178	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4182	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4183	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4190	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4196	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4201	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4210	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4217	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C4218	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4301	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4303	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4309	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4314	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4327	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4343	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4349	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4354	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4408	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4409	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4508	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4601	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4602	NDCA1HJ-680W	C CAPACITOR	68pF 50V J	1	
	C4604	NDCA1HJ-180W	C CAPACITOR	18pF 50V J	1	
	C4605	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4614	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	1	
	C4615	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4616	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4624	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	1	
	C4625	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4626	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4634	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	1	
	C4635	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4636	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C5001	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5002	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C5003	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C5004	NCJ21CK-106X-A	C CAPACITOR	10uF 16V K	1	
	C5005	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C5010	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C5011	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5103	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C5201	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5202	NCB21EK-105X	C CAPACITOR	1uF 25V K	1	
	C5203	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5301	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C5302	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	R4001	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J	1	
	R4002	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R4030	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4053	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4054	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4058	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4059	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4060	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4062	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4063	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4064	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4065	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4066	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4067	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4069	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4070	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4077	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4078	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4079	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4083	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4087	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4091	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4127	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4128	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
⚠	R4129	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R4130	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4131	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4132	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	
	R4133	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R4136	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R4137	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4138	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R4146	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4157	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R4161	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4164	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	
	R4166	NRSA6AJ-2R2W	MG RESISTOR	2.2Ω 1/16W J	1	
	R4167	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R4402	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4501	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R4502	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4503	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R4516	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R4517	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R4601	NRSA6AJ-391W	MG RESISTOR	390Ω 1/16W J	1	
	R4606	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	
	R4608	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R4611	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R4613	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4614	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R4615	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R4618	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R4621	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R4623	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4624	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4625	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R4628	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R4631	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R4633	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4634	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4635	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R4638	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R4640	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R5001	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	
	R5002	NRSA6AD-161W	MG RESISTOR	160Ω 1/16W D	1	
	R5003	NRSA6AD-430W	MG RESISTOR	43Ω 1/16W D	1	
	R5004	NRSA6AD-360W	MG RESISTOR	36Ω 1/16W D	1	
	R5005	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	
	R5006	NRSA6AD-161W	MG RESISTOR	160Ω 1/16W D	1	
	R5007	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	
	R5008	NRSA6AD-360W	MG RESISTOR	36Ω 1/16W D	1	
	R5009	NRSA6AD-430W	MG RESISTOR	43Ω 1/16W D	1	
	R5010	NRSA6AD-161W	MG RESISTOR	160Ω 1/16W D	1	
	R5011	NRSA6AD-620W	MG RESISTOR	62Ω 1/16W D	1	
	R5020	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R5106	NRSA6AD-822W	MG RESISTOR	8.2kΩ 1/16W D	1	
	R5107	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	1	
	R5109	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R5201	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R5203	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	1	
	R5204	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	1	
	R5205	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R5302	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R5303	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	
	R5304	NRSA6AD-562W	MG RESISTOR	5.6kΩ 1/16W D	1	
	RA401	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA402	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA403	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA404	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA405	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA406	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA407	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA408	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA409	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA415	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA416	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA417	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA418	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA419	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA420	NRB04CJ-330W	NET RESISTOR	33Ω J	1	
	L4001	NQL79GM-470X	COIL	47uH M	1	
	L4601	NQLD8DJ-470X	COIL	47uH J	1	
	CN401	QGF0534F6-30X	CONNECTOR	FFC/FPC (1-30)	1	
	CN501	QGF0572F1-60X	CONNECTOR	FFC/FPC (1-60)	1	
	X4001	NAX1038-001X	CRYSTAL		1	

PANEL-B UNIT (LVA11122-11A) <03>

⚠	IC351	CPI-210/BC/-X	PHOTO COUPLER		1	
	IC651	RS-771-X	IR DETECT UNIT		1	
	IC661	M34286G2168GPX	IC(MICRO C ROM)		1	
	Q3501	2SC1623/5-6/-X	TRANSISTOR		1	
	Q6001	LSCR523UB-X	TRANSISTOR		1	
	Q6002	LSCR523UB-X	TRANSISTOR		1	
	Q6003	LSCR523UB-X	TRANSISTOR		1	
	Q6004	LSCR523UB-X	TRANSISTOR		1	
	Q6005	2SD1664/QR/-W	TRANSISTOR		1	
	Q6006	LSCR523UB-X	TRANSISTOR		1	
	Q6007	LSCR523UB-X	TRANSISTOR		1	
	Q6008	LSCR523UB-X	TRANSISTOR		1	
	Q6009	LSCR523UB-X	TRANSISTOR		1	
	Q6010	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q6011	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q6201	LSCR523UB-X	TRANSISTOR		1	
	Q6601	LTA014EEB-X	DIGI TRANSISTOR		1	
	Q6602	LTC044EEB-X	DIGI TRANSISTOR		1	
	Q6701	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q6702	LSCR523UB-X	TRANSISTOR		1	
	Q6703	LTC043ZEB-X	DIGI TRANSISTOR		1	
	D6001	RKZ30BKG-X	Z DIODE		1	
	D6041	RKZ18B2KG-X	Z DIODE		1	
	D6042	DA2J101-X	SI DIODE		1	
	D6101	RKZ6.2B2KG-X	Z DIODE		1	
	D6102	RKZ6.2B2KG-X	Z DIODE		1	
	D6103	RKZ6.2B2KG-X	Z DIODE		1	
	D6104	RKZ6.2B2KG-X	Z DIODE		1	
	D6201	KLB-16BP-X	LED		1	
	D6202	KLB-16BP-X	LED		1	
	D6503	CL-170IR-X-X	IR LED		1	
	C6001	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C6002	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C6003	NCB21EK-105X	C CAPACITOR	1uF 25V K	1	
	C6004	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C6015	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C6101	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6102	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6103	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6104	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6202	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C6501	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C6502	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C6604	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	R3501	NRSA63J-751X	MG RESISTOR	750Ω 1/16W J	1	
	R3503	NRSA6AJ-393W	MG RESISTOR	39kΩ 1/16W J	1	
	R3504	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R3505	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R3507	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J	1	
	R3508	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R3509	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R3510	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R6001	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	1	
	R6002	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R6003	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	1	
	R6004	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R6005	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	1	
	R6006	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R6007	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	1	
	R6008	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R6013	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R6015	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	
	R6201	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	
	R6203	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R6210	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	1	
	R6501	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R6502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R6702	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	1	
	R6703	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	1	
	R6705	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	1	
	R6707	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	
	R6708	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	
	RA601	NRB04CJ-821W	NET RESISTOR	820Ω J	1	
	RA602	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	RA603	NRB04CJ-470W	NET RESISTOR	47Ω J	1	
	L6001	NQL79GM-470X	COIL	47uH M	1	
	CN351	QGA1002C1-06X	CONNECTOR	W-B (1-6)	1	
	CN352	QGA1002F1-02X	CONNECTOR	W-B (1-2)	1	
	CN601	QGZ1801M1-24	CONNECTOR	(1-24)	1	
	CN602	QGZ1801M1-24	CONNECTOR	(1-24)	1	
	CN603	QGF0534F6-30X	CONNECTOR	FFC/FPC (1-30)	1	
	CN604	QGF0534F6-18X	CONNECTOR	FFC/FPC (1-18)	1	
	CN611	QGF0534F6-18X	CONNECTOR	FFC/FPC (1-18)	1	
	CN612	QGF0534F6-14X	CONNECTOR	FFC/FPC (1-14)	1	
	CN613	QGF0522F5-10W	CONNECTOR	FFC/FPC (1-10)	1	
	CN614	QGF1039F3-04X	CONNECTOR	FFC/FPC (1-4)	1	
	CN651	QGF0545F2-14X	CONNECTOR	FFC/FPC (1-14)	1	
	CN681	QGF0522F5-45W	CONNECTOR	FFC/FPC (1-45)	1	
	CN682	QGZ1801L1-24W	CONNECTOR	(1-24)	1	
	CN683	QGZ1801L1-24W	CONNECTOR	(1-24)	1	
	S3501	NSW0225-001X	DETECT SWITCH		1	
	S3502	NSW0126-001X	DETECT SWITCH		1	
	S6501	NSW0331-001X	TACT SWITCH		1	
	S6502	NSW0331-001X	TACT SWITCH		1	
	VA601	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA603	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA605	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA608	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA611	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA631	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA632	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA633	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA634	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA635	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA636	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA637	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA638	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA639	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA647	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA649	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	X661	NAX1132-001X	C RESONATOR		1	
SUB UNIT (LVA11128-2xA) <04>						
	IC201	NJM2561F1-X	IC		1	
	IC211	NJM2535V-X	IC		1	
	IC231	NJM2535V-X	IC		1	
	IC241	NJM2505AF-X	IC		1	
	D296	MC2850-X	SI DIODE		1	A,C,D,G,H,I
	C200	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C201	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C202	QETN1AM-477Z	E CAPACITOR	470uF 10V M	1	
	C203	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C211	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C212	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C214	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C231	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C232	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C234	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C236	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	
	C237	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	
	C241	NCB21CK-475X	C CAPACITOR	4.7uF 16V K	1	
	C242	NCB21CK-475X	C CAPACITOR	4.7uF 16V K	1	
	C243	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C244	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C245	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C261	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,C,D,G,H,I
	C271	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,C,D,G,H,I
	C281	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,C,D,G,H,I
	C296	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	1	A,C,D,G,H,I
	C2102	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,C,D,G,H,I
	C2202	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,C,D,G,H,I
	C2302	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,C,D,G,H,I
	R201	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	
	R213	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R215	NRSA6AD-151W	MG RESISTOR	150Ω 1/16W D	1	
	R231	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	
	R233	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R238	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R239	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R241	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R242	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R243	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	
	R245	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	1	
	R246	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R247	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R251	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	A,C,D,G,H,I
	R252	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	A,C,D,G,H,I
	R261	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	A,C,D,G,H,I
	R268	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	A,C,D,G,H,I
	R271	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	A,C,D,G,H,I
	R278	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	A,C,D,G,H,I
	R281	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	A,C,D,G,H,I
	R288	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	A,C,D,G,H,I
	R291	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	1	A,C,D,G,H,I
	R296	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	A,C,D,G,H,I
	R2101	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	A,C,D,G,H,I
	R2201	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	A,C,D,G,H,I
	RA241	NRB04CJ-392W	NET RESISTOR	3.9kΩ J	1	
	CN201	QGF0534F6-14X	CONNECTOR	FFC/FPC (1-14)	1	
	CN202	QGF0534F6-12X	CONNECTOR	FFC/FPC (1-12)	1	
	CN231	QGA2001F1-02	CONNECTOR	W-B (1-2)	1	
	CN261	QGA2001C1-07	CONNECTOR	W-B (1-7)	1	A,C,D,G,H,I
	CN262	QGA2001C1-06	CONNECTOR	W-B (1-6)	1	A,C,D,G,H,I
	J201	QNN0875-001	PIN JACK		1	
	J2000	QNS0283-001	3.5 JACK		1	
	VA201	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA210	NAF0034-270X	VARISTOR(ZNR)	27V	1	A,C,D,G,H,I
	VA220	NAF0034-270X	VARISTOR(ZNR)	27V	1	A,C,D,G,H,I
	VA233	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA241	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA249	NAF0034-270X	VARISTOR(ZNR)	27V	1	
	VA251	NAF0034-270X	VARISTOR(ZNR)	27V	1	A,C,D,G,H,I
	VA252	NAF0034-270X	VARISTOR(ZNR)	27V	1	A,C,D,G,H,I
	VA261	NAF0034-270X	VARISTOR(ZNR)	27V	1	A,C,D,G,H,I
	VA271	NAF0034-270X	VARISTOR(ZNR)	27V	1	A,C,D,G,H,I
	VA281	NAF0034-270X	VARISTOR(ZNR)	27V	1	A,C,D,G,H,I
	VA291	NAF0034-270X	VARISTOR(ZNR)	27V	1	A,C,D,G,H,I

BT UNIT (LVA11181-11A) <05>

	IC301	TCC8600	IC		1	
	IC302	JVM603D	PROGRAMED IC		1	
	IC303	A3V28S40FTP-G6	IC		1	
	IC331	AK4387ET-X	IC		1	
	IC332	NJM4565E-X	IC		1	
	IC341	NJM4565E-X	IC		1	
	IC371	XC6213B182NG-X	IC		1	
	Q3001	DSA7504/QR/-X	TRANSISTOR		1	
	Q3002	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q3311	2SC1623/5-6/-X	TRANSISTOR		1	
	D3003	DA2J101-X	SI DIODE		1	
	D3311	DZ2J062/M/-X	Z DIODE		1	
	D3312	DA2J101-X	SI DIODE		1	
	C303	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	
	C311	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C331	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C333	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C335	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C337	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C339	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C341	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C343	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C371	NCB31CK-474X	C CAPACITOR	0.47uF 16V K	1	
	C372	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	1	
	C3001	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C3010	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C3100	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C3102	NCBA1HK-821W	C CAPACITOR	820pF 50V K	1	
	C3103	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	
	C3104	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3142	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3143	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C3145	NCBA1CK-333W	C CAPACITOR	0.033uF 16V K	1	
	C3146	NCBA1CK-333W	C CAPACITOR	0.033uF 16V K	1	
	C3147	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3151	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3152	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3202	NCBA1HK-821W	C CAPACITOR	820pF 50V K	1	
	C3203	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	
	C3204	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3241	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C3242	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3243	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C3301	NEAF1CM-107X	E CAPACITOR	100uF 16V M	1	
	C3302	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3303	NEAF1CM-476X	E CAPACITOR	47uF 16V M	1	
	C3304	NCBA1CK-123W	C CAPACITOR	0.012uF 16V K	1	
	C3311	NEAF1CM-107X	E CAPACITOR	100uF 16V M	1	
	C3322	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C3323	NEAF1CM-476X	E CAPACITOR	47uF 16V M	1	
	C3324	NCBA1HK-821W	C CAPACITOR	820pF 50V K	1	
	C3325	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	
	C3326	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C3407	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3409	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3410	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3419	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3424	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3426	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3440	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3443	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3454	NDCA1HJ-270W	C CAPACITOR	27pF 50V J	1	
	C3455	NDCA1HJ-330W	C CAPACITOR	33pF 50V J	1	
	C3458	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3465	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3468	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C3469	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3472	NCBA1HK-122W	C CAPACITOR	1200pF 50V K	1	
	C3473	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C3475	NDCA1HJ-331W	C CAPACITOR	330pF 50V J	1	
	C3477	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	
	C3484	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3491	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3524	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C3575	NDCA1HJ-220W	C CAPACITOR	22pF 50V J	1	
	R322	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R323	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R324	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R325	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R3001	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R3002	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R3003	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R3004	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R3005	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R3008	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R3010	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	1	
	R3101	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R3102	NRSA6AJ-243W	MG RESISTOR	24kΩ 1/16W J	1	
	R3103	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R3142	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	
	R3143	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J	1	
	R3144	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	1	
	R3145	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R3146	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R3151	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R3152	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R3201	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R3202	NRSA6AJ-243W	MG RESISTOR	24kΩ 1/16W J	1	
	R3203	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R3241	NRSA6AJ-272W	MG RESISTOR	2.7kΩ 1/16W J	1	
	R3242	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	
	R3243	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J	1	
	R3311	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	
	R3312	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R3313	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R3321	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R3322	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R3323	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R3324	NRSA6AJ-243W	MG RESISTOR	24kΩ 1/16W J	1	
	R3325	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R3326	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R3404	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R3415	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R3444	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R3446	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	
	R3447	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R3454	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R3455	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R3457	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R3463	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R3466	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R3468	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R3469	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R3478	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R3479	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R3480	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R3482	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R3483	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R3577	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R3586	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R3587	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R3589	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	RA301	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA302	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA303	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA304	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA305	NRB04CJ-470W	NET RESISTOR	47Ω J	1	
	RA306	NRB04CJ-472W	NET RESISTOR	4.7kΩ J	1	
	RA307	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	L3001	NQR0654-001X	EMI FILTER		1	
	L3301	NQL79GM-470X	COIL	47uH M	1	
	L3462	NQL093K-1R8X	P COIL	1.8uH K	1	
	L3473	NQL79GM-330X	COIL	33uH M	1	
	B301	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	CN301	QNZ1037-001	USB CONNECTOR		1	
	CN311	QGF0534F6-12X	CONNECTOR	FFC/FPC (1-12)	1	
	CN341	QGA2001F6-02X	CONNECTOR	W-B (1-2)	1	
	X3402	NAX1168-001X	CRYSTAL		1	

SD UNIT (LVA11129-1xA) <06>

	C5501	NEAF1CM-476X	E CAPACITOR	47uF 16V M	1	
	C5502	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C5509	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	
	C5510	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	R5501	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R5502	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R5503	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R5505	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R5506	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R5507	NRSA63J-220X	MG RESISTOR	22Ω 1/16W J	1	
	R5508	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R5509	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R5510	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R5511	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R5512	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R5513	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R5514	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	A,E,F,G,H,I
	R5515	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	A,E,F,G,H,I
	R5516	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R5517	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R5518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R5519	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	CN551	QGF0534F6-09X	CONNECTOR	FFC/FPC (1-9)	1	
	CN552	NNZ0256-001X	SD CARD CONNE		1	

DVD UNIT (FMU-XS3-31D: LVA11111-10A) IN DVD MECHA <07>

	IC101	RT3CLLM/EF/-X	TRANSISTOR		1	
	IC102	RT3K11M-X	MOS FET ARRAY		1	
	IC201	BD8215EFV-X	IC		1	
	IC301	MN2DS0040MA	IC		1	
	IC381	JVM608B	PROGRAMED IC		1	
	IC391	A3V28S40FTP-G6	IC		1	
	IC401	AK4387ET-X	IC		1	
	IC501	BR24T32FVT-W-X	IC		1	
	IC551	MFI337S3959-X	IC		1	
	IC901	MM3233CF-X	IC		1	
	IC921	BD12KA5FP-X	IC		1	
	Q4	DSC2001/R/-X	TRANSISTOR		1	
	Q11	DSC2001/R/-X	TRANSISTOR		1	
	Q12	LTC044EEB-X	DIGI TRANSISTOR		1	
	Q101	2SB1424/R/-W	TRANSISTOR		1	
	Q102	2SB1424/R/-W	TRANSISTOR		1	
	Q103	2SC4617/QR/-X	TRANSISTOR		1	
	Q271	LTC014EEB-X	DIGI TRANSISTOR		1	
	Q302	LTC044EEB-X	DIGI TRANSISTOR		1	
	Q341	LTC044EEB-X	DIGI TRANSISTOR		1	
	D6	AN1102W-6-X	IR LED		1	
	D7	AN1102W-6-X	IR LED		1	
	D9	PS1192HB-22-X	PHOTO TRANSISTOR		1	
	D11	PS1192HB-22-X	PHOTO TRANSISTOR		1	
	C101	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M	1	
	C102	NCJ10JM-476X-A	C CAPACITOR	47uF 6.3V M	1	
	C103	NCJ10JM-476X-A	C CAPACITOR	47uF 6.3V M	1	
	C106	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C107	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C108	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C109	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C110	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C111	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C112	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C113	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C121	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C122	NCBA1CK-333W	C CAPACITOR	0.033uF 16V K	1	
	C123	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C124	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C131	NCBA1HK-272W	C CAPACITOR	2700pF 50V K	1	
	C133	NCB31CK-684X	C CAPACITOR	0.68uF 16V K	1	
	C134	NCB31CK-684X	C CAPACITOR	0.68uF 16V K	1	
	C135	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C136	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C137	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C138	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C151	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C201	NCJ41CK-476X-A	C CAPACITOR	47uF 16V K	1	
	C203	NCJ41CK-476X-A	C CAPACITOR	47uF 16V K	1	
	C207	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C208	NCBA1HK-222W	C CAPACITOR	2200pF 50V K	1	
	C209	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C210	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C211	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C212	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C213	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C214	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C215	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C218	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C219	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C220	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C221	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C241	NCBA1EK-223W	C CAPACITOR	0.022uF 25V K	1	
	C242	NCBA1EK-223W	C CAPACITOR	0.022uF 25V K	1	
	C251	NCBA1HK-221W	C CAPACITOR	220pF 50V K	1	
	C261	NDCA1HJ-181W	C CAPACITOR	180pF 50V J	1	
	C301	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C302	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C303	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C304	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C305	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C306	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C307	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C308	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C309	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C310	NCBA1EK-103W	C CAPACITOR	0.01uF 25V K	1	
	C311	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C314	NCBA1HK-122W	C CAPACITOR	1200pF 50V K	1	
	C315	NCBA1HK-122W	C CAPACITOR	1200pF 50V K	1	
	C316	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C317	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C318	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C319	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C320	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C322	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C324	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C325	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C326	NCBA1EK-103W	C CAPACITOR	0.01uF 25V K	1	
	C327	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C329	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C330	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C331	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C332	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C333	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C351	NDCA1HJ-120W	C CAPACITOR	12pF 50V J	1	
	C352	NDCA1HJ-120W	C CAPACITOR	12pF 50V J	1	
	C381	NCB10JK-226X-R	C CAPACITOR	22uF 6.3V K	1	
	C382	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C391	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M	1	
	C392	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C393	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C394	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C395	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C396	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C397	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C398	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C399	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C401	NCJ11AK-476X-A	C CAPACITOR	47uF 10V K	1	
	C402	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C403	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C404	NCB10JK-226X-R	C CAPACITOR	22uF 6.3V K	1	
	C405	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C406	NCBA1HK-331W	C CAPACITOR	330pF 50V K	1	
	C411	NCBA1CK-473W	C CAPACITOR	0.047uF 16V K	1	
	C412	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C501	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C511	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C701	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C702	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C703	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C704	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C705	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C751	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C901	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C902	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C911	NCJ10JM-476X-A	C CAPACITOR	47uF 6.3V M	1	
	C912	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C913	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M	1	
	C914	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C921	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C923	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	R11	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	1	
	R12	NRSA6AJ-184W	MG RESISTOR	180kΩ 1/16W J	1	
	R13	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R15	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	1	
	R17	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R21	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	1	
	R101	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R102	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R103	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R104	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	1	
	R105	NRZ0122-270X	MG RESISTOR	27Ω	1	
	R107	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R111	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R112	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R113	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R114	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	1	
	R115	NRZ0122-390X	MG RESISTOR	39Ω	1	
	R117	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R121	NRSA6AJ-910W	MG RESISTOR	91Ω 1/16W J	1	
	R122	NRSA6AJ-910W	MG RESISTOR	91Ω 1/16W J	1	
	R123	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R124	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R125	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R126	NRSA63J-150X	MG RESISTOR	15Ω 1/16W J	1	
	R131	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	1	
	R132	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	1	
	R139	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R142	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R151	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R165	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R201	NRZ0098-R22X	MG RESISTOR	0.22Ω	1	
	R202	NRZ0098-R22X	MG RESISTOR	0.22Ω	1	
	R203	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R204	NRZ0098-R47X	MG RESISTOR	0.47Ω	1	
	R205	NRZ0098-R47X	MG RESISTOR	0.47Ω	1	
	R206	NRSA63D-473X	MG RESISTOR	47kΩ 1/16W D	1	
	R212	NRSA63D-104X	MG RESISTOR	100kΩ 1/16W D	1	
	R213	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R221	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R222	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R232	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R233	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R234	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R241	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R242	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R243	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R244	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R251	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	
	R252	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R261	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R262	NRSA63D-753X	MG RESISTOR	75kΩ 1/16W D	1	
	R271	NRSA6AJ-623W	MG RESISTOR	62kΩ 1/16W J	1	
	R272	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	
	R273	NRSA6AJ-622W	MG RESISTOR	6.2kΩ 1/16W J	1	
	R274	NRSA6AJ-391W	MG RESISTOR	390Ω 1/16W J	1	
	R302	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R303	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R304	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R306	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	1	
	R307	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	1	
	R308	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	1	
	R309	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	1	
	R310	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R311	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R313	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R314	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	1	
	R315	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	1	
	R319	NRSA63D-243X	MG RESISTOR	24kΩ 1/16W D	1	
	R323	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R327	NRSA6AJ-270W	MG RESISTOR	27Ω 1/16W J	1	
	R328	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R329	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R330	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R331	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R332	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R333	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R334	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-AV71BTA	A	KW-AV71BTE	B	KW-AV71BTEE	C	KW-AV71BTEU	D
KW-AV71BTJ	E	KW-AV71BTJW	F	KW-AV71BTU	G	KW-AV71BTUI	H
KW-AV71BTUT	I						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R335	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R341	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R351	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R352	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R365	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R376	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	1	
	R386	NRSA6AJ-184W	MG RESISTOR	180kΩ 1/16W J	1	
	R400	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R401	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	1	
	R402	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	1	
	R403	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R501	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R511	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R512	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R515	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R601	NRS181F-330X	MG RESISTOR	33Ω 1/8W F	1	
	R602	NRS181F-330X	MG RESISTOR	33Ω 1/8W F	1	
	R611	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R612	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R702	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R911	NRZ0098-R18X	MG RESISTOR	0.18Ω	1	
	RA331	NRB04CJ-473W	NET RESISTOR	47kΩ J	1	
	B341	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	B411	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	CN101	QGF0522F2-30W	CONNECTOR	FFC/FPC (1-30)	1	
	CN201	QGF0523F3-20W	CONNECTOR	FFC/FPC (1-20)	1	
	CN402	QGF0534F6-60X	CONNECTOR	FFC/FPC (1-60)	1	
	K101	NQR0007-002X	FERRITE BEADS		1	
	K102	NQR0007-002X	FERRITE BEADS		1	
	K301	NQR0129-002X	FERRITE BEADS		1	
	K311	NQR0129-002X	FERRITE BEADS		1	
	K312	NQR0129-002X	FERRITE BEADS		1	
	K313	NQR0129-002X	FERRITE BEADS		1	
	K314	NQR0129-002X	FERRITE BEADS		1	
	K381	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	K391	NQR0502-001X	FERRITE BEADS		1	
	K701	NQR0502-001X	FERRITE BEADS		1	
	K703	NQR0022-005X	FERRITE BEADS		1	
	K707	NQR0022-005X	FERRITE BEADS		1	
	K708	NQR0022-005X	FERRITE BEADS		1	
	K709	NQR0022-005X	FERRITE BEADS		1	
	K711	NQR0022-005X	FERRITE BEADS		1	
	K712	NQR0022-005X	FERRITE BEADS		1	
	K714	NQR0022-005X	FERRITE BEADS		1	
	K911	NQR0502-001X	FERRITE BEADS		1	
	S1	NSW0313-001X	DETECT SWITCH		1	
	X351	NAX1135-001X	CRYSTAL		1	