
9. EXPLODED VIEWS AND PARTS LIST

NOTES:
- *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Screws adjacent to ▼ mark on product are used for disassembly.*
- *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

9.1 PACKING SECTION

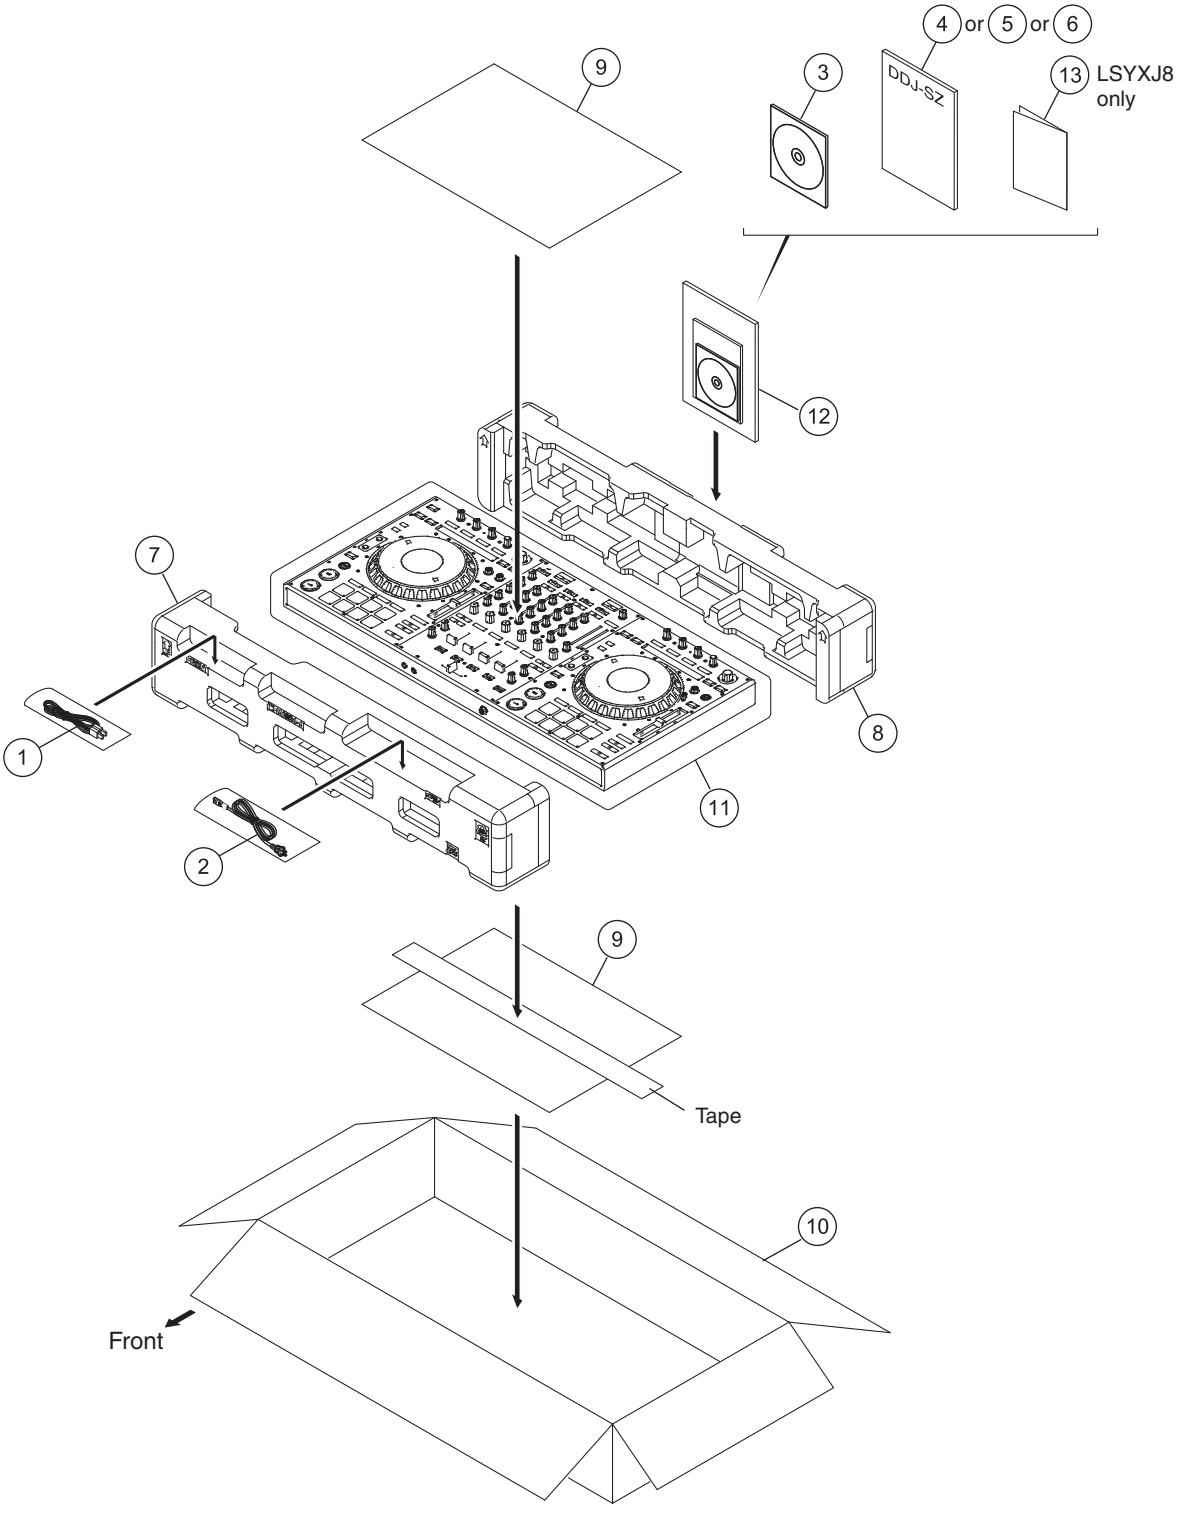

(1) PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	USB Cable	DDE1128
⚠	2	Power Cord	See Contrast table (2)
	3	CD-ROM (Installation Disc)	DXX2754
	4	Operating Instructions (Basic Edition)	See Contrast table (2)
	5	Operating Instructions (Basic Edition)	See Contrast table (2)
	6	Operating Instructions (Basic Edition)	See Contrast table (2)
	7	Pad/F	DHA1904
	8	Pad/R	DHA1905
	9	Packing Board/ACC	DHC1084
	10	Packing Case	See Contrast table (2)
	11	Mirror Mat (1200*1000)	DHL1169
NSP	12	Polyethylene Bag	AHG7117
NSP	13	Warranty Card	See Contrast table (2)

(2) CONTRAST TABLE

DDJ-SZ/UXJCB, LSYXJ8 and XJCN5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DDJ-SZ /UXJCB	DDJ-SZ /LSYXJ8	DDJ-SZ /XJCN5
⚠	2	Power Cord	DDG1108	ADG1244	DDG1114
	4	Operating Instructions (Basic Edition)(En)	DRH1247	Not used	Not used
	5	Operating Instructions (Basic Edition)(En, Fr, De, It, Nl, Es, Pt, Ru)	Not used	DRH1249	Not used
	6	Operating Instructions (Basic Edition)(Zhcn)	Not used	Not used	DRH1250
	10	Packing Case	DHG3305	DHG3304	DHG3308
NSP	13	Warranty Card	Not used	ARY7158	Not used


9.2 TOP and CHASSIS SECTION

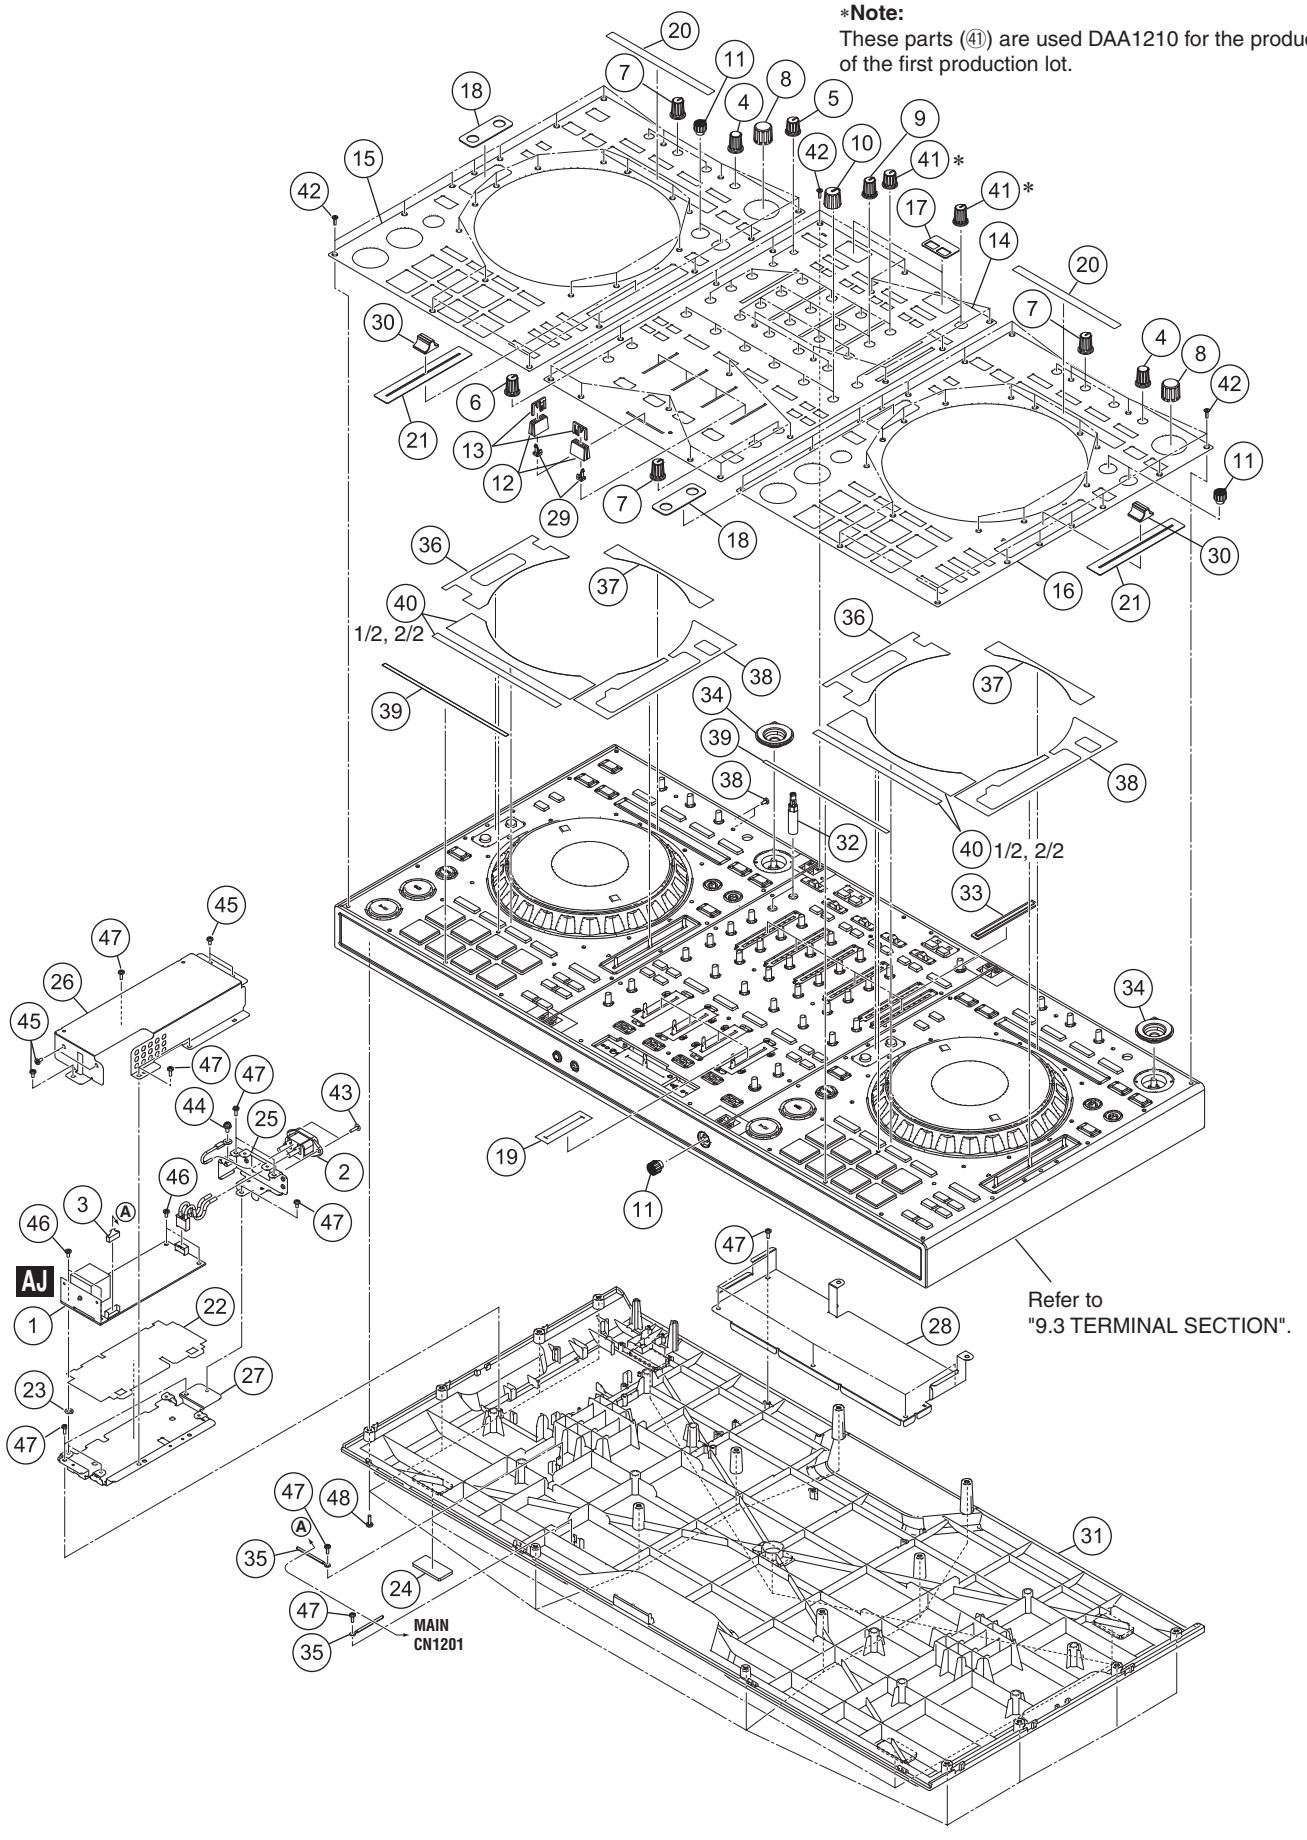

TOP and CHASSIS SECTION PARTS LIST

Mark	No.	Description	Part No.
⚠	1	POWER SUPPLY Assy	DWR1463
⚠	2	AC Inlet/3P	DKP3954
	3	Crimp Connector/6P	DKP3956
	4	Rotary Sw Knob (C)	DAA1180
	5	Knob (MA)	DAA1210
	6	Knob (Black)	DAA1212
	7	Rotary Knob (BN)	DAA1220
	8	Dial Knob	DAA1259
	9	Knob/RSW	DAA1305
	10	Knob/FRE	DAA1309
	11	Knob/CFC	DAA1326
	12	Slider Knob 1	DAC2684
	13	Slider Knob 2	DAC2685
	14	Plate/MIX	DAH2976
	15	Plate/DEL	DAH2982
	16	Plate/DER	DAH2983
	17	Panel/USB	DAH2984
	18	Panel/DEC	DAH2986
	19	Fader Packing	DEC3355
	20	Sheet/CDC	DEC3532
	21	Sheet/TMP	DEC3541
	22	Barrier/SWP	DEC3553
	23	Washer/PWR	DEC3554
	24	Sheet/LEG	DEC3557
	25	Bracket/ACI	DNF1932
	26	Shield Case/U	DNH3142
	27	Shield Case/L	DNH3143
	28	Shield Plate	DNH3155
	29	Slider Knob Stopper	DNK5888
	30	Knob/SLD	DNK5981
	31	Chassis	DNK6286
	32	Shaft/EXT	DNK6305
	33	Lens/LVL	DNK6306
	34	Ring/BRS	DNK6312
	35	Cord Clamper (Steel)	RNH-184
	36	DS Tape/ALL	DEH1048
	37	DS Tape/ALT	DEH1049
	38	DS Tape/ALR	DEH1050
	39	DS Tape/ALB	DEH1051
	40	DS Tape/PAJ	DEH1056
	41	Knob/SHR	DAA1333
	42	Screw	CPZ26P080FTB
	43	Screw	IBZ30P080FTB
	44	Screw	PMH40P080FTC
	45	Screw	BBZ30P060FTB
	46	Screw	BBZ30P080FTB
	47	Screw	BPZ30P080FNI
	48	Screw	BPZ30P100FTB


9.3 TERMINAL SECTION

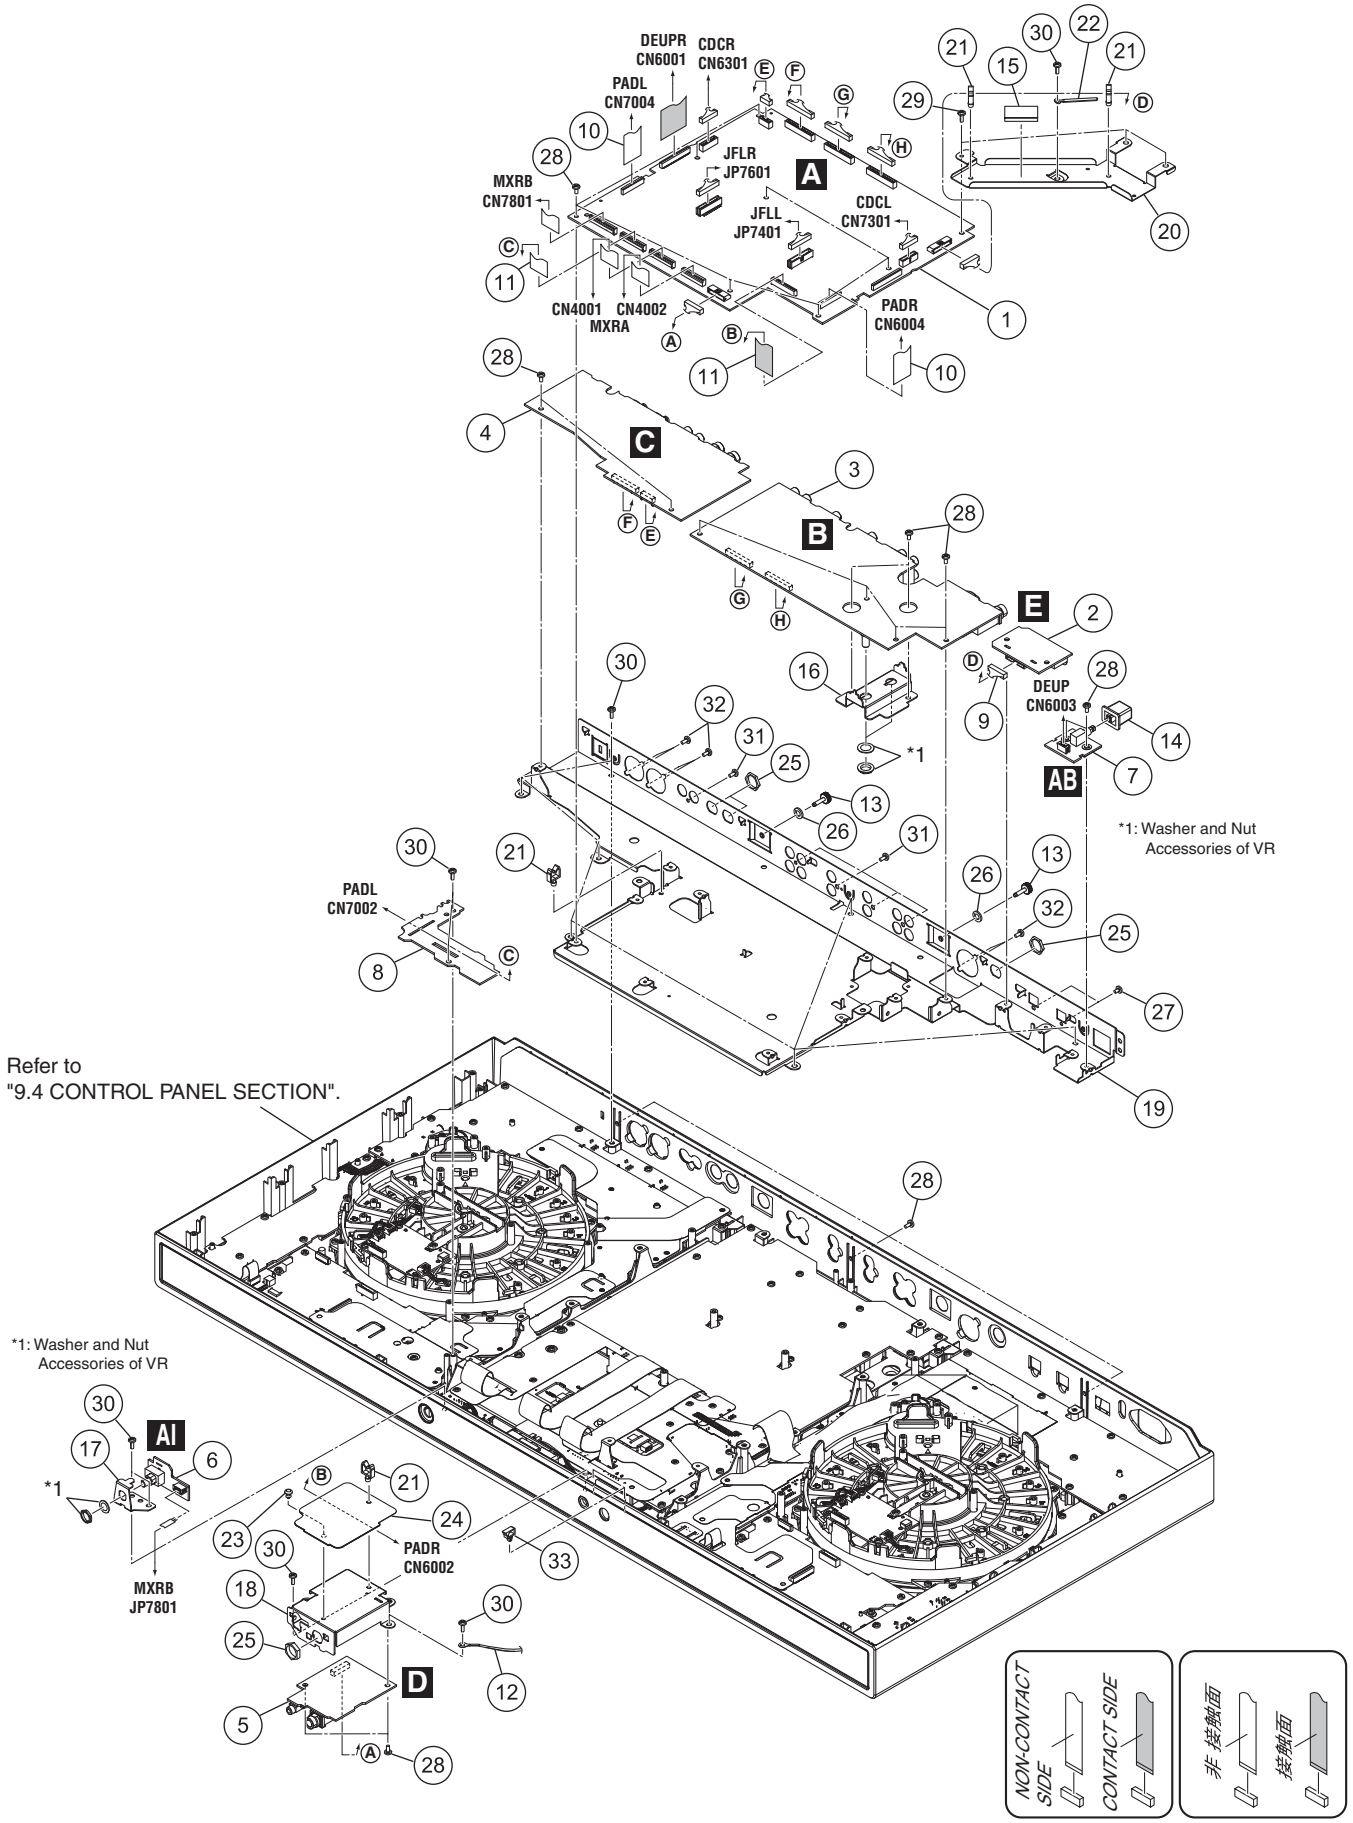

TERMINAL SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	MAIN Assy	DWX3535
	2	USBB Assy	DWX3555
	3	AIJK Assy	DWX3536
	4	AOJK Assy	DWX3537
	5	HPJK Assy	DWX3538
	6	CRFCV Assy	DWX3547
	7	PSWB Assy	DWX3560
	8	STRB Assy	DWX3585
	9	Shielded Conn-Cable	DDA1048
	10	FFC/23P	DDD1658
	11	FFC/25P	DDD1659
	12	Earth Lead Wire	DE012VC0
	13	Earth Terminal	DKE1015
	14	Power Knob	DAC2306
	15	Sheet/LEG	DEC3534
	16	Bracket/TRM	DNF1933
	17	Stay/CFC	DNF1935
	18	Stay/HP	DNF1937
	19	Plate/MGD	DNH3139
	20	Shield Plate/USB	DNH3156
	21	Holder	VEC1355
	22	Cord Clamper (Steel)	RNH-184
	23	Push Rivet	XEC3034
	24	Barrier/HP	DEC3548
	25	Nut (M12)	NKX2FNI
	26	Spring Lock Washer	WS40FNI
	27	Screw (M3*5)	DBA1340
	28	Screw	BBZ30P060FTB
	29	Screw	BBZ30P080FTB
	30	Screw	BPZ30P080FNI
	31	Screw	BPZ30P080FTB
	32	Screw	PPZ30P080FTB
	33	Locking Mini Clamp	DEC2439

9.4 CONTROL PANEL SECTION

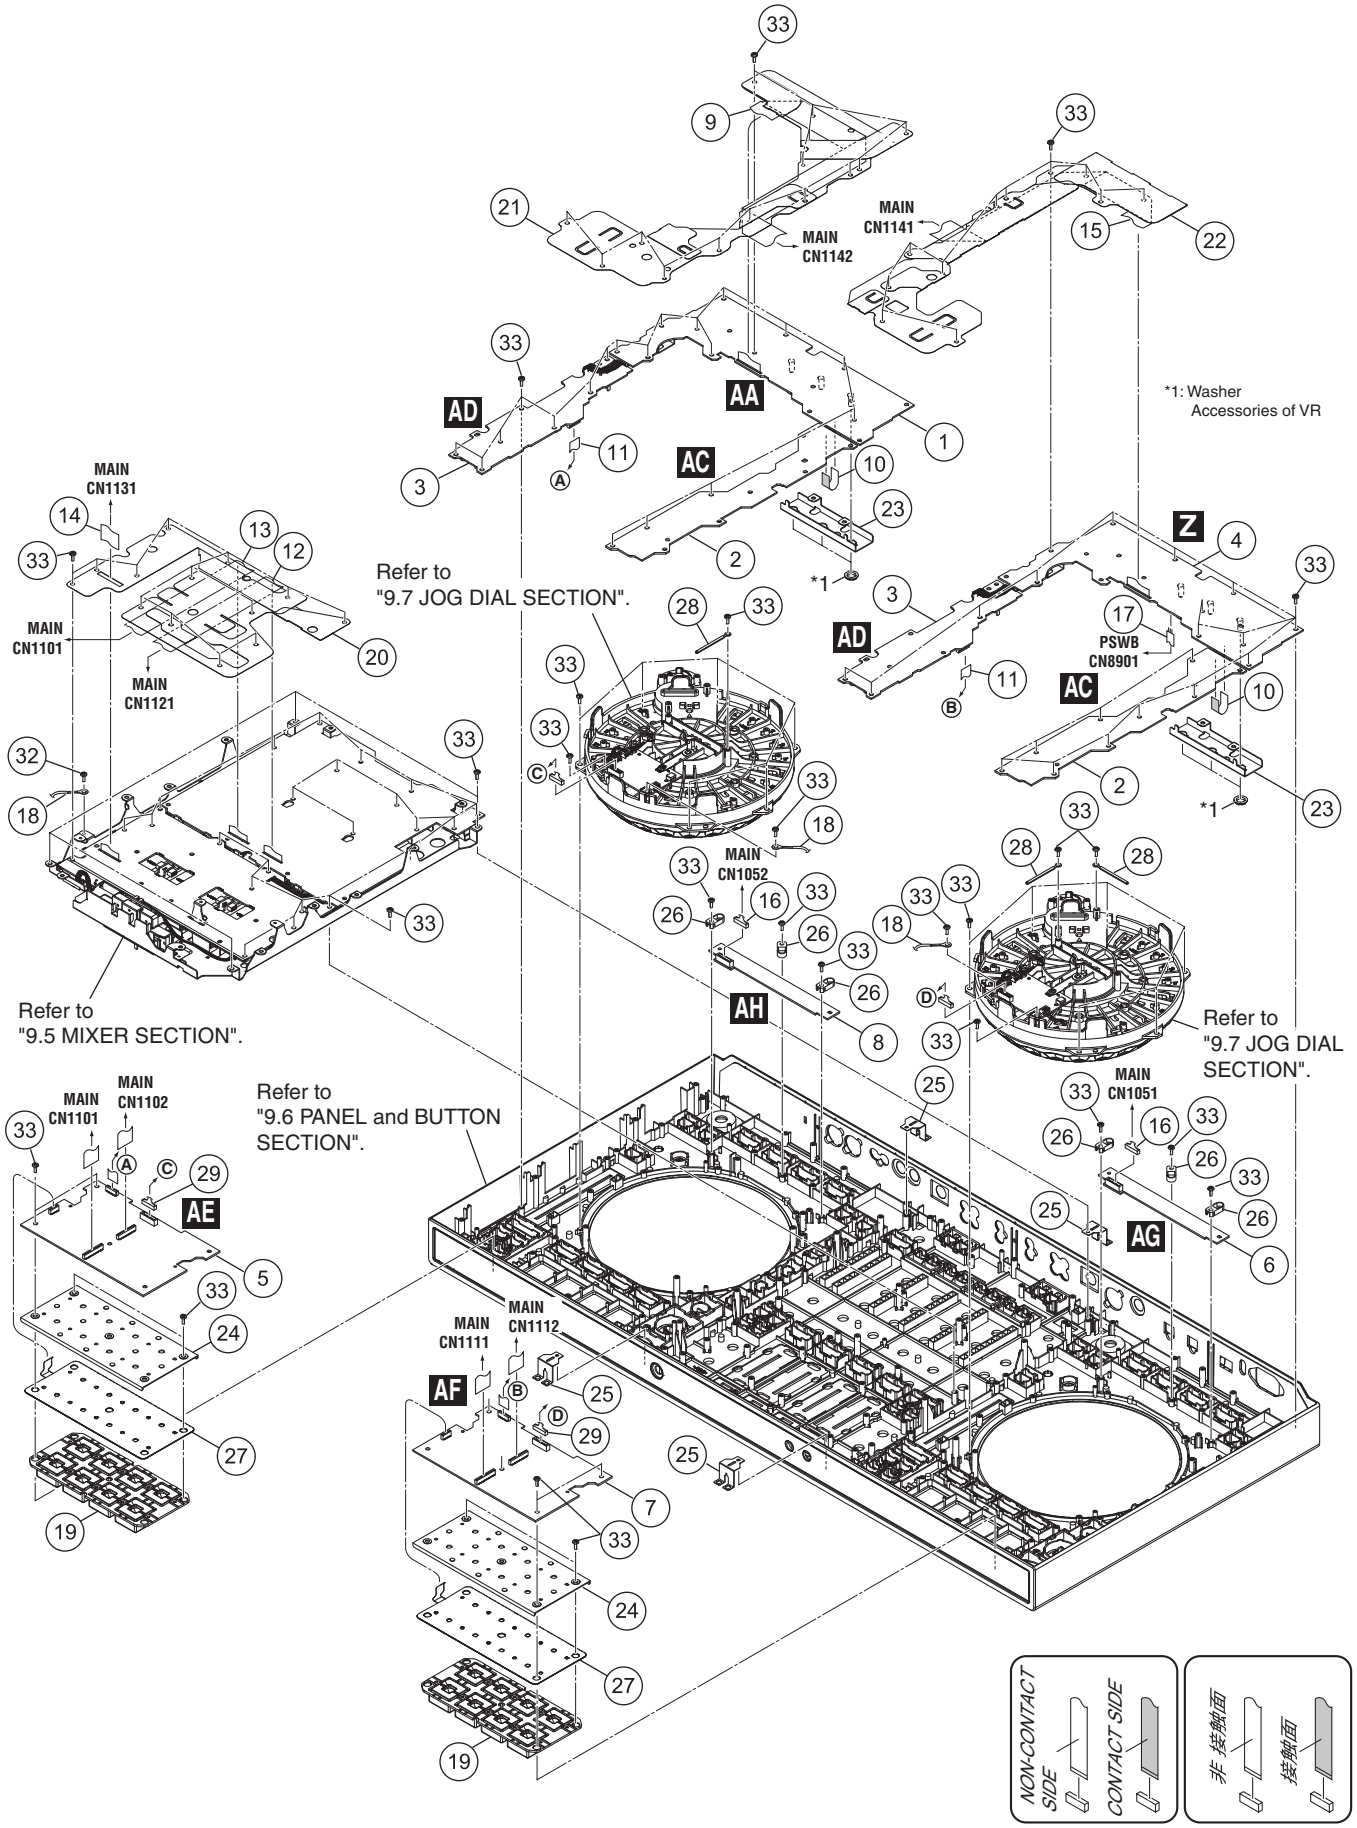


CONTROL PANEL SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	DEUP Assy	DWX3548
	2	KSWB Assy	DWX3549
	3	SLDB Assy	DWX3550
	4	DEUPR Assy	DWX3580
	5	PADL Assy	DWX3553
	6	CDCL Assy	DWX3554
	7	PADR Assy	DWX3583
	8	CDCR Assy	DWX3584
	9	FFC/32P	DDD1657
	10	FFC/15P	DDD1660
	11	FFC/13P	DDD1661
	12	FFC/25P	DDD1662
	13	FFC/23P	DDD1663
	14	FFC/27P	DDD1664
	15	FFC/32P	DDD1672
	16	Crimp Connector	PF08PP-B30
	17	Jumper Wire	D20PYY0310E
	18	Earth Lead Wire	DE012VC0
	19	Button/PAD	DEB2005
	20	Barrier/MIX	DEC3545
	21	Barrier/DEL	DEC3546
	22	Barrier/DER	DEC3547
	23	Stay/PL	DND1279
	24	Bracket/FSR	DNF1930
	25	Plate/ART	DNH3144
	26	CDC Stopper	DNK5863
	27	Sensor	DSX1124
	28	Cord Clamper (Steel)	RNH-184
	29	Connector Assy	PF08PP-B07
	30	•••••	
	31	•••••	
	32	Screw	BBZ30P060FTB
	33	Screw	BPZ30P080FNI

9.5 MIXER SECTION


Lubricating oil
(GYA1001)



Note:
Greasing must be performed at a total of 8 points, 2 points each for the upper and bottom places of each shaft. (0.4 to 1 mg per point × 8 points)
After applying grease, move the slider base back and forth from one end to the other for approximately 10 to 20 strokes, in order to fully spread the grease.

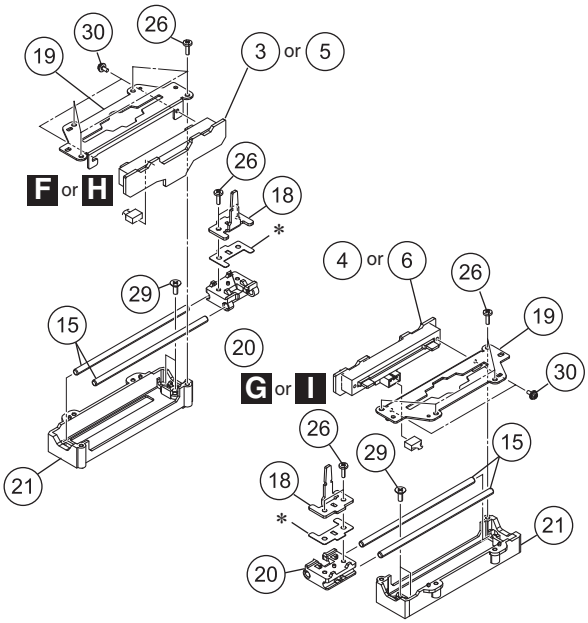


∗**Note:**
The spacer/CHF (Part No.: DEC3558) is used only for the products of the first production lot.
Be sure to insert the spacer into the position shown in the figure during reassembly after disassembly.

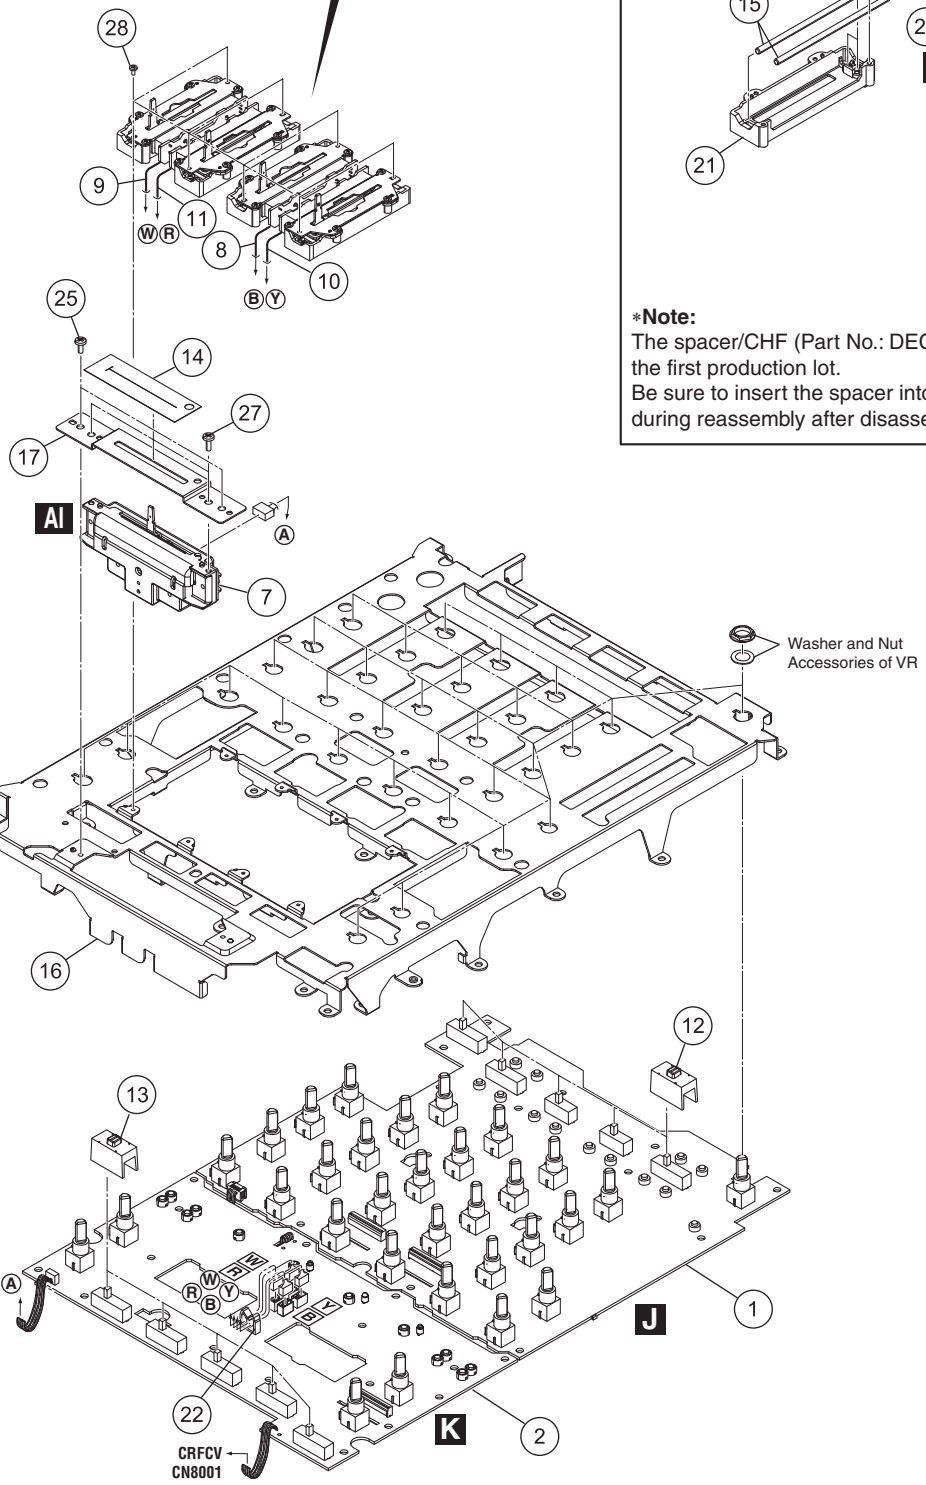

MIXER SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	MXRA Assy	DWX3543
	2	MXRB Assy	DWX3544
	3	FAD1 Assy	DWX3540
	4	FAD2 Assy	DWX3541
	5	FAD3 Assy	DWX3539
	6	FAD4 Assy	DWX3542
	7	CROSS FADER Assy	DXA2257
	8	Connector Assy	PF03PP-B12
	9	Connector Assy	PF03PP2B07
	10	Connector Assy	PF03PP4B12
	11	Connector Assy	PF03PP6B07
	12	Slide SW Cap	DAC2400
	13	Slide SW Cap (W)	DAC2401
	14	Packing/FAD	DEC3542
NSP	15	Guide Shaft (S)	DLA1918
	16	Stay/MIX	DND1280
	17	Stay/CRF	DNF1936
	18	Lever Plate	DNH2954
	19	VR Stay	DNH2955
	20	Slider Base	DNK5851
	21	Shaft Holder	DNK5852
	22	Holder	VEC1355
	23	•••••	
	24	•••••	
	25	Screw	BBZ30P060FTB
	26	Screw	BPZ20P060FTC
	27	Screw	BPZ30P080FNI
	28	Screw	BSZ20P040FTB
	29	Screw	CPZ26P080FTC
	30	Screw	PMH20P040FTC

9.6 PANEL and BUTTON SECTION

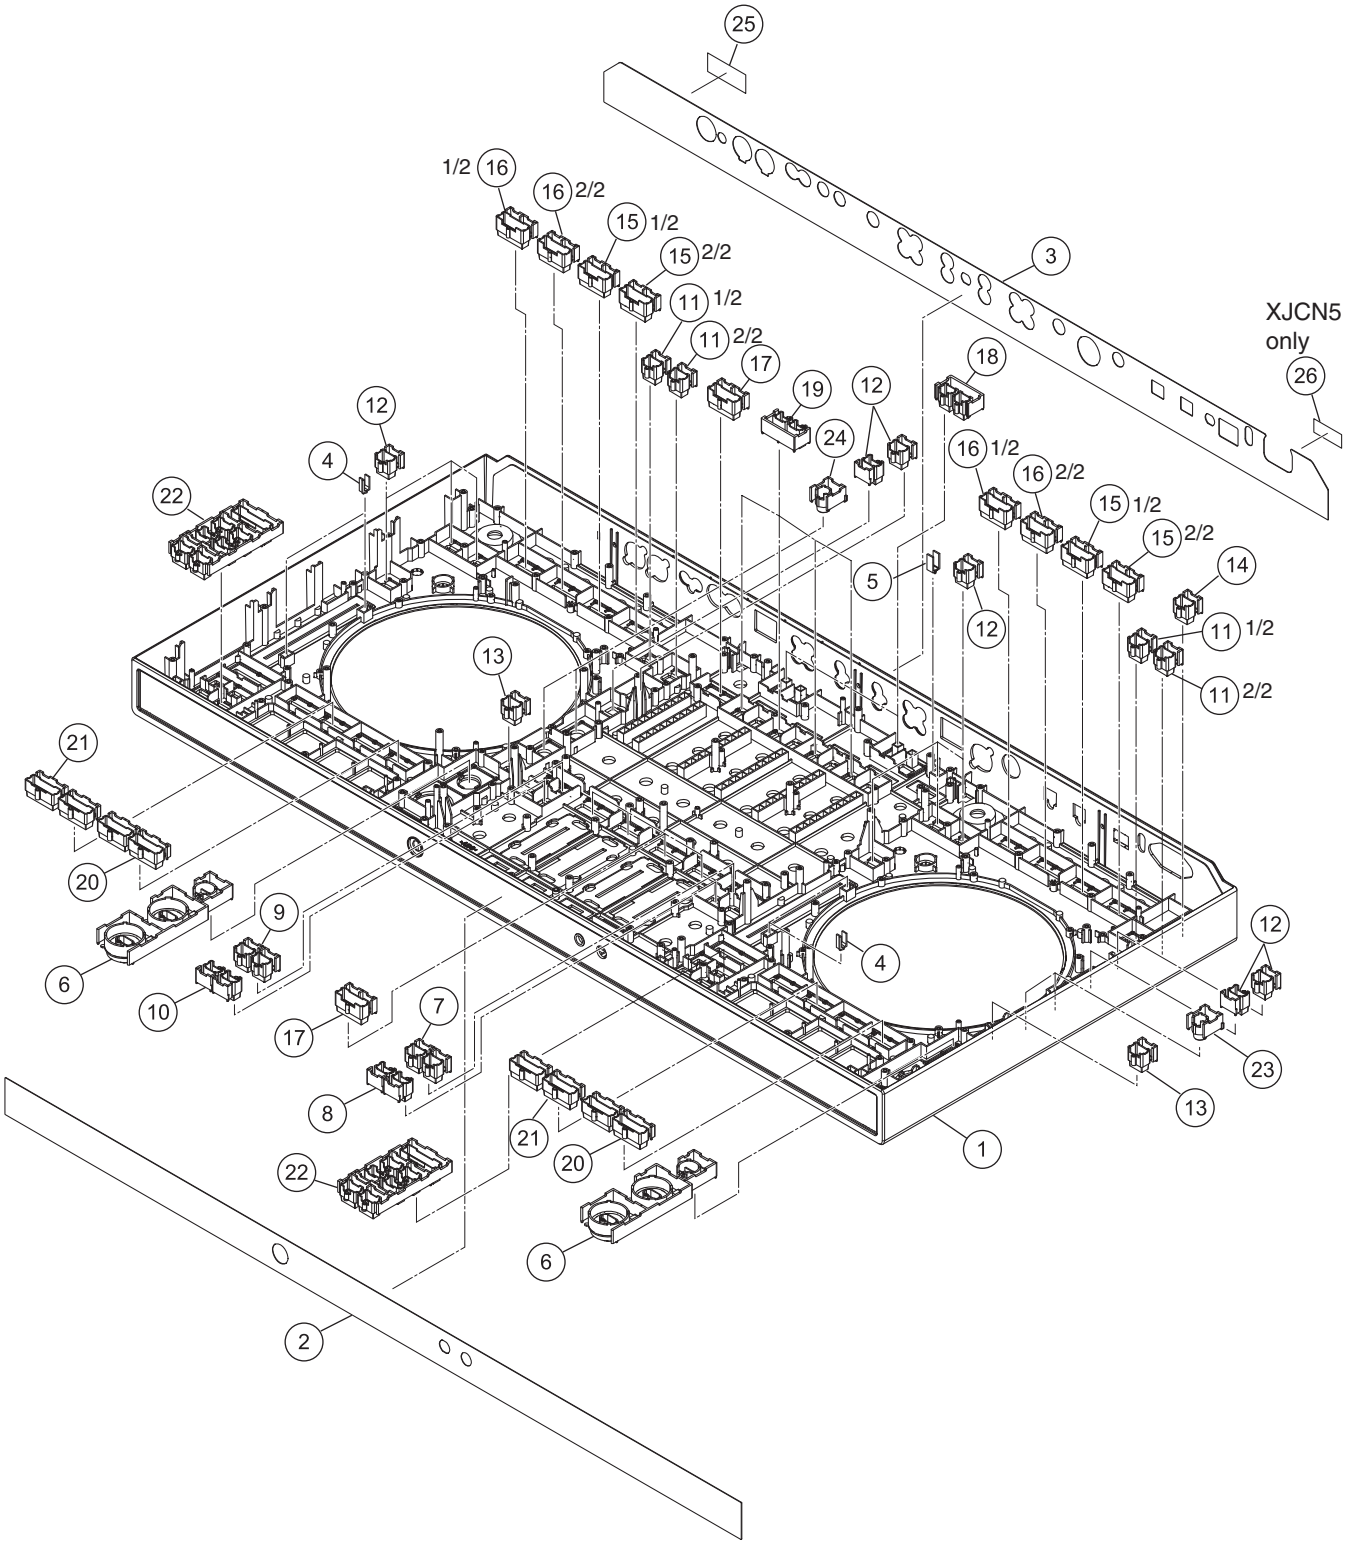

(1) PANEL and BUTTON SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	Control Panel	DNK6285
	2	Sheet/FR	DAH2991
	3	Sheet	See Contrast table (2)
	4	Lens/TMP	DNK6307
	5	Lens/MIC	DNK6308
	6	Button/PLY	DAC2982
	7	Button/CX1	DAC2983
	8	Button/CX2	DAC2984
	9	Button/FX1	DAC2985
	10	Button/FX2	DAC2986
	11	Button/CEN	DAC2987
	12	Button/ANY	DAC2988
	13	Button/SHT	DAC2989
	14	Button/PNL	DAC2990
	15	Button/ON	DAC2991
	16	Button/TAP	DAC2992
	17	Button/CUE	DAC2993
	18	Button/USB	DAC2994
	19	Button/FX	DAC2995
	20	Button/PM1	DAC2996
	21	Button/PM2	DAC2997
	22	Button/ATL	DAC2998
	23	Button/DEL	DAC3000
	24	Button/DEL	DAC3001
NSP	25	Serial Label (UPC)	DRW2311
NSP	26	Name Label /CSZ	See Contrast table (2)


(2) CONTRAST TABLE

DDJ-SZ/UXJCB, LSYXJ8 and XJCN5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DDJ-SZ /UXJCB	DDJ-SZ /LSYXJ8	DDJ-SZ /XJCN5
	3	Sheet	DAH2992	DAH2992	DAH2994
NSP	26	Name Label/CSZ	Not used	Not used	DAL1269

9.7 JOG DIAL SECTION

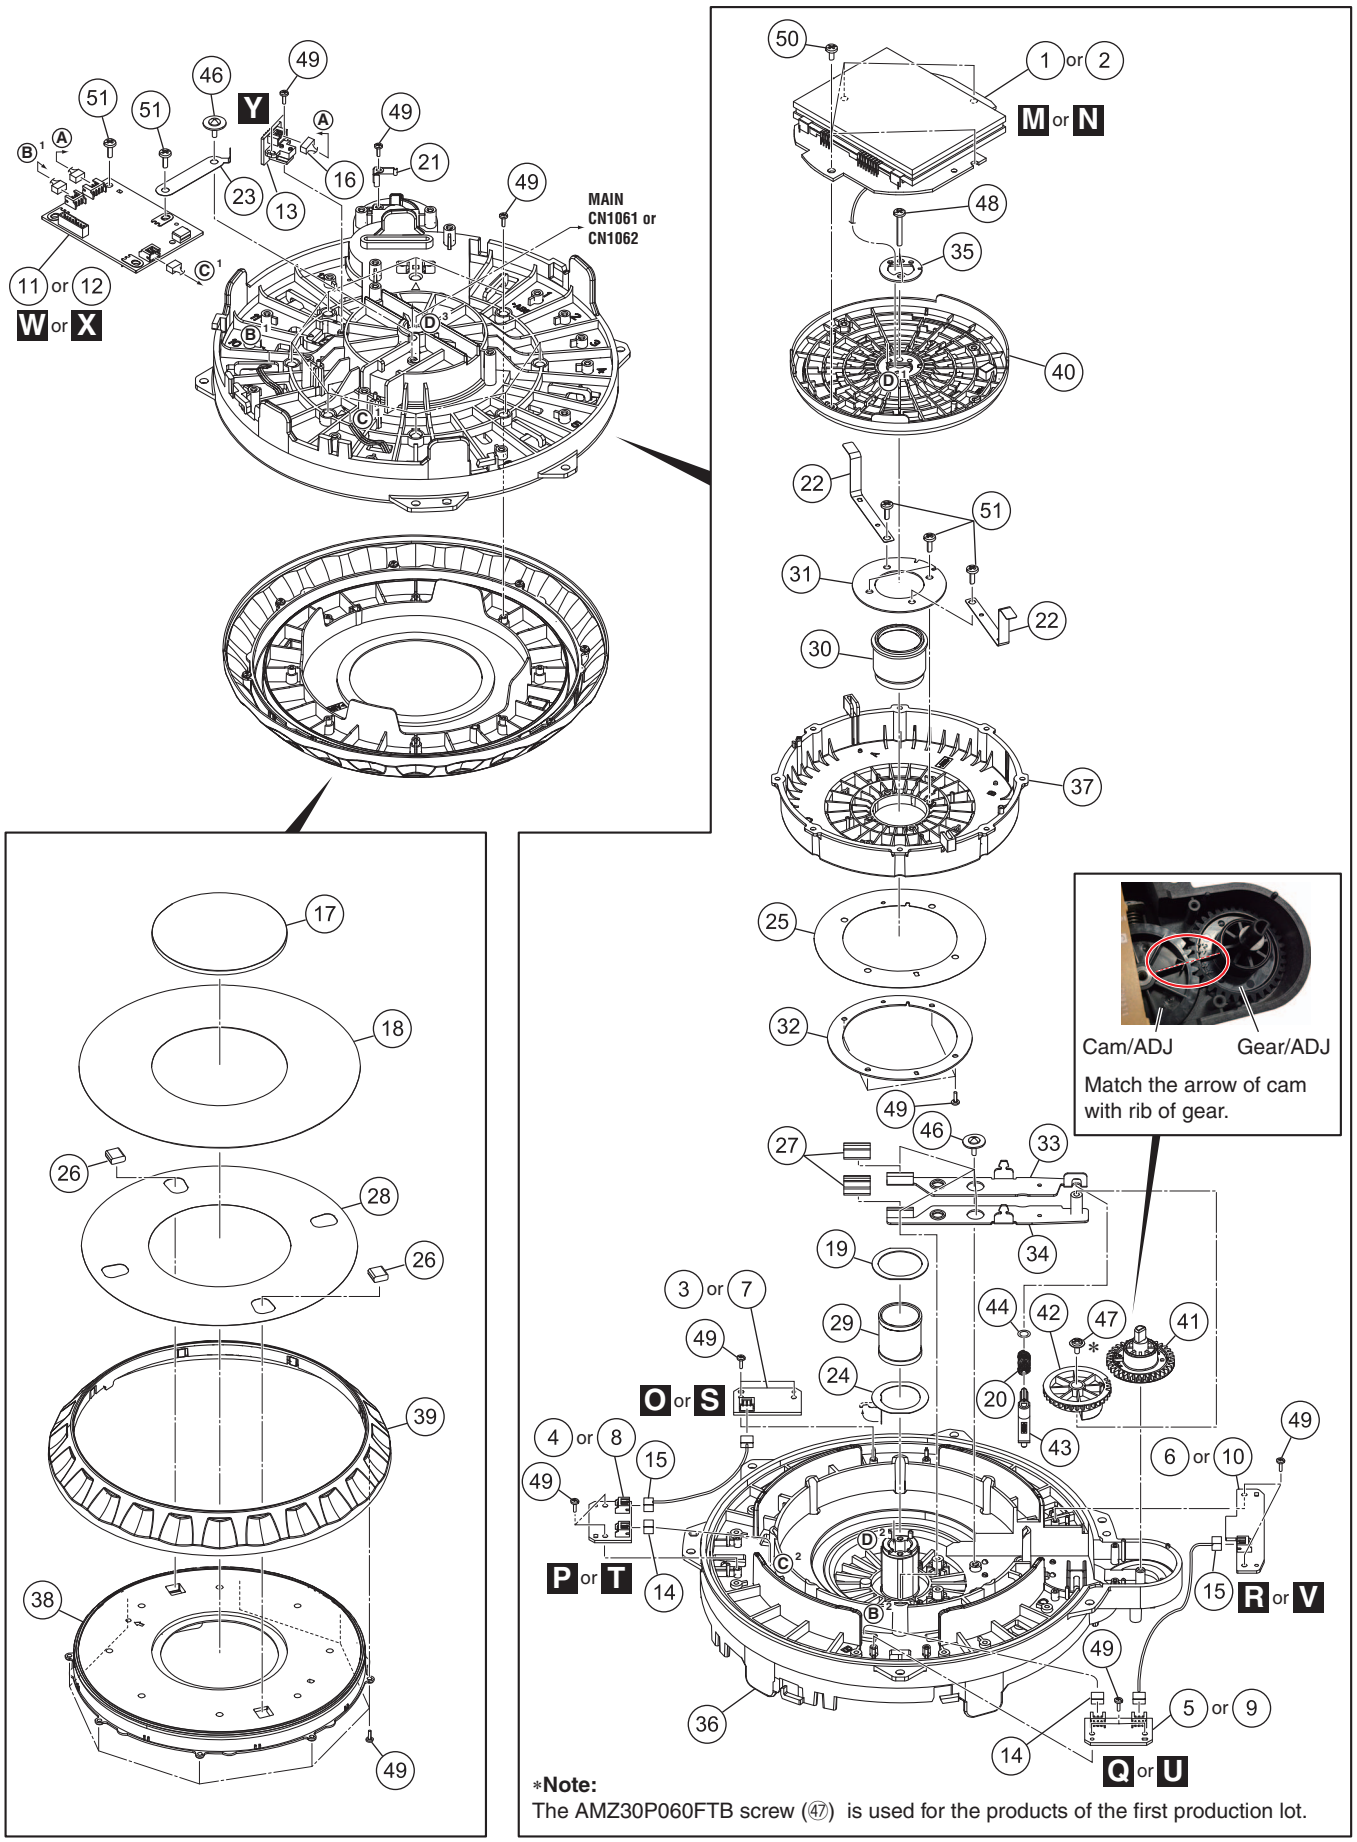

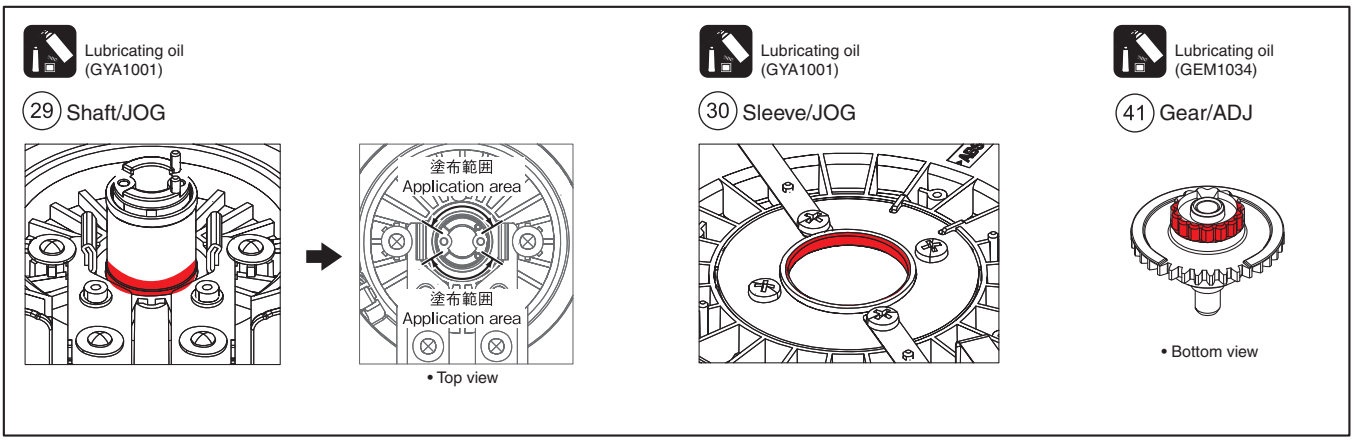

JOG DIAL SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	JFLL Assy	DWX3545
	2	JFLR Assy	DWX3546
	3	JLL1 Assy	DWX3556
	4	JLL2 Assy	DWX3557
	5	JLL3 Assy	DWX3558
	6	JLL4 Assy	DWX3559
	7	JLR1 Assy	DWX3561
	8	JLR2 Assy	DWX3562
	9	JLR3 Assy	DWX3563
	10	JLR4 Assy	DWX3564
	11	JOGTL Assy	DWX3551
	12	JOGTR Assy	DWX3565
	13	JOGR Assy	DWX3552
	14	Connector Assy	PF03PP-B07
	15	Connector Assy	PF03PP-B12
	16	Connector Assy	PF04PP-B12
	17	Jog Panel	DAH2609
	18	Plate/JOG	DAH2915
	19	Washer/JOG	DBE1016
	20	Coil Spring/ADJ	DBH1802
	21	Leaf Spring/ADJ	DBK1376
	22	Leaf Spring/A	DBK1379
	23	Leaf Spring/B	DBK1380
	24	Leaf Spring/C	DBK1382
	25	Slit/JOG	DEC3515
	26	Gasket/JOG	DEC3556
	27	Felt/JOG	DED1187
	28	DS Tape/JOG	DEH1047
	29	Shaft/JOG	DLA2225
	30	Sleeve/JOG	DLA2226

Mark	No.	Description	Part No.
	31	Bracket/JOG	DNH3130
	32	Bracket/SLT	DNH3131
	33	Lever/A	DNH3132
	34	Lever/B	DNH3133
	35	Cover/JOG	DNH3159
	36	Holder/JOG	DNK6269
	37	Jog Dial/BAS	DNK6270
	38	Jog Dial/A	DNK6271
	39	Jog Dial/B	DNK6272
	40	Holder/FL	DNK6273
	41	Gear/ADJ	DNK6274
	42	Cam/ADJ	DNK6275
	43	Pin/ADJ	DNK6276
	44	Washer	WA41D070D025
	45	•••••	
	46	DM Screw (FTC)	DBA1260
	47	Screw	IMZ30P060FTB
	48	Screw	BBZ30P180FTC
	49	Screw	BPZ20P060FTC
	50	Screw	BPZ30P060FTC
	51	Screw	BPZ30P080FNI

12. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω	→	*56 × 10¹*	→	*561* ····· *RD1/4PU 5 6 1 J*
47 kΩ	→	*47 × 10³*	→	*473* ····· *RD1/4PU 4 7 3 J*
0.5 Ω	→	*R50*		····· *RN2H R 5 0 K*
1 Ω	→	*1R0*		····· *RS1P 1 R 0 K*

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ	→	*562 × 10¹*	→	*5621* ····· *RN1/4PC 5 6 2 1 F*

In this manual, the same reference numbers are allotted to the electrical parts of the Assys indicated below. Be sure to confirm the Assy name, as well as the reference number.

ASSY names:	**Overlapped numbers**
MAIN (DWX3535) - DEUP (DWX3548) - PADR (DWX3583)	6,000s
USBB (DWX3555) - HPJK (DWX3538)	3,900s

LIST OF ASSEMBLIES

Mark	No.	Description	Part No.
NSP	1	..MOTHER ASSY	DWM2519
	2	..MAIN ASSY	DWX3535
	2	..USBB ASSY	DWX3555
NSP	1	..JACK ASSY	DWM2520
	2	..AIJK ASSY	DWX3536
	2	..AOJK ASSY	DWX3537
	2	..HPJK ASSY	DWX3538
	2	..FAD3 ASSY	DWX3539
	2	..FAD1 ASSY	DWX3540
	2	..FAD2 ASSY	DWX3541
	2	..FAD4 ASSY	DWX3542
NSP	1	..SUB ASSY	DWM2521
	2	..MXRB ASSY	DWX3544
	2	..JFLL ASSY	DWX3545
	2	..JFLR ASSY	DWX3546
	2	..CRFCV ASSY	DWX3547
	2	..JLL1 ASSY	DWX3556
	2	..JLL2 ASSY	DWX3557
	2	..JLL3 ASSY	DWX3558
	2	..JLL4 ASSY	DWX3559
	2	..JLR1 ASSY	DWX3561
	2	..JLR2 ASSY	DWX3562
	2	..JLR3 ASSY	DWX3563
	2	..JLR4 ASSY	DWX3564
NSP	1	..MIXER ASSY	DWM2524
	2	..MXRA ASSY	DWX3543
	2	..JOGTL ASSY	DWX3551
	2	..PSWB ASSY	DWX3560
	2	..JOGTR ASSY	DWX3565
NSP	1	..DECK ASSY	DWM2522
	2	..DEUP ASSY	DWX3548
	2	..KSWB ASSY	DWX3549
	2	..SLDB ASSY	DWX3550
	2	..JOGR ASSY	DWX3552
NSP	1	..DECKR ASSY	DWM2529
	2	..KSWB ASSY	DWX3549
	2	..SLDB ASSY	DWX3550
	2	..JOGR ASSY	DWX3552
	2	..DEUPR ASSY	DWX3580
NSP	1	..PACD ASSY	DWM2523
	2	..PADL ASSY	DWX3553
	2	..CDCL ASSY	DWX3554
	2	..PADR ASSY	DWX3583
	2	..CDCR ASSY	DWX3584
	1	..CROSS FADER ASSY	DXA2257
NSP	2	..CRFD ASSY	DWX3258
⚠	1	..POWER SUPPLY ASSY	DWR1463

A MIAN ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
⚠		IC 1201,1406,3405	NJM2831F33
⚠		IC 1202	NJM2392M
⚠		IC 1203,1205	BD9328EFJ
⚠		IC 1204	BD9329EFJ
⚠		IC 1206	NJM2886DL3-33
⚠		IC 1401	NJM78M15DL1A
⚠		IC 1402	NJM79M15DL1A
⚠		IC 1403,1405	BD9851EFV
⚠		IC 1404	NJM7805DL1A
		IC 1601,1602,1801,1802	NJM4580MD
		IC 1603,1604,1803,1804	PCM1803ADB
		IC 2001	AK5358AET
		IC 2201,2601	R5S72670P144FP
		IC 2202	TC7SH04FUS1
		IC 2603,2604,3004	TC7SH08FUS1
		IC 3001	DYW1845
		IC 3002	TC7SHU04FUS1
		IC 3201	D810K013DZKB400
		IC 3202	M12L128168A-5TG2N
		IC 3401-3403	TC74VHC08FK
		IC 3406-3409	TC7SG08FU

Mark	No.	Description	Part No.
	IC	3601	WM8740SEDS
	IC	3602,6003	S-80930CNMC-G80
	IC	3606,3802	AK4387ET
	IC	3801	NJM4580MD
	IC	6001	DYW1844
	Q	1001,1003	LTA024EEB
	Q	1002,1004,1201,1204	LTC024EEB
	Q	1205	2SA1577
	Q	1206,1212,1213,3601	LSCR523UB
	Q	1207	2SC4097
	Q	1208-1210,1214,1216	LSAR523UB
	Q	1211	LTC114YUB
	Q	1215,1217	2SC5712
	Q	1401	RSR020P05
	Q	1402	RTQ045N03
	Q	1403,1404	RSQ030P03
	Q	2602,2603,3603	LTC024EEB
	Q	3602	LSCR523UB
	Q	3604,3605	LSAR523UB
	Q	3809	RT1N431M
	D	1202	RB160L-40
	D	1203-1205,3601	DA2J101
	D	1401,1406,1407,1409	DB2J41100
	D	1404,1405,1408	RB501VM-40
	D	1410	DB2J41100
	D	2001,2002	DAN217UM

MISCELLANEOUS

	L	1002,1007 CHIP SOLID INDUCTOR	QTL1013
	L	1005,1010 INDUCTOR	CTF1793
	L	1201 CHOKE COIL	CTH1209
	L	1202 COIL	CTH1475
	L	1203 CHOKE COIL	CTH1354
	L	1204 POWER INDUCTOR	ATH7053
	L	1256 CHIP BEEDS FILTER	BTX1042
	L	1401,1402,1405 POWER INDUCTOR	ATH7011
	L	1406 POWER INDUCTOR	ATH7011
	L	2203-2205 CHIP SOLID INDUCTOR	QTL1013
	L	2207,2607,3203 CHIP COIL	LCTAW330J2520
	L	2603-2605 CHIP SOLID INDUCTOR	QTL1013
	L	3201 SMD FERRITE BEADS	CTF1823
	F	3201 EMI FILTER	DTL1106
	KN	3001-3008 WRAPPING TERMINAL	CKF1089
	X	3001 RESONATOR (48 MHz)	CSS1760
	X	3401 OSCILLATOR (16.9344 MHz)	CWX3849
	X	6001 CRYSTAL RESONATOR	BSS1146
	CN	1001 L-PLUG(10P)	KM200NA10L
	CN	1011,1012,1021 PLUG(15P)	KM200NA15
	CN	1022 PLUG(5P)	KM200NA5
	CN	1031 L-PLUG(9P)	KM200NA9L
	CN	1051,1052 PLUG(8P)	KM200NA8
	CN	1061,1062 CONNECTOR	AKM1282
	CN	1101,1111,1121 25P CONNECTOR	VKN1256
	CN	1102,1112 23P CONNECTOR	VKN1427
	CN	1122 23P CONNECTOR	VKN1254
	CN	1131 27P CONNECTOR	VKN1258
	CN	1141,1142 32P CONNECTOR	VKN1436
	CN	1201 CONNECTOR	B6B-XH-A
	JH	3001,3002 PCB BINDER	AEF7008
⚠	P	1201 PROTECTOR(0.750 A)	DEK1121

Mark	No.	Description	Part No.

RESISTORS

	R	1186,1187,2322,2707	RS1/8SQ0R0J
	R	1202,1203	RS1/4SA1R0J
	R	1207	RS1/10SR2702D
	R	1208	RS1/10SR1501D
	R	1211,1448	RS1/10SR103J
	R	1214-1218	RS1/10SR272J
	R	1219,1227,1402,1406	RS1/10SR1002D
	R	1220,1455	RS1/10SR3001D
	R	1221,1225	RS1/10SR6801D
	R	1223,1403,1416,1433	RS1/10SR3002D
	R	1224,1401,1410,1430	RS1/10SR1502D
	R	1228	RS1/10SR1801D
	R	1229	RS1/10SR2001D
	R	1234,1319-1331	RS1/4SA112J
	R	1235,1289,1413,1414	RS1/4SA0R0J
	R	1247	RS1/16SS6800D
	R	1248	RS1/16SS3301D
	R	1249,1252,1253,1255	RS1/16SS1002D
	R	1250	RS1/16SS7501D
	R	1251	RS1/16SS3902D
	R	1254	RS1/16SS6802D
	R	1261,1290	RS1/10SR8201D
	R	1266,1291	RS1/10SR3301D
	R	1267,1292	RS1/10SR1001D
	R	1268,1293,1441,1445	RS1/10SR100J
	R	1269-1278,1294-1303	RS1/4SA7R5J
	R	1279-1288,1304-1313	RS1/10SR120J
	R	1314	RS1/10SR2701D
	R	1404,1419,1434,1449	RS1/10SR6802D
	R	1405	RS1/10SR1803D
	R	1407,1423,3805,3806	RS1/10SR5101D
	R	1411,1415	RS1/10SR220J
	R	1412,1442	RS1/10SR472J
	R	1417,1447,3014,6043	RS1/10SR105J
	R	1418	RS1/10SR6201D
	R	1420,1431,1440,1451	RS1/10SR1002D
	R	1422	RS1/10SR1503D
	R	1424,3617	RS1/10SR2002D
	R	1425-1427,1454,1456	RS1/4SA0R0J
	R	1435	RS1/10SR5102D
	R	1436,3801,3802	RS1/10SR5601D
	R	1439	RS1/10SR123J
	R	1446	RS1/10SR3002D
	R	1452	RS1/10SR6202D
	R	1601-1604,1801-1804	RS1/10SR1601D
	R	1605-1608,1805-1808	RS1/10SR3600D
	R	1609-1612,1809-1812	RS1/10SR1000D
	R	2292,2678	RS1/16SS5601F
	R	2296,2315,2316,2682	RS1/10SR0R0J
	R	2726,2731,3007,3038	RS1/10SR0R0J
	R	3039,3050-3055,3417	RS1/10SR0R0J
	R	3462-3464,6094,6405	RS1/10SR0R0J
	R	3616	RS1/16SS1002D
	R	3723,3819	RS1/10SR100J
	R	3803,3804,3807,3808	RN1/16SE6802D
	R	3809,3810	RS1/10SR4701D
	Other Resistors		RS1/16SS###J

CAPACITORS

Mark	No.	Description	Part No.
C	1001-1004,1015,1016		CKSRYB104K25
C	1005-1014,1017-1023		CKSSYB104K10
C	1028,1029,1031-1033		CKSSYB104K10
C	1030,1034,1221		CKSRYB104K50
C	1035-1038,1224-1227		CKSSYB104K10
C	1047,1048,1419,1420		CKSSYB102K50
C	1201		CCH1680
C	1202		CFTLA474J50
C	1203,1207,1414,1423		DCH1263
C	1205,1208,1239,3610		CKSSYB103K25
C	1209,1223,1233-1235		CKSSYB104K16
C	1210,1240,1277,1283		CCG1218
C	1213,1477,1480-1482		CEVW101M25
C	1214,1230-1232,1432		CCG1236
C	1215,1229,1409,1410		CKSRYB104K25
C	1216,1220,1236-1238		CCSSCH102J50
C	1217,2240,2639,3004		CCSSCH101J50
C	1218		CCSSCH151J50
C	1222		CEVW101M50
C	1228,1286,1291,1643		CKSSYB103K16
C	1241-1243,1247,1251		CKSSYB104K10
C	1244-1246,1265,1467		CKSSYB104K16
C	1249		CKSSYB223K16
C	1250,6067		CKSSYB473K16
C	1255,1256,1260,1264		CKSSYB104K10
C	1259,1261,1262,1287		CCSSCH102J50
C	1263,1266,1267,1270		CCG1192
C	1269,1272,1273,3426		CCH1565
C	1274		CKSRYB334K10
C	1278,1288,1293,1474		CKSRYB105K10
C	1284,1289,1468		CCG1218
C	1285,1290,1460,1617		CKSSYB104K10
C	1292,1437,1440,1476		CCSSCH102J50
C	1401,1421,1425,1426		CKSRYB105K16
C	1403,1444		CKSRYB334K25
C	1404		CKSYB225K25
C	1405,1433		CCSSCH271J50
C	1407		CKSSYB332K50
C	1411,1412,1435,1439		CKSQYB105K25
C	1416,1417		CKSRYB103K50
C	1418		CCSSCH221J50
C	1424,1459		CKSYB105K16
C	1429,1466		CKSSYB682K25
C	1431,1434,1603-1606		CKSRYB104K25
C	1436		CCG1236
C	1438,1441		CEVW470M25
C	1442,1456,1461,1462		CKSRYB105K16
C	1446		CKSSYB472K50
C	1451		CFHXSQ103J16
C	1453,1458		DCH1263
C	1455		CCSSCH561J50
C	1469,1475,2002,2006		CCG1192
C	1472,2211,6025,6036		CKSSYB104K16
C	1478,3242		CKSRYB105K10
C	1479		CCSSCH102J50
C	1483		CCH1961
C	1601,1602,1801,1802		CEVW101M25
C	1607-1610,1807-1810		CEVW101M16
C	1611-1614,1640,1642		CKSRYB103K25
C	1615,1616,1619,1620		CEVW220M6R3
C	1618,1625,1626,1629		CKSSYB104K10
C	1627,1628,1637,1638		CCH1998
C	1630,1635,1636,1817		CKSSYB104K10
C	1631-1634,1831-1834		CKSSYB102K50
C	1639,1641,1645,1647		CCSRCH102J50
C	1644,1843,1844,2011		CKSSYB103K16
C	1646,1648,1811-1814		CKSRYB103K25
C	1803-1806,3810,3811		CKSRYB104K25
C	1815,1816,1819,1820		CEVW220M6R3
C	1818,1825,1826,1829		CKSSYB104K10
C	1827,1828,1837,1838		CCH1998
C	1830,1835,1836,2003		CKSSYB104K10
C	1839,1841,1845,1847		CCSRCH102J50
C	1840,1842,1846,1848		CKSRYB103K25
C	2004,2005		CEVW220M16
C	2007,2009,2201,2202		CKSSYB104K10
C	2008,2247,2257,2258		CCG1192
C	2010,2241,2245,2246		CKSSYB102K50
C	2012,2212-2215		CKSSYB103K16
C	2203,2204,2603,2604		CEVW470M6R3
C	2207,2208,2237,2243		CKSSYB104K10
C	2209,2210,2216-2218		CKSSYB471K50
C	2219-2226,2228,2230		CKSSYB103K16
C	2227,2229,2231,2244		CKSSYB471K50
C	2232-2236,2238,2239		CKSSYB103K16
C	2242,2249,2250		CKSSYB103K16
C	2248,2251,2252,2256		CKSSYB471K50
C	2253-2255,2265-2267		CKSSYB104K10
C	2259-2261,2275,2276		CKSSYB102K50
C	2262-2264,2611-2614		CKSSYB103K16
C	2268-2270,2646,2656		CCG1192
C	2273,2601,2602,2607		CKSSYB104K10
C	2285,2677,3205,3677		CEVW101M16
C	2294,2312,2609,2610		CKSSYB471K50
C	2608,2636,2642		CKSSYB104K10
C	2615-2617,2626,2628		CKSSYB471K50
C	2618-2625,2627,2629		CKSSYB103K16
C	2630,2643,2647,2650		CKSSYB471K50
C	2631-2635,2637,2638		CKSSYB103K16
C	2640,2644,2645		CKSSYB102K50
C	2641,2648,2649		CKSSYB103K16
C	2651,2655,2658,2678		CKSSYB471K50
C	2652-2654,2665-2667		CKSSYB104K10
C	2657,2668-2670,3244		CCG1192
C	2659-2661,2675,2676		CKSSYB102K50
C	2662-2664,3002,3208		CKSSYB103K16
C	2673,2683,2684,3001		CKSSYB104K10
C	3003,3009,3214,3216		CKSSYB102K50
C	3005,3007,3010,3201		CKSSYB104K10
C	3006		CCSSCH100D50
C	3008		CCSSCH8R0D50
C	3012,3013,3016,3018		CKSRYB104K16
C	3014,3015,3017,3019		CKSRYB102K50
C	3202,3204,3207,3401		CKSSYB104K10
C	3203,6017		CEVW470M6R3
C	3206,3209,6001-6016		CKSSYB471K50
C	3210-3213,3215,3217		CKSSYB103K16
C	3218,3220,3222,3224		CKSSYB102K50

Mark	No.	Description	Part No.
	C	3219,3221,3223,3225	CKSSYB103K16
	C	3226,3228,3230,3232	CKSSYB102K50
	C	3227,3229,3231,3233	CKSSYB103K16
	C	3234,3236,3238,3403	CKSSYB102K50
	C	3235,3237,3239,3241	CKSSYB103K16
	C	3240,3404-3407	CCSSCH101J50
	C	3245-3251,3402,3415	CKSSYB103K16
	C	3408-3410,3603,3606	CKSSYB102K50
	C	3411-3413,3416-3420	CKSSYB104K10
	C	3422,3602,3605,3609	CKSSYB104K10
	C	3601,3608,3619,3627	CCH1565
	C	3614,3620,6023	CKSSYB102K50
	C	3615,3618,3621,3669	CKSSYB104K10
	C	3616,3631,3633,3671	CCSRCH102J50
	C	3617,3632,3634,3672	CKSRYB103K25
	C	3622,3624,3665,3815	CKSSYB103K16
	C	3667,3816	CEVW220M6R3
	C	3675,3817,3820,6066	CKSSYB104K10
	C	3801,3802,3821,6056	CEVW101M16
	C	3803,3804	CCSRCH272J50
	C	3805,3806	CCSRCH471J50
	C	3807,3808	CCSRCH220J50
	C	3809,3818	CCSRCH102J50
	C	3812,3819	CKSRYB103K25
	C	3813,3814	CEVW100M50
	C	6030	CKSSYB103K16
	C	6031,6034	CCSSCH6R0D50
	C	6037	CKSSYB104K16
	C	6038-6041,6062-6065	CKSSYB102K50
	C	6055	CKSRYB104K16
	C	6057	CKSSYB471K50
	C	6068	CKSSYB103K25
	C	6069,6070	CKSSYB102K50

B AIJK ASSY

SEMICONDUCTORS

	IC	101,301,501	NJM4580MD
	IC	102,302	NJM4580D
	IC	103,104,303,304	NJM2121MD
	IC	502	NJM4565MD
	Q	101-104,301-304	2SK209
	Q	105,305	LTC114EUB
	Q	501,502	2SK209
	D	501-504	UDZS15(B)
	D	505	DZ2S180C

MISCELLANEOUS

	JA	101,302 JACK	DKB1083
	JA	102,301 JACK	DKB1103
	JA	501 CANON CONNECTOR	DKB1108
	JA	502 6.5 DIA JACK	DKN1653
	VR	501,502 ROTARY VR	DCS1131
	0	MIC SHIELD	DNF1849
	0	PHONE SHIELD	DNF1875
	JP	101,102 CRIMP CONNECTOR	PF15PG-R07

RESISTORS

	R	101,102,105,106	RS1/10SR1000D
	R	103,104,307,308	RN1/16SE1000D
	R	107,108,111,112	RS1/10SR2200D
	R	109,110,313,314	RN1/16SE2200D
	R	113,114,117,118	RS1/10SR1003D
	R	115,116,319,320	RN1/16SE1003D
	R	119,120,123,124	RS1/10SR9102D
	R	121,122,325,326	RN1/16SE9102D
	R	131,132,156,157	RS1/10SR1801D
	R	133,134,158,159	RN1/16SE1601D
	R	135,137,139,140	RN1/16SE1501D
	R	136,138,340,342	RN1/16SE2401D
	R	143,144,147,148	RS1/10SR2700D
	R	149,150,349,350	RN1/16SE7501D
	R	151,351	RS1/8SQ0R0J
	R	154,155,317,318	RS1/10SR1003D
	R	301-304	RS1/10SR2700D
	R	305,306,309,310	RS1/10SR1000D
	R	311,312,315,316	RS1/10SR2200D
	R	321,322,354,355	RS1/10SR1003D
	R	323,324,327,328	RS1/10SR9102D
	R	335,336,356,357	RS1/10SR1801D
	R	337,338,358,359	RN1/16SE1601D
	R	339,341,343,344	RN1/16SE1501D
	R	505,506,511,513	RN1/16SE1000D
	R	507,508	RN1/16SE2200D
	R	509,510,524	RN1/16SE1002D
	R	512	RS1/10SR1202D
	R	514,519	RN1/16SE4701D
	R	515,518	RN1/16SE1501D
	R	516	RS1/10SR8200D
	R	517	RN1/16SE9101D
	R	520	RS1/10SR1500D
	R	521	RN1/16SE1003D
	R	522	RS1/10SR3300D
	R	523	RN1/16SE1202D
	R	525-528	RS1/10SR1003D
	R	529,530	RS1/10SR3900D
	R	531,532	RN1/16SE3900D
	R	533,534	RS1/10SR2200D
	Other Resistors		RS1/10SR###J

CAPACITORS

	C	101-106,301-306	CCSRCH102J50
	C	107-112,307-312	CCSRCH101J50
	C	113-118,313-318	CEAT101M16
	C	121,122,321,322	CCSRCH471J50
	C	123,126,137,142	CEAT101M25
	C	124,125,135,136	CKSRYB104K25
	C	127,128,327,328	CKSRYB223K50
	C	129,131,329,331	CCSRCH331J50
	C	130,132,330,332	CEAT221M10
	C	133,134,333,334	CFTLA103J50
	C	138-141,146,147	CKSRYB104K25
	C	143,343	CKSRYB104K16
	C	144,145,337,342	CEAT101M25
	C	324,325,335,336	CKSRYB104K25
	C	338-341,524,525	CKSRYB104K25
	C	344,345	CEAT101M25
	C	504,505	CFTLA103J50
	C	512,513	CCSRCH102J50
	C	514	CKSRYB471K50
	C	515,517,522,523	CCSRCH471J50

Mark	No.	Description	Part No.
C	516		CCSRCH222J50
C	518,526-529		CEAT101M16
C	519		CKSRYB103K50
C	520		CCSRCH331J50
C	521		CKSRYB331K50
C	530,531		CKSRYB104K25

C AOJK ASSY

SEMICONDUCTORS

IC	701,702,705,901		NJM4580MD
IC	703,704,902,903		NJM4580D
Q	701,702		LTA114EUB
Q	703-716,901-904		INC2002AC1
Q	905-908		2SK209
Q	909-912		INC2002AC1
D	711-714,902-905		DZ2S180C
D	901		DA2J101

MISCELLANEOUS

JA	701,702	CANON CONNECTOR	DKB1093
JA	703	PIN JACK(2P)	AKB7181
JA	901,902	6.5 DIA JACK	DKN1653
	0	CANON SHIELD	DNF1789
	1	PHONE SHIELD	DNF1875
JP	701	CRIMP CONNECTOR	PF15PG-R15
JP	702	CRIMP CONNECTOR	PF05PG-R15
P	701,702	PROTECTOR(1A) (1 A)	AEK1073

RESISTORS

R	705-712		RS1/10SR6801D
R	713-720,729-736		RN1/16SE6802D
R	721-728		RS1/10SR6201D
R	737-744,777-784		RS1/10SR5601D
R	745-752,757-764		RS1/8SQ1800F
R	769-772		RS1/8SQ2200F
R	773-776		RS1/10SR1002D
R	785,786		RS1/10SR1001D
R	787-794		RN1/16SE6801D
R	795,796		RS1/10SR1102D
R	797,798		RN1/16SE2702D
R	799,800		RS1/10SR6800D
R	801-804,932-935		RD1/2VM331J
R	805-808,936-939		RS1/10SR2201D
R	815-818		RD1/2VM100J
R	901,902		RS1/10SR5601D
R	903,904,907,908		RN1/16SE7502D
R	905,906		RS1/10SR5101D
R	909,910		RS1/10SR4701D
R	912-919		RS1/10SR3301D
R	924-931		RN1/16SE1102D
	Other Resistors		RS1/10SR###J

CAPACITORS

C	701-704		CCSRCH102J50
C	705-708		CCSRCH221J50
C	709-716		CCSRCH200J50
C	717,721		ACH1482
C	718-720,722,729		CKSRYB104K25
C	727,740		CEHAZL101M25
C	730,731,736,737		CCSRCH101J50
C	732,735,738,743		CKSRYB104K25
C	741,750		CEHAT101M25
C	744,910,911		CKSRYB104K25
C	746-749,918-921		CCSRCH101J50
C	751-754		ACH1480
C	755,756,932-935		CEAT101M16
C	763,764,942-945		DCE1017
C	765-768		DCE1018
C	901,902		CEAT470M25
C	903,904		CCSRCH272J50
C	905,906,914-917		CCSRCH471J50
C	907,908		CCSRCH180J50
C	923-926		CKSRYB104K25
C	928-931		CCSRCH101J50

D HPLK ASSY

SEMICONDUCTORS

IC	3901		NJM4580MD
Q	3901,3902		2SK209
Q	3903,3904		INC2002AC1
Q	3905,3907		KTC3209
Q	3906,3908		KTA1281

MISCELLANEOUS

JA	3901	HEADPHONE JACK	DKN1622
JA	3902	STEREO MINI JACK	XKN3017
	2	PHONE SHIELD	DNF1875
JP	3901	CRIMP CONNECTOR	PF09PG-R10

RESISTORS

R	3901,3902		RS1/10SR1002D
R	3903,3904		RN1/16SE1002D
R	3910,3912		RS1/8SQ680J
R	3913,3914		RS1/10SR1001D
R	3915-3918		RS1LMF390J
	Other Resistors		RS1/10SR###J

CAPACITORS

C	3902,3903		CCSRCH391J50
C	3904,3907,3910,3915		CEAT101M16
C	3905,3906,3911-3914		CKSRYB104K25
C	3916,3917		CEANP471M6R3
C	3918,3919		CFTLA224J50
C	3920		CFTLA103J50

E USBB ASSY

MISCELLANEOUS

L	3901,3951	COIL	ATH7015
L	3903,3952	CHIP SOLID INDUCTOR	QTL1013
L	3904,3954	INDUCTOR	CTF1793
L	3953,3993	CHIP SOLID INDUCTOR	QTL1013
JA	3901,3951	USB CONNECTOR	DKN1237
KN	3901,3951	WRAPPING TERMINAL	CKF1089
CN	3901	L-PLUG(10P)	KM200NA10L

CAPACITORS

C	3903,3955		CCSSCH470J50

Mark	No.	Description	Part No.

F FAD1 ASSY

MISCELLANEOUS

	VR	9021 SLIDE VR	DCV1027
	CN	9021 PLUG(3P)	KM200NA3R

G FAD2 ASSY

MISCELLANEOUS

	VR	9031 SLIDE VR	DCV1027
	CN	9031 PLUG(3P)	KM200NA3E

H FAD3 ASSY

MISCELLANEOUS

	VR	9011 SLIDE VR	DCV1027
	CN	9011 PLUG(3P)	KM200NA3

I FAD4 ASSY

MISCELLANEOUS

	VR	9041 SLIDE VR	DCV1027
	CN	9041 PLUG(3P)	KM200NA3Y

J MXRA ASSY

SEMICONDUCTORS

	IC	4501-4503	TC74HC4052AFT
	IC	4504	NJM12903V
	Q	4002-4005	LTC123JUB
	Q	4006-4014	LSCR523UB
	Q	4015,4017,4019,4021	LTC124EUB
	Q	4016,4018,4020,4022	2SB1689
	Q	4023,4025,4502-4505	LTC124EUB
	Q	4024,4026	2SB1689
	Q	4501	LTA143EUB
D	D	4002,4005,4016-4018	SLI-343U8R(HJK)
	D	4003,4004,4009-4014	SLI-343M8G(GHJ)
	D	4006-4008,4015	SLI-343YYW(TUV)
	D	4019-4021,4028	SLI-343YYW(TUV)
	D	4022-4027,4035-4040	SLI-343M8G(GHJ)
	D	4029-4031,4041-4043	SLI-343U8R(HJK)
	D	4032-4034,4044-4046	SLI-343YYW(TUV)
	D	4047-4052,4059-4064	SLI-343M8G(GHJ)
	D	4053-4055,4068	SLI-343U8R(HJK)
	D	4056-4058,4065	SLI-343YYW(TUV)
	D	4066,4067,4072-4077	SLI-343M8G(GHJ)
E	D	4069-4071,4078-4080	SLI-343YYW(TUV)
	D	4081-4084	SLI-343M8G(GHJ)
	D	4501-4521	DA2J101

MISCELLANEOUS

	VR	4501-4506 ROTARY VR	DCS1126
	VR	4507,4508,4510-4512 ROTARY VR	DCS1104
	VR	4509,4513,4514 POTENTIONETER	DCS1065
	VR	4515,4520 ROTARY VR	DCS1104
	VR	4516-4519 POTENTIONETER	DCS1065
F	VR	4521-4527 POTENTIONETER	DCS1065
	S	4501,4504,4513 SLIDE SWITCH	DSH1058
	S	4502,4503,4505,4506 TACT SWITCH	DSG1079
	S	4507,4510 SLIDE SWITCH	DSH1066
	S	4508,4509,4511,4512 TACT SWITCH	DSG1079
	S	4514-4518 TACT SWITCH	DSG1079
	CN	4001 25P CONNECTOR	VKN1256
	CN	4002 23P CONNECTOR	VKN1254
	CN	4501 3P JUMPER CONNECTOR	52147-0310

RESISTORS

		All Resistors	RS1/10SR###J

CAPACITORS

	C	4001,4002	CEJQ101M16
	C	4003,4004,4008	CKSRYB104K16
	C	4006	CEJQ470M6R3
	C	4010-4015,4513-4518	CKSRYB104K16
	C	4519-4530,4538	CKSRYB471K50
	C	4531,4534,4535,4544	CKSRYB104K16
	C	4541-4543,4545-4552	CKSRYB471K50
	C	4553-4575	CKSRYB104K16

K MXRB ASSY

SEMICONDUCTORS

	IC	7801	TC74HC4052AFT
	IC	7802	TC4053BFT
	Q	7801,7803,7805,7807	LTC124EUB
	Q	7802,7806,7808,7812	LSAR523UB
	Q	7804,7810	2SA1577
	Q	7809,7811	LTC124EUB
	Q	7813,7814	LSCR523UB
	Q	7825-7832	LSAR523UB
	D	7801,7802,7807,7808	SLR343BD2T(NP)
	D	7803,7804,7809,7810	SLI-343YYW(TUV)
	D	7805,7806,7811,7812	SLI-343U8R(HJK)
	D	7813-7842	DA2J101
	D	7843-7846	SLI-343YYW(TUV)

MISCELLANEOUS

	VR	7801 POTENTIONETER	DCS1065
	VR	7802,7803 ROTARY VR	DCS1104
	VR	7804 ROTARY VR	DCS1125
	S	7801,7802,7804,7805 TACT SWITCH	DSG1079
	S	7803,7806,7809 SLIDE SWITCH	DSH1058
	S	7807,7808,7810,7811 TACT SWITCH	DSG1079
	S	7812,7815 SLIDE SWITCH	DSH1058
	S	7813,7814,7816,7817 TACT SWITCH	DSG1079
	CN	7801 27P CONNECTOR	VKN1258
	CN	7802 PLUG(3P)	KM200NA3
	CN	7803 PLUG(3P)	KM200NA3R
	CN	7804 PLUG(3P)	KM200NA3E
	CN	7805 PLUG(3P)	KM200NA3Y

RESISTORS

		All Resistors	RS1/10SR###J

MISCELLANEOUS

	JH	7801 CRIMP CONNECTOR	PF03PG-R15
	JH	7802,7803 3P CABLE HOLDER	51048-0300
	JP	7802,7803 3P JUMPER WIRE	D20PDY0310E

CAPACITORS

	C	7801,7808-7819	CKSRYB104K16
	C	7804-7807	CKSRYB471K50
	C	7821-7823	CEJQ470M6R3

Mark	No.	Description	Part No.

L CRFCV ASSY

MISCELLANEOUS

VR	8001	ROTARY VR	DCS1121
CN	8001	3P JUMPER CONNECTOR	52147-0310

CAPACITORS

C	8001		CKSRYB104K16

M JFLL ASSY

SEMICONDUCTORS

Q	7401,7402		KTC3198

MISCELLANEOUS

V	7401	VFD	DEL1073
	0	STAY/FL	DNF1934

RESISTORS

	All Resistors		RS1/10SR###J

MISCELLANEOUS

JP	7401	CRIMP CONNECTOR	PF11PG-R42

CAPACITORS

C	7401		CEAT101M6R3
C	7402-7404,7412-7414		CKSRYB104K16
C	7405		CEAT470M35
C	7406,7407		CKSRYB104K50
C	7408-7411		CCSRCH101J50

N JFLR ASSY

SEMICONDUCTORS

Q	7601,7602		KTC3198

MISCELLANEOUS

V	7601	VFD	DEL1073
	0	STAY/FL	DNF1934

RESISTORS

	All Resistors		RS1/10SR###J

MISCELLANEOUS

JP	7601	CRIMP CONNECTOR	PF11PG-R42

CAPACITORS

C	7601		CEAT101M6R3
C	7602-7604,7612-7614		CKSRYB104K16
C	7605		CEAT470M35
C	7606,7607		CKSRYB104K50
C	7608-7611		CCSRCH101J50

O JLL1 ASSY

SEMICONDUCTORS

Q	9211-9214		LSAR523UB
D	9211		SLR343BD2T(NP)
D	9212		SLR343WBC7T(MN)

MISCELLANEOUS

CN	9211	L-PLUG(3P)	KM200NA3L

Mark	No.	Description	Part No.

RESISTORS

	All Resistors		RS1/10SR###J

P JLL2 ASSY

SEMICONDUCTORS

Q	9231-9234		LSAR523UB
D	9231		SLR343BD2T(NP)
D	9232		SLR343WBC7T(MN)

MISCELLANEOUS

CN	9231,9232	L-PLUG(3P)	KM200NA3L

RESISTORS

	All Resistors		RS1/10SR###J

Q JLL3 ASSY

SEMICONDUCTORS

Q	9251-9254		LSAR523UB
D	9251		SLR343BD2T(NP)
D	9252		SLR343WBC7T(MN)

MISCELLANEOUS

CN	9251,9252	L-PLUG(3P)	KM200NA3L

RESISTORS

	All Resistors		RS1/10SR###J

R JLL4 ASSY

SEMICONDUCTORS

Q	9271-9274		LSAR523UB
D	9271		SLR343BD2T(NP)
D	9272		SLR343WBC7T(MN)

MISCELLANEOUS

CN	9271	L-PLUG(3P)	KM200NA3L

RESISTORS

	All Resistors		RS1/10SR###J

S JLR1 ASSY

SEMICONDUCTORS

Q	9311-9314		LSAR523UB
D	9311		SLR343BD2T(NP)
D	9312		SLR343WBC7T(MN)

MISCELLANEOUS

CN	9311	L-PLUG(3P)	KM200NA3L

RESISTORS

	All Resistors		RS1/10SR###J

T JLR2 ASSY

SEMICONDUCTORS

Q	9331-9334		LSAR523UB
D	9331		SLR343BD2T(NP)
D	9332		SLR343WBC7T(MN)

MISCELLANEOUS

CN	9331,9332	L-PLUG(3P)	KM200NA3L

Mark	No.	Description	Part No.
		RESISTORS	
		All Resistors	RS1/10SR###J

U JLR3 ASSY

		SEMICONDUCTORS	
	Q	9351-9354	LSAR523UB
	D	9351	SLR343BD2T(NP)
	D	9352	SLR343WBC7T(MN)
		MISCELLANEOUS	
	CN	9351,9352 L-PLUG(3P)	KM200NA3L
		RESISTORS	
		All Resistors	RS1/10SR###J

V JLR4 ASSY

		SEMICONDUCTORS	
	Q	9371-9374	LSAR523UB
	D	9371	SLR343BD2T(NP)
	D	9372	SLR343WBC7T(MN)
		MISCELLANEOUS	
	CN	9371 L-PLUG(3P)	KM200NA3L
		RESISTORS	
		All Resistors	RS1/10SR###J

W JOGTL ASSY

		SEMICONDUCTORS	
	IC	8601	DYW1846
	D	8601	RB501VM-40
		MISCELLANEOUS	
	L	8601-8603 INDUCTOR	CTF1379
	KN	8601-8603 EARTH TERMINAL	AKF7002
	CN	8601 PLUG(8P)	KM200NA8
	CN	8602 L-PLUG(4P)	KM200NA4L
	CN	8603,8604 L-PLUG(3P)	KM200NA3L
	VA	8601,8602 SMD VARISTOR	EZJZ1V80010
		RESISTORS	
	R	8601,8602	DCN1187
	R	8603	RS1/10SR4701D
		Other Resistors	RS1/10SR###J
		CAPACITORS	
	C	8601	CCSRCH101J50
	C	8602	CKSRYB104K16
	C	8603	CCG1192

X JOGTR ASSY

		SEMICONDUCTORS	
	IC	8701	DYW1846
	D	8701	RB501VM-40
		MISCELLANEOUS	
	L	8701-8703 INDUCTOR	CTF1379
	KN	8701-8703 EARTH TERMINAL	AKF7002
	CN	8701 PLUG(8P)	KM200NA8
	CN	8702 L-PLUG(4P)	KM200NA4L
	CN	8703,8704 L-PLUG(3P)	KM200NA3L
	VA	8701,8702 SMD VARISTOR	EZJZ1V80010
		RESISTORS	
	R	8701,8702	DCN1187
	R	8703	RS1/10SR4701D
		Other Resistors	RS1/10SR###J
		CAPACITORS	
	C	8701	CCSRCH101J50
	C	8702	CKSRYB104K16
	C	8703	CCG1192

Y JOGR ASSY

		MISCELLANEOUS	
	CN	8801 PLUG(4P)	KM200NA4
		RESISTORS	
		All Resistors	RS1/10SR###J
		MISCELLANEOUS	
	PC	8801 PHOTO INTERRUPTER	KE-2K18-15
		CAPACITORS	
	C	8801	CKSRYB105K10
	C	8802,8803	CKSRYB103K50

Z DEUP ASSY

		SEMICONDUCTORS	
	IC	6004	TC74HC4052AFT
	Q	6003,6005,6007	LTC124EUB
	Q	6004,6006	ISA1602AM1
	Q	6008	LSAR523UB
	Q	6009,6012	LTC123JUB
	Q	6010,6011	LSCR523UB
	Q	6013-6015	LTC124EUB
	D	6001-6009,6017	SLI-343U8R(HJK)
	D	6018-6026,6031	DA2J101
	D	6027-6030	SLI-343U8R(HJK)
		MISCELLANEOUS	
	VR	6001-6003 ROTARY VR	DCS1125
	VR	6004 ROTARY VR	DCS1121
	S	6001 ENCODER	DSX1082
	S	6002,6003,6005-6012 TACT SWITCH	DSG1079
	S	6004 ENCODER	DSX1125
	CN	6001 32P CONNECTOR	VKN1263
	CN	6002 15P CONNECTOR	VKN1246
	CN	6003 3P JUMPER CONNECTOR	52147-0310
		RESISTORS	
		All Resistors	RS1/10SR###J
		MISCELLANEOUS	
	JH	6001 5P CABLE HOLDER	51048-0500
	JP	6001 JUMPER WIRE	D20PDY0510E
		CAPACITORS	
	C	6001,6002,6006-6009	CKSRYB471K50
	C	6003,6010-6013	CKSRYB104K16
	C	6022-6024	CKSRYB104K16
	C	6025,6026	CEJQ470M6R3

Mark	No.	Description	Part No.

AA DEUPR ASSY

SEMICONDUCTORS

	IC	6004	TC74HC4052AFT
	Q	6003,6005,6007	LTC124EUB
	Q	6004,6006	ISA1602AM1
	Q	6008	LSAR523UB
	Q	6010,6011	LSCR523UB
	Q	6012	LTC123JUB
	Q	6013-6015	LTC124EUB
	D	6001-6009,6027-6030	SLI-343U8R(HJK)
	D	6018-6026,6031	DA2J101

MISCELLANEOUS

	VR	6001-6003 ROTARY VR	DCS1125
	VR	6004 ROTARY VR	DCS1121
	S	6001 ENCODER	DSX1082
	S	6002,6003,6005,6006 TACT SWITCH	DSG1079
	S	6004 ENCODER	DSX1125
	S	6008-6012 TACT SWITCH	DSG1079
	CN	6001 32P CONNECTOR	VKN1263
	CN	6002 15P CONNECTOR	VKN1246

RESISTORS

	All Resistors		RS1/10SR###J

MISCELLANEOUS

	JH	6001 5P CABLE HOLDER	51048-0500
	JP	6001 JUMPER WIRE	D20PDY0510E

CAPACITORS

	C	6001,6002,6006-6009	CKSRYB471K50
	C	6003,6010-6013	CKSRYB104K16
	C	6022-6024	CKSRYB104K16
	C	6025,6026	CEJQ470M6R3

AB PSWB ASSY

MISCELLANEOUS

	S	8901 PUSH SW	ASG1102
	CN	8901 3P JUMPER CONNECTOR	52147-0310

RESISTORS

	All Resistors		RS1/10SR###J

AC KSWB ASSY

SEMICONDUCTORS

	Q	8201,8203,8205	LTC124EUB
	Q	8202,8204,8206	ISA1602AM1
	Q	8207,8208	LTC123JUB
	Q	8209	2SC4154-11
	Q	8213-8215	LTC124EUB
	Q	8216-8219	LSAR523UB
	D	8201-8203	SLI-343U8R(HJK)
	D	8206	SLR343BD2T(NP)
	D	8207	SLR343WBC7T(MN)
	D	8208	SLI-343YYW(TUV)
	D	8209-8211	SLI-343M8G(GHJ)
	D	8212-8217	DA2J101

MISCELLANEOUS

	S	8201-8206 TACT SWITCH	DSG1079
	S	8207,8208 TACT SWITCH	DSG1117
	CN	8201 15P CONNECTOR	VKN1246

RESISTORS

	All Resistors		RS1/10SR###J

CAPACITORS

	C	8201,8204	CKSRYB104K16
	C	8205	CEJQ470M6R3

AD SLDB ASSY

SEMICONDUCTORS

	Q	8411,8413,8415,8419	LTC124EUB
	Q	8412,8414,8416,8420	LSAR523UB
	Q	8421	LTC124EUB
	Q	8422	LSAR523UB
	Q	8426,8427	LTC123JUB
	Q	8428	LSCR523UB
	D	8401,8431-8434	SLI-343U8R(HJK)
	D	8411-8417,8419-8422	DA2J101
	D	8437-8442	SLI-343U8R(HJK)

MISCELLANEOUS

	VR	8401 SLIDE VR	DCV1033
	S	8401-8403,8405-8408 TACT SWITCH	DSG1079
	CN	8401 5P JUMPER CONNECTOR	52147-0510
	CN	8402 13P CONNECTOR	VKN1244

RESISTORS

	All Resistors		RS1/10SR###J

CAPACITORS

	C	8401,8405	CEJQ470M6R3
	C	8402,8403	CKSRYB392K50
	C	8404	CKSRYB104K16

AE PADL ASSY

SEMICONDUCTORS

	IC	7005	BU4551BF
	Q	7001,7003,7005,7034	RN1903
	Q	7002,7004,7006,7035	2SB1689
	Q	7007-7018,7031-7033	LTC123JUB
	Q	7036	RN1903
	Q	7037	2SB1689
	Q	7038,7040	LTC124EUB
	Q	7039,7041	ISA1602AM1
	Q	7044-7075,7080-7095	LSAR523UB
	D	7001-7011,7014	SMLVN6RGB2UK(B)
	D	7017-7020	DA2J101

MISCELLANEOUS

	S	7001-7004 TACT SWITCH	DSG1134
	CN	7001 10P CONNECTOR	VKN1414
	CN	7002 25P CONNECTOR	VKN1429
	CN	7003 13P CONNECTOR	VKN1417
	CN	7004 23P CONNECTOR	VKN1427

RESISTORS

	R	7005,7018,7029	RS1/16SS563J
	R	7056	RS1/16SS473J
	R	7059-7066	RS1/16SS3301D
	R	7067-7069,7071	RS1/16SS563J
	R	7070,7072	RS1/16SS223J

Mark	No.	Description	Part No.
	R	7088,7089,7094,7095	RS1/16SS0R0J
	R	7100,7101,7110,7111	RS1/16SS0R0J
	R	7120,7121,7130,7131	RS1/16SS0R0J
	R	7140,7141,7150,7151	RS1/16SS0R0J
	R	7163,7165,7167,7169	RS1/16SS152J
	R	7164,7166,7168,7170	RS1/16SS103J
	R	7171	RS1/16SS152J
	R	7172	RS1/16SS103J
	R	7173,7175	RS1/16SS182J
	R	7176,7182,7188,7196	RS1/16SS0R0J
	R	7202,7215,7216,7225	RS1/16SS0R0J
	R	7226,7235,7236,7245	RS1/16SS0R0J
	R	7246	RS1/16SS0R0J
		Other Resistors	RS1/10SR###J

CAPACITORS

	C	7002,7004,7020,7021	CKSSYB104K10
	C	7007-7014	CKSSYB103K16
	C	7016,7022	CEVW101M16

AF PADR ASSY

SEMICONDUCTORS

	IC	6005	BU4551BF
	Q	6001,6003,6005,6034	RN1903
	Q	6002,6004,6006,6035	2SB1689
	Q	6007-6018,6031-6033	LTC123JUB
	Q	6036	RN1903
	Q	6037	2SB1689
	Q	6038,6040	LTC124EUB
	Q	6039,6041	ISA1602AM1
	Q	6044-6075,6080-6095	LSAR523UB
	D	6001-6011,6014	SMLVN6RGB2UK(B)
	D	6017-6020	DA2J101

MISCELLANEOUS

	S	6001-6004 TACT SWITCH	DSG1134
	CN	6001 10P CONNECTOR	VKN1414
	CN	6002 25P CONNECTOR	VKN1429
	CN	6003 13P CONNECTOR	VKN1417
	CN	6004 23P CONNECTOR	VKN1427

RESISTORS

	R	6005,6018,6029	RS1/16SS563J
	R	6056	RS1/16SS473J
	R	6059-6066	RS1/16SS3301D
	R	6067-6069,6071	RS1/16SS563J
	R	6070,6072	RS1/16SS223J
	R	6088,6089,6094,6095	RS1/16SS0R0J
	R	6100,6101,6110,6111	RS1/16SS0R0J
	R	6120,6121,6130,6131	RS1/16SS0R0J
	R	6140,6141,6150,6151	RS1/16SS0R0J
	R	6163,6165,6167,6169	RS1/16SS152J
	R	6164,6166,6168,6170	RS1/16SS103J
	R	6171	RS1/16SS152J
	R	6172	RS1/16SS103J
	R	6173,6175	RS1/16SS182J
	R	6176,6182,6188,6196	RS1/16SS0R0J
	R	6202,6215,6216,6225	RS1/16SS0R0J
	R	6226,6235,6236,6245	RS1/16SS0R0J
	R	6246	RS1/16SS0R0J
		Other Resistors	RS1/10SR###J

Mark	No.	Description	Part No.

CAPACITORS

	C	6002,6004,6020,6021	CKSSYB104K10
	C	6007-6014	CKSSYB103K16
	C	6016,6022	CEVW101M16

AG CDCL ASSY

SEMICONDUCTORS

	IC	7301	AD7147ACPZ500RL7
	IC	7302	TC7SH08FUS1
	D	7301	DZ2J056M0

MISCELLANEOUS

	L	7301 CHIP SOLID INDUCTOR	XTL3010

RESISTORS

		All Resistors	RS1/16SS###J

CAPACITORS

	C	7302	CKSSYB103K16
	C	7303,7310	CKSSYB104K16
	C	7304	CCG1192
	C	7305	CCSRCH221J50
	C	7309	CCSRCH101J50

AH CDCR ASSY

SEMICONDUCTORS

	IC	6301	AD7147ACPZ500RL7
	IC	6302	TC7SH08FUS1
	D	6301	DZ2J056M0

MISCELLANEOUS

	L	6301 CHIP SOLID INDUCTOR	XTL3010

RESISTORS

		All Resistors	RS1/16SS###J

CAPACITORS

	C	6302	CKSSYB103K16
	C	6303,6310	CKSSYB104K16
	C	6304	CCG1192
	C	6305	CCSRCH221J50
	C	6309	CCSRCH101J50

AI CRFD ASSY

* When replacement of the CRFD Assy is required, be sure to order the CROSS FADER Assy (DXA2257) which is a parent Assy.

AJ POWER SUPPLY ASSY

* When replacement of the POWER SUPPLY Assy is required, be sure to order the POWER SUPPLY Assy (DWR1463) which is a parent Assy.