


EXPLODED VIEW • PARTS LIST


Main section

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7914-00 940-7914-10 940-7874-00	ESCUTCHEON ASSY(1665D-B) ESCUTCHEON ASSY(1665D-C) ESCUTCHEON ASSY(1665K)	1
2	039-1580-00	DISP PWB (WITHOUT COMPONENT)	1
3	074-1151-06	OUTLET SOCKET (6P)	1
4	074-1151-16	OUTLET SOCKET (16P)	1
5	017-0447-14 017-0447-05	PILOT LAMP(8V105mA)(1665D) PILOT LAMP(8V105mA)(1665K)	2
6	017-0433-04	PILOT LAMP(14V40mA)	6
7	013-6302-50	SWITCH	14
8	016-0010-04	VARIABLE RESISTOR	1
9	353-0523-00	SHADE	1
10	353-0524-00	SHADE	1
11	335-5364-01	ILLUMI HOLDER	1
12	335-6165-00	LCD ILLUMI	1
13	335-5493-02	COLOR FILTER	1
14	379-1160-20	INDICATOR	1
15	331-2678-00	LCD HOLDER	1
16	347-5491-00	SHADE	1
17	380-5449-10 380-5449-00	KNOB (1665D) KNOB (1665K)	1
18	716-0872-00	PAD SCREW (M1.7×5)	6
19	320-0529-95 320-0572-41 320-0572-37	DUSTPROOF COVER(1665D-B) DUSTPROOF COVER(1665D-C) DUSTPROOF COVER(1665K)	1
20	750-2626-00	SPRING	1
21	039-1579-00	SUB PWB (WITHOUT COMPONENT)	1
22	076-0544-10	PLUG (10P)	1
23	076-0544-12	PLUG (12P)	1

NO.	PART NO.	DESCRIPTION	Q'TY
24	331-2026-20	CONNECTOR HOLDER B	1
25	074-1013-30	OUTLET SOCKET	1
26	331-2025-10	CONNECTOR HOLDER A	1
27	074-1087-10	OUTLET SOCKET	1
28	039-1652-00	MAIN PWB (WITHOUT COMPONENT)	1
29	076-0540-06	PLUG (6P)	1
30	076-0540-16	PLUG (16P)	1
31	309-0732-00	FRONT PLATE	1
32	880-1726T 880-1726R	TUNER PACK(FM)(1665D) TUNER PACK(FM)(1665K)	1
33	880-1517E 880-1517A	TUNER PACK (AM)(1665D) TUNER PACK (AM)(1665K)	1
34	074-0850-08	OUTLET SOCKET (DIN 8P)	1
35	076-0461-20	PLUG (20P)	1
36	074-1068-11	OUTLET SOCKET	1
37	307-0632-01	REAR PLATE	1
38	331-2679-01	REAR COVER	1
39	331-2471-10	MECHANISM BRACKET ASSY	1
40	714-2606-81	MACHINE SCREW (M2.6×6)	9
41	716-1494-00	IT SCREW (M2.6×6)	9
42	310-1663-01	UPPER CASE	1
43	286-9233-12 286-9233-15 286-9233-16	SETPLATE (1665D-B) SETPLATE (1665D-C) SETPLATE (1665K)	1
44	311-1758-01	LOWER CASE	1
45	930-0790-04	TAPE MECHANISM	1
46	800-0206-00	WIRE (BLK)	1

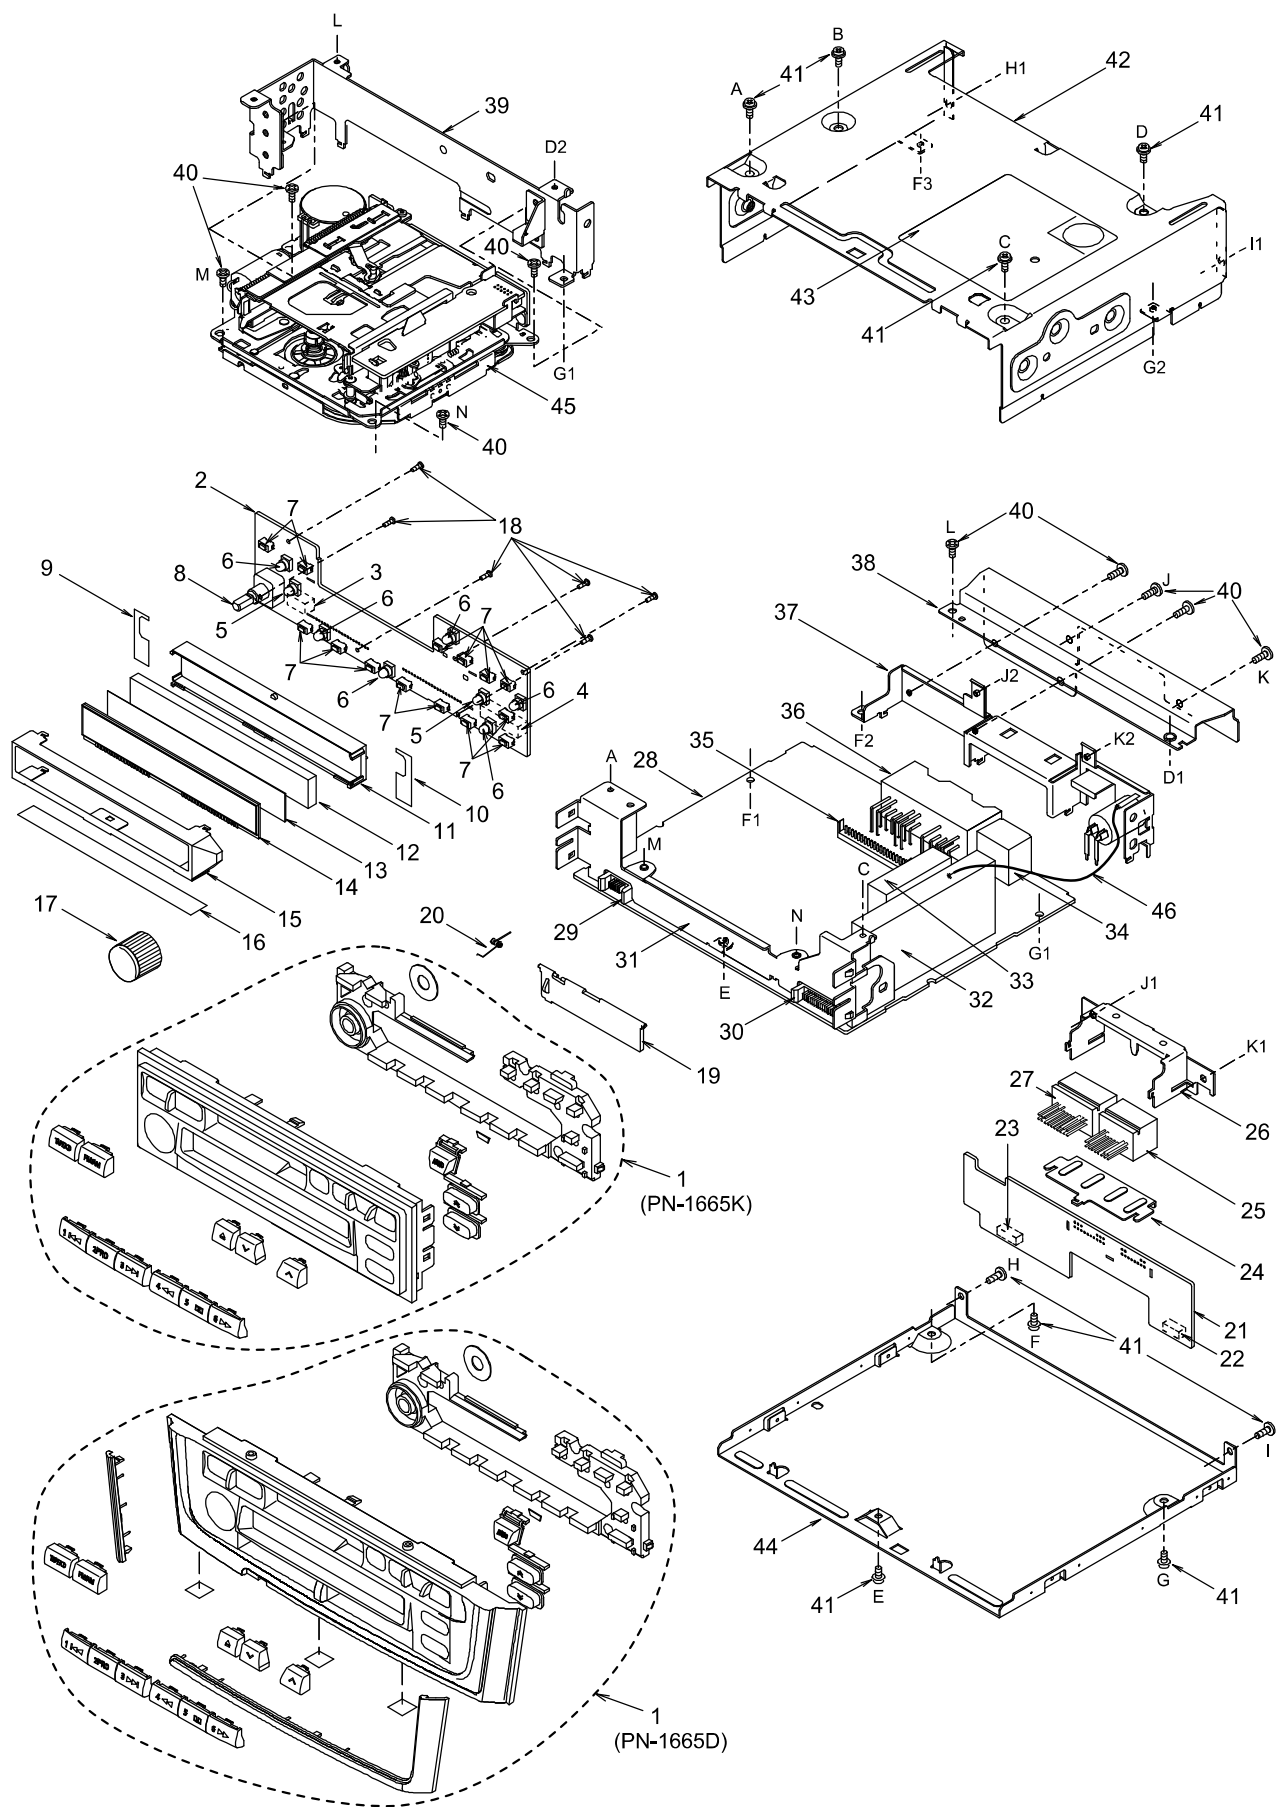

Tape mechanism section

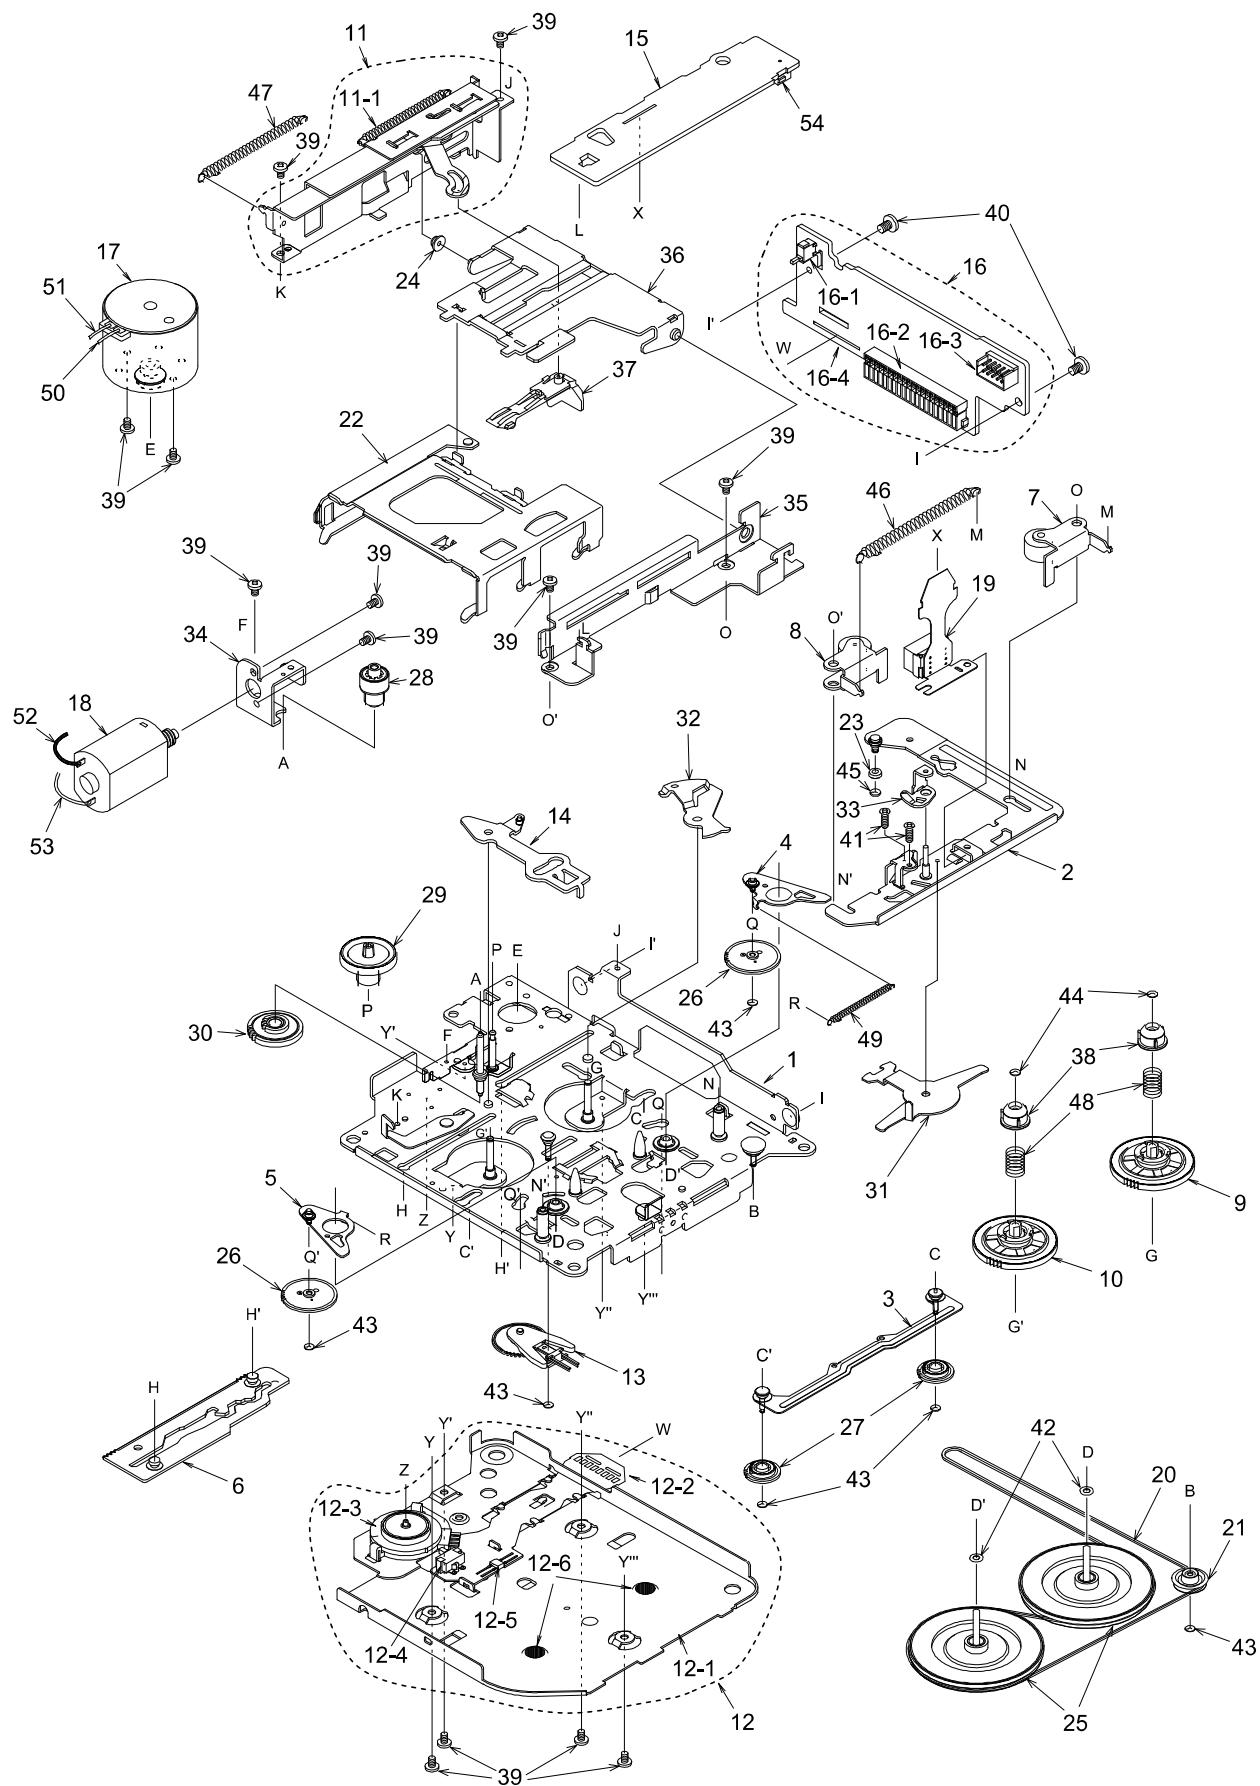

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-14	DECK PLATE ASSY	1	22	606-0101-08	PACK GUIDE	1
2	960-4261-05	HEAD PLATE ASSY	1	23	610-0342-01	HEAD-P-ROLLER	1
3	960-4262-03	FF/REW-P-ASSY	1	24	610-0343-00	GUIDE-A-ROLLER	1
4	960-4263-03	IDLER-P-ASSY L	1	25	611-0091-02	FLYWHEEL	2
5	960-4264-03	IDLER-P-ASSY R	1	26	613-0662-00	IDLER GEAR	2
6	960-4266-05	MODE PLATE ASSY	1	27	613-0286-02	FF/REW GEAR	2
7	960-4269-05	ROLLER ASSY F	1	28	613-0288-01	HELICAL GEAR	1
8	960-4270-05	ROLLER ASSY R	1	29	613-0289-01	GEAR A	1
9	960-4348-03	REEL ASSY F	1	30	613-0337-00	POWER GEAR	1
10	960-4349-03	REEL ASSY R	1	31	630-2597-01	CHANGE LINK	1
11	960-4298-09	EJECT SUB ASSY	1	32	630-2598-05	EJECT LINK	1
11-1	750-2948-01	SWITCH PLATE SPRING	1	33	630-2600-01	ADJUST LINK	1
12	960-4338-09	BOTTOM SUB ASSY	1	34	630-2601-02	MOTOR PLATE	1
12-1	960-4295-02	BOTTOM-P-ASSY	1	35	630-2626-05	PWB FRAME	1
12-2	099-9926-01	FLEXIBLE PWB (WITHOUT COMPONENT)	1	36	630-2605-02	GUIDE ARM	1
12-3	013-3951-32	SWITCH(MODE)	1	37	631-1992-02	PACK STOPPER	1
12-4	013-3953-01	SWITCH(METAL)	1	38	631-1993-01	SLIDE BUSH	2
12-5	051-1776-00	IC	1	39	716-0484-00	SCREW(M2×2.5)	13
12-6	746-0767-00	WASHER	2	40	716-1676-00	PWB SCREW(M2.6×6)	2
13	960-4282-06	DETECT SUB ASSY	1	41	716-0833-10	SCREW(M2×5.6)	2
14	960-4301-02	PLAY LINK ASSY	1	42	746-0624-00	WASHER	2
15	039-1436-00	SIDE PWB (WITHOUT COMPONENT)	1	43	746-0724-00	WASHER	6
16	990-0713-00	REAR PWB ASSY (WITH COMPONENT)	1	44	746-0761-00	WASHER	2
16-1	013-3906-00	SWITCH(TAPE IN)	1	45	746-0762-00	WASHER	1
16-2	074-1104-20	OUTLET SOCKET(20P)	1	46	750-2946-02	PINCH SPRING	1
16-3	076-0368-10	PLUG(10P)	1	47	750-2947-03	EJECT-P-SPRING	1
16-4	039-0489-00	REAR PWB	1	48	750-2949-00	SLIDE SPRING	2
17	SMA-168-100	MAIN MOTOR ASSY	1	49	750-3017-02	IDLER-P-SPRING	1
18	SMA-169-100	POWER MOTOR ASSY	1	50	800-4910-60	WIRE(BLK)	1
19	011-0328-02	HEAD	1	51	802-4911-60	WIRE(RED)	1
20	602-0118-00	BELT	1	52	806-4914-60	WIRE(BLU)	1
21	604-0046-00	TENSION PULLEY	1	53	809-4914-60	WIRE(WHT)	1
				54	074-0898-10	OUTLET SOCKET(10P)	1

■ ELECTRICAL PARTS LIST

Main PWB section(B1)

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL101	880-1726T	FM TUNER (1665D)	C211	183-1063-32	16V10 μ F (1665D)	C302	042-0562-17	16V10 μ F
BL101	880-1726R	FM TUNER (1665K)	C212	178-5632-78	0.056 μ F (1665D)	C303	042-0562-17	16V10 μ F
BL201	880-1517E	AM TUNER (1665D)	C213	042-0505-07	16V3.3 μ F (1665D)	C304	042-0562-17	16V10 μ F
BL201	880-1517A	AM TUNER (1665K)	C214	178-8232-78	0.082 μ F (1665D)	C305	176-5096-00	5pF CH
C101	178-1042-78	0.1 μ F	C215	178-4712-78	470pF (1665D)	C306	176-5096-00	5pF CH
C102	043-0277-01	0.022 μ F	C216	178-2732-78	0.027 μ F (1665D)	C307	176-2201-00	22pF CH
C103	178-3932-78	0.039 μ F	C217	178-4712-78	470pF (1665D)	C308	176-2201-00	22pF CH
C104	178-3932-78	0.039 μ F	C218	176-5601-00	56pF CH (1665D)	C309	176-5096-00	5pF CH
C105	183-4763-32	16V47 μ F	C219	176-4701-00	47pF CH (1665D)	C310	176-5096-00	5pF CH
C106	178-1042-78	0.1 μ F	C220	178-4722-78	4700pF (1665D)	C311	178-1052-78	1 μ F
C107	178-6832-78	0.068 μ F	C221	178-1032-78	0.01 μ F (1665D)	C312	178-1052-78	1 μ F
C108	178-6832-78	0.068 μ F	C222	178-4732-78	0.047 μ F (1665D)	C401	042-0505-04	10V33 μ F
C201	176-1007-00	10pF CH	C223	178-1032-78	0.01 μ F (1665D)	C402	042-0562-36	50V1 μ F
C202	176-1511-00	150pF CH (1665D)	C224	178-2232-78	0.022 μ F (1665D)	C403	042-0562-36	50V1 μ F
C202	117-0000-00	1/10W 0 Ω (1665K)	C225	183-4753-52	35V4.7 μ F (1665D)	C404	042-0562-17	16V10 μ F
C203	043-0277-01	0.022 μ F	C226	183-4753-52	35V4.7 μ F (1665D)	C405	042-0562-17	16V10 μ F
C204	042-0562-14	10V100 μ F	C227	178-1042-78	0.1 μ F (1665D)	C406	042-0562-36	50V1 μ F
C205	178-1042-78	0.1 μ F	C228	178-3332-78	0.033 μ F (1665K)	C407	042-0562-36	50V1 μ F
C206	178-1022-78	1000pF (1665D)	C229	178-6832-78	0.068 μ F (1665D)	C408	042-0562-17	16V10 μ F
C207	178-2232-78	0.022 μ F (1665D)	C229	178-4732-78	0.047 μ F (1665K)	C409	042-0562-17	16V10 μ F
C208	042-0427-02	16V33 μ F (1665D)	C230	178-1032-78	0.01 μ F (1665D)	C410	042-0562-17	16V10 μ F
C209	178-1242-78	0.12 μ F (1665D)	C230	178-8222-78	8200pF (1665K)	C411	042-0562-17	16V10 μ F
C210	176-5601-00	56pF CH (1665D)	C301	042-0562-17	16V10 μ F	C412	042-0562-36	50V1 μ F

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C413	042-0562-36	50V1 μ F	C656	042-0563-71	16V100 μ F	IC651	051-1014-10	TA7291S
C414	178-1242-78	0.12 μ F	C657	178-1042-78	0.1 μ F	J301	074-0850-08	8P
C415	178-1242-78	0.12 μ F	C701	178-1042-78	0.1 μ F	J601	076-0540-16	16P
C416	178-1532-78	0.015 μ F	C702	184-4773-22	10V470 μ F	J602	076-0540-06	6P
C417	178-1532-78	0.015 μ F	C703	183-4756-51	35V4.7 μ F NP	J701	074-1068-11	
C418	178-3312-78	330pF	C704	178-1042-78	0.1 μ F	L101	010-2230-76	22 μ H
C419	178-3312-78	330pF	C705	178-1042-78	0.1 μ F	L102	010-2230-76	22 μ H
C420	042-0562-17	16V10 μ F	C706	042-0562-14	10V100 μ F	L103	010-2230-64	2.2 μ H
C421	042-0562-17	16V10 μ F	C707	178-1042-78	0.1 μ F	L201	010-2003-04	COIL
C422	178-3332-78	0.033 μ F	C708	042-0562-14	10V100 μ F	L202	010-2230-76	22 μ H
C423	042-0562-17	16V10 μ F	C709	042-0563-71	16V100 μ F	L203	010-6004-40	2.2mH J (1665D)
C424	178-1042-78	0.1 μ F	C710	172-1041-11	0.1 μ F	L601	010-2230-76	22 μ H
C425	178-2212-78	220pF	C711	042-0551-02	16V1000 μ F	L602	010-2230-76	22 μ H
C426	042-0562-17	16V10 μ F	C712	183-4753-52	35V4.7 μ F	P651	076-0461-20	20P
C427	178-2242-78	0.22 μ F	C713	178-2222-05	2200pF	Q101	125-2005-01	UN2211
C428	178-1242-78	0.12 μ F	C714	178-2222-05	2200pF	Q102	100-1298-00	2SA1298
C429	042-0562-17	16V10 μ F	C715	183-1053-62	50V1 μ F	Q103	125-2005-01	UN2211
C430	042-0562-17	16V10 μ F	C716	183-1063-32	16V10 μ F	Q104	125-9003-02	IMD3
C431	178-6832-78	0.068 μ F	C717	172-1041-11	0.1 μ F	Q202	100-1298-00	2SA1298
C501	042-0548-02	10V220 μ F	C718	178-2222-05	2200pF	Q203	125-2005-01	UN2211
C502	042-0562-20	16V47 μ F	C719	178-2222-05	2200pF	Q301	125-2005-01	UN2211
C503	043-0309-90	10V 1 μ F	C720	178-2222-05	2200pF	Q302	125-9003-02	IMD3
C504	043-0309-90	10V 1 μ F	C721	178-2222-05	2200pF	Q303	125-9003-02	IMD3
C505	168-6822-05	6800pF	C722	178-2222-05	2200pF	Q501	103-0601-00	2SD601A
C506	168-2232-05	0.022 μ F	C723	178-2222-05	2200pF	Q502	101-0709-00	2SB709A-Q.R.S
C507	042-0562-17	16V10 μ F	C724	178-2222-05	2200pF	Q503	103-0601-00	2SD601A
C508	042-0562-17	16V10 μ F	C725	178-2222-05	2200pF	Q504	101-0709-00	2SB709A-Q.R.S
C509	042-0562-17	16V10 μ F	C727	043-0328-90	0.1 μ F	Q505	101-0709-00	2SB709A-Q.R.S
C510	042-0562-17	16V10 μ F	C730	176-1011-00	100pF CH	Q506	101-0709-00	2SB709A-Q.R.S
C511	168-5612-05	560pF	CCT601	050-0122-01	47k Ω $\times$ 4 J (1665K)	Q507	101-0709-00	2SB709A-Q.R.S
C512	168-5612-05	560pF	CCT602	050-0122-03	1k Ω $\times$ 4	Q520	103-0601-00	2SD601A
C513	176-5601-00	56pF CH	CCT603	050-0122-01	47k Ω $\times$ 4 J	Q601	102-2458-51	2SC2458Y.GR.BL
C514	176-5601-00	56pF CH	CCT604	050-0122-03	1k Ω $\times$ 4	Q602	102-2458-51	2SC2458Y.GR.BL
C515	176-2201-00	22pF CH	CCT605	050-0122-03	1k Ω $\times$ 4	Q603	125-2005-01	UN2211
C516	176-2201-00	22pF CH	CCT606	050-0122-03	1k Ω $\times$ 4	Q604	125-0006-00	UN2110
C517	176-2201-00	22pF CH	CCT607	050-0122-03	1k Ω $\times$ 4	Q605	125-0006-00	UN2110
C518	176-2201-00	22pF CH	CCT608	050-0122-03	1k Ω $\times$ 4	Q606	101-0709-00	2SB709A-Q.R.S
C519	176-5601-00	56pF CH	CCT610	050-0122-03	1k Ω $\times$ 4 (1665K)	Q651	100-1428-00	2SA1428
C520	176-5601-00	56pF CH	CCT612	050-0122-03	1k Ω $\times$ 4	Q652	125-2004-06	RN1406
C521	176-5601-00	56pF CH	CCT613	050-0122-00	10k Ω $\times$ 4 J (1665D)	Q701	102-2712-00	2SC2712
C522	176-5601-00	56pF CH	CCT651	050-0122-00	10k Ω $\times$ 4 J	Q702	125-2005-01	UN2211
C523	176-2201-00	22pF CH	D501	001-0356-00	1SS184	Q703	103-2118-00	2SD2118
C524	176-2201-00	22pF CH	D502	001-0356-00	1SS184	Q704	103-1306-00	2SD1306
C525	176-2201-00	22pF CH	D601	001-0516-00	MA111	Q705	102-2712-00	2SC2712
C526	176-2201-00	22pF CH	D602	001-0516-00	MA111	Q706	103-2118-00	2SD2118
C527	176-5601-00	56pF CH	D603	001-0516-00	MA111	Q707	103-1858-00	2SD1858
C528	176-5601-00	56pF CH	D604	001-0516-00	MA111	Q708	125-9003-02	IMD3
C529	042-0548-02	10V220 μ F	D605	001-0516-00	MA111	Q709	100-1048-00	2SA1048
C530	042-0563-15	10V220 μ F	D606	001-0516-00	MA111	Q710	125-2005-01	UN2211
C531	042-0548-02	10V220 μ F	D607	001-0516-00	MA111	Q711	103-0601-00	2SD601A
C532	042-0548-02	10V220 μ F	D608	001-0516-00	MA111	Q712	103-1858-00	2SD1858
C533	042-0563-15	10V220 μ F	D610	001-0516-00	MA111	Q713	125-2005-01	UN2211
C534	042-0548-02	10V220 μ F	D612	001-0516-00	MA111 (1665D)	Q714	101-0709-00	2SB709A-Q.R.S
C535	042-0548-02	10V220 μ F	D651	001-0377-38	MA4068M	Q715	100-1359-00	2SA1359
C536	042-0548-02	10V220 μ F	D701	001-0377-43	MA4082L	Q716	125-2005-01	UN2211 (1665D)
C537	043-0309-90	10V 1 μ F	D702	001-0377-45	MA4082H	Q717	101-0709-00	2SB709A-Q.R.S
C601	043-0277-01	0.022 μ F	D703	001-0377-48	MA4091H			(1665D)
C602	042-0458-00	50V1 μ F	D704	001-0377-34	MA4062L	Q718	100-1359-00	2SA1359 (1665D)
C603	178-1022-78	1000pF	D705	001-0503-31	HZS6 A2L	Q719	125-9003-02	IMD3 (1665K)
C604	178-1042-78	0.1 μ F	D706	001-0626-00	1A2	R101	117-2221-10	1/10W 2.2k Ω
C605	183-4763-32	16V47 μ F	D707	001-0516-00	MA111	R102	117-1041-10	1/10W 100k Ω
C606	176-1201-00	12pF CH	D708	001-0626-00	1A2	R103	117-1521-10	1/10W 1.5k Ω
C607	176-1201-00	12pF CH	D709	001-2015-00	RL253	R104	117-4731-10	1/10W 47k Ω
C609	176-1011-00	100pF CH	D710	001-0516-00	MA111 (1665D)	R105	117-2221-10	1/10W 2.2k Ω
C610	176-1011-00	100pF CH	D711	001-0626-00	1A2	R106	117-2221-10	1/10W 2.2k Ω
C611	176-1011-00	100pF CH	IC201	051-4200-90	TA2051FN (1665D)	R107	117-1031-10	1/10W 10k Ω
C612	176-3301-00	33pF CH	IC301	051-3020-90	NJM4565V	R201	117-1031-10	1/10W 10k Ω
C613	183-4763-12	6.3V47 μ F	IC401	051-5012-00	LC75386	R202	117-2221-10	1/10W 2.2k Ω
C614	183-4763-12	6.3V47 μ F	IC402	051-3019-90	NJM2060V	R203	117-1031-10	1/10W 10k Ω (1665D)
C615	178-1042-78	0.1 μ F	IC403	051-5011-00	TC9412AF	R204	117-1011-10	1/10W 100 Ω (1665D)
C616	178-1042-78	0.1 μ F	IC404	051-3020-90	NJM4565V	R205	117-1031-10	1/10W 10k Ω (1665D)
C617	178-1042-78	0.1 μ F	IC501	051-3020-90	NJM4565V	R206	117-1211-10	1/10W 120 Ω (1665D)
C619	178-6812-78	680pF	IC502	051-1407-00	NJM4556AL	R207	117-1231-10	1/10W 12k Ω (1665D)
C651	178-1042-78	0.1 μ F	IC503	051-1407-00	NJM4556AL	R208	117-6821-10	1/10W 6.8k Ω (1665D)
C652	178-1042-78	0.1 μ F	IC504	051-1407-00	NJM4556AL	R209	117-5631-10	1/10W 56k Ω (1665D)
C653	178-1042-78	0.1 μ F	IC505	051-1407-00	NJM4556AL	R210	117-3331-10	1/10W 33k Ω (1665D)
C654	178-1042-78	0.1 μ F	IC601	052-1164-10	μ PD17718GC-534-3B9	R211	117-1021-10	1/10W 1k Ω (1665D)
C655	178-1042-78	0.1 μ F				R212	117-2221-10	1/10W 2.2k Ω (1665D)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R213	117-3921-10	1/10W 3.9kΩ (1665K)	R519	119-1021-10	1/16W 1kΩ	R625	117-4731-10	1/10W 47kΩ
R214	117-1031-10	1/10W 10kΩ	R520	119-1021-10	1/16W 1kΩ	R626	117-6821-10	1/10W 6.8kΩ
R215	117-2221-10	1/10W 2.2kΩ	R521	119-1021-10	1/16W 1kΩ	R627	117-1031-10	1/10W 10kΩ
R301	111-8211-91	1/4WS 820Ω	R522	119-3331-10	1/16W 33kΩ	R629	117-6821-10	1/10W 6.8kΩ
R302	111-8211-91	1/4WS 820Ω	R523	119-3331-10	1/16W 33kΩ	R631	117-1021-10	1/10W 1kΩ
R303	111-4731-91	1/4WS 47kΩ	R524	119-3331-10	1/16W 33kΩ	R632	119-1021-10	1/16W 1kΩ
R304	111-1021-91	1/4WS 1kΩ	R525	117-1001-10	1/10W 10Ω	R633	119-1021-10	1/16W 1kΩ
R305	111-1021-91	1/4WS 1kΩ	R526	117-2231-10	1/10W 22kΩ	R634	117-1021-10	1/10W 1kΩ
R306	117-3011-10	1/10W 300Ω	R527	117-2231-10	1/10W 22kΩ	R635	117-1021-10	1/10W 1kΩ
R307	117-3011-10	1/10W 300Ω	R528	117-1001-10	1/10W 10Ω	R651	117-1031-10	1/10W 10kΩ
R308	032-0106-65	1/10W 100kΩ ± 0.5%	R529	117-2031-10	1/10W 20kΩ	R652	117-1031-10	1/10W 10kΩ
R309	032-0106-65	1/10W 100kΩ ± 0.5%	R530	117-2231-10	1/10W 22kΩ	R653	111-1221-91	1/4WS 1.2kΩ
R310	032-0106-65	1/10W 100kΩ ± 0.5%	R531	117-1831-10	1/10W 18kΩ	R654	111-1221-91	1/4WS 1.2kΩ
R311	032-0106-65	1/10W 100kΩ ± 0.5%	R532	117-1831-10	1/10W 18kΩ	R655	117-1031-10	1/10W 10kΩ
R312	032-0106-69	1/10W 39kΩ ±0.5%	R533	117-1041-10	1/10W 100kΩ	R656	111-1001-91	1/4WS 10Ω
R313	032-0106-69	1/10W 39kΩ ±0.5%	R534	117-1041-10	1/10W 100kΩ	R657	111-1001-91	1/4WS 10Ω
R314	032-0106-69	1/10W 39kΩ ±0.5%	R535	117-1001-10	1/10W 10Ω	R658	111-1001-91	1/4WS 10Ω
R315	032-0106-69	1/10W 39kΩ ±0.5%	R536	119-1041-10	1/16W 100kΩ	R659	111-1001-91	1/4WS 10Ω
R316	117-4731-10	1/10W 47kΩ	R537	117-2231-10	1/10W 22kΩ	R660	117-2221-10	1/10W 2.2kΩ
R401	117-4741-10	1/10W 470kΩ	R538	117-1001-10	1/10W 10Ω	R702	117-4731-10	1/10W 47kΩ
R402	117-4731-10	1/10W 47kΩ	R539	117-2231-10	1/10W 22kΩ	R703	111-2021-91	1/4WS 2kΩJ
R403	117-1541-10	1/10W 150kΩ	R540	117-1001-10	1/10W 10Ω	R704	111-2021-91	1/4WS 2kΩJ
R404	117-1541-10	1/10W 150kΩ	R541	117-2031-10	1/10W 20kΩ	R705	117-4731-10	1/10W 47kΩ
R405	117-7531-10	1/10W 75kΩ	R542	117-2231-10	1/10W 22kΩ	R706	111-5611-91	1/4WS 560Ω
R406	117-1241-10	1/10W 120kΩ	R543	117-1001-10	1/10W 10Ω	R707	117-4721-10	1/10W 4.7kΩ
R407	117-1541-10	1/10W 150kΩ	R544	117-2231-10	1/10W 22kΩ	R708	111-1831-91	1/4WS 18kΩ
R408	117-7521-10	1/10W 7.5kΩ	R545	117-2231-10	1/10W 22kΩ	R709	111-3311-91	1/4WS 330Ω
R409	117-1021-10	1/10W 1kΩ	R546	117-1831-10	1/10W 18kΩ	R710	117-1031-10	1/10W 10kΩ
R410	117-1031-10	1/10W 10kΩ	R547	117-1831-10	1/10W 18kΩ	R711	111-1011-91	1/4WS 100Ω
R411	117-1031-10	1/10W 10kΩ	R548	117-1041-10	1/10W 100kΩ	R712	117-4721-10	1/10W 4.7kΩ
R412	117-1031-10	1/10W 10kΩ	R549	117-1041-10	1/10W 100kΩ	R713	117-3321-10	1/10W 3.3kΩ
R413	117-1031-10	1/10W 10kΩ	R550	117-1001-10	1/10W 10Ω	R714	117-1031-10	1/10W 10kΩ
R414	117-1031-10	1/10W 10kΩ	R551	117-2231-10	1/10W 22kΩ	R715	117-5611-10	1/10W 560Ω
R415	117-1031-10	1/10W 10kΩ	R552	117-1001-10	1/10W 10Ω	R716	117-1031-10	1/10W 10kΩ
R416	117-1031-10	1/10W 10kΩ	R553	117-2231-10	1/10W 22kΩ	R717	111-1531-91	1/4WS 15kΩ
R417	117-1031-10	1/10W 10kΩ	R555	119-4731-10	1/16W 47kΩ	R718	117-4721-10	1/10W 4.7kΩ
R418	032-0106-52	1/10W 27kΩ ±0.5%	R556	119-4731-10	1/16W 47kΩ	R719	111-1221-91	1/4WS 1.2kΩ
R419	032-0106-52	1/10W 27kΩ ±0.5%	R557	119-1031-10	1/16W 10kΩ	R720	111-6891-91	1/4WS 6.8Ω
R421	032-0106-52	1/10W 27kΩ ±0.5%	R558	119-1041-10	1/16W 100kΩ	R721	111-6891-91	1/4WS 6.8Ω
R422	032-0106-52	1/10W 27kΩ ±0.5%	R601	117-2221-10	1/10W 2.2kΩ	R722	117-4721-10	1/10W 4.7kΩ (1665D)
R501	117-4731-10	1/10W 47kΩ	R602	117-2721-10	1/10W 2.7kΩ	R723	111-1221-91	1/4WS 1.2kΩ (1665D)
R502	117-4731-10	1/10W 47kΩ	R603	117-4721-10	1/10W 4.7kΩ	R724	111-1221-91	1/4WS 1.2kΩ (1665D)
R503	119-4731-10	1/16W 47kΩ	R604	117-2221-10	1/10W 2.2kΩ	R725	111-4791-91	1/4WS 4.7Ω(1665D)
R504	119-4731-10	1/16W 47kΩ	R605	117-4731-10	1/10W 47kΩ	R726	111-4791-91	1/4WS 4.7Ω(1665D)
R505	119-4731-10	1/16W 47kΩ	R606	117-1041-10	1/10W 100kΩ	R727	114-2291-11	1W 2.2Ω
R506	119-1031-10	1/16W 10kΩ	R607	117-1021-10	1/10W 1kΩ	R728	111-8211-91	1/4WS 820Ω (1665K)
R507	119-4731-10	1/16W 47kΩ	R608	117-1021-10	1/10W 1kΩ(1665K)	R729	111-8211-91	1/4WS 820Ω (1665K)
R508	119-1021-10	1/16W 1kΩ	R609	117-4731-10	1/10W 47kΩ	R730	111-1531-91	1/4WS 15kΩ
R509	119-1031-10	1/16W 10kΩ	R610	117-1021-10	1/10W 1kΩ	R731	111-1591-91	1/4WS 1.5Ω
R510	119-5621-10	1/16W 5.6kΩ	R611	117-1021-10	1/10W 1kΩ	SUP101	060-0122-20	DSP-141N-S00B
R511	119-5621-10	1/16W 5.6kΩ	R612	117-4731-10	1/10W 47kΩ	T701	009-0621-07	CHOKE
R512	119-5621-10	1/16W 5.6kΩ	R613	117-4721-10	1/10W 4.7kΩ	VR101	012-5203-56	10kΩ (1665D)
R513	119-5621-10	1/16W 5.6kΩ	R614	117-4721-10	1/10W 4.7kΩ	VR101	012-5203-55	4.7kΩ (1665K)
R514	119-5621-10	1/16W 5.6kΩ	R615	117-2231-10	1/10W 22kΩ	VR102	012-5203-56	10kΩ (1665D)
R515	119-1051-10	1/16W 1MΩ	R616	117-1031-10	1/10W 10kΩ	VR102	012-5203-55	4.7kΩ (1665K)
R516	119-1051-10	1/16W 1MΩ	R617	117-1031-10	1/10W 10kΩ	VR103	012-5203-56	10kΩ
R517	119-3331-10	1/16W 33kΩ	R618	117-1031-10	1/10W 10kΩ	X601	061-3501-90	4.5MHz
R518	119-1021-10	1/16W 1kΩ	R619	117-1021-10	1/10W 1kΩ			
			R620	117-1021-10	1/10W 1kΩ			
			R621	117-1021-10	1/10W 1kΩ			
			R622	117-1021-10	1/10W 1kΩ			
			R623	117-4731-10	1/10W 47kΩ			
			R624	117-1041-10	1/10W 100kΩ			

Switch PWB section(B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C901	178-6812-78	680pF	PL904	017-0433-04	14V40mA	S905	013-6302-50	SKQMAL
C902	042-0423-02	6.3V4.7 μF	PL905	017-0433-04	14V40mA	S906	013-6302-50	SKQMAL
C903	042-0423-02	6.3V4.7 μF	PL906	017-0433-04	14V40mA	S907	013-6302-50	SKQMAL
IC901	051-6005-10	LC75822W	PL907	017-0433-04	14V40mA	S908	013-6302-50	SKQMAL
P901	074-1151-16	16P	PL908	017-0433-04	14V40mA	S909	013-6302-50	SKQMAL
P902	074-1151-06	6P	R901	117-5131-10	1/10W 51kΩ	S910	013-6302-50	SKQMAL
PL901	017-0447-14	8V105mA (1665D)	R902	117-4741-10	1/10W 470kΩ	S911	013-6302-50	SKQMAL
PL901	017-0447-05	8V105mA (1665K)	S901	013-6302-50	SKQMAL	S912	013-6302-50	SKQMAL
PL902	017-0447-14	8V105mA (1665D)	S902	013-6302-50	SKQMAL	S913	013-6302-50	SKQMAL
PL902	017-0447-05	8V105mA (1665K)	S903	013-6302-50	SKQMAL	S914	013-6302-50	SKQMAL
PL903	017-0433-04	14V40mA	S904	013-6302-50	SKQMAL	VR901	016-0010-04	VR W/SHAFT

Sub PWB section(B3)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C801	178-1022-78	1000pF	IC801	051-3019-90	NJM2060V	R815	117-6821-10	1/10W 6.8kΩ
C802	178-1022-78	1000pF	J801	074-1013-30	OUTLET			(1665K)
C803	178-1022-78	1000pF			SOCKET(A12MW)	R820	117-0000-00	1/10W 0Ω JW
C804	178-2232-78	0.022μF	J802	074-1087-10	OUTLET	R821	117-1531-10	1/10W 15kΩ
C805	042-0563-17	16V10μF			SOCKET(A16MW)	R822	117-0000-00	1/10W 0Ω JW
C806	042-0563-17	16V10μF	P801	076-0544-10	10P	R823	117-2231-10	1/10W 22kΩ
C807	042-0563-17	16V10μF	P802	076-0544-12	12P	R824	117-1031-10	1/10W 10kΩ
C808	042-0563-17	16V10μF	Q801	125-9006-00	IMX1	R825	032-0092-09	1/10W 47kΩ ± 1%
C809	178-1042-78	0.1μF	Q802	103-0601-00	2SD601A	R826	117-1031-10	1/10W 10kΩ
C810	178-1042-78	0.1μF (1665K)	Q803	125-2005-01	UN2211	R827	117-1031-10	1/10W 10kΩ
C811	178-1042-78	0.1μF (1665K)	Q804	125-0001-01	UN2111	R828	117-3331-10	1/10W 33kΩ(1665K)
C812	178-1042-78	0.1μF (1665K)	Q805	103-0601-00	2SD601A (1665K)	R829	032-0092-09	1/10W 47kΩ ± 1%
C814	117-0000-00	1/10W 0Ω JW	Q806	103-0601-00	2SD601A (1665K)	R830	117-1031-10	1/10W 10kΩ(1665K)
C815	178-4722-78	4700pF	Q807	103-0601-00	2SD601A (1665K)	R831	032-0092-09	1/10W 47kΩ ± 1%
C816	178-1042-78	0.1μF (1665K)	Q808	103-0601-00	2SD601A (1665K)	R832	032-0092-09	1/10W 47kΩ ± 1%
C818	178-1042-78	0.1μF (1665K)	Q809	125-2005-01	UN2211	R833	117-3331-10	1/10W 33kΩ(1665K)
C819	178-1052-78	1μF	Q810	103-0601-00	2SD601A (1665K)	R834	117-1031-10	1/10W 10kΩ(1665K)
C821	042-0548-01	10V100μF	Q811	125-2005-01	UN2211	R835	032-0092-79	1/10W 5.6kΩ ± 1%
C822	176-1011-00	100pF CH	Q812	125-2005-01	UN2211 (1665K)	R836	032-0092-79	1/10W 5.6kΩ ± 1%
C823	042-0548-02	10V220μF	Q813	101-0709-00	2SB709A-Q.R.S	R837	117-8231-10	1/10W 82kΩ
C824	042-0563-17	16V10μF	R801	117-5621-10	1/10W 5.6kΩ	R838	117-8231-10	1/10W 82kΩ
C825	176-1011-00	100pF CH	R802	117-5621-10	1/10W 5.6kΩ	R839	117-3331-10	1/10W 33kΩ(1665K)
C826	176-1011-00	100pF CH	R803	117-5631-10	1/10W 56kΩ	R840	117-1031-10	1/10W 10kΩ(1665K)
C827	176-1011-00	100pF CH	R804	117-5631-10	1/10W 56kΩ	R841	117-3011-10	1/10W 300Ω
C828	183-1063-31	16V10μF	R805	117-1031-10	1/10W 10kΩ	R842	117-3011-10	1/10W 300Ω
C829	183-1063-31	16V10μF	R806	117-1031-10	1/10W 10kΩ	R843	117-3331-10	1/10W 33kΩ(1665K)
C830	183-1066-31	16V10μF NP	R807	117-5631-10	1/10W 56kΩ	R844	117-1031-10	1/10W 10kΩ(1665K)
C831	183-1066-31	16V10μF NP	R808	117-1031-10	1/10W 10kΩ	R845	117-4731-10	1/10W 47kΩ
C832	176-1011-00	100pF CH (1665K)	R809	117-1021-10	1/10W 1kΩ	R846	117-3331-10	1/10W 33kΩ(1665K)
CCT801	050-0122-59	6.8kΩ × 4 J (1665K)	R810	117-4731-10	1/10W 47kΩ	R847	117-1031-10	1/10W 10kΩ(1665K)
D801	001-0589-00	1SS145	R811	117-2231-10	1/10W 22kΩ	R848	117-4721-10	1/10W 4.7kΩ
D802	001-0589-00	1SS145	R812	117-4731-10	1/10W 47kΩ	R849	117-2231-10	1/10W 22kΩ(1665K)
D803	001-0421-38	MTZJ36	R813	117-3011-10	1/10W 300Ω	R850	117-1021-10	1/10W 1kΩ
D804	001-0377-44	MA4082M	R814	117-3011-10	1/10W 300Ω			

Tape mechanism section

Side PWB section(B4)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	178-5612-78	560pF	C18	183-4753-51	35V4.7μF	R10	117-1131-10	1/10W 11kΩ
C2	178-5612-78	560pF	C20	176-2201-50	22pFCH	R11	117-1531-10	1/10W 15kΩ
C3	178-5612-78	560pF	C21	176-2201-50	22pFCH	R12	117-1531-10	1/10W 15kΩ
C4	178-5612-78	560pF	C22	176-2201-50	22pFCH	R13	032-0098-03	1/10W 18kΩ ± 2%
C5	172-1231-11	0.012μF	C23	176-2201-50	22pFCH	R14	117-3331-10	1/10W 33kΩ
C6	172-1231-11	0.012μF	IC1	051-1777-00	HA12163	R15	117-1831-10	1/10W 18kΩ
C7	172-4731-11	0.047μF	L1	010-2198-26	0.047μH	R16	117-1841-10	1/10W 180kΩ
C8	172-4731-11	0.047μF	L2	010-2198-26	0.047μH	R17	117-4731-10	1/10W 47kΩ
C9	183-1053-61	50V1μF	R1	117-2731-10	1/10W 27kΩ	R18	117-1241-10	1/10W 120kΩ
C10	178-5612-78	560pF	R2	117-2731-10	1/10W 27kΩ	R19	117-2231-10	1/10W 22kΩ
C11	178-5612-78	560pF	R3	117-2731-10	1/10W 27kΩ	R20	117-2231-10	1/10W 22kΩ
C12	178-1042-78	0.1μF	R4	117-2731-10	1/10W 27kΩ	R21	117-2231-10	1/10W 22kΩ
C13	178-1042-78	0.1μF	R5	117-1811-10	1/10W 180Ω	R22	117-1031-10	1/10W 10kΩ
C14	178-4722-78	4700pF	R6	117-1811-10	1/10W 180Ω	R23	117-2231-10	1/10W 22kΩ
C15	183-2263-31	16V22μF	R7	117-3341-10	1/10W 330kΩ	VR1	012-4431-06	10kΩ
C16	178-1032-78	0.01μF	R8	117-3341-10	1/10W 330kΩ	VR2	012-4431-06	10kΩ
C17	183-1043-61	50V0.1μF	R9	117-1131-10	1/10W 11kΩ			

Rear PWB section(B5)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
P5	076-0368-10	10P	R24	111-5611-91	1/4WSS 560Ω
P6	074-1104-20	20P	SW3	013-3906-00	SPPB51

Bottom PWB section(B6)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5801K	SW1	013-3953-01	SPPB32	SW2	013-3951-32	MODE SWITCH