


EXPLODED VIEW/PARTS LIST

Main section

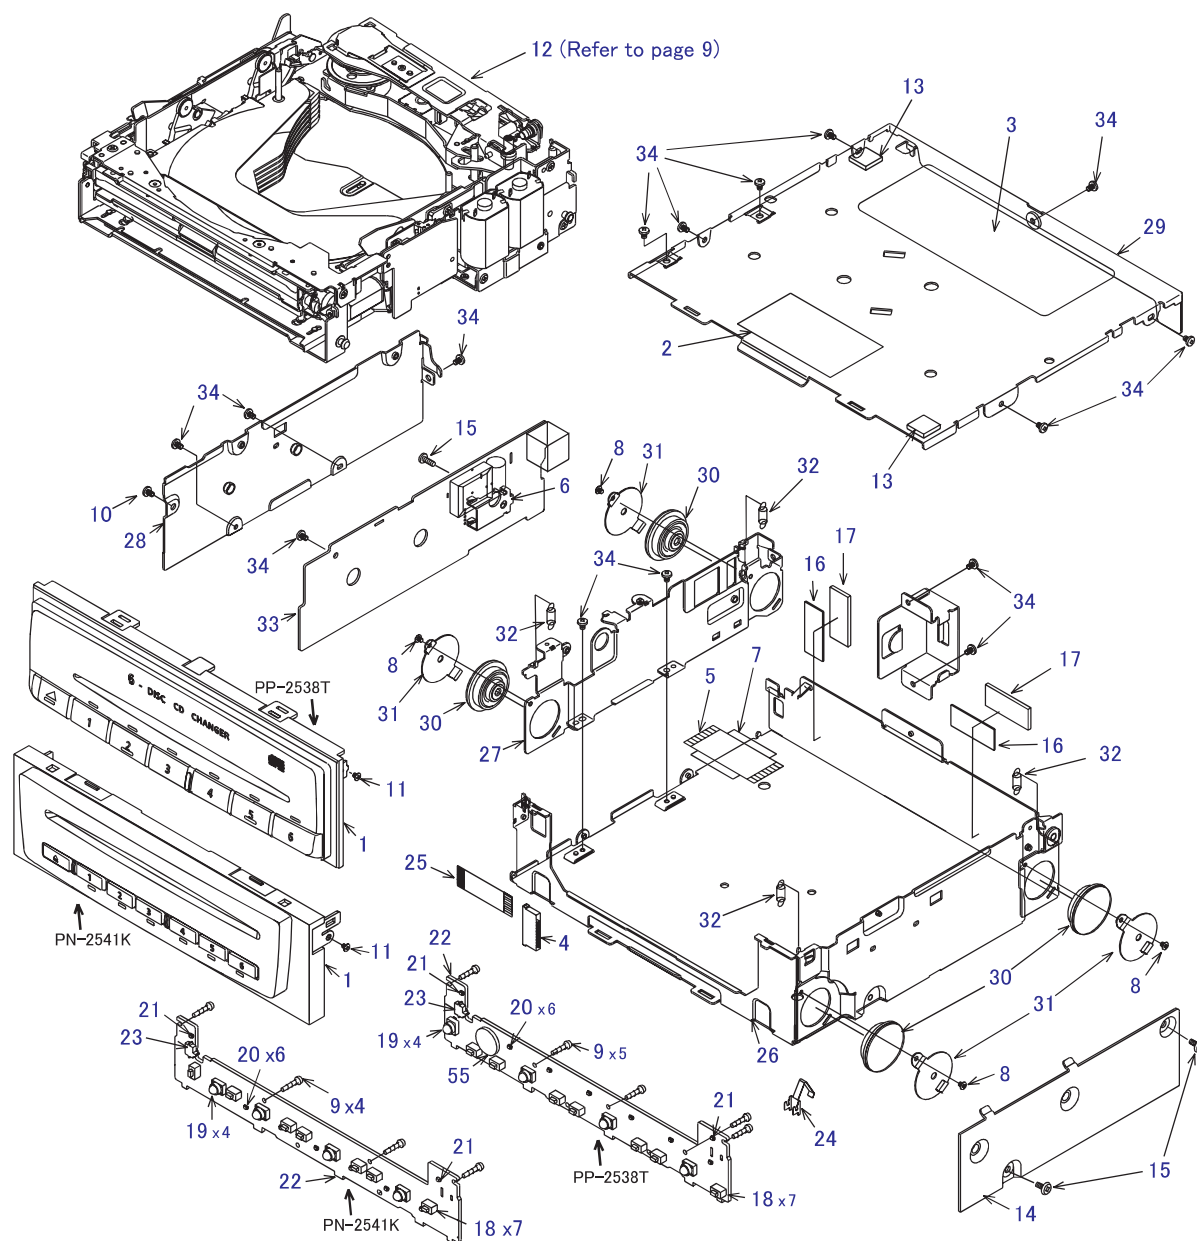

Note) Some parts depend on each model.
The model name is specified in the description.
(38T):PP-2538T, (41K):PN-2541K

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8014-01 940-8015-01	ESCUTCHEON ASSY(38T) ESCUTCHEON ASSY(41K)	1	11	716-3461-00	SCREW M2 x3	1
2	285-1328-00	GUIDE LABEL(38T)	1	12	-----	CD CHANGER MODULE 018200-929	1
3	286-9086-24 286-9086-25	SETPLATE(38T) SETPLATE(41K)	1	13	345-8239-00	CUSHION RUBBER	2
4	074-1239-76	26P OUTLET SOCKET	1	14	331-3497-00	SIDE PLATE	1
5	039-1957-01	FPC	1	15	716-2606-81	MACHINE SCREW M2.6 x6	3
6	331-3267-00	TR-HOLDER	1	16	331-3592-00	PROTECT PLATE	2
7	347-6619-00	INSULATOR	1	17	345-5237-00	CUSHION RUBBER	2
8	716-3450-00	SCREW M1.7 x2	4	18	013-6302-50	SWITCH	7
9	716-0872-01 716-0872-00	PAD SCREW M1.7 x6 (38T) PAD SCREW M1.7 x6 (41K)	5 4	19	017-0433-69	PILOT LAMP 14V40mA	3
10	716-3462-00	SCREW M2 x5	1	20	001-7045-90	DIODE CL-165D/FG	6
				21	001-7043-90	DIODE CL-170FG	2

PP-2538T
PN-2541K

NO.	PART NO.	DESCRIPTION	Q'TY
22	039-2230-00 039-2231-00	ESCUTCHEON PWB(38T) ESCUTCHEON PWB(41K) (WITHOUT COMPONENT)	1
23	013-7415-50	DETECTOR SWITCH	1
24	331-1861-10	EARTH PLATE	1
25	816-2610-00	FLAT WIRE	1
26	311-1836-02	LOWER CASE	1
27	331-3266-02	PWB HOLDER	1
28	305-0315-05	SIDE CASE	1

NO.	PART NO.	DESCRIPTION	Q'TY
29	310-1741-04	UPPER CASE	1
30	629-0083-00	DAMPER	4
31	620-1086-00	DAMPER-H-PLT	4
32	750-3491-00	FL-SPRING	4
33	039-2232-00	MAIN PWB (WITHOUT COMPONENT)	1
34	716-1716-00	SCREW M2 x3	15

ELECTRICAL PARTS LIST

Main PWB section(B1)

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1 uF	D603	001-0516-90	MA111	R214	033-1031-15	1/16W 10k ohm
C102	046-1032-78	0.01 uF	D604	001-0516-90	MA111	R215	033-1031-15	1/16W 10k ohm
C104	163-1073-15	6.3V100 uF	D607	001-4302-38	UDZTE-17 33B	R216	033-1031-15	1/16W 10k ohm
C108	184-4773-38	16V470 uF	D608	001-4302-38	UDZTE-17 33B	R218	033-2201-15	1/16W 22 ohm
C109	168-1045-56	0.1 uF	D609	001-0516-90	MA111	R219	033-2201-15	1/16W 22 ohm
C110	178-4742-78	0.47 uF	D701	001-0529-21	MA8039-H(41K)	R220	033-2201-15	1/16W 22 ohm
C111	042-0560-85	6.3V100uF	D703	001-0516-90	MA111(41K)	R221	033-2201-15	1/16W 22 ohm
C112	163-2273-25	10V 220 uF	D801	001-2015-00	RL253	R223	033-3921-15	1/16W 3.9k ohm
C113	168-1045-56	0.1 uF	IC100	051-3306-90	TDA3663AT	R224	033-3921-15	1/16W 3.9k ohm
C114	163-1073-15	6.3V100 uF	IC101	051-3289-00	BA09ST	R225	033-8221-15	1/16W 8.2k ohm
C115	168-1045-56	0.1 uF	IC102	051-3288-90	AN80M50RSPTX	R226	033-8221-15	1/16W 8.2k ohm
C116	178-4742-78	0.47 uF	IC103	051-3288-90	AN80M50RSPTX	R504	033-2221-15	1/16W 2.2k ohm
C117	178-4742-78	0.47 uF	IC201	051-1407-90	NJM4556AM	R505	033-1031-15	1/16W 10k ohm
C118	178-3342-78	0.33 uF	IC202	051-1407-90	NJM4556AM	R509	033-4731-15	1/16W 47k ohm
C119	178-1052-78	1 uF	IC501	051-9400-28	BR93LC46F-WE2	R512	050-0145-54	1/16W 47k ohm x4
C120	178-1052-78	1 uF	IC502	052-5047-31	M30621MCM-5P5GF	R513	033-1041-15	1/16W 100k ohm
C201	163-2263-15	6.3V22 uF	IC503	051-5418-08	S-80827ANMP-EDQ	R514	050-0145-53	1/16W 220k ohm x4
C202	163-2263-15	6.3V22 uF	IC504	051-5418-08	S-80827ANMP-EDQ			J
C203	045-1211-50	120pF	J101	074-1189-95	45P	R515	033-1041-15	1/16W 100k ohm
C204	045-1211-50	120pF	J102	074-1059-76	26P	R518	033-1041-15	1/16W 100k ohm
C205	045-2201-50	22pF	J103	074-1087-12	A16 16P	R520	033-2741-15	1/16W 270k ohm
C206	045-2201-50	22pF	Q100	191-1205-60	2SB1205RST	R521	033-4731-15	1/16W 47k ohm
C207	168-1045-56	0.1 uF	Q101	125-2004-92	RN1402	R522	050-0145-54	1/16W 47k ohm x4
C209	163-1073-15	6.3V100 uF	Q102	190-1162-00	2SA1162	R523	033-4741-15	1/16W 470k ohm
C210	168-1045-56	0.1 uF	Q204	125-2004-92	RN1402	R524	033-4731-15	1/16W 47k ohm
C211	046-3322-58	3300pF	Q505	125-2004-92	RN1402	R525	033-4731-15	1/16W 47k ohm
C212	046-3322-58	3300pF	Q506	125-0014-92	DTA114EK	R527	050-0145-50	1/16W 270 ohm x4
C213	046-6812-58	680pF	Q603	192-2712-00	2SC2712	R528	050-0145-50	1/16W 270 ohm x4
C214	046-6812-58	680pF	Q604	192-2712-00	2SC2712	R529	050-0145-50	1/16W 270 ohm x4
C215	046-1022-58	1000pF	Q605	125-0014-92	DTA114EK	R539	033-4721-15	1/16W 4.7k ohm
C216	046-1022-58	1000pF	Q606	192-2712-00	2SC2712	R540	050-0145-58	1/16W 2.2k ohm x4
C217	163-2273-25	10V 220 uF	Q607	125-2004-92	RN1402	R601	033-5621-15	1/16W 5.6k ohm
C218	163-2273-25	10V 220 uF	Q706	125-2004-92	RN1402(41K)	R606	033-5631-15	1/16W 56k ohm
C219	163-2273-25	10V 220 uF	Q707	193-2118-00	2SD2118(41K)	R609	032-0145-54	1/2W 10 ohm
C220	163-2273-25	10V 220 uF	Q708	125-2004-92	RN1402(41K)	R610	033-2231-15	1/16W 22k ohm
C501	163-1063-35	16V10 uF	Q709	125-2004-92	RN1402(41K)	R611	033-1031-15	1/16W 10k ohm
C502	168-1045-56	0.1 uF	Q711	192-2712-00	2SC2712	R612	033-4731-15	1/16W 47k ohm
C503	168-4735-56	0.047 uF	Q712	131-1188-00	2SB1188	R613	033-1031-15	1/16W 10k ohm
C504	168-1045-56	0.1 uF	Q713	125-2004-92	RN1402	R614	033-1031-15	1/16W 10k ohm
C505	046-2232-78	0.022 uF	Q800	193-0601-00	2SD601A	R615	033-1031-15	1/16W 10k ohm
C602	172-1041-11	0.1 uF	Q801	190-1162-00	2SA1162	R616	033-1031-15	1/16W 10k ohm
C603	046-1022-58	1000pF	Q802	125-4001-90	XN1504	R617	033-4731-15	1/16W 47k ohm
C604	046-1022-58	1000pF	Q803	125-4001-90	XN1504	R620	033-5631-15	1/16W 56k ohm
C605	046-1022-58	1000pF	R100	032-0145-54	1/2W 10 ohm	R621	033-5631-15	1/16W 56k ohm
C621	163-3353-65	50V3.3 uF	R101	033-4711-15	1/16W 470 ohm	R740	032-0145-64	1/2W 470 ohm(41K)
C710	168-1045-56	0.1 uF(41K)	R102	033-2231-15	1/16W 22k ohm	R743	033-4721-15	1/16W 4.7k ohm
C711	163-1063-35	16V10 uF	R103	116-1511-15	1/8W 150 ohm			(41K)
C712	163-4753-55	35V4.7 uF(41K)	R104	116-1511-15	1/8W 150 ohm	R744	033-1041-15	1/16W 100k ohm
C713	163-4753-55	35V4.7 uF(41K)	R105	032-0145-54	1/2W 10 ohm	R745	033-4721-15	1/16W 4.7k ohm
C800	163-1053-65	50V1 uF	R106	032-0145-54	1/2W 10 ohm			(41K)
C801	045-1011-50	100pF	R207	033-6821-15	1/16W 6.8k ohm	R746	033-4731-15	1/16W 47k ohm
C802	046-2222-58	2200pF	R208	033-2731-15	1/16W 27k ohm	R747	033-2231-15	1/16W 22k ohm
C803	046-2222-58	2200pF	R209	033-1031-15	1/16W 10k ohm			(41K)
C804	046-2222-58	2200pF	R210	033-1031-15	1/16W 10k ohm	R748	033-4721-15	1/16W 4.7k ohm
C805	046-2222-58	2200pF	R211	033-6821-15	1/16W 6.8k ohm			(41K)
D100	001-0627-90	U1BC44	R212	033-8221-15	1/16W 8.2k ohm	R749	033-1031-15	1/16W 10k ohm
D101	001-0529-34	MA8062-L	R213	033-2731-15	1/16W 27k ohm	R751	033-1021-15	1/16W 1k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R800	033-4731-15	1/16W 47k ohm	R809	033-1031-15	1/16W 10k ohm	R920	033-1041-15	1/16W 100k ohm (41K)
R801	033-5611-15	1/16W 560 ohm	R810	033-1031-15	1/16W 10k ohm	R921	033-0000-05	1/16W 0 ohm(38T)
R802	033-1031-15	1/16W 10k ohm	R811	033-1031-15	1/16W 10k ohm	R922	033-0000-05	1/16W 0 ohm(38T)
R803	033-1041-15	1/16W 100k ohm	R820	116-3031-15	1/8W 30k ohm	R923	033-1041-15	1/16W 100k ohm (41K)
R804	033-1031-15	1/16W 10k ohm	R821	116-3031-15	1/8W 30k ohm	T101	009-0679-00	CHOCK
R805	033-1031-15	1/16W 10k ohm	R900	033-0000-05	1/16W 0 ohm(38T)	X501	060-1505-50	10MHz
R806	033-1021-15	1/16W 1k ohm	R901	033-0000-05	1/16W 0 ohm(38T)			
R807	033-1021-15	1/16W 1k ohm	R910	033-1041-15	1/16W 100k ohm			
R808	033-1031-15	1/16W 10k ohm						

Escutcheon PWB section(B2)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C402	168-1045-56	0.1 uF	Q403	192-2712-00	2SC2712	R422	033-1031-15	1/16W 10k ohm
CCT2	050-0145-52	1/16W 1k ohm x4	Q404	192-2712-00	2SC2712	R423	033-1031-15	1/16W 10k ohm
D401	001-7045-90	CL-165D/FG-D	Q406	192-2712-00	2SC2712	R424	033-1031-15	1/16W 10k ohm
D402	001-7043-90	CL-170FG-CD	R401	119-2211-15	1/16W 220 ohm	R425	033-1031-15	1/16W 10k ohm
D403	001-7043-90	CL-170FG-CD	R402	119-2211-15	1/16W 220 ohm	R426	033-1031-15	1/16W 10k ohm
D404	001-7045-90	CL-165D/FG-D	R404	119-2211-15	1/16W 220 ohm	R428	119-2211-15	1/16W 220 ohm
D405	001-7045-90	CL-165D/FG-D	R406	119-2211-15	1/16W 220 ohm	R429	119-1021-15	1/16W 1k ohm
D406	001-7045-90	CL-165D/FG-D	R407	119-2211-15	1/16W 220 ohm	R430	119-1021-15	1/16W 1k ohm
D407	001-7045-90	CL-165D/FG-D	R408	119-2211-15	1/16W 220 ohm	S401	013-6302-50	SKQMAL
D408	001-7045-90	CL-165D/FG-D	R409	119-2211-15	1/16W 220 ohm	S402	013-6302-50	SKQMAL
D411	001-0655-90	1SS294	R410	119-2211-15	1/16W 220 ohm	S403	013-6302-50	SKQMAL
D412	001-0655-90	1SS294	R411	119-2211-15	1/16W 220 ohm	S404	013-6302-50	SKQMAL
IC401	051-6617-08	NJU3715G-TE2	R412	119-2211-15	1/16W 220 ohm	S405	013-6302-50	SKQMAL
J401	074-1239-76	26P	R413	119-2211-15	1/16W 220 ohm	S406	013-6302-50	SKQMAL
PL401	017-0433-69	14V40mA	R414	119-2211-15	1/16W 220 ohm	S407	013-6302-50	SKQMAL
PL402	017-0433-69	14V40mA	R415	119-2211-15	1/16W 220 ohm	S408	013-7415-50	SPVG110400
PL403	017-0433-69	14V40mA	R416	119-2211-15	1/16W 220 ohm	X401	060-0297-00	PKM13EPP-4002 (38T)
PL404	017-0433-69	14V40mA	R419	033-1031-15	1/16W 10k ohm	X401	060-8045-00	PKLCS1212E4001-R (41K)
Q401	192-2712-00	2SC2712	R420	033-1031-15	1/16W 10k ohm			
Q402	192-2712-00	2SC2712	R421	033-1031-15	1/16W 10k ohm			

CD PWB section(B3) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF	C40	045-1211-50	120pF	R16	033-5631-15	1/16W 56k ohm
C3	168-1042-78	16V 0.1 uF	C41	045-5601-50	56pF	R17	033-1031-15	1/16W 10k ohm
C4	042-0636-54	4V220 uF	C42	168-1042-78	16V 0.1 uF	R18	033-1031-15	1/16W 10k ohm
C5	168-1042-78	16V 0.1 uF	C43	042-0636-52	4V47 uF	R19	033-5621-15	1/16W 5.6k ohm
C6	046-1032-78	0.01 uF	C50	168-1042-78	16V 0.1 uF	R20	033-6831-15	1/16W 68k ohm
C7	168-1042-78	16V 0.1 uF	C51	168-1042-78	16V 0.1 uF	R21	033-5621-15	1/16W 5.6k ohm
C8	178-4742-78	0.47 uF	C60	168-5612-55	560pF	R22	033-1031-15	1/16W 10k ohm
C9	178-2242-78	0.22 uF	D1	001-0367-91	1SS226	R23	033-1031-15	1/16W 10k ohm
C10	168-1042-78	16V 0.1 uF	IC1	051-6365-00	MN662785TBUC	R24	033-4731-15	1/16W 47k ohm
C11	168-1042-78	16V 0.1 uF	IC2	051-9318-00	MSM51V17400D-60TS-K	R25	033-3931-15	1/16W 39k ohm
C12	168-1042-78	16V 0.1 uF	IC2	051-9318-51	K4E160412C-FC60	R26	033-6831-15	1/16W 68k ohm
C13	046-2232-78	0.022 uF	IC3	051-6060-08	BD7961FM-E2	R27	033-6831-15	1/16W 68k ohm
C14	168-5612-55	560pF	IC4	051-5711-90	AN8882SB-E1	R28	033-1031-15	1/16W 10k ohm
C15	168-1042-78	16V 0.1 uF	J1	074-1189-95	45P	R29	033-2201-15	1/16W 22 ohm
C16	046-2212-58	220pF	J4	074-1138-56	6P	R31	033-8211-15	1/16W 820 ohm
C17	046-2212-58	220pF	J5	074-1201-65	15P	R32	033-5631-15	1/16W 56k ohm
C18	168-1222-55	1200pF	J6	074-1059-76	26P	R33	033-6831-15	1/16W 68k ohm
C19	046-3322-58	3300pF	L2	010-3050-93	10 uH	R34	033-3331-15	1/16W 33k ohm
C20	168-3932-78	0.039 uF	L2	010-2155-93	10 uH	R35	033-6831-15	1/16W 68k ohm
C21	168-3932-78	0.039 uF	Q2	131-1188-00	2SB1188	R38	033-3931-15	1/16W 39k ohm
C22	042-0416-52	10V10 uF TAN	Q3	131-1188-00	2SB1188	R39	033-1831-15	1/16W 18k ohm
C25	178-1052-78	1 uF	R2	033-1041-15	1/16W 100k ohm	R40	117-1001-15	1/10W 10 ohm
C26	042-0472-91	16V47 uF	R4	033-3311-15	1/16W 330 ohm	R41	033-6821-15	1/16W 6.8k ohm
C27	178-3342-78	0.33 uF	R5	033-1041-15	1/16W 100k ohm	R42	033-6821-15	1/16W 6.8k ohm
C29	168-2732-55	16V 0.027 uF	R6	033-3931-15	1/16W 39k ohm	R43	033-1241-15	1/16W 120k ohm
C30	042-0416-58	4V100 uF	R7	033-1041-15	1/16W 100k ohm	R44	033-6831-15	1/16W 68k ohm
C31	042-0636-52	4V47 uF	R8	033-5611-15	1/16W 560 ohm	R45	116-4711-15	1/8W 470 ohm
C32	046-1022-58	1000pF	R9	033-5611-15	1/16W 560 ohm	R46	117-1811-15	1/10W 180 ohm
C33	046-3322-58	3300pF	R10	033-1011-15	1/16W 100 ohm	R47	116-4711-15	1/8W 470 ohm
C34	168-2732-55	16V 0.027 uF	R11	033-3911-15	1/16W 390 ohm	R48	033-1031-15	1/16W 10k ohm
C35	178-2742-78	0.27 uF	R12	033-2221-15	1/16W 2.2k ohm	R49	033-1011-15	1/16W 100 ohm
C36	178-1052-78	1 uF	R13	033-6831-15	1/16W 68k ohm	R60	033-1031-15	1/16W 10k ohm
C37	168-1042-78	16V 0.1 uF	R14	033-5621-15	1/16W 5.6k ohm	TM1	073-0768-90	TERMINAL
C38	042-0472-91	16V47 uF	R15	033-1021-15	1/16W 1k ohm	X1	060-1527-90	33.8688MHz
C39	042-0636-50	6.3V100 uF						

Sensor PWB section(B4) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F	PT5	060-0252-01	PT4850F	S1	013-7414-50	SPVG22
PT4	060-0252-01	PT4850F	PT6	060-0252-01	PT4850F			

PIM-FPC section(B5) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB section(B6) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1 uF	J1	074-1239-76	26P	R3	032-0104-59	1/4W 2.2 ohm
C2	163-1073-35	16V100 uF	J2	074-1100-59	9P	S1	013-7412-50	SPVG21
D1	001-0529-29	MA8051-M	R1	033-1021-15	1/16W 1k ohm			
IC1	051-6044-18	BA6920FP-Y	R2	032-0104-59	1/4W 2.2 ohm			

PIV-FPC section(B7) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB section(B8) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800	LED4	001-7042-00	GL4800

LED-R-PWB section(B9) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800	LED6	001-7042-00	GL4800

L-Motor-FPC section(B10) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC section(B11) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
M2	SMA-185-100	SPINDLE	M3	SMA-184-100	SLED	S2	013-7414-50	SPVG22


EXPLODED VIEW/PARTS LIST

CD changer mechanism section : Main chassis


NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT (WITHOUT MOTOR)	1	17	966-0611-05	DR-BASE-P-ASSY	1
2	SMA-186-100	LOADING MOTOR ASSY	1	18	966-0615-01	LOCK-L-RF-ASSY	1
3	HBS-512-100	MOTOR PLATE SUB ASSY	1	19	966-0616-20	LOCK-L-LF-ASSY	1
4	HBS-513-103	DRIVE UNIT	1	20	966-0618-21	EJECT-B-ASSY	1
5	039-2233-00	CD PWB (WITHOUT COMPONENT)	1	21	966-0624-23	DISC-HOL-ASSY	1
6	039-2242-00	DRIVER PWB (WITHOUT COMPONENT)	1	22	001-7042-00	DIODE (GL4800)	4
7	966-0597-23	CHASSIS ASSY	1	23	013-7414-50	DETECTOR SWITCH	1
8	966-0600-21	LOCK-P-RE-ASSY	1	24	039-1954-00	LED-L-PWB (WITHOUT COMPONENT)	1
9	966-0601-21	M-GEAR-P-ASSY	1	25	039-1955-00	LED-R-PWB (WITHOUT COMPONENT)	1
10	966-0602-23	DR-LINK-ASSY	1	26	039-1956-00	SENSOR PWB (WITHOUT COMPONENT)	1
11	966-0603-20	MODE-P-ASSY	1	27	039-2009-00	PIM FPC	1
12	966-0604-22	LOCK-PF-ASSY	1	28	039-2010-00	RIV-FOC	1
13	966-0605-20	SHIFT-P-ASSY	1	29	039-2011-00	LED-FPC	1
14	966-0606-23	HLC-PLATE-ASSY	1	30	039-2012-00	SENSOR-FPC	1
15	966-0607-24	COV-OLATE-ASSY	1	31	039-2013-00	MOS-FPC	1
16	966-0610-06	TOP-PLATE-ASSY	1	32	039-2014-00	L-MOTOR-FPC (WITHOUT COMPONENT)	1

NO.	PART NO.	DESCRIPTION	Q'TY
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1
37	620-1041-23	GEAR PLATE	1
38	620-1042-20	M-GEAR-H	1
39	620-1056-01	HLR-PLATE-L	1
40	620-1580-00	HLR-PLATE-R	1

NO.	PART NO.	DESCRIPTION	Q'TY
41	620-1576-20	LO-MOTOR-PLT	1
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-01	SLIDE PLATE-L	1
44	620-1068-22	SLIDE PLATE-R	1
45	620-1071-21	EJECT ARM	1
46	620-1072-20	EJECT PLATE	1
47	620-1577-00	FRONT PLATE	1
48	620-1083-20	FPC-PLATE	1
49	620-1090-20	GAP PLATE	1
50	620-1568-20	RATTLE PLATE-F	2

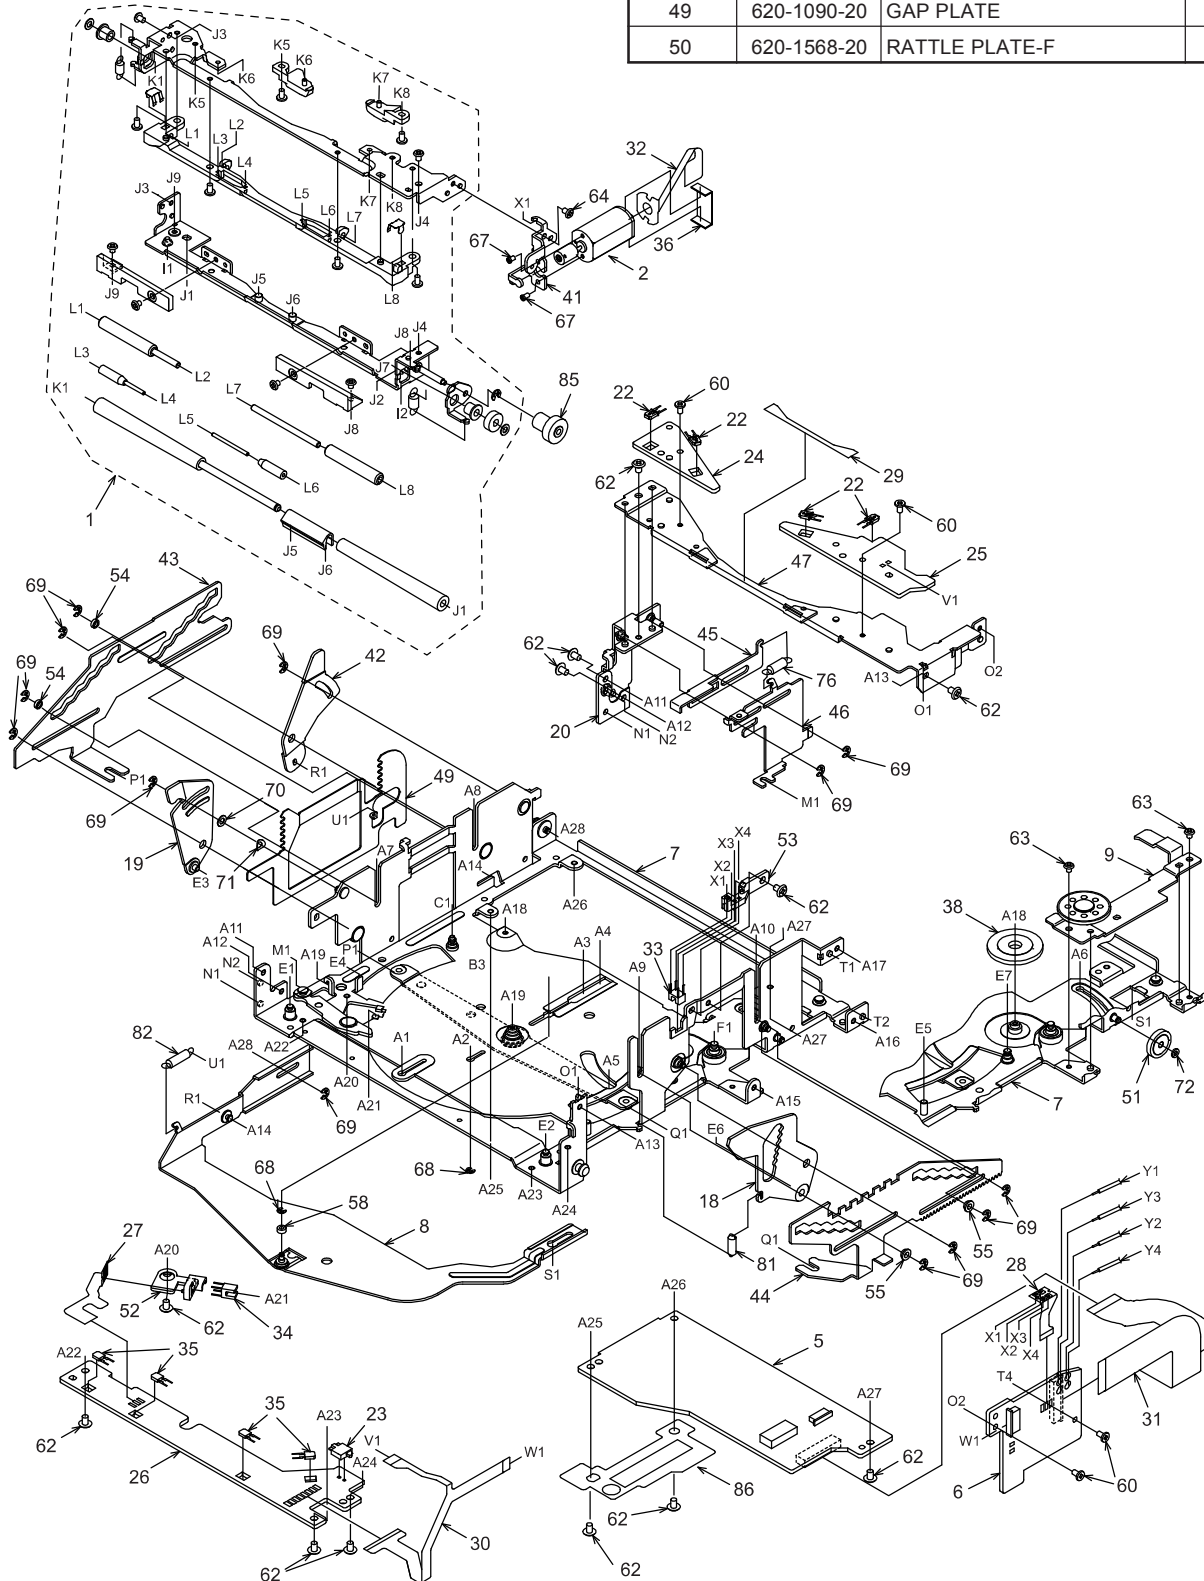


PP-2538T
PN-2541K

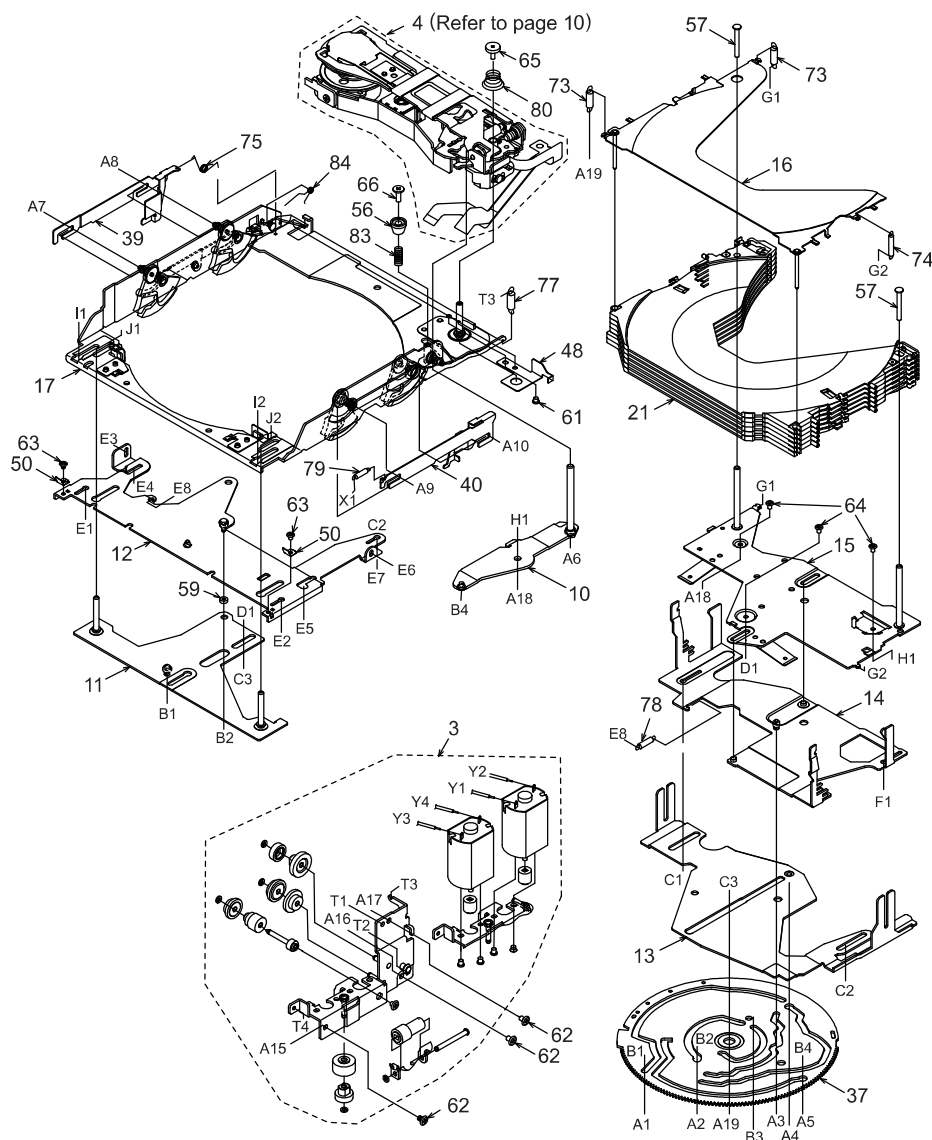

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
51	621-0640-20	V-GEAR-G	1	69	743-1500-20	E-RING	13
52	621-0641-21	PI-HOLDER-M	1	70	746-0624-00	WASHER	1
53	621-0656-21	PI-HOLDER-V	1	71	746-0712-03	WASHER	1
54	622-1622-00	SL-G-ROLLER	2	72	746-0761-00	WASHER	1
55	622-1623-00	SL-G-ROLLER-R	2	73	750-3478-01	TOP-P-SP-L	2
56	622-1648-02	DU-STP-SLEEVE	1	74	750-3479-01	TOP-P-SP-R	1
57	622-1650-02	COV-PLATE PIN-B	2	75	750-3480-01	DR-LOCK-SP	1
58	622-1651-00	LOCK-RE-ROLLER	1	76	750-3483-00	EJECT-A-SPRING	1
59	622-1652-00	LOCK-PF-ROLLER	1	77	750-3484-01	DR-BASE-SPRING	1
60	716-1866-00	SCREW(M1.7 x3)	4	78	750-3485-01	TENSION-SP-L	1
61	716-1873-00	SCREW(M2 x1.6)	1	79	750-3486-01	LO-TENSION-SP	1
62	716-3449-00	SCREW(M2 x3)	15	80	750-3489-00	DRIVE-P-SPRING	1
63	716-3450-00	SCREW(M1.7 x2)	4	81	750-3496-00	GAP-P-SPRING R	1
64	716-3451-00	SCREW(M1.7 x2.5)	4	82	750-3497-00	GAP-P-SPRING L	1
65	716-3459-00	SCREW(M1.7 x5)	1	83	750-6711-01	DU-STP-SPRING	1
66	716-3466-02	SCREW	1	84	750-6712-01	DR-LOCK-SP-B	1
67	738-1422-11	PRECISION SCREW	2	85	621-0651-22	LOAD GEAR-A	1
68	743-1200-20	E-RING	2	86	347-6974-00	FPC COVER	1

CD changer mechanism section : Drive unit

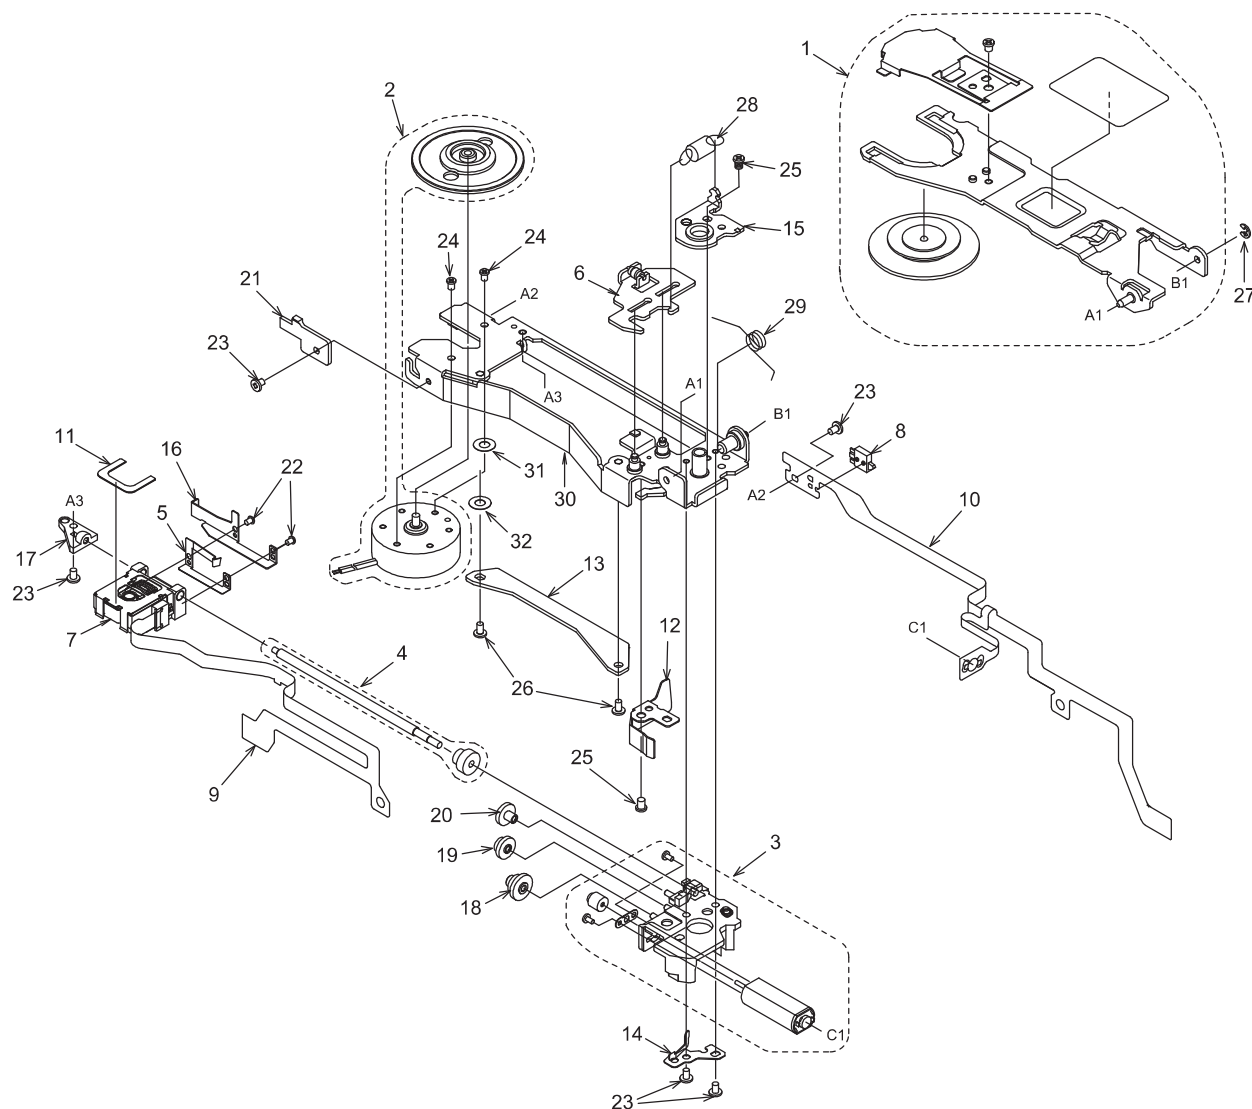

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-514-100	CLAMPER SUB ASSY	1	17	621-0670-20	LS-HOLDER-L	1
2	SMA-185-100	SPINDLE MOTOR ASSY	1	18	621-0673-20	D-GEAR A	1
3	SMA-184-100	SLED MOTOR ASSY	1	19	621-0674-20	D-GEAR B	1
4	HBS-515-101	LS-ASSY	1	20	621-0675-20	D-GEAR C	1
5	620-1587-00	SH-SP-PLT	1	21	621-0683-21	DU-STOPPER	1
6	966-0622-22	D-SHIFT-P-ASSY	1	22	716-3460-00	SCREW(M1.4 x 1.8)	2
7	969-0009-00	PICK UP-ASSY	1	23	716-3470-00	SCREW(M1.7 x 3)	5
8	013-7414-50	DETECT SWITCH	1	24	738-1722-17	PRECISION SCREW	2
9	039-2015-01	P/U-FPC	1	25	738-2025-17	PRECISION SCREW	2
10	039-2016-01	M/S-FPC	1	26	716-3474-00	SCREW(M1.7 x 3)	2
11	347-6632-00	PU-SHEET	1	27	743-1500-20	E-RING	1
12	620-1078-20	PUSH PLATE	1	28	750-3487-00	SHIFT-P-SPRING	1
13	620-1080-21	PU-GUIDE PLATE	1	29	750-3504-00	CLAMP-A-SPRING	1
14	620-1081-20	SCREW PUSH-PLT	1	30	966-0619-24	DRIVE PLT-ASSY	1
15	620-1082-22	SPRING PLATE	1	31	745-0807-00	WASHER	1
16	620-1588-20	SCREW-HOL-PLT	1	32	745-0808-00	WASHER	1

A L-CH +