


9. EXPLODED VIEWS AND PARTS LIST

NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
 • The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 • Screw adjacent to ▽ mark on the product are used for disassembly.
 • For the applying amount of lubricants or glue, follow the instructions in this manual.
 (In the case of no amount instructions, apply as you think it appropriate.)

9.1 PACKING

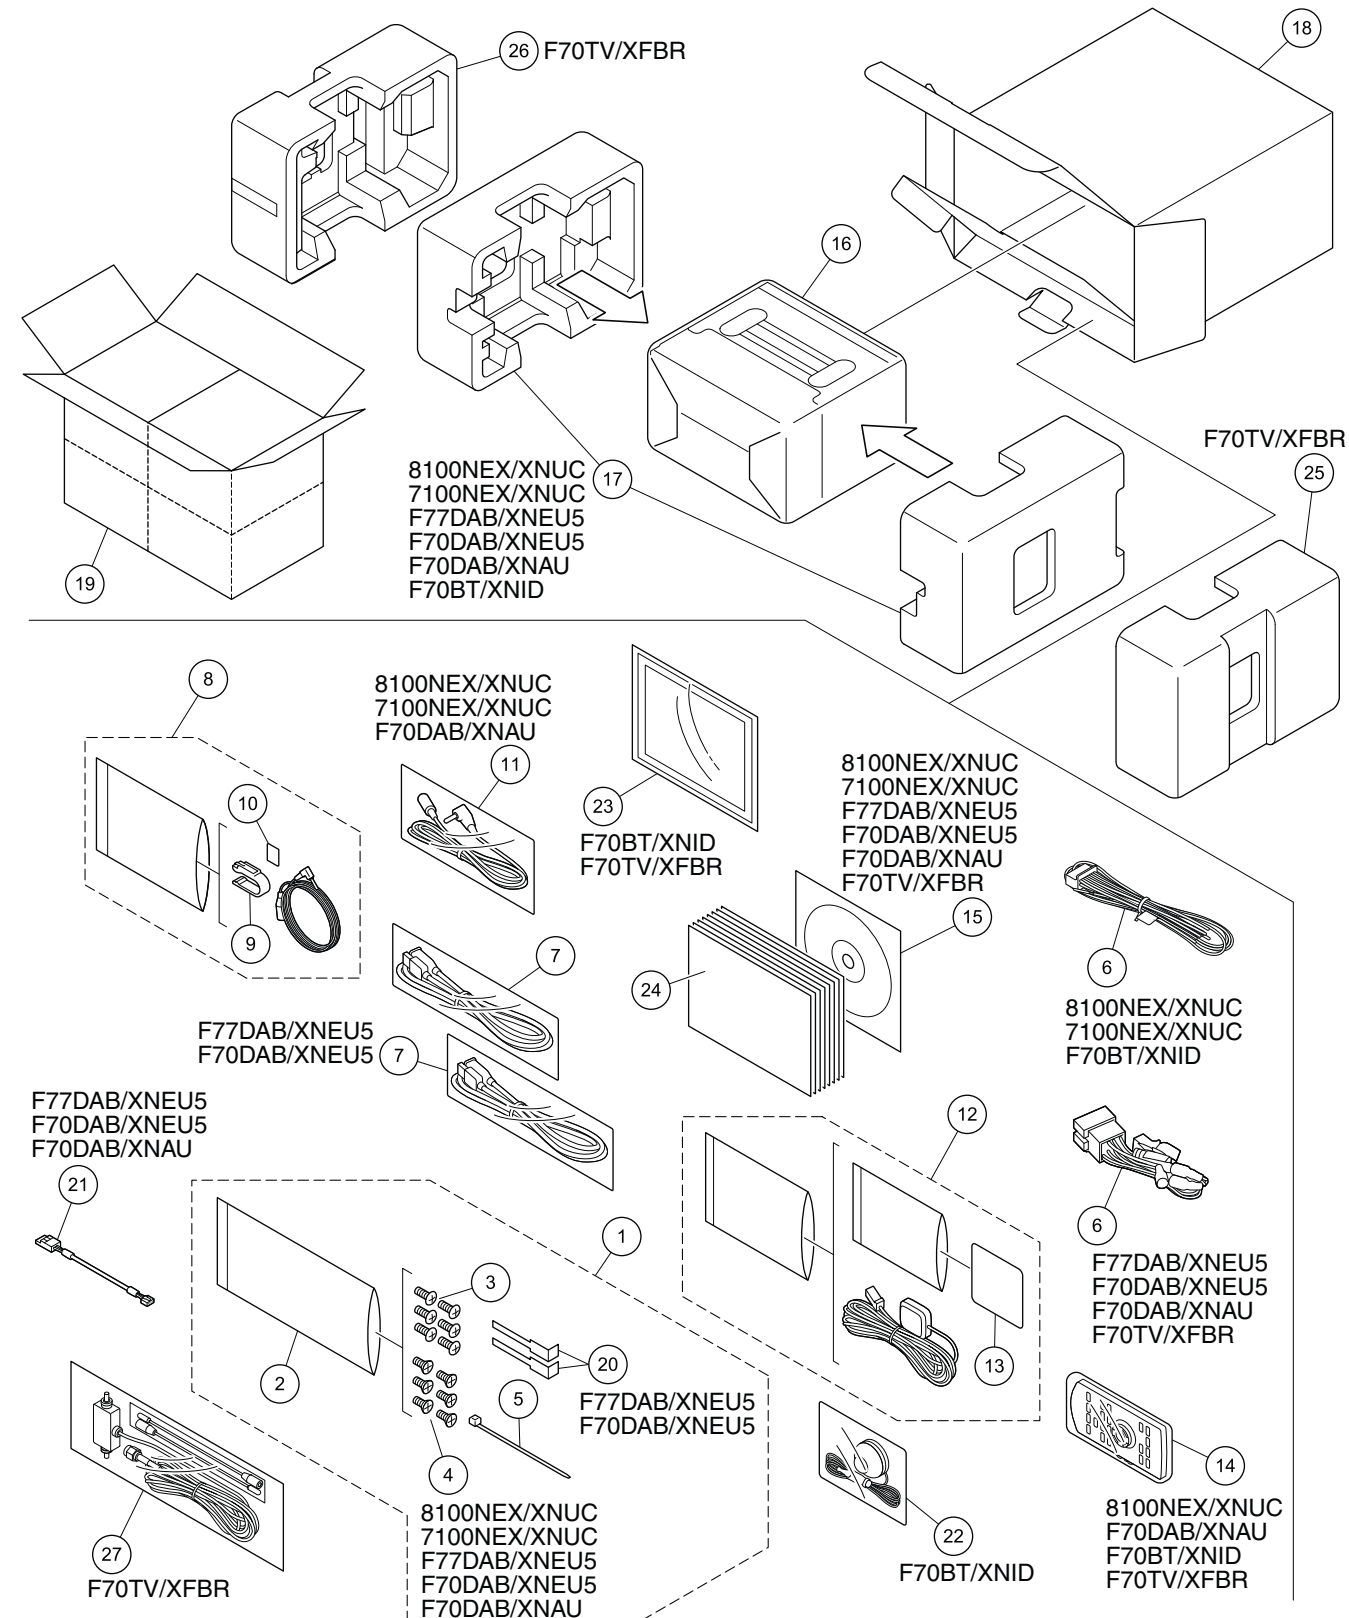

(1) PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Attachment Assy	See Contrast table (2)		21	Cord	See Contrast table (2)
	2	Polyethylene Bag	CEG1160		22	Microphone Assy	See Contrast table (2)
	3	Screw	TRZ50P080FTC		23	Panel	See Contrast table (2)
	4	Screw	See Contrast table (2)		24-1	Quick Start Guide	See Contrast table (2)
*	5	Lock Tie	CNW2429		24-2	Quick Start Guide	See Contrast table (2)
	6	Cord Assy	See Contrast table (2)		24-3	Quick Start Guide	See Contrast table (2)
	7	USB Extended Cable	See Contrast table (2)		24-4	Owner's Manual	See Contrast table (2)
	8	Microphone Assy	CPM1083		24-5	Owner's Manual	See Contrast table (2)
	9	Holder	CZN7192		24-6	Installation Manual	See Contrast table (2)
	10	Cushion	CZN7193	*	24-7	Registration Card	See Contrast table (2)
	11	Cable Assy	See Contrast table (2)	*	24-8	Warranty Card	See Contrast table (2)
	12	GPS Antenna Assy	CXE3204	*	24-9	Tag	See Contrast table (2)
	13	Sheet	CZN8510	*	24-10	Caution Card	See Contrast table (2)
	14	Card Remote Control Unit	See Contrast table (2)	*	24-11	Service Network	See Contrast table (2)
	15	IM CD-ROM	See Contrast table (2)		24-12	Quick Start Guide	See Contrast table (2)
	16	Cover	See Contrast table (2)		24-13	Important Information for the User	See Contrast table (2)
	17	Protector	See Contrast table (2)		25	Protector(L)	See Contrast table (2)
	18	Unit Box	See Contrast table (2)		26	Protector(R)	See Contrast table (2)
	19	Contain Box	See Contrast table (2)		27	Rod Antenna	See Contrast table (2)
	20	Handle	See Contrast table (2)				

(2) CONTRAST TABLE

AVIC-8100NEX/XNUC, AVIC-7100NEX/XNUC, AVIC-F77DAB/XNEU5, AVIC-F70DAB/XNEU5, AVIC-F70DAB/XNAU, AVIC-F70BT/XNID and AVIC-F70TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-8100 NEX/XNUC	AVIC-7100 NEX/XNUC	AVIC-F77 DAB/XNEU5	AVIC-F70 DAB/XNEU5
	1	Attachment Assy	*CED6844	*CED6844	*CED6845	CEV1603
	4	Screw	CRZ50P090FTC	CRZ50P090FTC	CRZ50P090FTC	CRZ50P090FTC
	6	Cord Assy	CDP1666	CDP1666	CDP1545	CDP1545
	7	USB Extended Cable	CDP1587 (x1)	CDP1587 (x1)	CDP1587 (x2)	CDP1587 (x2)
	11	Cable Assy	CDP1707	CDP1707	Not used	Not used
	14	Card Remote Control Unit	CXE5117	Not used	Not used	Not used
	15	IM CD-ROM	CPJ1492	CPJ1492	CPJ1503	CPJ1503
	16	Cover	CEG1359	CEG1359	CEG1356	CEG1356
	17	Protector	CHP4863	CHP4863	CHP4864	CHP4864
	18	Unit Box	CHG8931	CHG8928	CHG8933	CHG8930
	19	Contain Box	CHL8931	CHL8928	CHL8933	CHL8930
	20	Handle	Not used	Not used	CND6289	CND6289
	21	Cord	Not used	Not used	CDP1669	CDP1669
	22	Microphone Assy	Not used	Not used	Not used	Not used
	23	Panel	Not used	Not used	Not used	Not used
	24-1	Quick Start Guide	CRB4526	CRB4526	CRD4853	CRD4853
	24-2	Quick Start Guide	Not used	Not used	CRD4854	CRD4854
	24-3	Quick Start Guide	Not used	Not used	CRD4862	CRD4862
	24-4	Owner's Manual	CRD4851	CRD4851	CRD4855	CRD4855
	24-5	Owner's Manual	Not used	Not used	Not used	Not used
	24-6	Installation Manual	CRD4852	CRD4852	CRD4856	CRD4856
*	24-7	Registration Card	CRY1271	CRY1271	Not used	Not used
*	24-8	Warranty Card	QRY3001	QRY3001	CRY1376	CRY1376
*	24-9	Tag	Not used	Not used	CRW1881	CRW1881
*	24-10	Caution Card	Not used	Not used	CRP1481	CRP1481
	24-11	Service Network	Not used	Not used	Not used	Not used
	24-12	Quick Start Guide	Not used	Not used	Not used	Not used
	24-13	Important Information for the User	Not used	Not used	Not used	Not used
	25	Protector(L)	Not used	Not used	Not used	Not used
	26	Protector(R)	Not used	Not used	Not used	Not used
	27	Rod Antenna	Not used	Not used	Not used	Not used


Mark	No.	Description	AVIC-F70 DAB/XNAU	AVIC-F70 BT/XNID	AVIC-F70 TV/XFBR
A	1	Attachment Assy	*CED6844	*CEC7757	*CEC7757
	4	Screw	CRZ50P090FTC	Not used	Not used
	6	Cord Assy	CDP1545	CDP1666	CDP1545
	7	USB Extended Cable	CDP1587 (x1)	CDP1587 (x1)	CDP1587 (x1)
	11	Cable Assy	CDP1707	Not used	Not used
	14	Card Remote Control Unit	CXE5117	CXE5117	CXE5117
	15	IM CD-ROM	CPJ1503	Not used	CPJ1493
	16	Cover	CEG1356	CEG1356	CEG1356
	17	Protector	CHP4863	CHP4863	Not used
	18	Unit Box	CHG8932	CHG8929	CHG8941
B	19	Contain Box	CHL8932	CHL8929	CHL8941
	20	Handle	Not used	Not used	Not used
	21	Cord	CDP1669	Not used	Not used
	22	Microphone Assy	Not used	CPM1086	Not used
	23	Panel	Not used	CNS9475	CNS9475
	24-1	Quick Start Guide	CRB4534	CRB4537	Not used
C	24-2	Quick Start Guide	Not used	Not used	Not used
	24-3	Quick Start Guide	Not used	Not used	Not used
	24-4	Owner's Manual	CRB4535	CRB4523	Not used
	24-5	Owner's Manual	Not used	CRB4538	Not used
	24-6	Installation Manual	CRB4536	CRB4539	CRB4585
	24-7	Registration Card	Not used	Not used	Not used
	24-8	Warranty Card	Not used	CRY1304	Not used
	24-9	Tag	Not used	Not used	Not used
	24-10	Caution Card	CRP1481	Not used	Not used
	24-11	Service Network	Not used	CRY1305	CRY1227
	24-12	Quick Start Guide	Not used	Not used	CRB4547
	24-13	Important Information for the User	Not used	Not used	CRB4549
	25	Protector(L)	Not used	Not used	CHP4275
	26	Protector(R)	Not used	Not used	CHP4276
	27	Rod Antenna	Not used	Not used	CXE7989

D

E

F

9.2 EXTERIOR (1)

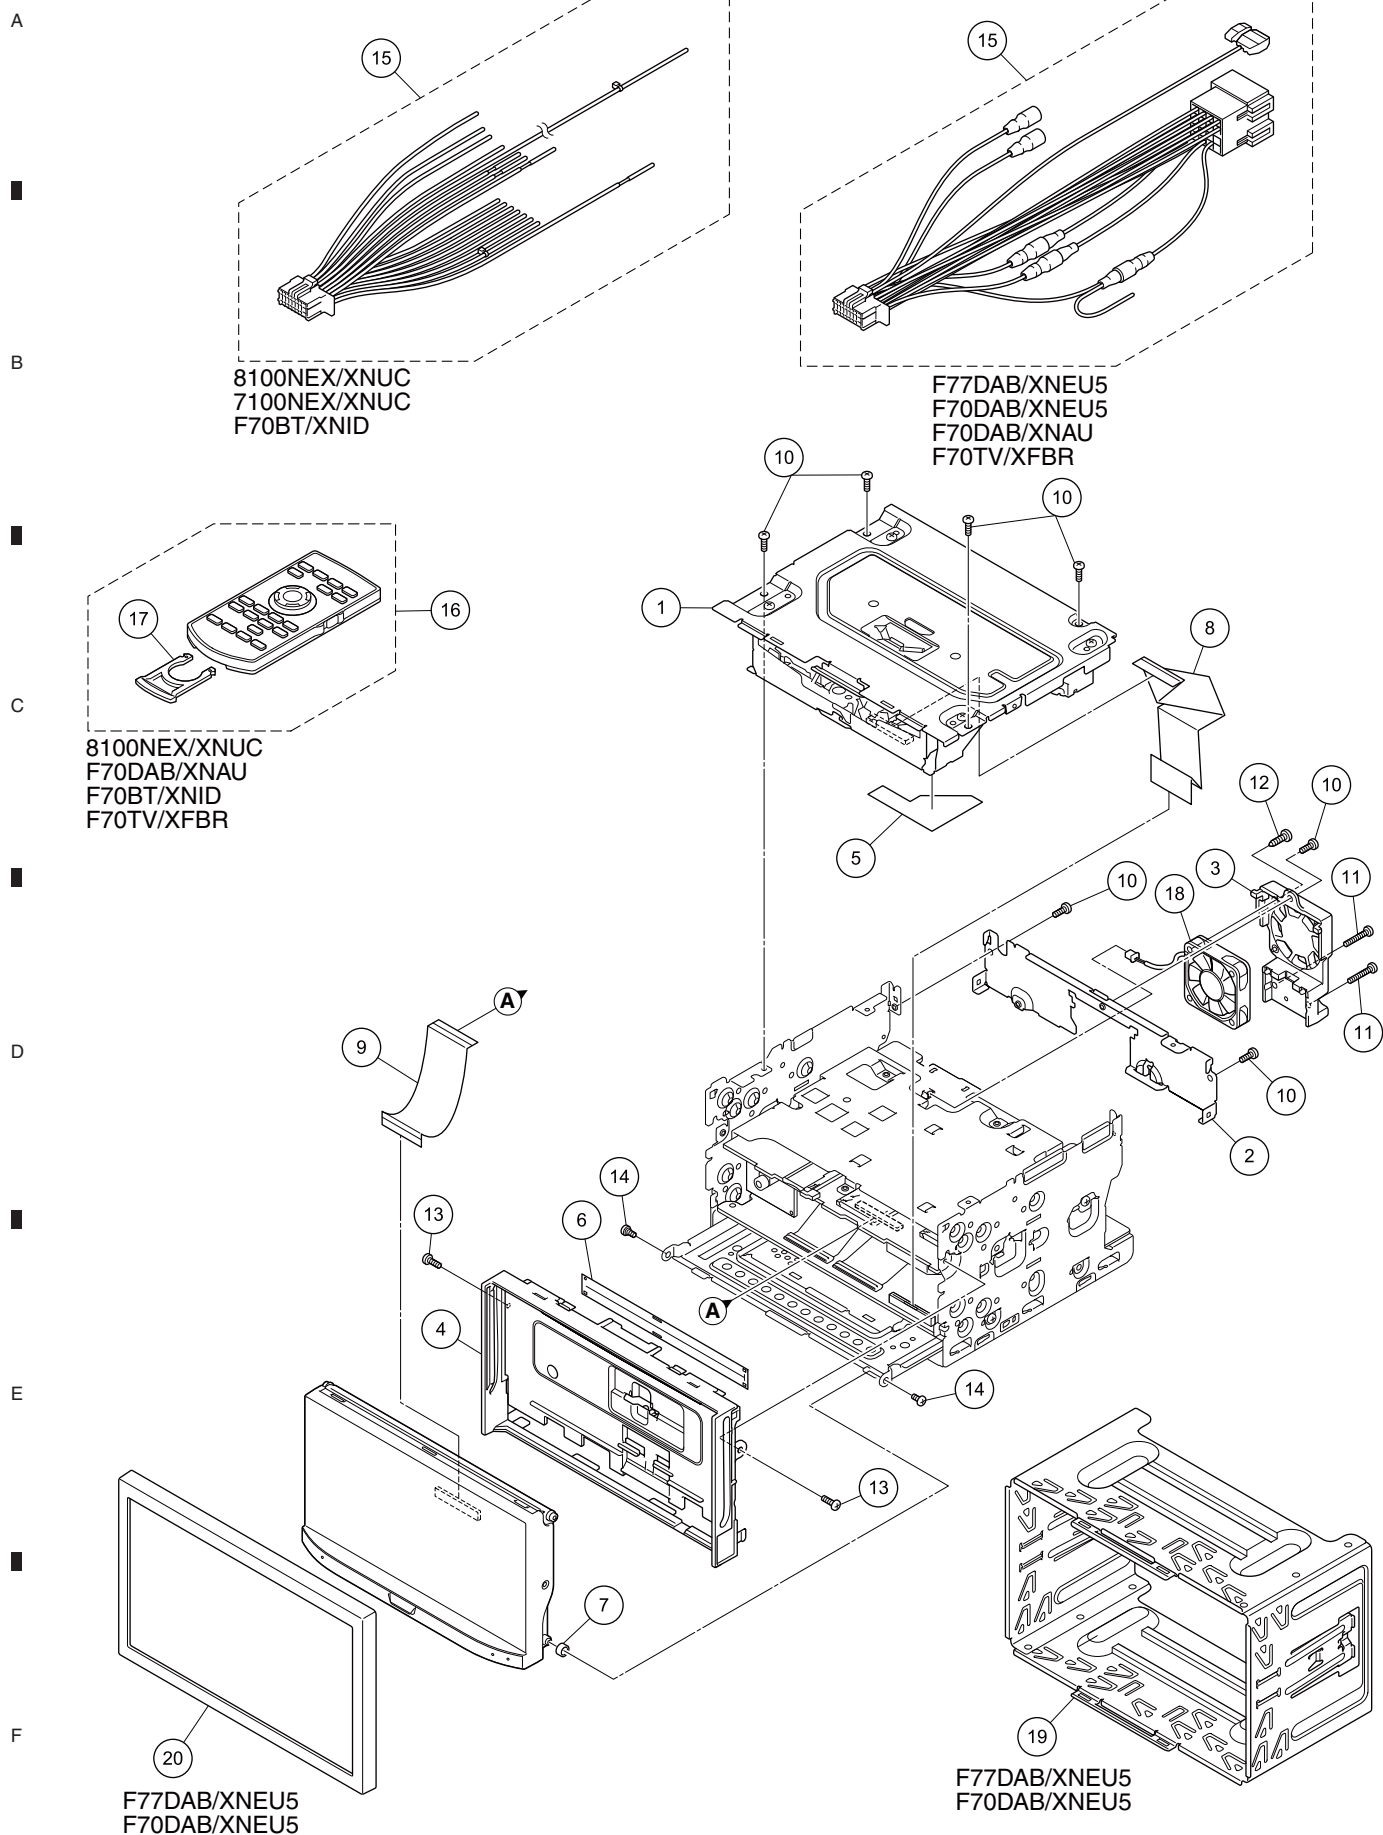

(1) EXTERIOR (1) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	DVD Mechanism Module (LS2.5)	CXK8102	11	Screw	BSZ26P120FTC	A
2	Holder	CND6989	12	Screw	BPZ30P080FTC	
3	Heat Sink	CNR2165	13	Screw	ISS26P055FTC	
4	Panel	See Contrast table (2)	14	Screw	CBA1735	
5	Insulator	CNN4613	15	Cord Assy	See Contrast table (2)	
6	Cover	CNN4866	16	Card Remote Control Unit	See Contrast table (2)	B
7	Collar	CNW2038	17	Battery Cover	See Contrast table (2)	
8	FFC	CDD1033	18	Fan Motor	See Contrast table (2)	
9	FFC	CDD1039	19	Holder	See Contrast table (2)	
10	Screw	BSZ26P060FTC	20	Panel	See Contrast table (2)	

(2) CONTRAST TABLE

AVIC-8100NEX/XNUC, AVIC-7100NEX/XNUC, AVIC-F77DAB/XNEU5, AVIC-F70DAB/XNEU5, AVIC-F70DAB/XNAU, AVIC-F70BT/XNID and AVIC-F70TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-8100 NEX/XNUC	AVIC-7100 NEX/XNUC	AVIC-F77 DAB/XNEU5	AVIC-F70 DAB/XNEU5
	4	Panel	CNU3147	CNU3147	CNU3221	CNU3236
	15	Cord Assy	CDP1666	CDP1666	CDP1545	CDP1545
	16	Card Remote Control Unit	CXE5117	Not used	Not used	Not used
	17	Battery Cover	CNU1624	Not used	Not used	Not used
	18	Fan Motor	CXM1446	CXM1446	CXM1449	CXM1449
	19	Holder	Not used	Not used	CND7102	CND7102
	20	Panel	Not used	Not used	CNU2645	CNU2645

Mark	No.	Description	AVIC-F70 DAB/XNAU	AVIC-F70 BT/XNID	AVIC-F70 TV/XFBR
	4	Panel	CNU3221	CNU3222	CNU3222
	15	Cord Assy	CDP1545	CDP1666	CDP1545
	16	Card Remote Control Unit	CXE5117	CXE5117	CXE5117
	17	Battery Cover	CNU1624	CNU1624	CNU1624
	18	Fan Motor	CXM1446	CXM1446	CXM1446
	19	Holder	Not used	Not used	Not used
	20	Panel	Not used	Not used	Not used

9.3 EXTERIOR (2)

A


B

C

D

E

F

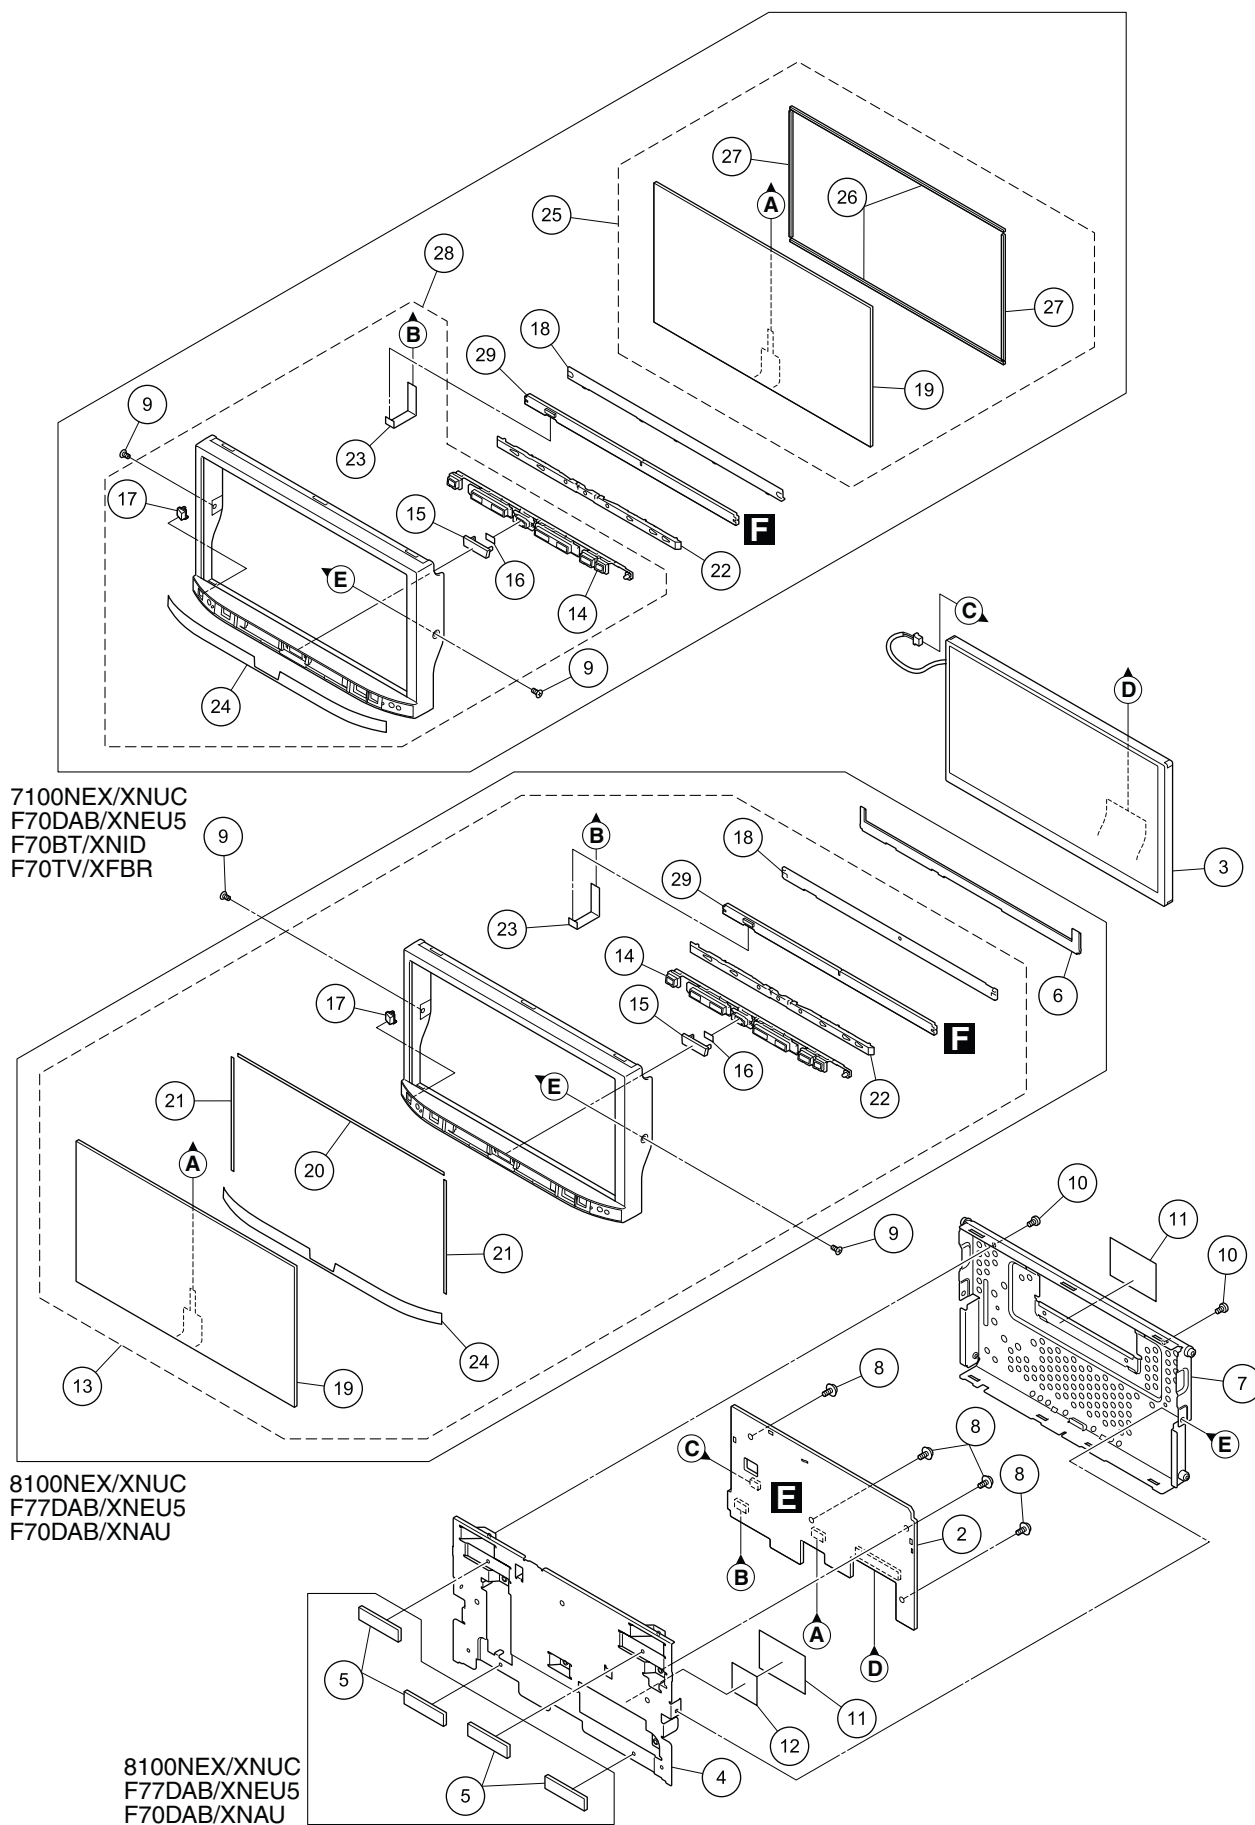

(1) EXTERIOR (2) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.	
1	•••••		16	Double Side Tape	CNN4681	
2	Monitor Unit	See Contrast table (2)	17	Lighting Conductor	CNW3108	A
3	TFT LCD	CWX4182	18	Spacer	See Contrast table (2)	
4	Holder	CND7007	19	Touch Panel	See Contrast table (2)	
5	Cushion	See Contrast table (2)	20	Double Side Tape	See Contrast table (2)	
6	Holder	See Contrast table (2)	21	Double Side Tape	See Contrast table (2)	
7	Case Unit	CXE4761	22	Lighting Conductor	CNW3105	
8	Screw	ASZ26P050FTC	23	FFC	CDD1038	
9	Screw (M2 x 4)	CBA2265	24	Plate	See Contrast table (2)	
10	Screw	BSZ26P050FTC	25	Touch Panel Unit	See Contrast table (2)	
11	Sheet	CNN4232	26	Cushion	See Contrast table (2)	B
12	Sheet	CNN4869	27	Cushion	See Contrast table (2)	
13	Grille Unit (Service)	See Contrast table (2)	28	Grille Assy	See Contrast table (2)	
14	Button	CAI4322	29	Key Unit (Service)	CXX7594	
15	Cap (HOME)	CNU2650				

(2) CONTRAST TABLE

AVIC-8100NEX/XNUC, AVIC-7100NEX/XNUC, AVIC-F77DAB/XNEU5, AVIC-F70DAB/XNEU5, AVIC-F70DAB/XNAU, AVIC-F70BT/XNID and AVIC-F70TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-8100 NEX/XNUC	AVIC-7100 NEX/XNUC	AVIC-F77 DAB/XNEU5	AVIC-F70 DAB/XNEU5	
	2	Monitor Unit	CWN9133	CWN9134	CWN9133	CWN9134	
	5	Cushion	CNN4680	Not used	CNN4680	Not used	
	6	Holder	CNW2507	Not used	CNW2507	Not used	
	13	Grille Unit (Service)	CXX8164	Not used	CXX8163	Not used	
	18	Spacer	CNW3107	CNW3104 (Holder)	CNW3107	CNW3104 (Holder)	
	19	Touch Panel	CSX1213	CSX1241	CSX1213	CSX1241	
	20	Double Side Tape	CNN4777	Not used	CNN4777	Not used	
	21	Double Side Tape	CNN4004	Not used	CNN4004	Not used	
	24	Plate	CNU3206	CNU3209	CNU3207	CNU3208	
	25	Touch Panel Unit	Not used	CXE7770	Not used	CXE7770	D
	26	Cushion	Not used	CNN4271	Not used	CNN4271	
	27	Cushion	Not used	CNN4272	Not used	CNN4272	
	28	Grille Assy	Not used	CXE8357	Not used	CXE8358	

Mark	No.	Description	AVIC-F70 DAB/XNAU	AVIC-F70 BT/XNID	AVIC-F70 TV/XFBR	
	2	Monitor Unit	CWN9133	CWN9134	CWN9134	
	5	Cushion	CNN4680	Not used	Not used	
	6	Holder	CNW2507	Not used	Not used	
	13	Grille Unit (Service)	CXX8165	Not used	Not used	
	18	Spacer	CNW3107	CNW3104 (Holder)	CNW3104 (Holder)	E
	19	Touch Panel	CSX1213	CSX1241	CSX1241	
	20	Double Side Tape	CNN4777	Not used	Not used	
	21	Double Side Tape	CNN4004	Not used	Not used	
	24	Plate	CNU3208	CNU3211	CNU3212	
	25	Touch Panel Unit	Not used	CXE7770	CXE7770	
	26	Cushion	Not used	CNN4271	CNN4271	
	27	Cushion	Not used	CNN4272	CNN4272	
	28	Grille Assy	Not used	CXE8359	CXE8360	

△



(1) EXTERIOR (3) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	SOC Dual Core Unit	CWN9394	16	Cable Assy	See Contrast table (2)
2	AV Unit	See Contrast table (2)	17	Cap	CNV6727
3	BE Core Unit (U1701)	See Contrast table (2)	18	Cable Assy	CDF1197
4	Holder	See Contrast table (2)	19	Screw	BSZ26P060FTC
5	Holder	See Contrast table (2)	20	Screw	BMZ30P060FTC
6	Screw	BPZ26P080FTC	21	Screw	ASZ26P050FTC
7	Shield Case	See Contrast table (2)	22	Label	CNN3533
8	Holder	CND6984	23	Fuse (10 A)	YEK5001
9	Bracket	CND6985	24	Service Strage SD Assy	See Contrast table (2)
10	Bracket	CND6986	25	Sensor Unit	CWX4712
11	Shield Case	See Contrast table (2)	26	Holder	CND6958
12	FFC	CDD1034	27	BT Module	CWX4710
13	FFC	CDD1035	28	Holder	CND6987
14	FFC	CDD1036	29	IF Unit (Service)	See Contrast table (2)
15	Sheet	CNN4830	30	Antenna Cable Assy	See Contrast table (2)
			31	Holder	See Contrast table (2)
			32	DTT Tuner	See Contrast table (2)
			33	FFC	See Contrast table (2)

(2) CONTRAST TABLE

AVIC-8100NEX/XNUC, AVIC-7100NEX/XNUC, AVIC-F77DAB/XNEU5, AVIC-F70DAB/XNEU5, AVIC-F70DAB/XNAU, AVIC-F70BT/XNID and AVIC-F70TV/XFBR are constructed the same except for the following:

Mark	No.	Description	AVIC-8100 NEX/XNUC	AVIC-7100 NEX/XNUC	AVIC-F77 DAB/XNEU5	AVIC-F70 DAB/XNEU5
	2	AV Unit	CWN9095	CWN9097	CWN9094	CWN9106
	3	BE Core Unit (U1701)	CWE2518	CWE2518	CWE2534 (WWR Tuner Unit)	CWE2534 (WWR Tuner Unit)
	4	Holder	CND7288	CND7288	CND7288	CND7288
	5	Holder	CND6992	CND6992	CND7002	CND7409
	7	Shield Case	CND7003	CND7003	Not used	Not used
	11	Shield Case	CND6988	CND6988	Not used	Not used
	16	Cable Assy	CDF1082	CDF1082	CDF1217	CDF1082
	24	Service Strage SD Assy	CXX7607	CXX7609	CXX7606	CXX7606
	29	IF Unit (Service)	CXX7576	CXX7578	CXX7575	CXX7580
	30	Antenna Cable Assy	Not used	Not used	QXA3732	QXA3732
	31	Holder	Not used	Not used	Not used	Not used
	32	DTT Tuner	Not used	Not used	Not used	Not used
	33	FFC	Not used	Not used	Not used	Not used

Mark	No.	Description	AVIC-F70 DAB/XNAU	AVIC-F70 BT/XNID	AVIC-F70 TV/XFBR
	2	AV Unit	CWN9096	CWN9098	CWN9107
	3	BE Core Unit (U1701)	CWE2534 (WWR Tuner Unit)	Not used	Not used
	4	Holder	CND7288	Not used	Not used
	5	Holder	CND7002	CND6995	CND7365
	7	Shield Case	Not used	Not used	Not used
	11	Shield Case	Not used	Not used	CND6988
	16	Cable Assy	CDF1082	CDF1082	CDF1082
	24	Service Strage SD Assy	CXX7608	CXX7610	CXX7611
	29	IF Unit (Service)	CXX7577	CXX7579	CXX7581
	30	Antenna Cable Assy	QXA3732	Not used	Not used
	31	Holder	Not used	Not used	CND7536
	32	DTT Tuner	Not used	Not used	CWE2519
	33	FFC	Not used	Not used	CDD1122


F



EXTERIOR (4) SECTION PARTS LIST

Mark No.	Description	Part No.	
1	Drive Mechanism Unit		
	AVIC-8100NEX/XNUC	CXE7000	A
	AVIC-7100NEX/XNUC	CXE7000	
	AVIC-F77DAB/XNEU5	CXE7000	
	AVIC-F70DAB/XNEU5	CXE7000	
	AVIC-F70DAB/XNAU	CXE7000	
	AVIC-F70BT/XNID	CXE7000	■
	AVIC-F70TV/XFBR	CXE7765	
2	Screw	AMZ26P030FTC	
3	Washer	CBF1039	
4	Washer	CBF1064	
5	Spring	EBL1034	B
6	Frame	ENC2001	
7	Gear	ENV1630	
8	Gear	ENV1631	
9	Gear	ENV1632	
10	Gear	ENV1635	■
11	Guide	ENV3001	
*	12 Chassis Unit	EXA4027	
	13 Motor Unit	EXA4003	
	14 PCB Assy (Service)	EXX2001	C
*	15 Cord (Green)	CDC1056	
*	16 Cord (White)	CDC1057	
	17 Screw	IMS26P060FTC	
	18 Screw	JFZ20P025FTC	■
	19 Screw	EBA2002	
			D
			■
			E
			■
			F

9.6 DVD MECHANISM MODULE (1)

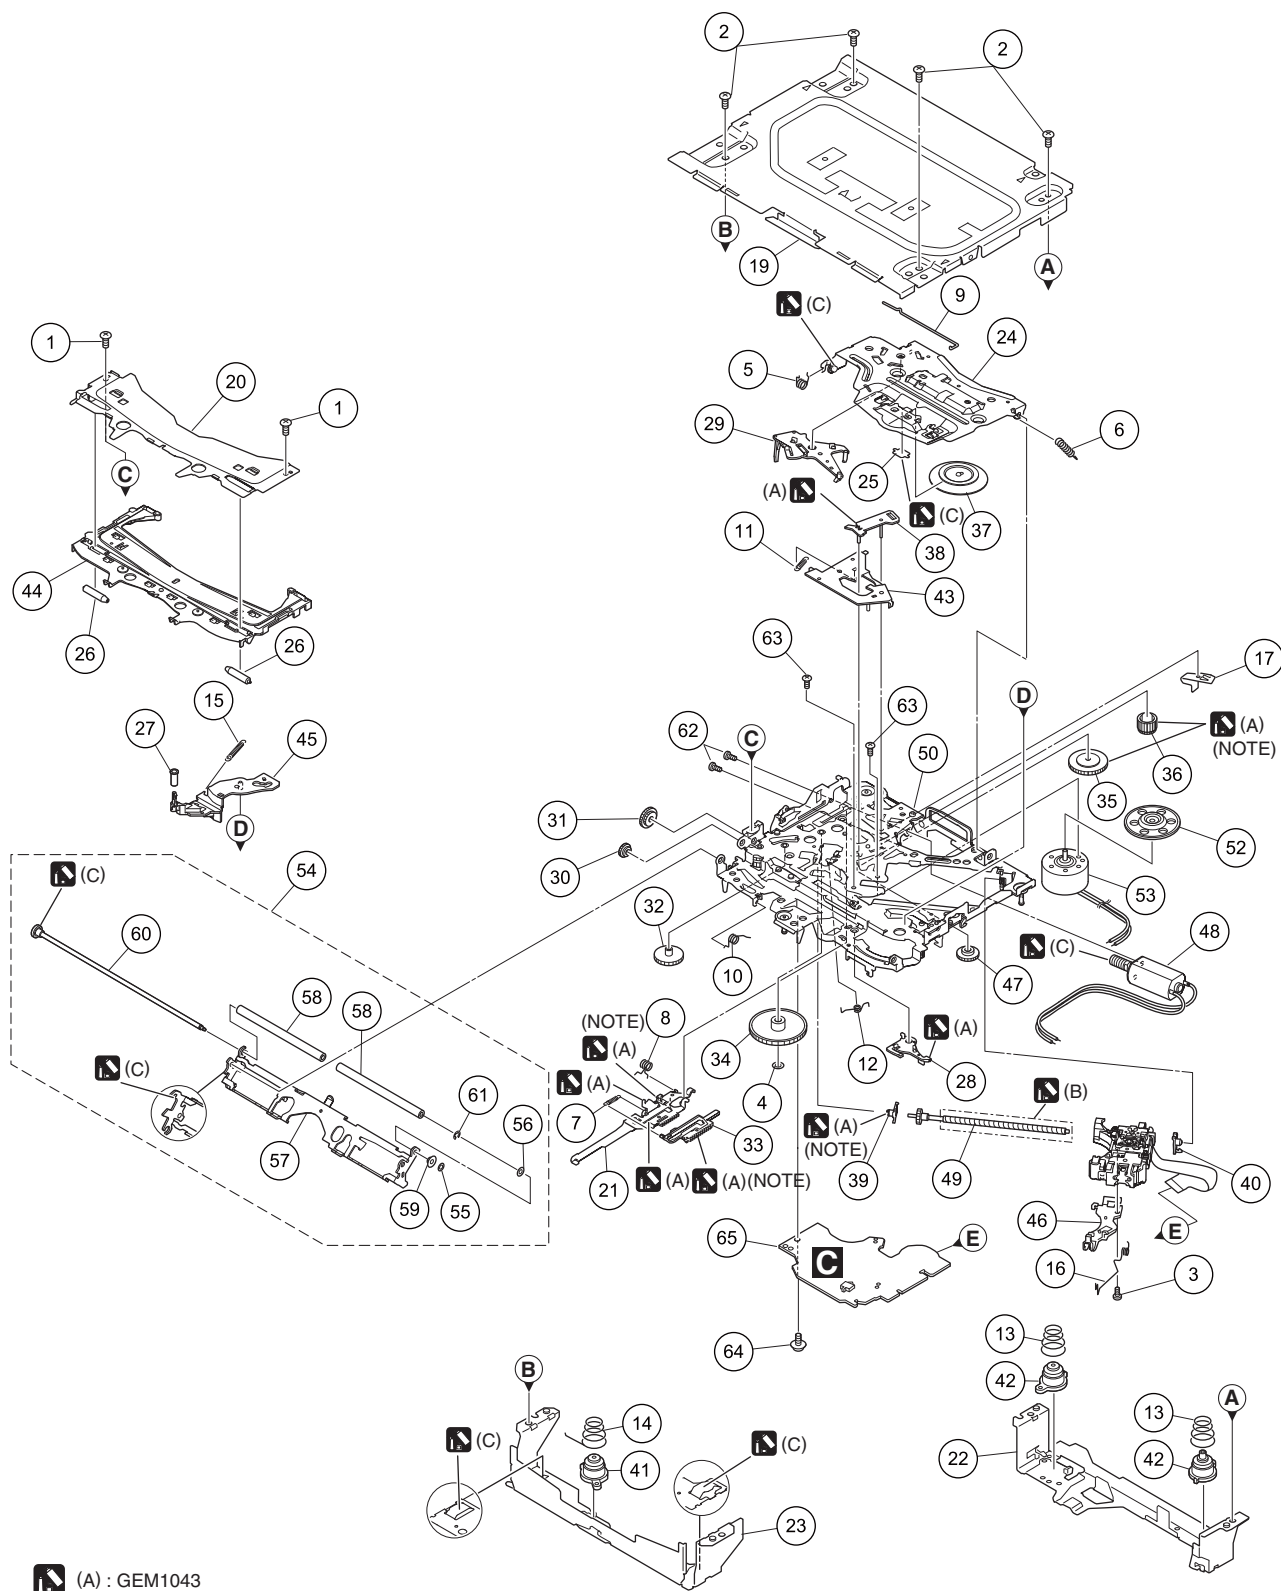

DVD MECHANISM MODULE (1) SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	BSZ20P040FTC	36	Gear	CNW1187
2	Screw	BSZ26P060FTC	37	Clamper	CNW1190
3	Screw (M2 x 4)	CBA1835	38	Arm	CNW1192
4	Washer	CBF1038	39	Holder	CNW1193
5	Spring	CBH2855	40	Holder	CNW1194
6	Spring	CBH2860	41	Damper	CNW2439
7	Spring	CBH3010	42	Damper	CNW2440
8	Spring	CBH3011	43	Arm	CNW1726
9	Spring	CBH3014	44	Guide	CNW3489
10	Spring	CBH3015	45	Arm	CNW2241
11	Spring	CBH3016	46	Rack	CNW2265
12	Spring	CBH3017	47	Gear	CNW2287
13	Spring	CBH3019	48	Motor Unit	CXC4026
14	Spring	CBH3086	49	Screw Unit	CXC8894
15	Spring	CBH3095	50	Chassis Unit	CXE8407
16	Spring	CBH3096	51	*****	
17	Plate Spring	CBL1824	* 52	Support Wheel	CNW2052
18	*****		* 53	Spindle Motor	EXM2002
19	Case	CNB3928	54	Arm Assy	CXE7890
20	Bracket	CND4553	55	Washer	CBF1037
21	Lever	CND7225	56	Washer	CBF1038
22	Bracket	CND5710	57	Arm	CND6779
23	Bracket	CND6127	58	Roller	CNW2500
24	Arm	CND7224	59	Collar	CNW2444
25	Sheet	CNN3678	60	Gear Unit	CXE6225
26	Roller	CNW1172	61	E Ring	YE15FTC
27	Roller	CNW1175	62	Screw	JFZ20P025FTC
28	Arm	CNW1177	63	Screw	JGZ17P020FTC
29	Arm	CNW1178	64	Screw (M2 x 5)	EBA1028
30	Gear	CNW1180	65	DVD Core Unit	CWX4717
31	Gear	CNW1181			
32	Gear	CNW1183			
33	Rack	CNW1184			
34	Gear	CNW1185			
35	Gear	CNW1186			

Pickup, Spindle Motor and Support Wheel are not available as service parts, because they need adjustment by special equipment after replacing.

12. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○S○○○J,RS1/○○S○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

- The expression of the unit in this manual is shown by u instead of μ . Please do not make a mistake.

Circuit Symbol and No.	Part No.	Circuit Symbol and No.	Part No.
A:AVIC-8100NEX/XNUC		Unit Number:CWN9133(A,C,E)	
B:AVIC-7100NEX/XNUC		Unit Number:CWN9134(B,D,F,G)	
C:AVIC-F77DAB/XNEU5		Unit Name:Monitor Unit	
D:AVIC-F70DAB/XNEU5		Unit Number:CXX7594	
E:AVIC-F70DAB/XNAU		Unit Name:Key Unit (Service)	
F:AVIC-F70BT/XNID		Unit Number:CWX4712	
G:AVIC-F70TV/XFBR		Unit Name:Sensor Unit	
Unit Number:CWN9095(A)		Unit Number:EXX2001	
Unit Number:CWN9097(B)		Unit Name:PCB Assy (Service)	
Unit Number:CWN9094(C)			
Unit Number:CWN9106(D)			
Unit Number:CWN9096(E)			
Unit Number:CWN9098(F)			
Unit Number:CWN9107(G)			
Unit Name:AV Unit			
Unit Number:CXX7576(A)			
Unit Number:CXX7578(B)			
Unit Number:CXX7575(C)			
Unit Number:CXX7580(D)			
Unit Number:CXX7577(E)			
Unit Number:CXX7579(F)			
Unit Number:CXX7581(G)			
Unit Name:IF Unit (Service)			
Unit Number:CWX4717			
Unit Name:DVD Core Unit			
Unit Number:CWN9394			
Unit Name:SOC Dual Core Unit			
		A	
		Unit Number:CWN9095(A)	
		Unit Number:CWN9097(B)	
		Unit Number:CWN9094(C)	
		Unit Number:CWN9106(D)	
		Unit Number:CWN9096(E)	
		Unit Number:CWN9098(F)	
		Unit Number:CWN9107(G)	
		Unit Name:AV Unit	
		MISCELLANEOUS	
		IC 101 (A,59,104) IC NJM12904V	
		IC 201 (A,98,136) Power AMP IC PA2032A	
		IC 302 (B,148,58) Regulator IC MM3411A33N	
		IC 303 (B,164,47) DC/DC Converter IC NJW4132U2-A	
		IC 304 (B,170,83) Regulator BA00CC0WFP	
		IC 305 (B,154,46) Regulator IC R1516S033B-AE	
		IC 501 (B,30,51) Regulator IC(A,B,C,D,E) MM3479A33P	
		IC 502 (B,33,58) Regulator IC(A,B,C,D,E) S-1172B12-E6	
		IC 503 (A,29,82) Regulator IC(C,D,E) MM3479A33P	
		IC 504 (B,46,50) Regulator IC MM3571A33P	
		IC 505 (B,42,43) Regulator IC(A,B,C,D,E) MM3571A33P	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	IC 601	(A,68,46) ROM IC	CAT93C66VI
	IC 602	(A,90,35) Flash Written IC	PEQ451A8(A,B)
		Flash Written IC	PEQ452A8(C,D,E)
		Flash Written IC	PEQ455A8(F)
		Flash Written IC	PEQ456A8(G)
	IC 603	(B,118,17) Reset IC	PST8229N
	IC 801	(B,74,62) IC	AK4223VQ
	IC 901	(B,51,29) IC	AK4223VQ
B	IC 1002	(B,148,75) Dual OP-AMP	NJM4565V
	IC 1003	(B,152,100) Dual OP-AMP	NJM4565V
	IC 1005	(B,154,87) IC	TC4052BFT
	IC 1101	(B,134,55) IC	AK7734XQ
	IC 1201	(A,118,44) CONV IC	WM8761BGED
C	IC 1202	(A,116,54) CONV IC	WM8761BGED
	IC 1203	(A,115,64) CONV IC	WM8761BGED
	IC 1301	(B,80,89) IC	PM9012A
	IC 1501	(A,45,64) Tuner IC(A,B)	TEF6688HN
		(A,45,64) Tuner IC(C,D,E,F,G)	TEF6686HN
	IC 1601	(A,38,45) Tuner IC(A,B,C,D,E)	TEF6686HN
D	Q 101	(B,68,106) Bipolar Transistor	LSCR523UB
	Q 102	(B,132,78) Chip Transistor	HN1C01FU
	Q 104	(B,67,108) Resistor Built-IN TR	LTC014EEB
	Q 105	(B,52,104) Chip Transistor	HN1C01FU
	Q 107	(B,64,106) Bipolar Transistor	LSAR523UB
E	Q 108	(B,58,106) Bipolar Transistor	LSAR523UB
	Q 109	(A,52,106) Resistor Built-IN TR	LTC014EEB
	Q 110	(A,53,115) Resistor Built-IN TR	LTC014EEB
	Q 111	(B,61,104) Resistor Built-IN TR	LTC014EEB
	Q 201	(B,79,111) Transistor	RN4987
F	Q 202	(B,74,109) Transistor	RN4987
	Q 203	(B,77,112) Resistor Built-IN TR	LTA024EEB
	Q 204	(B,85,113) Chip Transistor	RN1903
	Q 205	(B,89,111) Bipolar Transistor	LSCR523UB
	Q 301	(B,160,39) Resistor Built-IN TR	LTC014EEB
G	Q 302	(B,163,38) Bipolar Transistor	LSAR523UB
	Q 307	(A,146,29) Transistor	2SCR573DG
	Q 308	(A,152,33) Resistor Built-IN TR	LTC014EEB
	Q 312	(A,152,46) Bipolar Transistor	LSCR523UB
	Q 314	(B,125,38) Chip Transistor	2SB1689
H	Q 315	(B,124,35) Bipolar Transistor	LSCR523UB
	Q 602	(A,67,39) Bipolar Transistor	LSCR523UB
	Q 1001	(B,155,82) Chip Transistor	RN1907
	Q 1401	(A,50,90) Transistor(A,B,C,D,E)	2SC3357
	Q 1402	(B,51,89) Bipolar Transistor(A,B,C,D,E)	LSAR523UB
I	Q 1403	(B,52,85) Bipolar Transistor(A,B,C,D,E)	LSCR523UB
	Q 1404	(B,60,90) Transistor(A,B,C,D,E)	2SC4083
	Q 1405	(B,58,88) Transistor(A,B,C,D,E)	2SC4083
	Q 1501	(A,31,58) Bipolar Transistor(A,B)	MMBT2369L
	Q 1502	(A,31,55) Bipolar Transistor(A,B)	MMBT2369L
J	Q 1503	(A,38,58) Bipolar Transistor(A,B)	MMBT2369L
	Q 1504	(A,37,55) Bipolar Transistor(A,B)	MMBT2369L
	Q 1701	(B,25,79) Resistor Built-IN TR(C,D,E)	LTC014EEB
	Q 1702	(B,27,88) Transistor(C,D,E)	2SAR293PGZE
	Q 1703	(B,33,84) Transistor(C,D,E)	2SCR293PGZE
K	Q 1801	(B,153,20) Chip Transistor	RN4982
	Q 1802	(B,148,19) Chip Transistor	RN1910
	Q 1804	(B,159,18) Transistor	2SB1260
	Q 1805	(B,155,16) Resistor Built-IN TR	LTC014EEB
	Q 1806	(A,153,24) IC	RZQ050P01

Q 1807	(A,153,20) Bipolar Transistor	LSCR523UB
Q 2201	(A,81,81) Chip Transistor	HN1C03FU
Q 2202	(A,78,85) Chip Transistor	HN1C03FU
Q 2203	(B,172,104) Chip Transistor	HN1C03FU
Q 2204	(B,131,93) Chip Transistor	HN1C03FU
Q 2301	(A,115,34) Chip Transistor(F,G)	RN4982
Q 2302	(A,115,25) Chip Transistor(F,G)	RN4982
Q 2303	(A,115,29) Chip Transistor(F,G)	RN4982
Q 2304	(B,87,29) Chip Transistor(F,G)	RN4982
D 103	(B,71,110) Diode	UDZV6R2(B)
D 105	(B,129,81) Diode	DZ2J200M0
D 106	(B,129,76) Diode	UDZV7R5(B)
D 107	(B,127,79) Rectifier Diode	DAN202UM
D 109	(B,64,112) Rectifier Diode	DA2J101
D 110	(B,79,136) Diode	D1F60-5053
D 111	(B,75,136) Diode	D1F60-5053
D 112	(B,50,108) Diode	DZ2J056M0
D 113	(B,52,111) Diode	DZ2J180M0
D 116	(B,61,107) Rectifier Diode	DA2J101
D 118	(B,56,106) Rectifier Diode	DA2J101
D 120	(A,58,112) Rectifier Diode	DA2J101
D 122	(A,53,110) Diode	D1F60-5053
D 123	(B,90,95) Diode	RB080L-30
D 124	(B,105,123) Diode	CRG03
D 201	(B,94,114) Rectifier Diode	DA2J101
D 202	(B,76,116) Rectifier Diode	DAN202UM
D 203	(B,72,114) Rectifier Diode	DAN202UM
D 205	(B,93,111) Diode	DZ2J082M0
D 206	(B,85,110) Rectifier Diode	DA2J101
D 305	(A,151,30) Diode	DZ2J062M0
D 311	(B,171,44) Schottky Diode	RB551VM-30
D 501	(B,36,54) Diode(A,B,C,D,E)	CRG03
D 601	(B,115,19) Rectifier Diode	DA2J101
D 602	(B,94,24) Schottky Diode	DB2J31400
D 603	(B,94,31) Schottky Diode	DB2J31400
D 604	(B,74,23) Schottky Diode(A,B)	DB2J31400
D 1401	(B,23,103) Diode	EZAEG2A50AX
D 1402	(B,59,83) Switching Diode(A,B,C,D,E)	DAN217UM
D 1404	(B,44,89) Diode(A,B,C,D,E)	RN779F
D 1501	(A,43,82) Diode	EZAEG2A50AX
D 1502	(A,36,75) Diode	EZAEG2A50AX
D 1702	(B,35,78) Diode(C,D,E)	DZ2J160M0
L 101	(A,85,103) Choke Coil 600 uH	CTH1221
L 303	(A,170,40) Choke Coil 22uH	CTH1561
L 901	(B,47,41) Inductor	CTF1786
L 902	(B,48,41) Inductor	CTF1786
L 1101	(A,130,54) Ferrite Bead	CTF1528
L 1102	(A,144,52) Ferrite Bead	CTF1528
L 1201	(A,112,49) Inductor	CTF1786
L 1202	(A,110,59) Inductor	CTF1786
L 1203	(A,114,70) Inductor	CTF1786
L 1204	(B,141,51) Chip Beads	VTL1132
L 1405	(A,47,93) Inductor(A,B,C,D,E)	CTF1794
L 1406	(A,42,93) Inductor(A,B,C,D,E)	ATL7054
L 1407	(A,46,87) Inductor(A,B,C,D,E)	LCYB47NJ1608
L 1408	(A,54,91) Inductor(A,B,C,D,E)	LCYB22NJ1608
L 1409	(A,54,78) Coil(A,B,C,D,E)	CTC1213
L 1411	(A,63,83) Inductor(A,B,C,D,E)	CTF1786
L 1501	(A,53,54) Inductor	CTF1749

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
L 1503	(A,37,73) Inductor	LCYC150K1608	R 115	(B,66,114)	RS1/16SS472J
L 1504	(B,29,96) Inductor	CTF1389	R 116	(B,64,116)	RS1/4SA102J
L 1505	(A,45,82) Inductor	LCMAR27J1608	R 117	(B,54,104)	RS1/16SS473J
L 1601	(A,34,33) Inductor(A,B,C,D,E)	CTF1749	R 118	(B,52,106)	RS1/16SS473J
L 1603	(A,56,45) Inductor(A,B,C,D,E)	LCMAR27J1608	R 119	(B,53,106)	RS1/16SS104J
L 2201	(A,94,72) Ferrite Bead	CTF1528	R 120	(B,54,109)	RS1/16SS472J
L 2202	(A,104,72) Ferrite Bead	CTF1528	R 122	(B,62,110)	RS1/16SS102J
L 2203	(A,94,73) Ferrite Bead	CTF1528	R 123	(B,65,108)	RS1/16SS103J
L 2204	(A,105,74) Ferrite Bead	CTF1528	R 124	(B,65,104)	RS1/16SS223J
L 2205	(A,106,76) Ferrite Bead	CTF1528	R 125	(B,58,112)	RS1/16SS103J
L 2206	(A,94,76) Ferrite Bead	CTF1528	R 126	(B,56,104)	RS1/16SS223J
L 2207	(A,104,76) Ferrite Bead	CTF1528	R 127	(B,60,108)	RS1/16SS102J
L 2208	(A,94,77) Ferrite Bead	CTF1528	R 128	(B,58,108)	RS1/16SS103J
L 2209	(A,104,78) Ferrite Bead	CTF1528	R 129	(B,55,113)	RS1/16SS103J
L 2210	(A,101,68) Ferrite Bead	CTF1528	R 130	(A,54,104)	RS1/16SS104J
L 2211	(A,111,82) Chip Ferrite Bead	BTX1047	R 131	(A,53,104)	RS1/16SS473J
X 601	(A,110,31) Resonator 3.932 16 MHz	CSS1772	R 132	(A,54,103)	RS1/16SS563J
X 1101	(B,136,65) Resonator 12.288 MHz	CSS1811	R 133	(A,58,107)	RS1/16SS513J
X 1501	(A,54,60) Crystal Resonator 9.216 MHz	CSS1863	R 134	(A,64,104)	RS1/16SS104J
X 1601	(A,39,37) Crystal Resonator 9.216 MHz(A,B,C,D,E)	CSS1863	R 135	(A,65,104)	RS1/16SS513J
P 301	(A,156,30) Fuse 1.5 A	CEK1282	R 136	(A,64,103)	RS1/16SS513J
P 1401	(B,24,103) Surge Absorber	IMSA-6803-01Y900	R 137	(A,60,110)	RS1/16SS102J
P 1701	(B,72,100) Poly Switch(C,D,E)	FSMD075-24R	R 138	(A,64,106)	RS1/16SS102J
P 2101	(A,127,105) Poly Switch	FSMD075-24R	R 139	(A,66,107)	RS1/16SS564J
P 2201	(A,113,78) Poly Switch	FSMD075-24R	R 140	(A,55,113)	RS1/16SS822J
P 2202	(B,164,125) Poly Switch	FSMD075-24R	R 141	(A,56,112)	RS1/16SS202J
P 2203	(B,134,99) Poly Switch	FSMD075-24R	R 142	(A,56,114)	RS1/16SS203J
P 2206	(B,141,98) Poly Switch	FSMD075-24R	R 143	(A,55,112)	RS1/16SS333J
P 2207	(A,94,101) Fuse 3.5 A	CEK1343	R 144	(A,49,112)	RS1/10SR0R0J
P 2208	(A,107,89) Fuse 5.0 A	CEK1346	R 145	(B,50,116)	RS1/4SA102J
P 2209	(A,43,121) Poly Switch	FSMD075-24R	R 149	(A,54,119)	RS1/10SR0R0J
BZ601	(A,165,29) Buzzer	CPV1062	R 150	(B,54,116)	RS1/10SR0R0J
VL1501	(A,44,73) Variable Coil	CTC1216	R 201	(B,83,110)	RS1/16SS683J
VL1601	(A,48,45) Variable Coil(A,B,C,D,E)	CTC1216	R 202	(B,92,114)	RS1/16SS102J
CN1801	(A,153,8) 30P Connector	VKN1620	R 205	(B,86,120)	RS1/16SS0R0J
CN1802	(A,145,18) Connector	CKS6007	R 207	(A,86,121)	RS1/16SS0R0J
CN1901	(A,129,35) Connector	CKS6095	R 210	(A,109,126)	RS1/16SS0R0J
CN2001	(A,108,11) FFC/FPC Connector	CKS6646	R 213	(B,87,109)	RS1/16SS683J
CN2002	(A,71,11) FFC/FPC Connector	CKS6646	R 214	(B,84,120)	RS1/16SS152J
CN2101	(A,157,116) Connector	CKS4497	R 215	(B,85,120)	RS1/16SS101J
CN2201	(A,99,83) 3.5 DIA Jack	CKS6600	R 217	(B,90,114)	RS1/16SS473J
JA101	(A,64,132) Connector	CKM1613	R 218	(B,90,113)	RS1/16SS104J
JA1401	(A,16,120) Antenna Jack	YKS5041	R 219	(B,88,113)	RS1/16SS103J
JA2202	(A,174,119) 3.5 DIA Jack	CKS6437	R 223	(B,105,58)	RS1/10SR0R0J
JA2203	(A,131,113) RCA Jack(A,B,D,E,F,G)	CKB1111	R 224	(B,86,121)	RS1/16SS473J
	(A,131,113) RCA Jack(C)	CKB1116	R 225	(B,87,117)	RS1/16SS101J
JA2204	(A,30,131) Mini Jack(4P)	AKN1073	R 311	(B,163,41)	RS1/16SS222J
JA2205	(A,43,130) 3.5 DIA Jack	CKS6437	R 312	(B,161,40)	RS1/16SS222J
			R 313	(B,161,35)	RS1/16SS473J
			R 314	(B,174,87)	RS1/16SS6800D
			R 315	(B,174,86)	RS1/16SS3901D
			R 316	(B,174,88)	RS1/16SS2702D
			R 318	(B,167,95)	RS1/4SA0R0J
			R 320	(B,164,87)	RS1/10SR0R0J
			R 323	(A,151,52)	RS1/10SR102J
			R 324	(A,145,53)	RS1/10SR0R0J
			R 327	(A,152,29)	RS1/10SR121J
			R 328	(A,136,43)	RS1/16SS473J
			R 329	(A,153,33)	RS1/16SS220J
RESISTORS					
R 102	(B,128,87)	RS1/10SR224J			
R 105	(B,70,107)	RS1/16SS473J			
R 106	(B,70,108)	RS1/16SS473J			
R 107	(B,69,111)	RS1/16SS432J			
R 108	(B,68,115) 1 kohm	CCN1326			
R 109	(B,130,77)	RS1/16SS473J			
R 110	(B,132,80)	RS1/16SS103J			
R 111	(B,130,79)	RS1/16SS103J			
R 113	(B,132,75)	RS1/16SS473J			
R 114	(B,66,111)	RS1/16SS103J			

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 341	(A,150,48)	RS1/16SS471J	R 655	(A,73,25)	RS1/16SS101J
	R 342	(A,155,44)	RS1/16SS103J	R 656	(A,74,28)	RS1/16SS0R0J
	R 343	(A,152,44)	RS1/16SS682J	R 657	(B,98,42)	RS1/16SS103J
	R 346	(B,163,43)	RS1/16SS1303D	R 659	(B,73,29)	RS1/16SS104J
	R 347	(B,161,44)	RS1/16SS1002D	R 660	(A,92,54)	RS1/16SS101J
■	R 354	(A,169,47)	RS1/10SR0R0J	R 661	(B,86,45) (A,B,C,D,E)	RS1/16SS681J
	R 355	(B,162,57)	RS1/16SS0R0J	R 662	(A,91,51) (A,B,C,D,E)	RS1/16SS101J
	R 358	(B,156,40)	RS1/10SR0R0J	R 663	(A,102,53)	RS1/16SS0R0J
	R 359	(B,159,42)	RS1/10SR0R0J	R 664	(A,109,42)	RS1/16SS101J
	R 361	(B,156,52)	RS1/10SR0R0J	R 665	(B,103,39)	RS1/16SS471J
B	R 362	(B,122,38)	RS1/10SR103J	R 667	(A,72,38)	RS1/16SS101J
	R 363	(B,121,34)	RS1/10SR331J	R 668	(A,71,40) (G)	RS1/16SS101J
	R 364	(B,126,34)	RS1/16SS103J	R 669	(B,77,42) (G)	RS1/16SS0R0J
	R 365	(B,127,36)	RS1/16SS103J	R 670	(B,102,23)	RS1/16SS472J
	R 366	(B,129,33)	RS1/16SS103J	R 671	(A,96,50)	RS1/16SS681J
■	R 504	(B,30,32) (F,G)	RS1/16SS102J	R 673	(B,103,43)	RS1/16SS221J
	R 505	(B,27,51) (A,B,C,D,E)	RS1/16SS102J	R 675	(B,102,22)	RS1/16SS471J
	R 508	(A,25,82) (C,D,E)	RS1/16SS102J	R 677	(A,106,45)	RS1/16SS0R0J
	R 509	(B,35,62) (A,B,C,D,E)	RS1/16SS102J	R 678	(B,84,44)	RS1/16SS121J
	R 511	(B,41,46) (A,B,C,D,E)	RS1/16SS102J	R 679	(B,105,46)	RS1/16SS101J
C	R 513	(B,29,33) (A,B,C,D,E)	RS1/16SS102J	R 680	(B,102,45)	RS1/16SS101J
	R 518	(A,75,71)	RS1/8SQ0R0J	R 682	(A,106,41)	RS1/16SS680J
	R 602	(B,77,40) (G)	RS1/16SS471J	R 684	(B,99,14)	RS1/16SS102J
	R 604	(A,74,41) (G)	RS1/16SS473J	R 685	(A,103,50)	RS1/16SS102J
	R 605	(B,85,44)	RS1/16SS121J	R 686	(A,106,25)	RS1/16SS681J
■	R 607	(B,113,16)	RS1/16SS104J	R 687	(A,107,24)	RS1/16SS0R0J
	R 608	(B,103,34)	RS1/16SS104J	R 688	(A,72,27)	RS1/16SS0R0J
	R 609	(B,103,35)	RS1/16SS104J	R 689	(B,105,22)	RS1/16SS101J
	R 610	(A,105,32)	RS1/16SS100J	R 690	(A,104,23)	RS1/16SS0R0J
	R 611	(B,99,28)	RS1/16SS104J	R 691	(B,102,28)	RS1/16SS0R0J
D	R 612	(B,113,17)	RS1/16SS102J	R 693	(B,118,15)	RS1/16SS102J
	R 613	(A,105,35)	RS1/16SS473J	R 694	(B,103,33)	RS1/16SS104J
	R 614	(A,99,54)	RS1/16SS681J	R 695	(B,103,36)	RS1/16SS104J
	R 615	(A,97,50)	RS1/16SS681J	R 697	(A,106,39)	RS1/16SS471J
	R 616	(B,102,26)	RS1/16SS101J	R 698	(A,107,42)	RS1/16SS473J
■	R 617	(B,102,25)	RS1/16SS101J	R 699	(A,77,49)	RS1/16SS102J
	R 618	(A,105,46)	RS1/16SS473J	R 700	(A,72,50)	RS1/16SS472J
	R 620	(B,103,23)	RS1/16SS472J	R 701	(A,77,48)	RS1/16SS102J
	R 621	(B,103,22)	RS1/16SS471J	R 702	(A,66,41)	RS1/16SS473J
	R 622	(A,101,51)	RS1/16SS473J	R 703	(A,74,48)	RS1/16SS102J
E	R 623	(A,100,51)	RS1/16SS473J	R 704	(A,73,47)	RS1/16SS473J
	R 624	(A,99,51)	RS1/16SS473J	R 705	(A,74,49)	RS1/16SS473J
	R 625	(B,103,27)	RS1/16SS182J	R 706	(B,96,53)	RS1/16SS473J
	R 630	(B,94,20)	RS1/16SS102J	R 707	(A,95,50)	RS1/16SS101J
	R 632	(B,104,27)	RS1/16SS182J	R 708	(A,94,52)	RS1/16SS681J
■	R 633	(B,102,41)	RS1/16SS0R0J	R 709	(B,92,41)	RS1/16SS222J
	R 634	(A,73,46)	RS1/16SS0R0J	R 710	(B,91,43)	RS1/16SS101J
	R 637	(B,92,16)	RS1/16SS101J	R 711	(A,92,52)	RS1/16SS101J
	R 639	(B,104,46)	RS1/16SS182J	R 712	(A,85,53)	RS1/16SS221J
	R 640	(A,88,51)	RS1/16SS0R0J	R 713	(A,83,54)	RS1/16SS182J
F	R 641	(A,93,54)	RS1/16SS101J	R 714	(A,84,53)	RS1/16SS221J
	R 642	(A,86,51) (A,B)	RS1/16SS102J	R 715	(A,83,53)	RS1/16SS182J
	R 645	(B,102,47)	RS1/16SS182J	R 716	(B,81,24) (B,D)	RS1/16SS104J
	R 646	(B,79,20)	RS1/16SS104J	R 717	(A,82,20) (A,C,E,F,G)	RS1/16SS104J
	R 647	(A,108,39)	RS1/16SS473J	R 720	(A,90,51) (A,B,C,D,E)	RS1/16SS101J
■	R 648	(A,73,33)	RS1/16SS104J	R 722	(B,83,44)	RS1/16SS121J
	R 649	(A,75,33) (A,B,C,D,E)	RS1/16SS104J	R 723	(A,83,50) (A,B,C,D,E)	RS1/16SS104J
	R 651	(B,72,33)	RS1/16SS104J	R 724	(A,80,50) (A,B,C,D,E)	RS1/16SS102J
	R 654	(A,74,25)	RS1/16SS101J	R 725	(A,74,50)	RS1/16SS102J

<u>Circuit Symbol and No.</u>		<u>Part No.</u>	<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 726	(A,74,45)	RS1/16SS471J	R 827	(B,83,58) (A,B,C,D,E,F)	RS1/16SS2200D	
R 727	(B,77,45)	RS1/16SS104J				
R 728	(A,73,44) (A,B,C,D,E)	RS1/16SS101J	R 829	(B,77,55)	RS1/16SS750J	A
R 729	(A,75,44) (A,B,C,D,E)	RS1/16SS101J	R 831	(B,84,64)	RS1/16SS104J	
R 730	(B,85,24) (A,B,F,G)	RS1/16SS104J	R 844	(B,70,74)	RS1/16SS101J	
			R 845	(B,66,73)	RS1/16SS101J	
R 733	(B,86,23) (A,E,F,G)	RS1/16SS104J	R 846	(B,67,69)	RS1/16SS101J	
R 738	(A,69,38)	RS1/16SS104J				
R 739	(A,69,40)	RS1/16SS473J	R 850	(B,64,62)	RS1/16SS101J	
R 740	(B,92,23) (A,B,C,D,E)	RS1/16SS103J	R 851	(B,65,60)	RS1/16SS101J	
	(B,92,23) (F,G)	RS1/16SS1002D	R 852	(B,65,59)	RS1/16SS101J	
			R 853	(B,63,57)	RS1/16SS101J	
R 741	(B,87,22) (B,C,D)	RS1/16SS104J	R 854	(B,65,55)	RS1/16SS101J	
R 746	(B,75,19) (A,B,C)	RS1/16SS0R0J				
			R 855	(B,65,54)	RS1/16SS101J	
R 748	(B,87,23) (C,D,E)	RS1/16SS104J	R 859	(B,82,56)	RS1/16SS75R0D	B
R 750	(B,87,24)	RS1/16SS0R0J	R 901	(A,49,30)	RS1/16SS0R0J	
R 751	(B,85,33)	RS1/16SS0R0J	R 910	(B,58,31)	RS1/16SS104J	
R 752	(B,74,34)	RS1/16SS223J	R 920	(B,51,16) (A,B,G)	RS1/16SS101J	
R 754	(B,76,33)	RS1/16SS223J				
R 755	(B,112,16)	RS1/16SS0R0J	R 921	(B,50,14) (A,B,G)	RS1/16SS101J	
			R 922	(B,50,16) (A,B,G)	RS1/16SS101J	
R 757	(A,72,25)	RS1/16SS101J	R 923	(A,49,28)	RS1/16SS0R0J	
R 758	(B,81,30)	RS1/16SS471J	R 944	(B,33,24)	RS1/10SR0R0J	
R 761	(A,75,23)	RS1/16SS101J	R 945	(B,56,14)	RS1/16SS0R0J	
R 762	(A,75,25)	RS1/16SS101J				
R 763	(A,77,22)	RS1/16SS101J	R 946	(B,56,16)	RS1/16SS0R0J	
			R 953	(B,38,11)	RS1/10SR0R0J	
R 767	(B,105,24)	RS1/16SS105J	R 954	(B,33,26)	RS1/10SR0R0J	C
R 769	(B,100,43)	RS1/16SS104J	R 1007	(B,154,73)	RS1/16SS473J	
R 772	(A,84,20)	RS1/16SS471J	R 1008	(B,153,73)	RS1/16SS473J	
R 773	(A,85,20)	RS1/16SS471J				
R 774	(B,85,23)	RS1/16SS104J	R 1009	(B,144,73)	RS1/16SS473J	
			R 1010	(B,143,73)	RS1/16SS473J	
R 775	(A,71,40)	RS1/16SS473J	R 1011	(B,146,101)	RS1/16SS473J	
R 776	(B,80,23)	RS1/16SS104J	R 1012	(B,147,101)	RS1/16SS473J	
R 777	(B,80,16)	RS1/16SS101J	R 1013	(B,157,101)	RS1/16SS473J	
R 779	(B,90,56)	RS1/16SS472J				
R 780	(B,96,17) (C,D,E)	RS1/16SS0R0J	R 1014	(B,158,101)	RS1/16SS473J	
R 782	(B,93,34)	RS1/16SS1002D	R 1015	(B,148,71)	RS1/16SS0R0J	
			R 1016	(B,152,103)	RS1/16SS0R0J	
R 787	(B,82,29)	RS1/16SS104J	R 1017	(B,145,71)	RS1/16SS473J	D
R 789	(B,108,20)	RS1/16SS473J	R 1018	(B,154,103)	RS1/16SS473J	
R 790	(B,109,20)	RS1/16SS473J				
R 792	(B,106,20)	RS1/16SS103J	R 1019	(B,152,71)	RS1/16SS473J	
R 793	(B,79,28)	RS1/16SS104J	R 1020	(B,150,103)	RS1/16SS473J	
			R 1023	(B,143,75)	RS1/16SS473J	
R 796	(B,93,35)	RS1/16SS1001D	R 1024	(B,158,99)	RS1/16SS473J	
R 797	(B,95,26) (A,B,C,D,E)	RS1/16SS102J	R 1025	(B,154,75)	RS1/16SS473J	
	(B,95,26) (F,G)	RS1/16SS1001D				
R 798	(A,108,61)	RS1/10SR0R0J	R 1026	(B,146,99)	RS1/16SS473J	
R 800	(B,100,46)	RS1/16SS101J	R 1027	(B,145,80)	RS1/16SS0R0J	
R 801	(A,73,63)	RS1/16SS0R0J	R 1028	(B,155,95)	RS1/16SS0R0J	
			R 1040	(B,151,93)	RS1/16SS0R0J	
R 802	(A,75,63)	RS1/16SS0R0J	R 1044	(B,151,82)	RS1/16SS473J	E
R 803	(B,78,70)	RS1/16SS101J				
R 804	(B,78,71)	RS1/16SS101J	R 1047	(B,147,88)	RS1/16SS473J	
R 805	(B,81,67)	RS1/16SS101J	R 1048	(B,146,88)	RS1/16SS473J	
R 806	(B,83,66)	RS1/16SS101J	R 1057	(B,156,93)	RS1/16SS0R0J	
			R 1058	(B,151,83)	RS1/16SS473J	
R 811	(B,64,56)	RS1/16SS223J	R 1061	(B,153,78)	RS1/10SR0R0J	
R 812	(B,64,54)	RS1/16SS223J				
R 813	(B,63,61)	RS1/16SS223J	R 1062	(B,143,78)	RS1/10SR0R0J	
R 814	(B,63,59)	RS1/16SS223J	R 1063	(B,147,96)	RS1/10SR0R0J	
R 817	(B,68,74)	RS1/16SS223J	R 1064	(B,157,96)	RS1/10SR0R0J	
			R 1065	(B,154,68)	RS1/10SR0R0J	
R 818	(B,65,69)	RS1/16SS223J	R 1066	(B,144,67)	RS1/10SR0R0J	
R 821	(B,76,55) (C,D,E,F,G)	RS1/16SS470J				F
R 823	(B,73,54)	RS1/16SS104J	R 1067	(B,151,65)	RS1/10SR0R0J	
R 824	(B,81,69)	RS1/16SS75R0D	R 1068	(B,146,65)	RS1/10SR0R0J	
R 825	(B,82,67)	RS1/16SS75R0D	R 1101	(B,130,60)	RS1/16SS473J	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 1102	(B,136,62)	RS1/16SS222J	R 1423	(B,54,84) (A,B,C,D,E)	RS1/16SS474J
	R 1103	(B,126,53)	RS1/16SS473J	R 1425	(B,59,87) (A,B,C,D,E)	RS1/16SS681J
	R 1104	(B,140,58)	RS1/16SS220J	R 1426	(B,62,92) (A,B,C,D,E)	RS1/16SS271J
	R 1105	(B,139,47)	RS1/16SS101J	R 1427	(B,60,92) (A,B,C,D,E)	RS1/16SS561J
	R 1106	(B,138,47)	RS1/16SS470J	R 1437	(B,39,91) (A,B,C,D,E)	RS1/16SS0R0J
■	R 1107	(B,144,56)	RS1/16SS101J	R 1439	(A,54,83) (A,B,C,D,E)	RS1/16SS0R0J
	R 1109	(B,136,43)	RS1/8SQ102J	R 1441	(B,55,92) (A,B,C,D,E)	RS1/16SS471J
	R 1110	(B,137,47)	RS1/8SQ102J	R 1444	(B,48,88) (A,B,C,D,E)	RS1/10SR821J
	R 1111	(B,135,47)	RS1/8SQ102J	R 1445	(B,47,87) (A,B,C,D,E)	RS1/16SS473J
	R 1112	(B,141,58)	RS1/16SS220J	R 1447	(B,55,90) (A,B,C,D,E)	RS1/16SS0R0J
B	R 1113	(B,144,58)	RS1/8SQ220J	R 1448	(B,55,88) (A,B,C,D,E)	RS1/16SS132J
	R 1115	(B,131,48)	RS1/16SS0R0J	R 1449	(B,53,91) (A,B,C,D,E)	RS1/16SS751J
	R 1119	(B,142,56)	RS1/16SS104J	R 1453	(B,60,86) (A,B,C,D,E)	RS1/16SS0R0J
	R 1120	(B,128,61)	RS1/8SQ222J	R 1502	(A,51,68)	RS1/16SS0R0J
	R 1121	(B,126,61)	RS1/8SQ222J	R 1503	(A,40,70)	RS1/16SS0R0J
■	R 1122	(B,125,58)	RS1/16SS472J	R 1505	(A,50,62)	RS1/16SS103J
	R 1123	(B,125,56)	RS1/16SS472J	R 1507	(A,49,62)	RS1/16SS103J
	R 1124	(A,122,59)	RS1/8SQ0R0J	R 1508	(A,49,58)	RS1/16SS472J
	R 1205	(A,135,47)	RS1/10SR470J	R 1509	(A,48,56)	RS1/16SS472J
	R 1206	(A,135,49)	RS1/10SR470J	R 1510	(A,48,60)	RS1/16SS101J
C	R 1207	(B,142,49)	RS1/10SR820J	R 1511	(A,47,60)	RS1/16SS101J
	R 1208	(B,143,52)	RS1/10SR470J	R 1512	(A,46,57)	RS1/16SS0R0J
	R 1209	(B,142,53)	RS1/10SR470J	R 1513	(A,36,72)	RS1/16SS391J
	R 1210	(A,135,50)	RS1/10SR470J	R 1514	(B,29,102)	RS1/16SS105J
	R 1212	(B,117,45)	RS1/8SQ821J	R 1515	(B,29,98)	RS1/16SS105J
■	R 1213	(B,121,47)	RS1/8SQ821J	R 1516	(A,43,57) (A,B,C,D,E)	RS1/16SS0R0J
	R 1214	(B,114,57)	RS1/10SR821J	R 1517	(A,43,59) (A,B,C,D,E)	RS1/16SS0R0J
	R 1215	(B,115,55)	RS1/10SR821J	R 1518	(A,42,57) (A,B,C,D,E)	RS1/16SS0R0J
	R 1217	(B,116,65)	RS1/10SR821J	R 1519	(A,41,59) (A,B,C,D,E)	RS1/16SS0R0J
	R 1218	(A,125,49)	RS1/16SS0R0J	R 1520	(A,49,66)	RS1/16SS0R0J
D	R 1219	(A,125,48)	RS1/16SS0R0J	R 1522	(A,31,60) (A,B)	RS1/16SS182J
	R 1220	(B,115,50)	RS1/16SS0R0J	R 1523	(A,33,58) (A,B)	RS1/16SS332J
	R 1221	(B,120,54)	RS1/16SS0R0J	R 1524	(A,30,51) (A,B)	RS1/16SS121J
	R 1222	(B,117,60)	RS1/16SS0R0J	R 1525	(A,33,56) (A,B)	RS1/16SS102J
	R 1301	(A,80,79)	RS1/10SR0R0J	R 1526	(A,40,63) (A,B)	RS1/16SS0R0J
■	R 1305	(B,94,119)	RS1/8SQ362J	R 1527	(A,38,61) (A,B)	RS1/16SS0R0J
	R 1306	(B,91,118)	RS1/8SQ362J	R 1528	(A,40,57) (A,B)	RS1/16SS182J
	R 1307	(B,98,123)	RS1/8SQ362J	R 1529	(A,35,57) (A,B)	RS1/16SS332J
	R 1308	(B,88,118)	RS1/8SQ362J	R 1530	(A,40,54) (A,B)	RS1/16SS121J
	R 1309	(B,98,120)	RS1/16SS562J	R 1531	(A,34,56) (A,B)	RS1/16SS102J
■	R 1310	(B,91,120)	RS1/16SS562J	R 1532	(A,35,63) (A,B)	RS1/16SS0R0J
	R 1311	(B,98,121)	RS1/16SS562J	R 1533	(A,35,60) (A,B)	RS1/16SS0R0J
	R 1312	(B,90,119)	RS1/16SS562J	R 1534	(A,33,63) (A,B)	RS1/16SS0R0J
	R 1402	(B,32,100)	RS1/16SS0R0J	R 1535	(A,33,62) (A,B)	RS1/16SS0R0J
	R 1403	(A,46,92) (A,B,C,D,E)	RS1/16SS103J	R 1536	(A,33,54) (A,B)	RS1/16SS0R0J
E	R 1404	(A,43,90) (A,B,C,D,E)	RS1/4SA181J	R 1537	(A,34,54) (A,B)	RS1/16SS0R0J
	R 1405	(A,44,87) (A,B,C,D,E)	RS1/10SR0R0J	R 1538	(A,34,59) (A,B)	RS1/16SS0R0J
	R 1406	(A,54,93) (A,B,C,D,E)	RS1/10SR220J	R 1539	(A,40,59) (A,B)	RS1/16SS0R0J
	R 1407	(A,54,74) (A,B,C,D,E)	RS1/16SS101J	R 1540	(A,45,52)	RS1/10SR0R0J
	R 1408	(A,43,84) (A,B,C,D,E)	RS1/16SS0R0J	R 1542	(A,43,52)	RS1/10SR0R0J
■	R 1409	(A,55,73) (A,B,C,D,E)	RS1/16SS0R0J	R 1543	(A,33,67)	RS1/10SR0R0J
	R 1410	(A,40,83) (F,G)	RS1/16SS0R0J	R 1545	(A,48,58)	RS1/16SS0R0J
	R 1413	(B,37,91) (F,G)	RS1/16SS0R0J	R 1546	(A,47,58)	RS1/16SS0R0J
	R 1415	(B,26,103)	RS1/16SS0R0J	R 1547	(A,51,56)	RS1/8SQ0R0J
	R 1417	(B,51,87) (A,B,C,D,E)	RS1/16SS472J	R 1548	(A,34,67)	RS1/10SR0R0J
F	R 1418	(B,53,84) (A,B,C,D,E)	RS1/16SS271J	R 1549	(B,52,63)	RS1/16SS0R0J
	R 1420	(B,53,88) (A,B,C,D,E)	RS1/16SS220J	R 1550	(A,45,69)	RS1/16SS0R0J
	R 1421	(B,53,90) (A,B,C,D,E)	RS1/16SS472J	R 1551	(A,44,69)	RS1/16SS0R0J
	R 1422	(B,55,86) (A,B,C,D,E)	RS1/16SS223J	R 1552	(A,26,50) (A,B)	RS1/16SS0R0J
				R 1602	(A,42,38) (A,B,C,D,E)	RS1/16SS0R0J

Circuit Symbol and No.			Part No.	Circuit Symbol and No.			Part No.
R 1603	(A,44,49)	(A,B,C,D,E)	RS1/16SS0R0J	R 1838	(B,143,27)	(G)	RS1/16SS0R0J
R 1604	(A,35,38)	(A,B,C,D,E)	RS1/16SS103J	R 1839	(B,142,25)	(G)	RS1/16SS0R0J
R 1606	(A,33,40)	(A,B,C,D,E)	RS1/16SS103J	R 1901	(A,131,41)		RS1/16SS303J
R 1608	(A,32,39)	(A,B,C,D,E)	RS1/16SS472J	R 1904	(B,133,36)		RS1/16SS471J
R 1609	(A,31,40)	(A,B,C,D,E)	RS1/16SS472J	R 1905	(B,131,38)		RS1/16SS681J
				R 1906	(B,127,44)		RS1/10SR103J
R 1610	(A,34,41)	(A,B,C,D,E)	RS1/16SS101J	R 2105	(A,154,106)		RS1/10SR102J
R 1611	(A,33,42)	(A,B,C,D,E)	RS1/16SS101J	R 2107	(B,149,111)		RS1/16SS103J
R 1612	(A,30,40)	(A,B,C,D,E)	RS1/16SS0R0J	R 2110	(A,164,107)		RS1/16SS0R0J
R 1613	(A,40,41)	(A,B,C,D,E)	RS1/16SS0R0J				
R 1615	(A,32,41)	(A,B,C,D,E)	RS1/16SS0R0J	R 2111	(A,163,106)		RS1/16SS0R0J
				R 2112	(A,164,104)		RS1/16SS0R0J
R 1616	(A,32,43)	(A,B,C,D,E)	RS1/16SS0R0J	R 2113	(A,163,102)		RS1/16SS0R0J
R 1617	(A,37,30)	(A,B,C,D,E)	RS1/8SQ0R0J	R 2201	(A,79,81)		RS1/16SS820J
R 1701	(B,25,92)	(C,D,E)	RS1/16SS103J	R 2202	(A,85,83)		RS1/16SS820J
R 1702	(B,27,84)	(C,D,E)	RS1/4SA471J				
R 1703	(B,28,81)	(C,D,E)	RS1/4SA471J	R 2203	(A,80,87)		RS1/16SS820J
				R 2204	(A,84,87)		RS1/16SS820J
R 1704	(B,26,82)	(C,D,E)	RS1/16SS1003D	R 2205	(A,76,82)		RS1/16SS223J
R 1705	(B,24,82)	(C,D,E)	RS1/16SS1802D	R 2206	(A,85,82)		RS1/16SS223J
R 1706	(A,25,79)	(C,D,E)	RS1/16SS221J	R 2207	(A,80,86)		RS1/16SS223J
R 1709	(A,25,54)	(A,B)	RAB4CQ221J				
R 1715	(A,25,40)	(A,B)	RAB4CQ0R0J	R 2208	(A,83,86)		RS1/16SS223J
				R 2209	(A,79,83)		RS1/16SS472J
R 1716	(B,25,82)	(C,D,E)	RS1/16SS0R0J	R 2210	(A,77,83)		RS1/16SS472J
R 1717	(B,35,81)	(C,D,E)	RS1/16SS911J	R 2211	(A,83,84)		RS1/16SS472J
R 1724	(A,13,83)		RS1/10SR0R0J	R 2212	(A,82,84)		RS1/16SS472J
R 1725	(A,15,83)		RS1/10SR0R0J				
R 1729	(A,26,24)	(A,B)	RAB4CQ0R0J	R 2213	(B,170,105)		RS1/16SS821J
				R 2214	(B,172,101)		RS1/16SS472J
R 1730	(A,27,26)	(A,B,F,G)	RS1/16SS103J	R 2215	(B,170,106)		RS1/16SS223J
R 1732	(A,46,113)		RS1/10SR0R0J	R 2216	(B,172,102)		RS1/16SS472J
R 1733	(A,45,113)		RS1/10SR0R0J	R 2217	(B,173,106)		RS1/16SS223J
R 1734	(A,18,24)		RS1/10SR0R0J				
R 1735	(A,20,24)		RS1/10SR0R0J	R 2218	(B,175,107)		RS1/16SS821J
				R 2225	(B,26,108)		RS1/10SR0R0J
R 1736	(B,39,65)		RS1/10SR0R0J	R 2226	(B,32,109)		RS1/10SR0R0J
R 1737	(B,40,64)		RS1/10SR0R0J	R 2227	(B,33,129)		RS1/16SS0R0J
R 1746	(B,22,13)		RS1/10SR0R0J	R 2228	(B,35,129)		RS1/16SS0R0J
R 1747	(B,24,13)		RS1/10SR0R0J				
R 1760	(B,60,31)		RS1/10SR0R0J	R 2229	(B,29,130)		RS1/16SS0R0J
				R 2230	(B,46,117)		RS1/10SR0R0J
R 1761	(B,62,31)		RS1/10SR0R0J	R 2231	(B,42,117)		RS1/10SR0R0J
R 1765	(A,25,76)	(C,D,E)	RS1/16SS221J	R 2232	(B,129,90)		RS1/16SS820J
R 1766	(A,25,77)	(C,D,E)	RS1/16SS221J	R 2233	(B,134,95)		RS1/16SS820J
R 1767	(A,25,78)	(C,D,E)	RS1/16SS221J				
R 1801	(B,155,22)		RS1/16SS102J	R 2234	(B,131,91)		RS1/16SS223J
R 1802	(A,153,12)		RS1/16SS0R0J	R 2235	(B,131,95)		RS1/16SS223J
				R 2236	(B,134,93)		RS1/16SS472J
R 1803	(A,151,12)		RS1/16SS0R0J	R 2237	(B,128,96)		RS1/16SS472J
R 1804	(A,149,12)		RS1/16SS0R0J	R 2265	(A,111,89)		RS1/4SA0R0J
R 1805	(B,159,13)		RS1/16SS471J				
R 1806	(A,159,13)		RS1/16SS221J	R 2266	(A,94,96)		RS1/4SA0R0J
R 1807	(A,158,12)		RS1/16SS221J	R 2304	(B,150,122)	(A,C,E)	RS1/16SS0R0J
				R 2305	(B,152,122)	(B,D,F,G)	RS1/16SS0R0J
R 1808	(A,157,15)		RS1/16SS221J	R 2308	(B,120,132)	(A,B)	RS1/16SS0R0J
R 1809	(B,155,10)		RS1/16SS221J	R 2309	(B,121,132)	(C,D)	RS1/16SS471J
R 1810	(A,155,12)		RS1/16SS221J				
R 1811	(A,147,12)		RS1/16SS0R0J	R 2310	(B,122,132)	(E)	RS1/16SS0R0J
R 1814	(B,163,18)		RS1/10SR0R0J	R 2316	(B,128,132)	(G)	RS1/16SS0R0J
				R 2317	(B,129,132)	(F)	RS1/16SS471J
R 1815	(A,165,20)		RS1/4SA0R0J	R 2320	(A,105,28)	(G)	RS1/16SS0R0J
R 1816	(B,144,14)		RS1/16SS0R0J	R 2321	(A,75,40)	(G)	RS1/16SS104J
R 1822	(B,155,18)		RS1/16SS473J				
R 1823	(B,157,15)		RS1/8SQ561J	R 2333	(B,86,27)	(F,G)	RS1/16SS6800D
R 1826	(B,139,16)		RS1/16SS0R0J	R 2335	(B,94,38)	(F,G)	RS1/16SS6800D
				R 2336	(A,105,37)	(F,G)	RS1/16SS0R0J
R 1827	(A,156,22)		RS1/10SR103J	R 2338	(B,95,38)	(F,G)	RS1/16SS8201D
R 1828	(A,151,18)		RS1/16SS683J	R 2339	(A,114,32)	(F,G)	RS1/16SS8201D
R 1829	(A,151,20)		RS1/16SS683J				

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 2341 (B,99,38)
 R 2342 (B,100,38)
 R 2343 (B,101,37)
 R 2344 (B,106,45)
 R 2347 (A,81,20)

RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J
 RS1/16SS101J

C 510 (B,42,51)
 C 511 (B,51,51)
 C 513 (B,43,46) (A,B,C,D,E)
 C 514 (B,43,38) (A,B,C,D,E)
 C 516 (B,31,55) (A,B,C,D,E)
 C 602 (B,116,22)
 C 603 (A,106,31)

CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10
 CKSSYB104K16
 CKSRYB105K10
 CCSRCH220J50

CAPACITORS

C 101 (B,129,87)
 C 104 (A,119,89) 15 000 uF/16 V
 C 106 (B,66,110)
 C 108 (B,52,109)
 C 110 (B,103,119)

CKSRYB104K50
 CCH1980
 CKSRYB105K10
 CKSSYB102K50
 CKSSYB104K16

C 604 (A,105,30)
 C 605 (A,106,44)
 C 606 (A,105,25)
 C 607 (B,103,29)
 C 608 (B,98,32) 4.7 uF

CCSSCH220J50
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CCG1331

C 113 (A,59,108)
 C 114 (A,63,104)
 C 115 (A,59,112)
 C 116 (A,59,113)
 C 117 (A,56,115)

CKSSYB104K10
 CKSSYB102K50
 CKSSYB104K16
 CKSSYB123K16
 CKSRYB823K16

C 611 (B,87,25)
 C 612 (A,88,50)
 C 613 (A,75,29)
 C 615 (A,105,52)
 C 616 (A,105,54) 10 uF

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CCG1192

C 201 (B,95,122)
 C 202 (B,93,122)
 C 203 (B,101,122)
 C 204 (B,90,123)
 C 205 (A,104,125) 4.7 uF

CKSQYB105K25
 CKSQYB105K25
 CKSQYB105K25
 CKSQYB105K25
 CCG1331

C 618 (B,103,41)
 C 620 (A,70,42)
 C 625 (B,117,13)
 C 633 (B,94,29)
 C 639 (B,94,28)

CCSSCH101J50
 CKSSYB104K10
 CKSSYB102K50
 CKSSYB104K10
 CKSSYB104K10

C 206 (A,92,122)
 C 207 (B,119,127)
 C 212 (B,82,113) 4.7 uF
 C 216 (A,103,111) 4 700 uF/16 V
 C 217 (A,69,112)

XCEVW100M16
 CKSRYB104K16
 CCG1201
 CCH2085
 XCEVW101M16

C 801 (B,81,58)
 C 802 (B,80,55)
 C 803 (A,71,67)
 C 804 (B,70,70)
 C 805 (B,71,70)

CKSSYB104K10
 CKSSYB104K10
 CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10

C 218 (A,110,125)
 C 219 (B,89,115) 10 uF
 C 220 (A,90,126) 0.1 uF
 C 312 (A,171,85)
 C 313 (B,169,90)

CKSRYB104K50
 CCG1192
 CCG1357
 XCEVW101M16
 CKSRYB105K16

C 806 (B,73,70)
 C 807 (B,77,53) (C,D,E,F,G)
 C 810 (A,72,66)
 C 811 (B,70,67)

CKSRYB105K10
 CCSSCH271J50
 CKSSYB104K10
 CKSRYB105K10

C 314 (B,161,36)
 C 317 (B,145,61)
 C 318 (B,150,56)
 C 320 (A,150,56)
 C 321 (A,154,29)

CKSSYB104K10
 CKSQYB104K25
 CKSQYB104K25
 XCEVW101M16
 CKSSYB102K50

C 812 (B,80,68)
 C 813 (B,66,71)
 C 814 (B,81,66)
 C 815 (B,67,70)
 C 816 (B,81,65)

CKSSYB104K10
 CKSRYB105K10
 CKSSYB104K10
 CKSRYB105K10
 CKSSYB104K10

C 322 (A,137,43)
 C 323 (A,143,40)
 C 324 (A,152,32)
 C 327 (A,149,45)
 C 328 (A,152,48) 0.1 uF

CKSRYB105K10
 XCEVW101M16
 CKSSYB104K10
 CKSSYB104K16
 CCG1266

C 817 (B,66,67)
 C 818 (B,81,64)
 C 819 (B,66,66)
 C 820 (B,81,63)
 C 821 (B,66,64)

CKSQYB105K16
 CKSSYB104K10
 CKSQYB105K16
 CKSSYB104K10
 CKSQYB105K16

C 329 (A,155,45)
 C 335 (B,164,43)
 C 336 (B,171,46) 10 uF
 C 337 (B,167,54) 10 uF
 C 339 (B,171,48) 10 uF

CKSSYB102K50
 CCSSCH101J50
 CCG1236
 CCG1236
 CCG1236

C 822 (B,82,62)
 C 823 (B,67,62)
 C 824 (B,82,61)
 C 825 (B,67,61)
 C 826 (B,82,60)

CKSSYB104K10
 CKSRYB105K10
 CKSSYB104K10
 CKSRYB105K10
 CKSSYB104K10

C 342 (B,156,42)
 C 343 (B,154,51)
 C 344 (B,147,61)
 C 345 (B,152,56)
 C 347 (B,127,35)

CKSSYB104K16
 CKSRYB104K50
 CKSRYB105K10
 CKSRYB105K10
 CKSSYB104K10

C 827 (B,67,59)
 C 828 (B,82,59)
 C 829 (B,67,58)
 C 830 (B,67,57)
 C 831 (B,68,55)

CKSRYB105K10
 CKSSYB104K10
 CKSRYB105K10
 CKSRYB105K10
 CKSRYB105K10

C 349 (A,152,40)
 C 502 (B,30,46) (A,B,C,D,E)
 C 503 (B,29,57) 4.7 uF(A,B,C,D,E)
 C 504 (B,31,47) (A,B,C,D,E)
 C 505 (B,38,57) 4.7 uF(A,B,C,D,E)

XCEVW470M16
 CKSRYB105K10
 CCG1201
 CKSRYB105K10
 CCG1201

C 832 (B,79,57)
 C 833 (A,76,58) 10 uF
 C 834 (B,74,54)
 C 835 (A,76,56)
 C 836 (A,73,61)

CKSSYB104K10
 CCG1192
 CKSSYB104K10
 CKSSYB104K10
 CKSQYB104K25

C 506 (A,33,82) (C,D,E)
 C 507 (A,26,82) (C,D,E)
 C 508 (A,28,86) (C,D,E)

CKSRYB105K10
 CKSSYB104K16
 CKSRYB105K10

C 837 (A,78,61)
 C 838 (A,73,58) 10 uF
 C 839 (A,78,60) 10 uF

CKSQYB104K25
 CCG1192
 CCG1192

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
C 840	(B,78,68)	CKSSYB104K10	C 1104	(B,130,59)	CKSSYB123K16
C 841	(B,74,70)	CKSRYB105K10	C 1105	(A,132,59)	CKSSYB104K16
			C 1106	(A,130,59)	CKSQYB225K10
C 842	(B,75,70)	CKSRYB105K10			
C 843	(B,77,70)	CKSRYB105K10	C 1107	(B,130,50)	CKSRYB105K16
C 901	(A,47,27)	CKSRYB105K10	C 1108	(A,138,56)	CKSQYB104K25
C 902	(B,43,27)	CKSRYB105K10	C 1109	(A,135,53)	CKSQYB104K25
C 903	(B,40,28)	CKSRYB105K10	C 1110	(A,133,55)	CKSQYB104K25
			C 1111	(B,141,56)	CKSSYB103K16
C 904	(B,43,28)	CKSRYB105K10			
C 905	(B,40,29) (A,B,C,E)	CKSRYB105K10	C 1112	(A,131,57)	CKSQYB104K25
C 906	(B,43,30) (A,B,C,E)	CKSRYB105K10	C 1113	(A,136,59)	CKSQYB104K25
C 907	(B,40,31) (A,B,C,E)	CKSRYB105K10	C 1114	(B,127,58) 10 uF	CCG1192
C 908	(A,48,27)	CKSSYB104K10	C 1115	(A,129,57) 10 uF	CCG1192
			C 1116	(A,142,53) 10 uF	CCG1192
C 909	(B,47,21)	CKSRYB105K10			
C 910	(B,48,18)	CKSRYB105K10	C 1117	(B,127,56) 10 uF	CCG1192
C 911	(B,49,21)	CKSRYB105K10	C 1118	(B,128,64) 10 uF	CCG1192
C 912	(B,50,18) (A,B,G)	CKSRYB105K10	C 1119	(B,126,64) 10 uF	CCG1192
C 913	(B,50,21) (A,B,G)	CKSRYB105K10	C 1120	(A,140,53)	CKSQYB104K25
			C 1123	(B,139,60)	CCSSCH121J50
C 914	(B,51,18) (A,B,G)	CKSRYB105K10			
C 915	(A,56,32) 10 uF	CCG1192	C 1125	(B,140,61)	CCSSCH121J50
C 916	(B,57,31)	CKSSYB104K10	C 1126	(B,140,63)	CCSSCH121J50
C 917	(A,55,31)	CKSSYB104K10	C 1201	(A,123,46)	CKSSYB104K16
C 918	(A,53,27)	CKSQYB104K25	C 1202	(A,124,46) 10 uF	CCG1192
			C 1205	(B,116,49) 10 uF	CCG1192
C 919	(A,53,30)	CKSQYB104K25			
C 920	(A,51,27) 10 uF	CCG1192	C 1207	(B,141,49)	CCSSCH470J50
C 921	(A,51,30) 10 uF	CCG1192	C 1208	(B,146,52)	CCSSCH121J50
C 927	(B,54,18)	CKSRYB105K10	C 1209	(B,144,53)	CCSSCH121J50
C 928	(B,55,21)	CKSRYB105K10	C 1210	(A,121,57)	CKSSYB104K16
			C 1211	(A,123,57) 10 uF	CCG1192
C 939	(B,52,21)	CKSRYB105K10			
C 940	(B,53,18)	CKSRYB105K10	C 1216	(A,120,66)	CKSSYB104K16
C 941	(B,53,21)	CKSRYB105K10	C 1217	(A,121,67) 10 uF	CCG1192
C 1003	(B,152,68)	CKSQYB105K16	C 1222	(B,119,46)	CKSRYB182K50
C 1004	(B,150,68)	CKSQYB105K16	C 1223	(B,121,49)	CKSRYB182K50
			C 1224	(B,109,58)	CKSRYB182K50
C 1005	(B,147,68)	CKSQYB105K16			
C 1006	(B,145,68)	CKSQYB105K16	C 1225	(B,113,55)	CKSRYB182K50
C 1007	(B,149,106)	CKSQYB105K16	C 1227	(B,117,68)	CKSRYB182K50
C 1008	(B,151,106)	CKSQYB105K16	C 1229	(A,115,49)	CKSSYB104K16
C 1009	(B,153,106)	CKSQYB105K16	C 1230	(A,111,57) 10 uF	CCG1192
			C 1231	(A,112,59)	CKSSYB104K16
C 1010	(B,155,106)	CKSQYB105K16			
C 1011	(B,145,72)	CCSSCH330J50	C 1232	(A,110,65) 10 uF	CCG1192
C 1012	(B,154,102)	CCSSCH330J50	C 1233	(A,114,69)	CKSSYB104K16
C 1013	(B,152,72)	CCSSCH330J50	C 1301	(B,86,90) 2.2 uF	CCG1218
C 1014	(B,150,102)	CCSSCH330J50	C 1302	(B,86,88) 2.2 uF	CCG1218
			C 1303	(B,93,82) 10 uF	CCG1192
C 1015	(B,144,75)	CCSSCH330J50			
C 1016	(B,157,99)	CCSSCH330J50	C 1304	(B,87,81) 10 uF	CCG1192
C 1017	(B,153,75)	CCSSCH330J50	C 1305	(B,85,93)	CKSRYB105K10
C 1018	(B,147,99)	CCSSCH330J50	C 1306	(B,86,91)	CKSRYB105K10
C 1019	(B,145,78)	CKSRYB105K16	C 1307	(B,73,93)	CKSRYB105K10
			C 1308	(B,73,92)	CKSRYB105K10
C 1020	(B,155,96)	CKSRYB105K16			
C 1021	(B,145,77)	CKSSYB104K16	C 1314	(A,73,99)	XCEVW100M16
C 1022	(B,155,98)	CKSSYB104K16	C 1315	(B,73,90) 2.2 uF	CCG1218
C 1028	(B,151,90)	CKSSYB104K16	C 1317	(A,73,92)	XCEVW100M16
C 1039	(B,156,90) 10 uF	CCG1234	C 1319	(B,89,81)	CKSQYB104K25
			C 1321	(B,85,81)	CKSQYB104K25
C 1040	(B,150,81) 10 uF	CCG1192			
C 1041	(B,158,92) 10 uF	CCG1192	C 1322	(A,85,76)	XCEVW470M16
C 1042	(B,157,94)	CKSRYB105K10	C 1323	(A,74,77)	XCEVW470M16
C 1043	(B,149,90)	CKSRYB105K10	C 1410	(A,55,92) (A,B,C,D,E)	CKSSYB103K16
C 1101	(B,134,62)	CCSSCH120J50	C 1412	(A,50,87) (A,B,C,D,E)	CCSSCH270J50
			C 1413	(A,41,88) (A,B,C,D,E)	CKSSYB103K16
C 1102	(B,138,63)	CCSSCH120J50			
C 1103	(B,129,50)	CKSRYB105K16	C 1424	(B,42,93) (A,B,C,D,E)	CKSSYB103K16

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 1428 (B,55,84) (A,B,C,D,E)
 C 1430 (B,57,84) (A,B,C,D,E)
 C 1431 (B,61,85) (A,B,C,D,E)
 C 1432 (B,61,92) (A,B,C,D,E)

CKSRYB105K16
 CKSSYB222K50
 CCSSCH220J50
 CKSSYB102K50

C 2204 (A,86,88) 10 uF
 C 2205 (B,163,127)
 C 2208 (B,26,110)

CCG1192
 CCSSCH101J50
 CKSRYB104K50

C 1435 (B,59,86) (A,B,C,D,E)
 C 1443 (B,46,87) (A,B,C,D,E)
 C 1444 (B,44,92) (A,B,C,D,E)
 C 1445 (B,55,91) (A,B,C,D,E)
 C 1447 (B,32,103) (A,B,C,D,E)
 (B,32,103) (F,G)

CKSSYB103K25
 CKSSYB472K25
 CKSSYB391K50
 CCSSCH220J50
 CCSSCH150J50
 CKSSYB103K16

C 2209 (B,30,110)
 C 2210 (B,128,94) 10 uF
 C 2211 (B,136,93) 10 uF
 C 2217 (A,109,76)
 C 2220 (B,170,103) 4.7 uF

CKSRYB104K50
 CCG1192
 CCG1192
 CKSRYB104K50
 CCG1201

C 1501 (A,54,54)
 C 1502 (A,54,56)
 C 1503 (A,56,55) 10 uF
 C 1504 (A,46,55) 10 uF
 C 1505 (A,48,67)

CKSSYB104K16
 CKSSYB104K16
 CCG1192
 CCG1192
 CKSSYB104K16

C 2221 (B,175,104) 4.7 uF
 C 2225 (B,24,113)
 C 2226 (B,31,132)
 C 2227 (B,113,79)
 C 2228 (A,108,75)

CCG1201
 CCSSCH270J50
 CCSSCH270J50
 CCSSCH270J50
 CCSSCH270J50

C 1507 (A,47,68)
 C 1508 (A,47,69)
 C 1509 (A,42,67)
 C 1511 (A,47,79)
 C 1512 (A,42,79)

CKSSYB224K6R3
 CKSSYB102K50
 CKSSYB104K16
 CCSSCH220J50
 CCSSCH271J50

C 2231 (B,170,107)
 C 2232 (B,173,107)
 C 2233 (A,172,103)

CCSRCH101J50
 CCSRCH101J50
 CCSRCH121J50

C 1515 (A,45,60)
 C 1518 (A,37,70)
 C 1519 (B,28,101)
 C 1523 (A,40,65)
 C 1533 (A,41,83) (A,B,C,D,E)
 (A,41,83) (F,G)

CKSSYB104K16
 CCSSCH102J50
 CCSSCH471J50
 CKSSYB152K50
 CCSSCH220J50
 CCSSCH100D50

C 1601 (A,36,32) (A,B,C,D,E)
 C 1602 (A,36,34) (A,B,C,D,E)
 C 1603 (A,38,33) 10 uF(A,B,C,D,E)
 C 1604 (A,30,37) 10 uF(A,B,C,D,E)

CKSSYB104K16
 CKSSYB104K16
 CCG1192
 CCG1192

C 1605 (A,41,41) (A,B,C,D,E)
 C 1607 (A,42,43) (A,B,C,D,E)
 C 1608 (A,43,43) (A,B,C,D,E)
 C 1609 (A,41,47) (A,B,C,D,E)
 C 1611 (A,53,43) (A,B,C,D,E)
 C 1612 (A,53,48) (A,B,C,D,E)

CKSSYB104K16
 CKSSYB224K6R3
 CKSSYB102K50
 CKSSYB104K16
 CCSSCH220J50
 CCSSCH820J50

C 1613 (A,34,45) (A,B,C,D,E)
 C 1617 (A,57,47) (A,B,C,D,E)
 C 1703 (A,25,86) (C,D,E)
 C 1705 (A,26,57) 10 uF(A,B,C,D,E)
 C 1706 (A,25,57) (A,B,C,D,E)

CKSSYB104K16
 CCSSCH100D50
 CKSSYB104K10
 CCG1192
 CKSSYB104K10

C 1707 (A,26,46) 10 uF(A,B,C,D,E)
 C 1708 (A,25,46) (A,B,C,D,E)
 C 1710 (B,35,80) (C,D,E)
 C 1711 (B,20,16) (A,B,C,D,E)
 C 1801 (B,162,13)
 C 1804 (B,166,16)
 C 1805 (A,166,13)

CCG1192
 CKSSYB104K10
 CKSSYB104K16
 CKSSYB104K16
 CKSSYB104K10
 CKSSYB104K16
 CKSSYB104K16

C 1806 (B,157,10)
 C 1813 (B,158,11)
 C 1814 (B,162,8)
 C 1815 (B,145,11)
 C 1824 (B,91,83)

CCSSCH101J50
 CCSSCH101J50
 CCSSCH270J50
 CCSSCH270J50
 CKSQYB104K25

C 1901 (B,131,41)
 C 2101 (B,157,109)
 C 2102 (B,156,111)
 C 2103 (B,159,113)
 C 2201 (A,76,88) 10 uF

CKSSYB104K10
 CCSRCH101J50
 CCSRCH101J50
 CCSRCH101J50
 CCG1192

C 2202 (A,85,84) 10 uF
 C 2203 (A,81,88) 10 uF

CCG1192
 CCG1192

IC 7908 (B,78,88) V AMP IC
 IC 7911 (B,74,81) V AMP IC
 IC 7912 (B,73,69) V AMP IC
 IC 8001 (B,118,65) Interface IC(A,B,C,E)

BH7673G
 BH7673G
 BH7673G
 MN864779KT

IC 7003 (A,84,105) IC
 IC 7004 (A,17,35) Regulator IC
 IC 7008 (A,122,48) Regulator IC(A,B,C,E)
 IC 7009 (B,144,75) Regulator IC
 IC 7010 (A,87,45) Regulator IC

NJM2387ADL3
 MM3479A18P
 MM3479A12P
 MM3479A33P
 MM3411A15N

IC 7011 (B,31,79) IC
 IC 7101 (B,56,71) DC/DC Converter IC
 IC 7202 (A,101,108) DC/DC Converter IC
 IC 7203 (A,95,87) DC/DC Converter IC
 IC 7601 (B,166,30) CONV IC

AN33012UA
 LTC3858EGN
 AN33014UA
 AN33014UA
 WM8761BGED

IC 7602 (B,145,26) CONV IC
 IC 7603 (B,143,54) CONV IC
 IC 7701 (B,47,38) Dual OP-AMP
 IC 7703 (B,147,65) AD Convrtcr IC
 IC 7704 (A,26,35) IC

WM8761BGED
 WM8761BGED
 NJM4565V
 AK5357VT
 TC4066BFT

IC 7705 (A,11,106) Op-amp IC
 IC 7706 (A,49,41) Interface IC
 IC 7709 (B,47,33) Op-amp IC
 IC 7851 (A,70,9) Connector(G)
 IC 7901 (B,68,43) V AMP IC
 IC 7902 (B,71,43) V AMP IC

NJU7043V
 ML7247-001TBZ0
 NJU7043V
 NJM2235V
 BH7673G
 BH7673G

IC 7903 (A,70,44) V AMP IC
 IC 7904 (A,66,45) V AMP IC
 IC 7905 (A,85,62) V PRO SYS LSI
 IC 7906 (A,99,59) IC
 IC 7907 (A,98,67) Buffer Logic IC

BH7673G
 BH7673G
 ML86V7675TBZA3A
 TC74LCX541FK
 TC7SZ125FUS1

Circuit Symbol and No.			Part No.	Circuit Symbol and No.			Part No.
IC 8003	(A,129,67)	CONV IC(A,B,C,E)	WM8761BGED	D 8007	(B,129,99)	Diode(A,B,C,E)	EZAEG2A50AX
				D 8008	(B,127,99)	Diode(A,B,C,E)	EZAEG2A50AX
IC 8103	(A,151,78)	IC	NJM2115V				
IC 8202	(B,53,25)	Logic IC(A,B)	TC7WZ34FK	D 8011	(B,121,99)	Diode(A,B,C,E)	EZAEG2A50AX
IC 8501	(A,18,90)	IC(A,B,C,D,E)	TC7SH08FUS1	D 8012	(B,119,101)	Diode(A,B,C,E)	EZAEG2A50AX
IC 8502	(B,144,93)	Interface IC	MAX14644ETA	D 8013	(A,118,77)	Rectifier Diode(A,B,C,E)	DA2J101
IC 8504	(A,12,90)	L-MOS And Gate(A,B,C,D,E)	TC7SET08FUS1	D 8014	(B,126,102)	Diode(A,B,C,E)	EZAEG2A50AX
				D 8015	(A,127,79)	Rectifier Diode(A,B,C,E)	DAN202UM
IC 8505	(A,46,109)	L-MOS And Gate(A,B)	TC7SET08FUS1				
IC 8506	(A,38,110)	IC(A,B)	TC7SH08FUS1	D 8016	(B,124,103)	Diode(A,B,C,E)	EZAEG2A50AX
IC 8507	(A,42,110)	L-MOS And Gate(A,B)	TC7SET08FUS1	D 8501	(A,14,87)	Rectifier Diode(A,B,C,D,E)	DA2J101
IC 8601	(A,25,9)	Dual OP-AMP	NJM4565V	D 8506	(B,147,101)	Diode	EZAEG2A50AX
Q 7002	(A,74,102)	Resistor Built-IN TR	LTC014EEB	D 8507	(B,145,105)	Diode	EZAEG2A50AX
				D 8508	(B,147,102)	Diode	EZAEG2A50AX
Q 7011	(A,111,47)	IC	RZQ050P01				
Q 7012	(A,117,48)	Bipolar Transistor	LSCR523UB	D 8509	(B,145,103)	Diode	EZAEG2A50AX
Q 7013	(A,26,67)	Power MOS FET	ATP112-H	D 8601	(A,49,14)	Diode	DZ2S068C
Q 7014	(A,16,75)	Chip Transistor	2SB1689	D 8602	(A,36,10)	Diode	DZ2S068C
Q 7015	(A,12,78)	Bipolar Transistor	LSCR523UB	L 7003	(A,35,63)	SMD Inductor	CTH1544
				L 7101	(A,54,61)	Inductor	CTH1482
Q 7016	(A,67,85)	IC	RZQ050P01				
Q 7017	(A,71,89)	Bipolar Transistor	LSCR523UB	L 7102	(A,54,82)	Choke Coil 3.6 uH	CTH1479
Q 7101	(A,46,79)	FET	FK8V03040	L 7103	(B,38,76)	Inductor	CTF1738
Q 7102	(A,46,63)	FET	FK8V03040	L 7201	(B,113,110)	SMD Inductor	CTH1524
Q 7103	(A,42,79)	FET	FK8V03050	L 7202	(B,107,90)	SMD Inductor	CTH1524
				L 7203	(B,106,113)	Inductor	CTF1793
Q 7104	(A,42,63)	FET	FK8V03050				
Q 7201	(A,144,71)	Resistor Built-IN TR	LTC014EEB	L 7204	(B,100,93)	Inductor	CTF1793
Q 7202	(A,149,69)	Bipolar Transistor	LSAR523UB	L 7301	(B,87,44)	Chip Ferrite Bead	BTX1046
Q 7203	(A,145,73)	Resistor Built-IN TR	LTC014EEB	L 7302	(B,92,45)	Chip Ferrite Bead	VTL1183
Q 7204	(A,150,72)	Bipolar Transistor	LSAR523UB	L 7303	(B,147,34)	Inductor(A,B,G)	CTF1795
				L 7304	(B,150,33)	Inductor(A,B,G)	CTF1795
Q 7703	(B,31,37)	Bipolar Transistor	LSCR523UB				
Q 7704	(A,34,31)	Resistor Built-IN TR	LTC044EEB	L 7305	(B,153,30)	Inductor	CTF1795
Q 7705	(A,32,34)	Resistor Built-IN TR	LTC044EEB	L 7306	(B,155,31)	Inductor	CTF1795
Q 7851	(A,79,95)	Bipolar Transistor(G)	LSCR523UB	L 7307	(B,157,32)	Inductor	CTF1795
Q 7852	(A,59,11)	Bipolar Transistor(G)	LSCR523UB	L 7308	(B,154,32)	Inductor	CTF1795
Q 7901	(B,68,49)	Bipolar Transistor	LSCR523UB	L 7309	(B,143,44)	Inductor	CTF1795
Q 7902	(B,71,49)	Bipolar Transistor	LSCR523UB	L 7310	(B,99,44)	Inductor	CTF1795
Q 7903	(A,69,50)	Bipolar Transistor	LSCR523UB	L 7311	(B,100,46)	Inductor	CTF1795
Q 7904	(A,65,51)	Bipolar Transistor	LSCR523UB	L 7312	(B,100,48)	Inductor	CTF1795
Q 7905	(B,64,54)	Bipolar Transistor	LSCR523UB	L 7313	(B,101,44)	Inductor	CTF1795
Q 7906	(A,77,73)	Bipolar Transistor	LSCR523UB	L 7314	(B,101,46)	Inductor	CTF1795
Q 7907	(B,78,78)	Bipolar Transistor	LSCR523UB				
				L 7315	(B,102,48)	Inductor	CTF1795
Q 7908	(B,72,65)	Bipolar Transistor	LSCR523UB	L 7501	(A,106,40)	Inductor	CTF1736
Q 8001	(A,124,92)	Resistor Built-IN TR(A,B,C,E)	LTC023EEB	L 7502	(A,156,50)	Inductor	CTF1736
Q 8002	(A,122,96)	Bipolar Transistor(A,B,C,E)	LSAR523UB	L 7601	(B,170,21)	Inductor	CTF1786
Q 8003	(A,122,74)	Chip Transistor(A,B,C,E)	RN4982	L 7602	(B,140,20)	Inductor	CTF1786
Q 8101	(A,152,85)	Transistor	2SAR293PGZE				
				L 7603	(B,152,50)	Inductor	CTF1786
Q 8501	(A,143,98)	Bipolar Transistor	LSAR523UB	L 7704	(B,157,65)	Inductor	CTF1558
Q 8601	(A,32,13)	Chip Transistor	RN4983	L 7705	(B,153,61)	Inductor	CTF1558
D 7006	(A,31,72)	Diode	RB080L-30	L 7706	(B,50,43)	Ferrite Bead	CTF1528
				L 7707	(B,32,26)	Chip Ferrite Bead	BTX1047
D 7101	(B,49,67)	Schottky Diode	DB2J41100				
D 7102	(B,49,66)	Schottky Diode	DB2J41100	L 7902	(A,73,65)	Chip Ferrite Bead	BTX1047
D 7201	(B,102,112)	Diode	RB060M-30	L 7903	(A,84,75)	Chip Ferrite Bead	BTX1047
D 7202	(B,96,92)	Diode	RB060M-30	L 7904	(A,90,48)	Chip Ferrite Bead	BTX1047
D 7501	(B,132,29)	Schottky Diode	RB501VM-40	L 7905	(A,83,42)	Chip Ferrite Bead	BTX1047
				L 7906	(A,102,69)	Chip Ferrite Bead	BTX1047
D 7502	(A,132,26)	Schottky Diode	RB501VM-40				
D 7512	(B,93,27)	Diode	DZ2J039M0	L 7907	(A,101,64)	Chip Ferrite Bead	BTX1047
D 8001	(B,136,101)	Diode(A,B,C,E)	EZAEG2A50AX	L 7909	(A,101,66)	Chip Beads	VTL1126
D 8002	(B,134,101)	Diode(A,B,C,E)	EZAEG2A50AX	L 7915	(A,90,52)	Inductor	CTF1787
D 8003	(B,133,99)	Diode(A,B,C,E)	EZAEG2A50AX	L 7916	(A,87,52)	Inductor	CTF1787
				L 7917	(A,95,65)	Inductor	CTF1787
D 8004	(B,132,99)	Diode(A,B,C,E)	EZAEG2A50AX				
D 8005	(B,131,101)	Diode(A,B,C,E)	EZAEG2A50AX	L 7918	(A,95,63)	Inductor	CTF1787
D 8006	(B,129,101)	Diode(A,B,C,E)	EZAEG2A50AX	L 7919	(A,85,53)	Inductor	CTF1787

Circuit Symbol and No.**Part No.**

L 7920	(A,84,53)	Inductor	CTF1787
L 7921	(A,81,52)	Inductor	CTF1787
L 7922	(A,85,72)	Inductor	CTF1787
L 7923	(A,87,71)	Inductor	CTF1787
L 7930	(A,107,61)	Chip Beads	VTL1127
L 7931	(A,105,60)	Chip Beads	VTL1127
L 7932	(A,107,60)	Chip Beads	VTL1127
L 7933	(A,105,59)	Chip Beads	VTL1127

L 7934	(A,107,58)	Chip Beads	VTL1127
L 7935	(A,105,58)	Chip Beads	VTL1127
L 7936	(A,107,57)	Chip Beads	VTL1127
L 7937	(A,105,56)	Chip Beads	VTL1127
L 8001	(B,135,97)	Noise Filter(A,B,C,E)	CTF1834

L 8002	(B,128,97)	Noise Filter(A,B,C,E)	CTF1834
L 8003	(B,130,97)	Noise Filter(A,B,C,E)	CTF1834
L 8004	(B,133,97)	Noise Filter(A,B,C,E)	CTF1834
L 8005	(B,114,73)	Ferrite Bead(A,B,C,E)	CTF1528
L 8006	(B,125,67)	Chip Beads(A,B,C,E)	VTL1127

L 8007	(B,125,66)	Chip Beads(A,B,C,E)	VTL1127
L 8008	(B,125,65)	Chip Beads(A,B,C,E)	VTL1127
L 8009	(B,125,63)	Chip Beads(A,B,C,E)	VTL1126
L 8011	(A,128,75)	Inductor(A,B,C,E)	CTF1786
L 8012	(A,114,80)	Inductor(A,B,C,E)	CTF1795

L 8101	(A,161,83)	Inductor	LCYC1R0K2125
L 8102	(A,157,85)	Chip Ferrite Bead	OTL8019
L 8103	(B,156,76)	Inductor	CTF1547
L 8104	(B,156,77)	Inductor	CTF1547
L 8201	(B,60,19)	Ferrite Bead	CTF1528

L 8202	(B,59,19)	Ferrite Bead	CTF1528
L 8203	(B,58,19)	Ferrite Bead	CTF1528
L 8204	(B,137,15)	Ferrite Bead	CTF1528
L 8205	(B,74,23)	Ferrite Bead	CTF1528
L 8401	(B,109,31)	Coil(A,B,C,D)	CTH1554
	(B,109,31)	Inductor(E,F,G)	CTF1731

L 8402	(B,107,31)	Coil(A,B,C,D)	CTH1554
	(B,107,31)	Inductor(E,F,G)	CTF1731
L 8403	(B,105,31)	Coil(A,B,C,D)	CTH1554
	(B,105,31)	Inductor(E,F,G)	CTF1731
L 8404	(B,103,31)	Coil(A,B,C,D)	CTH1554
	(B,103,31)	Inductor(E,F,G)	CTF1731

L 8501	(B,144,98)	Choke Coil 90 ohm	CTH1319
L 8502	(B,142,98)	Choke Coil 90 ohm	CTH1319

X 7701	(A,44,51)	Resonator 12.288 MHz	CSS1811
X 7901	(A,91,74)	Crystal Resonator 32.000 MHz	CSS1818
X 8001	(B,109,73)	Resonator 27.000 MHz(A,B,C,E)	CSS1768
P 7001	(B,66,122)	Poly Switch(A,B)	MINISMDC150F/24

CN7001	(A,56,115)	Connector	CKS4977
CN7301	(B,103,39)	B TO B Connector	CKS6547
CN7302	(B,140,39)	B TO B Connector	CKS6549
CN7701	(B,24,21)	B TO B Connector	CKS6346
CN7851	(B,43,95)	Connector(G)	CKS5856

CN8101	(B,165,82)	Connector	CKS6599
CN8201	(B,69,11)	FFC/FPC Connector	CKS6646
CN8202	(B,87,118)	Plug	CKM1599
CN8203	(B,151,10)	FFC/FPC Connector	CKS6646
CN8204	(B,70,95)	Connector	CKS6007

CN8401	(B,114,15)	FFC/FPC Connector	CKS6646
CN8502	(B,62,128)	Connector(A,B,C,D,E)	CKS6603
JA7501	(A,107,22)	Connector	CKS6282
JA7502	(A,159,33)	Connector	CKS6438

Circuit Symbol and No.**Part No.**

JA8001	(B,129,110)	Connector(A,B,C,E)	CKS6560
JA8102	(B,168,124)	Connector	CKS5702
JA8501	(B,151,116)	Connector	DKN1417
JA8502	(B,46,128)	Connector(A,B)	CKS6495
JA8503	(B,14,128)	Jack	CKN1040
JA8601	(B,42,10)	Connector	CKS6437
		BT Module	CWX4710

RESISTORS

R 7001	(A,71,112)	(A,B)	RS1/4SA0R0J
R 7008	(A,75,104)		RS1/16SS473J
R 7011	(A,75,103)		RS1/16SS2401D
R 7017	(A,77,104)		RS1/16SS8201D
R 7018	(A,76,102)		RS1/16SS2201D
R 7029	(A,20,33)		RS1/16SS102J

R 7032	(A,17,38)		RS1/8SQ0R0J
R 7035	(B,141,72)		RS1/16SS102J
R 7041	(A,118,45)		RS1/16SS683J
R 7049	(A,111,49)		RS1/10SR103J
R 7050	(A,115,47)		RS1/16SS683J

R 7056	(A,104,47)		RS1/8SQ0R0J
R 7057	(A,107,46)		RS1/10SR331J
R 7066	(B,33,70)		RS1/16SS2702D
R 7067	(B,33,71)		RS1/16SS1101D
R 7068	(B,33,72)		RS1/16SS2701D

R 7071	(A,23,78)	0.011 ohm	CCN1341
R 7077	(B,34,73)		RS1/16SS1103D
R 7078	(B,31,70)		RS1/16SS562J
R 7079	(B,33,69)		RS1/16SS0R0J
R 7082	(B,34,70)		RS1/16SS0R0J

R 7086	(A,14,75)		RS1/16SS102J
R 7087	(A,13,76)		RS1/16SS102J
R 7088	(A,14,82)		RS1/16SS103J
R 7091	(B,28,73)		RS1/16SS0R0J
R 7092	(A,75,86)		RS1/16SS683J

R 7093	(A,73,89)		RS1/16SS683J
R 7094	(A,67,88)		RS1/10SR103J
R 7098	(A,12,81)		RS1/16SS103J
R 7099	(B,66,116)	(A,B)	RS1/4SA0R0J
R 7101	(B,53,55)		RS1/16SS0R0J

R 7102	(B,57,55)		RS1/16SS0R0J
R 7103	(B,61,77)		RS1/16SS0R0J
R 7104	(B,62,78)		RS1/16SS1502D
R 7105	(B,63,78)		RS1/16SS4303D
R 7106	(B,63,76)		RS1/16SS8202D

R 7107	(B,60,55)		RS1/16SS104J
R 7109	(B,61,66)		RS1/16SS0R0J
R 7110	(B,62,64)		RS1/16SS1802D
R 7111	(B,63,65)		RS1/16SS4703D
R 7112	(B,63,67)		RS1/16SS1503D

R 7113	(B,65,76)		RS1/16SS562J
R 7114	(B,60,57)		RS1/16SS0R0J
R 7115	(B,64,73)		RS1/10SR0R0J
R 7116	(B,65,67)		RS1/16SS392J
R 7117	(B,64,74)		RS1/10SR0R0J

R 7118	(B,63,70)		RS1/10SR0R0J
R 7119	(B,63,69)		RS1/10SR0R0J
R 7120	(B,60,58)		RS1/10SR334J
R 7121	(B,63,58)		RS1/10SR274J
R 7122	(B,62,72)		RS1/16SS104J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 7123	(B,49,76)	RS1/10SR120J	R 7317	(B,133,44)	RS1/16SS0R0J
R 7124	(B,51,64)	RS1/10SR100J	R 7323	(B,134,46) (A,B,C,E)	RS1/16SS0R0J
R 7125	(B,48,75)	RS1/10SR2R2J	R 7325	(B,134,44) (A,B,C,E)	RS1/16SS0R0J
R 7128	(A,62,79) 15 mohm	CCN1328	R 7327	(B,135,48) (A,B,C,E)	RS1/16SS0R0J
R 7129	(A,64,79) 15 mohm	CCN1328	R 7329	(B,135,44) (A,B,C,E)	RS1/16SS0R0J
			R 7330	(B,136,46) (A,B,C,E)	RS1/16SS0R0J
R 7130	(A,64,63) 12 mohm	CCN1321			
R 7131	(A,62,63) 12 mohm	CCN1321	R 7331	(B,138,44)	RS1/16SS0R0J
R 7132	(A,66,72)	RS1/4SA0R0J	R 7333	(B,137,44)	RS1/16SS0R0J
R 7133	(A,66,70)	RS1/4SA0R0J	R 7335	(B,136,32)	RS1/16SS0R0J
R 7134	(B,60,65)	RS1/16SS0R0J	R 7338	(B,135,29)	RS1/16SS0R0J
			R 7340	(B,135,26)	RS1/16SS0R0J
R 7135	(B,53,66)	RS1/16SS6R8J			
R 7136	(B,52,76)	RS1/16SS6R8J	R 7341	(B,140,46)	RS1/16SS0R0J
R 7202	(A,146,69)	RS1/16SS222J	R 7342	(B,136,28)	RS1/16SS0R0J
R 7203	(A,146,71)	RS1/16SS222J	R 7343	(B,141,45)	RS1/16SS0R0J
R 7206	(A,148,72)	RS1/16SS222J	R 7344	(B,138,32)	RS1/16SS0R0J
			R 7345	(B,142,46)	RS1/16SS0R0J
R 7207	(A,147,73)	RS1/16SS222J			
R 7211	(B,90,92)	RS1/8SQ0R0J	R 7350	(B,134,27)	RS1/16SS0R0J
R 7212	(B,96,112)	RS1/8SQ0R0J	R 7356	(B,100,33)	RS1/16SS0R0J
R 7213	(A,107,99)	RS1/16SS102J	R 7357	(B,133,30)	RS1/16SS0R0J
R 7214	(A,98,79)	RS1/16SS102J	R 7362	(B,114,31) (A,B,C,D,E)	RS1/16SS0R0J
			R 7364	(B,114,32) (A,B,C,D,E)	RS1/16SS0R0J
R 7215	(A,107,98)	RS1/16SS102J			
R 7216	(A,98,78)	RS1/16SS102J	R 7376	(B,122,43)	RS1/10SR0R0J
R 7217	(A,107,97)	RS1/16SS102J	R 7385	(B,117,27)	RS1/16SS0R0J
R 7218	(A,97,102)	RS1/16SS152J	R 7386	(B,87,33)	RS1/16SS0R0J
R 7219	(A,98,77)	RS1/16SS102J	R 7387	(B,111,33)	RS1/16SS0R0J
			R 7388	(B,91,32)	RS1/16SS0R0J
R 7220	(A,91,81)	RS1/16SS152J			
R 7221	(A,107,96)	RS1/16SS102J	R 7389	(B,113,30)	RS1/16SS0R0J
R 7222	(A,98,76)	RS1/16SS102J	R 7390	(B,89,32)	RS1/16SS0R0J
R 7224	(A,97,103)	RS1/16SS3002D	R 7391	(B,112,33)	RS1/16SS0R0J
R 7225	(A,95,103)	RS1/16SS2701D	R 7392	(B,92,31)	RS1/16SS101J
			R 7393	(B,98,46)	RS1/16SS0R0J
R 7227	(A,93,105)	RS1/16SS8201D			
R 7229	(A,91,82)	RS1/16SS3002D	R 7394	(B,90,30)	RS1/16SS0R0J
R 7230	(A,90,82)	RS1/16SS2701D	R 7397	(B,132,32)	RS1/16SS0R0J
R 7232	(A,87,84)	RS1/16SS8201D	R 7398	(B,96,32)	RS1/16SS0R0J
R 7233	(A,98,114)	RS1/16SS0R0J	R 7399	(B,133,33)	RS1/16SS0R0J
			R 7400	(B,95,31)	RS1/16SS0R0J
R 7234	(A,92,93)	RS1/16SS0R0J			
R 7235	(A,94,104)	RS1/16SS752J	R 7401	(B,94,31)	RS1/16SS0R0J
R 7236	(A,89,83)	RS1/16SS103J	R 7403	(B,96,44)	RS1/16SS0R0J
R 7237	(B,112,104) 0.047 ohm	CCN1167	R 7405	(B,97,46)	RS1/16SS0R0J
R 7238	(B,106,83) 0.047 ohm	CCN1167	R 7407	(B,135,32)	RS1/16SS0R0J
			R 7408	(B,98,44)	RS1/16SS0R0J
R 7245	(A,108,105)	RS1/16SS1001D			
R 7246	(A,102,84)	RS1/16SS0R0J	R 7415	(B,98,32) (A,B,C,D,E)	RS1/16SS0R0J
R 7247	(A,107,102)	RS1/16SS224J	R 7416	(B,99,32) (A,B,C,D,E)	RS1/16SS0R0J
R 7248	(A,101,81)	RS1/16SS224J	R 7419	(B,144,47)	RS1/16SS0R0J
R 7249	(A,109,105)	RS1/16SS1202D	R 7420	(B,144,44)	RS1/16SS0R0J
			R 7425	(B,145,45) (A,B)	RS1/16SS221J
R 7250	(A,103,84)	RS1/16SS2202D			
R 7251	(A,108,103)	RS1/16SS104J	R 7426	(B,147,45) (A,B)	RS1/16SS221J
R 7252	(A,102,83)	RS1/16SS104J	R 7428	(B,148,44) (A,B)	RS1/16SS0R0J
R 7253	(A,116,104)	RS1/16SS0R0J	R 7430	(B,148,46) (A,B)	RS1/16SS221J
R 7254	(A,110,84)	RS1/16SS0R0J	R 7433	(B,150,46)	RS1/16SS0R0J
			R 7435	(B,151,46)	RS1/16SS0R0J
R 7302	(A,131,44)	RS1/10SR0R0J			
R 7303	(A,128,42)	RS1/10SR0R0J	R 7437	(B,152,46)	RS1/16SS0R0J
R 7306	(B,130,44)	RS1/16SS0R0J	R 7439	(B,122,32)	RS1/16SS103J
R 7307	(B,95,49)	RS1/10SR0R0J	R 7440	(B,155,44)	RS1/16SS0R0J
R 7308	(B,130,46)	RS1/16SS0R0J	R 7441	(B,155,43)	RS1/16SS0R0J
			R 7442	(B,124,32)	RS1/16SS0R0J
R 7309	(B,95,46)	RS1/16SS0R0J			
R 7310	(B,131,44)	RS1/16SS0R0J	R 7443	(B,130,32)	RS1/16SS0R0J
R 7311	(B,131,46)	RS1/16SS0R0J	R 7444	(B,129,31)	RS1/16SS0R0J
R 7315	(B,133,46)	RS1/16SS0R0J	R 7445	(B,128,30)	RS1/16SS0R0J

	<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>
A	R 7446	(B,127,31)	RS1/16SS0R0J		R 7612	(B,150,28)	RS1/16SS330J
	R 7447	(B,126,30)	RS1/16SS0R0J		R 7613	(B,144,49)	RS1/16SS221J
	R 7448	(B,125,32)	RS1/16SS0R0J		R 7614	(B,139,49)	RS1/16SS0R0J
	R 7449	(B,124,30)	RS1/16SS0R0J		R 7615	(B,137,54)	RS1/16SS330J
	R 7456	(B,87,30)	RS1/16SS103J		R 7616	(B,137,52)	RS1/16SS330J
■	R 7457	(B,116,30)	RS1/16SS103J		R 7617	(B,137,50)	RS1/16SS330J
	R 7458	(B,117,30)	RS1/16SS103J		R 7618	(B,143,31)	RS1/16SS103J
	R 7459	(B,118,31)	RS1/16SS103J		R 7619	(B,140,60)	RS1/16SS103J
	R 7460	(B,120,32)	RS1/16SS103J		R 7621	(B,164,24)	RS1/16SS821J
	R 7461	(B,121,32)	RS1/16SS103J		R 7622	(B,168,24)	RS1/16SS821J
B	R 7463	(B,154,45)	RS1/16SS0R0J		R 7623	(B,147,20)	RS1/16SS821J
	R 7470	(B,116,31)	RS1/16SS0R0J		R 7624	(B,151,20)	RS1/16SS821J
	R 7480	(B,60,113) (G)	RS1/16SS0R0J		R 7625	(B,153,52)	RS1/16SS821J
	R 7481	(B,58,111) (G)	RS1/16SS0R0J		R 7626	(B,153,57)	RS1/16SS821J
	R 7482	(B,58,113) (A,B)	RS1/16SS0R0J		R 7628	(B,166,22)	RS1/16SS0R0J
■	R 7483	(B,58,112) (A,B)	RS1/16SS0R0J		R 7631	(B,149,19)	RS1/16SS0R0J
	R 7484	(B,132,25)	RS1/16SS104J		R 7634	(B,155,54)	RS1/16SS0R0J
	R 7485	(B,99,30) (A,B,C,D,E)	RS1/16SS473J		R 7639	(B,141,32)	RS1/16SS0R0J
	R 7487	(A,142,30) (G)	RS1/16SS473J		R 7640	(B,161,22)	RS1/16SS0R0J
	R 7503	(B,129,28)	RS1/16SS103J		R 7702	(B,52,38)	RS1/16SS753J
C	R 7504	(B,128,27)	RS1/16SS103J		R 7703	(B,53,40)	RS1/16SS753J
	R 7505	(B,126,27)	RS1/16SS103J		R 7707	(A,9,115)	RS1/16SS0R0J
	R 7506	(B,125,28)	RS1/16SS103J		R 7708	(B,33,23)	RS1/16SS101J
	R 7507	(B,124,28)	RS1/16SS103J		R 7709	(B,26,29)	RS1/10SR0R0J
	R 7515	(A,124,33)	RS1/16SS0R0J		R 7710	(B,34,26)	RS1/16SS101J
■	R 7516	(A,125,31)	RS1/16SS0R0J		R 7712	(B,21,26)	RS1/16SS0R0J
	R 7517	(A,126,30)	RS1/16SS0R0J		R 7713	(B,22,26)	RS1/16SS0R0J
	R 7518	(A,127,30)	RS1/16SS0R0J		R 7714	(B,31,41)	RS1/16SS102J
	R 7519	(A,128,30)	RS1/16SS0R0J		R 7715	(B,31,33)	RS1/16SS0R0J
	R 7520	(A,129,31)	RS1/16SS0R0J		R 7716	(A,47,51)	RS1/16SS222J
D	R 7521	(A,130,29)	RS1/16SS0R0J		R 7717	(B,18,15)	RS1/16SS102J
	R 7522	(A,119,40)	RS1/16SS680J		R 7718	(B,17,15)	RS1/16SS102J
	R 7523	(A,99,40)	RS1/16SS680J		R 7719	(A,46,50)	RS1/16SS105J
	R 7524	(A,95,40)	RS1/16SS330J		R 7723	(B,20,24)	RS1/16SS0R0J
	R 7525	(B,168,46)	RS1/16SS680J		R 7728	(A,50,50)	RS1/16SS0R0J
■	R 7526	(B,163,46)	RS1/16SS680J		R 7729	(B,17,24)	RS1/16SS0R0J
	R 7527	(A,151,49)	RS1/16SS680J		R 7730	(A,50,51)	RS1/16SS0R0J
	R 7528	(B,94,11)	RS1/16SS221J		R 7731	(B,41,40)	RS1/16SS0R0J
	R 7530	(B,93,14)	RS1/16SS330J		R 7733	(A,38,48)	RS1/16SS0R0J
	R 7531	(A,119,39)	RS1/16SS680J		R 7734	(A,30,35)	RS1/16SS223J
■	R 7532	(A,112,40)	RS1/16SS680J		R 7735	(A,30,37)	RS1/16SS223J
	R 7533	(A,98,40)	RS1/16SS680J		R 7737	(B,29,36)	RS1/16SS222J
	R 7534	(B,165,46)	RS1/16SS680J		R 7738	(B,27,36)	RS1/16SS332J
	R 7535	(A,149,49)	RS1/16SS680J		R 7739	(A,39,40)	RS1/16SS0R0J
	R 7537	(B,167,47)	RS1/16SS103J		R 7744	(A,31,33)	RS1/16SS223J
E	R 7538	(B,164,47)	RS1/16SS103J		R 7745	(B,42,37)	RS1/16SS333J
	R 7539	(B,162,47)	RS1/16SS103J		R 7746	(B,41,38)	RS1/16SS473J
	R 7540	(A,149,51)	RS1/16SS103J		R 7749	(B,54,40)	RS1/16SS101J
	R 7541	(A,148,51)	RS1/16SS103J		R 7752	(B,36,36)	RS1/16SS561J
	R 7544	(A,146,51)	RS1/16SS0R0J		R 7756	(B,144,70)	RS1/16SS103J
■	R 7545	(A,93,42)	RS1/16SS0R0J		R 7757	(B,142,65)	RS1/16SS220J
	R 7601	(B,158,28)	RS1/16SS221J		R 7758	(B,145,62)	RS1/16SS220J
	R 7603	(B,161,27)	RS1/16SS0R0J		R 7761	(A,59,37)	RS1/16SS0R0J
	R 7604	(B,156,29)	RS1/16SS102J		R 7762	(B,35,23)	RS1/16SS222J
	R 7605	(B,159,29)	RS1/16SS102J		R 7764	(B,36,38)	RS1/16SS821J
F	R 7606	(B,155,28)	RS1/16SS102J		R 7766	(A,47,32)	RS1/16SS103J
	R 7607	(B,164,34)	RS1/16SS103J		R 7767	(A,48,32)	RS1/16SS0R0J
	R 7609	(B,140,29)	RS1/16SS0R0J		R 7768	(A,56,33)	RS1/16SS0R0J
	R 7610	(B,145,31)	RS1/16SS330J		R 7769	(A,55,33)	RS1/16SS0R0J
	R 7611	(B,143,33)	RS1/16SS330J				

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 7770	(A,54,33)	RS1/16SS0R0J	R 7866	(A,64,27) (G)	RS1/16SS2200D
R 7771	(A,53,33)	RS1/16SS331J	R 7867	(A,61,7) (G)	RS1/16SS0R0J
R 7772	(A,56,29)	RS1/16SS103J	R 7868	(B,61,87) (G)	RS1/10SR0R0J
R 7773	(A,55,30)	RS1/16SS103J	R 7869	(B,52,89) (G)	RS1/16SS121J
R 7774	(A,54,30)	RS1/16SS103J	R 7870	(A,65,95) (G)	RS1/16SS0R0J
R 7775	(B,59,41)	RS1/10SR0R0J	R 7871	(A,51,93) (G)	RS1/10SR0R0J
R 7776	(A,38,43)	RS1/16SS0R0J	R 7873	(A,65,7) (G)	RS1/16SS0R0J
R 7778	(B,55,34)	RS1/16SS153J	R 7874	(A,70,12) (G)	RS1/16SS0R0J
R 7780	(B,52,32)	RS1/16SS223J	R 7875	(A,70,11) (G)	RS1/16SS473J
R 7781	(B,46,30)	RS1/16SS223J	R 7877	(A,64,11) (G)	RS1/16SS0R0J
R 7782	(B,52,30)	RS1/16SS0R0J	R 7878	(A,64,13) (G)	RS1/16SS0R0J
R 7783	(B,40,32)	RS1/16SS163J	R 7879	(A,64,12) (G)	RS1/16SS0R0J
R 7784	(B,42,32)	RS1/16SS163J	R 7881	(B,65,20) (A,B,C,D,E,F)	RS1/16SS0R0J
R 7785	(B,39,32)	RS1/16SS101J	R 7882	(B,64,18) (A,B,C,D,E,F)	RS1/16SS0R0J
R 7786	(B,50,29)	RS1/16SS0R0J	R 7885	(A,48,101) (G)	RS1/16SS473J
R 7787	(A,12,111)	RS1/16SS153J	R 7886	(A,59,99) (G)	RS1/16SS0R0J
R 7788	(A,9,111)	RS1/16SS683J	R 7894	(B,44,102) (G)	RS1/16SS473J
R 7789	(A,8,104)	RS1/16SS562J	R 7895	(A,51,99) (G)	RS1/16SS0R0J
R 7791	(A,9,101)	RS1/16SS104J	R 7901	(B,80,73)	RS1/16SS151J
R 7792	(A,11,101)	RS1/16SS274J	R 7902	(B,78,71)	RS1/16SS151J
R 7793	(B,34,41)	RS1/16SS0R0J	R 7903	(B,77,65)	RS1/16SS151J
R 7794	(A,15,106)	RS1/16SS0R0J	R 7907	(B,68,54)	RS1/16SS151J
R 7795	(A,13,113)	RS1/16SS0R0J	R 7908	(B,69,55)	RS1/16SS151J
R 7797	(B,50,35)	RS1/16SS153J	R 7909	(B,71,55)	RS1/16SS151J
R 7798	(A,31,30)	RS1/16SS223J	R 7910	(A,71,57)	RS1/16SS151J
R 7804	(A,31,31)	RS1/16SS0R0J	R 7911	(B,85,64)	RS1/4SA0R0J
R 7805	(A,17,110)	RS1/16SS102J	R 7912	(B,85,61)	RS1/4SA0R0J
R 7806	(A,15,113)	RS1/16SS102J	R 7913	(B,85,59)	RS1/4SA0R0J
R 7811	(B,14,24)	RS1/16SS0R0J	R 7916	(B,84,74)	RS1/16SS1500D
R 7813	(B,57,36)	RS1/16SS0R0J	R 7917	(B,81,69) (G)	RS1/16SS271J
R 7820	(A,18,29)	RS1/16SS0R0J	R 7918	(B,79,83)	RS1/16SS0R0J
R 7821	(A,29,43)	RS1/16SS0R0J	R 7919	(B,84,67)	RS1/16SS1500D
R 7822	(B,31,42)	RS1/16SS0R0J	R 7920	(B,86,70)	RS1/16SS472J
R 7823	(B,40,36)	RS1/16SS273J	R 7921	(B,87,56)	RS1/16SS473J
R 7826	(B,44,42)	RS1/16SS0R0J	R 7923	(B,86,68)	RS1/16SS101J
R 7827	(A,53,49)	RS1/16SS472J	R 7924	(B,87,67)	RS1/16SS101J
R 7828	(A,53,52)	RS1/16SS472J	R 7925	(A,89,72)	RS1/16SS821J
R 7829	(A,18,25)	RS1/16SS0R0J	R 7926	(A,89,69)	RS1/16SS105J
R 7832	(A,52,23)	RS1/10SR0R0J	R 7927	(B,78,96)	RS1/16SS104J
R 7833	(A,50,30)	RS1/10SR0R0J	R 7928	(B,78,80)	RS1/10SR0R0J
R 7834	(B,52,33)	RS1/16SS682J	R 7929	(B,75,91)	RS1/16SS104J
R 7835	(A,63,8) (G)	RS1/16SS271J	R 7930	(A,96,69)	RS1/16SS221J
R 7847	(B,34,97) (G)	RS1/16SS750J	R 7932	(B,74,66)	RS1/16SS0R0J
R 7849	(B,60,28) (G)	RS1/16SS0R0J	R 7933	(B,76,75)	RS1/16SS104J
R 7850	(B,60,27) (G)	RS1/16SS0R0J	R 7942	(B,62,52)	RS1/16SS273J
R 7851	(A,77,96) (G)	RS1/16SS273J	R 7943	(B,62,51)	RS1/16SS273J
R 7852	(A,77,94) (G)	RS1/16SS273J	R 7945	(A,95,70)	RS1/16SS103J
R 7853	(A,65,92) (G)	RS1/16SS0R0J	R 7951	(A,95,72)	RS1/16SS101J
R 7854	(A,58,9) (G)	RS1/16SS273J	R 7955	(A,103,63)	RS1/16SS104J
R 7855	(A,60,9) (G)	RS1/16SS273J	R 7956	(A,103,60)	RAB4CQ151J
R 7856	(B,45,103) (G)	RS1/16SS0R0J	R 7957	(A,103,57)	RAB4CQ151J
R 7857	(B,44,106) (G)	RS1/16SS0R0J	R 7958	(A,95,61)	RAB4CQ391J
R 7858	(A,49,101) (G)	RS1/16SS0R0J	R 7959	(A,95,58)	RAB4CQ391J
R 7859	(A,50,99) (G)	RS1/16SS471J	R 7968	(A,103,62)	RS1/16SS221J
R 7861	(B,36,96) (G)	RS1/16SS0R0J	R 7977	(A,103,66)	RS1/16SS151J
R 7862	(A,34,96) (G)	RS1/16SS0R0J	R 7982	(B,67,47)	RS1/16SS101J
R 7863	(B,48,111) (G)	RS1/16SS0R0J	R 7983	(B,70,47)	RS1/16SS101J
R 7864	(B,49,111) (G)	RS1/16SS0R0J	R 7984	(A,70,47)	RS1/16SS101J
R 7865	(B,50,111) (G)	RS1/16SS0R0J	R 7985	(A,67,48)	RS1/16SS101J

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 7986 (B,68,35)
R 7987 (B,71,35)
R 7988 (A,70,35)

RS1/16SS75R0D
RS1/16SS75R0D
RS1/16SS75R0D

R 8115 (A,144,80)
R 8116 (A,144,78)
R 8117 (A,144,76)
R 8119 (B,147,82)
R 8120 (A,146,76)

RS1/16SS1501D
RS1/16SS2402D
RS1/16SS3302D
RS1/16SS4702D
RS1/16SS4702D

R 7989 (A,66,36)
R 7991 (B,61,26)
R 7992 (B,62,46)
R 7993 (B,83,73) (G)
R 7994 (B,81,68) (A,B,C,D,E,F)
R 7995 (A,94,67)

RS1/16SS75R0D
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS270J

R 8121 (A,146,80)
R 8127 (B,156,79)
R 8128 (B,156,80)
R 8129 (B,159,82)
R 8130 (B,159,83)

RS1/16SS432J
RS1/16SS471J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 8001 (B,121,104) (A,B,C,E)
R 8002 (B,123,104) (A,B,C,E)
R 8003 (B,124,102) (A,B,C,E)
R 8004 (B,122,101) (A,B,C,E)
R 8006 (A,122,94) (A,B,C,E)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS151J
RS1/16SS151J
RS1/16SS103J

R 8132 (A,161,77)
R 8133 (A,160,77)
R 8134 (A,158,77)
R 8135 (A,157,77)
R 8136 (A,156,77)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS1002D
RS1/16SS2202D
RS1/16SS3302D

R 8007 (A,122,93) (A,B,C,E)
R 8008 (B,119,103) (A,B,C,E)
R 8009 (B,119,98) (A,B,C,E)
R 8010 (B,119,99) (A,B,C,E)
R 8011 (A,113,82) (A,B,C,E)

RS1/16SS102J
RS1/16SS102J
RS1/16SS473J
RS1/16SS473J
RS1/16SS223J

R 8137 (A,160,81)
R 8138 (B,149,87)
R 8139 (A,156,79)
R 8140 (A,154,81)
R 8141 (A,160,80)

RS1/16SS102J
RS1/16SS103J
RS1/16SS103J
RS1/10SR0R0J
RS1/16SS102J

R 8012 (A,113,80) (A,B,C,E)
R 8013 (A,126,58) (A,B,C,E)
R 8014 (A,121,56) (A,B,C,E)
R 8015 (B,125,70) (A,B,C,E)
R 8016 (A,126,53) (A,B,C,E)

RS1/16SS433J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 8142 (A,164,84)
R 8143 (A,171,80)
R 8144 (A,171,79)
R 8145 (A,171,78)
R 8146 (B,152,76)

RS1/16SS0R0J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J
RS1/10SR0R0J

R 8017 (A,118,80) (A,B,C,E)
R 8018 (B,111,71) (A,B,C,E)
R 8019 (B,125,69) (A,B,C,E)
R 8021 (B,125,68) (A,B,C,E)
R 8022 (B,111,69) (A,B,C,E)

RS1/16SS273J
RS1/16SS102J
RS1/16SS271J
RS1/16SS0R0J
RS1/16SS105J

R 8148 (A,160,82)
R 8149 (A,160,79)
R 8150 (B,155,86)
R 8201 (B,79,23)
R 8202 (B,144,15)

RS1/16SS102J
RS1/16SS102J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 8024 (A,123,68) (A,B,C,E)
R 8025 (A,124,68) (A,B,C,E)
R 8026 (B,126,67) (A,B,C,E)
R 8027 (A,122,63) (A,B,C,E)
R 8028 (A,123,65) (A,B,C,E)

RS1/16SS333J
RS1/16SS333J
RS1/16SS330J
RS1/16SS333J
RS1/16SS333J

R 8203 (B,78,23)
R 8205 (B,77,23)
R 8209 (B,93,126)
R 8210 (B,81,123)
R 8216 (B,76,16)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS0R0J

R 8029 (B,126,66) (A,B,C,E)
R 8031 (A,113,60) (A,B,C,E)
R 8032 (A,112,63) (A,B,C,E)
R 8033 (B,126,65) (A,B,C,E)
R 8035 (B,125,64) (A,B,C,E)

RS1/16SS330J
RS1/16SS103J
RS1/16SS0R0J
RS1/16SS330J
RS1/16SS0R0J

R 8218 (B,75,20)
R 8220 (B,74,17)
R 8222 (B,73,20)
R 8223 (B,73,18)
R 8227 (B,71,17)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 8036 (A,110,63) (A,B,C,E)
R 8037 (B,126,63) (A,B,C,E)
R 8038 (A,129,53) (A,B,C,E)
R 8040 (A,128,53) (A,B,C,E)
R 8041 (A,130,53) (A,B,C,E)

RS1/16SS472J
RS1/16SS101J
RS1/16SS473J
RS1/16SS473J
RS1/16SS473J

R 8228 (B,70,18)
R 8229 (B,69,17)
R 8231 (B,69,18)
R 8232 (B,68,17)
R 8233 (B,67,18)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 8042 (B,111,63) (A,B,C,E)
R 8043 (B,111,60) (A,B,C,E)
R 8044 (B,116,58) (A,B,C,E)
R 8045 (B,118,58) (A,B,C,E)
R 8046 (A,126,76) (A,B,C,E)

RAB4CQ220J
RAB4CQ220J
RAB4CQ220J
RAB4CQ220J
RS1/16SS472J

R 8235 (B,67,17)
R 8236 (B,66,18)
R 8237 (B,65,16)
R 8241 (B,63,20)
R 8242 (B,63,18)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 8052 (B,108,66) (A,B,C,E)
R 8057 (A,133,75) (A,B,C,E)
R 8058 (A,133,73) (A,B,C,E)
R 8059 (A,133,72) (A,B,C,E)
R 8061 (B,125,59) (A,B,C,E)

RS1/16SS100J
RS1/16SS821J
RS1/16SS0R0J
RS1/16SS821J
RAB4CQ221J

R 8243 (B,62,20) (A,B,C,E)
R 8244 (B,61,18) (A,B,C,E)
R 8245 (B,61,20) (A,B,C,E)
R 8249 (B,57,22) (A,B,G)
R 8250 (B,57,21) (A,B,G)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

R 8065 (B,127,72) (A,B,C,E)
R 8066 (B,131,68) (A,B,C,E)
R 8070 (A,122,71) (A,B,C,E)
R 8071 (A,117,80) (A,B,C,E)
R 8114 (A,148,87)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS222J
RS1/16SS0R0J
RS1/16SS10R0D

R 8251 (B,56,22) (A,B,G)
R 8254 (B,55,20) (A,B)
R 8255 (B,54,20) (A,B)
R 8304 (B,160,16)
R 8305 (B,160,17)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS471J
RS1/16SS471J

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 8306	(B,159,15)	RS1/16SS0R0J		R 8512	(B,148,91)	RS1/16SS0R0J	
R 8307	(B,169,18)	RS1/16SS0R0J		R 8514	(A,8,90) (A,B,C,D,E)	RS1/16SS0R0J	A
R 8308	(B,168,18)	RS1/16SS0R0J		R 8517	(A,15,89) (A,B,C,D,E)	RS1/16SS104J	
R 8309	(B,165,17)	RS1/16SS0R0J		R 8520	(A,47,106) (A,B)	RS1/16SS473J	
R 8310	(B,164,17)	RS1/16SS0R0J		R 8525	(A,38,112) (A,B)	RS1/16SS104J	
				R 8526	(A,49,114) (A,B)	RS1/16SS471J	
R 8311	(B,164,19)	RS1/16SS0R0J					
R 8312	(B,163,19)	RS1/16SS0R0J		R 8528	(A,43,108) (A,B)	RS1/16SS473J	
R 8313	(B,162,17)	RS1/16SS0R0J		R 8529	(A,48,114) (A,B)	RS1/16SS223J	
R 8314	(B,161,17)	RS1/16SS0R0J		R 8530	(A,51,114) (A,B)	RS1/16SS223J	
R 8315	(B,159,19)	RS1/16SS102J		R 8533	(A,37,107) (A,B)	RS1/16SS331J	
				R 8534	(A,47,115) (A,B)	RS1/16SS181J	
R 8316	(B,158,18)	RS1/16SS102J					
R 8317	(B,158,15)	RS1/16SS102J		R 8535	(A,51,113) (A,B)	RS1/16SS181J	
R 8322	(B,156,17)	RS1/16SS0R0J		R 8541	(A,39,113) (A,B)	RS1/10SR102J	B
R 8323	(B,155,15)	RS1/16SS0R0J		R 8542	(A,45,112) (A,B)	RS1/10SR102J	
R 8326	(B,153,15) (A,B,C,D,E,F)	RS1/16SS0R0J		R 8547	(A,57,120) (A,B)	RS1/10SR0R0J	
				R 8548	(B,53,119) (A,B)	VTL1133	
R 8333	(B,150,16)	RS1/16SS0R0J					
R 8334	(B,149,17)	RS1/16SS0R0J		R 8549	(B,38,119) (A,B)	VTL1133	
R 8336	(B,148,16)	RS1/16SS0R0J		R 8550	(B,51,119) (A,B)	VTL1133	
R 8337	(B,147,16)	RS1/16SS0R0J		R 8551	(B,47,119) (A,B)	VTL1133	
R 8340	(B,146,16)	RS1/16SS0R0J		R 8552	(B,45,119) (A,B)	VTL1133	
				R 8553	(B,42,119) (A,B)	VTL1133	
R 8341	(B,142,17)	RS1/16SS0R0J					
R 8342	(B,74,99)	RS1/16SS0R0J		R 8565	(A,11,117)	VTL1134	
R 8343	(B,73,99)	RS1/16SS0R0J		R 8566	(A,14,117)	RS1/16SS0R0J	
R 8344	(B,72,99)	RS1/16SS0R0J		R 8581	(A,144,91)	RS1/16SS103J	C
R 8345	(B,71,99)	RS1/16SS0R0J		R 8582	(A,147,95)	RS1/16SS103J	
				R 8585	(B,58,123) (A,B,C,D,E)	RS1/16SS102J	
R 8346	(B,70,99)	RS1/16SS0R0J					
R 8347	(B,69,99)	RS1/16SS0R0J		R 8586	(B,62,123) (A,B,C,D,E)	RS1/16SS102J	
R 8360	(B,135,14)	RS1/16SS0R0J		R 8603	(A,15,6)	RS1/16SS0R0J	
R 8401	(B,133,16)	RS1/16SS0R0J		R 8604	(A,36,13)	RS1/16SS0R0J	
R 8402	(B,134,17)	RS1/16SS0R0J		R 8608	(A,20,9)	RS1/16SS273J	
				R 8613	(A,21,10)	RS1/16SS473J	
R 8403	(B,134,15)	RS1/16SS0R0J					
R 8404	(B,127,21)	RS1/16SS0R0J		R 8614	(A,26,6)	RS1/16SS621J	
R 8408	(B,126,22)	RS1/16SS0R0J		R 8616	(A,33,8)	RS1/16SS222J	
R 8414	(B,122,25)	RS1/16SS0R0J		R 8617	(A,33,6)	RS1/16SS0R0J	
R 8415	(B,122,23)	RS1/16SS0R0J		R 8618	(A,30,9)	RS1/16SS104J	D
				R 8619	(A,20,11)	RS1/16SS104J	
R 8416	(B,122,29)	RS1/16SS0R0J					
R 8417	(B,120,20)	RS1/16SS0R0J		R 8620	(A,51,16)	RS1/16SS0R0J	
R 8418	(B,120,24)	RS1/16SS0R0J		R 8626	(A,35,9)	RS1/16SS0R0J	
R 8419	(B,119,26)	RS1/16SS0R0J		R 8627	(A,36,21)	RS1/16SS0R0J	
R 8420	(B,119,21)	RS1/16SS0R0JS		R 8702	(A,131,94) (A,C,E)	RS1/16SS0R0J	
				R 8703	(A,131,92) (B,D,F,G)	RS1/16SS0R0J	
R 8421	(B,119,23)	RS1/16SS0R0J					
R 8422	(B,118,24)	RS1/16SS0R0J		R 8707	(A,131,84) (B,D,E)	RS1/16SS0R0J	
R 8423	(B,118,26)	RS1/16SS0R0J		R 8708	(A,131,82) (C,D,E)	RS1/16SS0R0J	
R 8446	(B,104,23)	RS1/16SS0R0J		R 8709	(A,140,96) (A,B)	RS1/16SS0R0J	
R 8447	(B,103,23)	RS1/16SS0R0J			(C,D,E)	RS1/16SS300J	
				R 8710	(A,140,94) (C,D,E)	RS1/16SS300J	E
R 8449	(B,102,25) (A,C,E)	RS1/16SS0R0J		R 8711	(A,140,92) (C,D,E)	RS1/16SS300J	
R 8451	(B,101,23)	RS1/16SS0R0J					
R 8452	(B,100,23)	RS1/16SS0R0J		R 8712	(A,140,90) (C,D,E)	RS1/16SS0R0J	
R 8453	(B,98,25)	RS1/16SS0R0J		R 8713	(A,140,88) (C,D,E)	RS1/16SS300J	
R 8454	(B,99,22)	RS1/16SS0R0J			(A,140,88) (F)	RS1/16SS0R0J	
				R 8714	(A,140,86) (C,D,E)	RS1/16SS330J	
R 8456	(B,124,23)	RS1/8SQ0R0J			(A,140,86) (G)	RS1/16SS0R0J	
R 8458	(B,106,22)	RS1/8SQ0R0J		R 8802	(B,26,125) (G)	RS1/4SA0R0J	
R 8460	(B,98,21)	RS1/8SQ0R0J		R 8803	(A,91,79)	RS1/10SR0R0J	
R 8462	(B,93,31) (A,C,E)	RS1/16SS0R0J					
R 8501	(A,144,95)	RS1/16SS473J					
				CAPACITORS			
R 8503	(A,143,95)	RS1/16SS472J		C 7006	(A,76,108)	CKSQYB334K50	F
R 8509	(A,20,88) (A,B,C,D,E)	RS1/16SS101J		C 7013	(B,75,118)	CEVW220M16	
R 8510	(A,10,87) (A,B,C,D,E)	RS1/16SS103J		C 7014	(B,56,118) (A,B)	CKSRYB104K50	
R 8511	(A,21,90) (A,B,C,D,E)	RS1/16SS0R0J		C 7017	(B,149,74) 4.7 uF	CCG1212	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 7018	(A,13,36)	CKSRYB105K10
	C 7021	(A,126,48) 4.7 uF(A,B,C,E)	CCG1212
	C 7022	(B,147,78)	CKSRYB105K10
	C 7023	(A,12,34) 4.7 uF	CCG1212
	C 7029	(A,122,52) 4.7 uF(A,B,C,E)	CCG1212
B	C 7032	(A,89,45)	CKSRYB105K10
	C 7033	(A,84,45)	CKSRYB105K10
	C 7036	(A,115,45)	CKSRYB105K10
	C 7039	(A,115,46)	CKSSYB473K16
	C 7042	(A,20,35)	CKSSYB104K10
C	C 7043	(A,123,45) (A,B,C,E)	CKSSYB104K10
	C 7045	(B,32,70)	CCSSCH561J50
	C 7046	(A,36,71) 10 uF/16 V	DCH1263
	C 7047	(A,36,73) 10 uF/16 V	DCH1263
	C 7048	(A,36,75) 10 uF/16 V	DCH1263
D	C 7049	(A,36,76)	CKSSYB104K16
	C 7052	(B,33,85)	CKSSYB104K16
	C 7053	(A,26,79) 10 uF	CCG1236
	C 7055	(B,29,73)	CKSSYB103K16
	C 7056	(B,31,72)	CCSSCH8R0D50
E	C 7057	(B,35,73)	CKSSYB103K16
	C 7058	(B,30,71)	CKSSYB152K50
	C 7059	(B,31,73)	CKSRYB105K16
	C 7060	(A,26,77) 10 uF	CCG1236
	C 7061	(A,26,75) 10 uF	CCG1236
F	C 7074	(A,75,89)	CKSRYB105K10
	C 7085	(B,141,76)	CKSSYB104K10
	C 7086	(A,72,86) 10 uF	CCG1192
	C 7101	(B,62,77)	CCSSCH150J50
	C 7102	(B,64,76)	CCSSCH220J50
G	C 7103	(B,65,78)	CKSSYB152K50
	C 7104	(B,62,66)	CCSSCH150J50
	C 7105	(B,64,67)	CCSSCH220J50
	C 7106	(B,61,74)	CCSSCH102J50
	C 7107	(B,65,65)	CKSSYB472K50
H	C 7108	(B,61,69)	CCSSCH102J50
	C 7109	(B,62,57)	CKSSYB103K16
	C 7110	(B,55,77)	CKSSYB222K50
	C 7111	(B,58,65)	CKSSYB153K16
	C 7112	(B,51,72)	CKSRYB104K50
I	C 7113	(B,49,77)	CKSRYB104K50
	C 7114	(B,51,63)	CKSRYB104K50
	C 7115	(B,50,70) 4.7 uF	CCG1201
	C 7116	(A,44,76) 10 uF	CCG1236
	C 7117	(A,45,66) 10 uF	CCG1236
J	C 7121	(A,61,76) 47 uF	CCG1229
	C 7122	(A,61,70) 47 uF	CCG1229
	C 7124	(A,61,73) 47 uF	CCG1229
	C 7125	(A,61,66) 47 uF	CCG1229
	C 7201	(A,147,66)	CKSSYB104K10
K	C 7202	(A,149,67)	CKSSYB104K10
	C 7204	(A,151,70)	CKSSYB104K10
	C 7207	(B,93,87) 10 uF	CCG1236
	C 7208	(B,93,90) 10 uF	CCG1236
	C 7209	(B,99,110) 10 uF	CCG1236
L	C 7210	(B,99,108) 10 uF	CCG1236
	C 7211	(A,95,102)	CCSSCH471J50
	C 7212	(A,90,81)	CCSSCH471J50
	C 7213	(B,107,99)	CEVW101M16

C 7214	(B,99,79)	CEVW101M16
C 7215	(A,96,104)	CCSSCH270J50
C 7216	(A,90,84)	CCSSCH270J50
C 7217	(B,110,103)	CKSSYB104K10
C 7218	(B,104,83)	CKSSYB104K10
C 7219	(A,94,105)	CKSSYB222K50
C 7220	(A,89,84)	CCSSCH821J50
C 7221	(A,100,112)	CKSRYB104K50
C 7222	(A,94,92)	CKSRYB104K50
C 7223	(A,95,106)	CKSRYB105K10
C 7224	(A,89,86)	CKSRYB105K10
C 7225	(B,108,105) 22 uF	CCG1254
C 7226	(B,102,85) 22 uF	CCG1254
C 7229	(A,107,110)	CKSSYB104K16
C 7230	(A,108,107)	CKSSYB104K16
C 7231	(A,108,102)	CKSSYB102K50
C 7232	(A,106,102)	CKSSYB472K50
C 7233	(A,101,89)	CKSSYB104K16
C 7234	(A,102,86)	CKSSYB104K16
C 7235	(A,102,81)	CKSSYB102K50
C 7236	(A,100,81)	CKSSYB472K50
C 7301	(B,84,45) 22 uF	DCH1256
C 7303	(A,129,39)	CKSSYB104K10
C 7305	(B,90,47) 22 uF	DCH1256
C 7306	(A,132,41)	CKSSYB104K10
C 7501	(B,132,27)	CKSSYB104K10
C 7502	(B,91,14)	CKSSYB104K10
C 7503	(A,108,39) 10 uF	CCG1192
C 7504	(A,159,50) 10 uF	CCG1192
C 7505	(A,107,38)	CKSSYB104K10
C 7506	(A,159,48)	CKSSYB104K10
C 7601	(B,169,36) 10 uF	CCG1192
C 7602	(B,151,23) 10 uF	CCG1192
C 7603	(B,145,60) 10 uF	CCG1192
C 7604	(B,168,34)	CKSSYB104K10
C 7605	(B,149,24)	CKSSYB104K10
C 7606	(B,144,59)	CKSSYB104K10
C 7607	(B,171,25)	CKSSYB104K10
C 7608	(B,142,21)	CKSSYB104K10
C 7609	(B,147,50)	CKSSYB104K10
C 7610	(B,171,23) 10 uF	CCG1192
C 7611	(B,143,19) 10 uF	CCG1192
C 7612	(B,149,51) 10 uF	CCG1192
C 7613	(B,164,23)	CKSSYB102K50
C 7614	(B,167,23)	CKSSYB102K50
C 7615	(B,147,19)	CKSSYB102K50
C 7616	(B,150,19)	CKSSYB102K50
C 7617	(B,154,53)	CKSSYB102K50
C 7618	(B,154,55)	CKSSYB102K50
C 7701	(B,52,40)	CCSSCH680J50
C 7705	(B,30,27) 10 uF	CCG1192
C 7707	(A,46,52)	CCSSCH120J50
C 7708	(B,27,27) 10 uF	CCG1192
C 7710	(B,27,25)	CKSSYB104K10
C 7711	(B,32,23)	CKSSYB104K10
C 7713	(A,43,48)	CCSSCH120J50
C 7714	(A,23,28)	CKSRYB105K10
C 7715	(B,14,25)	CKSRYB105K10
C 7717	(A,38,46) 10 uF	CCG1192

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
C 7718	(A,41,46)	CKSSYB104K10		C 7897	(B,76,68)	CKSRYB105K10	
C 7723	(A,38,45) 10 uF	CCG1192		C 7898	(B,70,69)	CKSSYB104K10	
C 7724	(B,28,38) 10 uF	CCG1192		C 7899	(B,71,67)	CKSSYB104K10	A
C 7727	(B,29,35)	CKSSYB104K10		C 7909	(B,69,40)	CKSRYB105K10	
C 7728	(B,31,39)	CKSRYB105K10		C 7910	(B,67,40)	CKSRYB105K10	
C 7730	(A,40,44)	CKSSYB104K10		C 7911	(B,72,40)	CKSRYB105K10	
C 7732	(B,42,36)	CCSSCH561J50		C 7912	(B,70,40)	CKSRYB105K10	
C 7733	(B,42,38)	CCSSCH680J50		C 7913	(A,69,41)	CKSRYB105K10	
C 7736	(B,153,69)	CKSQYB225K10		C 7914	(A,71,41)	CKSRYB105K10	
C 7737	(B,154,67) 4.7 uF	CCG1201		C 7915	(A,65,41)	CKSRYB105K10	
C 7738	(B,152,66)	CKSSYB104K10		C 7916	(A,67,41)	CKSRYB105K10	
C 7739	(B,154,64) 10 uF	CCG1192		C 7917	(A,69,58) 10 uF	CCG1192	
C 7740	(B,50,41)	CKSSYB104K10		C 7918	(B,80,71)	CKSRYB105K16	B
C 7741	(B,151,62) 10 uF	CCG1192		C 7919	(B,78,68)	CKSRYB105K16	
C 7742	(B,158,67)	CKSSYB104K10		C 7920	(B,79,61)	CKSRYB105K16	
C 7743	(B,151,60)	CKSSYB104K10		C 7921	(B,68,46)	CKSSYB104K10	
C 7744	(A,41,44)	CCSSCH151J50		C 7922	(B,72,46)	CKSSYB104K10	
C 7745	(A,27,41)	CKSRYB105K10		C 7923	(A,69,47)	CKSSYB104K10	
C 7747	(A,36,39) 10 uF	CCG1234		C 7924	(A,65,47)	CKSSYB104K10	
C 7748	(A,59,39) 10 uF	CCG1192		C 7925	(B,75,61)	CKSRYB105K16	
C 7749	(A,57,39)	CKSSYB104K10		C 7926	(A,78,64)	CCSSCH102J50	
C 7751	(A,57,37)	CKSSYB104K10		C 7927	(A,77,64)	CKSSYB104K10	
C 7754	(A,45,33)	CKSSYB104K10		C 7928	(B,77,59)	CKSRYB105K16	
C 7755	(A,40,32) 10 uF	CCG1192		C 7929	(A,76,63)	CKSSYB103K16	C
C 7756	(A,45,32) 10 uF	CCG1192		C 7930	(A,76,62)	CKSSYB474K6R3	
C 7757	(A,40,34) 10 uF	CCG1192		C 7931	(A,76,61)	CKSSYB474K6R3	
C 7758	(A,41,36)	CKSSYB104K10		C 7932	(B,77,57)	CKSRYB105K16	
C 7759	(A,53,30)	CCSSCH220J50		C 7933	(A,77,58)	CKSSYB104K10	
C 7761	(B,40,38)	CKSRYB105K10		C 7934	(A,78,58)	CCSSCH102J50	
C 7762	(A,36,42)	CKSRYB105K10		C 7935	(A,72,58)	CKSRYB105K16	
C 7763	(B,57,34) 2.2 uF	CCG1205		C 7936	(A,76,66) 10 uF	CCG1192	
C 7765	(B,47,29) 0.47 uF	CCG1339		C 7937	(A,78,61)	CKSSYB474K6R3	
C 7766	(B,40,33)	CCSSCH101J50		C 7939	(A,82,70)	CKSSYB104K10	
C 7767	(B,41,32)	CCSSCH101J50		C 7940	(A,82,69)	CCSSCH102J50	
C 7768	(B,50,30)	CKSSYB104K10		C 7941	(A,82,54)	CKSSYB104K10	D
C 7769	(A,11,114)	CKSSYB683K10		C 7942	(A,83,54)	CKSSYB104K10	
C 7770	(A,11,112)	CKSRYB474K16		C 7943	(B,82,69) (G)	CKSRYB105K16	
C 7771	(A,8,106) 4.7 uF	CCG1331		C 7944	(B,84,71)	CKSRYB105K16	
C 7772	(A,9,102)	CCSSCH180J50		C 7945	(A,83,72) 10 uF	CCG1192	
C 7773	(A,10,101)	CCSSCH6R0D50		C 7946	(A,85,69)	CKSSYB104K10	
C 7774	(A,14,105)	CKSSYB104K10		C 7947	(A,85,54)	CKSSYB104K10	
C 7775	(A,23,30)	CKSRYB105K10		C 7948	(A,86,71)	CKSSYB104K10	
C 7779	(A,29,32)	CKSSYB104K10		C 7949	(A,88,49) 10 uF	CCG1192	
C 7780	(A,15,109) 22 uF	DCH1256		C 7950	(A,87,69)	CKSSYB104K10	
C 7783	(B,44,41)	CKSSYB104K10		C 7951	(A,87,54)	CKSSYB104K10	
C 7785	(B,140,63)	CCSSCH101J50		C 7952	(A,89,54)	CKSSYB104K10	E
C 7786	(B,25,25)	CKSSYB104K10		C 7953	(A,81,44) 10 uF	CCG1192	
C 7789	(B,53,33) 2.2 uF	CCG1205		C 7954	(A,91,72)	CCSSCH5R0C50	
C 7790	(B,19,26)	CCSSCH101J50		C 7955	(A,90,72)	CCSSCH6R0D50	
C 7791	(B,37,41) 10 uF	CCG1234		C 7956	(A,93,64)	CKSSYB104K10	
C 7854	(A,79,97) (G)	CKSSYB104K10		C 7957	(A,93,63)	CKSSYB104K10	
C 7855	(A,76,94) (G)	CCG1192		C 7958	(A,95,69)	CKSSYB103K16	
C 7856	(A,56,10) (G)	CKSSYB104K10		C 7963	(A,99,64) 1 uF	DCH1246	
C 7857	(A,59,7) (G)	CCG1192		C 7965	(A,99,63)	CKSSYB103K16	
C 7862	(B,53,89) (G)	CKSSYB104K10		C 7967	(A,95,67)	CCSSCH470J50	
C 7865	(A,65,8) (G)	CKSRYB105K10		C 7968	(A,104,67)	CCSSCH150J50	
C 7866	(A,65,10) (G)	CKSRYB105K10		C 7970	(B,69,51)	CKSSYB104K10	F
C 7867	(A,76,9) (G)	CKSRYB104K16		C 7971	(B,72,51)	CKSSYB104K10	
C 7868	(A,77,9) (G)	CCG1192		C 7972	(A,69,52)	CKSSYB104K10	

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 7973 (A,65,53)
 C 7974 (A,100,70) 1 uF
 C 7975 (A,100,69)
 C 7979 (B,65,55)

CKSSYB104K10
 DCH1246
 CKSSYB103K16
 CKSSYB104K10

C 8524 (B,53,114) (A,B)
 C 8525 (A,10,120)
 C 8601 (A,19,9)
 C 8602 (A,21,7)
 C 8604 (A,31,7) 2.2 uF

CCSRCH220J50
 CCSRCH470J50
 CCSSCH100D50
 CKSSYB104K16
 CCG1218

C 7980 (B,60,49) 10 uF
 C 7988 (B,77,91)
 C 7989 (B,79,91)
 C 7990 (B,78,85)
 C 7991 (A,76,74)

CCG1192
 CKSRYB105K10
 CKSRYB105K10
 CKSSYB104K10
 CKSSYB104K10

C 8606 (A,32,10)
 C 8607 (A,33,15)
 C 8608 (A,17,9) 10 uF
 C 8801 (B,111,122)
 C 8813 (A,95,74)

CKSSYB104K10
 CKSSYB104K10
 CCG1192
 CKSRYB331K50
 CKSRYB102K50

C 7994 (B,73,84)
 C 7995 (B,75,84)
 C 7996 (B,74,78)
 C 7997 (B,75,78)
 C 8000 (B,76,70)

CKSRYB105K10
 CKSRYB105K10
 CKSSYB104K10
 CKSSYB104K10
 CKSRYB105K10

C 8814 (A,99,71) 4.7 uF
 C 8815 (A,117,53)
 C 8816 (A,116,53)
 C 8817 (A,115,53)
 C 8818 (A,114,53)

CCG1201
 CCSSCH9R0D50
 CCSSCH9R0D50
 CCSSCH9R0D50
 CCSSCH9R0D50

C 8004 (B,114,72) 10 uF(A,B,C,E)
 C 8007 (B,121,102) (A,B,C,E)
 C 8008 (B,114,71) (A,B,C,E)
 C 8009 (B,121,98) (A,B,C,E)
 C 8012 (A,117,67) (A,B,C,E)

CCG1192
 CCSSCH270J50
 CKSSYB104K10
 CCSSCH270J50
 CKSSYB104K10

C 8819 (A,112,53)
 C 8820 (A,111,53)
 C 8821 (A,110,53)
 C 8822 (A,108,53)
 C 8823 (A,82,76)

CCSSCH9R0D50
 CCSSCH9R0D50
 CCSSCH9R0D50
 CCSSCH9R0D50
 CCSRCH121J50

C 8013 (A,119,67) (A,B,C,E)
 C 8014 (A,120,65) (A,B,C,E)
 C 8016 (B,110,71) (A,B,C,E)
 C 8017 (B,109,71) (A,B,C,E)
 C 8019 (A,115,65) (A,B,C,E)

CKSSYB104K10
 CKSSYB104K10
 CCSSCH120J50
 CCSSCH150J50
 CKSSYB104K10

C 8824 (A,73,31)
 C 8825 (A,61,31)

CCSRCH121J50
 CCSRCH121J50

C**Unit Number:CWX4717****Unit Name:DVD Core Unit****MISCELLANEOUS**

C 8023 (B,129,63) (A,B,C,E)
 C 8024 (A,116,63) (A,B,C,E)
 C 8025 (A,119,62) (A,B,C,E)
 C 8026 (A,120,63) (A,B,C,E)
 C 8028 (A,135,69) 10 uF(A,B,C,E)

CCSSCH470J50
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CCG1192

IC 1002 (B,15,13) Regulator IC
 IC 1003 (B,40,14) IC
 IC 1004 (B,64,28) IC
 IC 1251 (A,12,41) IC
 IC 1401 (B,28,40) Flash ROM Unit

MM1886A50P
 S-1200B50-M5
 NJM2855DL1-33
 BA5839FP
 CWW8811

C 8029 (A,133,68) (A,B,C,E)
 C 8031 (A,128,72) (A,B,C,E)
 C 8032 (A,128,73) 10 uF(A,B,C,E)
 C 8033 (A,134,74) (A,B,C,E)
 C 8034 (A,134,72) (A,B,C,E)

CKSSYB104K10
 CKSSYB104K10
 CCG1192
 CKSSYB102K50
 CKSSYB102K50

IC 1402 (B,46,28) Flash ROM Unit
 IC 1480 (A,65,30) RAM IC
 IC 1501 (A,39,33) IC
 IC 1801 (B,46,10) D/A Converter
 IC 1953 (B,57,17) IC

CWW8812
 M12L64164A-5TG2Y
 MN2DS0018MA
 PCM1753DBQ
 S-1135D12-A6

C 8101 (A,160,85)
 C 8102 (A,159,85)
 C 8103 (A,149,87)
 C 8104 (A,158,85)
 C 8105 (A,155,85)

CKSSYB102K50
 CKSSYB103K16
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB103K16

Q 1101 (B,13,59) Bipolar Transistor
 Q 1102 (B,14,56) Bipolar Transistor
 Q 1103 (B,10,62) Transistor
 Q 1104 (B,22,54) Transistor
 L 1501 (A,54,30) Inductor

LSCR523UB
 LSCR523UB
 2SB1132
 2SB1132
 CTF1743

C 8108 (A,146,78)
 C 8109 (A,152,81)
 C 8110 (A,152,80)
 C 8111 (B,161,75)
 C 8112 (B,161,78)

CCSSCH101J50
 CKSSYB104K10
 CKSSYB104K10
 CKSRYB104K16
 CKSRYB104K16

C 8113 (A,164,86)
 C 8205 (A,84,116) 10 uF
 C 8208 (B,54,28) (A,B)
 C 8501 (A,20,90) (A,B,C,D,E)
 C 8503 (B,146,91)

CKSRYB104K16
 CCG1236
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10

L 1511 (A,48,17) Chip Beads
 L 1902 (A,18,17) Inductor
 L 1903 (B,64,16) Inductor
 L 1904 (A,68,18) Resistor
 X 1501 (B,48,18) Crystal Resonator

VTL1126
 CTF1487
 CTF1558
 RS1/16SS0R0J
 CSS1823

C 8505 (A,10,90) (A,B,C,D,E)
 C 8506 (A,46,108)
 C 8507 (A,41,110)
 C 8508 (A,39,107)
 C 8512 (B,48,117) (A,B)

CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CKSSYB104K10
 CCSRCH220J50

F 1001 (A,14,19) Chip EMI Filter
 F 1002 (B,64,18) Chip EMI Filter
 S 1 (A,47,55) Lever Switch
 S 3 (B,26,13) Lever Switch
 VR1101 (A,7,63) Semi-fixed 6.8 kohm(B)

DTF1106
 DTL1106
 CSN1090
 CSN1089
 CCP1447

C 8517 (A,58,122) (A,B)
 C 8520 (B,41,117) (A,B)
 C 8521 (B,44,117) (A,B)
 C 8522 (B,50,117) (A,B)
 C 8523 (B,39,117) (A,B)

CKSRYB104K50
 CCSRCH220J50
 CCSRCH220J50
 CCSRCH220J50
 CCSRCH220J50

VR1102 (A,7,59) Semi-fixed 15 kohm(B)
 CN1101 (A,21,63) Connector
 CN1952 (A,42,11) Connector

CCP1449
 CKS6631
 CKS6025

RESISTORS

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 1004	(B,12,20)	RS1/16SS4702F	R 1518	(B,34,31)	RS1/16SS103J
R 1007	(B,12,21)	RS1/16SS6801F	R 1519	(A,25,43)	RS1/16SS102J
R 1019	(B,34,7)	RS1/16SS101J	R 1522	(A,21,37)	RS1/16SS104J
R 1025	(B,36,6)	RS1/16SS101J	R 1523	(A,23,37)	RS1/16SS221J
R 1027	(A,40,18)	RS1/16SS101J	R 1524	(B,29,33)	RS1/16SS472J
R 1101	(B,15,57)	RS1/16SS104J	R 1525	(A,25,44)	RS1/16SS103J
R 1102	(B,11,56)	RS1/16SS104J	R 1526	(A,23,40)	RS1/16SS103J
R 1103	(B,14,61)	RS1/16SS4300F	R 1527	(A,35,48)	RS1/16SS682J
R 1104	(B,11,58)	RS1/16SS5100F	R 1528	(B,20,33)	RS1/16SS103J
R 1105	(B,17,54)	RS1/16SS4300F	R 1529	(B,35,21)	RS1/16SS103J
R 1106	(B,10,57)	RS1/16SS5600F	R 1530	(B,18,33)	RS1/16SS103J
R 1109	(B,6,57)	RS1/16SS3R3J	R 1531	(B,34,30)	RS1/16SS103J
R 1110	(B,16,54)	RS1/16SS3R3J	R 1533	(A,29,48)	RS1/16SS104J
R 1111	(B,6,63)	RS1/10SR3R3J	R 1534	(B,29,48)	RS1/16SS221J
R 1112	(B,5,58)	RS1/10SR3R3J	R 1535	(A,22,44)	RS1/16SS104J
R 1113	(B,15,59)	RS1/10SR3R9J	R 1536	(B,32,48)	RS1/16SS104J
R 1114	(B,19,57)	RS1/10SR3R3J	R 1537	(A,25,46)	RS1/16SS104J
R 1115	(B,6,61)	RS1/10SR2R7J	R 1538	(A,56,35)	RS1/16SS104J
R 1116	(B,6,62)	RS1/10SR2R7J	R 1539	(B,34,48)	RS1/16SS104J
R 1117	(B,18,59)	RS1/10SR3R9J	R 1540	(A,26,46)	RS1/16SS221J
R 1118	(B,16,59)	RS1/10SR3R9J	R 1541	(A,26,45)	RS1/16SS221J
R 1223	(A,42,50)	RS1/16SS561J	R 1542	(B,27,34)	RS1/16SS103J
R 1225	(B,29,7)	RS1/16SS471J	R 1546	(A,33,48)	RS1/16SS682J
R 1251	(A,6,48)	RS1/16SS333J	R 1601	(A,32,17)	RS1/16SS123J
R 1252	(A,6,47)	RS1/16SS473J	R 1602	(A,32,18)	RS1/16SS123J
R 1253	(A,6,46)	RS1/16SS333J	R 1603	(B,31,20)	RS1/16SS1002D
R 1254	(A,6,45)	RS1/16SS473J	R 1604	(A,24,21)	RS1/16SS105J
R 1255	(A,22,48)	RS1/16SS183J	R 1605	(A,22,23)	RS1/16SS105J
R 1256	(A,21,45)	RS1/16SS153J	R 1670	(B,40,19)	RS1/16SS1002D
R 1257	(B,8,37)	RS1/16SS221J	R 1671	(B,43,19)	RS1/16SS2402D
R 1258	(A,19,39)	RS1/16SS221J	R 1672	(A,39,18)	RS1/16SS2000D
R 1401	(B,34,28)	RS1/16SS221J	R 1674	(A,38,17)	RS1/16SS3002D
R 1402	(B,35,47)	RS1/16SS104J	R 1801	(B,51,8)	RS1/16SS104J
R 1405	(B,55,35)	RS1/16SS104J	R 1802	(B,53,8)	RS1/16SS104J
R 1406	(B,39,45)	RS1/16SS472J	R 1803	(B,51,14)	RS1/16SS821J
R 1480	(A,73,24)	RAB4CQ560J	R 1804	(B,53,14)	RS1/16SS821J
R 1481	(A,73,28)	RAB4CQ560J	R 1982	(A,10,62)	RS1/16SS822J
R 1482	(A,73,32)	RAB4CQ560J	R 1983	(B,41,19)	RS1/16SS1000D
R 1483	(A,73,35)	RAB4CQ560J	R 1987	(B,43,20)	RS1/16SS0R0J
R 1484	(A,73,39)	RAB4CQ560J	R 1990	(B,35,19)	RS1/16SS2000D
R 1485	(A,55,22)	RAB4CQ560J	R 1991	(B,31,16)	RS1/16SS101J
R 1486	(A,56,27)	RAB4CQ560J	R 1996	(B,36,13)	RS1/16SS2000D
R 1487	(A,56,37)	RAB4CQ560J	R 1997	(B,36,10)	RS1/16SS101J
R 1488	(A,56,40)	RAB4CQ560J	R 2002	(B,43,10)	RS1/16SS2000D
R 1489	(A,54,29)	RS1/16SS560J	R 2003	(B,43,8)	RS1/16SS101J
R 1490	(A,73,21)	RS1/16SS560J	CAPACITORS		
R 1501	(B,49,20)	RS1/16SS122J	C 1001	(B,43,13)	CKSRYB105K10
R 1503	(B,47,20)	RS1/16SS105J	C 1002	(B,13,17)	CKSSYB104K16
R 1504	(A,50,17)	RS1/16SS121J	C 1003	(B,16,18)	CKSSYB104K16
R 1505	(A,46,18)	RS1/16SS101J	C 1004	(B,15,17) 4.7 uF	CCG1201
R 1506	(B,46,15)	RS1/16SS101J	C 1005	(B,41,11)	CKSRYB105K16
R 1507	(B,44,17)	RS1/16SS101J	C 1010	(B,60,23)	CKSQYB225K10
R 1508	(B,43,17)	RS1/16SS221J	C 1011	(B,64,22)	CKSRYB105K10
R 1509	(A,21,34)	RS1/16SS102J	C 1015	(A,26,7)	CKSSYB102K50
R 1510	(A,11,29)	RS1/16SS102J	C 1016	(B,64,15)	CKSSYB102K50
R 1512	(A,55,31)	RS1/16SS470J	C 1018	(B,14,21)	CKSSYB104K10
R 1513	(A,23,38)	RS1/16SS203J	C 1040	(B,59,12)	CCSRCH821J50
R 1514	(A,25,40)	RS1/16SS183J	C 1041	(B,19,12)	CCSRCH271J50
R 1516	(A,25,36)	RS1/16SS104J			
R 1517	(B,58,22)	RS1/16SS103J			

	<u>Circuit Symbol and No.</u>	<u>Part No.</u>	<u>Circuit Symbol and No.</u>	<u>Part No.</u>
A	C 1101 (B,15,53) 10 uF	CCG1192	C 1604 (A,30,17)	CCSSCH680J50
	C 1104 (B,8,57)	CKSSYB104K10	C 1605 (A,30,18)	CCSSCH680J50
	C 1105 (B,18,54)	CKSSYB104K10	C 1606 (A,35,19)	CKSSYB104K10
			C 1607 (A,20,24) 10 uF	CCG1192
	C 1106 (B,8,66)	CKSSYB103K16		
	C 1107 (B,26,53)	CKSSYB103K16	C 1608 (A,28,18) 4.7 uF	CCG1201
	C 1108 (A,20,56)	CKSSYB103K16	C 1609 (A,26,22)	CKSSYB104K10
	C 1109 (A,7,57)	CKSRYB224K16	C 1612 (A,24,24)	CKSSYB104K10
	C 1110 (A,18,58)	CKSSYB103K16	C 1613 (A,25,25)	CKSSYB104K10
			C 1614 (A,23,24)	CKSSYB104K10
B	C 1111 (A,9,66)	CKSRYB224K16		
	C 1112 (B,17,52) 22 uF	DCH1256	C 1615 (A,23,26)	CKSSYB104K10
	C 1113 (B,9,58) 22 uF	DCH1256	C 1616 (A,25,27)	CKSSYB104K10
	C 1210 (B,77,33)	CKSSYB104K16	C 1617 (B,27,28)	CKSSYB104K10
	C 1251 (B,13,41)	CEVW101M16	C 1618 (A,23,29)	CCSSCH101J50
			C 1619 (A,23,30)	CKSSYB562K25
	C 1252 (B,8,41) 4.7 uF	CCG1222		
	C 1253 (B,8,39)	CKSSYB104K16	C 1620 (B,27,30)	CKSSYB224K6R3
	C 1254 (A,6,37)	CKSSYB104K16	C 1621 (A,23,31)	CKSSYB224K6R3
	C 1255 (A,19,37)	CKSSYB104K16	C 1622 (A,25,31)	CKSSYB333K16
C	C 1401 (B,34,27)	CKSSYB104K16	C 1623 (A,27,20)	CKSRYB105K10
			C 1624 (A,25,32)	CKSSYB104K10
	C 1403 (B,39,40)	CKSSYB104K10		
	C 1408 (B,58,27)	CKSSYB104K10	C 1625 (A,25,29)	CKSSYB104K10
	C 1410 (B,34,29)	CKSSYB104K16	C 1671 (A,42,19)	CKSSYB104K10
	C 1480 (A,71,19)	CKSSYB104K10	C 1673 (A,37,17)	CKSSYB104K10
	C 1481 (A,73,22)	CKSSYB104K10	C 1674 (B,42,20)	CKSSYB104K10
			C 1676 (B,38,20)	CKSRYB105K10
	C 1482 (A,72,26)	CKSSYB104K10		
	C 1484 (A,73,30)	CKSSYB104K10	C 1801 (B,51,10) 4.7 uF	CCG1201
D	C 1485 (A,73,41)	CKSSYB104K10	C 1802 (B,53,10) 4.7 uF	CCG1201
	C 1487 (A,58,29)	CKSSYB104K10	C 1803 (B,50,12)	CCSRCH182J50
	C 1488 (A,57,25)	CKSSYB104K10	C 1804 (B,53,12)	CCSRCH182J50
			C 1805 (B,47,14)	CKSSYB104K10
	C 1489 (A,65,17) 10 uF	CCG1192		
	C 1490 (A,66,18)	CKSSYB102K50	C 1806 (B,56,8) 10 uF	CCG1192
	C 1501 (B,62,20) 10 uF	CCG1192	C 1809 (B,40,17)	CKSSYB102K50
	C 1502 (B,55,19) 10 uF	CCG1192	C 1953 (B,60,17)	CKSRYB105K10
	C 1503 (A,54,33)	CKSSYB104K10	C 1954 (B,55,17)	CKSRYB105K10
			C 1955 (B,77,40)	CKSSYB104K16
E	C 1504 (A,54,24)	CKSSYB104K10		
	C 1505 (A,54,27)	CKSSYB104K10	C 1962 (B,40,20)	CKSRYB105K10
	C 1506 (B,53,34)	CKSSYB104K10		
	C 1507 (A,54,36)	CKSSYB104K10		
	C 1508 (A,54,38)	CKSSYB104K10		
	C 1509 (A,54,42)	CKSSYB104K10		
	C 1510 (B,51,18)	CCSSCH120J50		
	C 1511 (A,49,18)	CKSSYB104K10		
	C 1512 (B,46,18)	CCSSCH120J50		
F	C 1513 (A,48,47)	CKSSYB104K10		
	C 1514 (B,45,20)	CKSSYB104K10		
	C 1515 (A,44,19)	CKSSYB104K10		
	C 1516 (A,44,47)	CKSSYB104K10		
	C 1517 (A,42,47)	CKSSYB104K10		
	C 1518 (A,38,47)	CKSSYB104K10		
	C 1519 (A,34,47)	CKSSYB104K10		
	C 1520 (A,27,47)	CKSSYB104K10		
	C 1521 (A,25,33)	CKSSYB104K10		
	C 1522 (A,25,38)	CKSSYB104K10		
	C 1523 (A,20,45)	CKSSYB104K10		
	C 1524 (A,21,48)	CKSSYB473K16		
	C 1526 (A,25,37)	CKSSYB103K16		
	C 1528 (B,30,48)	CCSSCH471J50		
	C 1601 (A,32,19)	CKSSYB103K16		
	C 1602 (A,34,17)	CCSSCH101J50		
	C 1603 (A,34,18)	CCSSCH101J50		



Unit Number:CWN9394

Unit Name:SOC Dual Core Unit

MISCELLANEOUS

IC 4001 (A,44,43) U-PRO IC	MCIMX6U6AVM08AB
IC 4301 (A,55,72) RAM IC	H5TQ4G63AFR-PBC
IC 4302 (A,37,72) RAM IC	H5TQ4G63AFR-PBC
IC 4401 (A,11,60) Flash ROM IC(SOC)	CWJ1903
IC 4402 (B,23,64) FPGA/PLD IC	PE1029B
IC 4403 (B,25,55) IC	TC7WU04FU
IC 4501 (B,12,39) IC	AK8814VQ
IC 4701 (B,71,62) IC	LTC3612EUDC
IC 4721 (B,69,34) IC	LTC3612EUDC
IC 4741 (B,69,50) IC	LTC3612EUDC
IC 4766 (A,31,17) Regulator IC	MM3479A30P
IC 4791 (A,48,23) IC	TC7SH08FUS1
IC 4792 (A,48,18) Reset IC	PST8429N
IC 4793 (A,46,15) IC	TC7SH08FUS1
IC 4794 (A,43,19) IC	TC7SH08FUS1
IC 4796 (A,25,58) Regulator IC	MM3479A12P
IC 4901 (A,70,26) IC	337S3959

Circuit Symbol and No.			Part No.	Circuit Symbol and No.			Part No.
IC 4903	(A,30,24)	IC	TC7WBL125AFK	R 4103	(B,14,68)		RS1/16SS220J
Q 4776	(A,64,23)	Chip Transistor	2SB1689	R 4105	(A,27,55)		RS1/16SS103J
Q 4777	(A,64,29)	Resistor Built-IN TR	LTC044EEB	R 4111	(B,16,64)		RS1/16SS472J
Q 4778	(A,28,23)	Resistor Built-IN TR	LTC044EEB	R 4141	(B,58,82)		RS1/16SS103J
L 4501	(B,7,49)	Inductor	ATL7039	R 4151	(A,30,27)		RS1/16SS0R0J
L 4502	(B,9,30)	Inductor	ATL7039	R 4154	(B,67,27)		RS1/16SS0R0J
L 4701	(A,72,59)	SMD Inductor	CTH1500	R 4155	(B,68,27)		RS1/16SS0R0J
L 4721	(A,65,33)	SMD Inductor	CTH1499	R 4157	(A,31,27)		RS1/16SS0R0J
L 4741	(A,70,47)	SMD Inductor	CTH1499	R 4158	(B,31,37)		RAB4CQ471J
L 4901	(B,58,42)	Ferrite Bead	CTF1528	R 4159	(B,31,40)		RAB4CQ471J
L 4909	(A,57,38)	Inductor	CTF1787	R 4160	(B,32,43)		RAB4CQ471J
L 5001	(A,73,22)	Chip Ferrite Bead	BTX1046	R 4162	(B,32,46)		RAB4CQ471J
L 5002	(A,69,19)	Chip Ferrite Bead	VTL1183	R 4163	(A,31,40)		RS1/16SS470J
TH4381	(A,26,72)	Thermistor	CCX1084	R 4164	(B,21,43)		RS1/16SS470J
X 4001	(A,50,28)	Resonator 24 MHz	CSS1773	R 4165	(A,30,40)		RS1/16SS470J
X 4002	(A,46,28)	Resonator 32.768 kHz	CSS1807	R 4186	(A,27,38)		RS1/16SS101J
X 4401	(B,31,55)	Crystal Resonator 14.745 6 MHz	CSS1835	R 4209	(A,25,55)		RS1/16SS103J
X 4901	(B,61,43)	VCXO 11.289 6MHz	CWX4566	R 4213	(A,26,49)		RS1/16SS103J
CN5001	(B,58,20)	B TO B Connector	CKS6499	R 4216	(A,24,46)		RS1/16SS103J
CN5002	(B,21,20)	B TO B Connector	CKS6556	R 4220	(A,22,41)		RS1/16SS103J
RESISTORS				R 4222	(A,24,41)		RS1/16SS103J
R 4001	(A,28,54)		RAB4CQ470J	R 4224	(A,23,38)		RS1/16SS103J
R 4002	(A,28,51)		RAB4CQ470J	R 4226	(A,25,41)		RS1/16SS103J
R 4003	(A,28,48)		RAB4CQ470J	R 4228	(A,23,41)		RS1/16SS103J
R 4004	(A,28,45)		RAB4CQ470J	R 4230	(A,22,38)		RS1/16SS222J
R 4005	(A,28,43)		RAB4CQ470J	R 4232	(A,21,38)		RS1/16SS222J
R 4006	(A,28,41)		RS1/16SS470J	R 4236	(B,25,39)		RS1/16SS103J
R 4007	(A,51,31)		RS1/16SS470J	R 4237	(B,23,44)		RS1/16SS103J
R 4008	(A,6,23)		RS1/16SS0R0J	R 4238	(A,57,40)		RS1/16SS0R0J
R 4010	(A,35,58)		RS1/16SS0R0J	R 4242	(A,6,25)		RS1/16SS101J
R 4011	(A,26,46)		RS1/16SS103J	R 4244	(A,21,41)		RS1/16SS103J
R 4012	(A,27,52)		RS1/16SS103J	R 4260	(B,52,13)		RS1/16SS103J
R 4015	(A,46,31)		RS1/16SS102J	R 4261	(B,54,13)		RS1/16SS103J
R 4017	(A,26,55)		RS1/16SS103J	R 4262	(B,64,8)		RS1/16SS103J
R 4018	(B,51,41)		RS1/16SS0R0J	R 4263	(B,25,30)		RS1/16SS103J
R 4022	(B,19,43)		RS1/16SS330J	R 4264	(B,13,27)		RS1/16SS103J
R 4029	(B,65,10)		RS1/16SS472J	R 4265	(A,15,19)		RS1/16SS103J
R 4054	(A,26,52)		RS1/16SS103J	R 4266	(A,16,19)		RS1/16SS103J
R 4055	(A,26,41)		RS1/16SS103J	R 4268	(B,24,30)		RS1/16SS103J
R 4056	(A,27,41)		RS1/16SS103J	R 4270	(B,51,32)		RS1/16SS103J
R 4057	(A,24,43)		RS1/16SS103J	R 4271	(B,51,30)		RS1/16SS103J
R 4058	(A,25,43)		RS1/16SS103J	R 4272	(A,28,40)		RS1/16SS470J
R 4059	(A,26,43)		RS1/16SS103J	R 4273	(A,40,55)		RS1/16SS2400F
R 4060	(A,27,43)		RS1/16SS103J	R 4274	(B,57,55)		RS1/16SS1001D
R 4063	(A,24,49)		RS1/16SS103J	R 4275	(B,55,55)		RS1/16SS1001D
R 4064	(A,25,49)		RS1/16SS103J	R 4276	(B,35,10)		RS1/16SS103J
R 4066	(A,27,49)		RS1/16SS103J	R 4277	(B,56,47)		RS1/16SS103J
R 4067	(A,24,52)		RS1/16SS103J	R 4278	(B,64,29)		RS1/16SS103J
R 4068	(A,25,52)		RS1/16SS103J	R 4279	(B,25,11)		RS1/16SS103J
R 4070	(A,24,55)		RS1/16SS103J	R 4280	(B,31,30)		RS1/16SS103J
R 4073	(A,25,46)		RS1/16SS103J	R 4281	(B,34,11)		RS1/16SS103J
R 4074	(A,27,46)		RS1/16SS103J	R 4282	(B,27,9)		RS1/16SS103J
R 4081	(A,6,34)		RS1/10SR0R0J	R 4283	(B,30,30)		RS1/16SS103J
R 4084	(A,6,29)		RS1/16SS102J	R 4284	(B,47,11)		RS1/16SS103J
R 4091	(A,48,27)		RS1/16SS225J	R 4285	(B,62,13)		RS1/16SS103J
R 4095	(A,44,24)		RS1/16SS0R0J	R 4286	(A,44,55)		RS1/16SS0R0J
R 4100	(B,21,42)		RS1/16SS470J	R 4287	(A,43,55)		RS1/16SS0R0J
R 4101	(B,54,41)		RS1/16SS0R0J	R 4288	(B,66,27)		RS1/16SS103J
				R 4289	(B,43,6)		RS1/16SS103J

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 4290	(B,52,43)	RS1/16SS0R0J	R 4473	(B,25,70)	RS1/16SS0R0J
	R 4291	(A,42,55)	RS1/16SS0R0J	R 4474	(B,24,70)	RS1/16SS0R0J
	R 4292	(A,41,55)	RS1/16SS0R0J	R 4475	(B,29,62)	RS1/16SS0R0J
	R 4293	(B,46,10)	RS1/16SS104J	R 4476	(B,29,61)	RS1/16SS0R0J
				R 4477	(B,22,70)	RS1/16SS0R0J
	R 4295	(B,27,13)	RS1/16SS103J			
	R 4296	(B,66,8)	RS1/16SS222J	R 4479	(B,19,70)	RS1/16SS0R0J
	R 4297	(B,65,8)	RS1/16SS103J	R 4480	(B,22,71)	RS1/16SS0R0J
	R 4300	(B,26,13)	RS1/16SS103J	R 4481	(B,18,62)	RS1/16SS0R0J
	R 4302	(B,47,10)	RS1/16SS104J	R 4502	(B,18,42)	RS1/16SS103J
				R 4503	(B,23,33)	RS1/16SS101J
	R 4303	(A,22,52)	RS1/16SS101J			
	R 4307	(B,55,72)	RS1/16SS1200D	R 4504	(B,22,33)	RS1/16SS101J
	R 4308	(B,37,72)	RS1/16SS1200D	R 4505	(B,19,41)	RS1/16SS103J
	R 4309	(B,52,73)	RS1/16SS2400F	R 4507	(B,18,39)	RS1/16SS221J
B	R 4310	(B,33,73)	RS1/16SS2400F	R 4508	(B,18,36)	RS1/16SS221J
				R 4510	(B,12,31)	RS1/16SS6801D
	R 4314	(B,58,81)	RS1/16SS102J			
	R 4315	(B,40,81)	RS1/16SS102J	R 4511	(B,21,39)	RS1/16SS101J
	R 4317	(B,21,4)	RS1/16SS0R0J	R 4512	(B,6,42)	RS1/16SS103J
	R 4381	(A,26,73)	RS1/16SS1802D	R 4513	(B,17,34)	RS1/10SR0R0J
	R 4401	(A,8,47)	RS1/16SS102J	R 4514	(B,17,29)	RS1/10SR0R0J
				R 4515	(B,17,32)	RS1/10SR0R0J
	R 4402	(A,13,71)	RS1/16SS0R0J			
	R 4403	(A,12,48)	RS1/16SS0R0J	R 4525	(B,6,67)	RS1/16SS0R0J
	R 4404	(B,29,56)	RS1/16SS102J	R 4529	(B,6,46)	RS1/16SS0R0J
	R 4405	(B,29,54)	RS1/16SS105J	R 4540	(B,7,68)	RS1/16SS220J
	R 4407	(B,16,63)	RS1/16SS471J	R 4543	(A,15,33)	RS1/16SS101J
C				R 4544	(A,14,33)	RS1/16SS101J
	R 4411	(B,22,57)	RS1/16SS220J			
	R 4412	(B,26,58)	RS1/16SS102J	R 4545	(A,13,33)	RS1/16SS101J
	R 4413	(A,16,72)	RS1/16SS0R0J	R 4546	(A,12,33)	RS1/16SS101J
	R 4415	(A,27,62)	RS1/16SS0R0J	R 4547	(A,9,37)	RS1/16SS101J
	R 4416	(A,19,57)	RS1/16SS0R0J	R 4548	(A,9,36)	RS1/16SS101J
				R 4549	(A,9,35)	RS1/16SS101J
	R 4417	(A,17,73)	RS1/16SS472J			
	R 4418	(A,17,74)	RS1/16SS472J	R 4550	(A,9,34)	RS1/16SS101J
	R 4420	(A,21,67)	RS1/16SS101J	R 4702	(A,75,64)	RS1/8SQ0R0J
	R 4421	(A,22,62)	RS1/16SS101J	R 4704	(A,66,60)	RS1/8SQ0R0J
	R 4445	(B,20,46)	RAB4CQ101J	R 4705	(B,70,59)	RS1/16SS220J
				R 4706	(B,66,59)	RS1/16SS105J
D	R 4446	(B,20,49)	RAB4CQ101J			
	R 4447	(B,14,69)	RS1/16SS103J	R 4707	(B,65,59)	RS1/16SS105J
	R 4448	(A,26,69)	RS1/16SS0R0J	R 4708	(B,65,61)	RS1/16SS2201D
	R 4449	(B,7,68)	RS1/16SS0R0J	R 4709	(B,68,65)	RS1/16SS0R0J
	R 4450	(B,6,66)	RS1/16SS330J	R 4710	(B,65,62)	RS1/16SS1003D
				R 4711	(B,67,63)	RS1/16SS183J
	R 4451	(B,16,64)	RS1/16SS0R0J			
	R 4452	(B,14,64)	RS1/16SS561J	R 4713	(B,68,66)	RS1/16SS1002D
	R 4453	(B,7,63)	RS1/16SS561J	R 4714	(B,67,66)	RS1/16SS1503D
	R 4454	(B,6,64)	RS1/16SS561J	R 4715	(B,66,62)	RS1/16SS1503D
	R 4455	(B,14,57)	RS1/16SS220J	R 4716	(A,66,62)	RS1/16SS0R0J
				R 4717	(B,68,59)	RS1/16SS0R0J
	R 4456	(B,6,55)	RS1/16SS220J			
E	R 4457	(B,12,51)	RS1/16SS220J	R 4721	(A,67,39)	RS1/8SQ0R0J
	R 4458	(B,13,51)	RS1/16SS220J	R 4722	(A,71,30)	RS1/8SQ0R0J
	R 4459	(B,16,55)	RS1/16SS220J	R 4723	(A,65,39)	RS1/8SQ0R0J
	R 4460	(B,16,53)	RS1/16SS220J	R 4724	(B,66,35)	RS1/16SS220J
				R 4725	(B,66,39)	RS1/16SS105J
	R 4461	(B,16,52)	RS1/16SS220J			
	R 4462	(B,14,52)	RS1/16SS220J	R 4726	(B,66,40)	RS1/16SS105J
	R 4463	(B,28,49)	RS1/16SS0R0J	R 4727	(B,67,40)	RS1/16SS2702D
	R 4464	(B,28,48)	RS1/16SS0R0J	R 4728	(B,72,37)	RS1/16SS105J
	R 4465	(B,28,47)	RS1/16SS0R0J	R 4729	(B,71,41)	RS1/16SS1503D
				R 4730	(B,73,37)	RS1/16SS1002D
	R 4466	(B,28,46)	RS1/16SS0R0J			
	R 4467	(B,28,45)	RS1/16SS0R0J	R 4731	(B,74,39)	RS1/16SS1503D
F	R 4468	(B,28,45)	RS1/16SS0R0J	R 4732	(B,68,39)	RS1/16SS1203D
	R 4469	(B,28,44)	RS1/16SS0R0J	R 4733	(A,69,39)	RS1/16SS0R0J
	R 4470	(B,28,43)	RS1/16SS0R0J	R 4734	(B,70,39)	RS1/16SS223J
				R 4735	(A,72,40)	RS1/10SR102J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.	
R 4736	(B,66,37)	RS1/16SS0R0J	R 4915	(A,41,24)	RS1/16SS0R0J	
R 4737	(B,69,40)	RS1/16SS4703D	R 4916	(B,36,5)	RS1/16SS0R0J	A
R 4738	(B,64,27)	RS1/16SS103J	R 4918	(A,33,24)	RS1/16SS0R0J	
R 4739	(B,71,44)	RS1/16SS0R0J	R 4934	(B,33,48)	RS1/16SS0R0J	
R 4741	(A,65,48)	RS1/8SQ0R0J	R 4937	(A,25,11)	RS1/16SS103J	
			R 4938	(A,24,11)	RS1/16SS103J	
R 4742	(A,73,51)	RS1/8SQ0R0J				
R 4743	(A,65,46)	RS1/8SQ0R0J	R 4939	(A,23,11)	RS1/16SS103J	
R 4744	(B,69,46)	RS1/16SS220J	R 4941	(B,55,40)	RS1/16SS431J	
R 4745	(B,65,47)	RS1/16SS105J	R 4942	(B,54,43)	RS1/16SS102J	
R 4746	(B,63,47)	RS1/16SS105J	R 4945	(B,26,37)	RS1/16SS103J	
			R 4946	(A,28,11)	RS1/16SS102J	
R 4747	(B,63,48)	RS1/16SS2702D				
R 4749	(B,63,52)	RS1/16SS1503D	R 5003	(B,64,27)	RS1/16SS0R0J	
R 4750	(B,67,54)	RS1/16SS1002D	R 5004	(B,65,27)	RS1/16SS0R0J	B
R 4751	(B,65,54)	RS1/16SS1503D	R 5006	(B,23,13)	RS1/16SS0R0J	
R 4752	(B,65,49)	RS1/16SS1203D	R 5007	(B,15,13)	RS1/16SS471J	
			R 5008	(B,28,13)	RS1/16SS151J	
R 4753	(A,64,50)	RS1/16SS0R0J	R 5009	(B,13,13)	RS1/16SS471J	
R 4754	(B,65,51)	RS1/16SS223J	R 5012	(B,43,12)	RS1/16SS0R0J	
R 4755	(A,64,53)	RS1/10SR102J	R 5013	(B,44,12)	RS1/16SS0R0J	
R 4756	(B,67,47)	RS1/16SS0R0J	R 5014	(B,45,12)	RS1/16SS0R0J	
R 4757	(B,63,50)	RS1/16SS4703D	R 5015	(B,46,12)	RS1/16SS0R0J	
R 4758	(B,73,39)	RS1/16SS0R0J	R 5016	(B,47,12)	RS1/16SS0R0J	
R 4759	(B,61,52)	RS1/16SS0R0J	R 5017	(A,42,30)	RS1/16SS0R0J	
R 4767	(A,38,16)	RS1/10SR0R0J	R 5020	(B,24,13)	RS1/16SS560J	C
R 4768	(B,37,10)	RS1/10SR0R0J	R 5021	(B,24,27)	RS1/16SS0R0J	
R 4769	(A,26,16)	RS1/16SS0R0J	R 5022	(B,25,27)	RS1/16SS0R0J	
R 4772	(A,41,12)	RS1/16SS103J	R 5023	(B,26,27)	RS1/16SS101J	
R 4773	(A,33,6)	RS1/10SR0R0J	R 5024	(B,26,30)	RS1/16SS121J	
R 4775	(A,41,13)	RS1/16SS0R0J	R 5025	(B,27,28)	RS1/16SS121J	
R 4776	(A,64,27)	RS1/10SR332J	R 5026	(B,64,12)	RS1/16SS121J	
R 4777	(A,64,26)	RS1/10SR332J	R 5027	(B,63,12)	RS1/16SS680J	
R 4778	(A,27,18)	RS1/16SS103J	R 5028	(B,65,12)	RS1/16SS121J	
R 4779	(A,28,26)	RS1/16SS103J	R 5029	(A,18,45)	RS1/16SS102J	
R 4780	(A,28,26)	RS1/16SS101J	R 5030	(A,19,52)	RS1/16SS102J	
R 4790	(A,51,22)	RS1/16SS101J	R 5031	(A,17,45)	RS1/16SS102J	D
R 4791	(A,47,25)	RS1/16SS101J	R 5032	(B,17,13)	RS1/16SS560J	
R 4792	(A,51,17)	RS1/16SS0R0J	R 5033	(B,19,13)	RS1/16SS221J	
R 4793	(A,42,16)	RS1/16SS0R0J	R 5034	(B,60,13)	RS1/16SS681J	
R 4794	(A,50,15)	RS1/16SS103J	R 5036	(B,49,13)	RS1/16SS101J	
R 4795	(A,47,21)	RS1/16SS683J	R 5037	(B,14,27)	RS1/16SS101J	
R 4798	(A,44,17)	RS1/16SS104J	R 5040	(A,11,21)	RS1/16SS681J	
R 4799	(A,46,21)	RS1/16SS0R0J	R 5041	(A,12,21)	RS1/16SS681J	
R 4800	(A,45,19)	RS1/16SS0R0J	R 5042	(A,10,21)	RS1/16SS471J	
R 4801	(A,45,13)	RS1/16SS0R0J	R 5043	(A,9,21)	RS1/16SS0R0J	
R 4802	(A,44,23)	RS1/16SS0R0J	R 5044	(A,8,21)	RS1/16SS471J	
R 4803	(A,52,25)	RS1/16SS101J	R 5045	(A,66,20)	RS1/16SS0R0J	E
R 4804	(A,51,23)	RS1/16SS103J	R 5046	(B,56,13)	RS1/16SS0R0J	
R 4805	(A,45,25)	RS1/16SS103J	R 5047	(B,58,13)	RS1/16SS680J	
R 4845	(A,66,58)	RS1/8SQ0R0J	R 5048	(B,53,46)	RS1/16SS331J	
R 4901	(A,41,30)	RS1/16SS103J	R 5049	(B,55,46)	RS1/16SS331J	
R 4902	(A,72,25)	RS1/16SS222J	R 5053	(B,10,27)	RS1/16SS560J	
R 4903	(A,38,30)	RS1/16SS470J	R 5054	(B,9,27)	RS1/16SS560J	
R 4904	(A,66,27)	RS1/16SS222J	R 5055	(B,13,27)	RS1/16SS560J	
R 4905	(A,66,26)	RS1/16SS221J	R 5056	(B,12,27)	RS1/16SS560J	
R 4906	(A,66,26)	RS1/16SS103J	R 5057	(B,10,27)	RS1/16SS560J	
R 4907	(A,66,24)	RS1/16SS0R0J	R 5059	(B,32,12)	RS1/16SS560J	
R 4911	(A,57,36)	RS1/16SS151J	R 5060	(B,33,12)	RS1/16SS560J	F
R 4912	(B,63,41)	RS1/16SS0R0J	R 5061	(B,29,12)	RS1/16SS560J	
R 4913	(B,61,41)	RS1/16SS0R0J	R 5062	(B,30,12)	RS1/16SS560J	
R 4914	(A,37,30)	RS1/16SS750J				

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 5063 (B,27,11)
R 5064 (B,34,12)

RS1/16SS0R0J
RS1/16SS0R0J

C 4006 (B,51,36)
C 4007 (B,53,38) 2.2 uF
C 4008 (B,51,38)
C 4009 (B,41,36)
C 4010 (B,35,30) 10 uF

CKSSYB104K10
CCG1218
CKSSYB104K10
CKSSYB104K10
CCG1192

A

R 5065 (B,31,12)
R 5090 (B,58,27)
R 5099 (B,18,28)
R 5100 (B,54,47)
R 5101 (A,57,43)

RS1/16SS560J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS331J
RS1/16SS680J

C 4011 (B,40,36)
C 4012 (B,39,36)
C 4013 (B,45,33) 10 uF
C 4014 (B,46,34)
C 4015 (B,47,38)

CKSSYB104K10
CKSSYB104K10
CCG1192
CKSSYB104K10
CKSSYB104K10

■

R 5102 (A,20,50)
R 5103 (B,23,27)
R 5104 (A,22,47)
R 5105 (A,22,49)
R 5106 (A,21,50)

RS1/16SS680J
RS1/16SS560J
RS1/16SS680J
RS1/16SS680J
RS1/16SS680J

C 4016 (B,47,40)
C 4017 (B,47,43)
C 4018 (B,47,44)
C 4019 (B,45,39)
C 4020 (B,44,41)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

B

R 5107 (B,21,10)
R 5114 (B,28,28)
R 5115 (B,28,30)
R 5116 (B,31,27)
R 5117 (B,32,27)

RS1/16SS101J
RS1/16SS101J
RS1/16SS101J
RS1/16SS0R0J
RS1/16SS0R0J

C 4021 (B,44,42)
C 4022 (B,44,43)
C 4023 (B,39,38)
C 4024 (B,39,41)
C 4025 (B,39,44)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

■

R 5119 (B,25,13)
R 5121 (B,35,27)
R 5122 (B,35,29)
R 5125 (A,66,22)
R 5126 (A,66,21)

RS1/16SS101J
RS1/10SR0R0J
RS1/10SR0R0J
RS1/16SS222J
RS1/16SS222J

C 4026 (B,51,38)
C 4027 (B,51,40)
C 4029 (B,41,40)
C 4030 (B,49,41) 1 uF
C 4031 (B,42,45)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
DCH1246
CKSSYB104K10

C

R 5127 (B,63,10)
R 5128 (B,64,10)
R 5129 (B,22,11)
R 5130 (B,37,31)
R 5131 (B,38,28)

RS1/16SS182J
RS1/16SS182J
RS1/16SS101J
RS1/16SS103J
RS1/16SS103J

C 4034 (B,50,43)
C 4037 (B,42,38)
C 4038 (B,40,43) 1 uF
C 4039 (B,38,45)
C 4040 (B,46,46)

CKSSYB104K10
CKSSYB104K10
DCH1246
CKSSYB104K10
CKSSYB104K10

■

R 5132 (A,12,19)
R 5315 (A,17,82)
R 5316 (A,17,83)
R 5317 (A,17,83)
R 5318 (A,17,84)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4041 (B,38,44)
C 4042 (B,49,46)
C 4043 (B,47,46)
C 4044 (B,42,46)
C 4045 (B,40,46)

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10

D

R 5326 (A,65,84)
R 5327 (A,65,83)
R 5328 (A,65,82)
R 5329 (A,65,81)
R 5351 (A,6,15)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4047 (B,50,48)
C 4048 (B,46,48)
C 4050 (B,43,48)
C 4051 (B,45,42) 22 uF
C 4052 (B,44,46) 22 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
DCH1256
CCG1254

■

R 5352 (A,6,15)
R 5353 (A,7,15)
R 5354 (A,8,15)
R 5355 (A,9,15)
R 5356 (A,10,15)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4053 (B,37,36) 22 uF
C 4054 (B,53,32) 10 uF
C 4055 (B,51,35)
C 4056 (A,37,14) 10 uF
C 4057 (B,37,48) 10 uF

CCG1254
CCG1192
CKSSYB104K10
CCG1192
CCG1192

E

R 5357 (A,11,15)
R 5358 (A,12,15)
R 5359 (A,13,15)
R 5360 (A,14,15)
R 5361 (A,15,15)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4058 (B,39,45)
C 4059 (B,48,48)
C 4062 (B,57,53)
C 4063 (B,55,53)
C 4064 (B,45,35) 10 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CCG1192

■

R 5362 (A,15,15)
R 5376 (A,60,15)
R 5377 (A,59,15)
R 5378 (A,58,15)
R 5379 (A,57,15)

RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

C 4065 (B,39,39)
C 4066 (B,49,40)
C 4067 (B,49,38)
C 4068 (B,41,39)
C 4069 (B,42,41) 1 uF

CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
CKSSYB104K10
DCH1246

CAPACITORS

C 4001 (A,52,27)
C 4002 (A,48,29)
C 4003 (A,44,29)
C 4004 (A,44,27)
C 4005 (B,53,36) 10 uF

CCSSCJ3R0C50
CCSSCH4R0C50
CCSSCH180J50
CCSSCH8R0D50
CCG1192

C 4070 (B,46,37)
C 4071 (B,48,33)
C 4072 (B,41,31) 10 uF
C 4073 (B,45,31) 10 uF
C 4075 (B,42,36)

CKSSYB104K10
CKSSYB104K10
CCG1192
CCG1192
CKSSYB104K10

F

5			6			7			8		
Circuit Symbol and No.			Part No.			Circuit Symbol and No.			Part No.		
C 4076	(B,36,40)	10 uF	CCG1192			C 4354	(B,41,74)		CKSSYB104K10		
C 4077	(B,55,49)	10 uF	CCG1192			C 4355	(B,31,69)		CKSSYB104K10		A
C 4078	(B,50,36)		CKSSYB104K10			C 4356	(B,52,74)		CKSSYB104K10		
C 4079	(A,44,25)		CCSSCH101J50			C 4357	(B,40,81)		CKSSYB103K16		
C 4080	(B,53,51)		CKSSYB104K10			C 4358	(B,58,81)		CKSSYB103K16		
						C 4361	(B,31,71)		CKSSYB104K10		
C 4087	(B,44,38)	22 uF	DCH1256								
C 4301	(B,61,66)		CKSSYB104K10			C 4362	(B,34,72)		CKSSYB104K10		
C 4302	(A,61,66)		CKSSYB104K10			C 4363	(B,31,77)		CKSSYB104K10		
C 4303	(B,52,63)		CKSSYB104K10			C 4364	(B,39,73)		CKSSYB104K10		
C 4304	(B,52,64)		CKSSYB104K10			C 4381	(A,28,73)		CKSSYB104K10		
						C 4382	(A,26,71)		CKSSYB104K10		
C 4305	(B,51,67)		CKSSYB104K10								
C 4306	(A,50,67)		CKSSYB104K10			C 4401	(A,11,48)		CKSSYB471K50		
C 4307	(A,50,69)		CKSSYB104K10			C 4402	(A,7,71)		CKSSYB104K10		B
C 4308	(A,50,71)		CKSSYB104K10			C 4403	(A,11,71)		CKSSYB103K16		
C 4309	(B,53,67)	4.7 uF	CCG1201			C 4404	(B,32,52)		CCSSCH8R0D50		
						C 4405	(B,31,57)		CCSSCH8R0D50		
C 4310	(B,53,70)		CKSSYB104K10								
C 4311	(A,61,68)		CKSSYB104K10			C 4406	(B,23,58)		CKSSYB103K16		
C 4312	(B,60,70)		CKSSYB104K10			C 4412	(A,23,64)		CKSSYB103K16		
C 4313	(B,58,71)		CKSSYB104K10			C 4413	(A,20,68)		CKSSYB103K16		
C 4314	(A,61,75)		CKSSYB104K10			C 4414	(A,21,65)		CKSSYB103K16		
						C 4415	(A,21,63)		CKSSYB103K16		
C 4315	(A,61,77)		CKSSYB104K10								
C 4316	(B,61,77)		CKSSYB104K10			C 4416	(A,21,66)		CKSSYB103K16		
C 4317	(B,59,77)	4.7 uF	CCG1201			C 4417	(A,20,63)		CKSSYB103K16		
C 4318	(A,50,75)		CKSSYB104K10			C 4418	(A,18,63)		CKSSYB103K16		C
C 4319	(B,51,75)		CKSSYB104K10			C 4419	(A,18,63)		CKSSYB103K16		
						C 4420	(A,18,64)		CKSSYB103K16		
C 4320	(A,50,77)		CKSSYB104K10								
C 4321	(B,61,68)		CKSSYB104K10			C 4421	(A,18,65)		CKSSYB103K16		
C 4322	(B,61,70)		CKSSYB104K10			C 4422	(A,20,67)		CKSSYB103K16		
C 4323	(B,58,73)		CKSSYB104K10			C 4423	(A,27,65)		CKSSYB103K16		
C 4324	(B,61,75)		CKSSYB104K10			C 4424	(B,28,65)		CKSSYB103K16		
						C 4425	(A,26,67)		CKSSYB103K16		
C 4325	(A,42,66)		CKSSYB104K10								
C 4326	(B,41,66)		CKSSYB104K10			C 4426	(A,19,67)		CKSSYB103K16		
C 4327	(B,34,62)		CKSSYB104K10			C 4427	(A,18,59)		CKSSYB104K10		
C 4328	(B,34,64)		CKSSYB104K10			C 4428	(A,18,58)	1 uF	DCH1246		
C 4329	(A,31,67)		CKSSYB104K10			C 4429	(A,27,63)	1 uF	DCH1246		D
						C 4430	(A,27,63)		CKSSYB104K10		
C 4330	(B,31,67)		CKSSYB104K10								
C 4331	(A,31,69)		CKSSYB104K10			C 4431	(A,18,60)		CKSSYB103K16		
C 4332	(A,31,71)		CKSSYB104K10			C 4432	(A,27,64)		CKSSYB103K16		
C 4333	(B,29,69)	4.7 uF	CCG1201			C 4433	(B,27,58)		CKSSYB471K50		
C 4334	(B,35,70)		CKSSYB104K10			C 4435	(A,23,66)		CKSSYB104K10		
						C 4436	(A,25,66)	10 uF	CCG1192		
C 4335	(A,42,67)		CKSSYB104K10								
C 4336	(A,42,70)		CKSSYB104K10			C 4437	(A,24,62)		CKSSYB104K10		
C 4337	(B,39,71)		CKSSYB104K10			C 4438	(A,25,63)	10 uF	CCG1192		
C 4338	(B,51,69)		CKSSYB104K10			C 4439	(B,27,59)		CKSSYB103K16		
C 4339	(B,51,71)		CKSSYB104K10			C 4501	(B,12,45)		CKSSYB104K10		
						C 4502	(B,6,40)		CKSSYB104K10		E
C 4340	(A,44,71)		CKSSYB104K10								
C 4341	(B,53,74)		CKSSYB104K10			C 4503	(B,6,38)		CKSSYB104K10		
C 4342	(B,51,77)		CKSSYB104K10			C 4504	(B,12,33)		CKSSYB103K16		
C 4343	(B,41,67)		CKSSYB104K10			C 4505	(B,15,33)		CKSSYB103K16		
C 4344	(B,41,70)		CKSSYB104K10			C 4506	(B,14,30)	10 uF	CCG1192		
						C 4507	(B,14,32)		CKSSYB103K16		
C 4345	(B,34,75)		CKSSYB104K10								
C 4346	(B,31,75)		CKSSYB104K10			C 4508	(B,19,37)		CKSSYB103K16		
C 4347	(A,31,75)		CKSSYB104K10			C 4509	(B,9,32)	10 uF	CCG1192		
C 4348	(A,31,77)		CKSSYB104K10			C 4510	(B,16,44)		CKSSYB102K50		
C 4349	(A,42,75)		CKSSYB104K10			C 4511	(B,7,44)	10 uF	CCG1192		
						C 4516	(B,19,40)		CCSSCH101J50		F
C 4350	(A,42,77)		CKSSYB104K10								
C 4351	(B,41,77)		CKSSYB104K10			C 4704	(B,68,57)		CKSRYB105K10		
C 4352	(B,40,75)	4.7 uF	CCG1201			C 4706	(B,67,64)		CCSSCH470J50		
C 4353	(A,62,71)		CKSSYB104K10			C 4707	(B,65,64)		CKSSYB471K50		

Circuit Symbol and No.**Part No.**

C 4708 (A,72,64) 47 uF
C 4709 (A,69,64) 100 uF

CCG1229
CCG1232

C 4711 (B,65,61)
C 4712 (B,74,63)
C 4722 (B,64,36)
C 4723 (B,72,39)
C 4724 (B,71,39)

CCSSCH220J50
CKSSYB103K16
CKSRYB105K10
CKSSYB103K16
CCSSCH470J50

C 4725 (B,71,40)
C 4726 (A,71,33) 47 uF
C 4727 (A,71,36) 100 uF
C 4729 (B,68,40)
C 4730 (B,70,31)

CKSSYB471K50
CCG1229
CCG1232
CCSSCH220J50
CKSSYB103K16

C 4742 (B,67,45)
C 4744 (B,65,52)
C 4745 (B,64,52)
C 4746 (A,71,52) 47 uF
C 4747 (A,68,52) 100 uF

CKSRYB105K10
CCSSCH470J50
CKSSYB471K50
CCG1229
CCG1232

C 4749 (B,63,49)
C 4750 (B,73,51)
C 4766 (A,37,17) 4.7 uF
C 4767 (A,35,16) 4.7 uF
C 4768 (A,27,16)

CCSSCH220J50
CKSSYB103K16
CCG1201
CCG1201
CKSSYB473K16

C 4776 (A,66,23)
C 4778 (A,28,25)
C 4790 (A,48,21)
C 4791 (A,46,23)
C 4792 (A,45,18)

CKSSYB104K10
CKSSYB473K16
CCSSCH101J50
CKSSYB104K10
CKSSYB104K10

C 4793 (A,51,19)
C 4794 (A,44,14)
C 4796 (A,20,58) 4.7 uF
C 4797 (A,21,55) 4.7 uF
C 4798 (A,44,22)

CKSSYB222K50
CKSSYB104K10
CCG1201
CCG1201
CKSSYB104K10

C 4799 (A,50,25)
C 4800 (A,28,59)
C 4901 (A,41,22) 1 uF
C 4902 (B,59,42)
C 4903 (A,68,24)

CCSSCH101J50
CKSSYB473K16
DCH1246
CKSSYB104K10
CKSSYB104K10

C 4904 (A,66,25)
C 4914 (B,60,45)
C 4915 (A,32,24)
C 4933 (A,57,35)
C 5001 (A,74,21) 22 uF

CKSSYB102K50
CKSSYB103K16
CKSSYB104K10
CCSSCH101J50
DCH1256

C 5003 (A,69,16) 22 uF
C 5007 (B,41,10)

DCH1256
CKSRYB102K50

Circuit Symbol and No.**Part No.**

IC 3201 (A,105,17) DC/DC Converter IC R1290K103A
Q 2701 (B,110,47) Chip Transistor HN1C01FU
Q 2702 (B,113,52) Bipolar Transistor LSCR523UB
Q 3001 (B,19,41) Bipolar Transistor LSAR523UB

Q 3002 (A,18,39) Bipolar Transistor LSCR523UB
Q 3201 (A,108,26) Transistor 2SAR502UB
Q 3202 (A,111,13) Schottky Diode LTC024EEB
Q 3301 (A,58,16) Bipolar Transistor LSAR523UB
D 3101 (A,107,60) Diode RB060M-30

D 3201 (B,107,16) Schottky Diode DB3S308F0
D 3202 (B,102,23) Schottky Diode DB3S308F0
D 3203 (B,104,23) Schottky Diode DB3S308F0
D 3204 (A,96,22) Schottky Diode RB162M-40
L 2801 (B,68,37) Chip Beads VTL1127

L 2802 (B,67,37) Chip Beads VTL1127
L 2803 (B,65,36) Chip Beads VTL1127
L 2804 (B,63,36) Chip Beads VTL1127
L 2805 (B,65,37) Chip Beads VTL1127
L 2806 (B,63,38) Chip Beads VTL1127

L 2807 (B,61,41) Chip Beads VTL1127
L 2808 (B,65,40) Chip Beads VTL1127
L 2809 (B,60,43) Chip Beads VTL1127
L 2810 (B,60,44) Chip Beads VTL1127
L 2811 (B,60,45) Chip Beads VTL1127

L 2812 (B,60,46) Chip Beads VTL1127
L 2813 (B,58,48) Chip Beads VTL1127
L 2814 (B,58,49) Chip Beads VTL1127
L 2815 (B,58,50) Chip Beads VTL1127
L 2816 (B,58,51) Chip Beads VTL1127

L 2817 (B,58,52) Chip Beads VTL1127
L 2818 (B,58,53) Chip Beads VTL1127
L 2819 (B,58,54) Chip Beads VTL1127
L 2820 (B,58,55) Chip Beads VTL1127
L 2821 (B,58,56) Chip Beads VTL1127

L 2822 (A,73,53) Chip Solid Inductor XTL3010
L 2823 (A,67,51) Chip Solid Inductor XTL3010
L 2829 (A,73,56) Chip Ferrite Bead BTX1047
L 2830 (B,73,41) Chip Beads VTL1127
L 2831 (B,72,41) Chip Beads VTL1127

L 2832 (B,72,35) Chip Beads VTL1127
L 2833 (B,71,37) Chip Beads VTL1127
L 2834 (B,70,37) Chip Beads VTL1127
L 2835 (B,69,38) Chip Beads VTL1127
L 3001 (A,41,45) Inductor CTF1734

L 3002 (A,42,45) Inductor CTF1734
L 3003 (A,41,46) Inductor CTF1734
L 3004 (A,41,48) Inductor CTF1734
L 3005 (A,42,50) Inductor CTF1734
L 3006 (A,41,50) Inductor CTF1734

L 3007 (A,47,45) Inductor CTF1734
L 3008 (A,48,44) Inductor CTF1734
L 3009 (A,48,49) Inductor CTF1734
L 3010 (A,49,47) Inductor CTF1734
L 3011 (A,49,49) Inductor CTF1734

L 3012 (A,41,55) Inductor CTF1734
L 3013 (A,42,44) Inductor CTF1734
L 3014 (A,42,43) Inductor CTF1734
L 3015 (A,41,41) Inductor CTF1734
L 3016 (A,40,41) Inductor CTF1734

E
Unit Number: CWN9133(A,C,E)
Unit Number: CWN9134(B,D,F,G)
Unit Name: Monitor Unit

MISCELLANEOUS

IC 2701 (A,102,46) Interface IC(B,D,F,G) AK4187VN
IC 2801 (B,36,69) Regulator IC MM3411A15N
IC 2802 (B,36,75) Regulator IC MM3411A25N
IC 2803 (B,68,48) Interface IC BU90R104
IC 2804 (B,57,74) Regulator IC(A,C,E) MM3411A33N
IC 3001 (A,32,51) Display IC TC90193SBG

IC 3101 (A,107,72) Driver IC BD81A04EFV

5		6		7		8	
Circuit Symbol and No.			Part No.	Circuit Symbol and No.			Part No.
L 3017	(A,39,41)	Inductor	CTF1734	R 2806	(B,60,38)		RS1/16SS221J
L 3018	(A,37,42)	Inductor	CTF1734	R 2807	(B,59,42)		RS1/16SS221J
L 3019	(A,36,42)	Inductor	CTF1734	R 2808	(B,62,40)		RS1/16SS221J
L 3020	(A,35,42)	Inductor	CTF1734	R 2809	(B,59,43)		RS1/16SS221J
L 3021	(A,31,43)	Inductor	CTF1740				
				R 2810	(B,58,44)		RS1/16SS221J
L 3022	(A,30,43)	Inductor	CTF1734	R 2811	(B,58,45)		RS1/16SS221J
L 3023	(A,29,41)	Inductor	CTF1734	R 2812	(B,57,46)		RS1/16SS221J
L 3024	(A,28,41)	Inductor	CTF1734	R 2813	(B,56,48)		RS1/16SS221J
L 3025	(B,11,44)	Inductor	CTF1545	R 2814	(B,56,49)		RS1/16SS221J
L 3104	(A,106,65)	Inductor	CTF1545				
				R 2815	(B,56,50)		RS1/16SS221J
L 3105	(A,100,62)	SMD Inductor	CTH1558	R 2816	(B,56,51)		RS1/16SS221J
L 3201	(A,103,23)	Choke Coil 22 uH	CTH1426	R 2817	(B,56,52)		RS1/16SS221J
L 3301	(A,69,19)	Inductor	ATL7054	R 2818	(B,56,53)		RS1/16SS221J
L 3302	(B,43,35)	Inductor	CTF1635	R 2819	(B,56,54)		RS1/16SS221J
TH3301	(A,132,20)	Thermistor	CCX1084				
				R 2820	(B,56,55)		RS1/16SS221J
X 3001	(A,18,48)	Resonator 27.000 MHz	CSS1768	R 2821	(B,56,56)		RS1/16SS221J
CN2701	(A,129,55)	Connector	CKS6601	R 2822	(B,76,49)		RS1/16SS103J
CN2704	(A,59,68)	Connector	CKS6646	R 2824	(B,69,56)		RS1/16SS1000D
CN2705	(A,123,17)	FFC/FPC Connector(B,D,F,G)	CKS6625	R 2825	(B,67,57)		RS1/16SS1000D
CN2706	(A,82,25)	Connector(A,C,E)	CKS6589				
				R 2826	(B,66,56)		RS1/16SS1000D
CN2707	(A,141,16)	Connector	CKS6635	R 2827	(B,64,57)		RS1/16SS1000D
CN3301	(A,35,31)	Connector	CKS6602	R 2828	(B,63,56)		RS1/16SS1000D
				R 2834	(B,73,39)		RS1/16SS221J
				R 2835	(B,72,39)		RS1/16SS221J
RESISTORS							
R 2704	(A,99,55)		RS1/16SS471J	R 2836	(B,70,34)		RS1/16SS221J
R 2705	(A,99,56)		RS1/16SS471J	R 2837	(B,70,35)		RS1/16SS221J
R 2706	(A,99,57)		RS1/16SS471J	R 2838	(B,69,35)		RS1/16SS221J
R 2715	(A,101,40) (B,D,F,G)		RS1/16SS0R0J	R 2839	(B,68,36)		RS1/16SS221J
R 2716	(A,102,40) (B,D,F,G)		RS1/16SS0R0J	R 2857	(B,77,49)		RS1/16SS103J
R 2717	(A,101,42) (B,D,F,G)		RS1/16SS621J	R 2858	(B,80,48)		RS1/16SS103J
R 2718	(A,102,42) (B,D,F,G)		RS1/16SS181J	R 2859	(B,76,52)		RS1/16SS103J
R 2719	(A,100,43) (B,D,F,G)		RS1/16SS201J	R 2861	(B,63,75) (B,D,F,G)		RS1/16SS0R0J
R 2720	(A,104,43) (B,D,F,G)		RS1/16SS620J	R 2862	(B,66,75) (A,C,E)		RS1/16SS0R0J
R 2724	(A,99,48) (B,D,F,G)		RS1/16SS121J	R 2863	(B,62,73) (A,C,E)		RS1/10SR0R0J
				R 2864	(B,53,71) (A,C,E)		RS1/10SR0R0J
R 2725	(A,103,50) (B,D,F,G)		RS1/16SS0R0J	R 2865	(B,80,49)		RS1/16SS221J
R 2726	(A,105,49) (B,D,F,G)		RS1/16SS0R0J	R 3001	(A,44,43)		RS1/16SS151J
R 2727	(A,77,29) (A,C,E)		RS1/16SS0R0J	R 3002	(A,44,45)		RS1/16SS151J
R 2728	(A,90,25) (A,C,E)		RS1/16SS0R0J	R 3003	(A,44,46)		RS1/16SS151J
				R 3004	(A,45,46)		RS1/16SS151J
R 2729	(A,86,30) (A,C,E)		RS1/16SS121J				
R 2730	(A,88,26) (A,C,E)		RS1/16SS0R0J				
R 2731	(A,85,29) (A,C,E)		RS1/16SS0R0J	R 3005	(A,44,49)		RS1/16SS151J
R 2733	(B,115,52)		RS1/16SS180J	R 3006	(A,44,50)		RS1/16SS151J
R 2734	(B,116,52)		RS1/16SS180J	R 3007	(A,46,43)		RS1/16SS151J
				R 3008	(A,47,42)		RS1/16SS151J
				R 3009	(A,48,47)		RS1/16SS151J
R 2735	(B,117,52)		RS1/16SS220J				
R 2736	(B,111,44)		RS1/16SS620J				
R 2737	(B,112,44)		RS1/16SS620J	R 3010	(A,48,42)		RS1/16SS151J
R 2739	(B,109,50)		RS1/16SS150J	R 3011	(A,49,45)		RS1/16SS151J
R 2740	(B,108,50)		RS1/16SS150J	R 3012	(A,43,55)		RS1/16SS151J
				R 3017	(A,42,57)		RS1/16SS472J
				R 3018	(A,41,58)		RS1/16SS472J
R 2741	(B,108,48)		RS1/16SS180J				
R 2781	(A,121,59)		RS1/16SS0R0J				
R 2782	(A,121,58)		RS1/16SS0R0J	R 3019	(A,41,60)		RS1/16SS472J
R 2783	(A,121,57)		RS1/16SS0R0J	R 3022	(A,43,43)		RS1/16SS151J
R 2784	(A,121,56)		RS1/16SS0R0J	R 3023	(A,42,41)		RS1/16SS151J
				R 3024	(A,41,40)		RS1/16SS151J
				R 3025	(A,40,40)		RS1/16SS151J
R 2792	(A,124,62)		RS1/10SR0R0J				
R 2801	(B,67,36)		RS1/16SS221J				
R 2802	(B,59,36)		RS1/16SS221J	R 3026	(A,39,40)		RS1/16SS151J
R 2803	(B,61,36)		RS1/16SS221J	R 3028	(A,37,40)		RS1/16SS151J
R 2804	(B,60,37)		RS1/16SS221J	R 3029	(A,36,40)		RS1/16SS151J
				R 3031	(A,35,40)		RS1/16SS151J
R 2805	(B,62,37)		RS1/16SS221J	R 3038	(A,31,41)		RS1/16SS680J

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	R 3040	(A,30,37)	RS1/16SS470J
	R 3041	(A,29,39)	RS1/16SS470J
	R 3042	(B,13,56)	RS1/16SS0R0J
	R 3043	(A,28,39)	RS1/16SS151J
	R 3044	(B,21,57)	RS1/16SS472J
■	R 3047	(B,15,41)	RS1/16SS912J
	R 3048	(B,23,60)	RS1/16SS472J
	R 3049	(B,15,42)	RS1/16SS103J
	R 3050	(B,17,40)	RS1/16SS103J
	R 3051	(B,16,42)	RS1/16SS391J
B	R 3053	(A,23,62)	RS1/16SS472J
	R 3054	(A,25,62)	RS1/16SS472J
	R 3055	(A,24,62)	RS1/16SS472J
	R 3056	(A,17,52)	RS1/16SS472J
	R 3057	(A,17,53)	RS1/16SS472J
■	R 3058	(B,20,55)	RS1/16SS472J
	R 3059	(A,17,54)	RS1/16SS472J
	R 3060	(A,22,62)	RS1/16SS472J
	R 3061	(A,19,59)	RS1/16SS472J
	R 3064	(A,21,49)	RS1/16SS105J
C	R 3065	(A,19,51)	RS1/16SS471J
	R 3073	(B,27,48)	RS1/16SS0R0J
	R 3074	(A,22,42)	RS1/16SS152J
	R 3077	(A,17,55)	RS1/16SS470J
	R 3078	(A,17,58)	RS1/16SS273J
■	R 3079	(A,18,57)	RS1/16SS470J
	R 3080	(A,20,62)	RS1/16SS470J
	R 3081	(A,21,62)	RS1/16SS470J
	R 3083	(A,17,42)	RS1/16SS122J
	R 3089	(B,14,47)	RS1/10SR0R0J
D	R 3091	(A,18,59)	RS1/16SS472J
	R 3094	(A,19,56)	RS1/16SS472J
	R 3095	(A,16,59)	RS1/16SS273J
	R 3100	(B,27,70)	RS1/16SS0R0J
	R 3103	(B,108,67)	RS1/16SS104J
■	R 3104	(B,107,67)	RS1/16SS154J
	R 3105	(A,109,77)	RS1/16SS273J
	R 3106	(A,110,77)	RS1/16SS511J
	R 3108	(B,99,68)	RS1/16SS1203D
	R 3110	(B,97,68)	RS1/16SS1003D
E	R 3116	(A,123,63)	RS1/16SS3603D
	R 3117	(A,123,65)	RS1/16SS2402D
	R 3120	(A,123,73)	RS1/16SS0R0J
	R 3121	(A,123,74)	RS1/16SS0R0J
	R 3202	(A,102,15)	RS1/16SS103J
■	R 3203	(B,104,16)	RS1/10SR9102D
	R 3204	(B,104,19)	RS1/10SR1802D
	R 3205	(B,103,14)	RS1/16SS203J
	R 3206	(B,102,14)	RS1/16SS104J
	R 3207	(A,106,24)	RS1/16SS103J
F	R 3208	(A,107,12)	RS1/16SS472J
	R 3209	(B,106,24)	RS1/10SR1003D
	R 3210	(B,107,28)	RS1/10SR9101D
	R 3211	(A,108,13)	RS1/16SS6800D
	R 3212	(A,109,13)	RS1/16SS1502D
	R 3213	(A,110,14)	RS1/16SS8201D
	R 3214	(A,99,23)	RS1/10SR2R2J
	R 3216	(A,100,13)	RS1/10SR1203D
	R 3217	(A,103,13)	RS1/10SR3001D

R 3218	(A,103,10)	RS1/10SR1502D
R 3219	(A,100,12)	RS1/10SR472J
R 3301	(A,56,28)	RS1/10SR4R7J
R 3302	(A,54,33)	RS1/10SR56R0D
R 3303	(A,56,35)	RS1/10SR1800D
R 3304	(A,59,34)	RS1/10SR2R2J
R 3305	(A,60,28)	RS1/10SR47R0D
R 3306	(A,61,31)	RS1/10SR0R0J
R 3307	(A,64,28)	RS1/10SR39R0D
R 3308	(A,64,31)	RS1/10SR4R7J
R 3309	(A,67,28)	RS1/10SR1000D
R 3310	(A,68,31)	RS1/10SR8R2J
R 3311	(A,71,28)	RS1/10SR1300D
R 3312	(A,71,31)	RS1/10SR0R0J
R 3313	(A,69,25)	RS1/10SR1000D
R 3314	(A,68,23)	RS1/10SR8R2J
R 3315	(A,66,25)	RS1/10SR39R0D
R 3316	(A,65,23)	RS1/10SR4R7J
R 3317	(A,62,25)	RS1/10SR47R0D
R 3318	(A,61,23)	RS1/10SR0R0J
R 3319	(A,59,25)	RS1/10SR1800D
R 3320	(A,58,23)	RS1/10SR2R2J
R 3321	(A,56,23)	RS1/10SR33R0D
R 3322	(A,56,26)	RS1/10SR2R4J
R 3323	(B,32,31)	RS1/16SS473J
R 3324	(A,24,37)	RS1/16SS473J
R 3327	(A,28,37)	RS1/16SS473J
R 3328	(A,29,37)	RS1/16SS473J
R 3330	(A,55,20)	RS1/16SS472J
R 3332	(A,56,17)	RS1/16SS105J
R 3333	(A,60,19)	RS1/16SS682J
R 3334	(A,60,18)	RS1/16SS0R0J
R 3336	(A,62,15)	RS1/16SS101J
R 3339	(A,62,16)	RS1/16SS0R0J
R 3344	(A,133,16)	RS1/16SS183J

CAPACITORS

C 2705	(A,97,45)	10 uF(B,D,F,G)	DCH1201
C 2706	(A,99,45)	(B,D,F,G)	CKSSYB104K10
C 2707	(A,101,49)	(B,D,F,G)	CKSSYB104K10
C 2708	(A,100,50)	10 uF(B,D,F,G)	DCH1201
C 2709	(B,82,29)	(A,C,E)	CKSSYB104K10
C 2803	(A,58,47)		CKSSYB104K10
C 2804	(B,58,47)		CKSSYB103K16
C 2805	(B,60,54)		CKSSYB103K16
C 2806	(A,62,53)		CKSSYB104K10
C 2807	(B,73,56)		CKSSYB103K16
C 2808	(B,74,56)		CKSSYB104K10
C 2809	(A,64,53)		CKSSYB104K10
C 2810	(A,64,52)		CKSSYB103K16
C 2814	(A,66,53)		CKSSYB103K16
C 2816	(A,71,53)	10 uF	DCH1201
C 2819	(B,40,70)		CKSRYB105K10
C 2820	(B,40,76)		CKSRYB105K10
C 2821	(B,33,75)		CKSRYB105K10
C 2822	(B,33,70)		CKSRYB105K10
C 2823	(B,68,39)		CKSSYB104K10
C 2824	(B,68,40)		CKSSYB103K16
C 2825	(B,78,48)		CKSSYB103K16

Circuit Symbol and No.**Part No.**

C 2826	(B,77,48)	CKSSYB104K10
C 2828	(B,54,73) (A,C,E)	CKSSYB104K10
C 2829	(B,60,74) (A,C,E)	CKSRYB474K10
C 2830	(B,80,50)	CKSQYB225K10
C 3002	(A,41,47)	CKSSYB104K10
C 3003	(A,41,49)	CKSSYB104K10
C 3004	(A,41,52)	CKSSYB104K10
C 3005	(A,41,53)	CKSSYB104K10
C 3006	(A,42,56)	CKSSYB104K10
C 3007	(A,38,42)	CKSSYB104K10
C 3008	(A,36,61)	CKSSYB104K10
C 3010	(A,34,43)	CKSSYB104K10
C 3011	(A,33,60)	CKSSYB104K10
C 3013	(A,33,42)	CKSSYB104K10
C 3014	(A,32,60)	CKSSYB104K10
C 3015	(A,30,40)	CCSSCH470J50
C 3019	(B,13,42) 10 uF	CCG1192
C 3021	(A,28,43)	CKSSYB104K10
C 3022	(A,29,60)	CKSSYB104K10
C 3023	(B,17,44)	CKSSYB104K10
C 3024	(A,24,40)	CKSSYB104K10
C 3025	(A,22,40)	CKSRYB474K10
C 3026	(A,24,41)	CKSSYB104K10
C 3027	(A,23,52)	CKSSYB104K10
C 3028	(A,22,54)	CKSSYB104K10
C 3029	(A,23,57)	CKSSYB104K10
C 3030	(A,20,44)	CKSSYB152K50
C 3031	(A,25,42)	CKSSYB104K10
C 3032	(A,23,43)	CKSSYB104K10
C 3033	(A,23,46)	CKSSYB104K10
C 3037	(A,21,47)	CCSSCH120J50
C 3038	(A,23,47)	CKSSYB103K16
C 3040	(A,19,42)	CCSSCH4R0C50
C 3041	(A,18,51)	CCSSCH120J50
C 3042	(A,26,73) 4.7 uF	CCG1201
C 3043	(A,22,48)	CKSSYB104K10
C 3044	(A,17,59)	CKSSYB103K16
C 3046	(B,11,45)	CKSSYB104K10
C 3101	(A,115,72) 10 uF	CCG1236
C 3102	(A,113,74)	CKSSYB104K16
C 3103	(A,110,79)	CKSSYB104K10
C 3104	(A,111,77)	CKSSYB104K10
C 3107	(A,109,67) 2.2 uF	CCG1218
C 3109	(A,111,63) 10 uF	CCG1236
C 3110	(A,114,63) 10 uF	CCG1236
C 3111	(A,116,63) 10 uF	CCG1236
C 3201	(A,102,17)	CKSSYB102K50
C 3202	(B,105,16)	CKSRYB105K16
C 3203	(B,102,17) 1 uF	DCH1246
C 3205	(B,103,29)	CKSQYB105K25
C 3206	(B,106,29)	CKSQYB105K25
C 3208	(B,109,16)	CKSRYB104K50
C 3209	(B,103,21)	CKSRYB104K50
C 3210	(B,104,21)	CKSRYB104K50
C 3211	(A,109,9)	CKSSYB224K6R3
C 3212	(A,108,9)	CKSSYB224K6R3
C 3214	(A,107,9) 1 uF	DCH1246
C 3215	(A,112,21)	CKSYB475K16
C 3216	(A,106,10)	CKSRYB682K50

Circuit Symbol and No.**Part No.**

C 3217	(A,100,26) 4.7 uF	CCG1201
C 3218	(B,106,26)	CCSRCH561J50
C 3219	(A,110,15)	CCSSCH101J50
C 3220	(A,97,24)	CKSRYB222K50
C 3221	(A,111,18)	CKSRYB224K16
C 3222	(A,97,20)	CKSYB475K16
C 3223	(A,97,17)	CKSYB475K16
C 3224	(A,103,12)	CCSRCH471J50
C 3309	(A,69,30)	CKSSYB102K50
C 3310	(A,69,31)	CKSSYB104K10
C 3311	(A,70,24)	CKSSYB102K50
C 3312	(A,70,23)	CKSSYB104K10
C 3321	(B,33,34)	CKSSYB102K50
C 3322	(B,34,34)	CKSSYB104K16
C 3323	(B,37,35) 10 uF/16 V	DCH1263
C 3326	(B,48,35)	CKSSYB102K50
C 3328	(B,30,33)	CKSSYB102K50
C 3329	(B,30,34)	CKSSYB104K10
C 3330	(B,30,37) 10 uF	DCH1201
C 3333	(B,25,34)	CKSSYB104K16
C 3334	(B,28,34) 4.7 uF	CCG1201
C 3336	(B,28,30)	CKSQYB225K16
C 3338	(B,18,31)	CKSQYB334K50
C 3342	(A,19,36)	CKSSYB104K10
C 3343	(A,57,17)	CKSSYB104K10
C 3344	(A,66,18) 10 uF	CCG1236
C 3345	(A,132,16)	CKSSYB104K10
C 3346	(A,132,18)	CKSSYB104K10

**Unit Number:CXX7594****Unit Name:Key Unit (Service)****MISCELLANEOUS**

D 3551	(A,13,4) LED	SMLVN6RGB2UK(B)
D 3552	(A,151,4) LED	SMLVN6RGB2UK(B)
S 3551	(A,98,4) Push Switch	CSG1196
S 3552	(A,114,4) Push Switch	CSG1196
S 3553	(A,132,4) Push Switch	CSG1196
S 3554	(A,141,4) Push Switch	CSG1196
S 3555	(A,29,4) Push Switch	CSG1196
S 3556	(A,49,4) Push Switch	CSG1196
S 3557	(A,66,4) Push Switch	CSG1196
S 3558	(A,81,4) Push Switch	CSG1196
S 3559	(A,157,4) Push Switch	CSG1196
U 3551	(A,7,5) Remote Receiver Unit	RS-470
CN3551	(A,21,5) Connector	CKS6421

RESISTORS

R 3551	(A,93,3)	RS1/16SS182J
R 3552	(A,110,4)	RS1/16SS222J
R 3553	(A,127,3)	RS1/16SS472J
R 3554	(A,137,3)	RS1/16SS123J
R 3555	(A,44,3)	RS1/16SS182J
R 3556	(A,62,3)	RS1/16SS222J
R 3557	(A,76,3)	RS1/16SS472J
R 3558	(A,137,6)	RS1/16SS390J
R 3559	(A,32,5)	RS1/16SS390J
R 3560	(A,34,5)	RS1/16SS150J

Circuit Symbol and No.**Part No.**

R 3561	(A,35,5)	RS1/16SS620J
R 3562	(A,135,3)	RS1/16SS150J
R 3563	(A,136,4)	RS1/16SS620J
R 3565	(A,15,7)	RS1/16SS470J

CAPACITORS

C 3557	(A,11,6)	CKSSYB104K10
--------	----------	--------------

G**Unit Number:CWX4712****Unit Name:Sensor Unit****MISCELLANEOUS**

IC 401	(A,21,17) IC	UBX-G6010-ST
IC 402	(A,36,16) Sensor	S-5851AAA-I6U
IC 403	(B,23,15) IC	R5S726A0D216FP
IC 404	(A,7,18) Flash ROM Unit	CWW9799
IC 405	(B,6,7) IC	S-80827CNMC-B8M

IC 406	(A,6,7) Regulator IC	S-1206B1C-I6U
D 402	(B,7,22) Diode	DA2J101
L 401	(A,25,11) Inductor	LCYB10NJ1005
L 402	(A,16,12) SMD Ferrite Bead	CTF1806
L 403	(A,32,21) Chip Ferrite Bead	OTL8019

L 404	(A,38,14) Chip Ferrite Bead	OTL8019
L 405	(A,39,13) Chip Ferrite Bead	OTL8019
L 406	(A,10,8) Chip Ferrite Bead	OTL8019
L 407	(A,15,9) Chip Ferrite Bead	OTL8019
X 401	(A,13,13) Crystal Oscillator 26 MHz	CWX4552

X 402	(A,29,18) Resonator 32.768 kHz	CSS1807
X 403	(B,8,17) Crystal Resonator 10 MHz	CSS1799
F 401	(A,29,14) Filter	CTF1830
GY401	(A,34,10) Sensor	CSX1209
GY402	(A,35,21) Sensor	CSX1210

CN401	(A,20,5) Connector	CKS5204
-------	--------------------	---------

RESISTORS

R 401	(A,14,16)	RS1/16SS0R0J
R 404	(A,37,18)	RS1/16SS221J
R 405	(A,33,24)	RS1/16SS101J
R 407	(A,34,16)	RS1/16SS221J

R 408	(A,38,10)	RS1/16SS101J
R 409	(A,26,12)	RS1/16SS473J
R 410	(A,15,16)	RS1/16SS101J
R 411	(A,27,16)	RS1/16SS105J

R 412	(A,20,23)	RS1/16SS0R0J
R 413	(A,29,22)	RS1/10SR101J
R 414	(A,19,24)	RS1/16SS103J
R 415	(A,21,23)	RS1/16SS0R0J
R 416	(A,22,23)	RS1/16SS101J

R 417	(B,36,19)	RS1/16SS103J
R 418	(B,35,18)	RS1/16SS103J
R 420	(B,34,21)	RS1/16SS101J
R 421	(B,34,20)	RS1/16SS151J

R 422	(B,32,3)	RS1/16SS101J
R 423	(A,10,24)	RS1/16SS473J
R 424	(A,8,24)	RS1/16SS473J
R 425	(A,6,24)	RS1/16SS473J
R 426	(A,8,11)	RS1/16SS101J

Circuit Symbol and No.**Part No.**

R 427	(B,24,3)	RS1/16SS101J
R 428	(B,25,3)	RS1/16SS103J
R 429	(B,7,24)	RS1/16SS101J
R 430	(B,8,25)	RS1/16SS101J
R 431	(A,27,10)	RS1/16SS103J

R 432	(A,5,11)	RS1/16SS101J
R 433	(B,11,25)	RS1/16SS101J
R 434	(A,20,10)	RS1/16SS101J
R 435	(B,21,25)	RS1/16SS101J
R 436	(B,16,3)	RS1/16SS103J

R 437	(A,29,10)	RAB4CQ473J
R 438	(A,4,12)	RS1/16SS473J
R 439	(A,8,12)	RS1/16SS473J
R 441	(B,15,25)	RS1/16SS473J

R 444	(B,11,21)	RS1/16SS473J
R 445	(B,12,15)	RS1/16SS392J
R 446	(B,11,9)	RS1/16SS104J
R 449	(B,37,21)	RS1/16SS473J
R 450	(B,34,22)	RS1/16SS473J

R 451	(B,9,11)	RS1/16SS0R0J
R 452	(B,8,13)	RS1/16SS473J
R 453	(B,12,19)	RS1/16SS473J
R 454	(B,36,14)	RS1/16SS101J
R 455	(B,36,12)	RS1/16SS101J

R 456	(B,12,4)	RS1/16SS101J
R 458	(B,12,6)	RS1/16SS101J

CAPACITORS

C 401	(A,13,15) 1 uF	DCH1246
C 402	(A,25,9)	CCSSCH470J50
C 403	(A,25,10)	CCSSCKR50C50
C 404	(A,14,10)	CKSSYB102K50
C 405	(A,32,7)	CKSSYB103K16

C 406	(A,35,18)	CKSSYB104K10
C 407	(A,19,11)	CKSSYB104K10
C 408	(A,22,11) 1 uF	DCH1246
C 409	(A,21,10) 1 uF	DCH1246
C 410	(A,23,11) 1 uF	DCH1246

C 411	(A,23,10) 1 uF	DCH1246
C 412	(A,34,5)	CKSSYB104K10
C 413	(A,33,19) 1 uF	DCH1246
C 414	(A,35,5) 1 uF	DCH1246
C 415	(A,36,14)	CKSSYB104K10

C 416	(A,36,6)	CKSSYB104K10
C 417	(A,38,19)	CKSSYB104K10
C 418	(A,16,13) 1 uF	DCH1246
C 419	(A,27,15)	CKSSYB104K10
C 420	(A,31,17)	CCSSCH120J50

C 421	(A,31,19)	CCSSCH100D50
C 422	(A,27,18) 1 uF	DCH1246
C 423	(A,15,18) 2.2 uF	CCG1205
C 424	(A,15,19) 1 uF	DCH1246
C 425	(A,16,21) 1 uF	DCH1246

C 426	(A,17,22) 1 uF	DCH1246
C 427	(A,19,23) 1 uF	DCH1246
C 428	(A,24,23) 2.2 uF	CCG1205
C 429	(A,26,21) 1 uF	DCH1246
C 431	(B,34,17)	CKSSYB104K10

Circuit Symbol and No.**Part No.**

C 432	(B,34,13)	CKSSYB104K10
C 433	(B,34,11)	CKSSYB104K10
C 434	(B,30,4)	CKSSYB104K10
C 435	(B,28,25)	CKSSYB104K10
C 436	(B,26,25)	CKSSYB104K10
C 437	(B,25,4)	CKSSYB104K10
C 438	(B,24,25)	CKSSYB104K10
C 439	(B,22,4)	CKSSYB104K10
C 440	(B,21,3)	CKSSYB104K10
C 441	(B,19,25)	CKSSYB104K10
C 442	(B,16,4)	CKSSYB104K10
C 443	(A,6,12)	CCSSCJ3R0C50
C 444	(A,10,13)	CKSSYB104K10
C 445	(B,12,23)	CKSSYB104K10
C 446	(B,12,21)	CKSSYB104K10
C 447	(B,12,13)	CKSSYB104K10
C 448	(B,12,12)	CKSSYB104K10
C 449	(B,13,10)	CKSSYB104K10
C 450	(B,12,16)	CKSSYB104K10
C 452	(B,9,9) 1 uF	DCH1246
C 453	(B,8,19)	CCSSCH120J50
C 454	(B,8,15)	CCSSCH120J50
C 455	(A,8,7) 1 uF	DCH1246
C 456	(A,4,8) 1 uF	DCH1246
C 457	(A,27,12)	CCSSCH101J50

**Unit Number:EXX2001****Unit Name:PCB Assy (Service)****MISCELLANEOUS**

IC 101	Driver IC	BA6288FS
VR101	Volume 10 kohm	CCW1029
S 101	Switch(HOME)	CSN1067
S 102	Switch(HOME)	CSN1068
CN101	Connevtor	CKS4997

RESISTORS

R 101	RS1/16S221J
R 102	RS1/16S221J
R 103	RS1/16S0R0J

CAPACITORS

C 101	CEVW220M16
C 102	CKSRYB104K16