
EXPLODED VIEW/PARTS LIST

Main section

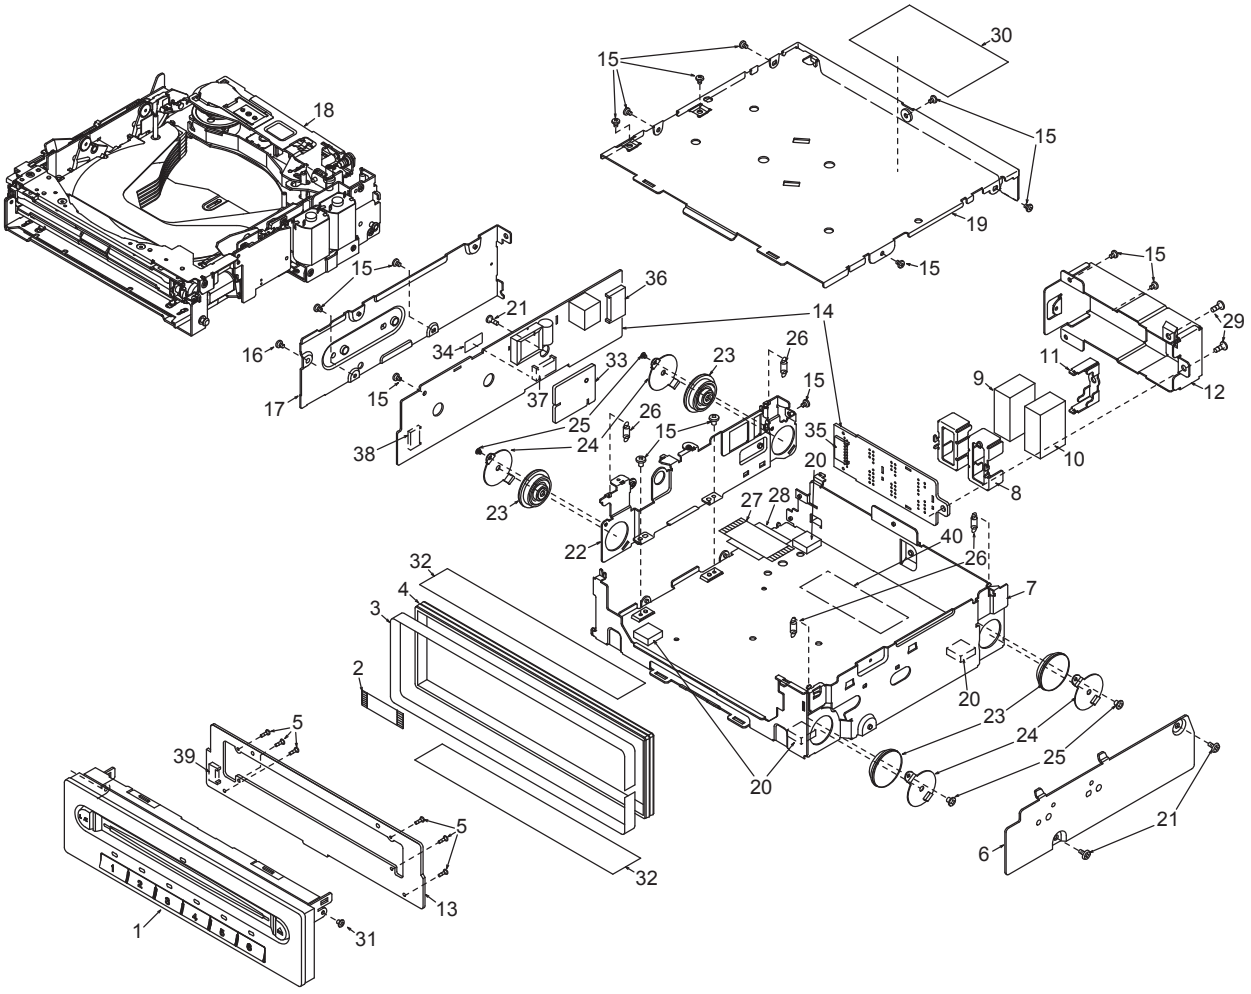



NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8041-30	ESCUTCHEON-ASSY	1
2	816-2610-00	FLAT WIRE	1
3	347-6410-00	DOUBLE FACE(50m)	1
4	345-5314-20	ES-RUBBER	1
5	716-0872-51	SCREW(M1.7x6)	6
6	331-3497-21	SIDE PLATE	1
7	311-1947-00	LOWER CASE	1
8	331-3762-00	SOCKET HOLDER	1
9	074-4004-14	OUTLET SOCKET(14P)	1
10	074-4003-18	OUTLET SOCKET(18P)	1
11	331-3763-00	SOCKET HOLDER	1
12	331-4453-00	CONNECTOR-CVR	1
13	----------	SWITCH PWB	1
14	----------	MAIN PWB	1
15	716-1716-02	SCREW(M2x3)	15
16	716-3462-50	SCREW(M2x5)	1
17	305-0315-10	SIDE CASE	1
18	----------	CD-CHG-MODULE(018920-929)	1
19	310-1741-25	UPPER CASE	1
20	345-8747-00	CUSHION GEL	4

NO.	PART NO.	DESCRIPTION	Q'TY
21	714-2606-8B	MACHINE SCREW(M2.6x6)	3
22	331-3896-04	PWB HOLDER	1
23	629-0083-01	DAMPER	4
24	620-1086-20	DAMPER-H-PLT	4
25	716-3450-00	SCREW(M1.7x2)	4
26	750-3491-00	FL-SPRING	4
27	HBS-561-100	FPC	1
28	347-6619-00	INSULATOR	1
29	716-0878-50	SCREW(M2.6x5)	2
30	286-6447-19	SETPLATE	1
31	716-3461-50	SCREW(M2x3)	1
32	347-6039-00	SHADE	2
33	313-1920-20	HEAT SINK	1
34	347-7613-00	PIN-COVER-SHEET	1
35	076-0648-20	PLUG	1
36	074-3014-70	OUTLET SOCKET(20P)	1
37	074-1189-95	OUTLET SOCKET(45P)	1
38	074-1059-76	OUTLET SOCKET(26P)	1
39	074-1239-76	OUTLET SOCKET(26P)	1
40	285-1960-00	GUIDE LABEL	1

CD changer module section

* PARTS LIST: page10

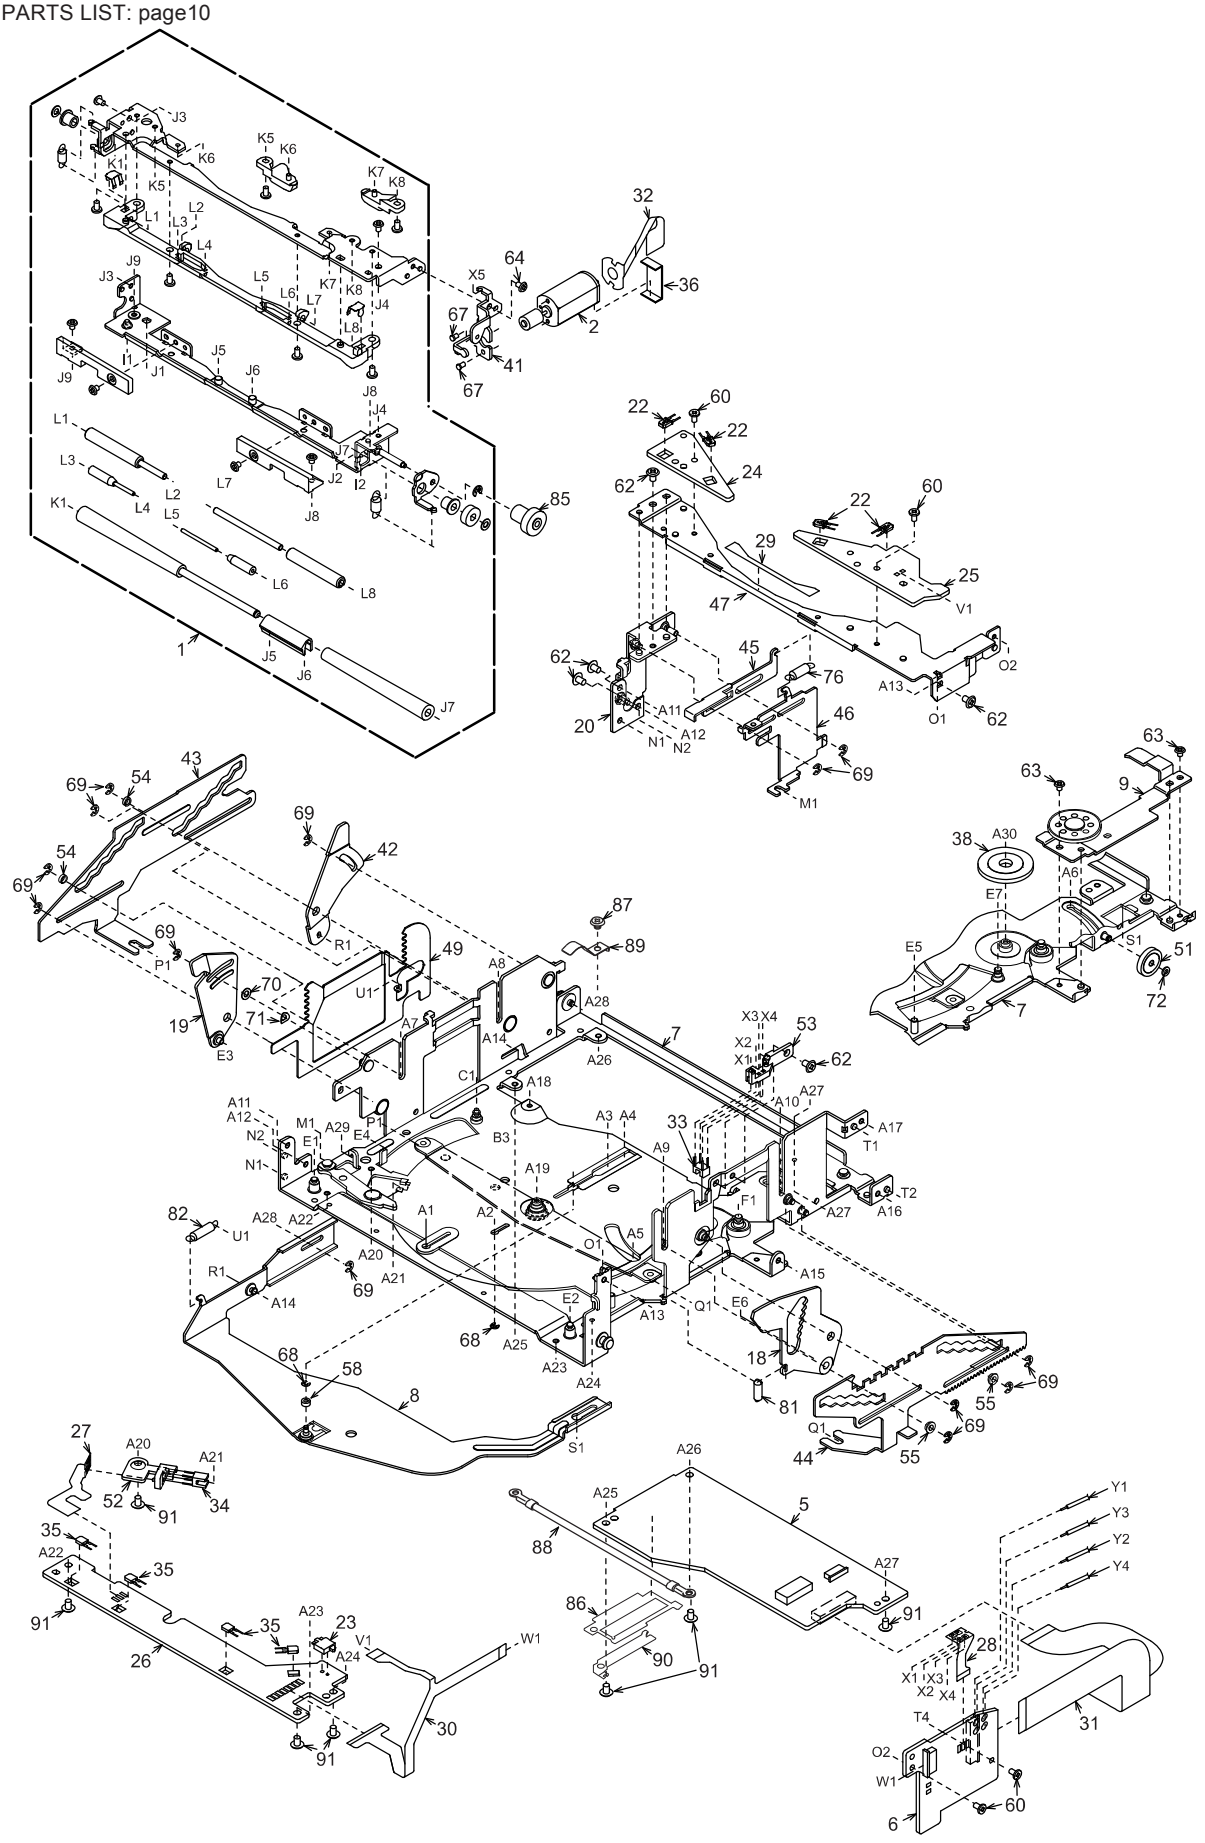

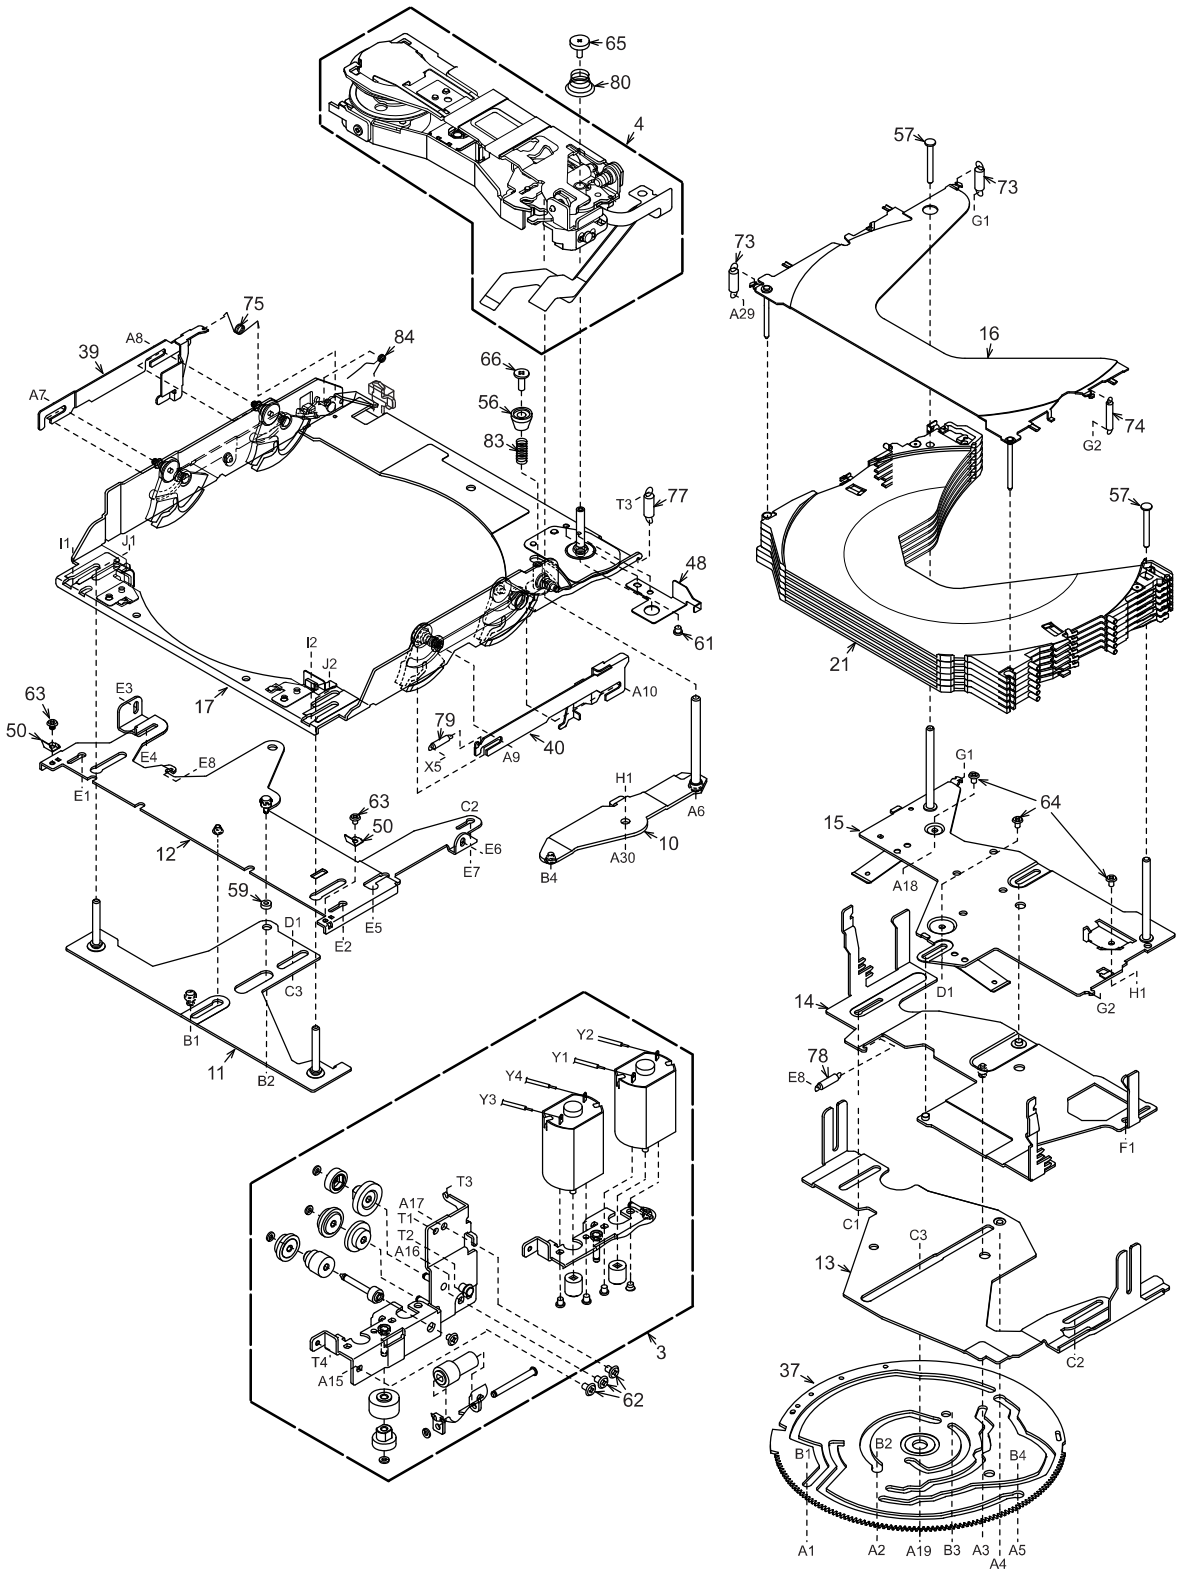

65
80
4
57
73
G1
73
A29
16
74
G2
57
21
75
A8
39
A7
84
66
56
83
T3
77
48
61
I1
J1
I2
J2
17
A10
79
X5
A9
40
63
50
E3
E4
E8
E1
12
63
50
C2
E6
E7
59
D1
E2
E5
C3
B1
11
B2
H1
A6
10
A30
B4
G1
64
15
A18
D1
H1
G2
14
78
E8
F1
C1
C3
13
C2
37
B1
B2
B4
A1
A2
A19
B3
A3
A4
A5
Y2
Y1
Y4
Y3
T3
A17
T1
T2
A16
T4
A15
3
62

CD changer module section

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-594-100	LOADING UNIT	1
2	SMA-186-100	LOADING MOTOR ASSY	1
3	HBS-530-200	MOTOR PLATE SUB ASSY	1
4	HBS-592-200	DRIVE UNIT	1
5	----------	DSP PWB	1
6	----------	DRIVER PWB	1
7	966-1751-22	CHASSIS ASSY	1
8	966-0600-23	LOCK-P-RE-ASSY	1
9	966-0601-21	M-GEAR-P-ASSY	1
10	966-0602-26	DR-LINK-ASSY	1
11	966-0603-21	MODE-P-ASSY	1
12	966-0604-26	LOCK-PF-ASSY	1
13	966-0605-20	SHIFT-P-ASSY	1
14	966-1721-20	HLC-PLATE-ASSY	1
15	HBS-560-100	COV-PLATE-ASSY	1
16	HBS-534-100	TOP-PLATE-ASSY	1
17	966-0652-27	DR-BASE-P-ASSY	1
18	966-0615-21	LOCK-L-RF-ASSY	1
19	966-0616-20	LOCK-L-LF-ASSY	1
20	966-0618-21	EJECT-B-ASSY	1
21	966-1742-20	DISC-HOL-ASSY	1
22	001-7042-00	DIODE (GL4800)	4
23	013-7414-50	DETECTOR SWITCH	1
24	----------	LED-L-PWB	1
25	----------	LED-R-PWB	1
26	----------	SENSOR PWB	1
27	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1
28	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1
29	039-2011-01	LED-FPC (WITHOUT COMPONENT)	1
30	039-2012-00	SENSOR-FPC (WITHOUT COMPONENT)	1
31	039-2013-04	MOS-FPC (WITHOUT COMPONENT)	1
32	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1
33	051-5806-01	IC (GPIS93)	1
34	051-5806-02	IC (GPIS95)	1
35	060-0252-01	PHOTO-TR	4
36	347-6657-01	LO-COVER SHEET	1
37	620-1041-26	GEAR PLATE	1
38	620-1042-20	M-GEAR-H	1
39	620-1056-22	HLR-PLATE-L	1
40	620-1580-20	HLR-PLATE-R	1
41	620-1576-20	LO-MOTOR-PLT	1
42	620-1066-20	LOCK LINK-LR	1
43	620-1067-21	SLIDE PLATE-L	1
44	620-1068-22	SLIDE PLATE-R	1

NO.	PART NO.	DESCRIPTION	Q'TY
45	620-1071-21	EJECT ARM	1
46	620-1072-20	EJECT PLATE	1
47	620-1577-20	FRONT PLATE	1
48	620-1083-20	FPC-PLATE	1
49	620-1090-20	GAP PLATE	1
50	620-1568-21	RATTLE PLATE-F	2
51	621-0640-20	V-GEAR-G	1
52	621-0641-21	PI-HOLDER-M	1
53	621-0656-21	PI-HOLDER-V	1
54	622-1622-20	SL-G-ROLLER	2
55	622-1623-00	SL-G-ROLLER-R	2
56	622-1648-23	DU-STP-SLEEVE	1
57	622-1650-23	COV-PLATE PIN-B	2
58	622-1651-00	LOCK-RE-ROLLER	1
59	622-1652-00	LOCK-PF-ROLLER	1
60	716-1866-50	SCREW(M1.7x3)	4
61	716-1873-00	SCREW(M2x1.6)	1
62	716-3449-50	SCREW(M2x3)	8
63	716-3450-00	SCREW(M1.7x2)	4
64	716-3451-01	SCREW(M1.7x2.5)	4
65	716-3459-01	SCREW(M1.7x5)	1
66	716-3466-53	SCREW(M2x6)	1
67	738-1422-1B	PRECISION SCREW	2
68	743-1200-1B	E-RING	2
69	743-1500-1B	E-RING	13
70	746-0624-00	WASHER	1
71	746-0712-23	WASHER	1
72	746-0761-00	WASHER	1
73	750-3478-01	TOP-P-SP-L	2
74	750-3479-01	TOP-P-SP-R	1
75	750-3480-01	DR-LOCK-SP	1
76	750-3483-00	EJECT-A-SPRING	1
77	750-3484-01	DR-BASE-SPRING	1
78	750-3485-01	TENSION-SP-L	1
79	750-3486-01	LO-TENSION-SP	1
80	750-3489-01	DRIVE-P-SPRING	1
81	750-3496-00	GAP-P-SPRING R	1
82	750-3497-00	GAP-P-SPRING L	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1
85	621-0651-22	LOAD GEAR-A	1
86	347-7860-20	FPC COVER	1
87	716-1850-01	SCREW(M2x2)	1
88	854-4348-01	EXTENSION LEAD	1
89	620-1604-20	DR-PLATE-SCREW	1
90	620-1784-20	FPC-H-PLATE	1
91	716-3616-00	SCREW(M2x3)	7

Drive unit section

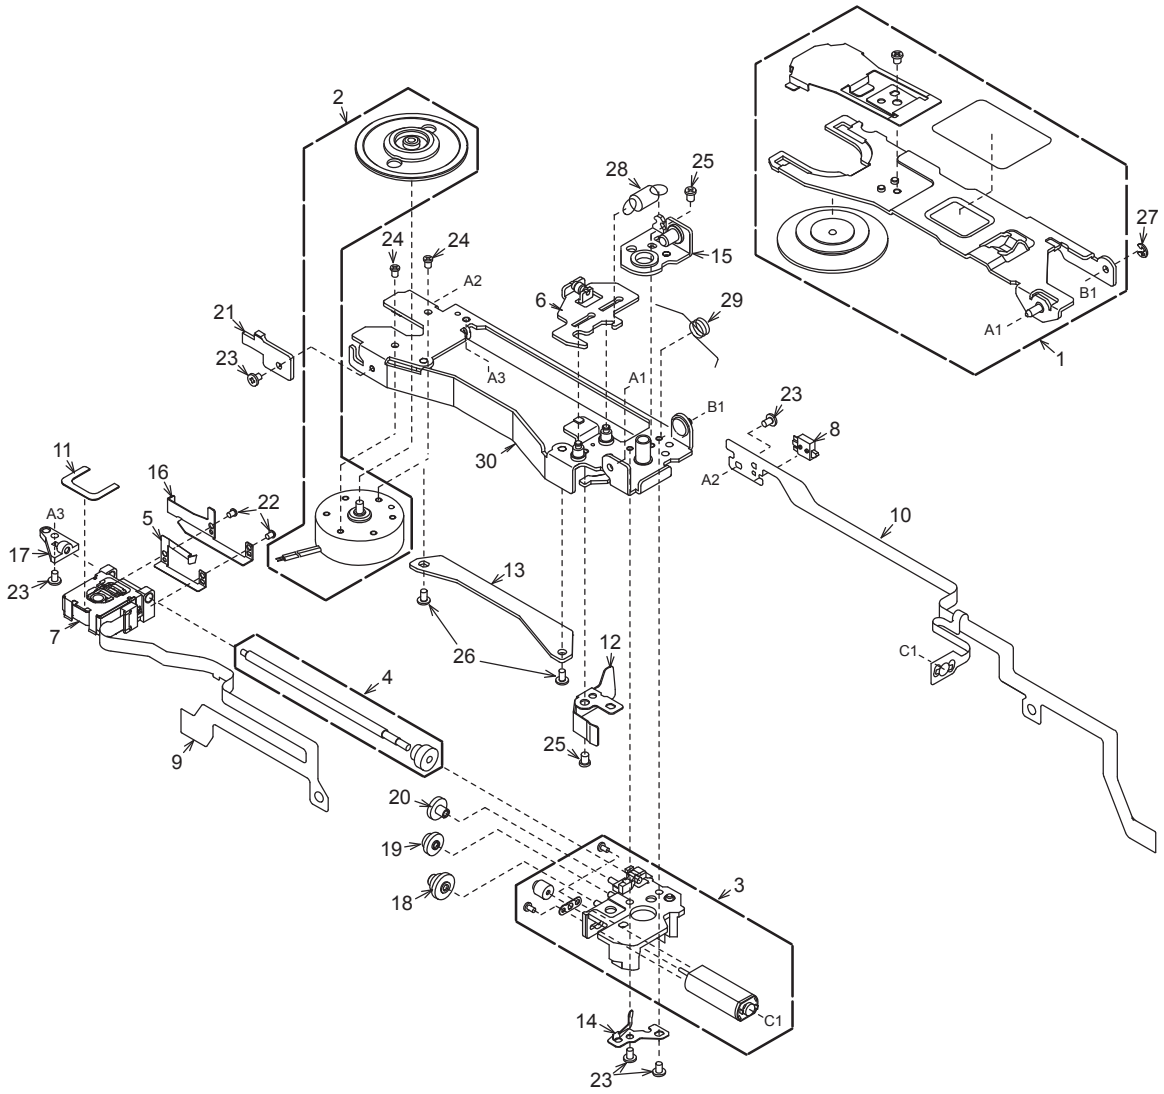

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-101	CLAMPER SUB ASSY	1
2	SMA-196-100	SPINDLE MOTOR ASSY	1
3	SMA-191-100	SLED MOTOR ASSY	1
4	HBS-515-103	LS-ASSY	1
5	620-1587-03	SH-SP-PLT	1
6	HBS-542-101	D-SHIFT-P-ASSY	1
7	969-0011-01	PICK UP-ASSY	1
8	013-7414-50	DETECT SWITCH	1
9	039-2015-02	P/U-FPC	1
10	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1
11	347-6632-00	PU-SHEET	1
12	620-1078-21	PUSH PLATE	1
13	620-1080-22	PU-GUIDE PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1
15	966-0650-20	SPRING PLT ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
16	620-1730-01	SCREW-HOL-PLT	1
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR A	1
19	621-0674-20	D-GEAR B	1
20	621-0675-20	D-GEAR C	1
21	621-0683-21	DU-STOPPER	1
22	716-3511-01	SCREW(M1.4x3)	2
23	716-3470-01	SCREW(M1.7x3)	5
24	716-3527-01	SCREW(M1.7x1.85)	2
25	738-2025-1H	PRECISION SCREW	2
26	716-3474-01	SCREW(M1.7x3)	2
27	743-1500-1B	E-RING	1
28	750-3487-00	SHIFT-P-SPRING	1
29	750-3504-00	CLAMP-A-SPRING	1
30	966-0649-02	DRIVE PLT-ASSY	1

ELECTRICAL PARTS LIST

Switch PWB(B1) section

REF No.	PART No.	DESCRIPTION
C402	168-1042-78	16V 0.1uF
C700	168-1032-55	0.01uF K
D401	001-7043-90	CL-170FG F-GREEN
D404	001-7043-90	CL-170FG F-GREEN
D405	001-7043-90	CL-170FG F-GREEN
D406	001-7043-90	CL-170FG F-GREEN
D407	001-7043-90	CL-170FG F-GREEN
D408	001-7043-90	CL-170FG F-GREEN
D411	001-0655-90	1SS294
D412	001-0655-90	1SS294
D700	001-7045-90	CL-165D/FG-D
IC401	051-6617-08	NJU3715G-TE2
J401	074-1239-76	26P
PL401	017-0433-93	14V 40mA BLUE
PL402	017-0433-93	14V 40mA BLUE
PL403	017-0433-93	14V 40mA BLUE
PL404	017-0433-93	14V 40mA BLUE
Q401	192-2712-00	2SC2712

REF No.	PART No.	DESCRIPTION
Q402	192-2712-00	2SC2712
Q403	192-2712-00	2SC2712
Q404	192-2712-00	2SC2712
Q720	192-2712-00	2SC2712
R401	119-6811-15	1/10W 680 ohm
R407	119-6811-15	1/10W 680 ohm
R409	119-6811-15	1/10W 680 ohm
R411	119-6811-15	1/10W 680 ohm
R413	119-6811-15	1/10W 680 ohm
R415	119-6811-15	1/10W 680 ohm
R419	119-1031-15	1/10W 10k ohm
R420	119-1031-15	1/10W 10k ohm
R421	119-1031-15	1/10W 10k ohm
R422	119-1031-15	1/10W 10k ohm
R423	119-1031-15	1/10W 10k ohm
R424	119-1031-15	1/10W 10k ohm
R425	119-1031-15	1/10W 10k ohm
R426	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R700	119-6811-15	1/10W 680 ohm
R701	119-6811-15	1/10W 680 ohm
R720	119-1031-15	1/10W 10k ohm
S401	013-6201-52	SKPMAP010
S402	013-6201-52	SKPMAP010
S403	013-6201-52	SKPMAP010
S404	013-6201-52	SKPMAP010
S405	013-6201-52	SKPMAP010
S406	013-6201-52	SKPMAP010
S407	013-6201-52	SKPMAP010
S408	013-7415-50	SPVG110400
S700	013-6201-52	SKPMAP010
TM401	073-0778-90	TERMINAL
TM402	073-0778-90	TERMINAL
TM403	073-0778-90	TERMINAL
PWB	039-3143-00	PWB(WITHOUT CO MPONENTS)

Main PWB(B2) section

REF No.	PART No.	DESCRIPTION
C101	166-3301-50	33pF CH
C102	166-3301-50	33pF CH
C103	168-1045-56	0.1uF Z
C104	168-1045-56	0.1uF Z
C105	166-3301-50	33pF CH
C106	168-1045-56	0.1uF Z
C107	166-1011-50	100pF CH
C108	168-2232-55	0.022uF K
C109	168-1045-56	0.1uF Z
C110	166-1011-50	100pF CH
C112	168-1045-56	0.1uF Z
C113	168-1045-56	0.1uF Z
C114	168-1032-55	0.01uF K
C115	168-1045-56	0.1uF Z
C117	168-1022-55	1000pF K
C118	168-1022-55	1000pF K
C119	165-2263-15	6.3V 22uF
C120	165-2263-15	6.3V 22uF
C121	166-2201-50	22pF CH
C122	166-2201-50	22pF CH
C123	168-1022-55	1000pF K
C124	168-1032-55	0.01uF K
C125	165-2263-15	6.3V 22uF
C126	165-2263-15	6.3V 22uF
C127	168-1022-55	1000pF K
C128	168-1022-55	1000pF K
C129	168-1022-55	1000pF K
C130	168-1022-55	1000pF K
C131	168-1022-55	1000pF K
C132	168-1032-55	0.01uF K
C133	168-1032-55	0.01uF K
C134	165-1073-15	6.3V 100uF
C135	166-1211-50	120pF CH
C136	166-1211-50	120pF CH
C137	168-1042-78	16V 0.1uF
C138	168-1042-78	16V 0.1uF
C139	168-1022-55	1000pF K
C140	165-1063-35	16V 10uF
C141	165-1063-35	16V 10uF
C142	165-1063-35	16V 10uF
C143	165-1063-35	16V 10uF
C201	165-4763-15	6.3V 47uF
C202	168-1032-55	0.01uF K
C203	178-4742-78	0.47uF
C204	168-1032-55	0.01uF K
C205	178-4742-78	0.47uF
C206	168-1022-55	1000pF K
C207	168-1032-55	0.01uF K
C208	168-1022-55	1000pF K

REF No.	PART No.	DESCRIPTION
C209	165-4763-35	16V 47uF
C210	165-4763-15	6.3V 47uF
C211	178-4742-78	0.47uF
C212	168-1032-55	0.01uF K
C213	168-1045-56	0.1uF Z
C214	168-1045-56	0.1uF Z
C215	168-1032-55	0.01uF K
C216	165-1073-15	6.3V 100uF
C217	178-1052-78	1uF
C218	165-1043-65	50V 0.1uF
C219	168-1045-56	0.1uF Z
C220	178-3342-78	0.33uF
C221	165-1073-15	6.3V 100uF
C222	042-2273-25	10V 220uF M
C223	168-1045-56	0.1uF Z
C224	168-1045-56	0.1uF Z
C225	168-1032-55	0.01uF K
C226	172-1041-11	0.1uF
C227	189-4773-31	16V 470uF
C231	165-1073-15	6.3V 100uF
CCT101	050-0140-67	1/32W 220 ohm x4J
CCT102	050-0140-67	1/32W 220 ohm x4J
CCT103	050-0140-67	1/32W 220 ohm x4J
CCT104	050-0140-63	1/32W 47k ohm x4J
CCT105	050-0145-53	1/16W 220k ohm x4 J
CCT106	050-0140-55	1/32W 2.2k ohmx4J
CCT108	050-0140-54	1/32W 1k ohm x4J
CCT109	050-0140-54	1/32W 1k ohm x4J
CCT110	050-0140-54	1/32W 1k ohm x4J
CCT111	050-0140-63	1/32W 47k ohm x4J
CCT112	050-0140-64	1/32W 100k ohm x4J
CCT113	050-0151-00	1/8W 1k ohm x2
CCT114	050-0151-00	1/8W 1k ohm x2
D101	001-2403-90	M1F60
D102	001-1304-90	DAN202U
D201	001-0529-32	MA8056-M
D202	001-0529-32	MA8056-M
D203	001-4301-53	HZU11B2
D204	001-0535-90	MA729
D205	001-0516-90	MA111
D206	001-2403-90	M1F60
D207	001-4100-50	PTZ TE25 9.1B
D209	001-2015-00	RL253
D211	001-0516-90	MA111
IC101	051-5418-08	S-80827ANMP-EDQ
IC102	051-5445-08	BD5227G-TR
IC103	052-5064-10	M30621MCP-D24GP
IC104	051-9402-78	BR93L56RFVM-W

REF No.	PART No.	DESCRIPTION
IC105	051-0350-93	NJM4558M
IC106	051-1544-08	TC74HC4066AF
IC107	051-7243-48	SN74AHCT1G08DC KR
IC108	051-7222-28	TC7SH08FU-TE85L, F
IC109	051-0350-93	NJM4558M
IC201	051-6600-58	HA12187FP
IC202	051-3293-90	BA033SFP-E2
IC203	051-3312-90	BA05SFP
IC204	051-3288-90	AN80M50RSPTX
IC205	051-3306-90	TDA3663AT
J101	074-1189-95	SOCKET45P
J102	074-1059-76	SOCKET26P
J201	074-3014-70	SOCKET(20P)
J301	076-0648-20	SOCKET(20P)
J302	074-4003-18	SOCKET(18P)
J303	074-4004-14	SOCKET(14P)
L101	010-3406-66	22uH J
Q101	125-0014-92	DTA114EK
Q102	125-2032-92	RN1302
Q103	190-1586-00	2SA1586 O,Y,G
Q106	125-0025-93	RN2303
Q107	193-1306-00	2SD1306
Q108	193-1306-00	2SD1306
Q109	125-2032-92	RN1302
Q110	190-1586-00	2SA1586 O,Y,G
Q111	125-0014-92	DTA114EK
Q112	125-2032-92	RN1302
Q113	192-2712-00	2SC2712
Q201	193-1758-18	2SD1758TK-Q
Q202	193-1758-18	2SD1758TK-Q
Q203	193-1758-18	2SD1758TK-Q
Q204	125-2032-92	RN1302
Q205	192-2712-00	2SC2712
Q206	190-1162-00	2SA1162
Q207	190-1162-00	2SA1162
Q208	191-1205-65	2SB1205 S,T
Q209	125-2032-92	RN1302
Q210	125-2032-92	RN1302
Q211	103-2353-00	2SD2353
Q212	125-2004-92	RN1402
Q213	125-0014-92	DTA114EK
R103	119-4731-15	1/10W 47k ohm
R104	119-4731-15	1/10W 47k ohm
R107	119-1041-15	1/10W 100k ohm
R108	119-4731-15	1/10W 47k ohm
R109	119-2741-15	1/10W 270k ohm
R110	119-4741-15	1/10W 470k ohm

REF No.	PART No.	DESCRIPTION
R111	119-1041-15	1/10W 100k ohm
R113	119-4731-15	1/10W 47k ohm
R114	119-1031-15	1/10W 10k ohm
R115	119-4731-15	1/10W 47k ohm
R116	119-1031-15	1/10W 10k ohm
R117	119-4721-15	1/10W 4.7k ohm
R118	119-4731-15	1/10W 47k ohm
R119	119-1041-15	1/10W 100k ohm
R120	119-4731-15	1/10W 47k ohm
R121	119-2221-15	1/10W 2.2k ohm
R122	119-3331-15	1/10W 33k ohm
R123	119-4731-15	1/10W 47k ohm
R125	119-4731-15	1/10W 47k ohm
R127	119-4731-15	1/10W 47k ohm
R128	119-4731-15	1/10W 47k ohm
R129	119-1031-15	1/10W 10k ohm
R130	119-1031-15	1/10W 10k ohm
R131	119-1031-15	1/10W 10k ohm
R132	119-1031-15	1/10W 10k ohm
R133	119-1041-15	1/10W 100k ohm
R134	119-1041-15	1/10W 100k ohm
R135	119-4731-15	1/10W 47k ohm
R136	119-1011-15	1/10W 100 ohm
R137	119-1011-15	1/10W 100 ohm
R138	119-1031-15	1/10W 10k ohm
R139	119-1031-15	1/10W 10k ohm
R140	119-2231-15	1/10W 22k ohm
R141	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R142	119-5621-15	1/10W 5.6k ohm
R143	119-5621-15	1/10W 5.6k ohm
R144	116-1011-15	1/4W 100 ohm
R145	119-3921-15	1/10W 3.9k ohm
R146	119-8221-15	1/10W 8.2k ohm
R147	119-8221-15	1/10W 8.2k ohm
R148	119-2231-15	1/10W 22k ohm
R149	119-8221-15	1/10W 8.2k ohm
R150	119-1831-15	1/10W 18k ohm
R151	119-1831-15	1/10W 18k ohm
R152	119-8221-15	1/10W 8.2k ohm
R153	119-2231-15	1/10W 22k ohm
R154	119-4731-15	1/10W 47k ohm
R155	119-1031-15	1/10W 10k ohm
R156	119-8221-15	1/10W 8.2k ohm
R157	116-1011-15	1/4W 100 ohm
R158	116-2211-15	1/4W 220 ohm
R159	116-2211-15	1/4W 220 ohm
R160	116-2211-15	1/4W 220 ohm
R161	116-2211-15	1/4W 220 ohm
R201	116-2291-15	1/4W 2.2 ohm
R202	116-2291-15	1/4W 2.2 ohm
R203	116-2291-15	1/4W 2.2 ohm
R204	116-1011-15	1/4W 100 ohm
R205	116-1011-15	1/4W 100 ohm
R206	116-4791-15	1/4W 4.7 ohm
R207	116-3621-15	1/4W 3.6k ohm
R208	116-3321-15	1/4W 3.3k ohm

REF No.	PART No.	DESCRIPTION
R209	116-4791-15	1/4W 4.7 ohm
R210	116-4791-15	1/4W 4.7 ohm
R211	119-4711-15	1/10W 470 ohm
R212	116-4791-15	1/4W 4.7 ohm
R213	119-1021-15	1/10W 1k ohm
R214	119-2231-15	1/10W 22k ohm
R215	119-1531-15	1/10W 15k ohm
R216	119-2231-15	1/10W 22k ohm
R217	119-2231-15	1/10W 22k ohm
R218	116-4791-15	1/4W 4.7 ohm
R221	116-4791-15	1/4W 4.7 ohm
R223	116-4791-15	1/4W 4.7 ohm
R225	116-1511-15	1/4W 150 ohm
R226	116-1511-15	1/4W 150 ohm
R227	116-4791-15	1/4W 4.7 ohm
R228	116-5611-15	1/4W 560 ohm
R229	116-5611-15	1/4W 560 ohm
R230	119-1041-15	1/10W 100k ohm
R232	119-0000-05	1/10W 0 ohm JW
R234	116-0000-05	1/4W 0 ohm
T201	009-0679-00	CHOKE 0.53mH
TM201	073-0768-90	TERMINAL
TM203	073-0778-90	TERMINAL
TM204	073-0778-90	TERMINAL
X101	060-1551-90	10.000MHz
PWB	039-3144-00	PWB(WITHOUT COMPONENTS)

Driver PWB(B3) section

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF
C2	163-1073-35	16V100uF
D1	001-0529-29	MA8051-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/10W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S1	013-7412-50	SPVG21
PWB	039-2242-01	PWB(WITHOUT COMPONENTS)

Sensor PWB(B4) section

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F
PT5	060-0252-01	PT4850F
PT6	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
S1	013-7414-50	SPVG22
PWB	039-1956-00	PWB(WITHOUT COMPONENTS)

LED-L-PWB(B5) section

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800
LED4	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1954-20	PWB(WITHOUT COMPONENTS)

LED-R-PWB(B6) section

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800
LED6	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1955-20	PWB(WITHOUT COMPONENTS)

PIM-FPC(B7) section

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

PIV-FPC(B8) section

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

L-Motor-FPC(B9) section

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

DSP PWB(B10) section

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION
C1	042-0671-01	10V 47uF TA
C2	168-4735-56	0.047uF Z
C3	046-4722-58	4700pF B
C4	046-1032-78	0.01uF B
C5	168-1045-56	0.1uF Z
C6	042-0671-01	10V 47uF TA
C7	168-1045-56	0.1uF Z
C8	168-1045-56	0.1uF Z
C9	045-1007-50	10pF CH
C10	168-1045-56	0.1uF Z
C11	045-1007-50	10pF CH
C12	168-1045-56	0.1uF Z
C13	042-0672-00	25V 47uF TA
C14	168-4735-56	0.047uF Z
C15	168-4735-56	0.047uF Z
C16	168-4735-56	0.047uF Z
C17	178-1052-78	1uF
C18	045-4701-50	47pF CH
C19	168-1045-56	0.1uF Z
C20	046-4712-58	470pF B
C21	046-4712-58	470pF B
C22	168-1045-56	0.1uF Z
C23	046-1532-78	0.015uF B
C24	168-1045-56	0.1uF Z
C25	046-6822-58	6800pF B
C26	046-1032-78	0.01uF B
C28	046-1022-58	1000pF B
C29	046-3332-78	0.033uF B
C32	046-4722-58	4700pF B
C33	046-1522-58	1500pF B
C34	168-1045-56	0.1uF Z
C35	046-1532-78	0.015uF B
C36	168-1045-56	0.1uF Z
C37	168-1045-56	0.1uF Z
C38	042-0671-01	10V 47uF TA
C39	178-1052-78	1uF
C40	045-6801-50	68pF CH
C41	168-1045-56	0.1uF Z
C42	178-1052-78	1uF
C43	042-0671-01	10V 47uF TA
C44	046-6812-58	680pF B
C45	168-1045-56	0.1uF Z
C46	168-1045-56	0.1uF Z
C47	042-0671-01	10V 47uF TA
C48	168-5632-78	16V 0.056uF
C49	168-1045-56	0.1uF Z
C50	168-1045-56	0.1uF Z
C51	168-1045-56	0.1uF Z
C53	168-1045-56	0.1uF Z
C54	042-0671-01	10V 47uF TA
C56	168-4712-55	470pF K
C57	046-1032-78	0.01uF B
C58	168-4712-55	470pF K
C59	168-1045-56	0.1uF Z
C60	168-1045-56	0.1uF Z
C61	046-1032-78	0.01uF B
C62	042-0671-01	10V 47uF TA
C63	046-1032-78	0.01uF B
C64	168-1045-56	0.1uF Z
C65	045-1201-50	12pF CH
C66	046-1032-78	0.01uF B
C67	046-1032-78	0.01uF B
C68	168-1045-56	0.1uF Z
C69	045-1201-50	12pF CH
C101	046-1032-78	0.01uF B
C102	046-1032-78	0.01uF B
CCT1	050-0140-68	1/32W 3.3k ohm x4J
CCT4	050-0140-63	1/32W 47k ohm x4J
D1	001-0367-91	1SS226
D2	001-2610-90	RB480KTL
IC2	051-6399-00	TC94A15F
IC3	051-6060-08	BD7961FM-E2
IC4	051-7518-18	SN74LVC139APWR
IC5	052-5062-10	MBM29DL800BA-90 PFTN
IC6	051-7518-18	SN74LVC139APWR
IC7	051-9330-00	K4S641632F-TC60
IC8	051-7203-48	SN74LV74APW
IC9	051-6700-00	TMS320DA140PGE160
IC10	051-3315-90	TPS76316DBVR
IC11	051-7221-58	SN74AHC1G04HDCKR
IC12	051-7525-08	SN74LVC2GU04DCKR
IC13	051-7526-08	SN74LVC1G126DCKR
J1	074-1201-65	15P
J2	074-1138-56	6P
J3	074-1059-76	26P
J4	074-1189-95	45P
J5	074-1201-60	10P
L2	010-3104-54	600 ohm/100MHz
L3	010-3104-54	600 ohm/100MHz
Q1	131-1188-50	2SB1188PQR
Q2	131-1188-50	2SB1188PQR
Q3	125-2004-92	RN1402
Q3	125-2020-92	DTC114EKA-T146
R1	033-1021-15	1/10W 1k ohm
R2	033-1021-15	1/10W 1k ohm
R3	033-3311-15	1/10W 330 ohm
R4	033-2211-15	1/10W 220 ohm
R5	033-2211-15	1/10W 220 ohm
R6	033-1021-15	1/10W 1k ohm
R7	033-1051-15	1/10W 1M ohm
R8	033-0000-05	1/10W 0 ohm
R10	033-5621-15	1/10W 5.6k ohm
R11	033-4731-15	1/10W 47k ohm
R12	119-3341-15	1/10W 330k ohm
R13	033-2231-15	1/10W 22k ohm
R14	033-2231-15	1/10W 22k ohm
R15	117-1001-15	1/8W 10 ohm
R16	033-5631-15	1/10W 56k ohm
R17	033-3331-15	1/10W 33k ohm
R18	033-6831-15	1/10W 68k ohm
R19	033-6831-15	1/10W 68k ohm
R20	033-1011-15	1/10W 100 ohm
R21	116-4711-15	1/4W 470 ohm
R22	117-1811-15	1/8W 180 ohm
R23	116-4711-15	1/4W 470 ohm
R24	033-2231-15	1/10W 22k ohm
R25	033-2231-15	1/10W 22k ohm
R26	033-2231-15	1/10W 22k ohm
R27	033-1011-15	1/10W 100 ohm
R28	033-4731-15	1/10W 47k ohm
R29	033-2231-15	1/10W 22k ohm
R30	033-4721-15	1/10W 4.7k ohm
R31	033-4721-15	1/10W 4.7k ohm
R32	033-4731-15	1/10W 47k ohm
R33	033-4731-15	1/10W 47k ohm
R35	033-4731-15	1/10W 47k ohm
R36	033-3311-15	1/10W 330 ohm
R37	033-4731-15	1/10W 47k ohm
R38	033-3311-15	1/10W 330 ohm
R39	033-2211-15	1/10W 220 ohm
R40	033-1011-15	1/10W 100 ohm
R41	033-1001-15	1/10W 10 ohm
R42	033-1001-15	1/10W 10 ohm
R45	033-1011-15	1/10W 100 ohm
R46	033-4731-15	1/10W 47k ohm
R47	033-4731-15	1/10W 47k ohm
R48	033-1011-15	1/10W 100 ohm
R49	033-0000-05	1/10W 0 ohm
R50	033-0000-05	1/10W 0 ohm
R51	033-8231-15	1/10W 82k ohm
R52	033-0000-05	1/10W 0 ohm
R53	033-4731-15	1/10W 47k ohm
R63	033-2231-15	1/10W 22k ohm
R64	033-2231-15	1/10W 22k ohm
R65	033-4731-15	1/10W 47k ohm
R66	033-4731-15	1/10W 47k ohm
R100	033-1011-15	1/10W 100 ohm
R101	033-1011-15	1/10W 100 ohm
R102	033-1011-15	1/10W 100 ohm
R103	033-1011-15	1/10W 100 ohm
R104	033-1011-15	1/10W 100 ohm
R105	033-1011-15	1/10W 100 ohm
R106	033-1011-15	1/10W 100 ohm
R107	033-4731-15	1/10W 47k ohm
R200	033-1051-15	1/10W 1M ohm
R201	033-1021-15	1/10W 1k ohm
R202	033-1021-15	1/10W 1k ohm
R220	033-4731-15	1/10W 47k ohm
R301	119-2231-15	1/10W 22k ohm
R302	119-3911-15	1/10W 390 ohm
X1	061-3534-90	16.92MHz
PWB	039-2531-20	PWB(WITHOUT COMPONENTS)

M/S-FPC(B11) section

REF No.	PART No.	DESCRIPTION
M2	SMA-185-101	SPINDLE
M3	SMA-191-100	SLED
S2	013-7414-50	SPVG22