



NX-200(S)

EXPLODED VIEW

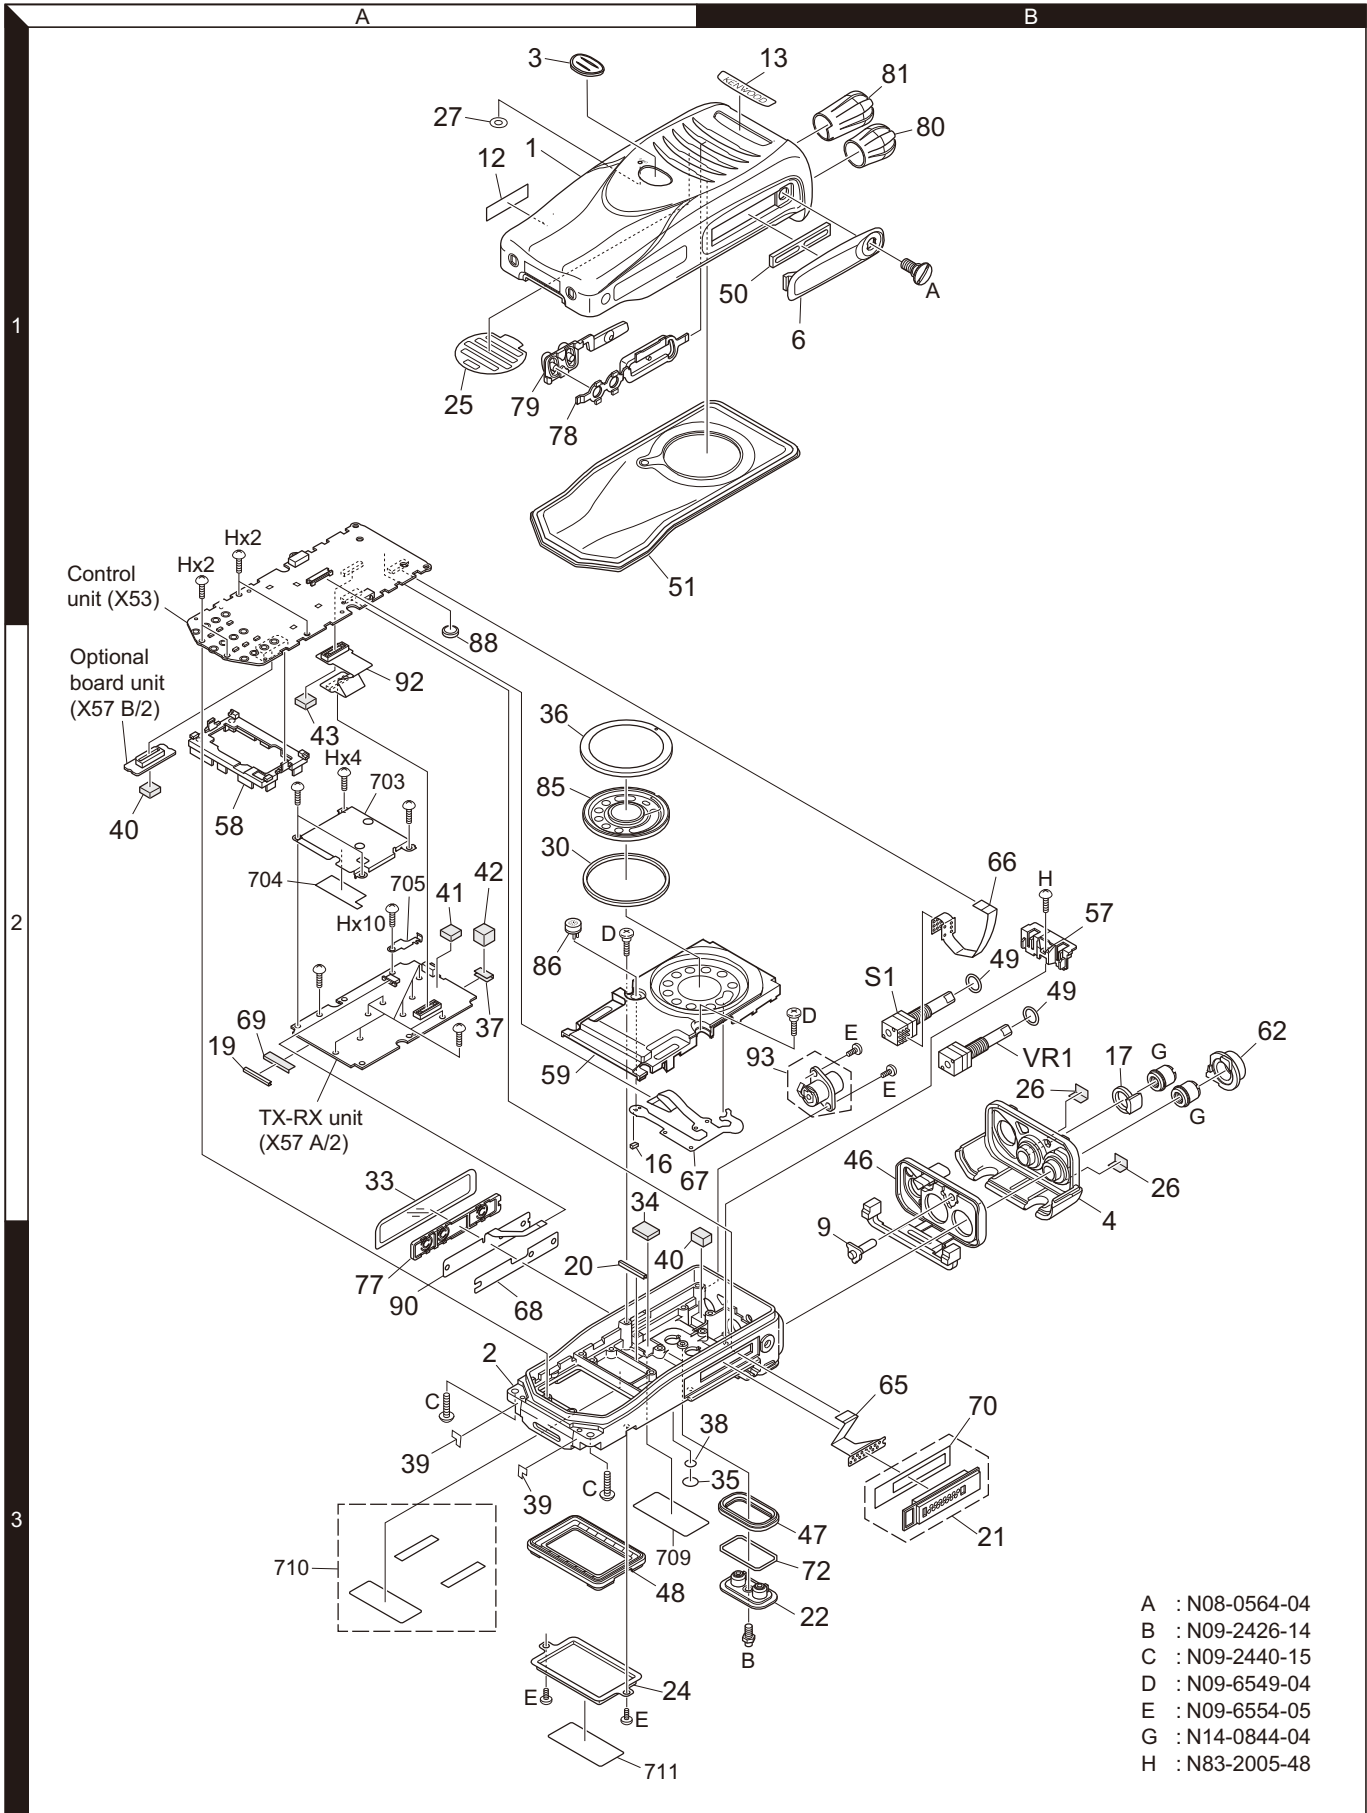

PACKING

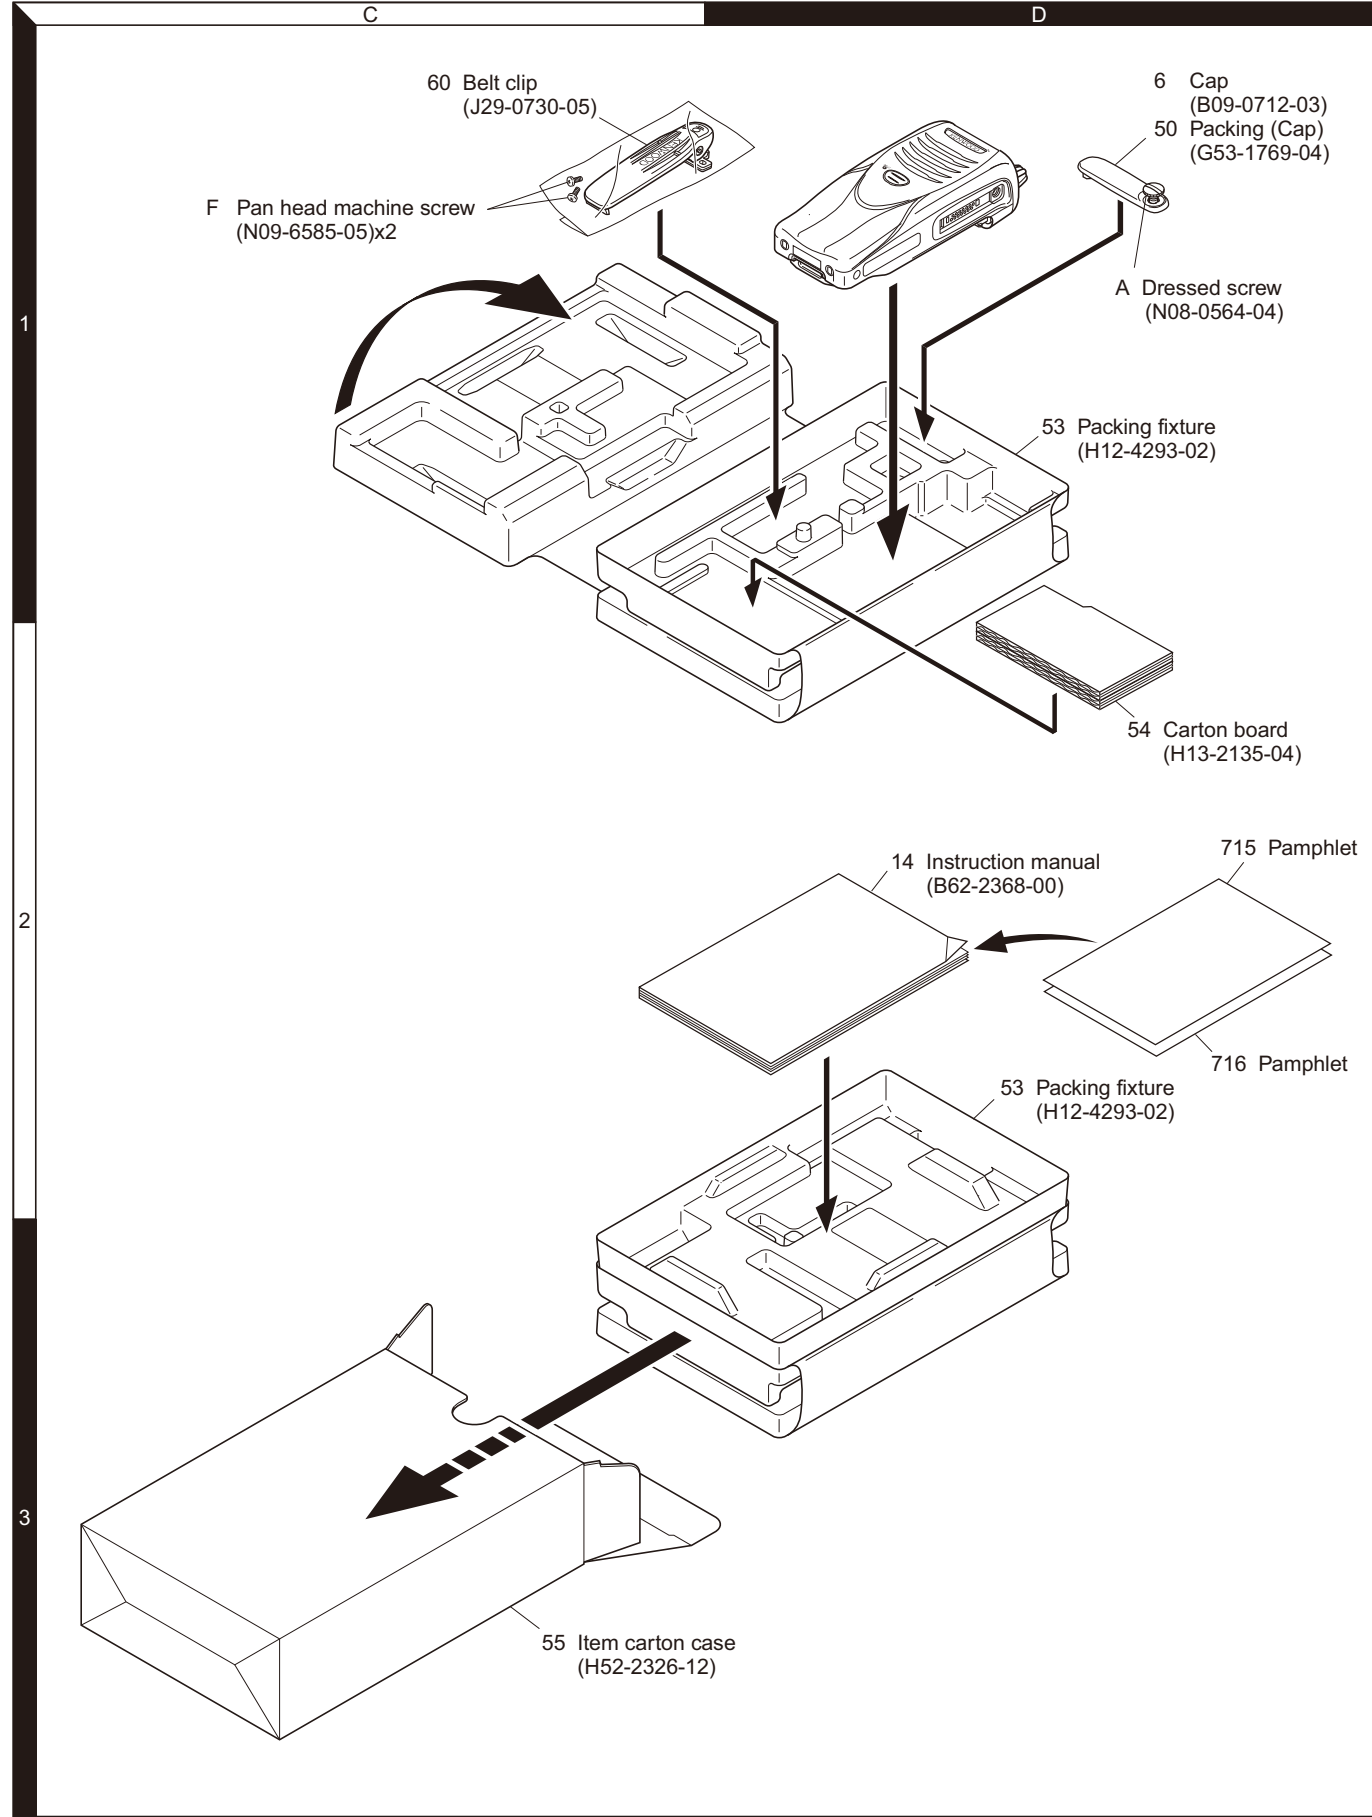

Parts with the exploded numbers larger than 700 are not supplied.

NX-200(S)

PARTS LIST

* New Parts. Δ indicates safety critical components.

Parts without **Parts No.** are not supplied.

Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.

Teile ohne **Parts No.** werden nicht geliefert.

L : Scandinavia

K : USA

P : Canada

Y : PX (Far East, Hawaii)

T : England

E : Europe

C : China

X : Australia

M : Other Areas

NX-200(S)

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description	Destination
NX-200(S)					
1	1A		A02-4116-03	PLASTIC CABINET	
2	3A		A10-4111-21	CHASSIS	
3	1A		A21-1664-03	DRESSING PANEL	
4	2B		A62-1156-02	PANEL(TOP)	
6	1B,1D		B09-0712-03	CAP ACCESSORY	
9	3B		B11-1855-04	ILLUMINATION GUIDE(TX/BUSY)	
12	1A		B42-7463-04	STICKER(NEXEDGE)	
13	1B		B43-1645-04	BADGE(KENWOOD)	
14	2D	*	B62-2368-00	INSTRUCTION MANUAL	
16	2A		CC73GCH1H101J	CHIP C 100PF J	
17	2B		D32-0446-14	STOPPER(16CH)	
19	2A		E29-1220-04	RELAY HARDWARE(VCO-PCB)	
20	3A		E29-1221-14	RELAY HARDWARE(VCO-CHASSIS)	
21	3B		E58-0532-05	RECTANGULAR RECEPTACLE(SP/MIC)	
22	3B		E72-0425-03	TERMINAL BLOCK	
24	3A		F07-1931-04	COVER(OP BOARD)	
25	1A		G10-1806-04	FIBROUS SHEET(SP)	
26	2B		G10-1807-04	FIBROUS SHEET(TOP PANEL)	
27	1A		G10-1822-04	FIBROUS SHEET(ECM)	
30	2A		G11-4272-14	RUBBER CUSHION(SP)	
33	2A		G11-4428-04	SHEET(PTT)	
34	3A		G11-4429-04	RUBBER SHEET(FET)	
35	3A		G11-4440-04	SHEET(AIR)	
36	2A		G11-4458-14	SHEET(SP)	
37	2A		G11-4459-04	SHEET(TX-RX PCB)	
38	3A		G11-4500-04	SHEET(AIR)	
39	3A		G11-4538-04	SHEET(CHASSIS)	
40	2A,3B		G13-2220-04	CUSHION(ANT/OP BOARD)	
41	2A		G13-2249-04	CUSHION(TX-RX PCB)	
42	2A		G13-2292-04	CUSHION(TX-RX PCB)	
43	2A		G13-2293-04	CUSHION(50PIN FPC)	
46	2B		G53-1762-02	PACKING(TOP)	
47	3B		G53-1763-03	PACKING(TERMINAL BLOCK)	
48	3A		G53-1764-03	PACKING(OP BOARD)	
49	2B		G53-1768-04	PACKING(VOL,SELECTOR O-RING)	
50	1B,1D		G53-1769-04	PACKING(CAP) ACCESSORY	
51	1A		G53-1824-01	PACKING	
53	1D,2D	*	H12-4293-02	PACKING FIXTURE	
54	2D		H13-2135-04	CARTON BOARD	
55	3C	*	H52-2326-12	ITEM CARTON CASE	
57	2B		J19-5506-03	HOLDER(VOL,SELECTOR)	
58	2A		J19-5507-02	HOLDER(OP BOARD)	
59	2A		J19-5539-01	HOLDER(SP)	
60	1C		J29-0730-05	BELT CLIP ACCESSORY	
62	2B		J30-1296-04	SPACER(VOL)	
65	3B		J87-0007-25	FPC(LEAD FREE/UNIVERSAL)	
66	2B		J87-0028-05	FPC(LEAD FREE/VOL,SELECTOR)	
67	2A		J87-0037-05	FPC(LEAD FREE/ECM,SP)	
68	3A		J99-0711-04	ADHESIVE SHEET(PTT FPC)	
69	2A		J99-0714-04	ADHESIVE SHEET(TX-RX PCB)	

Ref. No.	Address	New parts	Parts No.	Description	Destination
70	3B		J99-0715-08	ADHESIVE SHEET(UNIVERSAL)	
72	3B		J99-0747-04	ADHESIVE SHEET(TERMINAL BLOCK)	
77	3A		K25-2001-03	PUSH KNOB(PTT)	
78	1A		K29-9405-03	KNOB(PTT)	
79	1A		K29-9406-03	BUTTON KNOB(SIDE KEY)	
80	1B		K29-9407-03	KNOB(VOL)	
81	1B		K29-9408-13	KNOB(SELECTOR)	
A	1B,1D		N08-0564-04	DRESSED SCREW ACCESSORY	
B	3B		N09-2426-14	HEXAGON HEAD SCREW(BATT-)	
C	3A		N09-2440-15	SPECIAL SCREW(CASE/CHASSIS)	
D	2A,2B		N09-6549-04	STEPPED SCREW(FG-SP HOLDER)	
E	2B,3A		N09-6554-05	PAN HEAD SCREW(ANT/OP BOARD)	
F	1C		N09-6585-05	PAN HEAD MACHINE SCREW(BELT CLIP)	
G	2B		N14-0844-04	CIRCULAR NUT(VOL,SELECTOR)	
H	1A,2A,2B		N83-2005-48	PAN HEAD TAPTITE SCREW(PCB)	
VR1	2B		R31-0666-05	VARIABLE RESISTOR(VOL)	
S1	2B		S60-0437-05	ROTARY SWITCH(SELECTOR)	
85	2A		T07-0749-25	SPEAKER	
86	2A		T91-0579-05	MIC ELEMENT	
88	2A		W09-0971-05	LITHIUM CELL	
90	3A		X41-3760-10	SWITCH UNIT(PTT FPC)	
92	2A		X42-3380-10	CORD ASSY(50PIN FPC)	
-			X53-4432-77	SERVICE CONTROL UNIT	
93	2B		X60-3910-10	TERMINAL ASSY(SMA)	
CONTROL UNIT (X53-4432-75)					
C13 -15			CK73HB1H471K	CHIP C 470PF	K
C16 ,17			CC73HCH1H101J	CHIP C 100PF	J
C23			CK73HB1H102K	CHIP C 1000PF	K
C24			CC73HCH1H470J	CHIP C 47PF	J
C25 -27			CK73HB1H102K	CHIP C 1000PF	K
C28 -34			CC73HCH1H101J	CHIP C 100PF	J
C35			CK73HB1H102K	CHIP C 1000PF	K
C36			CK73HB1E682K	CHIP C 6800PF	K
C37			CK73HB1H102K	CHIP C 1000PF	K
C38			CC73HCH1H101J	CHIP C 100PF	J
C101-104			CK73HB1A104K	CHIP C 0.10UF	K
C105			CK73HB0J105K	CHIP C 1.0UF	K
C106			CK73HB1E103K	CHIP C 0.010UF	K
C107			CK73HB1A104K	CHIP C 0.10UF	K
C109,110			CK73HB1H102K	CHIP C 1000PF	K
C111-113			CK73HB1A104K	CHIP C 0.10UF	K
C116,117			CK73HB1A104K	CHIP C 0.10UF	K
C118,119			CK73HB0J105K	CHIP C 1.0UF	K
C120,121			CK73HB1A104K	CHIP C 0.10UF	K
C122-124			CK73HB1E103K	CHIP C 0.010UF	K
C130			CK73HB1E103K	CHIP C 0.010UF	K
C131			CK73HB1A104K	CHIP C 0.10UF	K
C133			CS77CP0J100M	CHIP TINTL 10UF	6.3WV
C134			CK73HB1E103K	CHIP C 0.010UF	K
C135			CK73HB1H102K	CHIP C 1000PF	K

PARTS LIST

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C136			CK73HB1E103K	CHIP C 0.010UF K		C709			CK73HB0J105K	CHIP C 1.0UF K	
C137			CK73GB1E105K	CHIP C 1.0UF K		C710			CK73HB1E103K	CHIP C 0.010UF K	
C138-140			CK73HB1A104K	CHIP C 0.10UF K		C711			CK73HB1A104K	CHIP C 0.10UF K	
C141			CC73HCH1H101J	CHIP C 100PF J		C712			CK73HB1E103K	CHIP C 0.010UF K	
C142			CS77CP0J100M	CHIP TNTL 10UF 6.3WV		C713			CK73HB1H332K	CHIP C 3300PF K	
C143			CK73HB1E103K	CHIP C 0.010UF K		C714			CK73HB1H122K	CHIP C 1200PF K	
C144			CK73GB1E105K	CHIP C 1.0UF K		C715			CK73HB1A104K	CHIP C 0.10UF K	
C145-148			CK73HB1A104K	CHIP C 0.10UF K		C716			CK73HB1H681K	CHIP C 680PF K	
C149			CK73HB1E103K	CHIP C 0.010UF K		C717			CK73HB1E103K	CHIP C 0.010UF K	
C150			CK73GB1E105K	CHIP C 1.0UF K		C718			CK73HB1H152K	CHIP C 1500PF K	
C151-155			CK73HB1A104K	CHIP C 0.10UF K		C720			CK73HB1E103K	CHIP C 0.010UF K	
C156,157			CK73HB1H102K	CHIP C 1000PF K		C721			CK73HB1A104K	CHIP C 0.10UF K	
C158			CK73HB1E103K	CHIP C 0.010UF K		C722			CK73HB1E103K	CHIP C 0.010UF K	
C159			CK73HB1A104K	CHIP C 0.10UF K		C723			CK73HB1A104K	CHIP C 0.10UF K	
C160,161			CK73HB1E682K	CHIP C 6800PF K		C724			CK73HB1E103K	CHIP C 0.010UF K	
C409			CK73HB0J105K	CHIP C 1.0UF K		C725			CC73HCH1E181J	CHIP C 180PF J	
C411,412			CK73HB0J105K	CHIP C 1.0UF K		C726,727			CK73HB1A104K	CHIP C 0.10UF K	
C414			CK73HB0J105K	CHIP C 1.0UF K		C728			CK73HB1H331K	CHIP C 330PF K	
C415			CS77CP1A100M	CHIP TNTL 10UF 10WV		C730			CK73HB1H331K	CHIP C 330PF K	
C416			CK73FB1A106K	CHIP C 10UF K		C731,732			CK73HB1E103K	CHIP C 0.010UF K	
C417			CC73HCH1H221J	CHIP C 220PF J		C734			CK73HB1H102K	CHIP C 1000PF K	
C418			CK73HB1E103K	CHIP C 0.010UF K		C735			CK73HB1H122K	CHIP C 1200PF K	
C419			CK73FB1E475K	CHIP C 4.7UF K		C736,737			CK73HB1A104K	CHIP C 0.10UF K	
C420			CK73HB1E103K	CHIP C 0.010UF K		C738			CK73HB1H102K	CHIP C 1000PF K	
C421			CK73HB1E682K	CHIP C 6800PF K		C739			CK73HB1E682K	CHIP C 6800PF K	
C422			CC73HCH1H100C	CHIP C 10PF C		C740			CK73HB1H102K	CHIP C 1000PF K	
C424,425			CK73HB1A104K	CHIP C 0.10UF K		C742			CK73GB1E105K	CHIP C 1.0UF K	
C427			CK73HB1E103K	CHIP C 0.010UF K		C743			CK73HB0J105K	CHIP C 1.0UF K	
C428			CC73HCH1H030C	CHIP C 3.0PF C		C744-746			CK73HB1E103K	CHIP C 0.010UF K	
C429,430			CK73HB1A104K	CHIP C 0.10UF K		C747,748			CK73HB1A104K	CHIP C 0.10UF K	
C431			CK73FB1A106K	CHIP C 10UF K		C749,750			CC73HCH1H470J	CHIP C 47PF J	
C433			CK73FB1A106K	CHIP C 10UF K		C751			CK73GB1E105K	CHIP C 1.0UF K	
C435-438			CK73HB1A563K	CHIP C 0.056UF K		C752,753			CC73HCH1H101J	CHIP C 100PF J	
C439,440			CK73HB1A104K	CHIP C 0.10UF K		C755			CC73HCH1H470J	CHIP C 47PF J	
C441			CK73GB1E105K	CHIP C 1.0UF K		C756			CK73HB1A104K	CHIP C 0.10UF K	
C442			CK73HB1H471K	CHIP C 470PF K		C757,758			CK73GB0J475K	CHIP C 4.7UF K	
C443			CK73HB1E103K	CHIP C 0.010UF K		C759,760			CK73HB1E103K	CHIP C 0.010UF K	
C445			CK73HB1H102K	CHIP C 1000PF K		C761			CC73HCH1H100D	CHIP C 10PF D	
C446			CK73GB1E105K	CHIP C 1.0UF K		C762			CK73HB1A104K	CHIP C 0.10UF K	
C447			CK73HB1H102K	CHIP C 1000PF K		C763			CK73HB1E103K	CHIP C 0.010UF K	
C448-450			CK73HB0J105K	CHIP C 1.0UF K		C764			CK73HB1H102K	CHIP C 1000PF K	
C452,453			CK73HB1E103K	CHIP C 0.010UF K		C765-767			CK73HB1A104K	CHIP C 0.10UF K	
C454			CK73GB1E105K	CHIP C 1.0UF K		C768			CK73HB1H102K	CHIP C 1000PF K	
C455-457			CK73HB1H471K	CHIP C 470PF K		C771			CK73HB1A224K	CHIP C 0.22UF K	
C459			CK73HB1H471K	CHIP C 470PF K		C772			CK73HB1E103K	CHIP C 0.010UF K	
C460			CK73HB1E682K	CHIP C 6800PF K		C775			CC73HCH1H470J	CHIP C 47PF J	
C461-463			CK73HB1H471K	CHIP C 470PF K		C777			CK73HB1H102K	CHIP C 1000PF K	
C464			CK73HB1E103K	CHIP C 0.010UF K		C778			CK73HB0J105K	CHIP C 1.0UF K	
C465			CK73HB1H102K	CHIP C 1000PF K		C779			CK73HB1E103K	CHIP C 0.010UF K	
C466			CK73HB1E682K	CHIP C 6800PF K		C780			CK73HB1A224K	CHIP C 0.22UF K	
C467,468			CK73HB1A104K	CHIP C 0.10UF K		C781,782			CK73HB0J105K	CHIP C 1.0UF K	
C469,470			CK73HB1H102K	CHIP C 1000PF K		C785			CK73HB1A224K	CHIP C 0.22UF K	
C471			CK73HB1C473K	CHIP C 0.047UF K		C786			CK73HB1E103K	CHIP C 0.010UF K	
C480			CK73HB1E103K	CHIP C 0.010UF K		C787			CK73HB0J105K	CHIP C 1.0UF K	
C701			CK73HB1A104K	CHIP C 0.10UF K		C788			CC73HCH1H150J	CHIP C 15PF J	
C703			CK73GB0J475K	CHIP C 4.7UF K		C789			CC73HCH1H680J	CHIP C 68PF J	
C704,705			CK73HB1A104K	CHIP C 0.10UF K		C790			CK73HB1A104K	CHIP C 0.10UF K	
C706			CC73HCH1H680J	CHIP C 68PF J		C791			CK73HB1A393K	CHIP C 0.039UF K	
C707			CC73HCH1H270J	CHIP C 27PF J		C792			CK73HB0J105K	CHIP C 1.0UF K	
C708			CK73HB1A104K	CHIP C 0.10UF K		C793,794			CK73HB1A104K	CHIP C 0.10UF K	

NX-200(S)

PARTS LIST

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C795			CK73HB1E103K	CHIP C 0.010UF K		R116			RK73HB1J473J	CHIP R 47K J 1/16W	
C796			CK73HB1A104K	CHIP C 0.10UF K		R118			RK73HB1J473J	CHIP R 47K J 1/16W	
C797			CK73HB0J105K	CHIP C 1.0UF K		R119			RK73HB1J104J	CHIP R 100K J 1/16W	
C798			CS77CP1A100M	CHIP TNTL 10UF 10WV		R120			RK73HB1J474J	CHIP R 470K J 1/16W	
C799			CK73HB1A104K	CHIP C 0.10UF K		R121-123			RK73HB1J104J	CHIP R 100K J 1/16W	
C800			CK73HB1H152K	CHIP C 1500PF K		R126			RK73HB1J101J	CHIP R 100 J 1/16W	
C801			CK73HB1C223K	CHIP C 0.022UF K		R127,128			RK73HB1J000J	CHIP R 0 J 1/16W	
C802			CK73HB1E103K	CHIP C 0.010UF K		R129-131			RK73HB1J101J	CHIP R 100 J 1/16W	
C803			CK73HB1H102K	CHIP C 1000PF K		R132,133			RK73HB1J104J	CHIP R 100K J 1/16W	
C804			CC73HCH1H470J	CHIP C 47PF J		R135-137			RK73HB1J104J	CHIP R 100K J 1/16W	
C805,806			CK73HB1H471K	CHIP C 470PF K		R138			RK73HB1J473J	CHIP R 47K J 1/16W	
C808			CK73GB0J475K	CHIP C 4.7UF K		R139			RK73HB1J104J	CHIP R 100K J 1/16W	
C809			CK73FB1A106K	CHIP C 10UF K		R140			RK73HB1J000J	CHIP R 0 J 1/16W	
C812			CK73HB0J105K	CHIP C 1.0UF K		R141-143			RK73HB1J104J	CHIP R 100K J 1/16W	
						R144			RK73HB1J471J	CHIP R 470 J 1/16W	
CN22			E23-1325-05	TERMINAL		R145-147			RK73HB1J104J	CHIP R 100K J 1/16W	
CN23			E40-6758-05	PIN ASSY		R148			RK73HB1J151J	CHIP R 150 J 1/16W	
CN24			E23-1325-05	TERMINAL		R149			RK73HB1J000J	CHIP R 0 J 1/16W	
CN403			E40-6813-05	PIN ASSY		R150			RK73HB1J102J	CHIP R 1.0K J 1/16W	
CN404			E40-6421-15	PIN ASSY		R153,154			RK73HB1J104J	CHIP R 100K J 1/16W	
CN405			E40-6754-05	FLAT CABLE CONNECTOR		R155			RK73HB1J473J	CHIP R 47K J 1/16W	
CN710			E40-6757-05	PIN ASSY		R156,157			RK73HB1J472J	CHIP R 4.7K J 1/16W	
F701			F53-0360-05	FUSE(0.25A)		R158,159			RK73HB1J220J	CHIP R 22 J 1/16W	
CN401			J19-5386-05	HOLDER(LITHIUM CELL)		R160,161			RK73HB1J000J	CHIP R 0 J 1/16W	
						R162			RK73HB1J474J	CHIP R 470K J 1/16W	
L1 ,2			L92-0408-05	CHIP FERRITE		R163			RK73HH1J104D	CHIP R 100K D 1/16W	
L3			L92-0140-05	CHIP FERRITE		R165			RK73HB1J102J	CHIP R 1.0K J 1/16W	
L4 -7			L92-0408-05	CHIP FERRITE		R166			RK73HB1J104J	CHIP R 100K J 1/16W	
L8			L92-0140-05	CHIP FERRITE		R167			RK73HB1J102J	CHIP R 1.0K J 1/16W	
L101,102			L92-0408-05	CHIP FERRITE		R168			RK73HB1J000J	CHIP R 0 J 1/16W	
L401			L33-1496-05	SMALL FIXED INDUCTOR(22UH)		R170			RK73HH1J103D	CHIP R 10K D 1/16W	
L402			L92-0467-05	CHIP FERRITE		R171-173			RK73HB1J000J	CHIP R 0 J 1/16W	
L403			L92-0466-05	CHIP FERRITE		R174-178			RK73HB1J104J	CHIP R 100K J 1/16W	
L409-411			L92-0467-05	CHIP FERRITE		R180,181			RK73HB1J104J	CHIP R 100K J 1/16W	
L701			L92-0140-05	CHIP FERRITE		R182			RK73HB1J474J	CHIP R 470K J 1/16W	
L702			L92-0162-05	BEADS CORE		R183			RK73HB1J104J	CHIP R 100K J 1/16W	
L704-706			L92-0162-05	BEADS CORE		R184			RK73HB1J473J	CHIP R 47K J 1/16W	
L708,709			L92-0162-05	BEADS CORE		R185			RK73HB1J105J	CHIP R 1.0M J 1/16W	
L710-712			L92-0444-05	CHIP FERRITE		R186			RK73HB1J473J	CHIP R 47K J 1/16W	
L713			L92-0163-05	BEADS CORE		R187			RK73HB1J102J	CHIP R 1.0K J 1/16W	
L714-717			L92-0444-05	CHIP FERRITE		R188			RK73HB1J473J	CHIP R 47K J 1/16W	
L718			L92-0408-05	CHIP FERRITE		R189			RK73HB1J104J	CHIP R 100K J 1/16W	
L719			L33-1494-05	SMALL FIXED INDUCTOR(4.7UH)		R190			RK73HB1J102J	CHIP R 1.0K J 1/16W	
X101			L77-1802-05	CRYSTAL RESONATOR(32.768KHZ)		R191			RK73HB1J474J	CHIP R 470K J 1/16W	
X102			L77-3015-05	TCXO(18.432MHZ)		R192			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R18			RK73HB1J822J	CHIP R 8.2K J 1/16W		R193,194			RK73HB1J104J	CHIP R 100K J 1/16W	
R19			RK73HB1J471J	CHIP R 470 J 1/16W		R413			RK73HB1J471J	CHIP R 470 J 1/16W	
R27			RK73HB1J104J	CHIP R 100K J 1/16W		R416			RK73HB1J471J	CHIP R 470 J 1/16W	
R28 ,29			RK73HB1J102J	CHIP R 1.0K J 1/16W		R419,420			RK73HB1J000J	CHIP R 0 J 1/16W	
R30			RK73HB1J101J	CHIP R 100 J 1/16W		R424			RK73HH1J683D	CHIP R 68K D 1/16W	
R31			RK73HB1J102J	CHIP R 1.0K J 1/16W		R425			RK73HH1J333D	CHIP R 33K D 1/16W	
R32 -35			RK73HB1J101J	CHIP R 100 J 1/16W		R426-429			RK73HB1J000J	CHIP R 0 J 1/16W	
R40			RK73HB1J000J	CHIP R 0 J 1/16W		R431			RK73HB1J474J	CHIP R 470K J 1/16W	
R101,102			RK73HB1J474J	CHIP R 470K J 1/16W		R432,433			RK73HB1J000J	CHIP R 0 J 1/16W	
R103			RK73HB1J102J	CHIP R 1.0K J 1/16W		R434			RK73HB1J393J	CHIP R 39K J 1/16W	
R105			RK73HB1J104J	CHIP R 100K J 1/16W		R435,436			RK73HB1J104J	CHIP R 100K J 1/16W	
R107			RK73HB1J104J	CHIP R 100K J 1/16W		R437			RK73HB1J471J	CHIP R 470 J 1/16W	
R110,111			RK73HB1J104J	CHIP R 100K J 1/16W		R438,439			RK73HB1J104J	CHIP R 100K J 1/16W	
R113			RK73HB1J104J	CHIP R 100K J 1/16W		R440			RK73HB1J000J	CHIP R 0 J 1/16W	
R115			RK73HB1J104J	CHIP R 100K J 1/16W		R441			RK73HB1J153J	CHIP R 15K J 1/16W	

PARTS LIST

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R442			RK73HB1J102J	CHIP R 1.0K J 1/16W		R716			RK73GB2A000J	CHIP R 0 J 1/10W	
R443			RK73HB1J474J	CHIP R 470K J 1/16W		R717-722			RK73HB1J104J	CHIP R 100K J 1/16W	
R444			RK73HB1J564J	CHIP R 560K J 1/16W		R723			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R445			RK73HB1J154J	CHIP R 150K J 1/16W		R724			RK73HB1J104J	CHIP R 100K J 1/16W	
R446			RK73HB1J274J	CHIP R 270K J 1/16W		R725			RK73HB1J100J	CHIP R 10 J 1/16W	
R447			RK73HB1J104J	CHIP R 100K J 1/16W		R726			RK73HB1J104J	CHIP R 100K J 1/16W	
R448			RK73HB1J103J	CHIP R 10K J 1/16W		R727-729			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R449-452			RK73HB1J474J	CHIP R 470K J 1/16W		R730			RK73HB1J471J	CHIP R 470 J 1/16W	
R453			RK73HB1J104J	CHIP R 100K J 1/16W		R731,732			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R454			RK73HB1J474J	CHIP R 470K J 1/16W		R733			RK73HB1J473J	CHIP R 47K J 1/16W	
R455			RK73HB1J102J	CHIP R 1.0K J 1/16W		R735			RK73HB1J473J	CHIP R 47K J 1/16W	
R456			RK73HB1J474J	CHIP R 470K J 1/16W		R736			RK73HB1J823J	CHIP R 82K J 1/16W	
R457,458			RK73HB1J104J	CHIP R 100K J 1/16W		R737			RK73HB1J153J	CHIP R 15K J 1/16W	
R459,460			RK73HB1J102J	CHIP R 1.0K J 1/16W		R738			RK73HB1J563J	CHIP R 56K J 1/16W	
R461			RK73HB1J103J	CHIP R 10K J 1/16W		R739			RK73HB1J823J	CHIP R 82K J 1/16W	
R462			RK73HB1J102J	CHIP R 1.0K J 1/16W		R740			RK73HB1J000J	CHIP R 0 J 1/16W	
R463			RK73HB1J104J	CHIP R 100K J 1/16W		R741			RK73HB1J474J	CHIP R 470K J 1/16W	
R465			RK73HB1J103J	CHIP R 10K J 1/16W		R742,743			RK73HB1J103J	CHIP R 10K J 1/16W	
R466,467			RK73HB1J104J	CHIP R 100K J 1/16W		R744			RK73HB1J223J	CHIP R 22K J 1/16W	
R468			RK73HB1J000J	CHIP R 0 J 1/16W		R745			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R469			RK73HB1J474J	CHIP R 470K J 1/16W		R746			RK73HB1J563J	CHIP R 56K J 1/16W	
R470			RK73HB1J183J	CHIP R 18K J 1/16W		R748			RK73HB1J103J	CHIP R 10K J 1/16W	
R471			RK73HB1J000J	CHIP R 0 J 1/16W		R749			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R472			RK73HB1J223J	CHIP R 22K J 1/16W		R750			RK73HB1J103J	CHIP R 10K J 1/16W	
R473			RK73HB1J332J	CHIP R 3.3K J 1/16W		R752			RK73HB1J101J	CHIP R 100 J 1/16W	
R474,475			RK73HB1J333J	CHIP R 33K J 1/16W		R753			RK73HB1J683J	CHIP R 68K J 1/16W	
R477,478			RK73HB1J000J	CHIP R 0 J 1/16W		R754			RK73HB1J564J	CHIP R 560K J 1/16W	
R479			RK73HB1J102J	CHIP R 1.0K J 1/16W		R755			RK73HB1J104J	CHIP R 100K J 1/16W	
R481			RK73HB1J474J	CHIP R 470K J 1/16W		R756			RK73HB1J101J	CHIP R 100 J 1/16W	
R483			RK73HB1J473J	CHIP R 47K J 1/16W		R757			RK73HB1J223J	CHIP R 22K J 1/16W	
R484			RK73HB1J223J	CHIP R 22K J 1/16W		R758			RK73HB1J103J	CHIP R 10K J 1/16W	
R485			RK73HB1J103J	CHIP R 10K J 1/16W		R759			RK73HB1J101J	CHIP R 100 J 1/16W	
R487-490			RK73HB1J223D	CHIP R 22K D 1/16W		R761-764			RK73HB1J223J	CHIP R 22K J 1/16W	
R491			RK73HB1J104J	CHIP R 100K J 1/16W		R765			RK73HB1J334J	CHIP R 330K J 1/16W	
R492			RK73HB1J474J	CHIP R 470K J 1/16W		R766			RK73HB1J000J	CHIP R 0 J 1/16W	
R493			RK73HB1J000J	CHIP R 0 J 1/16W		R767			RK73HB1J103J	CHIP R 10K J 1/16W	
R494-497			RK73HB1J104D	CHIP R 100K D 1/16W		R768			RK73HB1J224J	CHIP R 220K J 1/16W	
R500			RK73HB1J473J	CHIP R 47K J 1/16W		R769,770			RK73HB1J334J	CHIP R 330K J 1/16W	
R501			RK73HB1J222J	CHIP R 2.2K J 1/16W		R771			RK73HB1J153J	CHIP R 15K J 1/16W	
R502,503			RK73HB1J103J	CHIP R 10K J 1/16W		R775			RK73HB1J183J	CHIP R 18K J 1/16W	
R504			RK73HB1J102J	CHIP R 1.0K J 1/16W		R777			RK73HB1J473J	CHIP R 47K J 1/16W	
R506			RK73HB1J222J	CHIP R 2.2K J 1/16W		R778			RK73HB1J333J	CHIP R 33K J 1/16W	
R507-511			RK73HB1J102J	CHIP R 1.0K J 1/16W		R779			RK73HB1J473J	CHIP R 47K J 1/16W	
R512			RK73HB1J101J	CHIP R 100 J 1/16W		R780			RK73HB1J104J	CHIP R 100K J 1/16W	
R513-515			RK73HB1J102J	CHIP R 1.0K J 1/16W		R782			RK73HB1J104J	CHIP R 100K J 1/16W	
R516			RK73HB1J101J	CHIP R 100 J 1/16W		R783			RK73HB1J183J	CHIP R 18K J 1/16W	
R517			RK73HB1J102J	CHIP R 1.0K J 1/16W		R784			RK73HB1J104J	CHIP R 100K J 1/16W	
R518			RK73HB1J101J	CHIP R 100 J 1/16W		R785			RK73HB1J682J	CHIP R 6.8K J 1/16W	
R519-528			RK73HB1J102J	CHIP R 1.0K J 1/16W		R786			RK73HB1J000J	CHIP R 0 J 1/16W	
R529-531			RK73HB1J101J	CHIP R 100 J 1/16W		R787			RK73HB1J124J	CHIP R 120K J 1/16W	
R532			RK73HB1J102J	CHIP R 1.0K J 1/16W		R788			RK73HB1J473J	CHIP R 47K J 1/16W	
R533-535			RK73HB1J101J	CHIP R 100 J 1/16W		R789			RK73HB1J154J	CHIP R 150K J 1/16W	
R536-540			RK73HB1J102J	CHIP R 1.0K J 1/16W		R790			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R541			RK73HB1J101J	CHIP R 100 J 1/16W		R791			RK73HB1J474J	CHIP R 470K J 1/16W	
R543			RK73HB1J101J	CHIP R 100 J 1/16W		R793			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R544			RK73HB1J102J	CHIP R 1.0K J 1/16W		R794			RK73HB1J104J	CHIP R 100K J 1/16W	
R545			RK73HB1J101J	CHIP R 100 J 1/16W		R795			RK73HB1J000J	CHIP R 0 J 1/16W	
R546,547			RK73HB1J102J	CHIP R 1.0K J 1/16W		R796			RK73HB1J333J	CHIP R 33K J 1/16W	
R548,549			RK73HB1J473J	CHIP R 47K J 1/16W		R797			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R550			RK73HB1J000J	CHIP R 0 J 1/16W		R798			RK73HB1J104J	CHIP R 100K J 1/16W	

NX-200(S)

PARTS LIST

CONTROL UNIT (X53-4432-75)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R799			RK73HB1J334J	CHIP R 330K J 1/16W		D411			1SS416	DIODE	
R800			RK73HB1J474J	CHIP R 470K J 1/16W		D412			1SS301F	DIODE	
R801			RK73HB1J473J	CHIP R 47K J 1/16W		D413			1SS388F	DIODE	
R802			RK73HB1J474J	CHIP R 470K J 1/16W		D414,415			1SS416	DIODE	
R803			RK73HB1J103J	CHIP R 10K J 1/16W		D416,417			1SS388F	DIODE	
R804			RK73HB1J000J	CHIP R 0 J 1/16W		D701			1SS301F	DIODE	
R805,806			RK73HB1J473J	CHIP R 47K J 1/16W		D702			MA2S111-F	DIODE	
R807			RK73HB1J102J	CHIP R 1.0K J 1/16W		D703-706			KDR731	DIODE	
R808			RK73HB1J471J	CHIP R 470 J 1/16W		D707			DA221	DIODE	
R809			RK73HB1J334J	CHIP R 330K J 1/16W		IC101			Note 1	ROM IC	
R810			RK73HB1J332J	CHIP R 3.3K J 1/16W		IC102			Note 1	MICROPROCESSOR IC	
R811			RK73HB1J823J	CHIP R 82K J 1/16W		IC103			Note 1	SRAM IC	
R812			RK73HB1J562J	CHIP R 5.6K J 1/16W		IC104			TC7SH08FU-F	MOS-IC	
R813			RK73HB1J273J	CHIP R 27K J 1/16W		IC105			XC6109C29AN-G	MOS-IC	
R814			RK73HB1J564J	CHIP R 560K J 1/16W		IC106			RV5C386A	MOS-IC	
R815			RK73HB1J104J	CHIP R 100K J 1/16W		IC107			SM5023CNDH-G	MOS-IC	
R816			RK73HB1J683J	CHIP R 68K J 1/16W		IC108			Note 1	MOS-IC	
R818			RK73HB1J104J	CHIP R 100K J 1/16W		IC109			TC7SH08FU-F	MOS-IC	
R819,820			RK73HB1J103J	CHIP R 10K J 1/16W		IC404			XC6204B332D-G	MOS-IC	
R821			RK73HB1J104J	CHIP R 100K J 1/16W		IC406			XC6204B332M-G	MOS-IC	
R822,823			RK73HB1J103J	CHIP R 10K J 1/16W		IC407			LT1616ES6-PBF	ANALOGUE IC	
R824			RK73HB1J393J	CHIP R 39K J 1/16W		IC408			TC75S51FE(F)	MOS-IC	
R825			RK73HB1J104J	CHIP R 100K J 1/16W		IC409			TC7W66FK-F	MOS-IC	
R826			RK73HB1J334J	CHIP R 330K J 1/16W		IC411			NJM2880U105ZB	ANALOGUE IC	
R827			RK73HB1J184J	CHIP R 180K J 1/16W		IC412,413			TPA6201A1DRBR	ANALOGUE IC	
R828,829			RK73HB1J000J	CHIP R 0 J 1/16W		IC414			XC61CC5602N-G	MOS-IC	
R830			RK73HB1J105J	CHIP R 1.0M J 1/16W		IC415			TC7SET08FU-F	MOS-IC	
R831			RK73HB1J474J	CHIP R 470K J 1/16W		IC416			S-812C31BPI-G	ANALOGUE IC	
R832			RK73HB1J473J	CHIP R 47K J 1/16W		IC417			TC7WH126FK	MOS-IC	
R833			RK73HB1J684J	CHIP R 680K J 1/16W		IC418			TC7WT125FUF	MOS-IC	
R834			RK73HB1J000J	CHIP R 0 J 1/16W		IC701			PCA9535BS	MOS-IC	
R835			RK73HB1J153J	CHIP R 15K J 1/16W		IC702			TC75W51FK(F)	MOS-IC	
R836			RK73HB1J473J	CHIP R 47K J 1/16W		IC703			M62364FP-F	MOS-IC	
R837			RK73HB1J683J	CHIP R 68K J 1/16W		IC704			TC75S51FE(F)	MOS-IC	
R838			RK73HB1J564J	CHIP R 560K J 1/16W		IC705			TC75W51FK(F)	MOS-IC	
R839			RK73HB1J333J	CHIP R 33K J 1/16W		IC706			TC75S51FE(F)	MOS-IC	
R840			RK73HB1J123J	CHIP R 12K J 1/16W		IC707			TC7W53FK(F)	MOS-IC	
R841			RK73HB1J564J	CHIP R 560K J 1/16W		IC708			XC6209B502P-G	MOS-IC	
R842			RK73HB1J104J	CHIP R 100K J 1/16W		IC709			TC7W53FK(F)	MOS-IC	
R843			RK73HB1J102J	CHIP R 1.0K J 1/16W		IC710,711			TC75W51FK(F)	MOS-IC	
R844			RK73HB1J472J	CHIP R 4.7K J 1/16W		IC712			TC7S66FUF	MOS-IC	
R845			RK73HB1J104J	CHIP R 100K J 1/16W		IC713			TC75W51FK(F)	MOS-IC	
R846			RK73HB1J471J	CHIP R 470 J 1/16W		IC714			TC7W53FK(F)	MOS-IC	
R847			RK73HB1J182J	CHIP R 1.8K J 1/16W		IC715			TC75S51FE(F)	MOS-IC	
R848-850			RK73HB1J000J	CHIP R 0 J 1/16W		IC716			TC75W51FK(F)	MOS-IC	
R851,852			RK73HB1J683J	CHIP R 68K J 1/16W		IC717			XC9235A15CM-G	MOS-IC	
R853			RK73HB1J000J	CHIP R 0 J 1/16W		Q4			SSM3K15TE(F)	FET	
R855			RK73HB1J332J	CHIP R 3.3K J 1/16W		Q5			2SJ347F	FET	
D12 -16			1SS416	DIODE		Q401,402			SSM6N16FE-F	FET	
D17			EMZ6.8N	ZENER DIODE		Q403			2SJ648-A	FET	
D18 ,19			HZC6.8-E	ZENER DIODE		Q404			SSM3K15TE(F)	FET	
D20 ,21			NNCD6.8G-A	ZENER DIODE		Q405			SSM6N16FE-F	FET	
D22 ,23			DA221	DIODE		Q406			2SB1132(Q,R)	TRANSISTOR	
D102			1SS416	DIODE		Q407			UMG3N	TRANSISTOR	
D404,405			1SS388F	DIODE		Q408			EMD12	TRANSISTOR	
D406			HRB0502A	DIODE		Q409			2SA1955A-F	TRANSISTOR	
D407			MA2S111-F	DIODE		Q410			SSM3K15TE(F)	FET	
D408			1SS301F	DIODE		Q411			SSM6N16FE-F	FET	
D409,410			MA2S111-F	DIODE		Q412			SSM3K15TE(F)	FET	
						Q413			2SA1955A-F	TRANSISTOR	

PARTS LIST

CONTROL UNIT (X53-4432-75)

TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
Q414,415			EMD12	TRANSISTOR		C62			CC73HCH1H030B	CHIP C 3.0PF	B
Q702,703			SSM3K15TE(F)	FET		C63			CK73HB1H471K	CHIP C 470PF	K
Q704			KTC4075E(Y,GR)	TRANSISTOR		C64			CC73HCH1H030B	CHIP C 3.0PF	B
Q705			2SC4738(GR)F	TRANSISTOR		C65			CC73HCH1HR75B	CHIP C 0.75PF	B
Q706			2SA1832(GR)F	TRANSISTOR		C66			CC73HCH1H080B	CHIP C 8.0PF	B
Q707			2SJ243-A	FET		C67 -69			CC73HCH1H100B	CHIP C 10PF	B
TH701			ERTJ0EV104H	THERMISTOR		C70			CK73HB1H102K	CHIP C 1000PF	K
						C71			CK73GB1H103K	CHIP C 0.010UF	K
						C72			CK73GB1H102K	CHIP C 1000PF	K
						C74 ,75			CC73HCH1H0R5B	CHIP C 0.5PF	B
						C76			CK73HB1H102K	CHIP C 1000PF	K
						C77			CC73HCH1H220J	CHIP C 22PF	J
						C78			CK73HB1H471K	CHIP C 470PF	K
						C79			CC73HCH1H101J	CHIP C 100PF	J
						C81			CC73HCH1H470J	CHIP C 47PF	J
						C82			CK73FB0J106K	CHIP C 10UF	K
						C83			CK73HB1H471K	CHIP C 470PF	K
						C84			CC73HCH1H050B	CHIP C 5.0PF	B
						C85			CK73HB0J105K	CHIP C 1.0UF	K
						C87			CK73HB1C103K	CHIP C 0.010UF	K
						C88			CC73HCH1H101J	CHIP C 100PF	J
						C90 ,91			CK73HB1A104K	CHIP C 0.10UF	K
						C92			CC73HCH1H020B	CHIP C 2.0PF	B
						C93			CC73HCH1H330J	CHIP C 33PF	J
						C100			CC73HCH1H150J	CHIP C 15PF	J
						C101,102			CK73HB1H102K	CHIP C 1000PF	K
						C104			CC73HCH1H100C	CHIP C 10PF	C
						C106			CK73HB1H102K	CHIP C 1000PF	K
						C109			CK73HB1H471K	CHIP C 470PF	K
						C111			CK73HB1H102K	CHIP C 1000PF	K
						C112			CC73HCH1H560J	CHIP C 56PF	J
						C114,115			CK73HB1H102K	CHIP C 1000PF	K
						C116			CK73HB1A104K	CHIP C 0.10UF	K
						C117			CK73HB1H102K	CHIP C 1000PF	K
						C119			CC73HCH1H180J	CHIP C 18PF	J
						C120			CK73HB1H471K	CHIP C 470PF	K
						C122			CK73HB1H102K	CHIP C 1000PF	K
						C123			CK73HB1A104K	CHIP C 0.10UF	K
						C124			CC73HCH1H560J	CHIP C 56PF	J
						C125			CK73HB1H102K	CHIP C 1000PF	K
						C127			CC73HCH1H100C	CHIP C 10PF	C
						C128			CS77CA1A6R8M	CHIP TNL 6.8UF 10WV	
						C129			CK73HB1A104K	CHIP C 0.10UF	K
						C130			CK73HB1H102K	CHIP C 1000PF	K
						C131			CK73GB1E105K	CHIP C 1.0UF	K
						C132			CK73HB1H102K	CHIP C 1000PF	K
						C133,134			CK73HB1H471K	CHIP C 470PF	K
						C135			CC73GCH1H220G	CHIP C 22PF	G
						C136			CK73GB1H102K	CHIP C 1000PF	K
						C139			CK73HB1H471K	CHIP C 470PF	K
						C140			CC73GCH1H070B	CHIP C 7.0PF	B
						C141			CK73HB1H471K	CHIP C 470PF	K
						C142			CC73GCH1H090B	CHIP C 9.0PF	B
						C143			CC73HCH1H101J	CHIP C 100PF	J
						C144			CC73GCH1H240G	CHIP C 24PF	G
						C145			CK73HB1C103K	CHIP C 0.010UF	K
						C146			CC73GCH1H090B	CHIP C 9.0PF	B
						C148			CK73HB1H102K	CHIP C 1000PF	K
						C149			CC73GCH1H120G	CHIP C 12PF	G
						C150			CK73HB1A104K	CHIP C 0.10UF	K
D402			B30-2278-05	LED(RED/YELLOW)							
C1			CC73HCH1H101J	CHIP C 100PF	J						
C3			CK73HB1C103K	CHIP C 0.010UF	K						
C4			CC73HCH1H101J	CHIP C 100PF	J						
C5			CC73HCH1H100C	CHIP C 10PF	C						
C6			CK73HB1C103K	CHIP C 0.010UF	K						
C7			CK73GB1E105K	CHIP C 1.0UF	K						
C8			CK73HB1H102K	CHIP C 1000PF	K						
C9			CC73HCH1H100C	CHIP C 10PF	C						
C10 ,11			CC73HCH1H101J	CHIP C 100PF	J						
C12			CK73HB1H471K	CHIP C 470PF	K						
C13			CC73HCH1H101J	CHIP C 100PF	J						
C15			CK73HB1H471K	CHIP C 470PF	K						
C16 ,17			CC73HCH1H101J	CHIP C 100PF	J						
C18			CK73HB1C103K	CHIP C 0.010UF	K						
C19			CK73HB1H471K	CHIP C 470PF	K						
C20			CC73HCH1H220G	CHIP C 22PF	G						
C21			CK73HB1H471K	CHIP C 470PF	K						
C22			CC73HCH1H390G	CHIP C 39PF	G						
C24 ,25			CC73HCH1H101J	CHIP C 100PF	J						
C26			CC73HCH1H030B	CHIP C 3.0PF	B						
C27			CK73HB1A104K	CHIP C 0.10UF	K						
C28			CC73HCH1H101J	CHIP C 100PF	J						
C29			CK73HB1A104K	CHIP C 0.10UF	K						
C30			C93-0787-05	CHIP C 0.1UF	J						
C31			CC73HCH1H220G	CHIP C 22PF	G						
C32			CC73HCH1H101J	CHIP C 100PF	J						
C34			CC73HCH1H470G	CHIP C 47PF	G						
C35			CC73HCH1H101J	CHIP C 100PF	J						
C36 ,37			CK73HB1H471K	CHIP C 470PF	K						
C38			CK73HB1H102K	CHIP C 1000PF	K						
C41			CK73HB1H472K	CHIP C 4700PF	K						
C42			CK73HB1H471K	CHIP C 470PF	K						
C43			CS77CA1VR15M	CHIP TNL 0.15UF	35WV						
C44			CS77BA1D100M	CHIP TNL 10UF	20WV						
C45 -47			CK73HB1H471K	CHIP C 470PF	K						
C48			C92-0863-05	CHIP TNL 0.047UF	35WV						
C50 ,51			CC73HCH1H101J	CHIP C 100PF	J						
C52			CK73HB1H471K	CHIP C 470PF	K						
C53			CK73FB0J106K	CHIP C 10UF	K						
C54			CK73HB1H471K	CHIP C 470PF	K						
C55			CK73GB0J475K	CHIP C 4.7UF	K						
C56			CK73HB0J105K	CHIP C 1.0UF	K						
C57			CC73HCH1H270J	CHIP C 27PF	J						
C58			CC73HCH1H470J	CHIP C 47PF	J						
C60			CK73HB1H471K	CHIP C 470PF	K						

NX-200(S)

PARTS LIST

TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C151			CK73GB1C104K	CHIP C 0.10UF K		C250			CC73HCH1H030B	CHIP C 3.0PF B	
C152			CK73GB1E105K	CHIP C 1.0UF K		C251			CC73HCH1H060B	CHIP C 6.0PF B	
C154			CC73GCH1H030B	CHIP C 3.0PF B		C252			CC73HCH1H470G	CHIP C 47PF G	
C155			CK73HB1H471K	CHIP C 470PF K		C254			CC73HCH1H100B	CHIP C 10PF B	
C156			CK73HB1C103K	CHIP C 0.010UF K		C259			CC73HCH1H820J	CHIP C 82PF J	
C158			CC73GCH1H330G	CHIP C 33PF G		C261			CC73HCH1H270J	CHIP C 27PF J	
C159			CK73HB1H471K	CHIP C 470PF K		C262			CK73HB1C103K	CHIP C 0.010UF K	
C160			CK73HB1A104K	CHIP C 0.10UF K		C264			CC73HCH1H270J	CHIP C 27PF J	
C163			CC73GCH1H120G	CHIP C 12PF G		C267			CK73HB1H102K	CHIP C 1000PF K	
C165			CC73GCH1H070B	CHIP C 7.0PF B		C268			CC73HCH1H390J	CHIP C 39PF J	
C166			CC73GCH1H560J	CHIP C 56PF J		C270			CC73HCH1H1R5B	CHIP C 1.5PF B	
C167,168			CC73HCH1H101J	CHIP C 100PF J		C273			CC73HCH1H330J	CHIP C 33PF J	
C169			CK73HB1A104K	CHIP C 0.10UF K		C274			CK73HB1H102K	CHIP C 1000PF K	
C173			CK73HB1H471K	CHIP C 470PF K		C275,276			CK73HB1A104K	CHIP C 0.10UF K	
C177			CC73HCH1H220J	CHIP C 22PF J		C278			CK73HB1H102K	CHIP C 1000PF K	
C178			CC73HCH1H120J	CHIP C 12PF J		C281			CK73HB1C103K	CHIP C 0.010UF K	
C179			CC73HCH1H100B	CHIP C 10PF B		C282			CK73GB1E105K	CHIP C 1.0UF K	
C180			CC73GCH1H120G	CHIP C 12PF G		C283-286			CK73HB1H102K	CHIP C 1000PF K	
C190			CC73GCH1H270G	CHIP C 27PF G		C290			CC73HCH1H150J	CHIP C 15PF J	
C191			CC73GCH1H181J	CHIP C 180PF J		C291			CK73HB1H102K	CHIP C 1000PF K	
C193			CC73GCH1H330G	CHIP C 33PF G		C295			CC73HCH1H100B	CHIP C 10PF B	
C201,202			CK73GB1H104K	CHIP C 0.10UF K		C296			CC73HCH1H020B	CHIP C 2.0PF B	
C203			CC73HCH1H070B	CHIP C 7.0PF B		C297			CC73HCH1H010B	CHIP C 1.0PF B	
C204			CK73HB1C103K	CHIP C 0.010UF K		C298			CC73HCH1H020B	CHIP C 2.0PF B	
C206			CK73HB1C103K	CHIP C 0.010UF K		C299			CC73HCH1H180J	CHIP C 18PF J	
C207			CC73HCH1H100B	CHIP C 10PF B		C301			CC73HCH1H180J	CHIP C 18PF J	
C208			CC73HCH1H680J	CHIP C 68PF J		C304			CC73HCH1H120J	CHIP C 12PF J	
C209			CC73HCH1H101J	CHIP C 100PF J		C306			CC73HCH1H390J	CHIP C 39PF J	
C210			CK73HB1H471K	CHIP C 470PF K		C307			CC73HCH1H180J	CHIP C 18PF J	
C211			CK73HB1C103K	CHIP C 0.010UF K		C310			CC73HCH1H470G	CHIP C 47PF G	
C212			CC73HCH1H680J	CHIP C 68PF J		C311			CK73HB1C103K	CHIP C 0.010UF K	
C213			CK73HB1C103K	CHIP C 0.010UF K		C312			CK73GB1H104K	CHIP C 0.10UF K	
C215			CC73HCH1H050B	CHIP C 5.0PF B		C314			CK73HB1A104K	CHIP C 0.10UF K	
C216			CC73HCH1H220G	CHIP C 22PF G		C316			CK73HB1H102K	CHIP C 1000PF K	
C217			CC73HCH1H470J	CHIP C 47PF J		C317			CC73HCH1H100B	CHIP C 10PF B	
C219			CC73HCH1H060B	CHIP C 6.0PF B		C320			CC73HCH1H010B	CHIP C 1.0PF B	
C220			CK73HB1C103K	CHIP C 0.010UF K		C355,356			CK73HB1A104K	CHIP C 0.10UF K	
C221			CK73HB1A104K	CHIP C 0.10UF K		C362			CC73HCH1H330J	CHIP C 33PF J	
C222,223			CK73HB1C103K	CHIP C 0.010UF K		C386			CC73HCH1H070B	CHIP C 7.0PF B	
C224,225			CK73HB1A104K	CHIP C 0.10UF K		C400			CC73GCH1H220J	CHIP C 22PF J	
C226			CK73HB1H471K	CHIP C 470PF K		C402,403			CK73HB1H471K	CHIP C 470PF K	
C227,228			CK73HB1A104K	CHIP C 0.10UF K		C404-406			CK73GB1E105K	CHIP C 1.0UF K	
C229			CC73HCH1H100B	CHIP C 10PF B		C407			CK73GB1C224K	CHIP C 0.22UF K	
C230			CK73HB1A104K	CHIP C 0.10UF K		C408			CK73GB1E105K	CHIP C 1.0UF K	
C231			CC73HCH1H100B	CHIP C 10PF B		C409			C92-0765-05	CHIP TNL 4.7UF 16WV	
C232			CK73HB1H102K	CHIP C 1000PF K		C410			CK73GB1C224K	CHIP C 0.22UF K	
C233			CK73HB1C103K	CHIP C 0.010UF K		C411			CK73HB1A104K	CHIP C 0.10UF K	
C234			CK73FB1E474K	CHIP C 0.47UF K		C414			CK73GB1C224K	CHIP C 0.22UF K	
C235			CK73HB1H102K	CHIP C 1000PF K		C415			CK73HB1H471K	CHIP C 470PF K	
C236,237			CK73FB1A106K	CHIP C 10UF K		C416			CK73GB1E105K	CHIP C 1.0UF K	
C238			CK73HB1C103K	CHIP C 0.010UF K		C417			CC73HCH1E181J	CHIP C 180PF J	
C239			CK73HB1A104K	CHIP C 0.10UF K		C418			CK73GB1E105K	CHIP C 1.0UF K	
C240			CC73HCH1H040B	CHIP C 4.0PF B		C419			CC73HCH1H220J	CHIP C 22PF J	
C241,242			CK73HB1H102K	CHIP C 1000PF K		C420			CK73HB1H471K	CHIP C 470PF K	
C244			CC73HCH1H120G	CHIP C 12PF G		C421			CK73GB1C224K	CHIP C 0.22UF K	
C245			CK73FB1A475K	CHIP C 4.7UF K		C422			CK73GB1E105K	CHIP C 1.0UF K	
C246			CK73HB1A104K	CHIP C 0.10UF K		C423			CK73GB1C224K	CHIP C 0.22UF K	
C247			CC73HCH1H050B	CHIP C 5.0PF B		C424,425			CK73GB1E105K	CHIP C 1.0UF K	
C248			CC73HCH1H220G	CHIP C 22PF G		C426			CC73HCH1H470J	CHIP C 47PF J	
C249			CK73HB1A104K	CHIP C 0.10UF K		C428-445			CC73HCH1H470J	CHIP C 47PF J	

PARTS LIST

TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
C447			CC73HCH1H470J	CHIP C 47PF J		L206			L41-5685-39	SMALL FIXED INDUCTOR(0.56UH)	
C449-458			CC73HCH1H470J	CHIP C 47PF J		L207			L40-1085-92	SMALL FIXED INDUCTOR(100NH)	
C460			CC73HCH1H470J	CHIP C 47PF J		L208,209			L40-3375-92	SMALL FIXED INDUCTOR(33NH)	
C462,463			CK73HB1H471K	CHIP C 470PF K		L210			L41-6878-14	SMALL FIXED INDUCTOR(68NH)	
C464-468			CK73HB1H102K	CHIP C 1000PF K		L214			L92-0138-05	CHIP FERRITE	
C470			CC73HCH1H470J	CHIP C 47PF J		L215			L41-6878-14	SMALL FIXED INDUCTOR(68NH)	
C472-474			CC73HCH1H470J	CHIP C 47PF J		L220			L41-6878-14	SMALL FIXED INDUCTOR(68NH)	
C475			CK73HB0J105K	CHIP C 1.0UF K		L223			L40-5675-92	SMALL FIXED INDUCTOR(56NH)	
C476			CC73HCH1H470J	CHIP C 47PF J		L224			L41-5678-14	SMALL FIXED INDUCTOR(56NH)	
C478,479			CC73HCH1H470J	CHIP C 47PF J		L226			L92-0138-05	CHIP FERRITE	
C480			CK73GB1E105K	CHIP C 1.0UF K		L230			L40-2702-86	SMALL FIXED INDUCTOR(27UH)	
C499			CC73HCH1H470J	CHIP C 47PF J		L250			L40-1085-57	SMALL FIXED INDUCTOR(100NH)	
CN102			E23-1326-05	TERMINAL		L400			L92-0149-05	CHIP FERRITE	
CN400			E40-6422-15	SOCKET FOR PIN ASSY		L401			L33-1462-05	SMALL FIXED INDUCTOR(68UH)	
CN401			E40-6752-05	FLAT CABLE CONNECTOR		L402			L41-2285-14	SMALL FIXED INDUCTOR(220NH)	
CN736			E40-6358-05	SOCKET FOR PIN ASSY		X1			L77-3014-05	TCXO (19.2MHZ)	
F400			F53-0324-15	FUSE(2.5A)		XF200			L71-0640-05	MCF (58.05MHZ)	
CF200			L72-1017-05	CERAMIC FILTER		R1			RK73HH1J474D	CHIP R 470K D 1/16W	
CF201			L72-1020-05	CERAMIC FILTER		R2			RK73HB1J472J	CHIP R 4.7K J 1/16W	
L1			L41-4795-39	SMALL FIXED INDUCTOR(4.7UH)		R3			RK73HB1J100J	CHIP R 10 J 1/16W	
L2 ,3			L40-5667-92	SMALL FIXED INDUCTOR(5.6NH)		R5 ,6			RK73HB1J100J	CHIP R 10 J 1/16W	
L5			L40-8275-92	SMALL FIXED INDUCTOR(82NH)		R7			RK73HB1J472J	CHIP R 4.7K J 1/16W	
L6 ,7			L40-5667-92	SMALL FIXED INDUCTOR(5.6NH)		R8			RK73HB1J100J	CHIP R 10 J 1/16W	
L8			L40-3975-92	SMALL FIXED INDUCTOR(39NH)		R9			RK73HB1J102J	CHIP R 1.0K J 1/16W	
L10			L92-0163-05	BEADS CORE		R10			RK73HB1J000J	CHIP R 0 J 1/16W	
L11			L40-1891-86	SMALL FIXED INDUCTOR(1.8UH)		R11 ,12			RK73HB1J223J	CHIP R 22K J 1/16W	
L12			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)		R15			RK73HB1J100J	CHIP R 10 J 1/16W	
L15			L92-0446-05	BEADS CORE		R17			RK73HH1J184D	CHIP R 180K D 1/16W	
L16 -20			L40-2285-92	SMALL FIXED INDUCTOR(220NH)		R18			RK73HH1J473D	CHIP R 47K D 1/16W	
L23			L40-5678-67	SMALL FIXED INDUCTOR(56NH)		R19			RK73HB1J102J	CHIP R 1.0K J 1/16W	
L24			L40-2778-67	SMALL FIXED INDUCTOR(27NH)		R21			RK73HB1J106J	CHIP R 10M J 1/16W	
L25			L40-1285-92	SMALL FIXED INDUCTOR(120NH)		R22 ,23			RK73HB1J100J	CHIP R 10 J 1/16W	
L26 ,27			L40-3391-86	SMALL FIXED INDUCTOR(3.3UH)		R24 ,25			RK73HB1J000J	CHIP R 0 J 1/16W	
L29			L40-1085-71	SMALL FIXED INDUCTOR(100NH)		R26			RK73HB1J331J	CHIP R 330 J 1/16W	
L30			L40-6875-92	SMALL FIXED INDUCTOR(68NH)		R27			RK73HB1J000J	CHIP R 0 J 1/16W	
L98 ,99			L92-0163-05	BEADS CORE		R28			RK73HB1J223J	CHIP R 22K J 1/16W	
L100			L40-1085-92	SMALL FIXED INDUCTOR(100NH)		R29			RK73HB1J000J	CHIP R 0 J 1/16W	
L102			L40-6875-92	SMALL FIXED INDUCTOR(68NH)		R30			RK73HB1J563J	CHIP R 56K J 1/16W	
L103			L40-1085-92	SMALL FIXED INDUCTOR(100NH)		R31			RK73HB1J121J	CHIP R 120 J 1/16W	
L104			L92-0138-05	CHIP FERRITE		R32			RK73HB1J000J	CHIP R 0 J 1/16W	
L105			L40-4775-92	SMALL FIXED INDUCTOR(47NH)		R33			RK73HB1J223J	CHIP R 22K J 1/16W	
L106			L41-1085-43	SMALL FIXED INDUCTOR(100NH)		R34			RK73HH1J391D	CHIP R 390 D 1/16W	
L107			L92-0149-05	CHIP FERRITE		R35			RK73HB1J103J	CHIP R 10K J 1/16W	
L108			L40-1575-92	SMALL FIXED INDUCTOR(15NH)		R36			RK73HB1J472J	CHIP R 4.7K J 1/16W	
L109,110			L34-4568-05	AIR-CORE COIL		R37 ,38			RK73HB1J000J	CHIP R 0 J 1/16W	
L111			L34-4576-05	AIR-CORE COIL		R39			RK73HB1J152J	CHIP R 1.5K J 1/16W	
L112			L92-0149-05	CHIP FERRITE		R40			RK73HB1J103J	CHIP R 10K J 1/16W	
L113			L34-4566-05	AIR-CORE COIL		R41			RK73HB1J474J	CHIP R 470K J 1/16W	
L114			L34-4565-05	AIR-CORE COIL		R42			RK73HB1J473J	CHIP R 47K J 1/16W	
L115			L41-2295-39	SMALL FIXED INDUCTOR(2.2UH)		R43			RK73HB1J102J	CHIP R 1.0K J 1/16W	
L117			L34-4577-05	AIR-CORE COIL		R44 ,45			RK73HB1J473J	CHIP R 47K J 1/16W	
L118			L34-4564-05	AIR-CORE COIL		R46			RK73HH1J331D	CHIP R 330 D 1/16W	
L119			L34-4563-05	AIR-CORE COIL		R47			RK73HB1J220J	CHIP R 22 J 1/16W	
L201			L40-5681-86	SMALL FIXED INDUCTOR(0.56UH)		R48			RK73HH1J271D	CHIP R 270 D 1/16W	
L202			L40-1891-86	SMALL FIXED INDUCTOR(1.8UH)		R49			RK73HB1J154J	CHIP R 150K J 1/16W	
L203			L41-4778-45	SMALL FIXED INDUCTOR(47NH)		R50			RK73HB1J101J	CHIP R 100 J 1/16W	
L204			L92-0138-05	CHIP FERRITE		R51			RK73HB1J102J	CHIP R 1.0K J 1/16W	
L205			L41-2785-39	SMALL FIXED INDUCTOR(0.27UH)		R52			RK73HB1J473J	CHIP R 47K J 1/16W	
						R53			RK73HB1J683J	CHIP R 68K J 1/16W	

NX-200(S)

PARTS LIST

TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R54			RK73HB1J102J	CHIP R 1.0K J 1/16W		R168			RK73HB1J124J	CHIP R 120K J 1/16W	
R55			RK73HB1J104J	CHIP R 100K J 1/16W		R170			RK73HB1J224J	CHIP R 220K J 1/16W	
R56			RK73HB1J000J	CHIP R 0 J 1/16W		R171			RK73GB2A000J	CHIP R 0 J 1/10W	
R57			RK73HB1J124J	CHIP R 120K J 1/16W		R176,177			RK73HB1J331J	CHIP R 330 J 1/16W	
R58			RK73HB1J823J	CHIP R 82K J 1/16W		R202,203			RK73HB1J103J	CHIP R 10K J 1/16W	
R59 ,60			RN73HH1J104D	CHIP R 100K D 1/16W		R204			RK73HB1J561J	CHIP R 560 J 1/16W	
R62			RK73HB1J104J	CHIP R 100K J 1/16W		R205			RK73HB1J224J	CHIP R 220K J 1/16W	
R63			RK73HB1J220J	CHIP R 22 J 1/16W		R206			RK73HB1J104J	CHIP R 100K J 1/16W	
R64			RK73HB1J473J	CHIP R 47K J 1/16W		R207			RK73HB1J224J	CHIP R 220K J 1/16W	
R67			RK73HB1J472J	CHIP R 4.7K J 1/16W		R208-210			RK73HB1J104J	CHIP R 100K J 1/16W	
R68			RK73HB1J474J	CHIP R 470K J 1/16W		R211			RK73HB1J334J	CHIP R 330K J 1/16W	
R69			RK73HB1J560J	CHIP R 56 J 1/16W		R212			RK73HB1J221J	CHIP R 220 J 1/16W	
R70 ,71			RK73HB1J000J	CHIP R 0 J 1/16W		R214			RK73HB1J564J	CHIP R 560K J 1/16W	
R72			RK73HB1J104J	CHIP R 100K J 1/16W		R216			RK73HB1J221J	CHIP R 220 J 1/16W	
R74			RK73HB1J153J	CHIP R 15K J 1/16W		R218			RK73HB1J221J	CHIP R 220 J 1/16W	
R75			RK73HB1J100J	CHIP R 10 J 1/16W		R220			RK73HB1J470J	CHIP R 47 J 1/16W	
R76 ,77			RK73HB1J000J	CHIP R 0 J 1/16W		R221			RK73HB1J104J	CHIP R 100K J 1/16W	
R100			RK73HB1J332J	CHIP R 3.3K J 1/16W		R222			RK73HB1J100J	CHIP R 10 J 1/16W	
R101			RK73HB1J103J	CHIP R 10K J 1/16W		R223			RK73HB1J274J	CHIP R 270K J 1/16W	
R102			RK73HB1J271J	CHIP R 270 J 1/16W		R225			RK73HB1J681J	CHIP R 680 J 1/16W	
R103			RK73HB1J222J	CHIP R 2.2K J 1/16W		R226			RK73HB1J103J	CHIP R 10K J 1/16W	
R104			RK73HB1J470J	CHIP R 47 J 1/16W		R227			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R105			RK73HB1J000J	CHIP R 0 J 1/16W		R228			RK73HB1J221J	CHIP R 220 J 1/16W	
R106,107			RK73HB1J472J	CHIP R 4.7K J 1/16W		R229			RK73HB1J103J	CHIP R 10K J 1/16W	
R111			RK73HB1J000J	CHIP R 0 J 1/16W		R230			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R118			RK73HB1J101J	CHIP R 100 J 1/16W		R231			RK73HB1J223J	CHIP R 22K J 1/16W	
R119			RK73HB1J103J	CHIP R 10K J 1/16W		R233			RK73HB1J183J	CHIP R 18K J 1/16W	
R120			RK73HB1J223J	CHIP R 22K J 1/16W		R234,235			RK73HB1J823J	CHIP R 82K J 1/16W	
R123			RK73HB1J331J	CHIP R 330 J 1/16W		R236			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R124			RK73HB1J180J	CHIP R 18 J 1/16W		R237			RK73HB1J472J	CHIP R 4.7K J 1/16W	
R126			RK73HB1J273J	CHIP R 27K J 1/16W		R238			RK73HB1J222J	CHIP R 2.2K J 1/16W	
R127			RK73HB1J473J	CHIP R 47K J 1/16W		R239,240			RK73HB1J823J	CHIP R 82K J 1/16W	
R129			RK73HB1J470J	CHIP R 47 J 1/16W		R241			RK73GB2A000J	CHIP R 0 J 1/10W	
R130			RK73HB1J333J	CHIP R 33K J 1/16W		R242			RK73HB1J473J	CHIP R 47K J 1/16W	
R131			RK73HB1J561J	CHIP R 560 J 1/16W		R243			RK73HB1J183J	CHIP R 18K J 1/16W	
R133			RK73HB1J331J	CHIP R 330 J 1/16W		R245			RK73HB1J104J	CHIP R 100K J 1/16W	
R134			RK73HB1J561J	CHIP R 560 J 1/16W		R246			RK73HB1J101J	CHIP R 100 J 1/16W	
R135			RK73HB1J222J	CHIP R 2.2K J 1/16W		R248			RK73HB1J100J	CHIP R 10 J 1/16W	
R136			RK73EB2ER39K	CHIP R 0.39 K 1/4W		R251			RK73HB1J000J	CHIP R 0 J 1/16W	
R137			RK73HB1J100J	CHIP R 10 J 1/16W		R253			RK73HB1J102J	CHIP R 1.0K J 1/16W	
R138			RK73EB2ER39K	CHIP R 0.39 K 1/4W		R254			RK73HB1J103J	CHIP R 10K J 1/16W	
R139			RK73HB1J473J	CHIP R 47K J 1/16W		R255			RK73HB1J272J	CHIP R 2.7K J 1/16W	
R141			RK73EB2ER39K	CHIP R 0.39 K 1/4W		R256			RK73HB1J103J	CHIP R 10K J 1/16W	
R142			RK73HB1J223J	CHIP R 22K J 1/16W		R257			RK73HB1J000J	CHIP R 0 J 1/16W	
R144,145			RK73HH1J154D	CHIP R 150K D 1/16W		R260			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R146			RK73GB2A000J	CHIP R 0 J 1/10W		R262			RK73HB1J105J	CHIP R 1.0M J 1/16W	
R147-150			RK73HH1J184D	CHIP R 180K D 1/16W		R263			RK73HB1J000J	CHIP R 0 J 1/16W	
R151			RK73HB1J103J	CHIP R 10K J 1/16W		R265			RK73HB1J000J	CHIP R 0 J 1/16W	
R152			RK73EB2ER23J	CHIP R 82K J 1/4W		R268			RK73HB1J680J	CHIP R 68 J 1/16W	
R153			RK73HB1J473J	CHIP R 47K J 1/16W		R269			RK73HB1J221J	CHIP R 220 J 1/16W	
R154			RK73HB1J000J	CHIP R 0 J 1/16W		R272			RK73HB1J154J	CHIP R 150K J 1/16W	
R155			RK73HB1J474J	CHIP R 470K J 1/16W		R273			RK73HB1J823J	CHIP R 82K J 1/16W	
R156			RK73HB1J182J	CHIP R 1.8K J 1/16W		R274			RK73GB2A000J	CHIP R 0 J 1/10W	
R157,158			RK73HB1J104J	CHIP R 100K J 1/16W		R276,277			RK73HB1J104J	CHIP R 100K J 1/16W	
R161			RK73HB1J000J	CHIP R 0 J 1/16W		R279			RK73HB1J000J	CHIP R 0 J 1/16W	
R162,163			RK73HB1J271J	CHIP R 270 J 1/16W		R280			RK73GB2A000J	CHIP R 0 J 1/10W	
R164			RK73HB1J103J	CHIP R 10K J 1/16W		R281			RK73HB1J000J	CHIP R 0 J 1/16W	
R165			RK73HB1J474J	CHIP R 470K J 1/16W		R282			RK73HB1J103J	CHIP R 10K J 1/16W	
R166			RK73HB1J102J	CHIP R 1.0K J 1/16W		R283			RK73HB1J104J	CHIP R 100K J 1/16W	
R167			RK73HB1J183J	CHIP R 18K J 1/16W		R285			RK73HB1J103J	CHIP R 10K J 1/16W	

PARTS LIST

TX-RX UNIT (X57-7820-10)

Ref. No.	Address	New parts	Parts No.	Description	Destination	Ref. No.	Address	New parts	Parts No.	Description	Destination
R289			RK73HB1J000J	CHIP R 0 J 1/16W		D201			HSC277	DIODE	
R293			RK73HB1J473J	CHIP R 47K J 1/16W		D204,205			1SV305F	VARIABLE CAPACITANCE DIODE	
R295			RK73GB2A000J	CHIP R 0 J 1/10W		D207,208			1SV305F	VARIABLE CAPACITANCE DIODE	
R296			RK73HB1J102J	CHIP R 1.0K J 1/16W		D209			HVC131	DIODE	
R299			RK73HB1J470J	CHIP R 47 J 1/16W		D211			HVC131	DIODE	
R300-305			RK73HB1J000J	CHIP R 0 J 1/16W		D213			HVC131	DIODE	
R307			RK73HB1J000J	CHIP R 0 J 1/16W		D400			1SR154-400	DIODE	
R310,311			RK73HB1J000J	CHIP R 0 J 1/16W		D401			HSC119	DIODE	
R313,314			RK73HB1J000J	CHIP R 0 J 1/16W		D403			1SS388F	DIODE	
R319-322			RK73HB1J000J	CHIP R 0 J 1/16W		IC1			LM73CIMKX-0	MOS-IC	
R325			RK73GB2A000J	CHIP R 0 J 1/10W		IC2			LMC7101BIM5	MOS-IC	
R326			RK73HB1J104J	CHIP R 100K J 1/16W		IC3			SKY72310-362	MOS-IC	
R400			RK73HB1J000J	CHIP R 0 J 1/16W		IC4			TC75W51FUF	MOS-IC	
R402			RK73HB1J330J	CHIP R 33 J 1/16W		IC5			TLV2381IDBV	MOS-IC	
R404-406			RK73HB1J474J	CHIP R 470K J 1/16W		IC100			TA75W01FUF	MOS-IC	
R407			RK73HB1J473J	CHIP R 47K J 1/16W		IC200,201			TLV2381IDBV	MOS-IC	
R408			RK73GB2A100J	CHIP R 10 J 1/10W		IC202			TK10931VTL-G	ANALOGUE IC	
R409			RK73GB2A000J	CHIP R 0 J 1/10W		IC203			MCP6021-E/OT	MOS-IC	
R410-412			RK73HB1J474J	CHIP R 470K J 1/16W		IC400			TK11250CUCB	MOS-IC	
R413			RK73HB1J102J	CHIP R 1.0K J 1/16W		IC401			TC75S51FE(F)	MOS-IC	
R415			RK73HB1J102J	CHIP R 1.0K J 1/16W		IC402			XC9101D09AK-G	MOS-IC	
R417			RK73HB1J154J	CHIP R 150K J 1/16W		IC403			TK71733S	BI-POLAR IC	
R418			RK73HB1J102J	CHIP R 1.0K J 1/16W		IC404			TC75W51FUF	MOS-IC	
R419,420			RK73HB1J473J	CHIP R 47K J 1/16W		Q1			EMD9	TRANSISTOR	
R421			RK73HB1J102J	CHIP R 1.0K J 1/16W		Q2			RT1P144U-T111	TRANSISTOR	
R422			RK73HB1J474J	CHIP R 470K J 1/16W		Q3			2SC5383-T111	TRANSISTOR	
R423			RK73HB1J123J	CHIP R 12K J 1/16W		Q4			2SC5636	TRANSISTOR	
R424			RK73HH1J334D	CHIP R 330K D 1/16W		Q6			2SC5383-T111	TRANSISTOR	
R425			RK73HH1J223D	CHIP R 22K D 1/16W		Q7			SSM6L05FU-F	FET	
R426			RK73HB1J100J	CHIP R 10 J 1/16W		Q8			2SK508NV(K52)	FET	
R427			RK73HB1J391J	CHIP R 390 J 1/16W		Q9			2SJ347F	FET	
R428			RK73HB1J821J	CHIP R 820 J 1/16W		Q10			2SK508NV(K52)	FET	
R429,430			RK73GB2A000J	CHIP R 0 J 1/10W		Q11			2SC5636	TRANSISTOR	
R435			RK73HB1J104J	CHIP R 100K J 1/16W		Q12			2SK879-F(Y)	FET	
R436			RK73HB1J102J	CHIP R 1.0K J 1/16W		Q13			SSM3K15TE(F)	FET	
R438			RK73GB2A000J	CHIP R 0 J 1/10W		Q100			2SC5636	TRANSISTOR	
R439			RK73HB1J273J	CHIP R 27K J 1/16W		Q102			2SK3077F	FET	
R450			RK73HB1J000J	CHIP R 0 J 1/16W		Q103			RD01MUS1-T113	FET	
R452			RK73HB1J102J	CHIP R 1.0K J 1/16W		Q104			2SC5383-T111	TRANSISTOR	
R490			RK73HB1J000J	CHIP R 0 J 1/16W		Q105			RT1N441U-T111	TRANSISTOR	
R498,499			RK73HB1J000J	CHIP R 0 J 1/16W		Q106			RD07MVS1BT122	FET	
R500,501			RK73HB1J103J	CHIP R 10K J 1/16W		Q107			2SK1824-A	FET	
S1			S70-0483-05	TACT SWITCH		Q109			SSM3K15TE(F)	FET	
D1			HSC119	DIODE		Q110			EMD5	TRANSISTOR	
D2 ,3			HVC131	DIODE		Q201			2SC5108(Y)F	TRANSISTOR	
D4			DA221	DIODE		Q202			2SC4215-F(Y)	TRANSISTOR	
D5 ,6			HVC131	DIODE		Q203			3SK318	FET	
D7			HSC119	DIODE		Q204			3SK294-FP	FET	
D8			1SV325F	VARIABLE CAPACITANCE DIODE		Q401-403			SSM6L05FU-F	FET	
D9			1SV282-F	VARIABLE CAPACITANCE DIODE		Q404			SSM5H01TU-F	FET	
D12			1SV282-F	VARIABLE CAPACITANCE DIODE		Q405			2SA1955A-F	TRANSISTOR	
D13			HVC376B	VARIABLE CAPACITANCE DIODE		Q406			UMG9N	TRANSISTOR	
D14 -17			1SV282-F	VARIABLE CAPACITANCE DIODE		TH100			ERTJ0EV104H	THERMISTOR	
D18			1SV278F	VARIABLE CAPACITANCE DIODE							
D100			HSC277	DIODE							
D103			HZU2ALL	ZENER DIODE							
D104,105			HVC131	DIODE							
D106			HZU5CLL	ZENER DIODE							