


EXPLODED VIEW/PARTS LIST

Main section

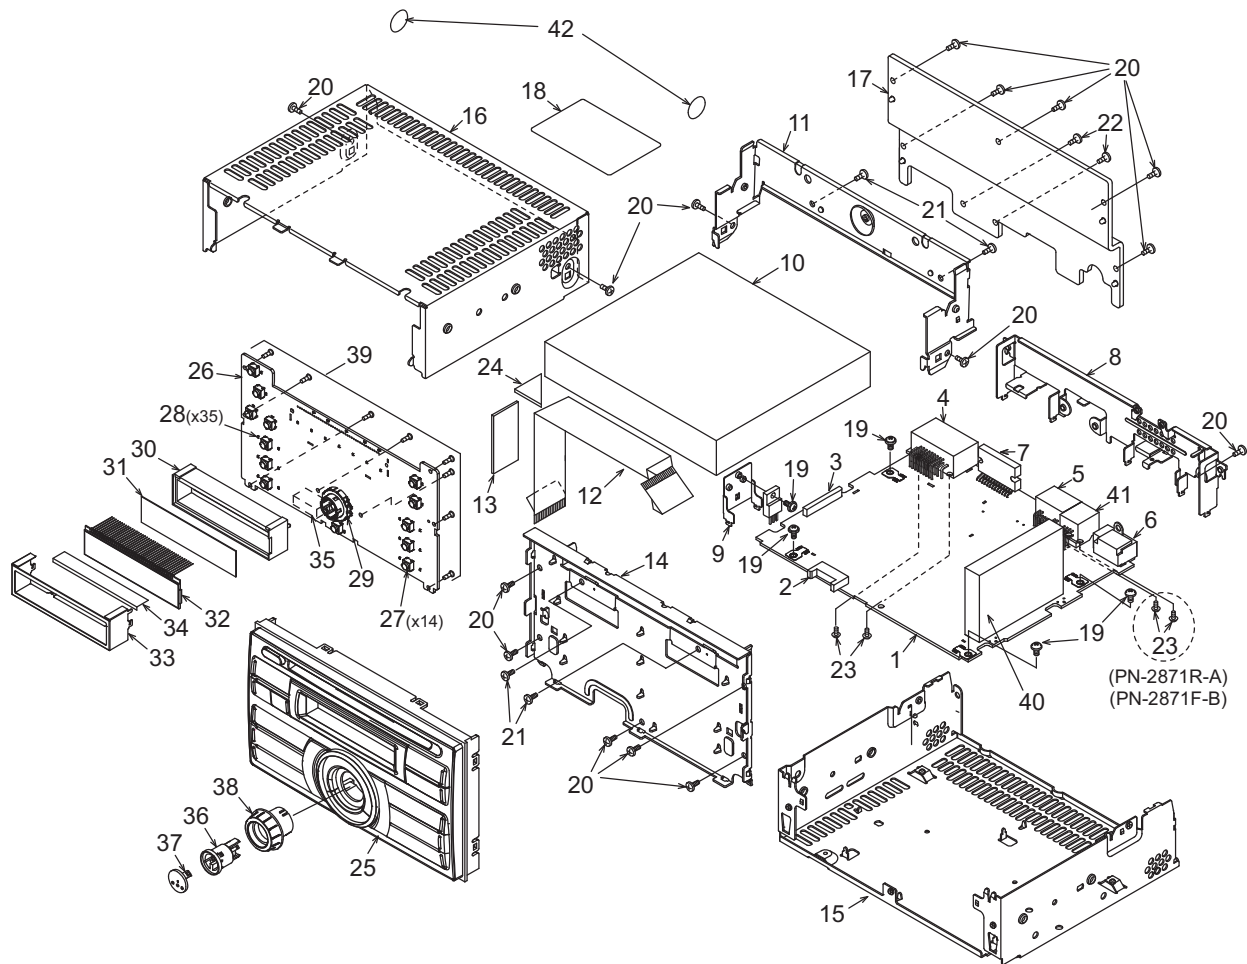

Note) Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	MAIN PWB	1	12	816-4022-50	FLAT WIRE (26P)	1
2	076-3011-64	PLUG (14P)	1	13	347-7400-00	WIRE SUPPORT :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF	1
3	074-2003-76	SOCKET (26P)	1		347-7400-50	WIRE SUPPORT :PN2871LC :PP2871HA,NB,TB,TE	
4	074-4009-20	SOCKET (20P)	1	14	331-4039-00	ES PLATE :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF	1
5	074-1013-00	SOCKET (12P) :PN2871FA,FB :PN2871LA,LB,LC,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF :PP2871TD,TE,TF	1		331-4039-50	ES PLATE :PN2871LC :PP2871HA,NB,TB,TE	
6	092-2210-00	ANT RECEPT	1	15	311-1907-00	LOWER CASE :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF	1
7	051-2040-00	IC (TA82764Q)	1		311-1907-50	LOWER CASE :PN2871LC :PP2871HA,NB,TB,TE	
8	331-4040-00	REAR PLATE :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF	1	16	310-1814-00	UPPER CASE :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF	1
	331-4040-50	REAR PLATE :PN2871LC :PP2871HA,NB,TB,TE			310-1814-50	UPPER CASE :PN2871LC :PP2871HA,NB,TB,TE	
9	331-3835-00	TR HOLDER :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC :PP2871TD,TF	1	17	313-1950-00	HEAT SINK :PN2871FA,FB,LA,LB,LE,LF,LG :PP2871HB,HC,NA,TA,TC,TD,TF	1
	331-3835-50	TR HOLDER :PN2871LC :PP2871HA,NB,TB,TE			313-1950-10	HEAT SINK :PN2871FB,RA	
10	929-5001-81	CD MECH MODULE	1		313-1950-50	HEAT SINK :PN2871LC	
11	331-4038-00	MECH BRKT :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF	1		313-1950-60	HEAT SINK :PP2871TB,TE :PP2871HA,NB	
	331-4038-50	MECH BRKT :PN2871LC :PP2871HA,NB,TB,TE					

PN-2871F, L, R
PP-2871H, N, T

NO.	PART NO.	DESCRIPTION	Q'TY
18	276-0017-01 276-0017-02 276-0017-03 276-0017-04 276-0034-29 276-0133-00 286-6735-06 286-6735-07 286-6735-08 286-6735-09 286-6735-10 286-6735-11 286-6735-12 286-6735-13 286-6735-14 286-6735-15	SETPLATE :PP2871NB SETPLATE :PN2871LC SETPLATE :PP2871TB SETPLATE :PP2871TE SETPLATE :PN2871FA SETPLATE :PP2871HA SETPLATE :PP2871NA SETPLATE :PN2871RA SETPLATE :PN2871LE SETPLATE :PN2871LF SETPLATE :PP2871TA SETPLATE :PN2871FB SETPLATE :PP2871HB SETPLATE :PP2871TC SETPLATE :PP2871TD SETPLATE :PP2871TF	1
19	716-0878-50	IT SCREW (M2.6x5)	5
20	714-2606-8B	MACHINE SCREW (M2.6x6)	15
21	714-2603-8H	MACHINE SCREW (M2.6x3)	4
22	714-2610-8H	MACHINE SCREW (M2.6x10)	2
23	778-3006-00 778-3006-00	TAP SCREW (3x6) :PN2871FA,LA,LB,LC,LE,LF,LG :PP2871HA,HB,HC,NA,NB :PP2871TA,TB,TC,TD,TE,TF TAP SCREW (3x6) :PN2871FB,RA	2 4
24	345-5802-00 345-5802-50	CUSHION :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF CUSHION :PN2871LC :PP2871HA,NB,TB,TE	1
25	940-8154-11 940-8154-21 940-8154-31 940-8154-41 940-8169-21 940-8169-26 940-8169-36 940-8169-41 940-8169-46 940-8169-51 940-8169-56 940-8169-61 940-8201-10 940-8201-15 940-8201-20 940-8201-25	ES-ASSY :PP2871HA ES-ASSY :PP2871NB ES-ASSY :PN2871LC ES-ASSY :PP2871TB/TE ES-ASSY :PP2871NA ES-ASSY :PN2871FA ES-ASSY :PN2871RA ES-ASSY :PN2871LE ES-ASSY :PN2871LF ES-ASSY :PP2871TA,TC,TD,TF ES-ASSY :PN2871FB ES-ASSY :PP2871HB ES-ASSY :PN2871LA ES-ASSY :PN2871LB ES-ASSY :PN2871LG ES-ASSY :PP2871HC	1
26	-----	SWITCH PWB	1
27	013-6201-52	SWITCH	14
28	001-7093-91 001-7093-92	LED (RFY1112H-TR : YEL) :PN2871LA,LB,LC,LE,LF,LG,RA :PP2871HA,NA,NB LED (RFA1112H-13-TR:ORG) :PN2871FA,FB :PP2871HB,HC,TA,TB,TC,TD :PP2871TE,TF	35
29	016-7000-00	ROTARY SWITCH	1
30	335-7532-30 335-7532-50	LCD HOLDER :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF LCD HOLDER :PN2871LC :PP2871HA,NB,TB,TE	1
31	335-7770-00 335-7770-50	COLOR FILTER :PN2871FA,FB,HC,LA,LB,LE,LF,LG :PP2871HB,NA,TA,TC,TD,TF COLOR FILTER :PN2871LC :PP2871HA,NB,TB :PP2871TE	1

NO.	PART NO.	DESCRIPTION	Q'TY
32	379-1374-32 379-1379-32 379-1396-32	INDICATOR :PN-2871F-A,F-B,L-B,L-C :PN-2871L-E,L-F,R-A :PP-2871H,N,T INDICATOR :PN2871LA INDICATOR :PN2871LG	1
33	331-4048-00 331-4048-50	LCD COVER :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF LCD COVER :PN2871LC :PP2871HA,NB,TB :PP2871TE	1
34	345-5877-00 345-5877-50	PROTECTOR :PN2871FA,FB,LA,LB,LE,LF,LG,RA :PP2871HB,HC,NA,TA,TC,TD,TF PROTECTOR :PN2871LC :PP2871HA,NB,TB :PP2871TE	1
35	074-3014-64	JACK	1
36	382-7424-00 382-7424-30 382-7424-50 382-8702-00	BUTTON :PN2871LA,LB :PP2871HC BUTTON :PN2871FA,FB,LE,LF,RA :PP2871HB,NA,TA,TC,TD,TF BUTTON :PN2871LC :PP2871HA,NB,TB,TE BUTTON :PN2871LG	1
37	335-7528-00 335-7528-30 335-7528-50	BUTTON TRIM :PN2871LA,LB,LG :PP2871HC BUTTON TRIM :PN2871FA,FB,LE,LF,RA :PP2871HB,NA,TA,TC,TD,TF BUTTON TRIM :PN2871LC :PP2871HA,NB,TB,TE	1
38	380-5632-00 380-5632-30 380-5632-51 380-5722-00	KNOB :PN2871LA,LB :PP2871HC KNOB :PN2871FA,FB,LE,LF,RA :PP2871HB,NA,TA,TC,TD,TF KNOB :PN2871LC :PP2871HA,NB,TB,TE KNOB :PN2871LG	1
39	716-0778-50	WAVE SCREW(M2x6)	8
40	880-1921C 880-1921O 880-1921T	TUNER PACK :PP2871HA,HB,HC,NA,NB TUNER PACK :PN2871LA,LG TUNER PACK :PN2871FA,FB,LB,LC,LE,LF,RA :PP2871TA,TB,TC,TD,TE,TF	1
41	074-1302-08	OUTLET SOCKET :PN2871FB,RA	1
42	290-0309-00	LABEL :PN2871RA	2

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-2210-00	ANTENNA RECEPT	C169	168-8212-55	820pF K	C333	168-8212-55	820pF K
BL101	880-1921C	AM/FM TUNER (PP2871H,N)	C170	166-1007-50	10pF CH	C334	168-8212-55	820pF K
BL101	880-1921O	AM/FM TUNER (PN2871LA,LG)	C171	166-1007-50	10pF CH	C335	188-1063-38	16V 10uF
BL101	880-1921T	AM/FM TUNER (PN2871F,LB,LC,LE,LF,R) (PP2871T)	C172	166-1007-50	10pF CH	C336	188-1063-38	16V 10uF
C104	168-2222-55	2200pF K (PN2871F,L,R) (PP2871T)	C201	166-1007-50	10pF CH	C337	168-1832-55	0.018uF K
C108	166-1511-50	150pF CH (PN2871F,L,R) (PP2871T)	C202	168-4732-78	0.047uF K	C338	178-1052-78	1uF (PN2871F,L,R) (PP2871HB,HC,NA,T)
C108	119-0000-05	1/10W 0 ohm JW (PP2871H,N)	C203	168-1022-55	1000pF K	C339	178-1052-78	1uF (PN2871F,L,R) (PP2871HB,HC,NA,T)
C113	168-1032-55	0.01uF K	C204	163-3363-45	25V 33uF	C340	178-1052-78	1uF (PN2871F,L,R) (PP2871HB,HC,NA,T)
C121	166-1201-50	12pF CH	C205	168-1022-55	1000pF K	C341	178-1052-78	1uF (PN2871F,L,R) (PP2871HB,HC,NA,T)
C122	166-1007-50	10pF CH	C206	166-1011-50	100pF CH	C401	188-4763-38	16V 47uF
C123	168-1042-78	16V 0.1uF	C207	166-1011-50	100pF CH	C403	042-0416-59	10V 33uF M TAN
C126	188-1073-28	10V 100uF	C208	166-1011-50	100pF CH	C404	168-1032-55	0.01uF K
C127	166-2201-50	22pF CH	C209	166-1011-50	100pF CH	C405	168-1042-78	16V 0.1uF
C128	043-0277-51	0.022uF	C212	166-2201-50	22pF CH	C406	168-2232-55	0.022uF K
C129	168-1042-78	16V 0.1uF	C213	168-1042-78	16V 0.1uF	C407	168-1042-78	16V 0.1uF
C130	188-1073-28	10V 100uF	C214	168-1042-78	16V 0.1uF (PN2871FB,RA)	C408	042-1452-82	16V 100uF
C131	168-1022-55	1000pF K	C302	178-1052-78	1uF (PN2871FB,RA)	C410	168-1052-78	1uF
C132	166-2201-50	22pF CH	C303	168-1022-55	1000pF K (PN2871F,L,R) (PP2871HB,HC,NA,T)	C411	168-4722-55	4700pF K (PN2871F,L,R) (PP2871T)
C133	168-1042-78	16V 0.1uF	C304	168-1022-55	1000pF K (PN2871F,L,R) (PP2871HB,HC,NA,T)	C412	188-1063-38	16V 10uF (PN2871F,L,R) (PP2871T)
C134	042-1458-93	50V 2.2uF	C305	168-1022-55	1000pF K (PN2871F,L,R) (PP2871HB,HC,NA,T)	C413	168-3932-78	0.039uF K
C135	168-8212-55	820pF K (PN2871F,L,R) (PP2871T)	C306	168-2232-55	0.022uF K (PN2871F,L,R) (PP2871HB,HC,NA,T)	C414	168-3932-78	0.039uF K
C135	168-6812-55	680pF K (PP2871H,N)	C307	166-1011-50	100pF CH (PN2871FB,RA)	C415	168-3932-78	0.039uF K
C136	166-2201-50	22pF CH	C308	166-1011-50	100pF CH (PN2871FB,RA)	C416	168-3932-78	0.039uF K
C137	168-4712-55	470pF K	C309	189-2273-29	10V 220uF (PN2871FB,RA)	C417	188-1063-68	50V 10uF
C138	187-4763-37	16V 47uF	C310	188-1063-38	16V 10uF (PN2871FB,RA)	C418	166-1011-50	100pF CH (PN2871F,L,R) (PP2871T)
C139	166-1011-50	100pF CH	C311	168-6822-55	6800pF K (PN2871FB,RA)	C419	188-1063-38	16V 10uF
C141	166-1011-50	100pF CH	C312	188-4763-38	16V 47uF (PN2871FB,RA)	C420	168-1052-78	1uF
C142	168-1042-78	16V 0.1uF	C313	168-1052-78	1uF	C421	188-1063-38	16V 10uF
C143	188-1073-28	10V 100uF	C314	178-1242-78	0.12uF	C422	172-1041-15	0.1uF
C144	168-1052-78	1uF	C315	178-1242-78	0.12uF	C423	042-1447-00	16V 2200uF
C147	168-1022-55	1000pF K	C316	178-3332-78	0.033uF (PN2871FB,RA)	C425	168-6822-55	6800pF K
C148	178-1042-78	0.1uF	C317	178-1242-78	0.12uF	C426	168-6822-55	6800pF K
C150	188-3363-28	10V 33uF	C318	178-1242-78	0.12uF	C427	168-6822-55	6800pF K
C151	168-2732-55	16V 0.027uF K (PN2871F,LB,LC,LE,LF,R) (PP2871H,N,T)	C319	168-1052-78	1uF	C428	168-6822-55	6800pF K
C151	168-3932-78	0.039uF K (PN2871LA,LG)	C320	188-2263-18	6.3V 22uF	C429	168-1042-78	16V 0.1uF
C152	168-1042-78	16V 0.1uF	C321	178-4742-78	0.47uF	C430	168-6822-55	6800pF K
C153	168-2732-55	16V 0.027uF K (PN2871F,LB,LC,LE,LF,R) (PP2871H,N,T)	C322	168-1222-55	1200pF K	C431	168-6822-55	6800pF K
C153	168-3932-78	0.039uF K (PN2871LA,LG)	C323	168-1222-55	1200pF K	C432	168-6822-55	6800pF K
C154	188-3353-68	50V 3.3uF	C324	178-4742-78	0.47uF	C433	168-6822-55	6800pF K
C155	168-2245-79	0.22uF Z	C325	168-1052-78	1uF	C435	168-1042-78	16V 0.1uF (PN2871LA,LG)
C156	168-3332-78	0.033uF K	C326	168-1052-78	1uF	C436	168-1042-78	16V 0.1uF
C157	168-1032-55	0.01uF K	C327	178-1842-78	0.18uF	C437	188-1063-38	16V 10uF
C158	168-6832-78	0.068uF K	C328	178-1842-78	0.18uF	C438	168-1042-78	16V 0.1uF (PN2871LA,LG)
C159	168-2222-55	2200pF K	C329	178-1842-78	0.18uF	C439	168-1042-78	16V 0.1uF (PN2871LA,LG)
C160	168-3332-78	0.033uF K	C330	178-1842-78	0.18uF	C440	188-1053-68	50V 1uF
C161	168-4722-55	4700pF K	C331	168-8212-55	820pF K	C442	168-1022-55	1000pF K
C162	168-3332-78	0.033uF K	C332	168-8212-55	820pF K	C443	168-1022-55	1000pF K
C163	178-2255-79	2.2uF				C445	168-1042-78	16V 0.1uF
C164	168-3332-78	0.033uF K				C446	172-1041-15	0.1uF
C165	178-2255-79	2.2uF				CCT201	050-0145-52	1/16W 1k ohm x4
C166	168-5632-78	16V 0.056uF				CCT202	050-0145-52	1/16W 1k ohm x4
C167	168-2232-55	0.022uF K				CCT203	050-0145-52	1/16W 1k ohm x4
C168	168-1022-55	1000pF K				CCT204	050-0145-52	1/16W 1k ohm x4
						CCT205	050-0145-52	1/16W 1k ohm x4

PN-2871F, L, R
PP-2871H, N, T

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
CCT206	050-0145-52	1/16W 1k ohm x4	Q302	125-0020-91	UN5111	R215	119-4731-15	1/10W 47k ohm
CCT207	050-0145-52	1/16W 1k ohm x4			(PN2871F,L,R)	R217	119-1031-15	1/10W 10k ohm
CCT208	050-0145-52	1/16W 1k ohm x4			(PP2871HB,HC,NA,T)	R218	119-1031-15	1/10W 10k ohm
CCT209	050-0145-52	1/16W 1k ohm x4	Q303	192-4116-00	2SC4116	R219	119-4731-15	1/10W 47k ohm
CCT211	050-0145-52	1/16W 1k ohm x4			(PN2871F,L,R)	R220	119-2231-15	1/10W 22k ohm
CCT212	050-0145-52	1/16W 1k ohm x4			(PP2871HB,HC,NA,T)	R221	119-1031-15	1/10W 10k ohm
D101	001-0466-90	S5688B	Q304	192-4116-00	2SC4116			(PN2871LB,PP2871HB,HC)
		(PN2871F,L,R)			(PN2871F,L,R)	R222	119-1031-15	1/10W 10k ohm
		(PP2871T)			(PP2871HB,HC,NA,T)			(PN2871F,LA,LC,LE,LF,LG,R)
D301	001-0516-90	MA111	Q305	192-4116-00	2SC4116			(PP2871H,N,T)
		(PN2871F,L,R)			(PN2871F,L,R)	R223	119-1041-15	1/10W 100k ohm
		(PP2871HB,HC,NA,T)			(PP2871HB,HC,NA,T)	R224	119-1031-15	1/10W 10k ohm
D302	001-0516-90	MA111	Q401	193-2118-00	2SD2118F5 Q,R,S			(PN2871LA,LB,LG)
		(PN2871F,L,R)	Q402	191-1197-50	2SB1197K Q,R			(PP2871HB,HC)
		(PP2871HB,HC,NA,T)	Q403	125-2026-91	UN5211	R225	119-1031-15	1/10W 10k ohm
D303	001-4305-39	UDZSTE-17 36B	Q404	125-0020-91	UN5111			(PN2871F,LC,LE,LF,R)
		(PN2871F,L,R)	Q405	125-2026-91	UN5211			(PP2871HA,N,T)
		(PP2871HB,HC,NA,T)	Q406	191-1240-00	2SB1240	R226	119-4731-15	1/10W 47k ohm
D401	001-0529-48	MA8091-H			(PN2871F,L,R)	R228	119-1031-15	1/10W 10k ohm
D402	001-0516-90	MA111			(PP2871T)	R229	119-1021-15	1/10W 1k ohm
D403	001-0466-90	S5688B	Q407	125-2026-95	UN521N	R231	119-1031-15	1/10W 10k ohm
D404	001-0516-90	MA111			(PN2871F,L,R)	R232	119-6821-15	1/10W 6.8k ohm
		(PN2871F,L,R)			(PP2871T)			(PN2871FB,RA)
		(PP2871T)	Q408	193-1858-00	2SD1858	R233	119-1031-15	1/10W 10k ohm
D405	001-0504-31	HZS6 A2L	Q409	125-9003-92	IMD3	R234	119-1031-15	1/10W 10k ohm
D406	001-0504-45	HZS9 B1L	Q410	103-2012-00	2SD2012			(PN2871FB,RA)
D407	001-2015-00	RL253	Q411	125-2026-91	UN5211	R236	119-1041-15	1/10W 100k ohm
D408	001-0529-48	MA8091-H	Q412	193-2118-00	2SD2118F5 Q,R,S	R237	119-4731-15	1/10W 47k ohm
D409	001-0529-34	MA8062-L	Q414	193-1306-00	2SD1306	R238	119-4731-15	1/10W 47k ohm
D410	001-0466-90	S5688B			(PN2871LA,LG)	R240	119-2231-15	1/10W 22k ohm
D411	001-4301-68	HZU18B1	Q415	192-2712-00	2SC2712	R241	119-0000-05	1/10W 0 ohm JW
		(PN2871FB,RA)	Q416	192-2712-00	2SC2712	R242	119-3341-15	1/10W 330k ohm
D412	001-4301-68	HZU18B1			(PN2871LA,LG)	R301	119-4731-15	1/10W 47k ohm
		(PN2871FB,RA)	R106	119-0000-05	1/10W 0 ohm JW			(PN2871F,L,R)
IC103	051-4618-90	HA12181FP-EL-E	R120	119-4741-15	1/10W 470k ohm			(PP2871HB,HC,NA,T)
IC201	052-1187-00	LC723663-9D34-E	R121	119-2221-15	1/10W 2.2k ohm	R302	119-4731-15	1/10W 47k ohm
		(PN2871FA,L,R)	R122	119-2221-15	1/10W 2.2k ohm			(PN2871F,L,R)
		(PP2871H,N,TA,TB,TC)	R123	119-2721-15	1/10W 2.7k ohm			(PP2871HB,HC,NA,T)
IC201	052-1187-20	LC723663-9D49-E	R124	119-1021-15	1/10W 1k ohm	R303	119-2231-15	1/10W 22k ohm
		(PN2871FB)	R125	119-8201-15	1/10W 82 ohm			(PN2871F,L,R)
		(PP2871TD,TE,TF)	R126	119-1021-15	1/10W 1k ohm			(PP2871HB,HC,NA,T)
IC301	051-3034-90	NJM4558V	R127	119-1021-15	1/10W 1k ohm	R304	119-4731-15	1/10W 47k ohm
		(PN2871FB,RA)	R130	119-0000-05	1/10W 0 ohm JW			(PP2871HA,NB)
IC302	051-5029-00	LC75412EH	R132	119-1001-15	1/10W 10 ohm	R305	119-1031-15	1/10W 10k ohm
IC401	051-3341-90	BD3931FP	R133	119-1001-15	1/10W 10 ohm			(PN2871F,L,R)
IC402	051-2040-00	TA8276H	R134	119-1501-15	1/10W 15 ohm			(PP2871HB,HC,NA,T)
J201	074-2003-76	SOCKET(26P)	R135	119-1041-15	1/10W 100k ohm	R306	119-3011-15	1/10W 300 ohm
J202	076-3011-64	14P	R136	119-4731-15	1/10W 47k ohm			(PN2871FB,RA)
J301	074-1302-08	TH8P-SOCKET	R137	119-2731-15	1/10W 27k ohm	R307	119-5631-15	1/10W 56k ohm
		(PN2871FB,RA)	R138	119-1231-15	1/10W 12k ohm			(PN2871F,L,R)
J302	074-1013-00	12P	R139	119-1021-15	1/10W 1k ohm			(PP2871HB,HC,NA,T)
		(PN2871F,L,R)	R140	119-1021-15	1/10W 1k ohm	R308	119-1031-15	1/10W 10k ohm
		(PP2871HB,HC,NA,T)	R141	119-1841-15	1/10W 180k ohm			(PN2871F,L,R)
J401	074-4009-20	SOCKET(20P)	R142	119-2221-15	1/10W 2.2k ohm			(PP2871HB,HC,NA,T)
JW401	060-0054-03	JW 10mm	R143	119-1031-15	1/10W 10k ohm	R309	119-1031-15	1/10W 10k ohm
JW402	060-0054-03	JW 10mm	R144	119-5621-15	1/10W 5.6k ohm			(PN2871F,L,R)
JW403	060-0054-03	JW 10mm	R146	119-1031-15	1/10W 10k ohm			(PP2871HB,HC,NA,T)
L104	010-2003-04	30uH	R147	119-2221-15	1/10W 2.2k ohm	R310	119-5631-15	1/10W 56k ohm
L105	010-3407-75	120uH J	R148	119-1021-15	1/10W 1k ohm			(PN2871F,L,R)
L201	010-6009-64	2.2uH J	R149	119-6821-15	1/10W 6.8k ohm			(PP2871HB,HC,NA,T)
L401	009-0670-81	180uH	R201	119-1021-15	1/10W 1k ohm	R311	119-5631-15	1/10W 56k ohm
Q105	192-4116-51	2SC4116 G,L	R202	119-1021-15	1/10W 1k ohm			(PN2871F,L,R)
Q106	192-4116-51	2SC4116 G,L	R203	119-1031-15	1/10W 10k ohm			(PP2871HB,HC,NA,T)
Q108	190-1162-00	2SA1162	R204	119-0000-05	1/10W 0 ohm JW	R312	032-0140-99	1/10W 39k ohm F
Q109	190-1162-00	2SA1162	R205	119-4731-15	1/10W 47k ohm			(PN2871FB,RA)
Q202	125-2026-91	UN5211	R206	119-1031-15	1/10W 10k ohm	R313	032-0140-99	1/10W 39k ohm F
		(PN2871FB,RA)	R207	119-4731-15	1/10W 47k ohm			(PN2871FB,RA)
Q203	125-0020-96	UN5110-Q,R,S	R208	119-3311-15	1/10W 330 ohm	R314	119-5621-15	1/10W 5.6k ohm
		(PN2871FB,RA)	R209	119-3311-15	1/10W 330 ohm			(PN2871F,L,R)
Q205	125-0002-92	RN2402	R210	119-4731-15	1/10W 47k ohm			(PP2871HB,HC,NA,T)
Q301	125-2026-91	UN5211	R211	119-1031-15	1/10W 10k ohm	R315	119-5621-15	1/10W 5.6k ohm
		(PN2871F,L,R)	R212	119-1031-15	1/10W 10k ohm			(PN2871F,L,R)
		(PP2871HB,HC,NA,T)	R213	119-1031-15	1/10W 10k ohm			(PP2871HB,HC,NA,T)
			R214	119-4731-15	1/10W 47k ohm			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R316	119-3011-15	1/10W 300 ohm (PN2871F,L,R) (PP2871HB,HC,NA,T)	R405	119-1231-15	1/10W 12k ohm	R432	119-5611-15	1/10W 560 ohm
R317	119-3011-15	1/10W 300 ohm (PN2871F,L,R) (PP2871HB,HC,NA,T)	R406	119-4721-15	1/10W 4.7k ohm	R433	116-4791-15	1/4W 4.7 ohm
R318	032-0140-04	1/10W 8.2k ohm F (PN2871FB,RA)	R407	119-1021-15	1/10W 1k ohm	R434	116-4791-15	1/4W 4.7 ohm
R319	032-0140-04	1/10W 8.2k ohm F (PN2871FB,RA)	R408	119-2221-15	1/10W 2.2k ohm	R435	119-0000-05	1/10W 0 ohm JW (PN2871F,LB,LC,LE,LF,RA) (PP2871H,N,T)
R320	119-1531-15	1/10W 15k ohm (PN2871FB,RA)	R409	119-2221-15	1/10W 2.2k ohm	R435	168-4742-78	0.47uF (PN2871LA,LG)
R321	119-4731-15	1/10W 47k ohm (PN2871FB,RA)	R410	119-2221-15	1/10W 2.2k ohm (PN2871F,L,R) (PP2871HB,HC,N,T)	R436	116-1531-15	1/4W 15k ohm
R322	119-4731-15	1/10W 47k ohm (PN2871FB,RA)	R411	119-1531-15	1/10W 15k ohm (PP2871HA)	R437	119-0000-05	1/10W 0 ohm JW (PN2871LA,LG)
R323	119-0000-05	1/10W 0 ohm JW	R411	119-2221-15	1/10W 2.2k ohm (PN2871F,L,R) (PP2871HB,HC,N,T)	R438	119-0000-05	1/10W 0 ohm JW (PN2871F,LB,LC,LE,LF,R) (PP2871H,N,T)
R324	032-0106-77	1/10W 51k ohm D (PN2871F,L,R) (PP2871HB,HC,NA,T)	R412	116-1091-15	1/4W 1 ohm (PN2871F,L,R) (PP2871T)	R439	119-1041-15	1/10W 100k ohm
R325	032-0106-77	1/10W 51k ohm D (PN2871F,L,R) (PP2871HB,HC,NA,T)	R413	116-1221-15	1/4W 1.2k ohm (PN2871F,L,R) (PP2871T)	R440	119-1041-15	1/10W 100k ohm
R326	119-0000-05	1/10W 0 ohm JW	R414	119-1031-15	1/10W 10k ohm (PN2871F,L,R) (PP2871T)	R441	119-1831-15	1/4W 18k ohm (PP2871HA)
R327	119-0000-05	1/10W 0 ohm JW	R415	119-0000-05	1/10W 0 ohm JW (PN2871F,L,R) (PP2871T)	R442	119-1831-15	1/4W 18k ohm (PP2871HA)
R328	119-0000-05	1/10W 0 ohm JW	R417	116-2211-15	1/4W 220 ohm	R443	119-0000-05	1/10W 0 ohm JW (PN2871F,LB,LC,LE,LF,RA) (PP2871H,N,T)
R329	119-0000-05	1/10W 0 ohm JW	R418	119-1041-15	1/10W 100k ohm	R444	119-0000-05	1/10W 0 ohm JW (PN2871L) (PP2871HA,N)
R330	032-0106-77	1/10W 51k ohm D (PN2871F,L,R) (PP2871HB,HC,NA,T)	R419	119-4721-15	1/10W 4.7k ohm	R445	119-0000-05	1/10W 0 ohm JW (PN2871FB,LA,LB,LC,LG,RA) (PP2871H)
R331	032-0106-77	1/10W 51k ohm D (PN2871F,L,R) (PP2871HB,HC,NA,T)	R420	116-3911-15	1/4W 390 ohm	R446	119-0000-05	1/10W 0 ohm JW (PN2871FA,LA,LE,LF,LG) (PP2871HA,T)
R332	119-0000-05	1/10W 0 ohm JW	R421	116-3911-15	1/4W 390 ohm	SUP102	060-0122-90	DSP-201M-S00B
R333	119-3931-15	1/10W 39k ohm	R422	119-1041-15	1/10W 100k ohm	TC201	004-1580-60	30pF
R334	119-1821-15	1/10W 1.8k ohm	R423	116-6811-15	1/4W 680 ohm	TH401	002-0229-90	PTH8L05B (PN2871F,L,R) (PP2871T)
R335	119-1821-15	1/10W 1.8k ohm	R425	119-0000-05	1/10W 0 ohm JW (PN2871FB,RA)	TM101	073-0768-90	TERMINAL
R336	119-3931-15	1/10W 39k ohm	R426	116-2721-15	1/4W 2.7k ohm	TM102	073-0768-90	TERMINAL
R337	119-4721-15	1/10W 4.7k ohm	R427	119-0000-05	1/10W 0 ohm JW (PN2871FB,RA)	TM401	073-0768-90	TERMINAL
R338	119-4721-15	1/10W 4.7k ohm	R428	119-5611-15	1/10W 560 ohm (PN2871LA,LG)	TM402	073-0768-90	TERMINAL
R339	119-4721-15	1/10W 4.7k ohm	R429	119-1031-15	1/10W 10k ohm	VR102	012-4318-56	VR 10k ohm
R340	119-4721-15	1/10W 4.7k ohm	R430	116-1831-15	1/4W 18k ohm (PN2871LA,LG)	X201	061-1053-00	4.5MHz
R401	116-4711-15	1/4W 470 ohm	R431	119-4721-15	1/10W 4.7k ohm (PN2871LA,LG)	PWB	039-2953-00	PWB(WITHOUT COMPONENTS)
R402	116-1821-15	1/4W 1.8k ohm						
R403	119-2231-15	1/10W 22k ohm						
R404	119-4741-15	1/10W 470k ohm						


Switch PWB(B2) section

(Note) Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C701	042-0416-59	10V 33uF M TAN	D723	001-7093-91	RFY1112H-16-TR YEL	D733	001-7093-91	RFY1112H-16-TR YEL
C703	168-1042-78	16V 0.1uF			(PN2871L,R)			(PN2871L,R)
C704	168-1042-78	16V 0.1uF			(PP2871HA,N)			(PP2871HA,N)
C705	168-1042-78	16V 0.1uF	D723	001-7093-92	RFA1112H ORG (PN2871F)	D733	001-7093-92	RFA1112H ORG (PN2871F)
C706	168-6812-55	680pF K			(PP2871HB,HC,T)			(PP2871HB,HC,T)
C707	168-1022-55	1000pF K	D724	001-7093-91	RFY1112H-16-TR YEL	D734	001-7093-91	RFY1112H-16-TR YEL
C708	168-1032-55	0.01uF K			(PN2871L,R)			(PN2871L,R)
		(PN2871F,LB,LC,LE,LF,R)			(PP2871HA,N)			(PP2871HA,N)
C708	168-1052-78	1uF (PN2871LA,LG)	D724	001-7093-92	RFA1112H ORG (PN2871F)	D734	001-7093-92	RFA1112H ORG (PN2871F)
C709	168-1042-78	16V 0.1uF			(PP2871HB,HC,T)			(PP2871HB,HC,T)
CCT701	050-0145-52	1/16W 1k ohm x4	D725	001-7093-91	RFY1112H-16-TR YEL	D735	001-7093-91	RFY1112H-16-TR YEL
CCT702	050-0145-52	1/16W 1k ohm x4			(PN2871L,R)			(PN2871L,R)
CCT703	050-0145-52	1/16W 1k ohm x4			(PP2871HA,N)			(PP2871HA,N)
D702	001-0516-90	MA111	D725	001-7093-92	RFA1112H ORG (PN2871F)	D735	001-7093-92	RFA1112H ORG (PN2871F)
D704	001-0516-90	MA111			(PP2871HB,HC,T)			(PP2871HB,HC,T)
D706	001-0516-90	MA111	D726	001-7093-91	RFY1112H-16-TR YEL	D736	001-7093-91	RFY1112H-16-TR YEL
D707	001-0516-90	MA111			(PN2871L,R)			(PN2871L,R)
D708	001-0516-90	MA111			(PP2871HA,N)			(PP2871HA,N)
D709	001-0516-90	MA111	D726	001-7093-92	RFA1112H ORG (PN2871F)	D736	001-7093-92	RFA1112H ORG (PN2871F)
D710	001-0516-90	MA111			(PP2871HB,HC,T)			(PP2871HB,HC,T)
D715	001-7093-91	RFY1112H-16-TR YEL	D727	001-7093-91	RFY1112H-16-TR YEL	D737	001-7093-91	RFY1112H-16-TR YEL
		(PN2871L,R)			(PN2871L,R)			(PN2871L,R)
		(PP2871HA,N)	D727	001-7093-92	RFA1112H ORG (PN2871F)	D737	001-7093-92	RFA1112H ORG (PN2871F)
D715	001-7093-92	RFA1112H ORG (PN2871F)			(PP2871HB,HC,T)			(PP2871HB,HC,T)
D716	001-7093-91	RFY1112H-16-TR YEL	D727	001-7093-92	RFA1112H ORG (PN2871F)	D737	001-7093-92	RFA1112H ORG (PN2871F)
		(PN2871L,R)			(PP2871HB,HC,T)			(PP2871HB,HC,T)
		(PP2871HA,N)	D728	001-7093-91	RFY1112H-16-TR YEL	D738	001-7093-91	RFY1112H-16-TR YEL
D716	001-7093-92	RFA1112H ORG (PN2871F)			(PN2871L,R)			(PN2871L,R)
		(PP2871HB,HC,T)			(PP2871HA,N)			(PP2871HA,N)
D717	001-7093-91	RFY1112H-16-TR YEL	D728	001-7093-92	RFA1112H ORG (PN2871F)	D738	001-7093-92	RFA1112H ORG (PN2871F)
		(PN2871L,R)			(PP2871HB,HC,T)			(PP2871HB,HC,T)
		(PP2871HA,N)	D729	001-7093-91	RFY1112H-16-TR YEL	D739	001-7093-91	RFY1112H-16-TR YEL
D717	001-7093-92	RFA1112H ORG (PN2871F)			(PN2871L,R)			(PN2871L,R)
		(PP2871HB,HC,T)			(PP2871HA,N)			(PP2871HA,N)
D718	001-7093-91	RFY1112H-16-TR YEL	D729	001-7093-92	RFA1112H ORG (PN2871F)	D739	001-7093-92	RFA1112H ORG (PN2871F)
		(PN2871L,R)			(PP2871HB,HC,T)			(PP2871HB,HC,T)
		(PP2871HA,N)	D730	001-7093-91	RFY1112H-16-TR YEL	D740	001-7093-91	RFY1112H-16-TR YEL
D718	001-7093-92	RFA1112H ORG (PN2871F)			(PN2871L,R)			(PN2871L,R)
		(PP2871HB,HC,T)			(PP2871HA,N)			(PP2871HA,N)
D720	001-7093-91	RFY1112H-16-TR YEL	D730	001-7093-92	RFA1112H ORG (PN2871F)	D740	001-7093-92	RFA1112H ORG (PN2871F)
		(PN2871L,R)			(PP2871HB,HC,T)			(PP2871HB,HC,T)
		(PP2871HA,N)	D731	001-7093-91	RFY1112H-16-TR YEL	D741	001-7093-91	RFY1112H-16-TR YEL
D720	001-7093-92	RFA1112H ORG (PN2871F)			(PN2871L,R)			(PN2871L,R)
		(PP2871HB,HC,T)			(PP2871HA,N)			(PP2871HA,N)
D721	001-7093-91	RFY1112H-16-TR YEL	D731	001-7093-92	RFA1112H ORG (PN2871F)	D741	001-7093-92	RFA1112H ORG (PN2871F)
		(PN2871L,R)			(PP2871HB,HC,T)			(PP2871HB,HC,T)
		(PP2871HA,N)	D732	001-7093-91	RFY1112H-16-TR YEL	D742	001-7093-91	RFY1112H-16-TR YEL
D721	001-7093-92	RFA1112H ORG (PN2871F)			(PN2871L,R)			(PN2871L,R)
		(PP2871HB,HC,T)			(PP2871HA,N)			(PP2871HA,N)
D722	001-7093-91	RFY1112H-16-TR YEL	D732	001-7093-92	RFA1112H ORG (PN2871F)	D742	001-7093-92	RFA1112H ORG (PN2871F)
		(PN2871L,R)			(PP2871HB,HC,T)			(PP2871HB,HC,T)
		(PP2871HA,N)						
D722	001-7093-92	RFA1112H ORG (PN2871F)						
		(PP2871HB,HC,T)						

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D743	001-7093-91	RFY1112H-16-TR YEL (PN2871L,R) (PP2871HA,N)	R701	119-1021-15	1/10W 1k ohm	R721	116-3021-15	1/4W 3k ohm (PN2871F) (PP2871HB,HC,T)
D743	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R702	119-1021-15	1/10W 1k ohm	R721	116-2721-15	1/4W 2.7k ohm (PN2871L,R) (PP2871HA,N)
D744	001-7093-91	RFY1112H-16-TR YEL (PN2871L,R) (PP2871HA,N)	R703	119-1021-15	1/10W 1k ohm	R722	119-2721-15	1/10W 2.7k ohm (PN2871F) (PP2871HB,HC,T)
D744	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R704	119-1021-15	1/10W 1k ohm	R722	119-3921-15	1/10W 3.9k ohm (PN2871L,R) (PP2871HA,N)
D745	001-7093-91	RFY1112H-16-TR YEL (PN2871L,R) (PP2871HA,N)	R705	119-1021-15	1/10W 1k ohm	R723	116-2221-15	1/4W 2.2k ohm (PN2871F) (PP2871HB,HC,T)
D745	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R706	119-1021-15	1/10W 1k ohm	R723	116-3321-15	1/4W 3.3k ohm (PN2871L,R) (PP2871HA,N)
D746	001-7093-91	RFY1112H-16-TR YEL (PN2871L,R) (PP2871HA,N)	R707	119-1021-15	1/10W 1k ohm	R724	116-2221-15	1/4W 2.2k ohm (PN2871F) (PP2871HB,HC,T)
D746	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R708	119-2721-15	1/10W 2.7k ohm (PN2871L,R) (PP2871HA,N)	R724	116-3321-15	1/4W 3.3k ohm (PN2871L,R) (PP2871HA,N)
D747	001-7093-91	RFY1112H-16-TR YEL (PN2871L,R) (PP2871HA,N)	R709	119-2721-15	1/10W 2.7k ohm (PN2871L,R) (PP2871HA,N)	R725	116-4321-15	1/4W 4.3k ohm (PN2871F) (PP2871HB,HC,T)
D747	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R709	119-3921-15	1/10W 3.9k ohm (PN2871F) (PP2871HB,HC,T)	R725	116-3021-15	1/4W 3.0k ohm (PN2871L,R) (PP2871HA,N)
D748	001-7093-91	RFY1112H-16-TR YEL (PN2871L,R) (PP2871HA,N)	R711	119-6831-15	1/10W 68k ohm	R726	116-3321-15	1/4W 3.3k ohm (PN2871F) (PP2871HB,HC,T)
D748	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R712	116-2721-15	1/4W 2.7k ohm (PN2871L,R) (PP2871HA,N)	R726	116-3021-15	1/4W 3.0k ohm (PN2871L,R) (PP2871HA,N)
D749	001-7093-91	RFY1112H-16-TR YEL (PN2871L,R) (PP2871HA,N)	R712	116-2421-15	1/4W 2.4k ohm (PN2871F) (PP2871HB,HC,T)	R727	116-1521-15	1/4W 1.5k ohm (PN2871F) (PP2871HB,HC,T)
D749	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R713	116-2721-15	1/4W 2.7k ohm (PN2871L,R) (PP2871HA,N)	R727	116-1821-15	1/4W 1.8k ohm (PN2871L,R) (PP2871HA,N)
D748	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R713	116-2421-15	1/4W 2.4k ohm (PN2871F) (PP2871HB,HC,T)	R728	116-4321-15	1/4W 4.3k ohm (PN2871F) (PP2871HB,HC,T)
D749	001-7093-91	RFY1112H-16-TR YEL (PN2871L,R) (PP2871HA,N)	R714	116-2721-15	1/4W 2.7k ohm (PN2871L,R) (PP2871HA,N)	R728	116-3921-15	1/4W 3.9k ohm (PN2871L,R) (PP2871HA,N)
D749	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R714	116-2421-15	1/4W 2.4k ohm (PN2871F) (PP2871HB,HC,T)	R732	168-1042-78	16V 0.1uF (PN2871LA,LG)
D750	001-7093-91	RFY1112H-16-TR YEL (PN2871L,R) (PP2871HA,N)	R715	116-2721-15	1/4W 2.7k ohm (PN2871L,R) (PP2871HA,N)	S701	013-6201-52	SKPMAP010
D750	001-7093-92	RFA1112H ORG (PN2871F) (PP2871HB,HC,T)	R715	116-3921-15	1/4W 3.9k ohm (PN2871F) (PP2871HB,HC,T)	S702	013-6201-52	SKPMAP010
IC701	051-6000-10	LC75853NE	R716	116-2721-15	1/4W 2.7k ohm (PN2871L,R) (PP2871HA,N)	S703	013-6201-52	SKPMAP010
J701	074-3014-64	SOCKET(14P)	R716	116-2421-15	1/4W 2.4k ohm (PN2871F) (PP2871HB,HC,T)	S704	013-6201-52	SKPMAP010
LCD701	379-1374-32	INDICATOR (PN-2871F-A,F-B) (PN-2871L-B,L-C) (PN-2871L-E,L-F) (PN-2871R-A) (PP-2871H,N,T)	R717	116-2721-15	1/4W 2.7k ohm (PN2871L,R) (PP2871HA,N)	S705	013-6201-52	SKPMAP010
	379-1379-32	INDICATOR (PN2871LA)	R717	116-2421-15	1/4W 2.4k ohm (PN2871F) (PP2871HB,HC,T)	S706	013-6201-52	SKPMAP010
	379-1396-32	INDICATOR (PN2871LG)	R718	116-2721-15	1/4W 2.7k ohm (PN2871L,R) (PP2871HA,N)	S707	013-6201-52	SKPMAP010
			R718	116-2421-15	1/4W 2.4k ohm (PN2871F) (PP2871HB,HC,T)	S708	013-6201-52	SKPMAP010
			R719	116-3321-15	1/4W 3.3k ohm	S709	013-6201-52	SKPMAP010
			R720	116-3021-15	1/4W 3k ohm (PN2871L,R) (PP2871HA,N)	S710	013-6201-52	SKPMAP010
			R720	116-3321-15	1/4W 3.3k ohm (PN2871F) (PP2871HB,HC,T)	S711	013-6201-52	SKPMAP010
						S712	013-6201-52	SKPMAP010
						S713	013-6201-52	SKPMAP010
						S714	016-7000-00	ROTARY ENCODER
						S715	013-6201-52	SKPMAP010
						TM701	073-0778-90	TERMINAL
						TM702	073-0778-90	TERMINAL
						PWB	039-2813-00	PWB(WITHOUT COMPONENTS)

EXPLODED VIEW / PARTS LIST

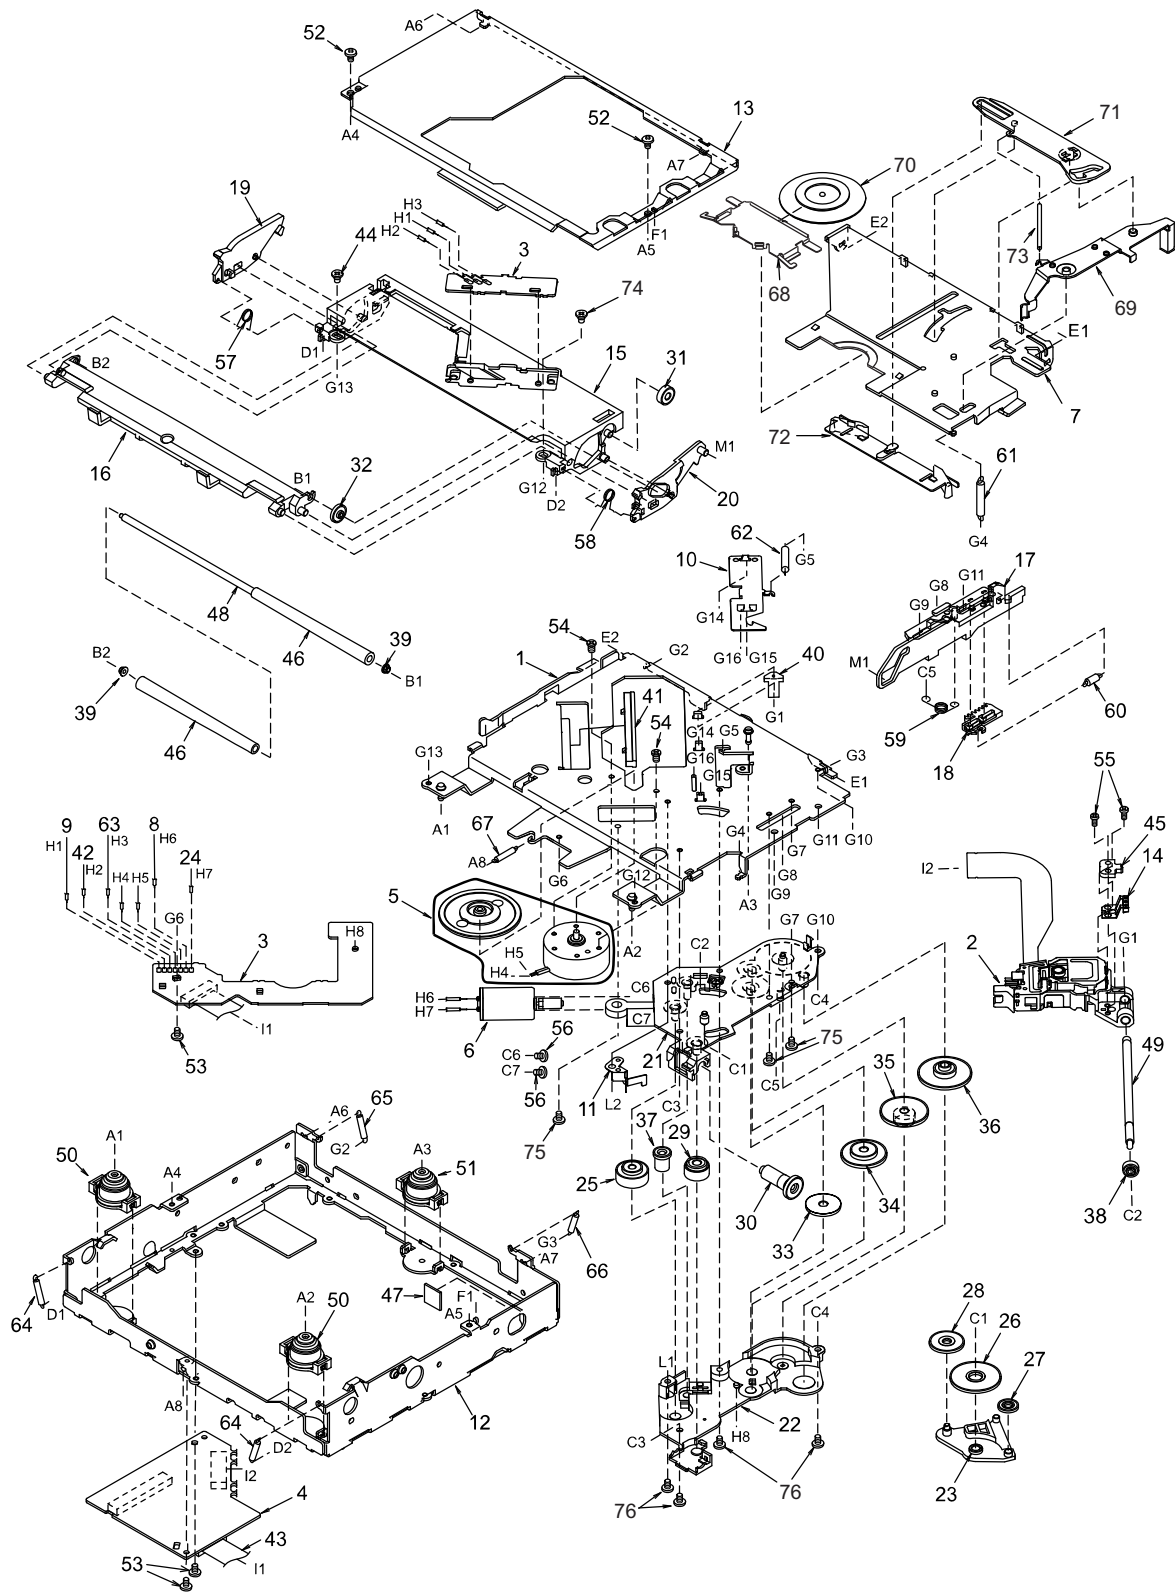

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-1743-21	DRIVE-PLT-ASSY	1	39	621-1726-20	ROLLER SLEEVE	2
2	969-0071-30	PICKUP-ASSY	1	40	621-0623-23	LS-HOLDER	1
3	-----	LED PWB	1	41	621-0624-22	GUIDE RAIL	1
4	-----	CD PWB	1	42	816-2593-00	LEAD(PUR)	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1	43	816-2542-01	FLAT WIRE	1
6	SMA-183-100	MOTOR ASSY(SLED)	1	44	716-3473-01	SCREW(M2x3)	1
7	620-1596-23	CLAMPER LINK	1	45	621-1729-20	SH-BASE	1
8	803-4906-60	VINYL-COAT-WIRE(ORG)	1	46	621-0711-20	LOADING ROLLER	2
9	816-2591-00	LEAD(YEL)	1	47	345-5476-20	CUSHION RUBBER	1
10	620-1753-20	ID-LOCK PLATE	1	48	622-1571-21	ROLLER SHAFT	1
11	620-1026-21	SPRING PLATE	1	49	624-0020-00	LEAD SCREW	1
12	620-1754-20	LOWER CHASSIS	1	50	629-0086-20	DAMPER F	2
13	620-1598-22	UPPER CHASSIS	1	51	629-0087-20	DAMPER R	1
14	966-1722-20	SH-RACK-ASSY	1	52	714-2003-8B	MACHIN SCREW(M2x3)	2
15	621-1742-20	UPPER GUIDE	1	53	716-1507-01	SCREW(M2x3)	3
16	621-0718-21	ROLLER GUIDE	1	54	716-1733-01	SCREW(M1.7x2.3)	2
17	621-1743-20	SHIFT LEVER	1	55	716-3469-01	SCREW(M3x4)	2
18	621-1744-20	RACK	1	56	716-3551-00	SCREW(M1.4x2.5)	2
19	621-1745-20	LOCK ARM L	1	57	750-6797-20	ROLLER SPRING L	1
20	621-1746-20	LOCK ARM R	1	58	750-6798-20	ROLLER SPRING R	1
21	621-1754-20	GEAR BASE	1	59	750-7865-20	SHIFT SPRING	1
22	621-1747-20	GEAR COVER	1	60	750-7866-20	RACK SPRING	1
23	621-1719-20	IDLE CASE	1	61	750-7867-20	CLAMPER SPRING	1
24	816-2590-00	LEAD(GRN)	1	62	750-7868-20	ID-LOCK SPRING	1
25	621-0608-21	SECOND GEAR	1	63	816-2592-00	LEAD(BLU)	1
26	621-0609-20	BASE GEAR	1	64	750-7870-20	DR-SPRING F	2
27	621-0610-20	IDLE GEAR A	1	65	750-7871-20	DR-SPRING RA	1
28	621-0611-20	IDLE GEAR B	1	66	750-7872-20	DR-SPRING RB	1
29	621-0612-21	ROLLER GEAR A	1	67	750-7873-20	DR-SPRING C	1
30	621-0719-20	ROLLER GEAR	1	68	620-1023-23	CLAMPER PLATE	1
31	621-0720-20	ROLLER GEAR C	1	69	620-1752-20	SENSOR ARM	1
32	621-0721-20	ROLLER GEAR D	1	70	621-1753-20	CLAMPER RING	1
33	621-1748-20	POWER GEAR A	1	71	621-0728-20	STOPPER LINK	1
34	621-1749-20	POWER GEAR B	1	72	621-1752-20	DISC STOPPER	1
35	621-1750-20	POWER GEAR C	1	73	750-7869-20	SENSOR SPRING	1
36	621-1751-20	POWER GEAR D	1	74	781-1730-00	SCREW(M1.7x3)	1
37	621-0620-20	THREAD GEAR A	1	75	780-2025-00	SCREW(M2x2.5)	3
38	621-0621-20	THREAD GEAR B	1	76	716-1670-01	SCREW(M2x4)	4

ELECTRICAL PARTS LIST

CD PWB(BM1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1042-78	16V 0.1uF	C35	046-6812-58	680pF	R9	033-2211-15	1/10W 220 ohm
C3	163-2273-05	4V220uF	C36	168-1042-78	16V 0.1uF	R11	033-1051-15	1/10W 1M ohm
C4	168-1042-78	16V 0.1uF	C37	168-1042-78	16V 0.1uF	R12	119-2221-15	1/10W 2.2k ohm
C5	163-1073-35	16V100uF	C38	046-1522-58	1500pF	R13	033-2211-15	1/10W 220 ohm
C6	163-1073-35	16V100uF	C39	046-4722-58	4700pF	R14	033-2211-15	1/10W 220 ohm
C7	168-1042-78	16V 0.1uF	C40	046-1032-78	0.01uF	R16	033-2231-15	1/10W 22k ohm
C9	178-1052-78	1uF	C41	046-1532-78	0.015uF	R17	033-3921-15	1/10W 3.9k ohm
C10	042-0560-85	6.3V100uF	C43	168-1042-78	16V 0.1uF	R18	033-3341-15	1/10W 330k ohm
C11	046-4712-58	470pF	C47	045-4701-50	47pF	R19	033-5621-15	1/10W 5.6k ohm
C12	178-1052-78	1uF	C48	168-1042-78	16V 0.1uF	R21	033-2231-15	1/10W 22k ohm
C13	046-4712-58	470pF	C49	168-1042-78	16V 0.1uF	R22	033-4731-15	1/10W 47k ohm
C15	168-1042-78	16V 0.1uF	C50	042-0666-00	12.5V 22uF	R24	033-1041-15	1/10W 100k ohm
C16	168-4732-78	0.047uF	C51	046-5622-58	5600pF	R26	033-1531-15	1/10W 15k ohm
C17	168-4732-78	0.047uF	C52	178-1052-78	1uF	R27	033-4731-15	1/10W 47k ohm
C18	168-1042-78	16V 0.1uF	C53	045-1007-50	10pF	R28	033-1831-15	1/10W 18k ohm
C19	168-1042-78	16V 0.1uF	C54	045-1007-50	10pF	R29	033-6821-15	1/10W 6.8k ohm
C21	046-6822-58	6800pF	C55	178-1052-78	1uF	R30	033-8231-15	1/10W 82k ohm
C22	046-3332-78	0.033uF	CCT2	050-0140-63	1/32W 47k ohm x4J	R31	033-8231-15	1/10W 82k ohm
C24	178-1052-78	1uF	D1	001-0367-91	1SS226	R32	119-1001-15	1/10W 10 ohm
C25	168-1042-78	16V 0.1uF	IC1	051-6071-08	BA5825FP-E2	R33	033-2731-15	1/10W 27k ohm
C26	168-1042-78	16V 0.1uF	IC2	051-6399-00	TC94A15F	R34	033-2731-15	1/10W 27k ohm
C28	168-1042-78	16V 0.1uF	J101	074-1228-76	26P	R35	033-2731-15	1/10W 27k ohm
C29	168-1042-78	16V 0.1uF	J201	074-1138-65	15P	R36	033-2731-15	1/10W 27k ohm
C30	045-6801-50	68pF	J301	074-1138-60	10P	R37	032-0162-50	1/10W 0.51 ohm
C31	168-1042-78	16V 0.1uF	Q1	131-1188-50	2SB1188PQR	TM1	073-0768-00	TERMINAL
C32	168-1042-78	16V 0.1uF	Q2	131-1188-50	2SB1188PQR	X2	061-3534-90	16.92MHz
C33	046-1532-78	0.015uF	R1	117-6811-15	1/8W 680 ohm	PWB	039-2846-20	PWB(WITHOUT COMPONENT)
C34	168-1042-78	16V 0.1uF	R2	117-1001-15	1/8W 10 ohm			

LED PWB(BM2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR	Q1	060-4015-91	PS1192HB-33-TR	S2	013-7413-50	LIMIT
D2	001-7058-90	AN1105W-RR	Q2	060-4015-91	PS1192HB-33-TR	PWB	039-1944-21	PWB(WITHOUT COMPONENT)
J1	074-1138-60	10P	S1	013-7414-50	CHUCKING			