
EXPLODED VIEW / PARTS LIST

Main section

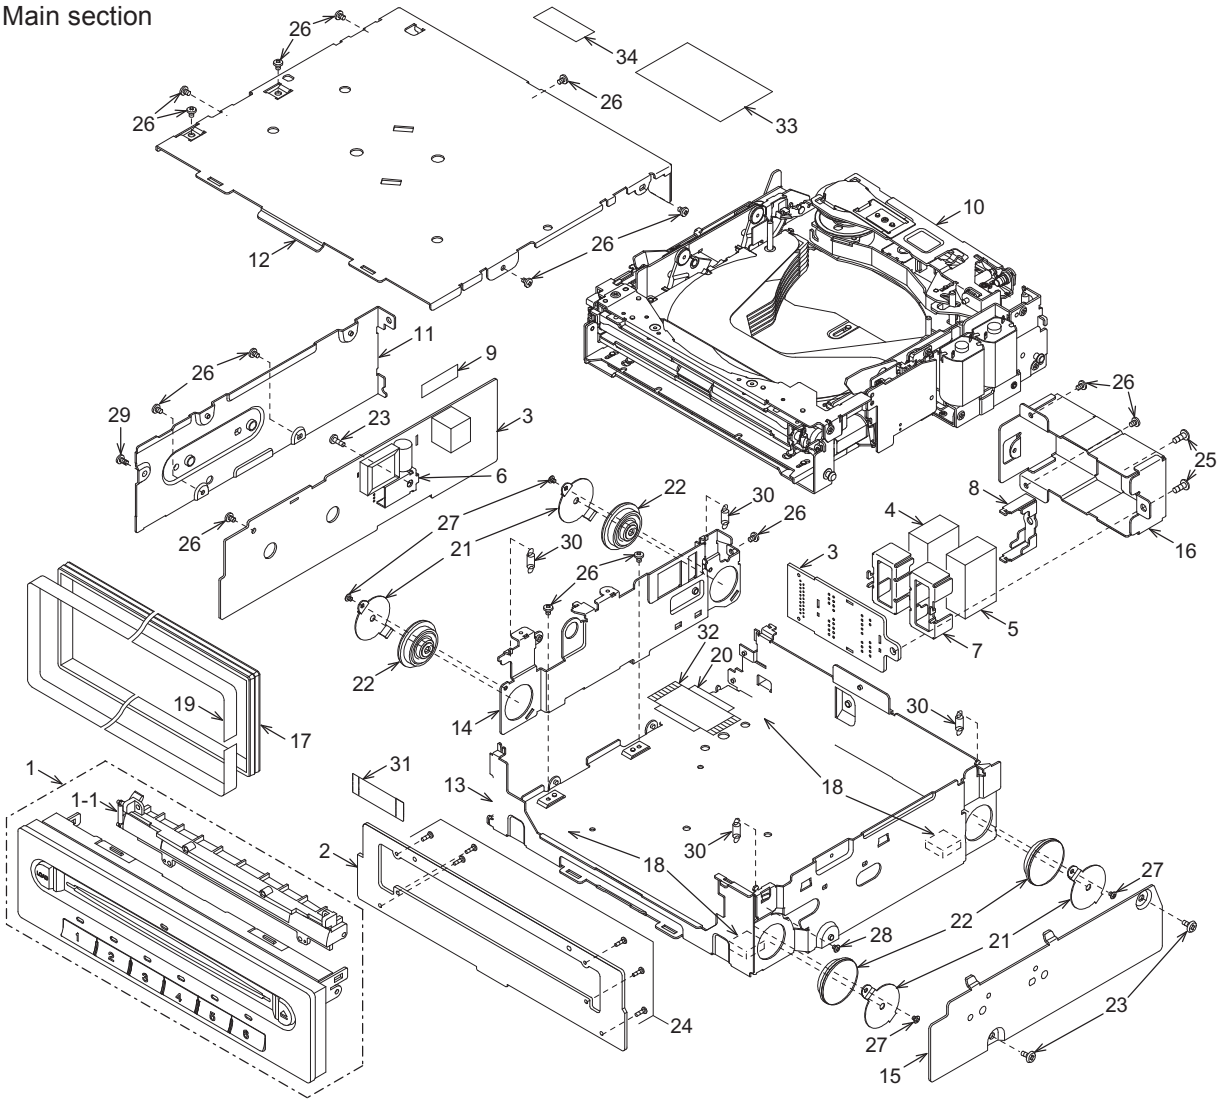



Note) Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8041-01 940-8041-10 940-8041-20	ES-ASSY(PH2612MA) ES-ASSY(PH2645RA) ES-ASSY(PH2645RB)	1
1-1	947-0540-00	DOOR-ASSY	1
2	----------	SWITCH PWB	1
3	----------	MAIN PWB	1
4	074-4003-18	OUTLET SOCKET(18P)	1
5	074-4004-14	OUTLET SOCKET(14P)	1
6	331-3267-00	TR-HOLDER	1
7	331-3762-00	SOCKET HOLDER	1
8	331-3763-00	SOCKET HOLDER	1
9	347-6657-01	LO-COVER SHEET	1
10	HBS-540-100	CD CHANGER MECHANISM	1
11	305-0315-09	SIDE CASE	1
12	310-1741-25	UPPER CASE	1
13	311-1836-87	LOWER CASE	1
14	331-3266-25	PWB-HOLDER	1
15	331-3497-81	SIDE PLATE	1
16	331-3764-00	CONNECTOR-CVR	1
17	345-5314-01	RUBBER PART	1

NO.	PART NO.	DESCRIPTION	Q'TY
18	345-8747-00	CUSHION GEL	4
19	347-6410-00	DOUBLE FACE	1
20	347-6619-00	INSULATOR	1
21	620-1086-20	DAMPER-H-PLT	4
22	629-0083-01	DAMPER	4
23	714-2606-81	MACHINE SCREW(M2.6 x 6)	3
24	716-0872-01	PAD SCREW(M1.7 x 6)	6
25	716-0878-00	IT-SCREW(M2.6 x 5)	2
26	716-1716-00	SPECIAL SCREW(M2 x 3)	15
27	716-3450-00	SPECIAL SCREW(M1.7 x 2)	4
28	716-3461-00	SPECIAL SCREW(M2 x 3)	1
29	716-3462-00	SPECIAL SCREW(M2 x 5)	1
30	750-3491-00	FL-SPRING	4
31	816-2610-00	FLAT WIRE	1
32	039-1957-01	FPC(WITHOUT COMPONENT)	1
33	286-6447-00 286-6447-01 286-6447-02	SETPLATE(PH2612MA) SETPLATE(PH2645RA) SETPLATE(PH2645RB)	1
34	NO USED 285-1969-00 285-1969-10	LABEL(PH2612MA) LABEL(PH2645RA) LABEL(PH2645RB)	1

CD changer machanism section
(HBS-540-100)

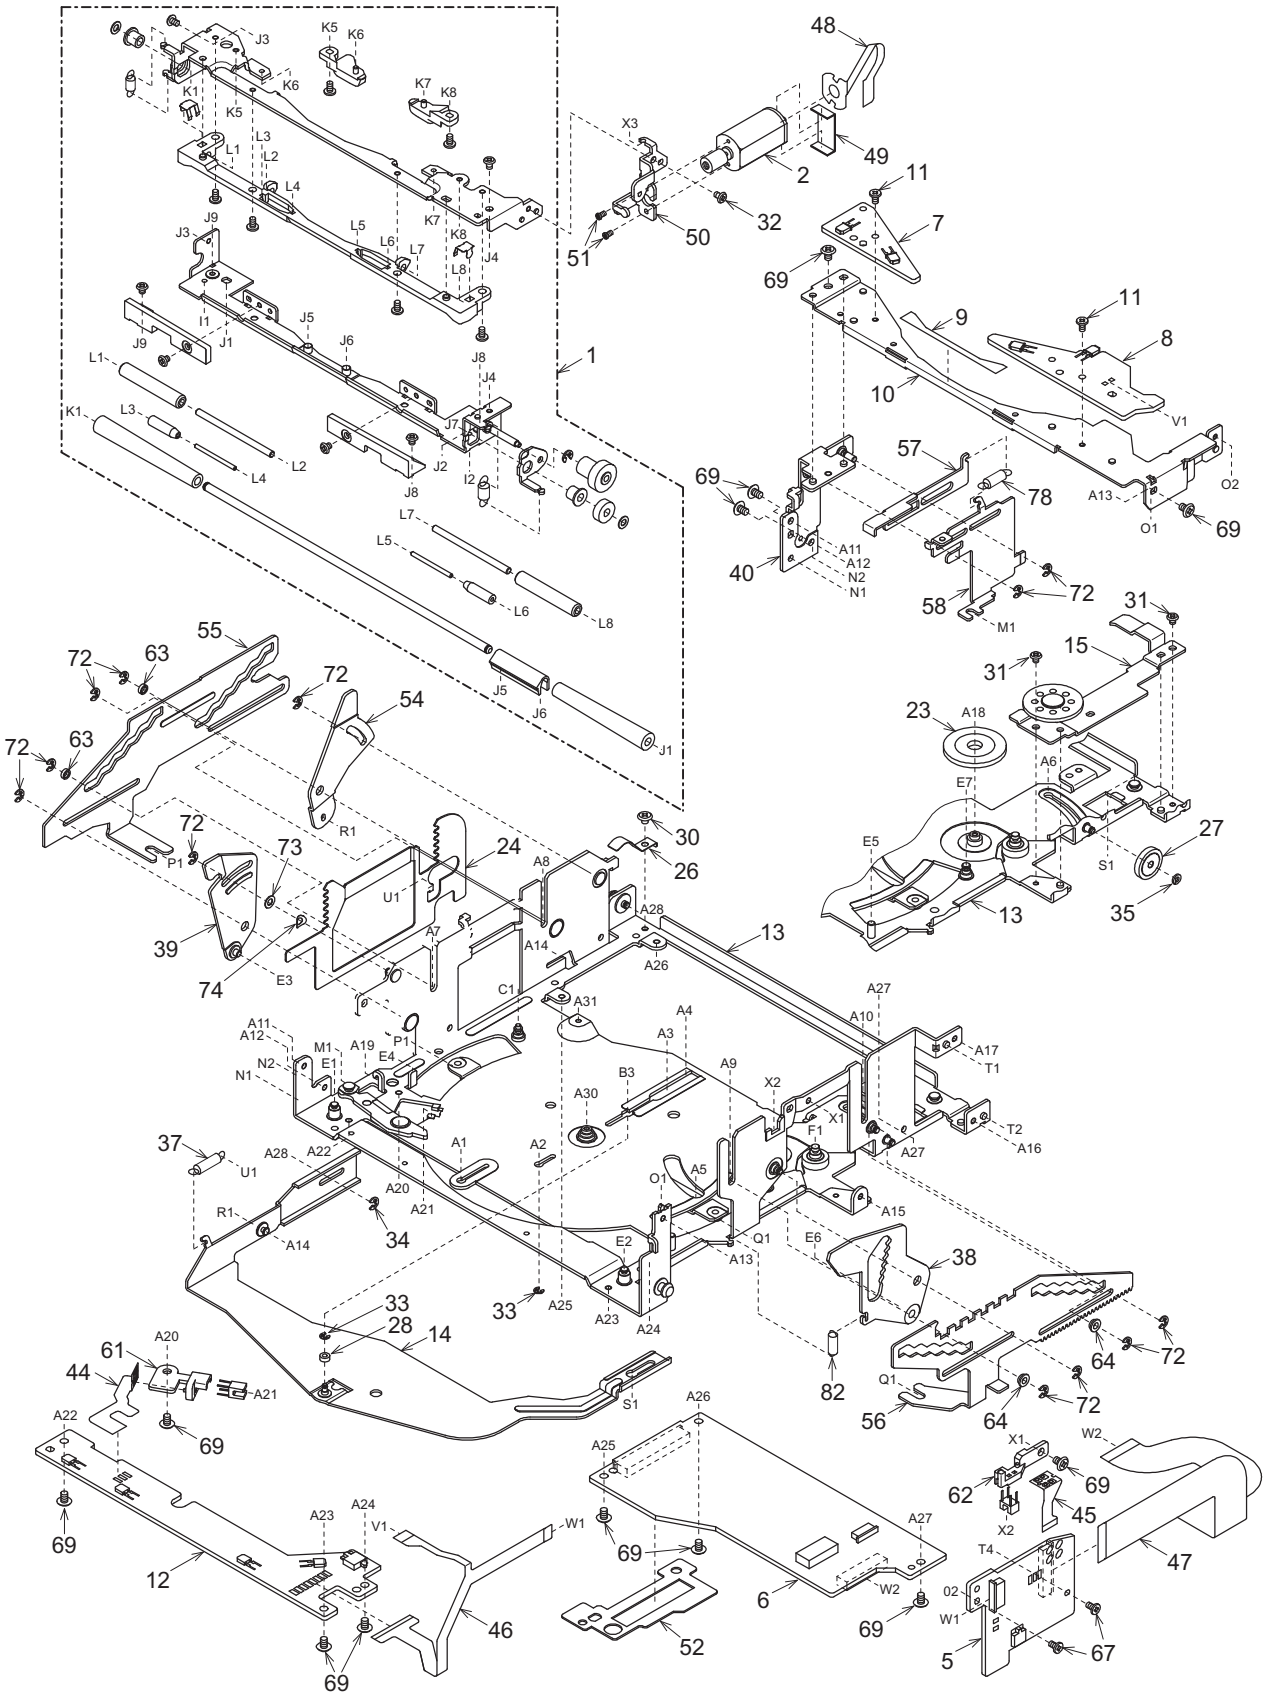


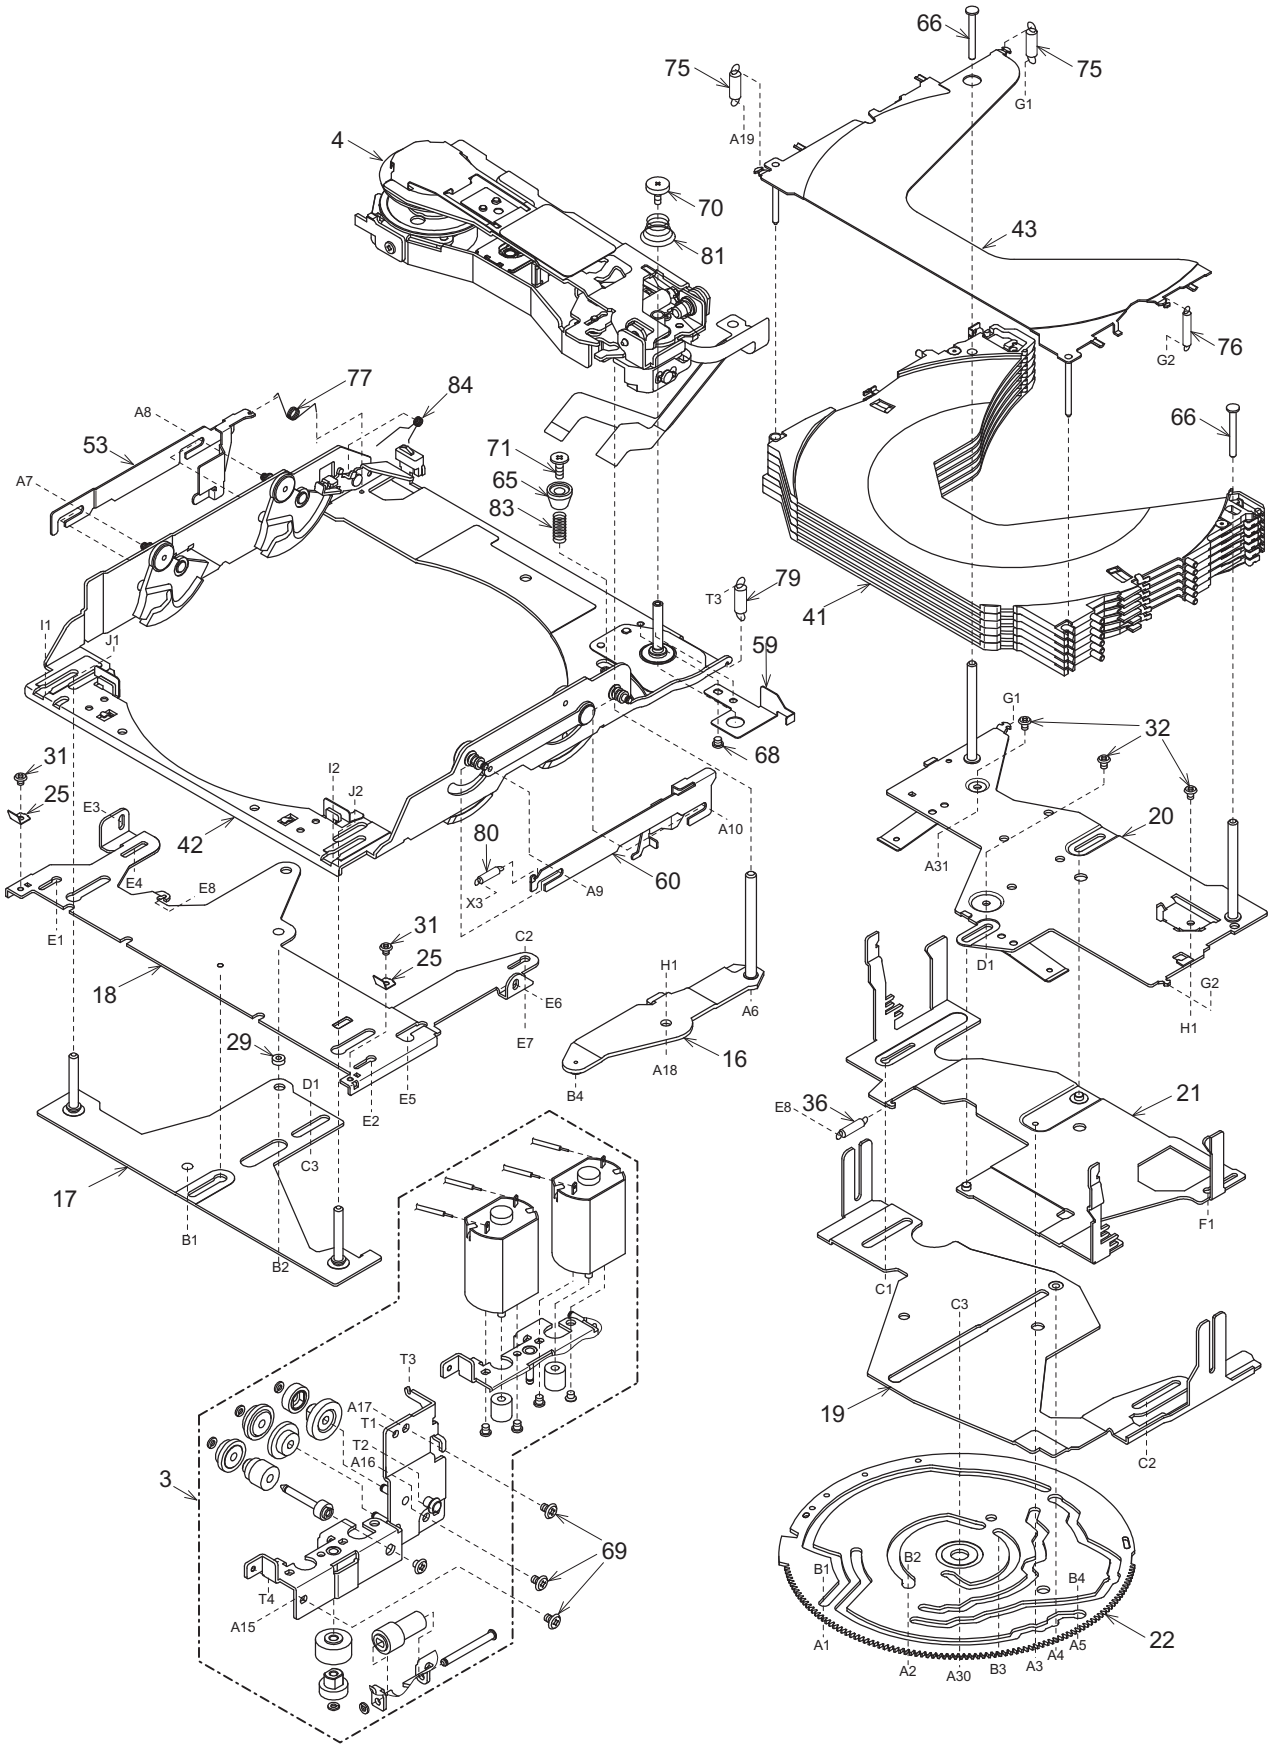
66
75
75
A19
G1
4
70
81
43
76
G2
77
84
A8
53
A7
71
65
83
66
79
T3
41
I1
J1
59
G1
32
31
25
I2
J2
68
20
A31
E3
42
80
A10
E4
E8
X3
A9
60
E1
31
C2
25
D1
18
E6
E7
H1
A6
29
A18
16
B4
E2
E5
D1
E8
36
21
C3
17
F1
B1
B2
C1
C3
T3
19
A17
T1
T2
A16
C2
3
69
T4
A15
B1
B2
B4
22
A1
A2
A30
B3
A3
A4
A5

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT	1
2	SMA-186-100	LOADING MOTOR-ASSY	1
3	HBS-530-100	MTR-P-SUB-ASSY	1
4	HBS-531-100	DRIVE UNIT-ASSY	1
5	----------	DRIVER PWB	1
6	----------	CD-PWB	1
7	----------	LED-L-PWB	1
8	----------	LED-R-PWB	1
9	039-2011-01	LED-FPC (WITHOUT COMPONENT)	1
10	620-1577-20	FRONT-PLATE	1
11	716-1866-00	SPECIAL SCREW(M1.7 x 3)	2
12	----------	SENSOR PWB	1
13	966-0597-24	CHASSIS-ASSY	1
14	966-0600-23	LOCK-P-RE-ASSY	1
15	966-0601-21	M-GEAR-P-ASSY	1
16	966-0602-24	DR-LINK-ASSY	1
17	966-0603-21	MODE-P-ASSY	1
18	966-0604-24	LOCK-PF-ASSY	1
19	966-0605-20	SHIFT-P-ASSY	1
20	966-0607-26	COV-PLATE-ASSY	1
21	966-1721-20	HLC-PLATE-ASSY	1
22	620-1041-25	GEAR PLATE	1
23	620-1042-20	M-GEAR-H	1
24	620-1090-20	GAP PLATE	1
25	620-1568-20	RATTLE PLATE-F	2
26	620-1604-20	DR-PLATE-SPRING	1
27	621-0640-20	V-GEAR-G	1
28	622-1651-00	LOCK-RE-ROLLER	1
29	622-1652-00	LOCK-PF-ROLLER	1
30	716-1850-01	SPECIAL SCREW(M2 x 2)	1
31	716-3450-00	SPECIAL SCREW(M1.7 x 2)	4
32	716-3451-00	SPECIAL SCREW(M1.7 x 2.5)	4
33	743-1200-10	E-RING	2
34	743-1500-10	E-RING	1
35	746-0761-00	SPECIAL WASHER	1
36	750-3485-01	TENTION-SP-L	1
37	750-3497-00	GAP-P-SPRING L	1
38	966-0615-21	LOCK-L-RF-ASSY	1
39	966-0616-20	LOCK-L-LF-ASSY	1
40	966-0618-21	EJECT-B-ASSY	1
41	966-0624-27	DISC-HOL-ASSY	1
42	966-0652-22	DR-BASE-P-ASSY	1
43	HBS-534-100	TOP PLATE-ASSY	1

NO.	PART NO.	DESCRIPTION	Q'TY
44	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1
45	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1
46	039-2012-00	SENSOR-FPC (WITHOUT COMPONENT)	1
47	039-2013-02	MOS-FPC (WITHOUT COMPONENT)	1
48	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1
49	347-6657-01	LO-COVER SHEET	1
50	620-1576-20	LO-MOTOR-PLT	1
51	738-1422-11	SPECIAL SCREW(M1.4 x 2.2)	2
52	347-6974-21	FPC COVER	1
53	620-1056-22	HLR-PLATE-L	1
54	620-1066-20	LOCK LINK-LR	1
55	620-1067-21	SLIDE PLATE L	1
56	620-1068-22	SLIDE PLATE-R	1
57	620-1071-21	EJECT ARM	1
58	620-1072-20	EJECT PLATE	1
59	620-1083-20	FPC-PLATE	1
60	620-1580-20	HLR-PLATE-R	1
61	621-0641-21	PI-HOLDER-M	1
62	621-0656-21	PI-HOLDER-V	1
63	622-1622-20	SL-G-ROLLER	2
64	622-1623-00	SL-G-ROLLER-R	2
65	622-1648-02	DU-STP-SLEEVE	1
66	622-1650-23	COV-PLATE PIN B	2
67	716-1866-00	SPECIAL SCREW(M1.7 x 3)	2
68	716-1873-00	SPECIAL SCREW(M2 x 1.6)	1
69	716-3449-00	SPECIAL SCREW(M2 x 3)	15
70	716-3459-00	SPECIAL SCREW(M1.7 x 5)	1
71	716-3466-02	SPECIAL SCREW(M2 x 6)	1
72	743-1500-10	E-RING	12
73	746-0624-00	SPECIAL WASHER	1
74	746-0712-23	SPECIAL WASHER	1
75	750-3478-01	TOP-P-SP-L	2
76	750-3479-01	TOP-P-SP-R	1
77	750-3480-01	DR-LOCK-SP	1
78	750-3483-00	EJECT-A-SPRING	1
79	750-3484-01	DR-BASE-SPRING	1
80	750-3486-01	LO-TENSION-SP	1
81	750-3489-01	DRIVE-P-SPRING	1
82	750-3496-00	GAP-P-SPRING R	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1

DRIVE UNIT ASSY section
(HBS-531-100)

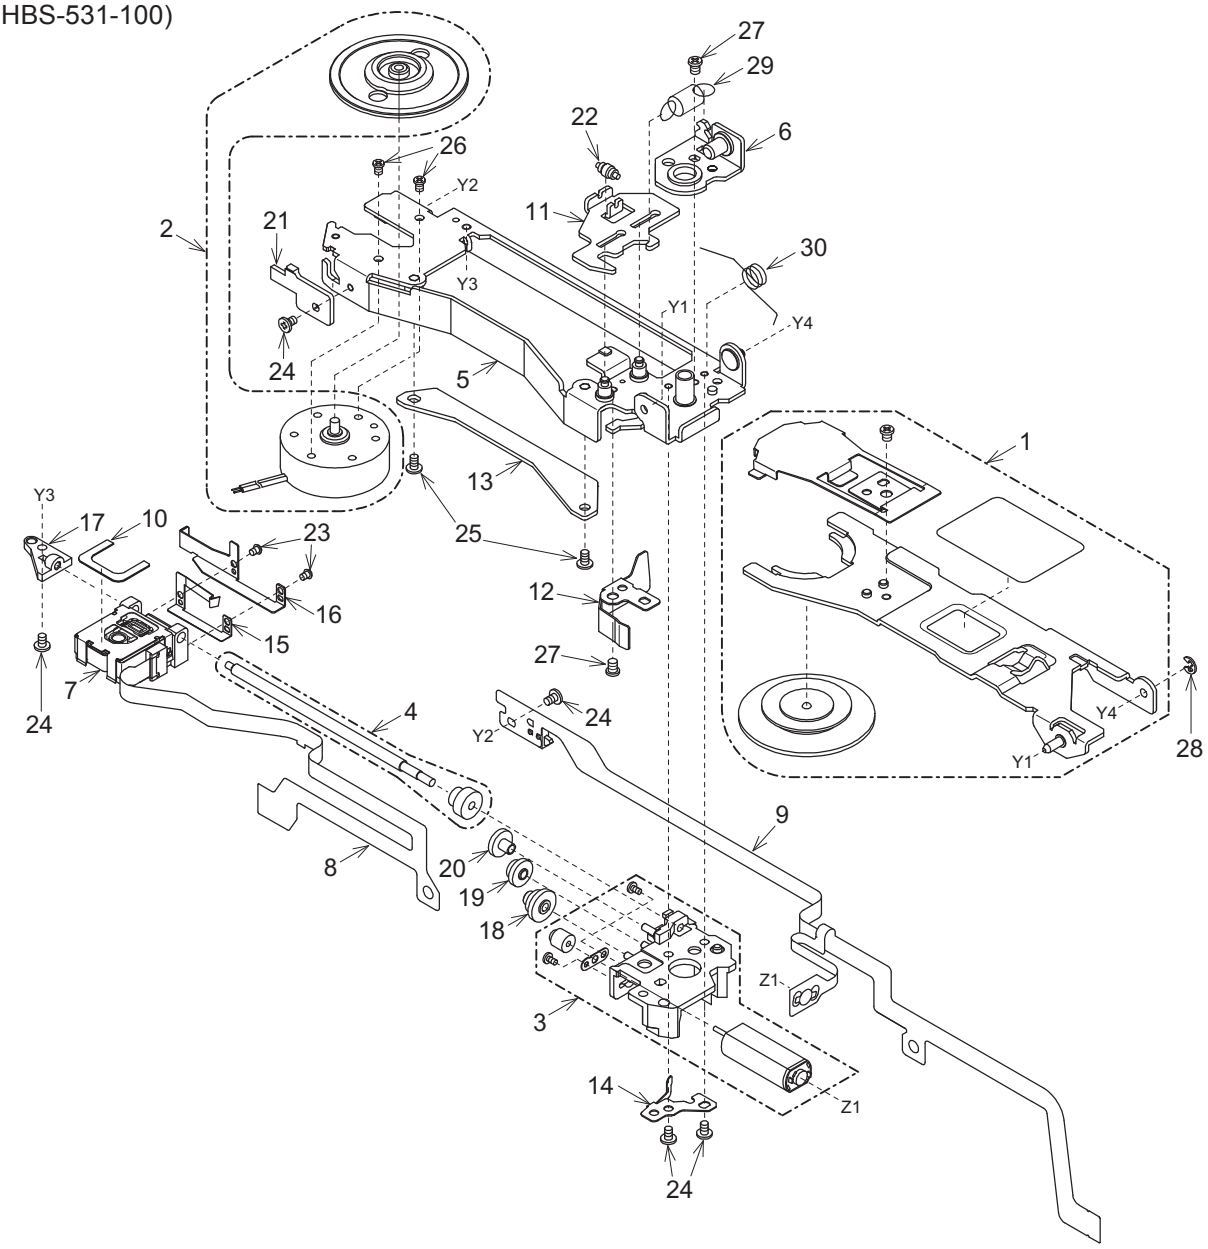

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-100	CLAMP SUB-ASSY	1
2	SMA-185-101	SPINDLE MOTOR-ASSY	1
3	SMA-191-100	SLED MOTOR-ASSY	1
4	HBS-515-101	LS-ASSY	1
5	966-0649-82	DRIVE PLT-ASSY	1
6	966-0650-20	SPRING-PLT-ASSY	1
7	969-0011-00	PICK UP-ASSY	1
8	039-2015-01	P/U-FPC (WITHOUT COMPONENT)	1
9	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1
10	347-6632-00	PU-SHEET	1
11	620-1077-22	D-SHIFT-PLATE	1
12	620-1078-20	PUSH PLATE	1
13	620-1080-22	PU-GUIDE-PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1
15	620-1587-81	SH-SPRING-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
16	620-1588-23	SCREW-HOL-PLT	1
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR-A	1
19	621-0674-20	D-GEAR-B	1
20	621-0675-20	D-GEAR-C	1
21	621-0683-21	DU-STOPPER	1
22	622-1636-21	LIFT ROLLER	1
23	716-3511-00	SPECIAL SCREW(phi1.4 x 3)	2
24	716-3470-00	SPECIAL SCREW(M1.7 x 3)	5
25	716-3474-00	SPECIAL SCREW(M1.7 x 3)	2
26	738-1720-17	PRECISION SCREW(M1.7 x 2)	2
27	738-2025-17	PRECISION SCREW(M2 x 2.5)	2
28	743-1500-10	E-RING	1
29	750-3487-00	SHIFT-P-SPRING	1
30	750-3504-00	CLAMP-A-SPRING	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
C101	168-1042-78	16V 0.1uF
C102	168-1032-55	0.01uF K
C104	163-1073-15	6.3V100uF
C106	042-0595-62	16V10uF
C108	189-4773-31	16V470uF
C109	172-1041-11	50V 0.1uF
C110	168-1042-78	16V 0.1uF
C111	042-0636-53	6.3V47uF
C112	163-2273-25	10V 220uF
C113	168-1042-78	16V 0.1uF
C114	163-1073-15	6.3V100uF
C115	168-1042-78	16V 0.1uF
C116	178-3342-78	0.33uF
C117	178-3342-78	0.33uF
C118	178-3342-78	0.33uF
C119	178-1052-78	1uF
C120	178-1052-78	1uF
C201	163-2263-15	6.3V22uF
C202	163-2263-15	6.3V22uF
C203	163-2263-15	6.3V22uF
C204	163-2263-15	6.3V22uF
C205	166-1211-50	12pF CH
C208	166-2201-50	22pF CH
C209	168-1042-78	16V 0.1uF
C210	166-2201-50	22pF CH
C213	166-1211-50	12pF CH
C214	163-1073-15	6.3V100uF
C215	168-1042-78	16V 0.1uF
C216	163-1063-35	16V10uF
C217	168-1032-55	0.01uF K
C218	163-1063-35	16V10uF
C219	163-1063-35	16V10uF
C220	163-1063-35	16V10uF
C221	168-1022-55	1000pF K
C222	168-1022-55	1000pF K
C223	168-1022-55	1000pF K
C224	168-1022-55	1000pF K
C225	168-1022-55	1000pF K
C226	168-1022-55	1000pF K
C502	168-1042-78	16V 0.1uF
C503	168-4732-78	0.047uF K
C504	168-1042-78	16V 0.1uF
C505	168-1032-55	0.01uF K
C506	168-1032-55	0.01uF K
C600	168-1022-55	1000pF K
C601	168-1022-55	1000pF K
C610	163-4763-35	16V47uF
C612	168-1032-55	0.01uF K
C613	168-1032-55	0.01uF K
C620	168-1032-55	0.01uF K
C621	163-1043-65	50V0.1uF
C631	168-1032-55	0.01uF K
C640	168-2232-55	0.022uF K
C650	168-1022-55	1000pF K
C660	168-1022-55	1000pF K
C661	168-1022-55	1000pF K
CCT222	050-0145-51	1/16W 100k ohm x 4
CCT512	050-0145-54	1/16W 47k ohm x 4
CCT514	050-0145-53	1/16W 220k ohm x 4J
CCT522	050-0145-54	1/16W 47k ohm x 4
CCT527	050-0145-50	1/16W 270 ohm x 4
CCT528	050-0145-50	1/16W 270 ohm x 4
CCT529	050-0145-50	1/16W 270 ohm x 4

REF No.	PART No.	DESCRIPTION
CCT630	050-0145-58	1/16W 2.2k ohm x 4
D100	001-0516-90	MA111
D103	001-0503-09	HZS5ALL
D104	001-0516-90	MA111
D600	001-0529-32	MA8056-M
D601	001-0529-32	MA8056-M
D610	001-0529-53	MA8110M
D611	001-0516-90	MA111
D612	001-0535-90	MA729
D620	001-0516-90	MA111
D630	001-2015-00	RL253
D631	001-0516-90	MA111
D650	001-0356-91	1SS184
IC101	051-3289-00	BA09ST
IC102	051-3288-90	AN80M50RSPTX
IC103	051-3288-90	AN80M50RSPTX
IC201	051-0350-93	NJM4558M
IC202	051-0350-93	NJM4558M
IC203	051-1544-08	TC74HC4066AF
IC501	051-9402-68	BR93L56F-W
IC502	052-5064-01	M30621MCM-4P8GP
IC503	051-5417-08	S-80927ANMP-DDQ
IC504	051-7222-38	SN74AHC1G08DBVR
IC505	051-6600-38	CA0008AM
IC506	051-7243-48	SN74AHCT1G08DCKR
IC640	051-5418-08	S-80827ANMP-EDQ
J101	074-1189-95	45P
J102	074-1059-76	26P
J800	076-0648-20	20P
J801	074-4003-18	18P
J802	074-4004-14	14P
J803	074-1279-70	20P
J830	076-0478-55	PLUG
Q101	125-2004-92	RN1402
Q102	190-1162-00	2SA1162
Q103	193-1758-00	2SD1758TK-P,Q,R
Q201	193-1306-00	2SD1306
Q202	193-1306-00	2SD1306
Q203	125-0014-92	DTA114EK
Q204	125-2004-92	RN1402
Q205	125-2004-92	RN1402
Q502	190-1162-00	2SA1162
Q505	125-2004-92	RN1402
Q506	125-0014-92	DTA114EK
Q610	193-1758-00	2SD1758TK-P,Q,R
Q611	193-1758-00	2SD1758TK-P,Q,R
Q612	190-1162-00	2SA1162
Q613	125-2004-92	RN1402
Q614	125-2004-92	RN1402
Q617	193-1758-00	2SD1758TK-P,Q,R
Q620	192-2712-00	2SC2712
Q630	125-0002-93	RN2403
Q650	192-2712-00	2SC2712
Q660	190-1162-00	2SA1162
R101	119-4711-15	1/10W 470 ohm
R102	119-2231-15	1/10W 22k ohm
R103	119-1821-15	1/10W 1.8k ohm
R104	119-1831-15	1/10W 18k ohm
R105	032-0145-54	1/2W 10 ohm J
R106	032-0145-54	1/2W 10 ohm J
R201	119-1041-15	1/10W 100k ohm
R202	119-1041-15	1/10W 100k ohm
R203	119-1011-15	1/10W 100 ohm

REF No.	PART No.	DESCRIPTION
R204	119-1011-15	1/10W 100 ohm
R205	119-1031-15	1/10W 10k ohm
R206	119-1031-15	1/10W 10k ohm
R207	119-8221-15	1/10W 8.2k ohm
R208	119-1831-15	1/10W 18k ohm
R209	119-1031-15	1/10W 10k ohm
R210	119-1031-15	1/10W 10k ohm
R211	119-8221-15	1/10W 8.2k ohm
R212	119-8221-15	1/10W 8.2k ohm
R213	119-1831-15	1/10W 18k ohm
R214	119-1031-15	1/10W 10k ohm
R215	119-1031-15	1/10W 10k ohm
R216	119-1031-15	1/10W 10k ohm
R217	119-4731-15	1/10W 47k ohm
R218	119-2211-15	1/10W 220 ohm
R219	119-2211-15	1/10W 220 ohm
R220	119-2211-15	1/10W 220 ohm
R221	119-2211-15	1/10W 220 ohm
R223	119-3921-15	1/10W 3.9k ohm
R224	119-3921-15	1/10W 3.9k ohm
R225	119-8221-15	1/10W 8.2k ohm
R226	119-8221-15	1/10W 8.2k ohm
R505	119-1031-15	1/10W 10k ohm
R509	119-4731-15	1/10W 47k ohm
R510	119-1031-15	1/10W 10k ohm
R511	119-1031-15	1/10W 10k ohm
R513	119-1041-15	1/10W 100k ohm
R518	119-1041-15	1/10W 100k ohm
R521	119-4731-15	1/10W 47k ohm
R523	119-3921-15	1/10W 3.9k ohm
R524	119-4731-15	1/10W 47k ohm
R525	119-4731-15	1/10W 47k ohm
R600	116-1011-15	1/4W 100 ohm
R601	116-1011-15	1/4W 100 ohm
R610	116-2291-15	1/4W 2.2 ohm
R611	116-2291-15	1/4W 2.2 ohm
R613	119-2231-15	1/10W 22k ohm
R614	119-2231-15	1/10W 22k ohm
R615	116-3321-15	1/4W 3.3k ohm
R616	116-3621-15	1/4W 3.6k ohm
R617	116-2291-15	1/4W 2.2 ohm
R620	119-1531-15	1/10W 15k ohm
R621	119-1021-15	1/10W 1k ohm
R631	119-1041-15	1/10W 100k ohm
R634	119-1041-15	1/10W 100k ohm
R635	119-1041-15	1/10W 100k ohm
R636	119-4721-15	1/10W 4.7k ohm
R638	119-4731-15	1/10W 47k ohm
R640	119-4741-15	1/10W 470k ohm
R641	119-2741-15	1/10W 270k ohm
R642	119-1041-15	1/10W 100k ohm
R650	119-2231-15	1/10W 22k ohm
R651	119-2231-15	1/10W 22k ohm
R652	116-1011-15	1/4W 100 ohm
R660	119-4731-15	1/10W 47k ohm
R661	119-2231-15	1/10W 22k ohm
R662	119-1031-15	1/10W 10k ohm
R663	116-1011-15	1/4W 100 ohm
T101	009-0679-00	0.53mH
X501	060-1533-90	CSTCE10M0G52-R0
PWB	039-2504-00	PWB(WITHOUT COMPONENT)

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C402	168-1042-78	16V 0.1uF
C700	168-1032-55	0.01uF K
D401	001-7043-90	CL-170FG-CD
D404	001-7043-90	CL-170FG-CD

REF No.	PART No.	DESCRIPTION
D405	001-7043-90	CL-170FG-CD
D406	001-7043-90	CL-170FG-CD
D407	001-7043-90	CL-170FG-CD
D408	001-7043-90	CL-170FG-CD

REF No.	PART No.	DESCRIPTION
D411	001-0655-90	1SS294
D412	001-0655-90	1SS294
D700	001-7045-90	CL-165D/FG-D
IC401	051-6617-08	NJU3715G-TE2

REF No.	PART No.	DESCRIPTION
J401	074-1239-76	26P
PL401	017-0433-93	14V 40mA BLUE
PL402	017-0433-93	14V 40mA BLUE
PL403	017-0433-93	14V 40mA BLUE
PL404	017-0433-93	14V 40mA BLUE
Q401	192-2712-00	2SC2712
Q402	192-2712-00	2SC2712
Q403	192-2712-00	2SC2712
Q404	192-2712-00	2SC2712
Q720	192-2712-00	2SC2712
R401	119-6811-15	1/10W 680 ohm
R407	119-6811-15	1/10W 680 ohm
R409	119-6811-15	1/10W 680 ohm

REF No.	PART No.	DESCRIPTION
R411	119-6811-15	1/10W 680 ohm
R413	119-6811-15	1/10W 680 ohm
R415	119-6811-15	1/10W 680 ohm
R419	119-1031-15	1/10W 10k ohm
R420	119-1031-15	1/10W 10k ohm
R421	119-1031-15	1/10W 10k ohm
R422	119-1031-15	1/10W 10k ohm
R423	119-1031-15	1/10W 10k ohm
R424	119-1031-15	1/10W 10k ohm
R425	119-1031-15	1/10W 10k ohm
R426	119-1031-15	1/10W 10k ohm
R700	119-6811-15	1/10W 680 ohm
R701	119-6811-15	1/10W 680 ohm

REF No.	PART No.	DESCRIPTION
R720	119-1031-15	1/10W 10k ohm
S401	013-6201-51	SKPMAP
S402	013-6201-51	SKPMAP
S403	013-6201-51	SKPMAP
S404	013-6201-51	SKPMAP
S405	013-6201-51	SKPMAP
S406	013-6201-51	SKPMAP
S407	013-6201-51	SKPMAP
S408	013-7415-50	SPVG110400
S700	013-6201-51	SKPMAP
PWB	039-2505-01	PWB(WITHOUT COMPONENT)

CD PWB(B3) section

REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF
C3	168-1042-78	16V 0.1uF
C4	042-0636-54	4V 220uF
C5	168-1042-78	16V 0.1uF
C6	046-1032-78	0.01uF
C7	168-1042-78	16V 0.1uF
C8	178-4742-78	0.47uF
C9	178-2242-78	0.22uF
C10	168-1042-78	16V 0.1uF
C11	168-1042-78	16V 0.1uF
C12	168-1042-78	16V 0.1uF
C13	046-2232-78	0.022uF
C14	168-5612-55	560pF Z
C15	168-1042-78	16V 0.1uF
C16	046-2212-58	220pF
C17	046-2212-58	220pF
C18	168-1222-55	1200pF K
C19	046-3322-58	3300pF
C20	168-3932-78	0.039uF K
C21	168-3932-78	0.039uF K
C22	042-0416-52	10V 10uF M TAN
C25	178-1052-78	1uF
C26	042-0472-91	16V 47uF
C27	178-3342-78	0.33uF
C29	168-2732-55	16V 0.027uF K
C30	042-0416-58	4V 100uF M TAN
C31	042-0636-52	4V 47uF
C32	046-1022-58	1000pF
C33	046-3322-58	3300pF
C34	168-2732-55	16V 0.027uF K
C35	178-2742-78	0.27uF
C36	178-1052-78	1uF
C37	168-1042-78	16V 0.1uF
C38	042-0472-91	16V 47uF
C39	042-0636-50	6.3V 100uF

REF No.	PART No.	DESCRIPTION
C40	045-1211-50	120pF
C41	045-1011-50	100pF
C42	168-1042-78	16V 0.1uF
C43	042-0636-52	4V 47uF
C50	168-1042-78	16V 0.1uF
C51	168-1042-78	16V 0.1uF
C60	168-5612-55	560pF Z
D1	001-0367-91	1SS226
IC1	051-6365-00	MN662785TBUC
IC2	051-9318-00	MSM51V17400D-60TS-K
IC3	051-6060-08	BD7961FM-E2
IC4	051-5711-90	AN8882SB-E1
J1	074-1189-95	45P
J4	074-1138-56	6P
J5	074-1201-65	15P
J6	074-1059-76	26P
L2	010-2155-93	10uH
Q2	131-1188-00	2SB1188
Q3	131-1188-00	2SB1188
R2	033-1041-15	1/10W 100k ohm
R4	033-3311-15	1/10W 330 ohm
R5	033-1041-15	1/10W 100k ohm
R6	033-3931-15	1/10W 39k ohm
R7	033-1041-15	1/10W 100k ohm
R8	033-5611-15	1/10W 560 ohm
R9	033-5611-15	1/10W 560 ohm
R10	033-1011-15	1/10W 100 ohm
R11	033-3911-15	1/10W 390 ohm
R12	033-2221-15	1/10W 2.2k ohm
R13	033-6831-15	1/10W 68k ohm
R14	033-5621-15	1/10W 5.6k ohm
R15	033-1021-15	1/10W 1k ohm
R16	033-5631-15	1/10W 56k ohm
R17	033-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R18	033-1031-15	1/10W 10k ohm
R19	033-5621-15	1/10W 5.6k ohm
R20	033-6831-15	1/10W 68k ohm
R21	033-5621-15	1/10W 5.6k ohm
R22	033-1031-15	1/10W 10k ohm
R23	033-1031-15	1/10W 10k ohm
R24	033-4731-15	1/10W 47k ohm
R25	033-3931-15	1/10W 39k ohm
R26	033-6831-15	1/10W 68k ohm
R27	033-6831-15	1/10W 68k ohm
R28	033-1031-15	1/10W 10k ohm
R29	033-2201-15	1/10W 22 ohm
R31	033-8211-15	1/10W 820 ohm
R32	033-5631-15	1/10W 56k ohm
R33	033-6831-15	1/10W 68k ohm
R34	033-3331-15	1/10W 33k ohm
R35	033-6831-15	1/10W 68k ohm
R38	033-3931-15	1/10W 39k ohm
R39	033-1831-15	1/10W 18k ohm
R40	117-1001-15	1/8W 10 ohm
R41	033-6821-15	1/10W 6.8k ohm
R42	033-6821-15	1/10W 6.8k ohm
R43	033-3331-15	1/10W 33k ohm
R44	033-5631-15	1/10W 56k ohm
R45	116-4711-15	1/4W 470 ohm
R46	117-1811-15	1/8W 180 ohm
R47	116-4711-15	1/4W 470 ohm
R48	033-1031-15	1/10W 10k ohm
R49	033-1011-15	1/10W 100 ohm
R50	050-0140-74	1/32W 12k ohm x 4J
R60	033-2221-15	1/10W 2.2k ohm
TM1	073-0768-90	TERMINAL
X1	060-1527-90	33.8688MHz
PWB	039-2398-20	PWB(WITHOUT COMPONENT)

Sensor PWB(B4) section

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F
PT5	060-0252-01	PT4850F
PT6	060-0252-01	PT4850F
S1	013-7414-50	SPVG22
PWB	039-1956-00	PWB(WITHOUT COMPONENT)

PIM-FPC(B5) section

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

PIV-FPC(B7) section

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

Driver PWB(B6) section

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF Z
C2	163-1073-35	16V100uF
D1	001-0529-29	MA8051-M
IC1	051-6044-18	BA6920FP-Y
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/10W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm
R3	032-0104-59	1/4W 2.2 ohm
S2	013-7412-50	SPVG21
PWB	039-2242-00	PWB(WITHOUT COMPONENT)

L-Motor-FPC(B10) section

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

LED-L-PWB(B8) section

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800
LED4	001-7042-00	GL4800
PWB	039-1954-20	PWB(WITHOUT COMPONENT)

LED-R-PWB(B9) section

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800
LED6	001-7042-00	GL4800
PWB	039-1955-20	PWB(WITHOUT COMPONENT)

M/S-FPC(B11) section

REF No.	PART No.	DESCRIPTION
M2	SMA-185-101	SPINDLE
M3	SMA-191-100	SLED
S3	013-7414-50	SPVG22