

This exploded view diagram illustrates the assembly of the JBL 305P3 powered speaker. The components are organized into three main sections: the top enclosure, the internal driver assembly, and the bottom enclosure.

Top Enclosure Components:

- 1: Top enclosure panel (1 unit)
- 14: Top enclosure grille (1 unit)
- 17 x2: Screws for top enclosure (2 units)

Internal Driver Assembly Components:

- 6: Driver assembly (1 unit)
- 7: Driver assembly (1 unit)
- 8: Driver assembly (1 unit)
- 9: Driver assembly (1 unit)
- 10: Driver assembly (1 unit)
- 12: Driver assembly (1 unit)
- 16 x3: Screws for driver assembly (3 units)
- 18 x3: Screws for driver assembly (3 units)

Bottom Enclosure Components:

- 2: Bottom enclosure panel (1 unit)
- 4: Bottom enclosure grille (1 unit)
- 5: Bottom enclosure grille (1 unit)
- 16 x6: Screws for bottom enclosure (6 units)
- 16 x7: Screws for bottom enclosure (7 units)
- 17 x3: Screws for bottom enclosure (3 units)

Internal Components and Connections:

- IC7002: Integrated Circuit (1 unit)
- IC7005: Integrated Circuit (1 unit)
- CB8501: Capacitor (1 unit)
- DIN2002: DIN Connector (1 unit)
- JK5501: Jack (1 unit)
- DIN2001: DIN Connector (1 unit)
- RCA1, RCA2, RCA3, RCA4, RCA5, RCA6, RCA7: RCA Connectors (7 units)
- SW1002: Switch (1 unit)
- SK1001: Speaker (1 unit)
- SK7001: Speaker (1 unit)

MODEL	Symbol No.	Parts No.	Description
	1	-----	HEAT SINK, MAIN
	2	-----	CHAS,BOTTOM
	4	-----	CHAS SIDE-L
	5	-----	CHAS SIDE-R
	6	61E42264S01	LENS,BASE
	7	61E42267S01	LENS,DIFFUSION
	8	61E42265S01	LENS,LED
	9	33E42269S01	PLATE,SCALE
	10	61E42266S01	LENS,INDICATOR
	12	30E42238S01	CABLE,FLAT 14P
	13	07E42268S01	BKT,OPT
	14	33E42263S01	PLATE,NAME
	15	14E42464S01	INS,GAPPAD-DAC
	16	03E38698S01	SCR,M3X8(P)(BLK)
	17	03E41471S01	SCR,M2.6X8(P)(BLK)
	18	03E31890S01	SCR,M2.6X5(WP)(WHT)
	CB8501	09E40142S01	CONN,PWR 8P
	DIN2001	09T55071W02	CONN,TCP9389 GREY
	DIN2002	09T55071W02	CONN,TCP9389 GREY
	IC7002	51T45265W03	TORX193 -NS
	IC7005	51T45265W03	TORX193 -NS
	JK5501	09T55293Y03	JAC,HSJ6061-01-250DB
	RCA1	09E39714S01	RCA,JACK 2P-4P
	RCA2	09E39714S01	RCA,JACK 2P-4P
	RCA3	09E39714S01	RCA,JACK 2P-4P
	RCA4	09E39714S01	RCA,JACK 2P-4P
	RCA5	09E39714S01	RCA,JACK 2P-4P
	RCA6	09E39714S01	RCA,JACK 2P-4P
	RCA7	09E39714S01	RCA,JACK 2P-4P
	SK1001	09-09584Z01	SKT,TCX3142-110187EA
	SK7001	09E42272S01	CONN,USB-B 6P
	SW1002	40E42271S01	SW,TACT SKHHLWA010

Mark Model Code

#1 PXA-H800(North American) Only,


\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

Packing Method View

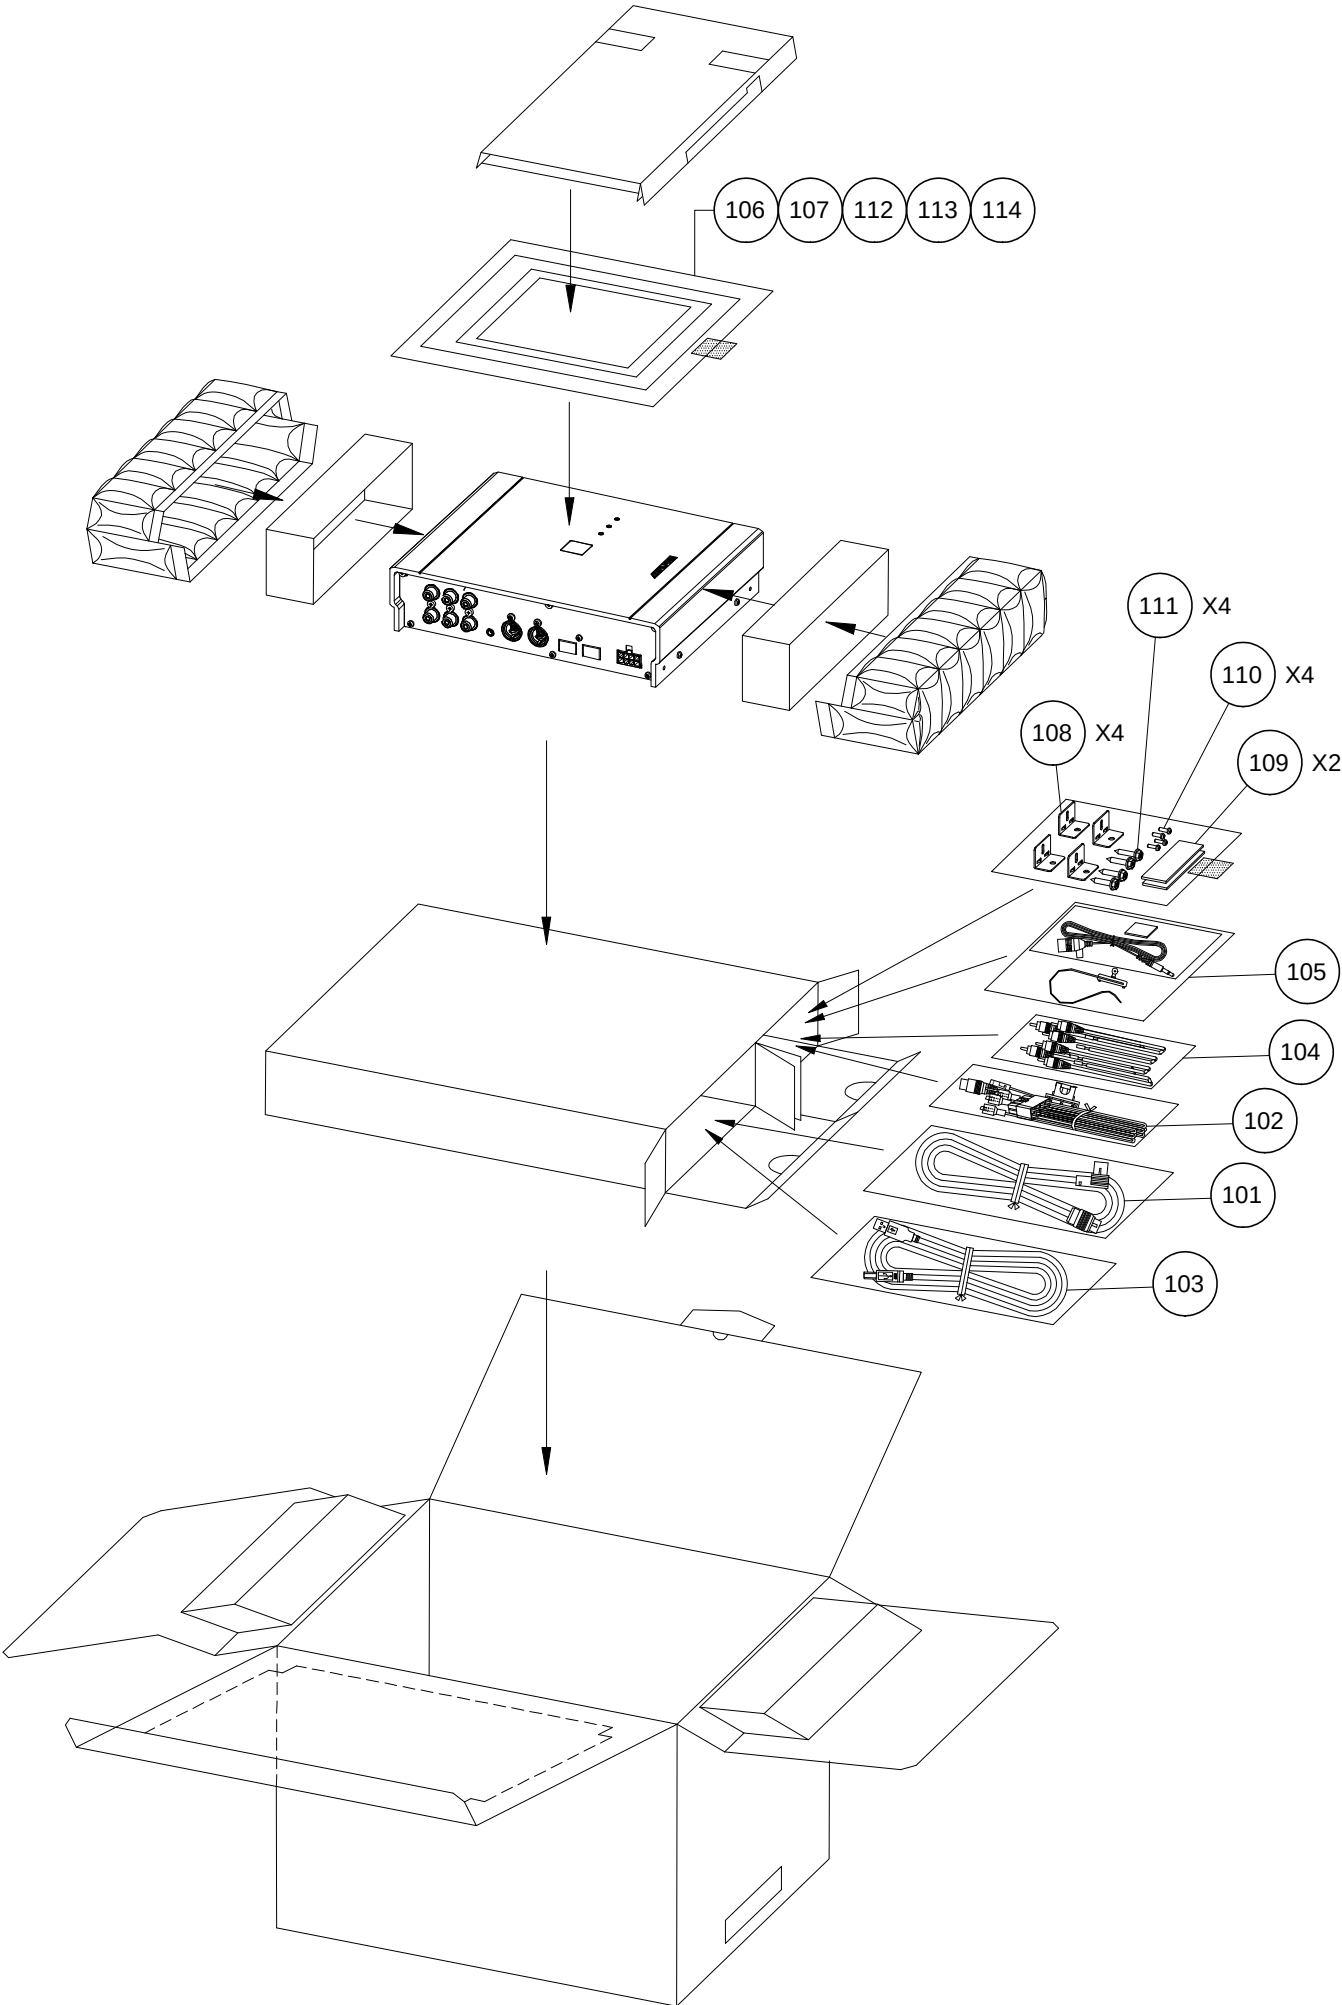

MODEL	Symbol No.	Parts No.	Description
	101	01E42376S01	CONN,ASSY 8P
	102	01E42377S01	ASSY,KIT WIRE 8P
	103	01E42378S01	ASSY,CABLE
	104	01E42379S01	ASSY,CABLE 2P
	105	01E42380S01	MIC,LYS-M9750
	106	99E42459S01	CD-ROM,Sound Manager
	107	99E42460S01	CD-ROM,SETUP(Audio)
	108	07E42416S01	BKT,MOUNT
	109	75E26094S01	TAPE,PAD-MAGIC
	110	03E42381S01	SCR,M3X6(B)(BLK)
	111	03E42382S01	SCR,M4X14(HW)(BLK)
#1	112	68-13530Z65	O/M H800 AOAM(Eng,Fra,Esp)
\$1	112	68-13530Z67	O/M H800 AOEU(Eng,Fra,Esp)
%1	112	68-13530Z70	O/M H800 AOAP
#1	113	68-13530Z66	I/M H800 AOAM
\$1	113	68-13530Z69	I/M H800 AOEU
%1	113	68-13530Z71	I/M H800 AOAP
\$1	114	68-13530Z68	O/M H800 AOEU(It,Ger,Sv)

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C1001	08E41024S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1002	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1003	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1004	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C1005	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1006	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C1007	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1008	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1009	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1010	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1011	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1012	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1013	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C1014	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1015	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1016	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C1017	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1018	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1019	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1020	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board			C1021	08E40853S01	CAP,CER. 4.7uF/10V
MAIN-P.W.Board			C1022	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1023	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1024	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1025	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1026	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board			C1027	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1028	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1029	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1030	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1031	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1032	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1033	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1034	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1035	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C1036	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C1037	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1038	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C1039	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C1040	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C1041	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1042	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C2001	08E42321S01	CAP,CER. 68pF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C2002	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2003	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2004	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2005	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2006	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2007	08E41024S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C2008	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C2009	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C2010	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2011	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2012	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2013	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2014	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2015	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2016	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2017	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2018	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2019	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2020	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2021	08E42321S01	CAP,CER. 68pF/50V
MAIN-P.W.Board			C2022	08E41024S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C2023	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2024	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2025	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2026	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2027	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C2028	08E28760S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C2029	08E28760S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C2030	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C2031	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C2032	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C2033	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C2034	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2035	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2036	08E41024S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C2037	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C2038	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3001	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C3002	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3003	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3004	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3005	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3006	08E42326S01	CAP,CER. 0.22uF/10V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3008	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3009	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3010	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3011	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3012	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3013	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3014	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3015	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3016	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3017	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3018	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3019	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3020	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3021	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3022	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3023	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3024	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3025	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3026	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3027	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3028	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3029	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3030	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3501	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C3502	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3503	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3504	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3505	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3506	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3508	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3509	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3510	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3511	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3512	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3513	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3514	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3515	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3516	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3517	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3518	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3519	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3520	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3521	08E36680S01	CAP,CER. 1000pF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3522	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3523	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3524	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3525	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3526	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3527	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3528	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C3529	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3530	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C4001	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4002	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4003	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4004	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4005	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4006	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4007	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4008	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4009	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4010	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4011	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4012	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4013	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4014	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4015	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4016	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4017	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4018	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4019	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4020	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4021	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4022	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4023	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4024	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4025	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4026	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4027	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4028	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4029	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4030	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4031	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4032	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4033	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4034	23E41346S01	CAP,CER. 0.22uF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C4035	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4036	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4037	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4038	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4039	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4040	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4041	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4042	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4043	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4044	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4045	08E42418S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C4046	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4047	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4048	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4049	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4050	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4051	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4052	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4053	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C4054	08E42422S01	METAL,100pF/50V
MAIN-P.W.Board			C5001	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5002	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5003	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5004	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5005	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5006	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5007	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5008	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5009	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5010	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5011	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5012	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5013	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5014	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5015	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5016	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5017	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5018	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5019	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5020	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5021	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5022	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5023	08E42424S01	METAL,470pF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5024	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5025	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5026	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5027	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C5028	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5029	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C5030	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5031	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5032	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5033	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5034	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5035	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5036	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5037	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5038	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5039	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5040	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5041	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5042	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5043	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5044	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5045	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5046	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5047	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5048	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5049	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5050	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5051	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C5052	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5053	08E42423S01	METAL,1500pF/50V
MAIN-P.W.Board			C5054	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C5501	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5502	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5503	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5504	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5505	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C5506	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5507	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5508	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5509	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5510	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C5511	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C5513	08E42327S01	CAP,CER. 10uF/10V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5515	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5516	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5517	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5518	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5519	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C5520	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C5522	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C5523	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C5524	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C5526	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C5527	08E40854S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C5528	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5529	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5530	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5531	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C5532	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C5533	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board			C5534	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C5535	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C5536	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5537	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C5538	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C5539	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5540	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5541	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C5542	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C5544	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C5545	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C5547	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C5548	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board			C5549	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board			C5550	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5552	08E40854S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C5553	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5554	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6001	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C6002	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C6003	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C6004	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C6005	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board			C6006	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6007	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6008	23E41346S01	CAP,CER. 0.22uF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C6009	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6010	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6011	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C6012	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board			C6013	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6014	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6015	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6016	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6017	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6018	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C6019	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board			C6020	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6021	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6022	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6023	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6024	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6025	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C6026	08E42322S01	CAP,CER. 10uF/16V
MAIN-P.W.Board			C6027	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6028	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6029	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6030	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6031	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6032	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6033	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6034	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board			C6035	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6036	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board			C6037	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6038	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6039	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6040	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board			C6041	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6042	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6043	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6044	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6045	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6046	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board			C6047	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6048	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6049	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board			C6050	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6051	08E42426S01	METAL,150pF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C6052	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6053	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6054	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board			C6055	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6056	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6057	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board			C6058	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6059	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6060	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6061	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6062	08E42427S01	METAL,560pF/50V
MAIN-P.W.Board			C6063	08E42426S01	METAL,150pF/50V
MAIN-P.W.Board			C6064	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C6065	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C6066	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C6067	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C6501	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6502	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C6503	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6504	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6505	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6506	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board			C6507	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board			C6508	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6509	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6510	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board			C6511	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board			C6512	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6513	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6514	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board			C6515	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6516	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board			C6517	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6518	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board			C6519	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6520	08E42425S01	METAL,330pF/50V
MAIN-P.W.Board			C6521	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6522	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C6523	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C6524	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C6525	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C6526	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C6527	08E42424S01	METAL,470pF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C6528	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C6529	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6530	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6531	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6532	08E42424S01	METAL,470pF/50V
MAIN-P.W.Board			C6533	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6534	08E42318S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C6535	08E42318S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C6536	08E42318S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C6537	08E42318S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C6538	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C6539	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C6540	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C6541	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C7001	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C7002	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C7003	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C7004	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C7005	08E42327S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C7006	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C7007	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C7008	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C7009	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C7010	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C7011	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board			C7012	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board			C7013	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board			C7014	08E38483S01	CAP,CER. 8pF/50V
MAIN-P.W.Board			C7015	08E42326S01	CAP,CER. 0.22uF/10V
MAIN-P.W.Board			C7016	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C7017	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C7018	08E42139S01	CAP,CER.100pF/50V
MAIN-P.W.Board			C7019	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C7020	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C7021	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C7022	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C7023	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8001	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8003	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8004	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8005	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8006	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8007	08E36680S01	CAP,CER. 1000pF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C8008	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8009	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8010	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8011	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8013	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8015	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8016	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8017	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8018	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C8019	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8020	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8021	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C8022	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C8024	08E36595S01	CAP,CER. 560pF/50V
MAIN-P.W.Board			C8025	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8026	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8027	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8029	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C8030	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8031	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8036	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8037	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C8040	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8041	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C8042	08E38423S01	CAP,CER. 0.033uF/25V
MAIN-P.W.Board			C8043	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C8044	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8045	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C8046	08E42419S01	CAP,CER. 4700pF/50V
MAIN-P.W.Board			C8048	08E42328S01	CAP,CER. 22uF/10V
MAIN-P.W.Board			C8049	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8050	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8051	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8052	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8053	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8054	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8055	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8056	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8057	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8058	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8501	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C8502	08E42421S01	CAP,CER. 4.7uF/25V
MAIN-P.W.Board			C8503	08E36472S01	CAP,CER. 0.1uF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C8504	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C8505	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C8506	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C8507	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C8508	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C8509	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8510	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C8511	08E34594S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C8512	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8513	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8514	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8515	08E42319S01	CAP,CER. 2200pF/50V
MAIN-P.W.Board			C8516	08E38598S01	CAP,CER. 0.068uF/16V
MAIN-P.W.Board			C8517	08E42320S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8518	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C8519	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C8520	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C8521	08E41036S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C8522	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C8523	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C8524	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C8525	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C8526	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C8528	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C8529	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8530	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8531	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8533	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8534	08E36565S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C8535	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8536	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8537	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C8538	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C8539	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C8540	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C8541	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8542	08E36472S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C8543	08E42420S01	CAP,CER. 240pF/50V
MAIN-P.W.Board			C8545	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8546	08E40854S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C8548	08E36680S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C8549	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C8551	23E41346S01	CAP,CER. 0.22uF/50V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C8552	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9008	23E41346S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			CB1001	09E42375S01	CONN,WTB53398 7P
MAIN-P.W.Board			CB7001	09E42235S01	CONN,FFC 14P
MAIN-P.W.Board			CB8501	09E40142S01	CONN,PWR 8P
MAIN-P.W.Board			D1001	48E37885S01	DIODE,DAN222
MAIN-P.W.Board			D1002	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D1003	48E42351S01	DIODE,RF101L2S
MAIN-P.W.Board			D1004	48E42351S01	DIODE,RF101L2S
MAIN-P.W.Board			D1005	48E42431S01	DIO,SHOTTKY DB2S314
MAIN-P.W.Board			D1006	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D2001	48E37885S01	DIODE,DAN222
MAIN-P.W.Board			D2002	48E42351S01	DIODE,RF101L2S
MAIN-P.W.Board			D2003	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D5501	48E37887S01	DIODE,DA227
MAIN-P.W.Board			D6501	48E37887S01	DIODE,DA227
MAIN-P.W.Board			D6502	48E37887S01	DIODE,DA227
MAIN-P.W.Board			D6503	48E37887S01	DIODE,DA227
MAIN-P.W.Board			D6504	48E37887S01	DIODE,DA227
MAIN-P.W.Board			D7001	48E42443S01	VARISTOR,EZJZ0V800AA
MAIN-P.W.Board			D7002	48E42443S01	VARISTOR,EZJZ0V800AA
MAIN-P.W.Board			D8501	48E37885S01	DIODE,DAN222
MAIN-P.W.Board			D8502	48E37887S01	DIODE,DA227
MAIN-P.W.Board			D8503	48E37887S01	DIODE,DA227
MAIN-P.W.Board			DIN2001	09T55071W02	CONN,TCP9389 GREY
MAIN-P.W.Board			DIN2002	09T55071W02	CONN,TCP9389 GREY
MAIN-P.W.Board			E1001	23E42342S01	CAP,ELY.220uF/6.3V
MAIN-P.W.Board			E2001	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E2002	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E2003	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E2004	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E2005	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E2006	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E2007	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E2008	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E3001	08E42329S01	CAP,CER. 150uF/6.3V
MAIN-P.W.Board			E4001	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4002	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4003	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4004	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4005	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4006	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4007	23E42336S01	CAP,ELY.10uF/16V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E4008	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4009	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4010	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4011	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E4012	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E5001	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E5002	23E42339S01	CAP,ELY.100uF/10V
MAIN-P.W.Board			E5003	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E5004	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E5005	23E42339S01	CAP,ELY.100uF/10V
MAIN-P.W.Board			E5006	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E5007	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E5008	23E42339S01	CAP,ELY.100uF/10V
MAIN-P.W.Board			E5009	23E42344S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E5010	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board			E5011	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board			E5012	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E5013	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E5014	23E42333S01	CAP,ELY.220uF/16V
MAIN-P.W.Board			E5501	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E5502	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E5503	23E42337S01	CAP,ELY.47uF/6.3V
MAIN-P.W.Board			E5504	23E42337S01	CAP,ELY.47uF/6.3V
MAIN-P.W.Board			E5505	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E5506	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E5507	23E42330S01	CAP,ELY.4.7uF/16V
MAIN-P.W.Board			E5508	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E5509	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E5510	23E42347S01	CAP,ELY.33uF/10V
MAIN-P.W.Board			E5511	23E42347S01	CAP,ELY.33uF/10V
MAIN-P.W.Board			E5512	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6001	23E42340S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E6002	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board			E6003	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board			E6004	23E42340S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E6005	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board			E6006	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board			E6007	23E42340S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E6008	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board			E6009	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board			E6010	23E42340S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E6011	23E42338S01	CAP,ELY.22uF/6.3V
MAIN-P.W.Board			E6012	23E42338S01	CAP,ELY.22uF/6.3V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E6013	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6014	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6015	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6016	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6017	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6018	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6019	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6020	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6021	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6022	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6023	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6024	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6025	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6026	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6027	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6028	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6029	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E6030	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E6501	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6502	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6503	23E42335S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E6504	23E42335S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E6505	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6506	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6507	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6508	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6509	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6510	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6511	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6512	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6513	23E42335S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E6514	23E42335S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E6515	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6516	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6517	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6518	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6519	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E6520	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E8001	23E42343S01	CAP,ELY.330uF/6.3V
MAIN-P.W.Board			E8002	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E8003	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E8004	23E42345S01	CAP,ELY.33uF/25V
MAIN-P.W.Board			E8006	23E42345S01	CAP,ELY.33uF/25V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E8007	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E8008	23E42347S01	CAP,ELY.33uF/10V
MAIN-P.W.Board			E8009	23E41341S01	CAP,ELY.47uF/25V
MAIN-P.W.Board			E8010	23E41338S01	CAP,ELY.47uF/16V
MAIN-P.W.Board			E8011	23E41341S01	CAP,ELY.47uF/25V
MAIN-P.W.Board			E8012	23E42345S01	CAP,ELY.33uF/25V
MAIN-P.W.Board			E8013	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E8014	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E8015	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E8501	23E42334S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E8502	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E8504	23E41342S01	CAP,ELY.470uF/25V
MAIN-P.W.Board			E8505	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E8506	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E8507	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E8508	23E41341S01	CAP,ELY.47uF/25V
MAIN-P.W.Board			E8509	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E8510	23E42336S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E8511	23E42270S01	CAP,ELY.3300uF/25V
MAIN-P.W.Board			E8514	23E41341S01	CAP,ELY.47uF/25V
MAIN-P.W.Board			E8515	23E42332S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E8516	23E42345S01	CAP,ELY.33uF/25V
MAIN-P.W.Board			E8517	23E42331S01	CAP,ELY.330uF/25V
MAIN-P.W.Board			E8518	23E42341S01	CAP,ELY.220uF/25V
MAIN-P.W.Board			E8519	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			F2001	65T75477Y13	FUSE,CCP2E 4.0A -CP
MAIN-P.W.Board			IC1001	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC1002	51E42444S01	IC,UPD70F3348GJ
MAIN-P.W.Board			IC1003	51E42362S01	IC,M24512-WM
MAIN-P.W.Board			IC1004	51E42359S01	IC,TC7SH04FU
MAIN-P.W.Board			IC1005	51E37932S01	IC,TC7SH00FU
MAIN-P.W.Board			IC1006	51E42360S01	IC,TC7SH32FU
MAIN-P.W.Board			IC1007	51E42447S01	IC,S-875077AUP
MAIN-P.W.Board			IC1008	51E42361S01	IC,S-80923CNMC
MAIN-P.W.Board			IC1009	51E42446S01	IC,M25P80-VMW
MAIN-P.W.Board			IC1010	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC1011	51E39130S01	IC,LM20BIM7
MAIN-P.W.Board			IC1012	51E42357S01	IC,TC74VHCT541AFT
MAIN-P.W.Board			IC1013	51E42358S01	IC,S-80960CNMC
MAIN-P.W.Board			IC2001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC2002	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC2003	51T55070W05	MB88385CPF-ER -SE9
MAIN-P.W.Board			IC2004	51E36570S01	IC,NJM2903V

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			IC2005	51E39397S01	IC,MC14538BFELG
MAIN-P.W.Board			IC2006	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC3001	51-16522Z01	ADSP-21365BSWZ -QT
MAIN-P.W.Board			IC3501	51-14103Z01	ADSP-21363BSWZ -QT
MAIN-P.W.Board			IC4001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC4002	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC4003	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC4004	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC4005	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC4006	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC4007	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC4008	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC4009	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC5001	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC5002	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC5003	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC5004	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC5005	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC5006	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC5007	51-16504Z01	CS2100CP-DZZR -SE2
MAIN-P.W.Board			IC5008	51-16506Z01	CS5366-DQZ -QT
MAIN-P.W.Board			IC5501	51-04219Z01	WM8782SEDS/R -SE6
MAIN-P.W.Board			IC5502	51-04219Z01	WM8782SEDS/R -SE6
MAIN-P.W.Board			IC5503	51-04219Z01	WM8782SEDS/R -SE6
MAIN-P.W.Board			IC5504	51E42365S01	IC,NJM2140RB1
MAIN-P.W.Board			IC5505	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC5506	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC5507	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC5508	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC5509	51E42451S01	IC,NJW1159V
MAIN-P.W.Board			IC5510	51E36474S01	IC,NJM78L05UA
MAIN-P.W.Board			IC5511	51E38065S01	IC,NJM79L05UA
MAIN-P.W.Board			IC6001	51-16668Z01	WM8742GEDS/RV -SE6
MAIN-P.W.Board			IC6002	51-16668Z01	WM8742GEDS/RV -SE6
MAIN-P.W.Board			IC6003	51-16668Z01	WM8742GEDS/RV -SE6
MAIN-P.W.Board			IC6004	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC6005	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC6006	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC6007	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC6008	51-16668Z01	WM8742GEDS/RV -SE6
MAIN-P.W.Board			IC6009	51-16504Z01	CS2100CP-DZZR -SE2
MAIN-P.W.Board			IC6501	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC6502	51E42366S01	IC,NJM4580R

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC6503	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC6504	51E42366S01	IC,NJM4580R
MAIN-P.W.Board			IC6505	51-16622Z01	CS3318-DQZ -QT
MAIN-P.W.Board			IC7001	51E42445S01	IC,AK4117VF
MAIN-P.W.Board			IC7002	51T45265W03	TORX193 -NS
MAIN-P.W.Board			IC7003	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC7004	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC7005	51T45265W03	TORX193 -NS
MAIN-P.W.Board			IC7006	51E42454S01	IC,MAX3420EEC
MAIN-P.W.Board			IC8001	51E42450S01	IC,BD3571FP
MAIN-P.W.Board			IC8002	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board			IC8003	51E42452S01	IC,LM2830ZMF
MAIN-P.W.Board			IC8004	51E42448S01	IC,BD3570FP
MAIN-P.W.Board			IC8006	51E40866S01	IC, BD9778HFP
MAIN-P.W.Board			IC8007	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board			IC8008	51E42455S01	IC,LM20143MHX
MAIN-P.W.Board			IC8501	51E42449S01	IC,BA4910FP
MAIN-P.W.Board			IC8502	51E42364S01	IC,BA9743AFV
MAIN-P.W.Board			IC8503	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board			IC8504	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board			IC8505	51E36642S01	IC,NJM2360AM
MAIN-P.W.Board			IC8506	51E42453S01	IC,LM5118MHX
MAIN-P.W.Board			IC8507	51E42363S01	IC,BD00C0AWFP
MAIN-P.W.Board			JK5501	09T55293Y03	JAC,HSJ6061-01-250DB
MAIN-P.W.Board			L1002	91E42349S01	FIL,EMI BLM21PG221SH1D
MAIN-P.W.Board			L1003	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board			L1004	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board			L1005	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board			L3001	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board			L3501	91E42348S01	FIL,EMI BLM18AG102SH1D
MAIN-P.W.Board			L6001	24E42373S01	COIL,IND. 10uH
MAIN-P.W.Board			L6002	24E42373S01	COIL,IND. 10uH
MAIN-P.W.Board			L6003	24E42373S01	COIL,IND. 10uH
MAIN-P.W.Board			L6004	24E42373S01	COIL,IND. 10uH
MAIN-P.W.Board			L7001	24E42374S01	COIL,IND. 47uH
MAIN-P.W.Board			L7002	24E42374S01	COIL,IND. 47uH
MAIN-P.W.Board			L8001	24E42372S01	COIL,IND. 3.3uH
MAIN-P.W.Board			L8003	24E42368S01	COIL,IND. 100uH
MAIN-P.W.Board			L8004	24E42372S01	COIL,IND. 3.3uH
MAIN-P.W.Board			L8006	24E42371S01	COIL,IND. 1.5uH
MAIN-P.W.Board			L8501	24E42370S01	COIL,IND. 220uH
MAIN-P.W.Board			L8502	24E42370S01	COIL,IND. 220uH
MAIN-P.W.Board			L8503	24E42367S01	COIL,IND. 22uH

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			L8505	24E42369S01	COIL,IND. 470uH
MAIN-P.W.Board			L9001	24E42372S01	COIL,IND. 3.3uH
MAIN-P.W.Board			Q1001	48E41053S01	TR,FMC2
MAIN-P.W.Board			Q1002	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board			Q1003	48E42354S01	TR,DTA123YUA
MAIN-P.W.Board			Q1004	48E42355S01	TR,DTC124EUA
MAIN-P.W.Board			Q2001	48E42355S01	TR,DTC124EUA
MAIN-P.W.Board			Q2002	48E41053S01	TR,FMC2
MAIN-P.W.Board			Q4001	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q4002	48E42354S01	TR,DTA123YUA
MAIN-P.W.Board			Q4003	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board			Q4004	48E42354S01	TR,DTA123YUA
MAIN-P.W.Board			Q4005	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board			Q4006	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board			Q4007	48E42354S01	TR,DTA123YUA
MAIN-P.W.Board			Q4008	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q4009	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q4010	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q4011	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q4012	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q6501	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q6502	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q6503	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q6504	48E42172S01	TR,IMX25
MAIN-P.W.Board			Q6505	48E42437S01	TR,DTC114YUA
MAIN-P.W.Board			Q6506	48E42440S01	TR,DTA114YUA
MAIN-P.W.Board			Q7003	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board			Q7004	48E42353S01	TR,DTA143XUA
MAIN-P.W.Board			Q8001	48E42438S01	TR,DTC124TUA
MAIN-P.W.Board			Q8003	48E42437S01	TR,DTC114YUA
MAIN-P.W.Board			Q8004	48E42434S01	TR,2SA2018
MAIN-P.W.Board			Q8006	48E42434S01	TR,2SA2018
MAIN-P.W.Board			Q8501	48E42438S01	TR,DTC124TUA
MAIN-P.W.Board			Q8502	48E42436S01	TR,PBSS5350X
MAIN-P.W.Board			Q8503	48E42353S01	TR,DTA143XUA
MAIN-P.W.Board			Q8504	48E42437S01	TR,DTC114YUA
MAIN-P.W.Board			Q8505	48E41053S01	TR,FMC2
MAIN-P.W.Board			Q8506	48E37895S01	TR,IMZ4108
MAIN-P.W.Board			Q8507	48E37895S01	TR,IMZ4108
MAIN-P.W.Board			Q8508	48E42436S01	TR,PBSS5350X
MAIN-P.W.Board			Q8509	48E42437S01	TR,DTC114YUA
MAIN-P.W.Board			Q8510	48E42441S01	FET,RSR020P03
MAIN-P.W.Board			Q8511	48E42441S01	FET,RSR020P03

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q8512	48E42437S01	TR,DTC114YUA
MAIN-P.W.Board			Q8513	48E42353S01	TR,DTA143XUA
MAIN-P.W.Board			Q8519	48E42435S01	TR,2SC4672
MAIN-P.W.Board			Q8520	48E42436S01	TR,PBSS5350X
MAIN-P.W.Board			Q8521	48E42439S01	TR,DTC143EUA
MAIN-P.W.Board			Q8522	48E42433S01	TR,KTA2014
MAIN-P.W.Board			Q8523	48E42439S01	TR,DTC143EUA
MAIN-P.W.Board			Q8524	48E42356S01	TR,DTC143XUA
MAIN-P.W.Board			Q8525	48E42442S01	FET,RSD050N06
MAIN-P.W.Board			Q8526	48E42442S01	FET,RSD050N06
MAIN-P.W.Board			Q8528	48E42432S01	TR,2SD2114K
MAIN-P.W.Board			Q8529	48E41053S01	TR,FMC2
MAIN-P.W.Board			R1001	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1002	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1003	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1004	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1005	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1006	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1007	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1008	06E35366S01	RES,CF. 4.7K-1/4W
MAIN-P.W.Board			R1009	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1010	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1011	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1012	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1013	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1014	06E42384S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1015	06E42299S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1016	06E42281S01	RES,CF. 68K-1/16W
MAIN-P.W.Board			R1017	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1018	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1019	06E42279S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R1020	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1021	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1022	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1023	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1024	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1025	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1026	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1027	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1028	06E42384S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1029	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board			R1030	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1031	06E36460S01	RES,CF. 330-1/4W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1032	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1033	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1034	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1035	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1036	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1037	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1038	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1039	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1040	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1041	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1042	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1043	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1044	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1045	06E42398S01	RES,CF. 390-1/16W
MAIN-P.W.Board			R1046	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1047	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1048	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1049	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1050	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1051	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1052	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1053	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R1054	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R1058	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1059	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1060	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1061	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1062	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1063	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1064	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1065	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1066	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1067	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1068	06E42288S01	RES,CF. 470-1/16W
MAIN-P.W.Board			R1069	06E42288S01	RES,CF. 470-1/16W
MAIN-P.W.Board			R1070	06E42389S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R1071	06E42389S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R1072	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1073	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1074	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1075	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1076	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1077	06E40828S01	RES,CF. 0-1/10W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1078	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1080	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1081	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R1083	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1085	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1086	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1087	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board			R1088	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1089	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1090	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1091	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1092	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1093	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1094	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1095	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1096	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1097	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1098	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1099	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1100	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1101	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1102	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1103	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1104	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1105	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1106	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1107	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1108	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1109	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1110	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1111	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1112	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1113	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1114	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1115	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1117	06E41386S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1118	06E42306S01	RES,CF. 1.1K-1/4W
MAIN-P.W.Board			R1119	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1120	06E41386S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1121	06E42384S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1122	06E42386S01	RES,CF. 120K-1/16W
MAIN-P.W.Board			R1123	06E42389S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R1124	06E42296S01	RES,CF. 47K-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1125	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1126	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1127	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1128	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1129	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1130	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1132	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1133	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1134	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1135	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1136	06E37253S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1137	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1139	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1140	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1141	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R1142	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R1143	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1144	06E42133S01	RES,CF. 100K-1/16W
MAIN-P.W.Board		\$1	R1145	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		#1	R1146	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board		%1	R1146	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R1147	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1148	06E42288S01	RES,CF. 470-1/16W
MAIN-P.W.Board			R1149	06E42299S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1151	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1152	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R1153	06E42282S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1154	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2001	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R2002	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R2003	06E35359S01	RES,CF. 160-1/4W
MAIN-P.W.Board			R2004	06E35359S01	RES,CF. 160-1/4W
MAIN-P.W.Board			R2005	06E35359S01	RES,CF. 160-1/4W
MAIN-P.W.Board			R2006	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2007	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2008	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2009	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2010	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board			R2011	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board			R2012	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2013	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2014	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2015	06E42284S01	RES,CF. 22K-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R2016	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2017	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2018	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2019	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2020	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board			R2021	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board			R2022	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2023	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2024	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2025	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R2026	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R2027	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R2028	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R2029	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R2030	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R2031	06E35359S01	RES,CF. 160-1/4W
MAIN-P.W.Board			R2032	06E42403S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2033	06E42403S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2034	06E42294S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R2035	06E42294S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R2036	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2037	06E42277S01	RES,CF. 15K-1/16W
MAIN-P.W.Board			R2038	06E42394S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R2039	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R2040	06E42401S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R2041	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R2042	06E42290S01	RES,CF. 330K-1/16W
MAIN-P.W.Board			R2043	06E42385S01	RES,CF. 470K-1/16W
MAIN-P.W.Board			R2044	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2045	06E35366S01	RES,CF. 4.7K-1/4W
MAIN-P.W.Board			R2046	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2047	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R2048	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R2049	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R2050	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R2051	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R2052	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3001	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3002	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3003	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3004	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3005	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3006	06E42274S01	RES,CF. 100-1/10W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3007	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3009	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3010	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3011	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3012	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3013	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3014	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3015	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3016	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3017	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3018	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3019	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3020	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3021	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3023	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3024	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3025	06E40835S01	RES,CF. 1.5K-1/10W
MAIN-P.W.Board			R3026	06E40838S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R3027	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3028	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3029	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3030	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3032	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3033	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3037	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3038	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3039	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R3040	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R3501	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3502	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3503	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3504	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3505	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3506	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3507	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3508	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3509	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3510	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3511	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3512	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3514	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3515	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3516	06E40835S01	RES,CF. 1.5K-1/10W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3517	06E40838S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R3518	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3519	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3520	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3521	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3523	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R3527	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3528	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R3529	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R4001	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4002	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4003	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4004	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4005	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4006	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4007	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4008	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4009	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4010	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4011	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4012	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4013	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4014	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4015	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4016	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4017	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4018	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4019	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4020	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4021	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4022	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4023	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R4024	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R4025	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R4026	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4027	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4028	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4029	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4030	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4031	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4032	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4033	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4034	06E42314S01	RES,SOUND. 3.9K-1/4W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R4035	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4036	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4037	06E42405S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4038	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board			R4039	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4040	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4041	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4042	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4043	06E42406S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4044	06E42314S01	RES,SOUND. 3.9K-1/4W
MAIN-P.W.Board			R4045	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4046	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board			R4047	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4048	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4049	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4050	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4051	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4052	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4053	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4054	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4055	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4056	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4057	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board			R4058	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4059	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4060	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4061	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board			R4062	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4063	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4064	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board			R4065	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4066	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4067	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4068	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4069	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4070	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4071	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4072	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4073	06E42414S01	RES,SOUND. 1.2K-1/10W
MAIN-P.W.Board			R4074	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4075	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4076	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4077	06E42410S01	RES,SOUND. 10K-1/10W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4078	06E42310S01	RES,SOUND. 27K-1/10W
MAIN-P.W.Board			R4079	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4080	06E42410S01	RES,SOUND. 10K-1/10W
MAIN-P.W.Board			R4081	06E42411S01	RES,SOUND. 220K-1/10W
MAIN-P.W.Board			R4082	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4083	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4084	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4085	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4086	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4087	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4088	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4089	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4090	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4091	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4092	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R4093	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5001	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5002	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5003	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5004	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5005	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5006	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5007	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5008	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5009	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R5010	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5011	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5012	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5013	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5014	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5015	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5016	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5017	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5018	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R5019	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5020	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5021	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5022	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5023	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5024	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5025	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5026	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5027	06E42307S01	RES,SOUND. 1.5K-1/10W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5028	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5029	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R5030	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5031	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5032	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5033	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5034	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5035	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5036	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5037	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5038	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R5039	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5040	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5041	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5042	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5043	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5044	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5045	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5046	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5047	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5048	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5049	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R5050	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5051	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5052	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5053	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5054	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5055	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5056	06E42307S01	RES,SOUND. 1.5K-1/10W
MAIN-P.W.Board			R5057	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5058	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R5059	06E42315S01	RES,SOUND. 91-1/10W
MAIN-P.W.Board			R5060	06E42316S01	RES,SOUND. 1.1K-1/10W
MAIN-P.W.Board			R5061	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5062	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5063	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R5065	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board			R5066	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R5067	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R5068	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R5069	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5070	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5071	06E42293S01	RES,CF. 100-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R5072	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5073	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5074	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R5075	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5076	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5077	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5078	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5079	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5080	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5081	06E42409S01	RES,SOUND. 5.6K-1/10W
MAIN-P.W.Board			R5501	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5502	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5503	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5504	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5505	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5506	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5507	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5508	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5509	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5510	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5511	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board			R5512	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5513	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5514	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5515	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5516	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5517	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5518	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5519	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5520	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board			R5521	06E42274S01	RES,CF. 100-1/10W
MAIN-P.W.Board			R5522	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R5523	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R5524	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5525	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5526	06E40824S01	RES,CF. 2.2K-1/10W
MAIN-P.W.Board			R5527	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board			R5528	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5529	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R5530	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5531	06E42300S01	RES,CF. 330-1/16W
MAIN-P.W.Board			R5532	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R5533	06E42284S01	RES,CF. 22K-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5534	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board			R5535	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5536	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5537	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5538	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5539	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5540	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5541	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5542	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5543	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5544	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5545	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5546	06E40884S01	RES,CF. 120-1/10W
MAIN-P.W.Board			R5547	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R5548	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R5549	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board			R5550	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5551	06E40319S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board			R5552	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R5553	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R5554	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R5555	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R5558	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5559	06E42285S01	RES,CF. 24K-1/16W
MAIN-P.W.Board			R6001	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R6002	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R6007	06E40989S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R6008	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board			R6009	06E40989S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R6010	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board			R6011	06E40989S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R6012	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board			R6025	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6026	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6027	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board			R6028	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6029	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6030	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6031	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6032	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6033	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6034	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6035	06E42412S01	RES,SOUND. 2.2K-1/10W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R6036	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6037	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6038	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board			R6039	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6040	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6041	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board			R6042	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6043	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6044	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6045	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6046	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6047	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6048	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6049	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6050	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6051	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6052	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board			R6053	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6054	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6055	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board			R6056	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6057	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6058	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6059	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6060	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6061	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6062	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6063	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6064	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6065	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6066	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board			R6067	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6068	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6069	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board			R6070	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6071	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6072	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6073	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6074	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6075	06E42413S01	RES,SOUND. 12K-1/10W
MAIN-P.W.Board			R6076	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6077	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6078	06E42412S01	RES,SOUND. 2.2K-1/10W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R6079	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6080	06E42408S01	RES,SOUND. 47-1/10W
MAIN-P.W.Board			R6083	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R6084	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board			R6085	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board			R6086	06E42276S01	RES,CF. 47R-1/16W
MAIN-P.W.Board			R6501	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R6502	06E42293S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R6503	06E42294S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R6504	06E42294S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R6505	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board			R6506	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6507	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6508	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board			R6509	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board			R6510	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6511	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board			R6512	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6513	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6516	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6517	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board			R6518	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6519	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board			R6520	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6521	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6524	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6525	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board			R6526	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6527	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board			R6528	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6529	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6532	06E42412S01	RES,SOUND. 2.2K-1/10W
MAIN-P.W.Board			R6533	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board			R6534	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6535	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board			R6536	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board			R6537	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board			R6538	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board			R6539	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board			R6540	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board			R6541	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board			R6542	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board			R6543	06E42312S01	RES,SOUND. 100-1/4W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R6544	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board			R6545	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board			R6546	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board			R6547	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board			R6548	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board			R6549	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board			R6550	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board			R6551	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board			R6552	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board			R6553	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board			R6554	06E42311S01	RES,SOUND. 100K-1/10W
MAIN-P.W.Board			R6555	06E42415S01	RES,SOUND. 18K-1/10W
MAIN-P.W.Board			R6556	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R6557	06E42312S01	RES,SOUND. 100-1/4W
MAIN-P.W.Board			R6558	06E42313S01	RES,SOUND. 220-1/4W
MAIN-P.W.Board			R6559	06E42317S01	RES,SOUND. 51K-1/10W
MAIN-P.W.Board			R6560	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R6561	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R6562	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R6563	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R6564	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R6565	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R6566	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R6567	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R6568	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R6569	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R7001	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R7002	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R7003	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R7004	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R7005	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R7006	06E42404S01	RES,CF. 12K-1/16W
MAIN-P.W.Board			R7007	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R7008	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R7009	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R7010	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R7011	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R7012	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R7013	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R7014	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R7015	06E36589S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R7016	06E36589S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R7017	06E42287S01	RES,CF. 47K-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R7018	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R7019	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R7020	06E42292S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R7021	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R7022	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R7023	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R7024	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R7026	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R7027	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board			R7028	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board			R7029	06E40830S01	RES,CF. 10-1/10W
MAIN-P.W.Board			R7030	06E40883S01	RES,CF. 33-1/10W
MAIN-P.W.Board			R7031	06E42384S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R8001	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8002	06E40834S01	RES,CF. 1K-1/10W
MAIN-P.W.Board			R8003	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8004	06E42299S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R8005	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board			R8006	06E42281S01	RES,CF. 68K-1/16W
MAIN-P.W.Board			R8007	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R8008	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R8010	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R8011	06E42396S01	RES,CF. 15K-1/16W
MAIN-P.W.Board			R8012	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R8013	06E42291S01	RES,CF. 330K-1/16W
MAIN-P.W.Board			R8014	06E42291S01	RES,CF. 330K-1/16W
MAIN-P.W.Board			R8015	06E40823S01	RES,CF. 390-1/10W
MAIN-P.W.Board			R8016	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R8017	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R8018	06E40843S01	RES,CF. 150K-1/10W
MAIN-P.W.Board			R8019	06E40840S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R8020	06E40834S01	RES,CF. 1K-1/10W
MAIN-P.W.Board			R8021	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8022	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board			R8030	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R8032	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R8033	06E35291S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R8034	06E42387S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R8035	06E42390S01	RES,CF. 56K-1/16W
MAIN-P.W.Board			R8036	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8037	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8038	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8039	06E42295S01	RES,CF. 10K-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R8040	06E42302S01	RES,CF. 1-1/16W
MAIN-P.W.Board			R8041	06E42391S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R8042	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8043	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R8044	06E40319S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board			R8045	06E42391S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R8046	06E40747S01	RES,CF. 91K-1/16W
MAIN-P.W.Board			R8049	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R8050	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R8058	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R8062	06E35405S01	RES,CF. 120K-1/16W
MAIN-P.W.Board			R8063	06E34814S01	RES,CF. 51K-1/16W
MAIN-P.W.Board			R8064	06E42273S01	RES,CF. 390K-1/16W
MAIN-P.W.Board			R8065	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R8501	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R8502	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R8503	06E40319S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board			R8504	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R8505	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R8506	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R8507	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R8508	06E40322S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R8509	06E40322S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R8510	06E40747S01	RES,CF. 91K-1/16W
MAIN-P.W.Board			R8511	06E40841S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R8512	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R8513	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R8514	06E42400S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R8515	06E40830S01	RES,CF. 10-1/10W
MAIN-P.W.Board			R8516	06E40830S01	RES,CF. 10-1/10W
MAIN-P.W.Board			R8517	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R8518	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R8519	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R8520	06E36460S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R8521	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R8522	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R8523	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R8524	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R8525	06E42298S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R8526	06E40325S01	RES,CF. 39K-1/16W
MAIN-P.W.Board			R8527	06E40325S01	RES,CF. 39K-1/16W
MAIN-P.W.Board			R8528	06E42289S01	RES,CF. 62K-1/16W
MAIN-P.W.Board			R8529	06E42289S01	RES,CF. 62K-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R8530	06E42297S01	RES,CF. 100K-1/10W
MAIN-P.W.Board			R8531	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R8532	06E42309S01	RES,SOUND. 22K-1/10W
MAIN-P.W.Board			R8533	06E42308S01	RES,SOUND. 3.3K-1/10W
MAIN-P.W.Board			R8534	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R8535	06E42275S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R8536	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8538	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R8539	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R8540	06E42286S01	RES,CF. 39K-1/16W
MAIN-P.W.Board			R8541	06E42280S01	RES,CF. 1.8K-1/16W
MAIN-P.W.Board			R8542	06E35349S01	RES,CF. 1-1/4W
MAIN-P.W.Board			R8543	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board			R8544	06E42299S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R8545	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8546	06E35349S01	RES,CF. 1-1/4W
MAIN-P.W.Board			R8547	06E35349S01	RES,CF. 1-1/4W
MAIN-P.W.Board			R8548	06E30006S01	RES,CF. 240-1/4W
MAIN-P.W.Board			R8549	06E35349S01	RES,CF. 1-1/4W
MAIN-P.W.Board			R8550	06E42389S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R8551	06E42279S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R8552	06E42388S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R8554	06E41379S01	RES,CF. 13K-1/16W
MAIN-P.W.Board			R8555	06E37204S01	RES,CF. 180-1/4W
MAIN-P.W.Board			R8556	06E31183S01	RES,CF. 22K-1/4W
MAIN-P.W.Board			R8557	06E35366S01	RES,CF. 4.7K-1/4W
MAIN-P.W.Board			R8558	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8559	06E42407S01	RES,CF. 5.6-1/4W
MAIN-P.W.Board			R8560	06E42394S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R8561	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8562	06E35365S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R8563	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R8564	06E36124S01	RES,CF. 1.8K-1/4W
MAIN-P.W.Board			R8566	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R8569	06E41386S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R8570	06E42306S01	RES,CF. 1.1K-1/4W
MAIN-P.W.Board			R8571	06E35358S01	RES,CF. 100-1/4W
MAIN-P.W.Board			R8572	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8573	06E42404S01	RES,CF. 12K-1/16W
MAIN-P.W.Board			R8574	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R8577	06E42392S01	RES,CF. 150K-1/16W
MAIN-P.W.Board			R8578	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board			R8579	06E42399S01	RES,CF. 390-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R8581	06E42303S01	RES,CF. 0.024-0.5W
MAIN-P.W.Board			R8582	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8583	06E35400S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R8584	06E42387S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R8585	06E42278S01	RES,CF. 33K-1/16W
MAIN-P.W.Board			R8586	06E42393S01	RES,CF. 5.6K-1/16W
MAIN-P.W.Board			R8587	06E42397S01	RES,CF. 82-1/16W
MAIN-P.W.Board			R8588	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R8590	06E40828S01	RES,CF. 0-1/10W
MAIN-P.W.Board			R8591	06E42383S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R8592	06E42404S01	RES,CF. 12K-1/16W
MAIN-P.W.Board			R8593	06E42403S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R8594	06E42277S01	RES,CF. 15K-1/16W
MAIN-P.W.Board			R8595	06E42227S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R8596	06E42283S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R8597	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8598	06E42284S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R8599	06E42304S01	RES,CF. 82K-1/8W
MAIN-P.W.Board			R8600	06E42305S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R8601	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R8602	06E42395S01	RES,CF. 12K-1/16W
MAIN-P.W.Board			R8603	06E36124S01	RES,CF. 1.8K-1/4W
MAIN-P.W.Board			R8604	06E40829S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R8605	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R8606	06E42279S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R8607	06E42295S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R8610	06E35243S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board			RCA1	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board			RCA2	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board			RCA3	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board			RCA4	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board			RCA5	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board			RCA6	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board			RCA7	09E39714S01	RCA,JACK 2P-4P
MAIN-P.W.Board			SD8001	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD8002	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD8003	48E41050S01	DIODE,SHOTTKYRB050L-40
MAIN-P.W.Board			SD8501	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD8502	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD8503	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD8504	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD8505	48E42352S01	DIO,SHOTTKY STPS5H100
MAIN-P.W.Board			SD8506	48E42352S01	DIO,SHOTTKY STPS5H100

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			SD8507	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SD8508	48E40860S01	DIO,SHOTTKY□@RB160M
MAIN-P.W.Board			SK1001	09-09584Z01	SKT,TCX3142-110187EA
MAIN-P.W.Board			SK7001	09E42272S01	CONN,USB-B 6P
MAIN-P.W.Board			SW1002	40E42271S01	SW,TACT SKHHLWA010
MAIN-P.W.Board			T8501	25-15527Z01	CHOKE,ALD-16-8 -DB
MAIN-P.W.Board			XL1001	91-10720Z02	XTL,NX8045GB 4.0M-E5
MAIN-P.W.Board			XL2001	91-10720Z02	XTL,NX8045GB 4.0M-E5
MAIN-P.W.Board			XL3001	91E42458S01	OSC CLOCK,DSO221SH24.5
MAIN-P.W.Board			XL3501	91E42458S01	OSC CLOCK,DSO221SH24.5
MAIN-P.W.Board			XL5001	91E42457S01	OSC CLOCK,DSO221SH33.2
MAIN-P.W.Board			XL6001	91E42457S01	OSC CLOCK,DSO221SH33.2
MAIN-P.W.Board			XL7001	91-15988Z01	XTL,NX3225GA 11.2-CP
MAIN-P.W.Board			XL7002	91-15988Z02	XTL,NX3225GA 12.0-CP
MAIN-P.W.Board			Z5501	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board			Z5502	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board			Z5503	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board			Z5504	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board			Z5505	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board			Z5506	91E40215S01	FIL,EMI BK1608HM102
MAIN-P.W.Board			Z6001	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6002	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6003	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6004	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6005	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6006	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6007	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6008	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6009	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6010	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6011	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6012	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6013	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6014	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6015	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			Z6016	91E42456S01	FIL,EMI BK1608LL121
MAIN-P.W.Board			ZD1001	48E42350S01	DIO,ZENER LUDZ3.9B
MAIN-P.W.Board			ZD1002	48E42350S01	DIO,ZENER LUDZ3.9B
MAIN-P.W.Board			ZD1003	48E42350S01	DIO,ZENER LUDZ3.9B
MAIN-P.W.Board			ZD1004	48E42430S01	DIO,ZENER LUDZ20B
MAIN-P.W.Board			ZD1006	48E38089S01	DIODE,ZENER UDZS5.6B
MAIN-P.W.Board			ZD1007	48E42350S01	DIO,ZENER LUDZ3.9B
MAIN-P.W.Board			ZD2001	48E42429S01	DIODE,ZENER UDZS6.8B

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			ZD2002	48E42429S01	DIODE,ZENER UDZS6.8B
MAIN-P.W.Board			ZD2003	48E38089S01	DIODE,ZENER UDZS5.6B
MAIN-P.W.Board			ZD8501	48E38089S01	DIODE,ZENER UDZS5.6B
MAIN-P.W.Board			ZD8502	48E41047S01	DIO,ZENER Z5W27V
LED-P.W.Board			C9001	08E42324S01	CAP,CER. 1000pF/50V
LED-P.W.Board			C9002	08E42324S01	CAP,CER. 1000pF/50V
LED-P.W.Board			C9003	08E42324S01	CAP,CER. 1000pF/50V
LED-P.W.Board			C9004	08E42324S01	CAP,CER. 1000pF/50V
LED-P.W.Board			C9005	23E41346S01	CAP,CER. 0.22uF/50V
LED-P.W.Board			C9006	23E41346S01	CAP,CER. 0.22uF/50V
LED-P.W.Board			CB9001	09E42235S01	CONN,FFC 14P
LED-P.W.Board			IC9001	51E38054S01	IC,TC74VHC08FT
LED-P.W.Board			LD9001	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD9002	48E42428S01	LED,RED
LED-P.W.Board			LD9003	48E42428S01	LED,RED
LED-P.W.Board			LD9004	48E42428S01	LED,RED
LED-P.W.Board			Q9001	48E42356S01	TR,DTC143XUA
LED-P.W.Board			Q9002	48E42356S01	TR,DTC143XUA
LED-P.W.Board			Q9003	48E42356S01	TR,DTC143XUA
LED-P.W.Board			Q9004	48E42356S01	TR,DTC143XUA
LED-P.W.Board			R9002	06E37090S01	RES,CF. 1.2K-1/4W
LED-P.W.Board			R9003	06E36227S01	RES,CF. 3.9K-1/4W
LED-P.W.Board			R9005	06E36227S01	RES,CF. 3.9K-1/4W
LED-P.W.Board			R9008	06E36227S01	RES,CF. 3.9K-1/4W
LED-P.W.Board			R9009	06E42287S01	RES,CF. 47K-1/16W
LED-P.W.Board			R9010	06E42287S01	RES,CF. 47K-1/16W
LED-P.W.Board			R9011	06E42287S01	RES,CF. 47K-1/16W
LED-P.W.Board			R9012	06E42287S01	RES,CF. 47K-1/16W
LED-P.W.Board			R9013	06E42287S01	RES,CF. 47K-1/16W

Mark Model Code

#1 PXA-H800(North American) Only,

\$1 PXA-H800(European) Only,

%1 PXA-H800(General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.