



■ EXPLODED VIEW · PARTS LIST:

DCP Section

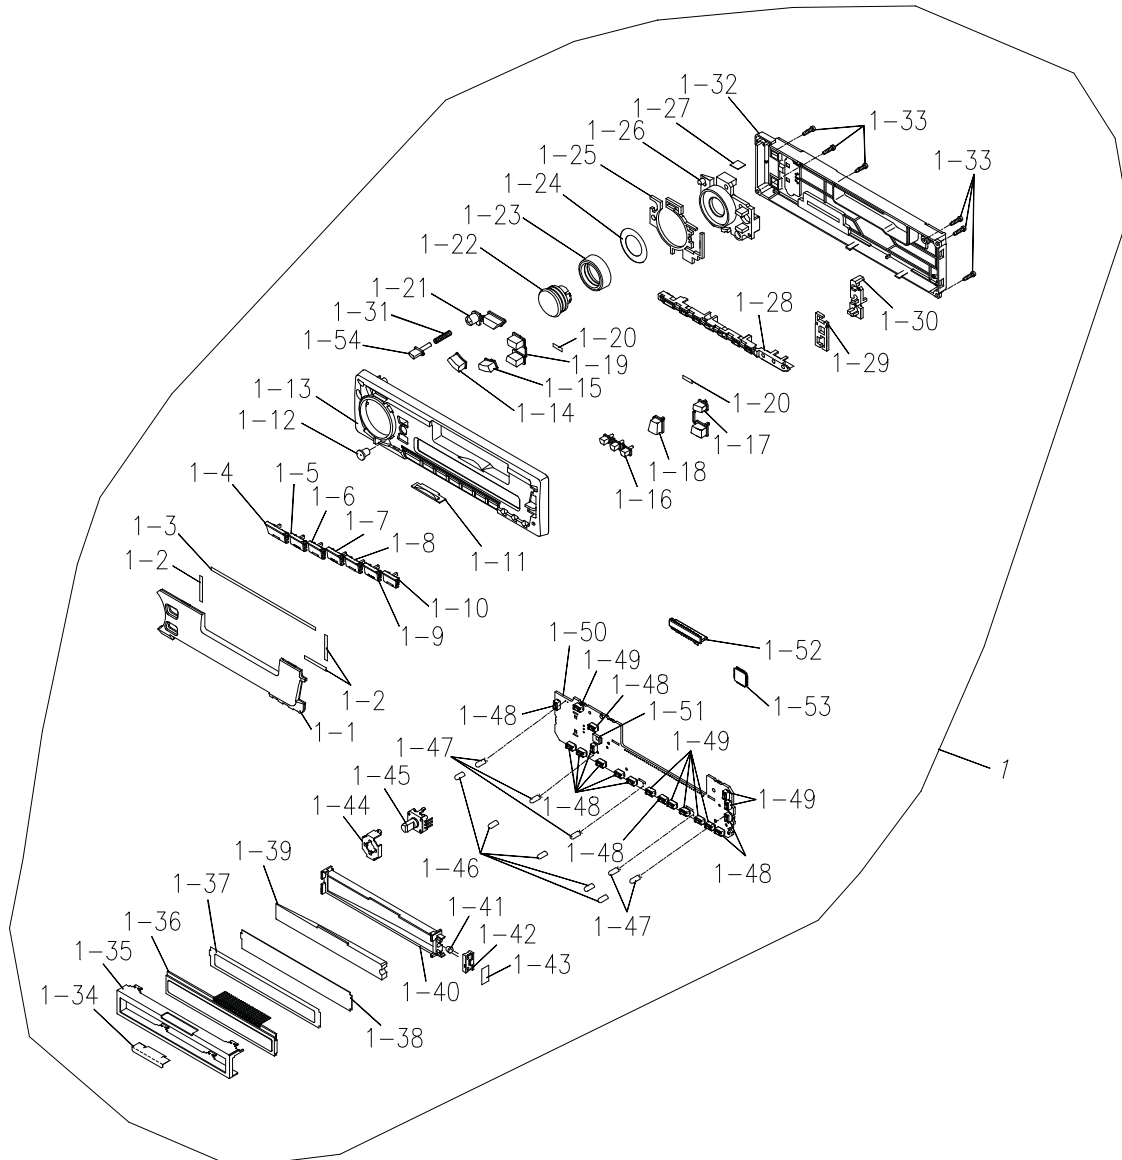

NO.	PARTS NO.	DESCRIPTION	Q'TY	NO.	PARTS NO.	DESCRIPTION	Q'TY
1	DCP-338-600	DCP ASSY(PE-1712B)	1	1-22	380-5512-00	KNOB(PE-1712B/K)	1
	DCP-339-600	DCP ASSY(PE-1713B)	1		380-5512-01	KNOB(PE-1713B)	1
1-1	373-0955-01	DIAL-CVR(PE-1712B/K)	1	1-23	345-8553-00	RUBBER PART	1
	373-0955-02	DIAL-CVR(PE-1713B)	1	1-24	347-6506-00	SHADE	1
1-2	347-6509-00	DOUBLE FACE	3	1-25	345-8617-00	SPONGE	1
1-3	347-6505-00	DOUBLE FACE	1	1-26	335-6518-00	ILLUMI PLATE	1
1-4	382-6129-00	BUTTON(PE-1712B/K)	1	1-27	347-6525-00	SHADE	1
	382-6129-01	BUTTON(PE-1713B)	1	1-28	335-6517-00	ILLUMI PLATE	1
1-5	382-6130-00	BUTTON(PE-1712B/K)	1	1-29	345-8616-00	SPONGE	1
	382-6130-01	BUTTON(PE-1713B)	1	1-30	335-6516-00	ILLUMI PLATE	1
1-6	382-6131-00	BUTTON(PE-1712B/K)	1	1-31	750-6699-00	SPRING	1
	382-6131-01	BUTTON(PE-1713B)	1	1-32	335-6201-02	REAR-CVR	1
1-7	382-6132-00	BUTTON(PE-1712B/K)	1	1-33	778-2006-00	T-SCREW	6
	382-6132-01	BUTTON(PE-1713B)	1	1-34	347-6230-00	SHADE	1
1-8	382-6133-00	BUTTON(PE-1712B/K)	1	1-35	331-2810-00	LCD-CVR	1
	382-6133-01	BUTTON(PE-1713B)	1	1-36	379-1198-41	INDICATOR(LCD)	1
1-9	382-6134-00	BUTTON(PE-1712B/K)	1	1-37	347-6171-00	SHADE	1
	382-6134-01	BUTTON(PE-1713B)	1	1-38	347-6170-00	FILM	1
1-10	382-6135-00	BUTTON(PE-1712B/K)	1	1-39	335-6214-00	LCD ILLUMI	1
	382-6135-01	BUTTON(PE-1713B)	1	1-40	335-6210-00	LCD HOLDER	1
1-11	335-5926-00	ILLUMI PLATE	1	1-41	001-7046-00	DIODE	1
1-12	335-5828-00	IR-FILTER	1	1-42	335-6216-00	LED HOLDER	1
1-13	370-5940-01	ESCUTCHEON(PE-1712B/K)	1	1-43	347-6510-00	SHADE	1
	370-5940-02	ESCUTCHEON(PE-1713B)	1	1-44	331-3133-00	JOG-SW HOLDER	1
1-14	382-6127-00	BUTTON(PE-1712B/K)	1	1-45	016-9900-81	VR W/SHAFT	1
	382-6127-01	BUTTON(PE-1713B)	1	1-46	345-4441-37	LAMP CAP	5
1-15	382-6126-00	BUTTON(PE-1712B/K)	1	1-47	017-0444-00	PILOTLAMP (14V 50mA)	5
	382-6126-01	BUTTON(PE-1713B)	1	1-48	013-6305-50	TACT SWITCH	11
1-16	382-6137-00	BUTTON	1	1-49	013-6001-50	SWITCH	8
1-17	382-6125-00	BUTTON(PE-1712B/K)	1	1-50	039-1893-00	SW-PWB (WITHOUT COMPONENT)	1
	382-6125-02	BUTTON(PE-1713B)	1	1-51	060-4008-00	IR-RECEIVER	1
1-18	382-6124-00	BUTTON(PE-1712B/K)	1	1-52	076-0615-00	PLUG	1
	382-6124-02	BUTTON(PE-1713B)	1	1-53	051-6013-00	IC	1
1-19	382-6122-00	BUTTON(PE-1712B/K)	1	1-54	382-6139-00	BUTTON	1
	382-6122-01	BUTTON(PE-1713B)	1				
1-20	347-6511-00	SHADE	2				
1-21	382-6128-00	BUTTON(PE-1712B/K)	1				
	382-6128-01	BUTTON(PE-1713B)	1				

Main Section

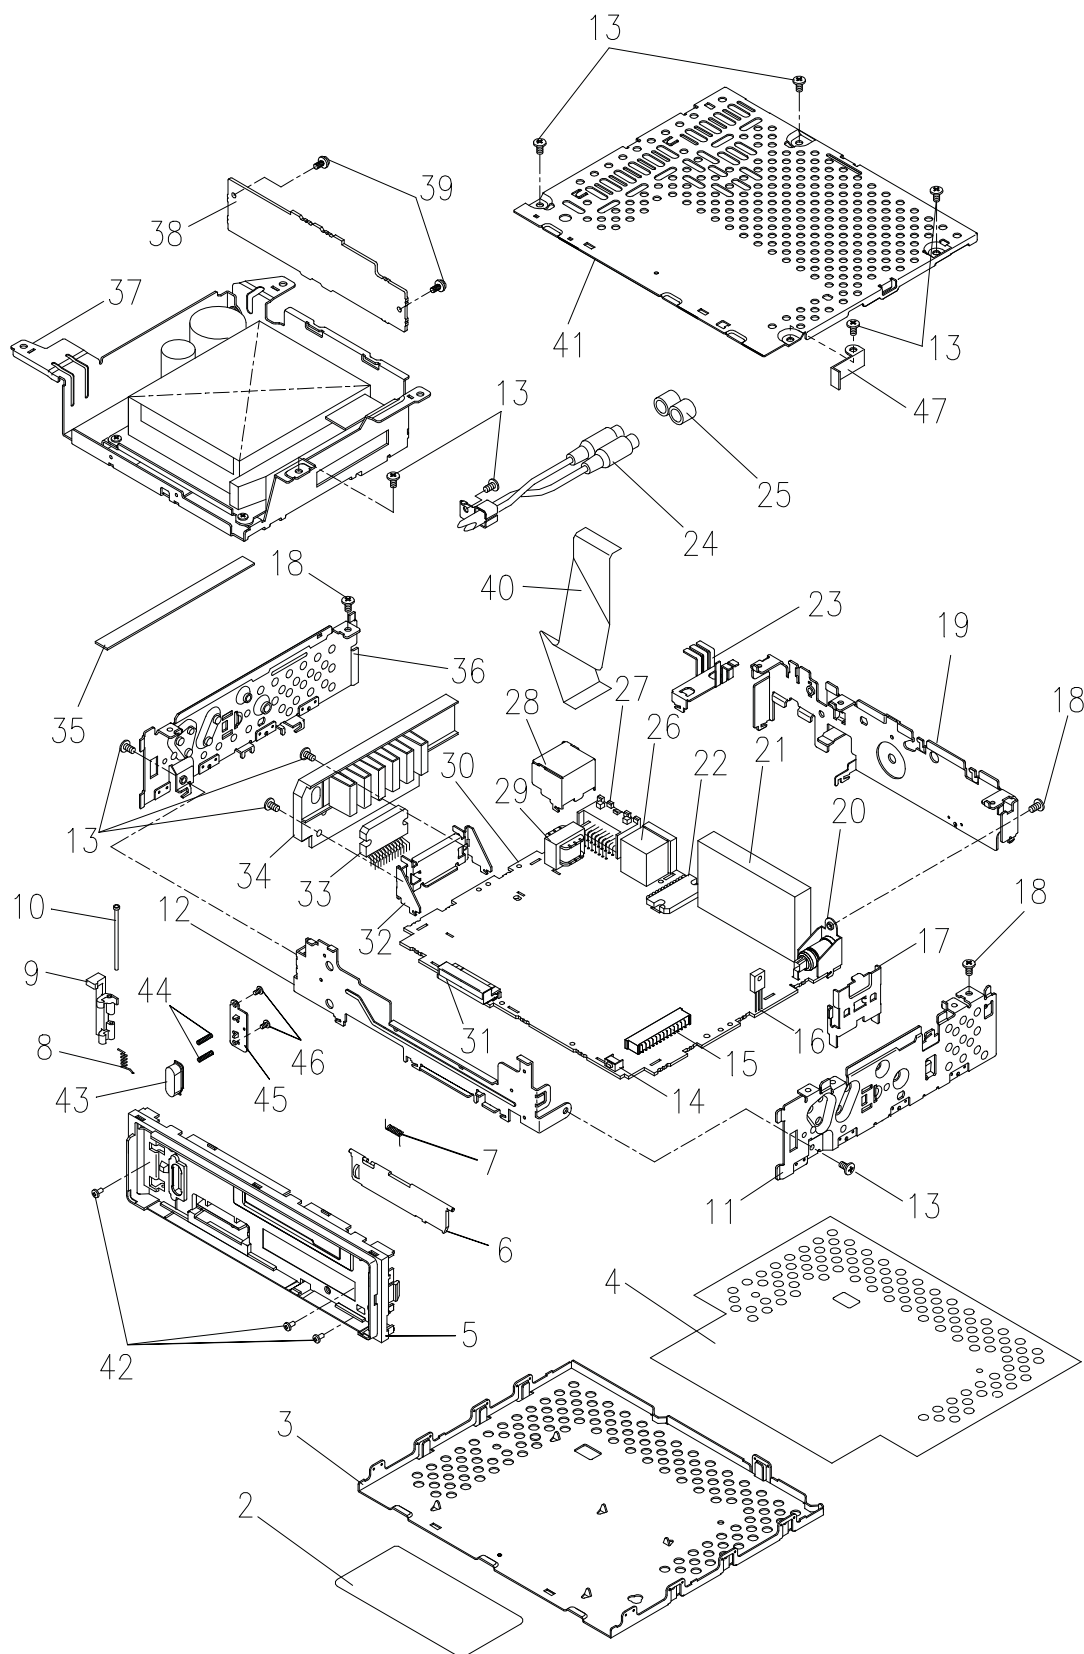

NO.	PARTS NO.	DESCRIPTION	Q'TY	NO.	PARTS NO.	DESCRIPTION	Q'TY
2	286-9506-00	SETPLATE(PE-1712B)	1	25	345-3799-20	RUBBER PART	2
	286-9508-00	SETPLATE(PE-1712K)	1	26	074-1126-10	OUTLET SOCKET	1
	286-9507-00	SETPLATE(PE-1713B)	1	27	074-1214-00	OUTLET SOCKET	1
3	304-0460-01	LOWER-CVR	1	28	331-2820-00	SHIELD CASE	1
4	347-5918-00	INSULATOR	1	29	009-9006-60	CHOKE	1
5	370-5794-03	INNER-ES	1	30	039-1613-03	MAIN PWB (WITHOUT COMPONENT)	1
6	320-0562-01	DUSTPROOF-CVR	1	31	074-1217-00	OUTLET SOCKET	1
7	750-3343-01	SPRING	1	32	331-2255-20	IC HOLDER	1
8	750-3219-00	SPRING	1	33	051-2031-11	IC	1
9	335-5915-01	HOOK	1	34	313-1744-20	HEAT SINK	1
10	341-1627-00	SHAFT	1	35	345-8511-00	RUBBER SHEET	1
11	305-0275-00	SIDE-CVR	1	36	305-0274-01	SIDE-CVR	1
12	309-0271-01	FRONT PLATE	1	37	930-4310-00	TAPE-MECH-MODULE	1
13	731-3006-80	TAPTIGHT	10	38	039-1617-00	MECH-PWB (WITHOUT COMPONENT)	1
14	013-6100-00	SWITCH	1	39	716-1878-00	IT SCREW	2
15	074-0986-22	OUTLET SOCKET	1	40	816-2478-00	FLAT WIRE	1
16	103-2012-00	TRANSISTOR	1	41	303-0472-00	UPPER-CVR	1
17	313-1651-21	HEAT SINK	1	42	780-2004-01	SCREW	3
18	714-3006-81	MACHINE SCREW	3	43	382-4078-00	BUTTON	1
19	307-0626-01	REAR-CVR	1	44	750-3173-00	SPRING	2
20	092-4000-50	ANT RECEPT	1	45	331-2594-00	HOOK PLATE	1
21	880-2087G	TUNER	1	46	716-0778-00	WAVE SCREW	2
22	051-3261-00	IC	1	47	331-2744-00	STOPPER	1
23	313-1772-00	HEAT SINK	1				
24	855-5426-52	RCA PIN CORD	1				

■ ELECTRICAL PARTS LIST

Main PWB section (B1)

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 301	051-3261-00	BA4906	L 101	010-4007-00	AM COIL	C 503	183-1043-62	50V 0.1 μ F
IC 501	051-5016-90	TDA7404	L 102	010-2230-14	2.2 μ H	C 504	183-1043-62	50V 0.1 μ F
IC 601	051-2031-11	TDA4743B	L 103	010-2230-31	56 μ H	C 505	183-1053-62	50V 1 μ F
IC 701	051-0160-01	HD74LS07	L 503	010-2285-57		C 506	183-1053-62	50V 1 μ F
IC 801	052-1917-20	uPD178006AGC	L 504	010-2285-57		C 509	183-4763-32	16V 47 μ F
Q 102	102-2712-51	2SC2712GL	L 505	010-2285-57		C 510	183-1063-52	35V 10 μ F
Q 103	102-2712-51	2SC2712GL	L 601	009-9006-60	CHOKES	C 511	183-1063-52	35V 10 μ F
Q 108	125-2004-03	RN1403	L 701	010-2230-26	22 μ H	C 514	183-1063-52	35V 10 μ F
Q 301	102-2712-00	2SC2712	L 801	010-2230-38	220 μ H	C 515	178-1032-78	25V 0.01 μ F
Q 303	125-2004-02	RN1402	X 801	061-1064-00	4.5MHz	C 516	178-1022-78	50V 1000PF
Q 304	102-2712-00	2SC2712	C 101	176-2201-00	50V 22PF	C 517	178-2222-78	50V 2200PF
Q 305	101-1237-00	2SB1237	C 102	178-1032-78	25V 0.01 μ F	C 518	178-2222-78	50V 2200PF
Q 306	125-0002-02	RN2402	C 103	178-1032-78	25V 0.01 μ F	C 519	178-1022-78	50V 1000PF
Q 307	125-0002-02	RN2402	C 105	183-1073-22	10V 100 μ F	C 601	172-2231-10	50V 0.022 μ F
Q 308	101-1243-00	2SB1243	C 106	183-1073-22	10V 100 μ F	C 602	042-0447-00	16V 2200 μ F
Q 309	125-2004-02	RN1402	C 107	183-1073-22	10V 100 μ F	C 603	183-3343-62	50V 0.33 μ F
Q 310	103-1858-00	2SD1858	C 108	176-1011-00	50V 100PF	C 604	183-2263-32	16V 22 μ F
Q 402	125-0002-06	RN2406	C 109	176-1011-00	50V 100PF	C 605	183-4763-32	16V 47 μ F
Q 403	125-2004-06	RN1406	C 110	178-2232-78	25V 0.022 μ F	C 606	182-4746-63	50V 0.47 μ F
Q 404	125-2004-06	RN1406	C 111	176-1011-00	50V 100PF	C 607	182-4746-63	50V 0.47 μ F
Q 405	101-1243-00	2SB1243	C 112	176-3311-00	50V 330PF	C 608	182-4746-63	50V 0.47 μ F
Q 406	103-2012-00	2SD2012	C 114	183-1053-62	50V 1 μ F	C 609	182-4746-63	50V 0.47 μ F
Q 501	125-4001-00	XN1504	C 117	178-2732-78	25V 0.027 μ F	C 611	172-1041-10	50V 0.1 μ F
Q 601	125-0002-02	RN2402	C 118	178-2732-78	25V 0.027 μ F	C 612	172-1041-10	50V 0.1 μ F
Q 701	125-2004-02	RN1402	C 122	042-9002-01	50V 3.3 μ F	C 613	172-1041-10	50V 0.1 μ F
Q 702	100-1162-00	2SA1162	C 123	178-1032-78	25V 0.01 μ F	C 614	172-1041-10	50V 0.1 μ F
Q 703	125-2004-02	RN1402	C 125	178-4722-78	50V 4700PF	C 615	173-1021-11	50V 1000PF
Q 704	102-2712-00	2SC2712	C 126	178-6822-78	50V 6800PF	C 701	178-4732-78	25V 0.047 μ F
Q 901	100-1162-00	2SA1162	C 127	178-1032-78	25V 0.01 μ F	C 702	178-1022-78	50V 1000PF
D 301	001-0376-41	MTZ7.5JB	C 128	178-1032-78	25V 0.01 μ F	C 801	176-2201-00	50V 22PF
D 302	001-0376-26	MTZ4.7JB	C 129	176-2201-00	50V 22PF	C 802	176-2201-00	50V 22PF
D 303	001-0466-01	S5688G	C 130	178-1032-78	25V 0.01 μ F	C 803	178-4732-78	25V 0.047 μ F
D 305	001-0330-00	1SS119	C 131	176-1011-00	50V 100PF	C 804	178-4732-78	25V 0.047 μ F
D 306	001-0330-00	1SS119	C 132	176-1011-00	50V 100PF	C 805	178-1032-78	25V 0.01 μ F
D 307	001-0466-01	S5688G	C 133	178-1022-78	50V 1000PF	C 806	182-4763-33	16V 47 μ F
D 309	001-0330-00	1SS119	C 135	176-2096-00	50V 2PF	C 807	183-1073-12	6.3V 100 μ F
D 310	001-0376-47	MTZ9.1JB	C 136	178-1032-78	25V 0.01 μ F	C 808	178-1032-78	25V 0.01 μ F
D 311	001-0330-00	1SS119	C 137	176-1011-00	50V 100PF	C 809	178-1032-78	25V 0.01 μ F
D 402	001-0376-47	MTZ9.1JB	C 302	172-1031-10	50V 0.01 μ F	C 810	178-1042-78	25V 0.1 μ F
D 601	001-0592-00	RM4Z	C 303	172-1031-10	50V 0.01 μ F	C 811	178-4732-78	25V 0.047 μ F
D 602	001-0466-01	S5688G	C 305	183-1063-52	35V 10 μ F	C 812	178-1022-78	50V 1000PF
D 603	001-0466-01	S5688G	C 308	183-1063-52	35V 10 μ F	C 813	178-1022-78	50V 1000PF
D 604	001-0466-01	S5688G	C 309	177-1032-55	50V 0.01 μ F	C 814	177-1022-55	50V 1000PF
D 605	001-0466-01	S5688G	C 310	177-1032-55	50V 0.01 μ F	C 815	178-1032-78	25V 0.01 μ F
D 606	001-0466-01	S5688G	C 311	177-1032-55	50V 0.01 μ F	C 816	178-1032-78	25V 0.01 μ F
D 607	001-0466-01	S5688G	C 312	183-1063-32	16V 10 μ F	C 817	176-1011-00	50V 100PF
D 608	001-0466-01	S5688G	C 403	183-1073-22	10V 100 μ F	R 101	117-2221-10	1/10W 2.2K Ω
D 609	001-0466-01	S5688G	C 404	183-1063-52	35V 10 μ F	R 103	117-2221-10	1/10W 2.2K Ω
D 610	001-0516-90	MA111	C 407	178-1042-78	25V 0.1 μ F	R 105	117-1021-10	1/10W 1K Ω
D 701	001-0330-00	1SS119	C 408	178-1022-78	50V 1000PF	R 106	117-1231-10	1/10W 12K Ω
D 702	001-0330-00	1SS119	C 501	178-1042-78	25V 0.1 μ F	R 111	117-4721-10	1/10W 4.7K Ω
D 901	001-0330-00	1SS119	C 502	178-1042-78	25V 0.1 μ F	R 115	117-1021-10	1/10W 1K Ω

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R 116	117-1021-10	1/10W 1K Ω	R 505	117-1031-10	1/10W 10K Ω	R 715	117-2231-10	1/10W 22K Ω
R 120	117-5631-10	1/10W 56K Ω	R 506	117-1031-10	1/10W 10K Ω	R 803	117-1031-10	1/10W 10K Ω
R 121	117-4741-10	1/10W 470K Ω	R 507	117-3311-10	1/10W 330 Ω	R 810	117-2231-10	1/10W 22K Ω
R 122	117-1011-10	1/10W 100 Ω	R 508	117-3311-10	1/10W 330 Ω	R 812	117-2221-10	1/10W 2.2K Ω
R 301	117-4731-10	1/10W 47K Ω	R 515	111-4721-91	1/4WSS 4.7K Ω	R 813	117-2221-10	1/10W 2.2K Ω
R 302	117-2231-10	1/10W 22K Ω	R 516	111-4721-91	1/4WSS 4.7K Ω	R 818	111-4731-91	1/4WSS 47K Ω
R 303	117-2231-10	1/10W 22K Ω	R 517	111-4721-91	1/4WSS 4.7K Ω	R 819	117-1041-10	1/10W 100K Ω
R 304	117-4721-10	1/10W 4.7K Ω	R 518	111-4721-91	1/4WSS 4.7K Ω	R 820	117-1041-10	1/10W 100K Ω
R 305	117-2231-10	1/10W 22K Ω	R 519	111-4721-91	1/4WSS 4.7K Ω	R 821	111-1031-91	1/4WSS 10K Ω
R 307	117-4721-10	1/10W 4.7K Ω	R 520	111-4721-91	1/4WSS 4.7K Ω	R 822	111-1031-91	1/4WSS 10K Ω
R 308	111-3321-91	1/4WSS 3.3K Ω	R 524	111-1031-91	1/4WSS 10K Ω			(PE-1712K)
R 309	117-1031-10	1/10W 10K Ω	R 602	117-1031-10	1/10W 10K Ω	R 823	111-1031-91	1/4WSS 10K Ω
R 310	111-5611-81	1/2WS 560 Ω	R 604	117-1231-10	1/10W 12K Ω			(PE-1713B)
R 311	117-1031-10	1/10W 10K Ω	R 605	117-4721-10	1/10W 4.7K Ω			(PE-1712B)
R 312	117-1031-10	1/10W 10K Ω	R 606	111-4721-91	1/4WSS 4.7K Ω	R 825	117-1031-10	1/10W 10K Ω
R 313	117-4721-10	1/10W 4.7K Ω	R 607	111-4721-91	1/4WSS 4.7K Ω	R 826	117-1031-10	1/10W 10K Ω
R 314	111-4711-91	1/4WSS 470 Ω	R 608	117-4721-10	1/10W 4.7K Ω	R 827	111-2231-91	1/4WSS 22K Ω
R 318	117-1031-10	1/10W 10K Ω	R 609	117-4721-10	1/10W 4.7K Ω	R 830	117-1031-10	1/10W 10K Ω
R 401	117-4731-10	1/10W 47K Ω	R 701	117-4721-10	1/10W 4.7K Ω	R 831	117-4731-10	1/10W 47K Ω
R 402	117-1041-10	1/10W 100K Ω	R 702	117-4721-10	1/10W 4.7K Ω	R 832	117-4731-10	1/10W 47K Ω
R 403	117-4731-10	1/10W 47K Ω	R 703	117-1021-10	1/10W 1K Ω	R 901	117-1031-10	1/10W 10K Ω
R 405	117-1041-10	1/10W 100K Ω	R 704	117-4721-10	1/10W 4.7K Ω	R 902	117-4721-10	1/10W 4.7K Ω
R 406	111-2211-91	1/4WSS 220 Ω	R 705	117-1021-10	1/10W 1K Ω	R 903	117-4731-10	1/10W 47K Ω
R 411	111-1221-91	1/4WSS 1.2K Ω	R 706	117-4721-10	1/10W 4.7K Ω	SUP101	060-0122-91	DSP-414N
R 412	117-4731-10	1/10W 47K Ω	R 707	117-1021-10	1/10W 1K Ω	CN 101	074-1217-00	OUTLET SOCKET
R 413	117-1041-10	1/10W 100K Ω	R 709	117-1031-10	1/10W 10K Ω	CN 102	074-1214-00	OUTLET SOCKET
R 415	117-1041-10	1/10W 100K Ω	R 710	117-1021-10	1/10W 1K Ω	CN 105	074-1126-10	OUTLET SOCKET
R 501	117-4721-10	1/10W 4.7K Ω	R 711	117-4731-10	1/10W 47K Ω	CN 106	074-0986-22	OUTLET SOCKET
R 502	117-4721-10	1/10W 4.7K Ω	R 712	117-2231-10	1/10W 22K Ω	SW 301	013-6100-00	SKHILLB(RESET)
R 503	117-1021-10	1/10W 1K Ω	R 713	117-2231-10	1/10W 22K Ω			
R 504	117-1021-10	1/10W 1K Ω	R 714	117-1031-10	1/10W 10K Ω			

Switch PWB (B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 101	051-6013-00	LC75854W	R 108	119-1241-10	1/16W 120K Ω	S 105	013-6001-50	SKQCAB
Q 101	100-1162-00	2SA1162	R 109	119-1011-10	1/16W 100 Ω	S 106	013-6001-50	SKQCAB
D 101	001-0529-29	MA8051M	R 110	119-1011-10	1/16W 100 Ω	S 107	013-6305-00	SKQMAH
D 102	001-0529-14	MA8030L	R 111	119-2731-10	1/16W 27K Ω	S 108	013-6305-00	SKQMAH
D 103	001-0529-41	MA8075M	R 112	032-0092-80	1/10W 330 Ω 1%	S 109	013-6001-50	SKQCAB
D 104	001-7046-00	NSPW310BS	R 113	032-0092-80	1/10W 330 Ω 1%	S 110	013-6001-50	SKQCAB
C 101	168-4732-78	25V 0.047 μ F	R 114	119-1021-10	1/16W 1K Ω	S 111	013-6305-00	SKQMAH
C 102	168-4732-78	25V 0.047 μ F	R 115	119-1011-10	1/16W 100 Ω	S 112	013-6001-50	SKQCAB
C 103	168-1022-78	50V 1000PF	CN 107	076-0615-00	PLUG	S 113	013-6305-00	SKQMAH
C 104	042-0416-51	6.3V 10 μ F	PL 101	017-0444-00	14V 50MA	S 114	013-6001-50	SKQCAB
C 105	042-0416-51	6.3V 10 μ F	PL 102	017-0444-00	14V 50MA	S 115	013-6305-00	SKQMAH
R 101	119-2221-10	1/16W 2.2K Ω	PL 103	017-0444-00	14V 50MA	S 116	013-6305-00	SKQMAH
R 102	119-2221-10	1/16W 2.2K Ω	PL 104	017-0444-00	14V 50MA	S 117	013-6305-00	SKQMAH
R 103	119-2221-10	1/16W 2.2K Ω	PL 105	017-0444-00	14V 50MA	S 118	016-9900-81	SIM-026MT
R 104	119-4731-10	1/16W 47K Ω	S 101	013-6001-50	SKQCAB	S 119	013-6001-50	SKQCAB
R 105	119-1031-10	1/16W 10K Ω	S 102	013-6305-00	SKQMAH	S 120	013-6305-00	SKQMAH
R 106	119-3311-10	1/16W 330 Ω	S 103	013-6305-00	SKQMAH	IR 101	060-4008-00	RS-171
R 107	119-3921-10	1/16W 3.9K Ω	S 104	013-6305-00	SKQMAH			

MECH PWB (B3) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC 1	051-6048-08	BA6219BFP	C 16	183-1043-62	50V 0.1 μ F	R 2	117-2231-10	1/10W 22K Ω
IC 2	051-1546-90	BA3430FS	C 17	183-4753-52	35V 4.7 μ F	R 20	117-1531-10	1/10W 15K Ω
Q 1	102-2412-00	2SC2412	C 18	183-4743-62	50V 0.47 μ F	R 21	117-1031-10	1/10W 10K Ω
D 1	001-0529-25	MA8047L	C 19	183-2263-32	16V 22 μ F	R 22	117-1031-10	1/10W 10K Ω
C 1	178-1042-78	25V 0.1 μ F	C 20	178-1042-78	25V 0.1 μ F	R 23	117-8211-10	1/10W 820 Ω
C 2	178-2242-78	25V 0.22 μ F	C 21	178-1042-78	25V 0.1 μ F	R 24	117-1811-10	1/10W 180 Ω
C 3	183-4763-32	16V 47 μ F	C 22	178-2242-78	25V 0.22 μ F	R 25	117-2231-10	1/10W 22K Ω
C 4	176-3311-00	50V 330PF	C 23	178-2242-78	25V 0.22 μ F	R 26	117-3391-10	1/10W 3.3 Ω
C 5	176-3311-00	50V 330PF	R 1	117-2221-10	1/10W 2.2K Ω	R 27	117-3301-10	1/10W 33 Ω
C 6	176-3311-00	50V 330PF	R 10	117-1241-10	1/10W 120K Ω	R 3	117-2231-10	1/10W 22K Ω
C 7	176-3311-00	50V 330PF	R 11	117-1241-10	1/10W 120K Ω	R 4	117-6831-10	1/10W 68K Ω
C 8	183-6863-22	10V 68 μ F	R 12	117-1241-10	1/10W 120K Ω	R 5	117-5631-10	1/10W 56K Ω
C 9	183-6863-22	10V 68 μ F	R 13	117-1011-10	1/10W 100 Ω	R 6	117-3311-10	1/10W 330 Ω
C 10	172-1231-10	50V 0.012 μ F	R 14	117-1011-10	1/10W 100 Ω	R 7	117-2221-10	1/10W 2.2K Ω
C 11	172-1231-10	50V 0.012 μ F	R 15	117-3341-10	1/10W 330K Ω	R 8	114-1001-21	2WSS 10 Ω
C 12	183-4763-32	16V 47 μ F	R 16	117-3341-10	1/10W 330K Ω	R 9	117-1241-10	1/10W 120K Ω
C 13	183-4753-52	35V 4.7 μ F	R 17	117-1131-10	1/10W 11K Ω	CN 1	074-0986-11	OUTLET SOCKET
C 14	183-4753-52	35V 4.7 μ F	R 18	117-1131-10	1/10W 11K Ω	CN 2	076-0351-06	PLUG
C 15	176-5611-00	50V 560PF	R 19	117-1531-10	1/10W 15K Ω			

REEL PWB (B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q 1	658-0223-52	ON2170-QR	S 2	658-0223-50	ESE22MH2L	S 4	658-0223-51	SPPB 64
S 1	658-0223-51	SPPB 64	S 3	658-0223-50	ESE22MH2L		658-0223-53	FLAT CABLE 11P

HEAD PWB (B5) section


REF No.	PART No.	DESCRIPTION
J 1	658-0223-56	JOINT WIRE ASSY 6P

■ DISASSEMBLY AND ASSEMBLY PROCEDURES


Tape mechanism section 930-4310-00

Note: Follow the disassembly procedures in the numerical order given.

Cassette holder section

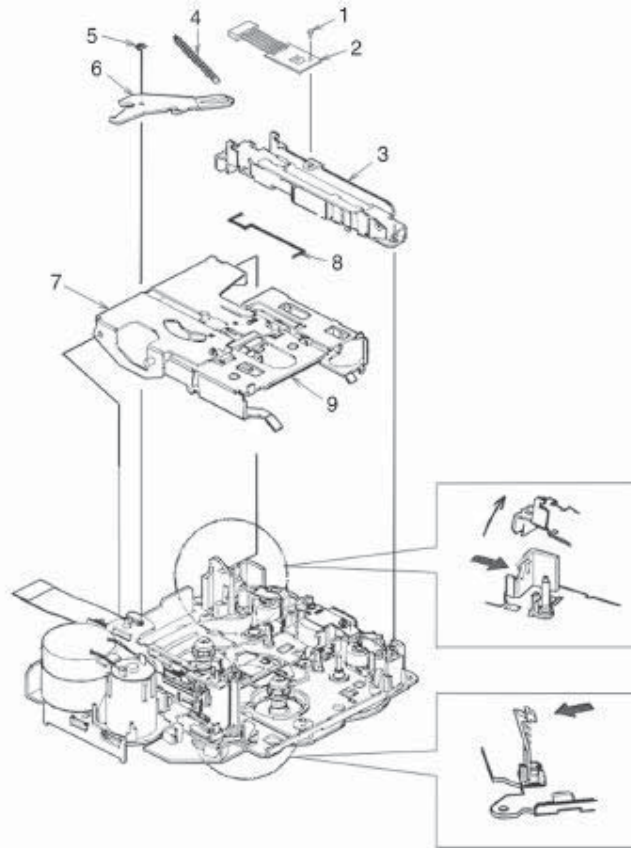


Head section

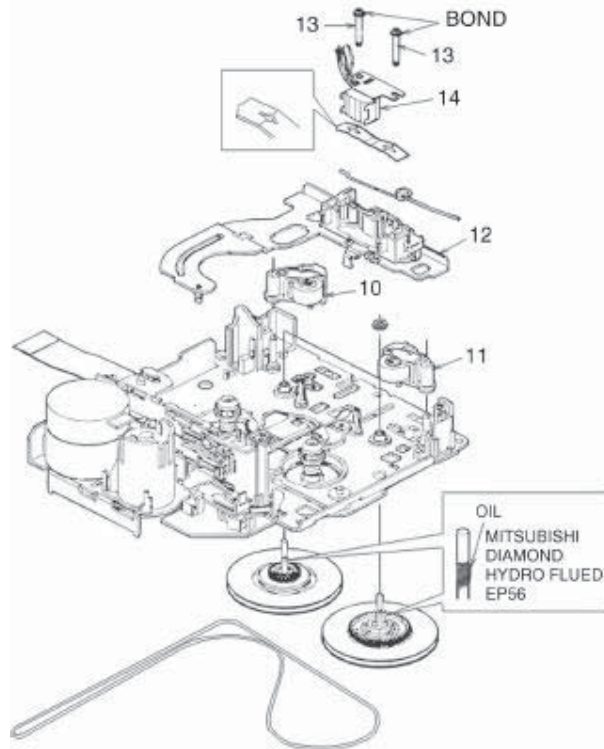

POINT FOR GREASING


Tape mechanism section 930-4310-00

Grease on the points marked by < ≡ >

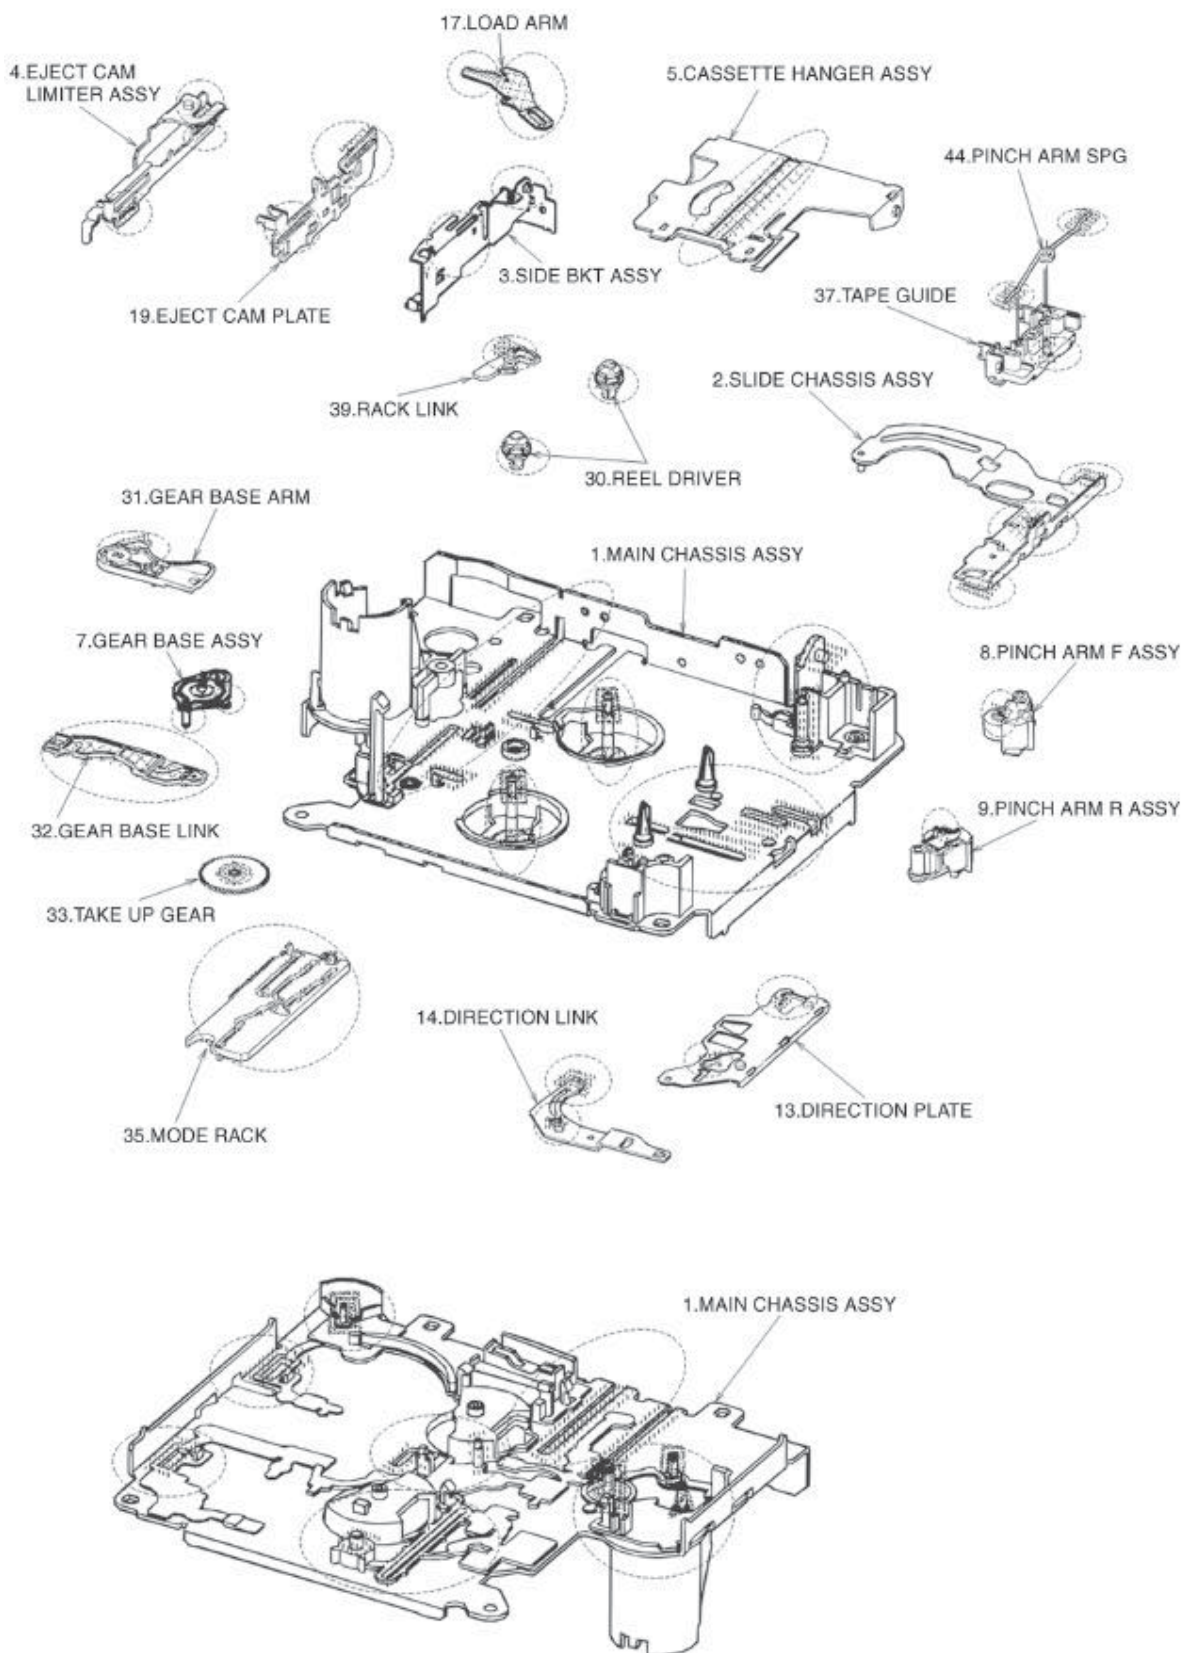

EXPLODED VIEW · PARTS LIST:

Tape mechanism section 930-4310-00

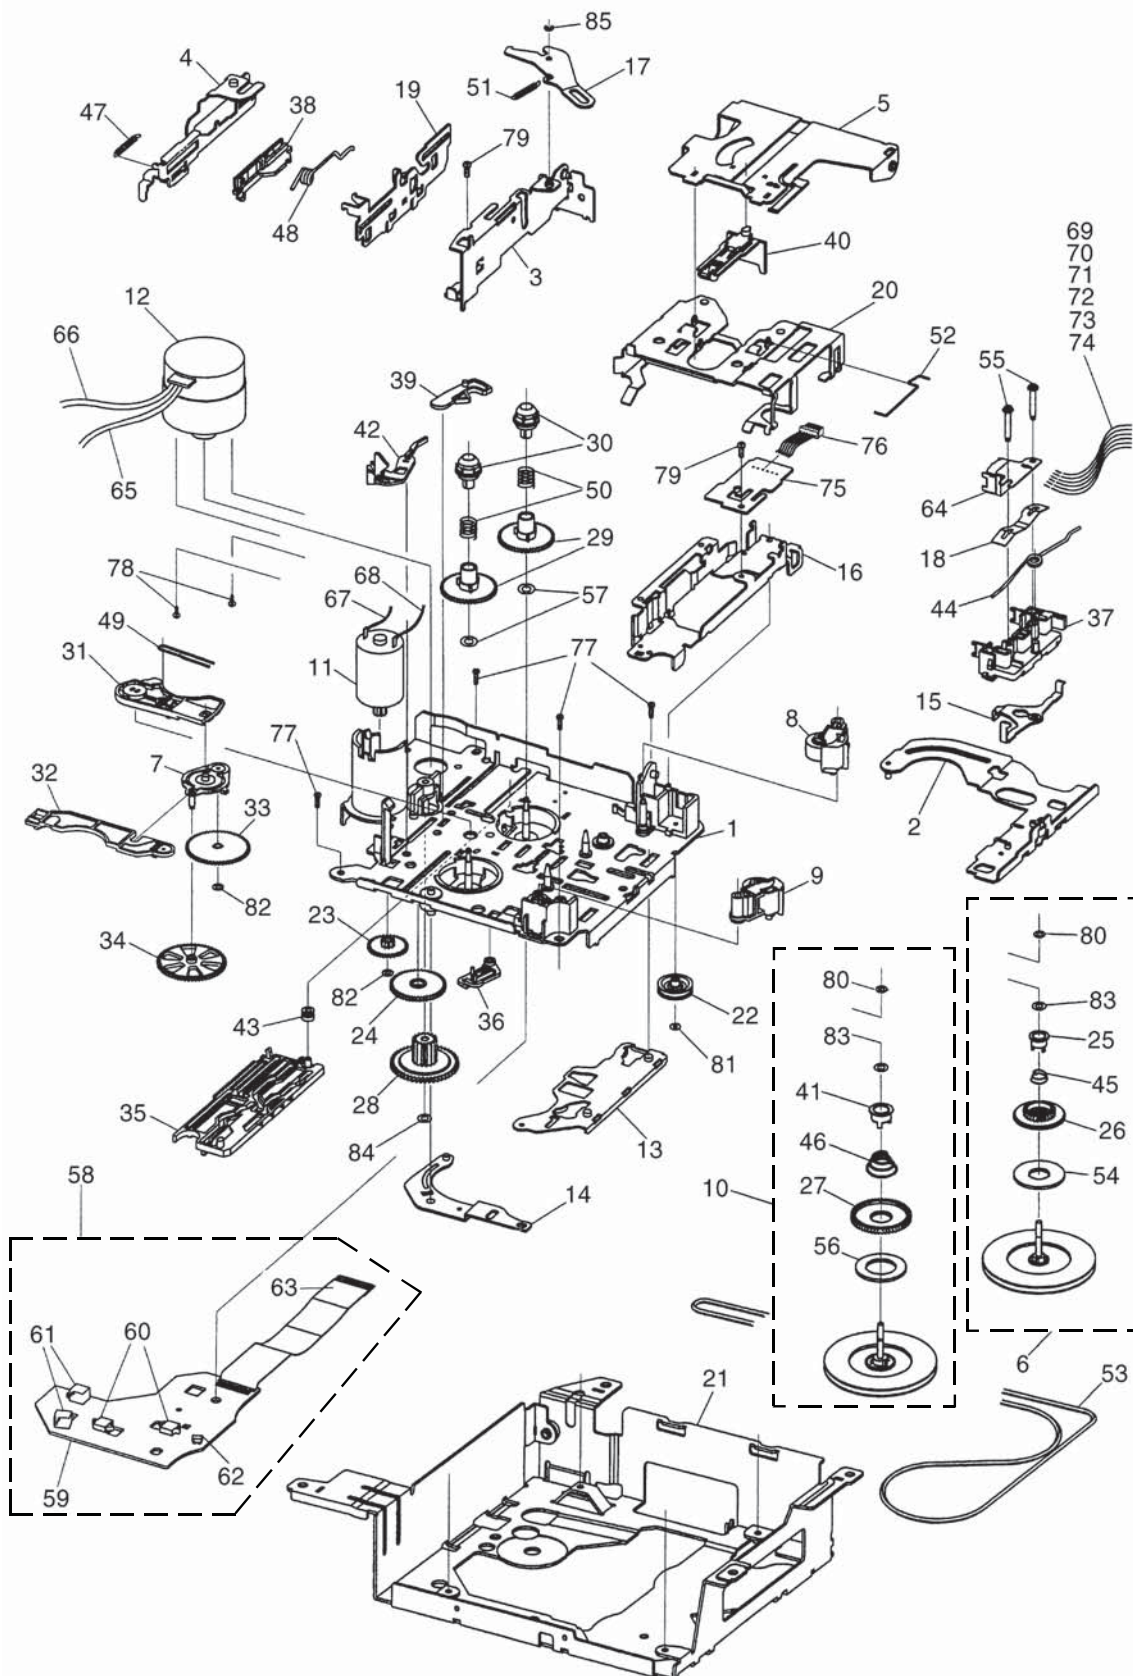

NO.	PARTS NO.	DESCRIPTION	QTY
1	— — —	MAIN CHASSIS ASSY	1
2	658-0223-01	SLIDE CHASSIS ASSY	1
3	658-0223-02	SIDE BKT ASSY	1
4	658-0223-03	EJECT CAM LIMITER ASSY	1
5	658-0223-04	CASSETTE HANGER ASSY	1
6	658-0223-05	FLYWHEEL ASSY F	1
7	658-0223-06	GEAR BASE ASSY	1
8	658-0223-07	PINCH ARM F ASSY	1
9	658-0223-08	PINCH ARM R ASSY	1
10	658-0223-09	FLYWHEEL ASSY R	1
11	658-0223-10	SUB MOTOR ASSY	1
12	658-0223-11	MAIN MOTOR ASSY	1
13	658-0223-12	DIRECTION PLATE	1
14	658-0223-13	DIRECTION LINK	1
15	658-0223-14	PINCH SPG ARM	1
16	658-0223-15	CASSETTE GUIDE	1
17	658-0223-16	LOAD ARM	1
18	658-0223-17	HEAD SUPPORT SPG	1
19	658-0223-18	EJECT CAM PLATE	1
20	658-0223-19	CASSETTE HOLDER	1
21	658-0223-20	BOTTOM PLATE	1
22	658-0223-21	IDLE PULLEY(A1)	1
23	658-0223-22	REDUCTION GEAR A	1
24	658-0223-23	REDUCTION GEAR B	1
25	— — —	SPG HOLDER F	1
26	— — —	FRICTION GEAR PLAY	1
27	— — —	FRICTION GEAR FF	1
28	658-0223-24	MODE GEAR	1
29	658-0223-25	REEL SPINDLE	2
30	658-0223-26	REEL DRIVER	2
31	658-0223-27	GEAR BASE ARM	1
32	658-0223-28	GEAR BASE LINK	1
33	658-0223-29	TAKE UP GEAR	1
34	658-0223-30	REFLECTOR GEAR	1
35	658-0223-31	MODE RACK	1
36	658-0223-32	MODE SW ACTUATER	1
37	658-0223-33	TAPE GUIDE	1
38	658-0223-34	LOAD RACK	1
39	658-0223-35	RACK LINK	1
40	658-0223-36	CASSETTE CATCH	1
41	— — —	SPG HOLDER R	1
42	658-0223-37	TAPE DETECTOR	1
43	658-0223-38	RACK COLLAR	1
44	658-0223-39	PINCH ARM SPG	1
45	— — —	TU SPG	1

NO.	PARTS NO.	DESCRIPTION	QTY
46	— — —	FF SPG	1
47	658-0223-40	EJECT CAM PLATE SPG	1
48	658-0223-41	HOLDER CUSHION SPG	1
49	658-0223-42	GEAR BASE SPG	1
50	658-0223-43	REEL DRIVER SPG	2
51	658-0223-44	LOAD ARM SPG	1
52	658-0223-45	HOLDER STABILIZER SPG	1
53	658-0223-46	BELT	1
54	— — —	FELT	1
55	658-0223-47	AZIMUTH SCREW	2
56	— — —	FELT	1
57	658-0223-48	REEL WASHER	2
58	— — —	REEL PWB ASSY (WITH COMPONENT)	1
59	658-0223-49	REEL PWB (WITHOUT COMPONENT)	1
60	658-0223-50	SW (ESE22MH2L)	2
61	658-0223-51	SW (SPPB 64)	2
62	658-0223-52	PHOTO SENSOR (ON2170-QR FS)	1
63	658-0223-53	FLAT CABLE 11P-C	1
64	658-0223-54	HEAD (P-5544-CD)	1
65	— — —	MAIN MOTOR WIRE BLACK	1
66	— — —	MAIN MOTOR WIRE RED	1
67	— — —	SUB MOTOR WIRE ORANGE	1
68	— — —	SUB MOTOR WIRE BROWN	1
69	— — —	HEAD WIRE BLACK	1
70	— — —	HEAD WIRE BROWN	1
71	— — —	HEAD WIRE RED	1
72	— — —	HEAD WIRE ORANGE	1
73	— — —	HEAD WIRE YELLOW	1
74	— — —	HEAD WIRE WHITE	1
75	658-0223-55	HEAD PWB (WITHOUT COMPONENT)	1
76	658-0223-56	JOINT WIRE ASSY 6P	1
77	658-0223-57	SCREW (M2.6×4)	4
78	658-0223-58	SCREW (M2×2.5)	2
79	658-0223-59	SCREW (M2×3.5)	2
80	658-0223-60	WASHER (1.6×3.2)	2
81	658-0223-61	WASHER (1.2×3.2)	1
82	658-0223-62	WASHER (1.5×3.2)	2
83	658-0223-63	WASHER (2.1×4.0)	2
84	658-0223-64	WASHER (2.1×4.0)	1
85	658-0223-65	E-RING	1