Packing Assembly Parts List

Symbol No.	Part No.	Description
101	15B03202K01	CARRING,BAG
102	01T95205W10	ASS'Y WIRE PWR
103	07B03203K01	BKT,STOPPER ASS'Y
104	03A31982Y01	SCR M4X5 FLAT
105	33C03201K01	FACE,PLATE
106	15D03200K01	CASE,INNER
107	68-02278Z49	OWNERS MANUAL(AO)

Symbol No.	Part No.	Description

Packing Method View

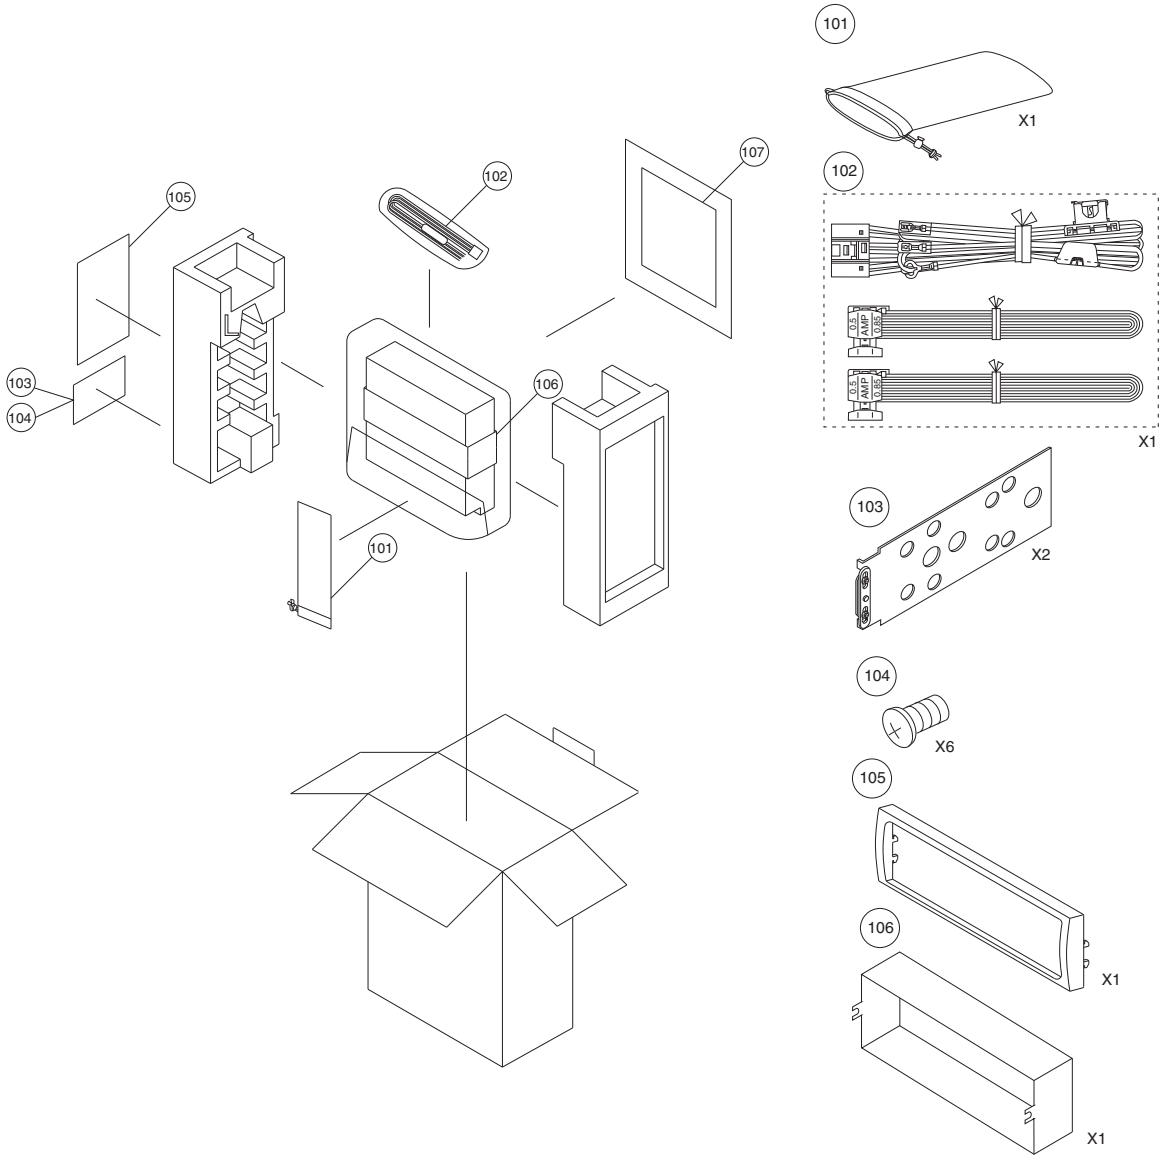

TO CONTENTS

System Connections

Basic Connections

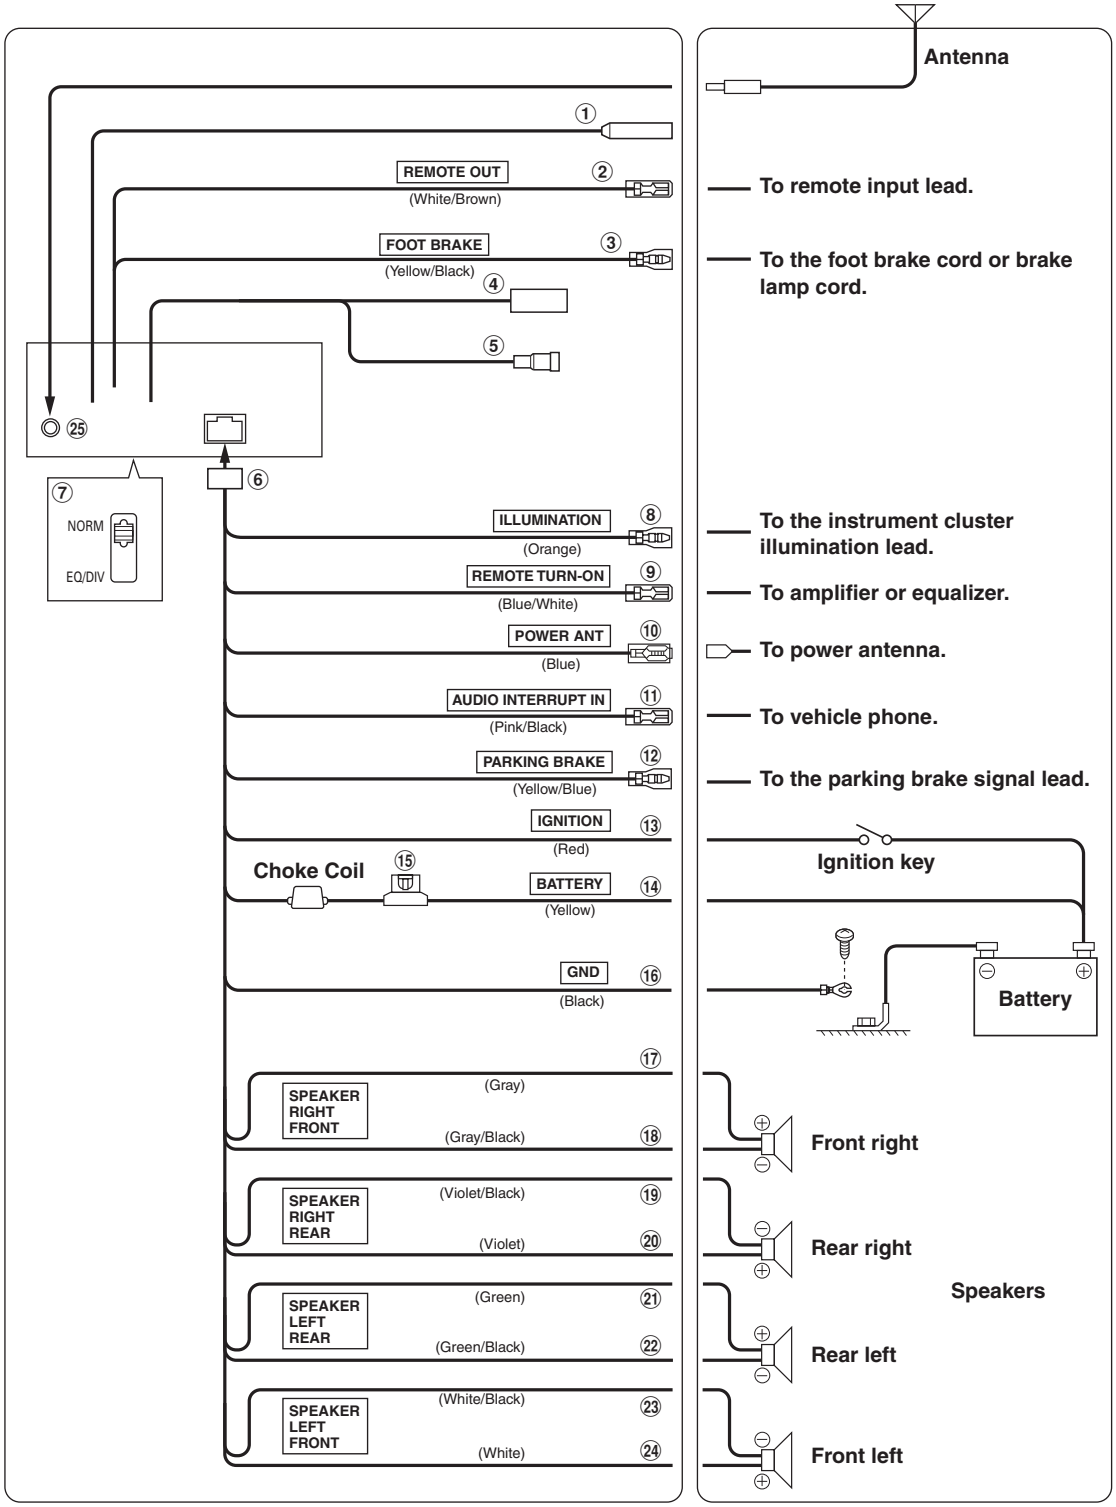

TO CONTENTS

① Remote Control Interface Connector
Connect to the remote control interface box.

② Remote Control Output Lead (White/Brown)
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

③ Foot Brake Lead
Connect to the vehicle's foot brake lead or brake lamp lead.

④ RGB input Connector

⑤ Ai-NET Cable

⑥ Power Supply Connector

⑦ System Switch
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.

NOTE
Be sure turn the power off to the unit before changing the switch position.

⑧ Illumination Lead (Orange)
This lead may be connected to the vehicle's instrument cluster illumination lead. This will allow the backlighting of the CVA-1014 to dim whenever the vehicle's lights are turned on.

⑨ Remote Turn-On Lead (Blue/White)
Connect this lead to the remote turn-on lead of your amplifier or signal processor.

⑩ Power Antenna Lead (Blue)
Connect this lead to the +B terminal of your power antenna, if applicable.

⑪ Audio Interrupt In Lead (Pink/Black)

⑫ Parking Brake Lead (Yellow/Blue)
Connect this lead to the power supply side of the parking brake switch to transmit the parking brake status signals to the CVA-1014.

⑬ Switched Power Lead (Ignition) (Red)
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+) 12V only when the ignition is turned on or in the accessory position.

⑭ Battery Lead (Yellow)
Connect this lead to the positive (+) post of the vehicle's battery.

⑮ Fuse Holder (10A)

⑯ Ground Lead (Black)
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

⑰ Right Front (+) Speaker Output Lead (Gray)

⑱ Right Front (–) Speaker Output Lead (Gray/Black)

⑲ Right Rear (–) Speaker Output Lead (Violet/Black)

⑳ Right Rear (+) Speaker Output Lead (Violet)

㉑ Left Rear (+) Speaker Output Lead (Green)

㉒ Left Rear (–) Speaker Output Lead (Green/Black)

㉓ Left Front (–) Speaker Output Lead (White/Black)

㉔ Left Front (+) Speaker Output Lead (White)

㉕ Antenna Receptacle

TO CONTENTS

System Example 1: Refer also to Basic Connections.

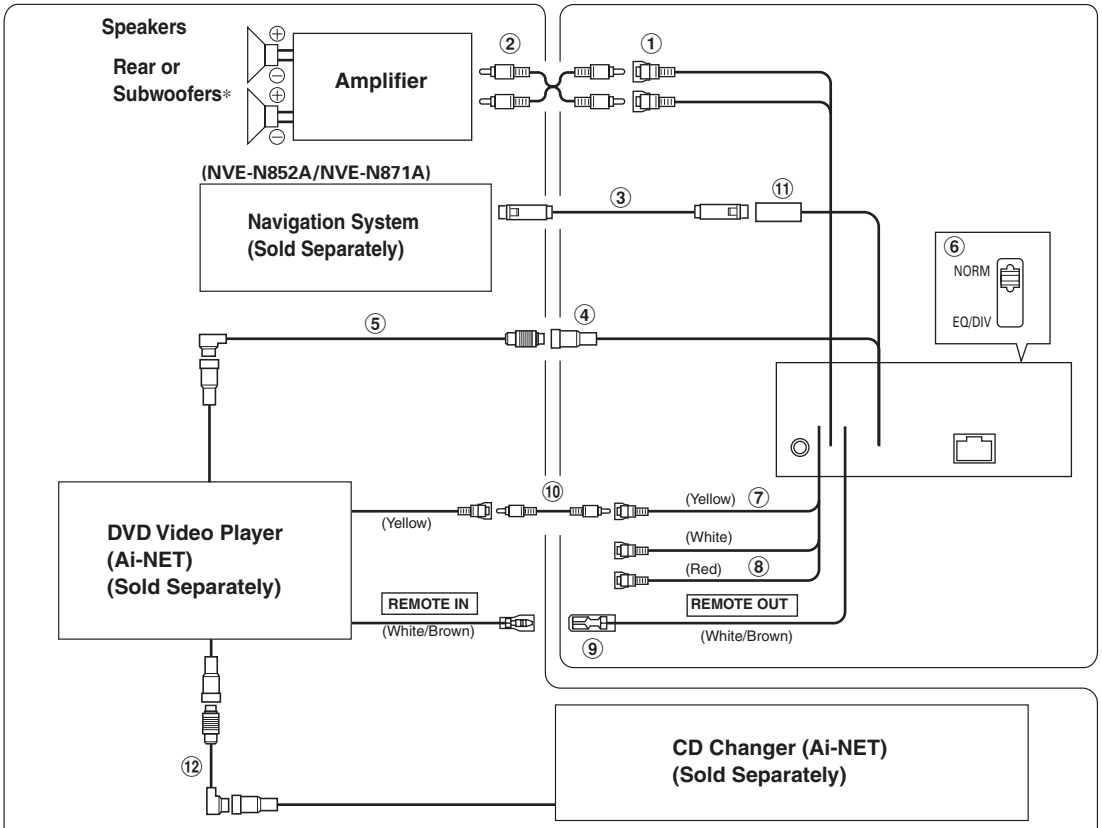

* *When Subwoofer is set to OFF: Output is from Rear speakers.*
When Subwoofer is set to ON: Output is from Subwoofer.

For details on how to set the Subwoofer to ON/OFF, see "Subwoofer Control On and Off" on page 38.

When connecting the DVD changer

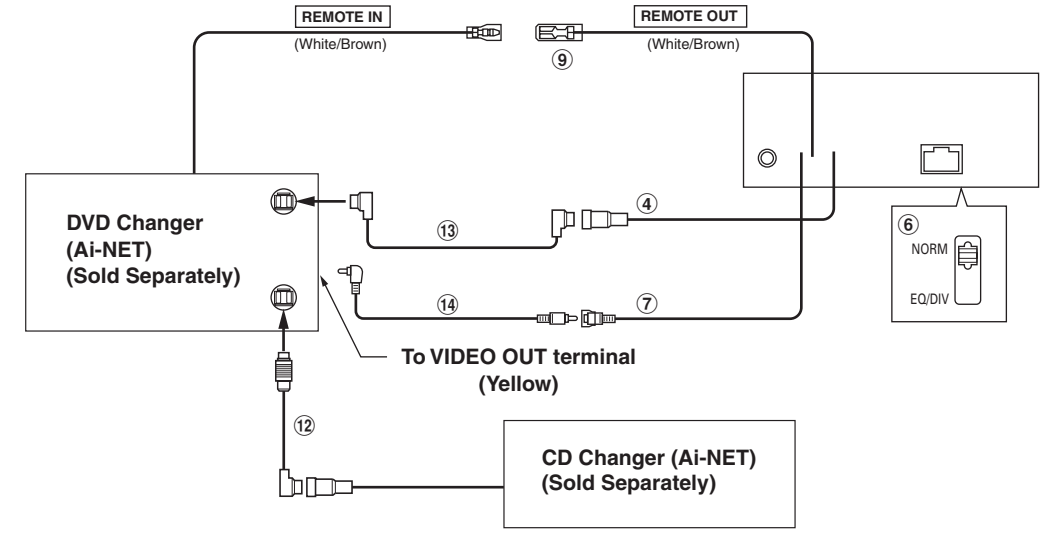

TO CONTENTS

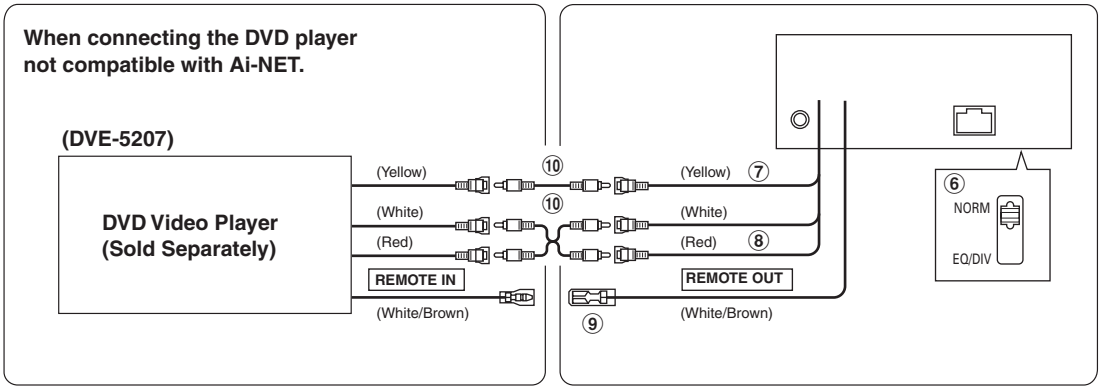

① Rear/Subwoofer Output RCA Connectors
RED is right and WHITE is left.
② RCA Extension Cable (Sold Separately)
③ RGB Cable (Included with NVE-N852, not included with NVE-N871A)
④ Ai-NET Connector
Connect this to the output or input connector of other product equipped with Ai-NET.
⑤ Ai-NET Cable (Included with DVD video player)
⑥ System Switch
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.

NOTE
Be sure turn the power off to the unit before changing the switch position.

⑦ AUX Video Input (AUX1) Connector
Connect the video output lead of a DVD video player or DVD changer to this terminal.

⑧ AUX Audio Input (AUX1) Connectors
(not used for this system)
⑨ Remote Control Output Lead (White/Brown)
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.
⑩ RCA Extension Cable (Included with DVD video player)
⑪ RGB Input Connector
Connect to the RGB output terminal of the navigation system.
⑫ Ai-NET Cable (Included with CD Changer)
⑬ Ai-NET Cable (Included with DVD Changer)
⑭ RCA Extension Cable (Included with DVD Changer)

NOTE
When the NVA-N751AS is connected for the Navigation System, use the RGB conversion cable KWE-503N (sold separately).

TO CONTENTS

System Example 2 (connecting to the optional KCE-104V): Refer also to Basic Connections.

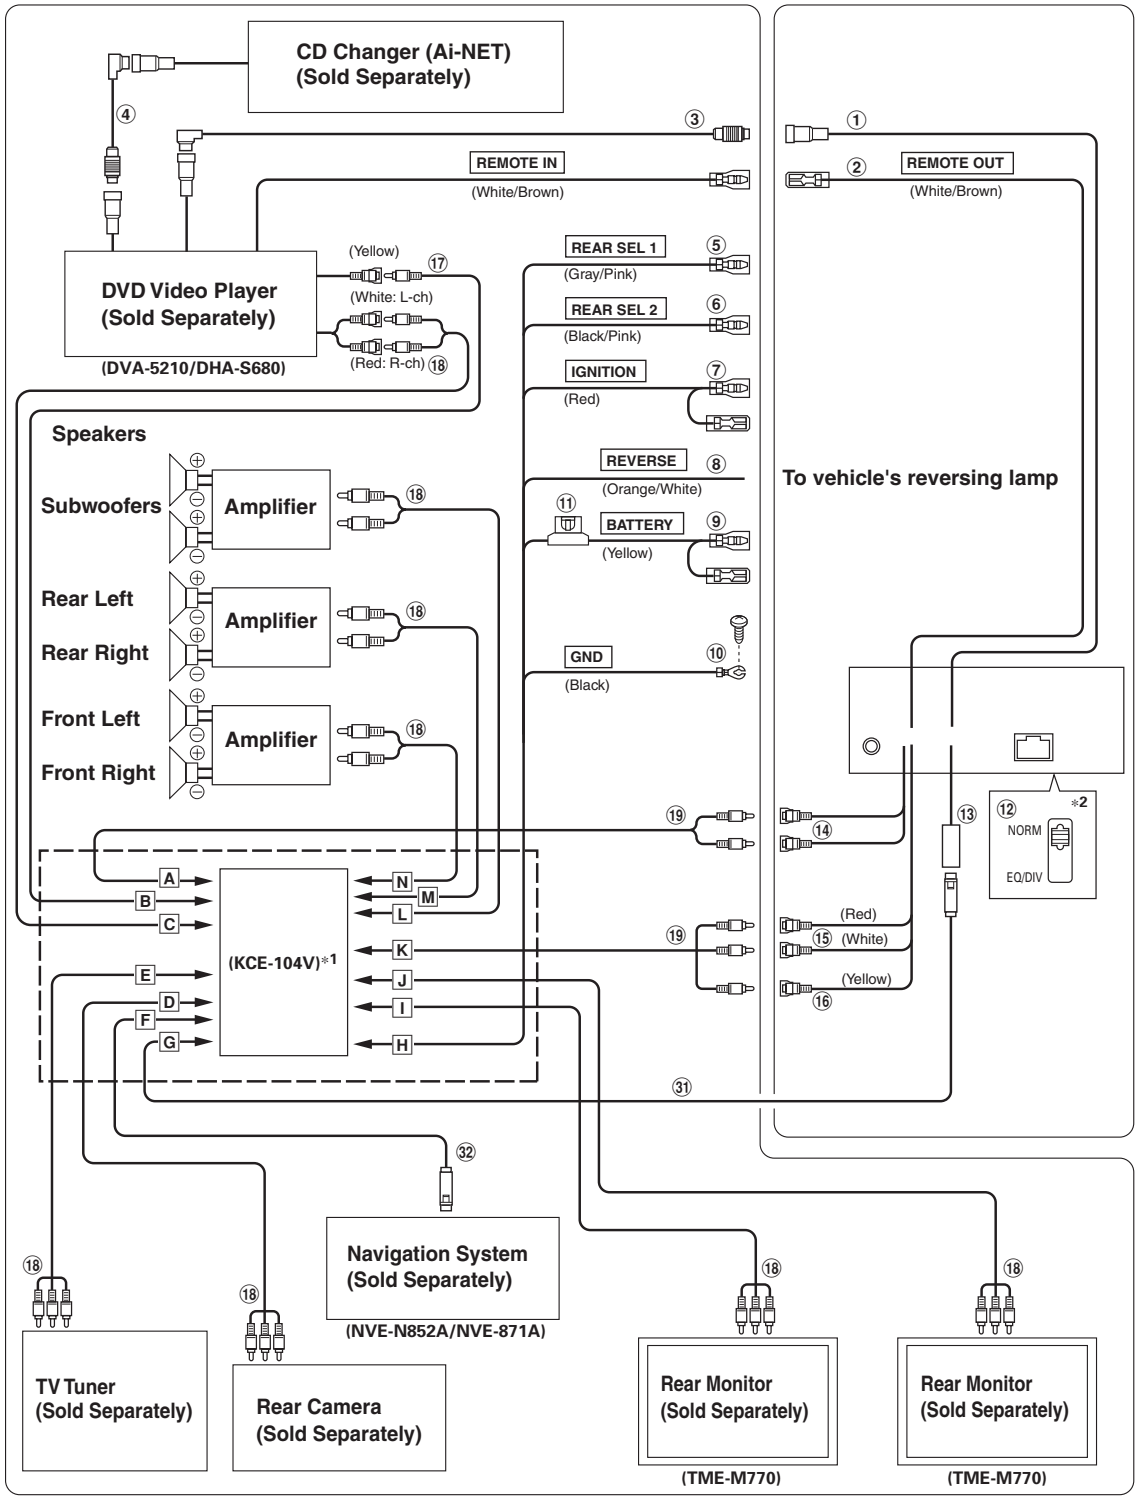

For details of each setting of external devices, refer to "Setting the External Expansion Box" (page 39), "Rear Monitor Setting" (page 40), "Setting the External Input" (page 41) and "Setting Front/Rear/ Subwoofer Preout of the External Expansion Box" (page 41).

*1 *Refer to the KCE-104V detail on page 57.*

*2 *Be sure turn the power off to the unit before changing the switch position.*

TO CONTENTS

Detail of the expansion box KCE-104V (sold separately)

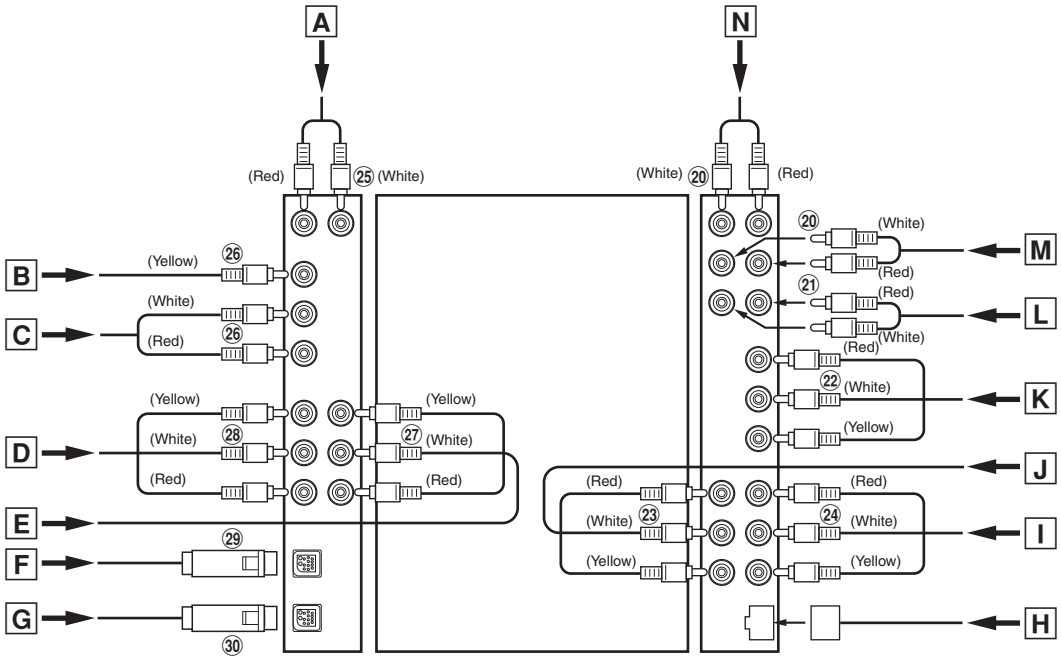

① Ai-NET Connector
Connect this to the output or input connector of other product equipped with Ai-NET.

② Remote Control Output Lead (White/Brown)
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

③ Ai-NET Cable (Included with DVD video player)

④ Ai-NET Cable (Included with CD Changer)

⑤ Rear Select 1 Lead (Gray/Pink)
Connect this lead to the ground with a push switch, etc.

⑥ Rear Select 2 Lead (Black/Pink)
Connect this lead to the ground with a push switch, etc.

⑦ Switched Power Lead (Ignition) (Red)
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+) 12V only when the ignition is turned on or in the accessory position.

⑧ Reverse Lamp Signal Input Lead (Orange/White)
Used to automatically switch to the rear camera input. Connect this lead to the positive side of the vehicle's reverse lamp. The video input will automatically switch to the rear camera whenever the vehicle is backing up.

⑨ Battery Lead (Yellow)
Connect this lead to the positive (+) post of the vehicle's battery.

⑩ Ground Lead (Black)
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

⑪ Fuse Holder (7.5A)

⑫ System Switch
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.

⑬ RGB Input Connector
Connect to the RGB output terminal of the KCE-104V.

⑭ Rear/Subwoofer Output RCA Connectors
RED is right and WHITE is left.

⑮ AUX Audio Input (AUX1) Connectors

⑯ AUX Video Input (AUX1) Connector

⑰ RCA Extension Cable (Included with DVD video player)

⑱ RCA Extension Cable (Sold Separately)

⑲ RCA Extension Cable (Included with KCE-104V)

⑳ To Front/Rear PREOUT Terminals of the KCE-104V

㉑ To Subwoofer Terminals of the KCE-104V

㉒ Connect to the AUX Input (AUX1) Connectors of the CVA-1014

㉓ To AUX1 Output Terminals of the KCE-104V

㉔ To AUX2 Output Terminals of the KCE-104V

㉕ To Sound Input Terminals of the KCE-104V (from the CVA-1014)

㉖ To AUX Input1 Terminals of the KCE-104V

㉗ To AUX Input2 Terminals of the KCE-104V

㉘ To AUX Input3 Terminals of the KCE-104V

㉙ Connect to the RGB Terminal of the Navigation System

㉚ Connect to the RGB Input Terminal of the CVA-1014

㉛ RGB Cable (Included with KCE-104V)

㉜ RGB Cable (Included with NVE-N852, not included with NVE-N871A)

TO CONTENTS

Electrical Parts List

* Each parts on P.W.Board are described in order of the reference number.

=======MAIN P.W.Board

BZ801	50T15447Y01	BUZZER,PKM13EPY
C100	08E37941S01	CAP,CER.62pF/50V
C112	08E37940S01	CAP,CER.39pF/50V
C115	08E37939S01	CAP,CER.18pF/50V
C121	08E37884S01	CAP,CER.22nF/50V
C125	08E37120S01	CAP,CER.10nF/50V
C126	08E37883S01	CAP,CER.10pF/50V
C131	08E37153S01	CAP,CER.1nF/50V
C132	08E37271S01	CAP,CER.22pF/50V
C133	08E37267S01	CAP,CER.47nF/25V
C143	08E35413S01	CAP,CER.2.2nF/50V
C144	08E37122S01	CAP,CER.0.1uF/25V
C147	08E37122S01	CAP,CER.0.1uF/25V
C151	08S35349Y16	CAP,CER.1uF/10V
C152	08S35349Y16	CAP,CER.1uF/10V
C211	08S35349Y16	CAP,CER.1uF/10V
C212	08S35349Y16	CAP,CER.1uF/10V
C213	08S35349Y16	CAP,CER.1uF/10V
C214	08S35349Y16	CAP,CER.1uF/10V
C215	08E37884S01	CAP,CER.22nF/50V
C216	08E37120S01	CAP,CER.10nF/50V
C221	08E37155S01	CAP,CER.0.22uF/10V
C231	08S35350Y04	CAP,CER.1uF/16V
C232	08S35350Y04	CAP,CER.1uF/16V
C233	08S35350Y04	CAP,CER.1uF/16V
C234	08S35350Y04	CAP,CER.1uF/16V
C235	08S35350Y04	CAP,CER.1uF/16V
C236	08S35350Y04	CAP,CER.1uF/16V
C237	08S35350Y04	CAP,CER.1uF/16V
C238	08S35350Y04	CAP,CER.1uF/16V
C239	08S35350Y04	CAP,CER.1uF/16V
C240	08S35350Y04	CAP,CER.1uF/16V
C241	08T81833F08	CAP,CER.4.7uF/10V
C242	08T81833F08	CAP,CER.4.7uF/10V
C243	08T81833F08	CAP,CER.4.7uF/10V
C244	08T81833F08	CAP,CER.4.7uF/10V
C245	08S35350Y04	CAP,CER.1uF/16V
C250	08E37153S01	CAP,CER.1nF/50V
C251	08E37153S01	CAP,CER.1nF/50V
C254	08E37153S01	CAP,CER.1nF/50V
C255	08E37153S01	CAP,CER.1nF/50V
C261	08E36593S01	CAP,CER.0.1uF/50V
C262	08E36593S01	CAP,CER.0.1uF/50V
C263	08E36593S01	CAP,CER.0.1uF/50V
C264	08E36593S01	CAP,CER.0.1uF/50V
C265	08E36593S01	CAP,CER.0.1uF/50V
C266	08E36593S01	CAP,CER.0.1uF/50V
C267	08E36593S01	CAP,CER.0.1uF/50V
C268	08E36593S01	CAP,CER.0.1uF/50V
C271	08E37122S01	CAP,CER.0.1uF/25V
C301	08E36593S01	CAP,CER.0.1uF/50V

C302	08E37153S01	CAP,CER.1nF/50V
C303	08E35412S01	CAP,CER.1.5nF/50V
C304	08E37122S01	CAP,CER.0.1uF/25V
C305	08E37122S01	CAP,CER.0.1uF/25V
C306	08E37122S01	CAP,CER.0.1uF/25V
C307	08S35374W12	CAP,CER.10uF/6.3V
C501	08E37121S01	CAP,CER.22nF/50V
C502	08S35349Y16	CAP,CER.1uF/10V
C503	08E35408S01	CAP,CER.10pF/50V
C504	08E35460S01	CAP,CER.12pF/50V
C505	08E35460S01	CAP,CER.12pF/50V
C506	08E37215S01	CAP,CER.15pF/50V
C507	08E37120S01	CAP,CER.10nF/50V
C508	08E37884S01	CAP,CER.22nF/50V
C511	08S35374W12	CAP,CER.10uF/6.3V
C512	08E37117S01	CAP,CER.100pF/50V
C513	08E37117S01	CAP,CER.100pF/50V
C542	08E37116S01	CAP,CER.27pF/50V
C543	08E37116S01	CAP,CER.27pF/50V
C544	08E37121S01	CAP,CER.22nF/50V
C599	08E37120S01	CAP,CER.10nF/50V
C606	08S35349Y16	CAP,CER.1uF/10V
C607	08S35349Y16	CAP,CER.1uF/10V
C608	08S35349Y16	CAP,CER.1uF/10V
C611	08T81833F08	CAP,CER.4.7uF/10V
C701	08E37121S01	CAP,CER.22nF/50V
C702	08E37120S01	CAP,CER.10nF/50V
C703	08E37121S01	CAP,CER.22nF/50V
C704	08E37122S01	CAP,CER.0.1uF/25V
C705	08E37267S01	CAP,CER.47nF/25V
C709	08E37175S01	CAP,CER.3pF/50V
C710	08E37120S01	CAP,CER.10nF/50V
C711	08E37178S01	CAP,CER.0.47uF/16V
C713	08S35349Y16	CAP,CER.1uF/10V
C714	08E37117S01	CAP,CER.100pF/50V
C715	08E37121S01	CAP,CER.22nF/50V
C716	08E37120S01	CAP,CER.10nF/50V
C717	08E37122S01	CAP,CER.0.1uF/25V
C718	08E37116S01	CAP,CER.27pF/50V
C719	08E37122S01	CAP,CER.0.1uF/25V
C720	08E37120S01	CAP,CER.10nF/50V
C721	08E37122S01	CAP,CER.0.1uF/25V
C722	08E37122S01	CAP,CER.0.1uF/25V
C723	08E37122S01	CAP,CER.0.1uF/25V
C724	08E37122S01	CAP,CER.0.1uF/25V
C725	08E37122S01	CAP,CER.0.1uF/25V
C726	08E37122S01	CAP,CER.0.1uF/25V
C727	08E37120S01	CAP,CER.10nF/50V
C728	08E37120S01	CAP,CER.10nF/50V
C729	08E37120S01	CAP,CER.10nF/50V
C730	08E37120S01	CAP,CER.10nF/50V
C731	08E37120S01	CAP,CER.10nF/50V
C732	08E37120S01	CAP,CER.10nF/50V
C733	08E37121S01	CAP,CER.22nF/50V
C734	08S35349Y16	CAP,CER.1uF/10V
C735	08S35349Y16	CAP,CER.1uF/10V
C736	08S35349Y16	CAP,CER.1uF/10V

C737	08S35349Y16	CAP,CER.1uF/10V
C738	08E37153S01	CAP,CER.1nF/50V
C739	08S35349Y16	CAP,CER.1uF/10V
C741	08E37122S01	CAP,CER.0.1uF/25V
C742	08E37120S01	CAP,CER.10nF/50V
C743	08E37122S01	CAP,CER.0.1uF/25V
C744	08S35374W12	CAP,CER.10uF/6.3V
C745	08E37120S01	CAP,CER.10nF/50V
C746	08S35374W12	CAP,CER.10uF/6.3V
C747	08E37122S01	CAP,CER.0.1uF/25V
C748	08E37121S01	CAP,CER.22nF/50V
C749	08E37153S01	CAP,CER.1nF/50V
C750	08E37121S01	CAP,CER.22nF/50V
C751	08E37121S01	CAP,CER.22nF/50V
C752	08E35411S01	CAP,CER.51pF/50V
C753	08E37121S01	CAP,CER.22nF/50V
C754	08E37153S01	CAP,CER.1nF/50V
C755	08E37178S01	CAP,CER.0.47uF/16V
C756	08S35349Y16	CAP,CER.1uF/10V
C757	08S35349Y16	CAP,CER.1uF/10V
C758	08E35408S01	CAP,CER.10pF/50V
C759	08E35408S01	CAP,CER.10pF/50V
C760	08E35408S01	CAP,CER.10pF/50V
C761	08S35349Y16	CAP,CER.1uF/10V
C762	08E37121S01	CAP,CER.22nF/50V
C763	08S35349Y16	CAP,CER.1uF/10V
C764	08S35349Y16	CAP,CER.1uF/10V
C765	08S35349Y16	CAP,CER.1uF/10V
C766	08S35349Y16	CAP,CER.1uF/10V
C767	08S35349Y16	CAP,CER.1uF/10V
C768	08S35349Y16	CAP,CER.1uF/10V
C772	08E37121S01	CAP,CER.22nF/50V
C774	08S35350Y04	CAP,CER.1uF/16V
C775	08S35350Y04	CAP,CER.1uF/16V
C776	08S35349Y16	CAP,CER.1uF/10V
C779	08S35374W12	CAP,CER.10uF/6.3V
C800	08S45539Y04	CAP,CER.10nF/630V
C803	08E37122S01	CAP,CER.0.1uF/25V
C805	08S35350Y04	CAP,CER.1uF/16V
C806	08E37884S01	CAP,CER.22nF/50V
C808	08E37884S01	CAP,CER.22nF/50V
C809	08E37884S01	CAP,CER.22nF/50V
C810	08E36593S01	CAP,CER.0.1uF/50V
C811	08E37178S01	CAP,CER.0.47uF/16V
C813	08E37122S01	CAP,CER.0.1uF/25V
C814	08S45539Y04	CAP,CER.10nF/630V
C815	08E37267S01	CAP,CER.47nF/25V
C816	08T65463Y01	CAP,CER.3.3uF/10V
C817	08S35350Y04	CAP,CER.1uF/16V
C818	08E37121S01	CAP,CER.22nF/50V
C819	08E37153S01	CAP,CER.1nF/50V
C820	08E37121S01	CAP,CER.22nF/50V
C821	08T65463Y02	CAP,CER.0.33uF/50V
C822	08T65463Y01	CAP,CER.3.3uF/10V
C823	08E37122S01	CAP,CER.0.1uF/25V
C825	08E37121S01	CAP,CER.22nF/50V
C826	08S35374W12	CAP,CER.10uF/6.3V

C827	08E37120S01	CAP,CER.10nF/50V
C828	08E37120S01	CAP,CER.10nF/50V
C829	08T65463Y02	CAP,CER.0.33uF/50V
C830	08T81833F13	CAP,CER.10uF/16V
C831	08E37121S01	CAP,CER.22nF/50V
C832	08E37121S01	CAP,CER.22nF/50V
C833	08E37121S01	CAP,CER.22nF/50V
C837	08E37121S01	CAP,CER.22nF/50V
C838	08E37121S01	CAP,CER.22nF/50V
C839	08E37121S01	CAP,CER.22nF/50V
C841	08E37121S01	CAP,CER.22nF/50V
C842	08E37121S01	CAP,CER.22nF/50V
C845	08E37121S01	CAP,CER.22nF/50V
C846	08E37121S01	CAP,CER.22nF/50V
C849	08E37155S01	CAP,CER.0.22uF/10V
C850	08E37120S01	CAP,CER.10nF/50V
C851	08E37122S01	CAP,CER.0.1uF/25V
C852	08E37122S01	CAP,CER.0.1uF/25V
C853	08E37121S01	CAP,CER.22nF/50V
C854	08E37948S01	CAP,CER.390pF/50V
C855	08S35349Y17	CAP,CER.2.2uF/6.3V
C856	08E37120S01	CAP,CER.10nF/50V
C857	08E37122S01	CAP,CER.0.1uF/25V
C861	08S35374W12	CAP,CER.10uF/6.3V
C862	08T65463Y02	CAP,CER.0.33uF/50V
C862	08E37926S01	CAP,CER.0.33uF/50V
C863	08T65463Y02	CAP,CER.0.33uF/50V
C864	08T81833F13	CAP,CER.10uF/16V
C865	08T81833F13	CAP,CER.10uF/16V
C866	08T81833F13	CAP,CER.10uF/16V
C867	08T65463Y02	CAP,CER.0.33uF/50V
C868	08S35374W12	CAP,CER.10uF/6.3V
C871	08T65463Y02	CAP,CER.0.33uF/50V
C872	08T81833F13	CAP,CER.10uF/16V
C873	08T65463Y02	CAP,CER.0.33uF/50V
C874	08T65463Y01	CAP,CER.3.3uF/10V
C878	08T65463Y02	CAP,CER.0.33uF/50V
C879	08S35374W12	CAP,CER.10uF/6.3V
C961	08E37122S01	CAP,CER.0.1uF/25V
C962	08T65463Y02	CAP,CER.0.33uF/50V
C963	08S35350Y04	CAP,CER.1uF/16V
CB200	09E37852S01	CONN,WTB 8P
CB201	09E37849S01	CONN,WTB 3P
CB202	09E37851S01	CONN,WTB 3P
CB203	09E37850S01	CONN,WTB 2P
CB204	09E37853S01	CONN,WTB 2P
CB205	09E37849S01	CONN,WTB 3P
CB302	09E37938S01	CONN,WTB 8P
CB303	09E37937S01	CONN,WTB 7P
CB802	09T65097Y40	CONN,FFC 40P
CB803	09T65097Y40	CONN,FFC 40P
CH101	09E37854S01	CONN,15P
CH102	09T15153Y40	CONN,FFC 40P
D121	48T85357W01	DIODE,1PS226
D203	48E37886S01	DIODE,DAP222
D204	48E37886S01	DIODE,DAP222
D222	48T25593Y01	DIODE,S1G-6904

D224	48T25593Y01	DIODE,S1G-6904
D226	48T25593Y01	DIODE,S1G-6904
D228	48T25593Y01	DIODE,S1G-6904
D301	48E37885S01	DIODE,DAN222
D541	48E37927S01	DIODE,1SS355
D801	48E37927S01	DIODE,1SS355
D805	48E37885S01	DIODE,DAN222
D806	48T85357W01	DIODE,1PS226
D807	48T25593Y01	DIODE,S1G-6904
D808	48E37927S01	DIODE,1SS355
D809	48T25593Y01	DIODE,S1G-6904
D811	48E37885S01	DIODE,DAN222
D814	48E37887S01	DIODE,DA227
D816	48E37887S01	DIODE,DA227
D820	48T15702W01	DIODE,SB05-05CP
D821	48T15702W01	DIODE,SB05-05CP
D861	48T25593Y01	DIODE,S1G-6904
D862	48T25593Y01	DIODE,S1G-6904
D863	48T25593Y01	DIODE,S1G-6904
E211	23E37925S01	CAP,ELY.1uF/50V
E212	23E37925S01	CAP,ELY.1uF/50V
E213	23E37925S01	CAP,ELY.1uF/50V
E214	23E37925S01	CAP,ELY.1uF/50V
E223	23T75487W37	CAP,ELY.3300/16
E225	23T65002Y07	CAP,ELY.10uF/25V
E226	23T65002Y03	CAP,ELY.100uF/16V
E605	23E37180S01	CAP,ELY.100uF/10V
E606	23E37923S01	CAP,ELY.47uF/16V
E607	23E37180S01	CAP,ELY.100uF/10V
E608	23E37923S01	CAP,ELY.47uF/16V
E609	23E37180S01	CAP,ELY.100uF/10V
E610	23E37923S01	CAP,ELY.47uF/16V
E701	23T65002Y03	CAP,ELY.100uF/16V
E702	23T65002Y03	CAP,ELY.100uF/16V
E703	23T65002Y03	CAP,ELY.100uF/16V
E704	23T65002Y03	CAP,ELY.100uF/16V
E801	23T65002Y05	CAP,ELY.470uF/16V
E802	23E37922S01	CAP,ELY.33uF/25V
E805	23E37924S01	CAP,ELY.220uF/10V
E806	23E37921S01	CAP,ELY.22uF/16V
E807	23E37180S01	CAP,ELY.100uF/10V
E811	23T65002Y07	CAP,ELY.10uF/25V
E812	23E37925S01	CAP,ELY.1uF/50V
E817	23T65002Y02	CAP,ELY.330uF/25V
E818	23T65002Y02	CAP,ELY.330uF/25V
E819	23T65002Y05	CAP,ELY.470uF/16V
E820	23T65002Y05	CAP,ELY.470uF/16V
E821	23T65002Y04	CAP,ELY.1000uF/10V
E827	23T75487W37	CAP,ELY.3300/16
E829	23T65002Y02	CAP,ELY.330uF/25V
E830	23T65002Y03	CAP,ELY.100uF/16V
E831	23T65002Y02	CAP,ELY.330uF/25V
E848	23E37925S01	CAP,ELY.1uF/50V
F201	65T75477Y13	FUSE,4A
F802	65T35516Y01	FUSE,0.25A
F803	65T35516Y08	FUSE,1.6A
F804	65T35516Y03	FUSE,0.5A

F805	65T35516Y03	FUSE,0.5A
IC201	51T45495Y02	IC,TA8270H
IC271	51T35743Y01	IC,TC7W66FU
IC301	51E37930S01	IC,TC7W32FU
IC303	51E37932S01	IC,TC7SH00FU
IC304	51T45053Y01	IC,TC74HC4053AFT
IC501	51T65156Y01	MTP,D70F3089YGJ
IC511	51E37891S01	IC,BA8275F
IC541	51T55070W05	IC,MB88385CPF
IC704	51E37184S01	IC,NJM2529FN
IC707	51E37931S01	IC,NJM2535V
IC708	51E37888S01	IC,TC74HC4538AFT
IC709	51T45491Y02	IC,CD0039AM
IC710	51E37235S01	IC,BA7606FS
IC714	51E37889S01	IC,TC7S32FU
IC776	51E37890S01	IC,BU2507FV
IC801	51T85450W01	IC,TDA3606
IC807	51T75523W01	IC,TL5001
IC808	51T75628W02	IC,BA6285AFP
IC810	51T75628W02	IC,BA6285AFP
IC811	51T75628W02	IC,BA6285AFP
IC813	51T25449Y01	IC,AN8018SA
IC821	51T15724Y04	IC,AN79L05M
IC851	51T75197W10	IC,AN77L10M
IC861	51T75197W10	IC,AN77L10M
IC862	51E36640S01	IC,BA00BC0WFP
IC863	51E36640S01	IC,BA00BC0WFP
IC871	51T75197W08	IC,AN77L08M
IC872	51T75197W07	IC,AN77L07M
IC878	51T75197W05	IC,AN77L05M
L100	24T55488Y20	IND,27nH
L103	24T55488Y24	IND,39nH
L121	24T65645Y01	IND,4.7uH
L122	24E37900S01	IND,15uH
L123	24T35286Y02	IND,3.3mH
L131	24T25164Y21	IND,4.7uH
L132	91E37899S01	FIL,EMI
L501	91E37899S01	FIL,EMI
L502	91E37899S01	FIL,EMI
L503	91E37899S01	FIL,EMI
L506	91E37899S01	FIL,EMI
L541	24T95457W18	FIL,EMI
L542	91E37899S01	FIL,EMI
L543	91E37899S01	FIL,EMI
L701	24T25164Y25	IND,10uH
L702	24T25164Y25	IND,10uH
L704	24T25164Y17	IND,2.2uH
L705	24T25164Y35	IND,68uH
L751	24T25164Y25	IND,10uH
L752	24T25164Y25	IND,10uH
L753	91E37899S01	FIL,EMI
L754	24T25164Y25	IND,10uH
L755	91E37899S01	FIL,EMI
L756	91E37899S01	FIL,EMI
L801	24E37848S01	COIL,CHOKE 1.2mH
L802	24T95202W19	IND,330uH
L803	24T95202W21	IND,470uH

L804	24T25565Y11	IND,220uH
L805	24T25578Y13	IND,100uH
Q125	48E37219S01	TR,2SA1774TL
Q126	48T45594W16	TR,XN1A311
Q133	48E37097S01	TR,DTC114EE
Q147	48E37156S01	TR,DTC124EE
Q204	48T25317Y01	TR,XN0F256
Q206	48T25317Y01	TR,XN0F256
Q207	48T45594W12	TR,XN1A312
Q208	48E37156S01	TR,DTC124EE
Q209	48E37156S01	TR,DTC124EE
Q210	48T45594W12	TR,XN1A312
Q271	48E37156S01	TR,DTC124EE
Q301	48E37219S01	TR,2SA1774TL
Q302	48E37097S01	TR,DTC114EE
Q303	48E37097S01	TR,DTC114EE
Q304	48E37097S01	TR,DTC114EE
Q503	48T45594W12	TR,XN1A312
Q541	48E37893S01	TR,DTA114EE
Q605	48E37219S01	TR,2SA1774TL
Q606	48E37233S01	TR,2SC4617
Q607	48E37097S01	TR,DTC114EE
Q608	48E37233S01	TR,2SC4617
Q609	48E37219S01	TR,2SA1774TL
Q610	48E37233S01	TR,2SC4617
Q611	48E37097S01	TR,DTC114EE
Q612	48E37233S01	TR,2SC4617
Q613	48E37219S01	TR,2SA1774TL
Q614	48E37233S01	TR,2SC4617
Q615	48E37097S01	TR,DTC114EE
Q616	48E37233S01	TR,2SC4617
Q617	48E37219S01	TR,2SA1774TL
Q618	48E37233S01	TR,2SC4617
Q620	48E37233S01	TR,2SC4617
Q701	48E37126S01	TR,2SC3265
Q709	48E37156S01	TR,DTC124EE
Q711	48E37933S01	TR,DTC143TE
Q712	48E37933S01	TR,DTC143TE
Q713	48E37933S01	TR,DTC143TE
Q775	48E37233S01	TR,2SC4617
Q776	48E37219S01	TR,2SA1774TL
Q801	48E37190S01	TR,2SB1198K
Q802	48T45594W12	TR,XN1A312
Q803	48E37894S01	TR,2SA1797
Q804	48T25693Y04	TR,2SD1742
Q805	48E37897S01	TR,DTC143XE
Q806	48E37233S01	TR,2SC4617
Q808	48T25693Y04	TR,2SD1742
Q809	48T45594W16	TR,XN1A311
Q811	48T45594W12	TR,XN1A312
Q812	48E37097S01	TR,DTC114EE
Q816	48E37892S01	TR,DTA143EE
Q817	48E36576S01	TR,2SB1243Q
Q818	48E37219S01	TR,2SA1774TL
Q819	48E36576S01	TR,2SB1243Q
Q820	48E37156S01	TR,DTC124EE
Q821	48E37896S01	TR,DTC123EE

Q822	48E37896S01	TR,DTC123EE
Q823	48E37156S01	TR,DTC124EE
Q824	48E37156S01	TR,DTC124EE
Q825	48E37892S01	TR,DTA143EE
Q826	48E37156S01	TR,DTC124EE
Q827	48E37191S01	TR,2SD1760
Q828	48T65515Y01	TR,2SA2067
Q829	48E37233S01	TR,2SC4617
Q830	48E37894S01	TR,2SA1797
Q831	48T75133W01	FET,2SJ327Z
Q832	48E37188S01	TR,DTC144EE
Q833	48E37097S01	TR,DTC114EE
Q835	48E37895S01	TR,IMZ4108
Q836	48E37190S01	TR,2SB1198K
Q837	48E37188S01	TR,DTC144EE
Q838	48E37233S01	TR,2SC4617
Q839	48E37233S01	TR,2SC4617
Q840	48E37156S01	TR,DTC124EE
Q841	48E37156S01	TR,DTC124EE
Q842	48T45594W16	TR,XN1A311
Q843	48E37156S01	TR,DTC124EE
Q844	48E37898S01	TR,2SC4081R
Q846	48T45594W12	TR,XN1A312
Q851	48T65516Y02	TR,2SC5788P
Q852	48T65516Y02	TR,2SC5788P
Q853	48T65516Y02	TR,2SC5788P
Q854	48T65516Y02	TR,2SC5788P
Q855	48T65516Y02	TR,2SC5788P
Q857	48E37201S01	TR,2SC4540
Q858	48E37187S01	TR,2SA1735
Q865	48T65516Y02	TR,2SC5788P
Q866	48T65516Y02	TR,2SC5788P
Q867	48T45594W16	TR,XN1A311
Q881	48T45594W16	TR,XN1A31
Q882	48T45594W12	TR,XN1A312
Q883	48E37128S01	TR,2SD1782K
Q884	48E37125S01	TR,2SA1298Y
Q961	48E37191S01	TR,2SD1760
R106	06E37098S01	RES,CF.10K-1/16W
R107	06E37098S01	RES,CF.10K-1/16W
R121	06E37280S01	RES,CF.10-1/4W
R125	06E35386S01	RES,CF.3.3K-1/16W
R126	06E35382S01	RES,CF.1.5K-1/16W
R141	06E37245S01	RES,CF.0-1/16W
R143	06E37096S01	RES,CF.4.7K-1/16W
R144	06E35392S01	RES,CF.75K-1/16W
R149	06E37232S01	RES,CF.100K-1/16W
R151	06E37146S01	RES,CF.100-1/16W
R152	06E37146S01	RES,CF.100-1/16W
R225	06E37140S01	RES,CF.47K-1/16W
R226	06E37140S01	RES,CF.47K-1/16W
R227	06E37146S01	RES,CF.100-1/16W
R228	06E37146S01	RES,CF.100-1/16W
R230	06E37098S01	RES,CF.10K-1/16W
R233	06E37146S01	RES,CF.100-1/16W
R235	06E37245S01	RES,CF.0-1/16W
R236	06E37245S01	RES,CF.0-1/16W

R237	06E37245S01	RES,CF.0-1/16W
R238	06E37245S01	RES,CF.0-1/16W
R245	06E35347S01	RES,CF.10K-1/10W
R251	06E37223S01	RES,CF.220-1/16W
R252	06E37223S01	RES,CF.220-1/16W
R253	06E37223S01	RES,CF.220-1/16W
R254	06E37223S01	RES,CF.220-1/16W
R255	06E37140S01	RES,CF.47K-1/16W
R256	06E37140S01	RES,CF.47K-1/16W
R257	06E37146S01	RES,CF.100-1/16W
R258	06E37146S01	RES,CF.100-1/16W
R261	06E35350S01	RES,CF.2.2-1/4W
R262	06E35350S01	RES,CF.2.2-1/4W
R263	06E35350S01	RES,CF.2.2-1/4W
R264	06E35350S01	RES,CF.2.2-1/4W
R265	06E35350S01	RES,CF.2.2-1/4W
R266	06E35350S01	RES,CF.2.2-1/4W
R267	06E35350S01	RES,CF.2.2-1/4W
R268	06E35350S01	RES,CF.2.2-1/4W
R271	06E37103S01	RES,CF.22K-1/16W
R301	06E37098S01	RES,CF.10K-1/16W
R302	06E35357S01	RES,CF.82-1/4W
R303	06E35233S01	RES,CF.1K-1/10W
R304	06E35233S01	RES,CF.1K-1/10W
R308	06E37232S01	RES,CF.100K-1/16W
R309	06E37232S01	RES,CF.100K-1/16W
R310	06E35386S01	RES,CF.3.3K-1/16W
R311	06E37094S01	RES,CF.1K-1/16W
R312	06E37103S01	RES,CF.22K-1/16W
R313	06E37103S01	RES,CF.22K-1/16W
R314	06E37167S01	RES,CF.2.2K-1/16W
R315	06E37098S01	RES,CF.10K-1/16W
R316	06E35358S01	RES,CF.100-1/4W
R317	06E37130S01	RES,CF.36-1/4W
R318	06E37146S01	RES,CF.100-1/16W
R319	06E37250S01	RES,CF.39-1/4W
R320	06E35233S01	RES,CF.1K-1/10W
R321	06E37146S01	RES,CF.100-1/16W
R323	06E35357S01	RES,CF.82-1/4W
R324	06E35233S01	RES,CF.1K-1/10W
R327	06E37094S01	RES,CF.1K-1/16W
R502	06E37232S01	RES,CF.100K-1/16W
R504	06E37103S01	RES,CF.22K-1/16W
R506	06E37103S01	RES,CF.22K-1/16W
R507	06E37094S01	RES,CF.1K-1/16W
R508	06E37232S01	RES,CF.100K-1/16W
R509	06E37245S01	RES,CF.0-1/16W
R510	06E37245S01	RES,CF.0-1/16W
R514	06E37140S01	RES,CF.47K-1/16W
R515	06E37140S01	RES,CF.47K-1/16W
R516	06E37094S01	RES,CF.1K-1/16W
R517	06E37140S01	RES,CF.47K-1/16W
R518	06E37103S01	RES,CF.22K-1/16W
R519	06E37094S01	RES,CF.1K-1/16W
R520	06E37094S01	RES,CF.1K-1/16W
R521	06E37110S01	RES,CF.10K-1/16W
R522	06E37110S01	RES,CF.10K-1/16W

R523	06E37110S01	RES,CF.10K-1/16W
R524	06E37140S01	RES,CF.47K-1/16W
R525	06E35395S01	RES,CF.470K-1/16W
R527	06E35378S01	RES,CF.820-1/16W
R528	06E35378S01	RES,CF.820-1/16W
R529	06E37146S01	RES,CF.100-1/16W
R530	06E37140S01	RES,CF.47K-1/16W
R531	06E37098S01	RES,CF.10K-1/16W
R532	06E37098S01	RES,CF.10K-1/16W
R533	06E37096S01	RES,CF.4.7K-1/16W
R534	06E37096S01	RES,CF.4.7K-1/16W
R535	06E37098S01	RES,CF.10K-1/16W
R536	06E37098S01	RES,CF.10K-1/16W
R537	06E37094S01	RES,CF.1K-1/16W
R538	06E37094S01	RES,CF.1K-1/16W
R539	06E37146S01	RES,CF.100-1/16W
R540	06E37146S01	RES,CF.100-1/16W
R541	06E35386S01	RES,CF.3.3K-1/16W
R542	06E37096S01	RES,CF.4.7K-1/16W
R543	06E37096S01	RES,CF.4.7K-1/16W
R544	06E37280S01	RES,CF.10-1/4W
R545	06E35359S01	RES,CF.160-1/4W
R546	06E35359S01	RES,CF.160-1/4W
R547	06E35359S01	RES,CF.160-1/4W
R548	06E35359S01	RES,CF.160-1/4W
R549	06E35382S01	RES,CF.1.5K-1/16W
R550	06E37167S01	RES,CF.2.2K-1/16W
R551	06E37167S01	RES,CF.2.2K-1/16W
R552	06E35382S01	RES,CF.1.5K-1/16W
R561	06E35233S01	RES,CF.1K-1/10W
R562	06E35233S01	RES,CF.1K-1/10W
R563	06E35233S01	RES,CF.1K-1/10W
R564	06E35233S01	RES,CF.1K-1/10W
R565	06E35233S01	RES,CF.1K-1/10W
R566	06E35233S01	RES,CF.1K-1/10W
R567	06E35348S01	RES,CF.1K-1/10W
R568	06E35348S01	RES,CF.1K-1/10W
R569	06E35347S01	RES,CF.10K-1/10W
R602	06E37245S01	RES,CF.0-1/16W
R603	06E37245S01	RES,CF.0-1/16W
R611	06E37130S01	RES,CF.36-1/4W
R612	06E37250S01	RES,CF.39-1/4W
R618	06E37134S01	RES,CF.470-1/16W
R619	06E37134S01	RES,CF.470-1/16W
R620	06E37139S01	RES,CF.18K-1/16W
R621	06E37146S01	RES,CF.100-1/16W
R622	06E37098S01	RES,CF.10K-1/16W
R623	06E35382S01	RES,CF.1.5K-1/16W
R624	06E35382S01	RES,CF.1.5K-1/16W
R625	06E35380S01	RES,CF.1.1K-1/16W
R626	06E37103S01	RES,CF.22K-1/16W
R627	06E37130S01	RES,CF.36-1/4W
R628	06E37250S01	RES,CF.39-1/4W
R629	06E37134S01	RES,CF.470-1/16W
R630	06E37134S01	RES,CF.470-1/16W
R631	06E37139S01	RES,CF.18K-1/16W
R632	06E37098S01	RES,CF.10K-1/16W

R633	06E35382S01	RES,CF.1.5K-1/16W
R634	06E37146S01	RES,CF.100-1/16W
R635	06E35382S01	RES,CF.1.5K-1/16W
R636	06E35394S01	RES,CF.180K-1/16W
R637	06E35380S01	RES,CF.1.1K-1/16W
R638	06E37103S01	RES,CF.22K-1/16W
R639	06E37130S01	RES,CF.36-1/4W
R640	06E37250S01	RES,CF.39-1/4W
R641	06E37134S01	RES,CF.470-1/16W
R642	06E37134S01	RES,CF.470-1/16W
R643	06E37139S01	RES,CF.18K-1/16W
R644	06E37098S01	RES,CF.10K-1/16W
R645	06E37146S01	RES,CF.100-1/16W
R646	06E35394S01	RES,CF.180K-1/16W
R647	06E37103S01	RES,CF.22K-1/16W
R648	06E37130S01	RES,CF.36-1/4W
R649	06E35382S01	RES,CF.1.5K-1/16W
R650	06E35382S01	RES,CF.1.5K-1/16W
R651	06E35380S01	RES,CF.1.1K-1/16W
R652	06E37250S01	RES,CF.39-1/4W
R653	06E37095S01	RES,CF.1.2K-1/16W
R654	06E35382S01	RES,CF.1.5K-1/16W
R655	06E37103S01	RES,CF.22K-1/16W
R656	06E37146S01	RES,CF.100-1/16W
R657	06E35280S01	RES,CF.39K-1/16W
R659	06E37094S01	RES,CF.1K-1/16W
R660	06E37195S01	RES,CF.2K-1/16W
R661	06E37166S01	RES,CF.1.8K-1/16W
R662	06E35394S01	RES,CF.180K-1/16W
R701	06E37245S01	RES,CF.0-1/16W
R702	06E37096S01	RES,CF.4.7K-1/16W
R703	06E35350S01	RES,CF.2.2-1/4W
R704	06E35350S01	RES,CF.2.2-1/4W
R705	06E37091S01	RES,CF.47-1/16W
R706	06E37141S01	RES,CF.1M-1/16W
R707	06E37142S01	RES,CF.12K-1/16W
R709	06E37166S01	RES,CF.1.8K-1/16W
R710	06E37137S01	RES,CF.5.6K-1/16W
R711	06E37138S01	RES,CF.8.2K-1/16W
R714	06E37262S01	RES,CF.470-1/16W
R715	06E37228S01	RES,CF.510-1/16W
R716	06E37095S01	RES,CF.1.2K-1/16W
R717	06E37245S01	RES,CF.0-1/16W
R718	06E37096S01	RES,CF.4.7K-1/16W
R719	06E37245S01	RES,CF.0-1/16W
R720	06E37245S01	RES,CF.0-1/16W
R721	06E37245S01	RES,CF.0-1/16W
R722	06E37197S01	RES,CF.12K-1/16W
R731	06E37254S01	RES,CF.75-1/16W
R732	06E37254S01	RES,CF.75-1/16W
R733	06E37254S01	RES,CF.75-1/16W
R738	06E37094S01	RES,CF.1K-1/16W
R739	06E37104S01	RES,CF.910K-1/16W
R740	06E37256S01	RES,CF.360-1/16W
R741	06E37104S01	RES,CF.910K-1/16W
R742	06E37096S01	RES,CF.4.7K-1/16W
R743	06E37095S01	RES,CF.1.2K-1/16W

R744	06E37245S01	RES,CF.0-1/16W
R745	06E37103S01	RES,CF.22K-1/16W
R746	06E37091S01	RES,CF.47-1/16W
R751	06E37146S01	RES,CF.100-1/16W
R752	06E37146S01	RES,CF.100-1/16W
R753	06E37146S01	RES,CF.100-1/16W
R754	06E37146S01	RES,CF.100-1/16W
R757	06E37146S01	RES,CF.100-1/16W
R758	06E37096S01	RES,CF.4.7K-1/16W
R759	06E37105S01	RES,CF.3.3K-1/16W
R760	06E37140S01	RES,CF.47K-1/16W
R761	06E37141S01	RES,CF.1M-1/16W
R762	06E35446S01	RES,CF.1.1K-1/16W
R763	06E35400S01	RES,CF.5.1K-1/16W
R764	06E37227S01	RES,CF.1K-1/16W
R765	06E37092S01	RES,CF.68-1/16W
R766	06E37092S01	RES,CF.68-1/16W
R767	06E37092S01	RES,CF.68-1/16W
R771	06E37094S01	RES,CF.1K-1/16W
R772	06E37094S01	RES,CF.1K-1/16W
R773	06E37094S01	RES,CF.1K-1/16W
R774	06E37094S01	RES,CF.1K-1/16W
R775	06E37254S01	RES,CF.75-1/16W
R776	06E37094S01	RES,CF.1K-1/16W
R777	06E37094S01	RES,CF.1K-1/16W
R778	06E35386S01	RES,CF.3.3K-1/16W
R799	06E35365S01	RES,CF.2.2K-1/4W
R800	06E37107S01	RES,CF.1-1/16W
R801	06E37232S01	RES,CF.100K-1/16W
R802	06E35390S01	RES,CF.56K-1/16W
R803	06E37094S01	RES,CF.1K-1/16W
R804	06E35370S01	RES,CF.390K-1/4W
R805	06E37094S01	RES,CF.1K-1/16W
R806	06E35369S01	RES,CF.120K-1/4W
R807	06E35365S01	RES,CF.2.2K-1/4W
R808	06E35236S01	RES,CF.1.5K-1/4W
R809	06E35354S01	RES,CF.33-1/4W
R810	06E35443S01	RES,CF.24K-1/4W
R812	06E35362S01	RES,CF.470-1/4W
R814	06E37169S01	RES,CF.1.8K-1/16W
R815	06E37093S01	RES,CF.5.6K-1/16W
R816	06E35360S01	RES,CF.300-1/4W
R818	06E37132S01	RES,CF.560-1/4W
R819	06E35405S01	RES,CF.120K-1/16W
R820	06E37264S01	RES,CF.39K-1/16W
R821	06E37146S01	RES,CF.100-1/16W
R822	06E37146S01	RES,CF.100-1/16W
R823	06E37146S01	RES,CF.100-1/16W
R824	06E37146S01	RES,CF.100-1/16W
R825	06E37146S01	RES,CF.100-1/16W
R826	06E37146S01	RES,CF.100-1/16W
R827	06E37146S01	RES,CF.100-1/16W
R829	06E35365S01	RES,CF.2.2K-1/4W
R830	06E35447S01	RES,CF.240K-1/16W
R832	06E37103S01	RES,CF.22K-1/16W
R833	06E35349S01	RES,CF.1-1/4W
R834	06E35349S01	RES,CF.1-1/4W

R835	06E37098S01	RES,CF.10K-1/16W
R836	06E35366S01	RES,CF.4.7K-1/4W
R837	06E35366S01	RES,CF.4.7K-1/4W
R838	06E37253S01	RES,CF.10K-1/4W
R839	06E37140S01	RES,CF.47K-1/16W
R840	06E35440S01	RES,CF.6.8-1/4W
R841	06E35440S01	RES,CF.6.8-1/4W
R842	06E37098S01	RES,CF.10K-1/16W
R843	06E35443S01	RES,CF.24K-1/4W
R844	06E35440S01	RES,CF.6.8-1/4W
R845	06E35440S01	RES,CF.6.8-1/4W
R846	06E35388S01	RES,CF.24K-1/16W
R847	06E35388S01	RES,CF.24K-1/16W
R848	06E35365S01	RES,CF.2.2K-1/4W
R849	06E35236S01	RES,CF.1.5K-1/4W
R850	06E35236S01	RES,CF.1.5K-1/4W
R851	06E35236S01	RES,CF.1.5K-1/4W
R852	06E35236S01	RES,CF.1.5K-1/4W
R853	06E37253S01	RES,CF.10K-1/4W
R854	06E37096S01	RES,CF.4.7K-1/16W
R856	06E37096S01	RES,CF.4.7K-1/16W
R857	06E35388S01	RES,CF.24K-1/16W
R858	06E35441S01	RES,CF.270-1/4W
R859	06E35441S01	RES,CF.270-1/4W
R860	06E37140S01	RES,CF.47K-1/16W
R861	06E37253S01	RES,CF.10K-1/4W
R862	06E37098S01	RES,CF.10K-1/16W
R863	06E37221S01	RES,CF.1K-1/4W
R864	06E37253S01	RES,CF.10K-1/4W
R865	06E37140S01	RES,CF.47K-1/16W
R866	06E37140S01	RES,CF.47K-1/16W
R867	06E37253S01	RES,CF.10K-1/4W
R868	06E35388S01	RES,CF.24K-1/16W
R869	06E35367S01	RES,CF.5.6K-1/4W
R870	06E37166S01	RES,CF.1.8K-1/16W
R871	06E35349S01	RES,CF.1-1/4W
R872	06E35349S01	RES,CF.1-1/4W
R873	06E37103S01	RES,CF.22K-1/16W
R874	06E35361S01	RES,CF.330-1/4W
R875	06E35405S01	RES,CF.120K-1/16W
R876	06E37264S01	RES,CF.39K-1/16W
R877	06E35364S01	RES,CF.910-1/4W
R878	06E35365S01	RES,CF.2.2K-1/4W
R879	06E35365S01	RES,CF.2.2K-1/4W
R880	06E35364S01	RES,CF.910-1/4W
R881	06E35391S01	RES,CF.62K-1/16W
R882	06E37167S01	RES,CF.2.2K-1/16W
R883	06E37144S01	RES,CF.220K-1/16W
R884	06E35365S01	RES,CF.2.2K-1/4W
R885	06E35388S01	RES,CF.24K-1/16W
R886	06E35365S01	RES,CF.2.2K-1/4W
R887	06E35365S01	RES,CF.2.2K-1/4W
R888	06E37252S01	RES,CF.22K-1/16W
R889	06E37144S01	RES,CF.220K-1/16W
R890	06E35362S01	RES,CF.470-1/4W
R891	06E35362S01	RES,CF.470-1/4W
R892	06E37105S01	RES,CF.3.3K-1/16W

R893	06E37168S01	RES,CF.33K-1/16W
R894	06E37094S01	RES,CF.1K-1/16W
R895	06E37111S01	RES,CF.27K-1/16W
R896	06E37114S01	RES,CF.68K-1/16W
R897	06E37197S01	RES,CF.12K-1/16W
R898	06E37280S01	RES,CF.10-1/4W
R899	06E35358S01	RES,CF.100-1/4W
R900	06E37161S01	RES,CF.68K-1/16W
R901	06E37262S01	RES,CF.470-1/16W
R902	06E37103S01	RES,CF.22K-1/16W
R903	06E35395S01	RES,CF.470K-1/16W
R905	06E35236S01	RES,CF.1.5K-1/4W
R906	06E35350S01	RES,CF.2.2-1/4W
R907	06E35350S01	RES,CF.2.2-1/4W
R908	06E37132S01	RES,CF.560-1/4W
R909	06E37101S01	RES,CF.16K-1/16W
R910	06E37245S01	RES,CF.0-1/16W
R911	06E37135S01	RES,CF.560-1/16W
R912	06E37146S01	RES,CF.100-1/16W
R913	06E35351S01	RES,CF.3.6-1/4W
R914	06E35351S01	RES,CF.3.6-1/4W
R915	06E35351S01	RES,CF.3.6-1/4W
R916	06E37230S01	RES,CF.15K-1/16W
R918	06E35351S01	RES,CF.3.6-1/4W
R919	06E35351S01	RES,CF.3.6-1/4W
R920	06E35351S01	RES,CF.3.6-1/4W
R922	06E37169S01	RES,CF.1.8K-1/16W
R923	06E37110S01	RES,CF.10K-1/16W
R924	06E37094S01	RES,CF.1K-1/16W
R925	06E37114S01	RES,CF.68K-1/16W
R926	06E37113S01	RES,CF.47K-1/16W
R928	06E37110S01	RES,CF.10K-1/16W
R929	06E37114S01	RES,CF.68K-1/16W
R930	06E37134S01	RES,CF.470-1/16W
R931	06E35373S01	RES,CF.330-1/16W
R932	06E37107S01	RES,CF.1-1/16W
R933	06E37107S01	RES,CF.1-1/16W
R934	06E35352S01	RES,CF.6.2-1/4W
R935	06E35352S01	RES,CF.6.2-1/4W
R936	06E35352S01	RES,CF.6.2-1/4W
R938	06E35352S01	RES,CF.6.2-1/4W
R939	06E35352S01	RES,CF.6.2-1/4W
R940	06E35352S01	RES,CF.6.2-1/4W
R944	06E35240S01	RES,CF.2.2K-1/16W
R945	06E35291S01	RES,CF.6.8K-1/16W
R947	06E35405S01	RES,CF.120K-1/16W
R950	06E35352S01	RES,CF.6.2-1/4W
R951	06E35352S01	RES,CF.6.2-1/4W
R952	06E35352S01	RES,CF.6.2-1/4W
R953	06E35352S01	RES,CF.6.2-1/4W
R954	06E35352S01	RES,CF.6.2-1/4W
R955	06E35352S01	RES,CF.6.2-1/4W
R956	06E35406S01	RES,CF.150K-1/16W
R957	06E35407S01	RES,CF.360K-1/16W
R958	06E37918S01	RES,CF.300K-1/16W
R959	06E35361S01	RES,CF.330-1/4W
R961	06E37279S01	RES,CF.0-1/4W

R962	06E37279S01	RES,CF.0-1/4W
R965	06E37107S01	RES,CF.1-1/16W
R967	06E37107S01	RES,CF.1-1/16W
R968	06E35377S01	RES,CF.680-1/16W
R972	06E35447S01	RES,CF.240K-1/16W
R973	06E37112S01	RES,CF.30K-1/16W
RA501	06E37881S01	RES,ARRAY 1K-1/16W
RA502	06E37881S01	RES,ARRAY 1K-1/16W
RA503	06E37881S01	RES,ARRAY 1K-1/16W
RA504	06E37881S01	RES,ARRAY 1K-1/16W
RA505	06E37881S01	RES,ARRAY 1K-1/16W
RA506	06E37881S01	RES,ARRAY 1K-1/16W
RA509	06E37881S01	RES,ARRAY 1K-1/16W
RA510	06E37881S01	RES,ARRAY 1K-1/16W
RA511	06E37881S01	RES,ARRAY 1K-1/16W
RA512	06E37881S01	RES,ARRAY 1K-1/16W
RA513	06E37881S01	RES,ARRAY 1K-1/16W
RA514	06E37881S01	RES,ARRAY 1K-1/16W
RA515	06E37881S01	RES,ARRAY 1K-1/16W
RA516	06E37881S01	RES,ARRAY 1K-1/16W
RA517	06E37881S01	RES,ARRAY 1K-1/16W
RA518	06E37881S01	RES,ARRAY 1K-1/16W
RA519	06E37162S01	RES,ARRAY 100-1/16W
RA520	06E37881S01	RES,ARRAY 1K-1/16W
RA521	06E37881S01	RES,ARRAY 1K-1/16W
RA522	06E37881S01	RES,ARRAY 1K-1/16W
RA523	06E37881S01	RES,ARRAY 1K-1/16W
RA524	06E37881S01	RES,ARRAY 1K-1/16W
RA525	06E37881S01	RES,ARRAY 1K-1/16W
RA526	06E37882S01	RES,ARRAY 47K-1/16W
RA527	06E37882S01	RES,ARRAY 47K-1/16W
RA528	06E37917S01	RES,ARRAY 22K-1/16W
RA541	06E37916S01	RES,ARRAY 4.7K-1/16W
SA121	48T45306Y01	CSA30-201M
SD801	48E37274S01	DIODE,RB050L
SW201	40T45282W02	SW SLIDE
SW801	40E37856S01	SW TACT,SPST
VR701	18T55283W13	VR,ROTARY 10K
VR702	18E37174S01	VR,22K
VR703	18E37173S01	VR,4.7K
VR704	18E37171S01	VR,2.2K
VR705	18E37174S01	VR,22K
VR706	18E37174S01	VR,22K
VR707	18E37174S01	VR,22K
VR708	18E37174S01	VR,22K
VR709	18E37919S01	VR,10K
VR801	18E37171S01	VR,2.2K
VR802	18E37173S01	VR,4.7K
VR803	18E37920S01	VR,47K
XL501	91E37934S01	CRYSTAL,19.95MHz
XL502	91E37935S01	CRYSTAL,32.768KHz
XL541	91E37936S01	CRYSTAL,4MHz
XL701	91T35643Y01	CRYSTAL,3.57MHz
ZD301	48E37929S01	DIO,ZENER RLZ5.6B
ZD302	48E37929S01	DIO,ZENER RLZ5.6B
ZD303	48T15541Y53	DIO,ZENER MAZS5.80V
ZD304	48T15541Y53	DIO,ZENER MAZS5.80V

ZD305	48T15541Y53	DIO,ZENER MAZS5.80V
ZD307	48T15541Y53	DIO,ZENER MAZS5.80V
ZD541	48T15541Y51	DIO,ZENER MAZS5.40
ZD542	48E37928S01	DIO,ZENER RLZ7.5A
ZD543	48E37928S01	DIO,ZENER RLZ7.5A
ZD801	48T25766W03	DIO,ZENER HZS6A3L
ZD802	48T25766W28	DIO,ZENER HZS11A2L
ZD803	48T25766W03	DIO,ZENER HZS6A3L
ZD804	48T15541Y60	DIO,ZENER MAZS7.7V
ZD805	48T25064Y02	DIO,ZENER ZSH5MA27A
ZD808	48T15541Y66	DIO,ZENER MAZS0910L
ZD809	48T15541Y60	DIO,ZENER MAZS7.7V
ZD810	48T25766W22	DIO,ZENER HZS9B2L
ZD961	48T25766W26	DIO,ZENER HZS9C3L

=======LCD P.W.Board

C461	08E37122S01	CAP,CER.0.1uF/25V
C7001	08E37122S01	CAP,CER.0.1uF/25V
C7002	08E37122S01	CAP,CER.0.1uF/25V
C7003	08E37122S01	CAP,CER.0.1uF/25V
C7004	08E37122S01	CAP,CER.0.1uF/25V
C7005	08E37179S01	CAP,CER.82pF/50V
C7006	08S35374W12	CAP,CER.10uF/6.3V
C7007	08E37155S01	CAP,CER.0.22uF/10V
C7009	08T81833F13	CAP,CER.10uF/16V
C7011	08E37122S01	CAP,CER.0.1uF/25V
C7012	08E37122S01	CAP,CER.0.1uF/25V
C7013	08E37115S01	CAP,CER.33pF/50V
C7014	08E37115S01	CAP,CER.33pF/50V
C7015	08E37153S01	CAP,CER.1nF/50V
C7016	08E37151S01	CAP,CER.470pF/50V
C7017	08T81833F13	CAP,CER.10uF/16V
C7018	08T81833F13	CAP,CER.10uF/16V
C7019	08E37122S01	CAP,CER.0.1uF/25V
C7021	08E37121S01	CAP,CER.22nF/50V
C7022	08E37122S01	CAP,CER.0.1uF/25V
C7023	08E37118S01	CAP,CER.220pF/50V
C7025	08E37122S01	CAP,CER.0.1uF/25V
C7026	08E37153S01	CAP,CER.1nF/50V
C7027	08E37117S01	CAP,CER.100pF/50V
C7028	08E37122S01	CAP,CER.0.1uF/25V
C7029	08E37122S01	CAP,CER.0.1uF/25V
C7030	08E37152S01	CAP,CER.560pF/50V
C7031	08E37150S01	CAP,CER.330pF/50V
C7032	08T81833F13	CAP,CER.10uF/16V
C7033	08E37121S01	CAP,CER.22nF/50V
C7037	08E37115S01	CAP,CER.33pF/50V
C7040	08S35350Y04	CAP,CER.1uF/16V
C7041	08S35374W12	CAP,CER.10uF/6.3V
C7042	08S35374W12	CAP,CER.10uF/6.3V
C7043	08E37153S01	CAP,CER.1nF/50V
C7044	08S35374W12	CAP,CER.10uF/6.3V
C7046	08S35374W12	CAP,CER.10uF/6.3V
C7048	08E37120S01	CAP,CER.10nF/50V
C7049	08E37153S01	CAP,CER.1nF/50V
C7050	08S60102F48	CAP,CER.1uF/25V
C7051	08E37121S01	CAP,CER.22nF/50V

C7052	08E37120S01	CAP,CER.10nF/50V
C7053	08T55401W47	CAP,FILM 0.15uF/50V
C7054	08T55401W45	CAP,FILM 0.1uF/50V
C7055	08E37121S01	CAP,CER.22nF/50V
C7056	08T81833F13	CAP,CER.10uF/16V
C7057	08E37122S01	CAP,CER.0.1uF/25V
C7058	08E35311S01	CAP,CER.33nF/25V
C7059	08E35311S01	CAP,CER.33nF/25V
C7060	08E37153S01	CAP,CER.1nF/50V
C7064	08E37121S01	CAP,CER.22nF/50V
C7065	08T25628Y06	CAP,FILM 0.68uF/16V
C7075	08S35349Y16	CAP,CER.1uF/10V
CB7001	09E37193S01	CONN,FFC 32P
CB7002	09E37911S01	CONN,FFC 10P
CB7003	09E37913S01	CONN,WTB 5P
CB7004	09E37912S01	CONN,FFC 50P
D7001	48T25247Y01	DIODE,MA716
D7002	48T15540Y01	DIODE,MA2S111
D7003	48T25248Y01	DIODE,MA335
E7011	23T25615Y14	CAP,ELY.100uF/10V
E7012	23T25615Y14	CAP,ELY.100uF/10V
IC461	51E37903S01	IC,TC7W53FK
IC462	51E37905S01	IC,TC7W14FK
IC7001	51T45577Y01	IC,LZ9GH29
IC7002	51E37147S01	IC,NJM2107F
IC7003	51E37906S01	IC,NJM555V
IC7005	51E37904S01	IC,TC7W34FK
L7001	24T25164Y17	IND,2.2uH
L7002	24T25164Y25	IND,10uH
L7003	24T25164Y27	IND,15uH
L7004	24T25164Y18	IND,2.7uH
L7005	24T25578Y11	IND,68uH
Q7001	48E37158S01	TR,2SC2411K
Q7002	48E37156S01	TR,DTC124EE
Q7005	48E37908S01	TR,DTC143EE
Q7006	48E37908S01	TR,DTC143EE
Q7007	48E37157S01	TR,FMY1A
Q7008	48T35586W01	TR,2SC3518
Q7009	48T35586W01	TR,2SC3518
Q7010	48E37909S01	TR,DTD113EK
Q7011	48E37908S01	TR,DTC143EE
Q7012	48E37907S01	TR,DTA144TE
Q7015	48E37156S01	TR,DTC124EE
R7001	06E37144S01	RES,CF.220K-1/16W
R7002	06E37133S01	RES,CF.390-1/16W
R7003	06E37145S01	RES,CF.560K-1/16W
R7004	06E37145S01	RES,CF.560K-1/16W
R7005	06E37138S01	RES,CF.8.2K-1/16W
R7006	06E37137S01	RES,CF.5.6K-1/16W
R7008	06E37141S01	RES,CF.1M-1/16W
R7009	06E37099S01	RES,CF.3.6K-1/16W
R7010	06E37114S01	RES,CF.68K-1/16W
R7011	06E37093S01	RES,CF.5.6K-1/16W
R7012	06E37170S01	RES,CF.2.7K-1/16W
R7013	06E37146S01	RES,CF.100-1/16W
R7016	06E37098S01	RES,CF.10K-1/16W
R7018	06E37113S01	RES,CF.47K-1/16W

R7019	06E37143S01	RES,CF.24K-1/16W
R7020	06E37161S01	RES,CF.68K-1/16W
R7021	06E37139S01	RES,CF.18K-1/16W
R7022	06E37141S01	RES,CF.1M-1/16W
R7023	06E37105S01	RES,CF.3.3K-1/16W
R7024	06E37108S01	RES,CF.330-1/16W
R7026	06E37098S01	RES,CF.10K-1/16W
R7027	06E37146S01	RES,CF.100-1/16W
R7028	06E37092S01	RES,CF.68-1/16W
R7029	06E37146S01	RES,CF.100-1/16W
R7030	06E37100S01	RES,CF.13K-1/16W
R7031	06E35244S01	RES,CF.15K-1/16W
R7032	06E37109S01	RES,CF.4.7K-1/16W
R7033	06E37112S01	RES,CF.30K-1/16W
R7034	06E37110S01	RES,CF.10K-1/16W
R7037	06E35290S01	RES,CF.6.2K-1/16W
R7038	06E37280S01	RES,CF.10-1/4W
R7039	06E35296S01	RES,CF.62K-1/16W
R7040	06E37096S01	RES,CF.4.7K-1/16W
R7041	06E37136S01	RES,CF.2.7K-1/16W
R7042	06E35291S01	RES,CF.6.8K-1/16W
R7043	06E37138S01	RES,CF.8.2K-1/16W
R7044	06E37164S01	RES,CF.820-1/4W
R7045	06E37164S01	RES,CF.820-1/4W
R7046	06E35290S01	RES,CF.6.2K-1/16W
R7047	06E37197S01	RES,CF.12K-1/16W
R7048	06E35280S01	RES,CF.39K-1/16W
R7055	06E37146S01	RES,CF.100-1/16W
R7056	06E37146S01	RES,CF.100-1/16W
R7067	06E37098S01	RES,CF.10K-1/16W
R7068	06E37245S01	RES,CF.0-1/16W
R7070	06E37101S01	RES,CF.16K-1/16W
R7071	06E37140S01	RES,CF.47K-1/16W
RA7001	06E37162S01	RES,ARRAY 100-1/16W
RA7002	06E37162S01	RES,ARRAY 100-1/16W
RA7003	06E37163S01	RES,ARRAY 560-1/16W
RA7004	06E37162S01	RES,ARRAY 100-1/16W
T7001	25T25447Y05	TRANS,BLC216-1435
T7002	25T25447Y05	TRANS,BLC216-1435
TH7001	48E37910S01	THERMISTOR,22K
TH7002	48E37910S01	THERMISTOR,22K
VR7001	18E37172S01	VR,100K
VR7002	18E37171S01	VR,2.2K
ZD7001	48T15541Y49	DIO ZENER,MAZS5.1V

=======TUNER P.W.Board

C1001	08E37884S01	CAP,CER.22nF/50V
C1002	23E37943S01	CAP,CER.33pF/50V
C1003	08E37153S01	CAP,CER.1nF/50V
C1004	08E37115S01	CAP,CER.33pF/50V
C1005	08E37115S01	CAP,CER.33pF/50V
C1006	08E35494S01	CAP,CER.2pF/50V
C1007	08E35495S01	CAP,CER.5pF/50V
C1009	08E35408S01	CAP,CER.10pF/50V
C1010	08E37120S01	CAP,CER.10nF/50V
C1011	08E37122S01	CAP,CER.0.1uF/25V
C1012	08E37154S01	CAP,CER.4.7nF/50V

C1013	08E37120S01	CAP,CER.10nF/50V
C1014	08E37153S01	CAP,CER.1nF/50V
C1015	08E35488S01	CAP,CER.68pF/50V
C1016	08E37117S01	CAP,CER.100pF/50V
C1018	08E37122S01	CAP,CER.0.1uF/25V
C1019	08E37122S01	CAP,CER.0.1uF/25V
C1020	08E37122S01	CAP,CER.0.1uF/25V
C1021	08E37121S01	CAP,CER.22nF/50V
C1022	08E35490S01	CAP,CER.3.9nF/50V
C1023	08E37268S01	CAP,CER.120pF/50V
C1024	08E37120S01	CAP,CER.10nF/50V
C1025	08E37120S01	CAP,CER.10nF/50V
C1026	08S35350Y04	CAP,CER.1uF/16V
C1027	08E37122S01	CAP,CER.0.1uF/25V
C1028	08E37122S01	CAP,CER.0.1uF/25V
C1029	08S35350Y04	CAP,CER.1uF/16V
C1030	08S35350Y04	CAP,CER.1uF/16V
C1031	08E37121S01	CAP,CER.22nF/50V
C1032	08E35488S01	CAP,CER.68pF/50V
C1033	08E37120S01	CAP,CER.10nF/50V
C1034	08E37122S01	CAP,CER.0.1uF/25V
C1035	08E35487S01	CAP,CER.1pF/50V
C1036	08E37271S01	CAP,CER.22pF/50V
C1037	08E37215S01	CAP,CER.15pF/50V
C1038	08E37122S01	CAP,CER.0.1uF/25V
C1039	08E37122S01	CAP,CER.0.1uF/25V
C1040	08E37120S01	CAP,CER.10nF/50V
C1041	08E35413S01	CAP,CER.2.2nF/50V
C1042	08E37153S01	CAP,CER.1nF/50V
C1043	08E37120S01	CAP,CER.10nF/50V
C1044	08E37121S01	CAP,CER.22nF/50V
C1045	08E37121S01	CAP,CER.22nF/50V
C1046	08E37121S01	CAP,CER.22nF/50V
C1047	08E35487S01	CAP,CER.1pF/50V
C1048	08E35408S01	CAP,CER.10pF/50V
C1049	08E35408S01	CAP,CER.10pF/50V
C1050	08E37120S01	CAP,CER.10nF/50V
C1051	08E37120S01	CAP,CER.10nF/50V
C1052	08E35408S01	CAP,CER.10pF/50V
C1053	08E37120S01	CAP,CER.10nF/50V
C1054	08E37120S01	CAP,CER.10nF/50V
C1055	08E37117S01	CAP,CER.100pF/50V
C1056	08E37121S01	CAP,CER.22nF/50V
C1057	08E37120S01	CAP,CER.10nF/50V
C1058	08S35350Y04	CAP,CER.1uF/16V
C1060	08E37901S01	CAP,CER.0.47uF/50V
C1061	08E37901S01	CAP,CER.0.47uF/50V
C1201	08E37266S01	CAP,CER.15nF/50V
C1205	08E37122S01	CAP,CER.0.1uF/25V
C1206	08E37153S01	CAP,CER.1nF/50V
C1211	08E37271S01	CAP,CER.22pF/50V
C1214	08E37120S01	CAP,CER.10nF/50V
C1217	08E37120S01	CAP,CER.10nF/50V
C1218	08E37120S01	CAP,CER.10nF/50V
C1219	08E37122S01	CAP,CER.0.1uF/25V
C1220	08E37153S01	CAP,CER.1nF/50V
C1221	08E37122S01	CAP,CER.0.1uF/25V

C1222	08E37122S01	CAP,CER.0.1uF/25V
C1223	08E37122S01	CAP,CER.0.1uF/25V
C1224	08E37122S01	CAP,CER.0.1uF/25V
C1225	08E37122S01	CAP,CER.0.1uF/25V
C1226	08S35349Y13	CAP,CER.0.68uF/10V
C1227	08S35374W11	CAP,CER.4.7uF/6.3V
C1228	08E37122S01	CAP,CER.0.1uF/25V
CB1001	09E37859S01	CONN,BTB 15P
CB1002	09E37947S01	CONN,FFC 40P
CF1001	91E37858S01	FIL,CER.10.7MHz
CF1002	91E37857S01	FIL,CER.10.7MHz
CF1003	91E37857S01	FIL,CER.10.7MHz
CF1004	91T15651Y02	FIL,CER.450KHz
D1002	48T65157W01	DIO, VARAC.TORKV1410
D1003	48T65157W01	DIO, VARAC.TORKV1410
D1004	48T65157W01	DIO,VARAC.KV1410
D1005	48T68806F01	DIODE,1SV172
D1013	48T68806F01	DIODE,1SV172
E1006	23E37942S01	CAP,ELY.10uF/16V
E1007	23E37942S01	CAP,ELY.10uF/16V
E1008	23E37942S01	CAP,ELY.10uF/16V
E1011	23E37942S01	CAP,ELY.10uF/16V
E1012	23E37921S01	CAP,ELY.22uF/16V
E1014	23E37942S01	CAP,ELY.10uF/16V
E1015	23E37942S01	CAP,ELY.10uF/16V
E1201	23E37921S01	CAP,ELY.22uF/16V
E1204	23E37942S01	CAP,ELY.10uF/16V
E1205	23E37942S01	CAP,ELY.10uF/16V
IC1001	51T65382Y01	IC,TDA7518
IC1002	51E37944S01	IC,NJM2904M
J001	06E37245S01	RES,CF.0-1/16W
L1005	91E37899S01	FIL,EMI
L1006	24T65176W37	IND,1mH
L1007	24T25164Y35	IND,68uH
L1010	24T65176W37	IND,1mH
L1017	91E37899S01	FIL,EMI
L1018	91E37899S01	FIL,EMI
L1019	24T25164Y11	IND,0.68uH
L1021	24T25164Y12	IND,0.82uH
Q1003	48E37945S01	FET,3SK195
Q1004	48T15606Y01	FET,FC18TL
R1001	06E37134S01	RES,CF.470-1/16W
R1002	06E37134S01	RES,CF.470-1/16W
R1003	06E37134S01	RES,CF.470-1/16W
R1004	06E35484S01	RES,CF.22-1/16W
R1005	06E35484S01	RES,CF.22-1/16W
R1006	06E37134S01	RES,CF.470-1/16W
R1007	06E37167S01	RES,CF.2.2K-1/16W
R1008	06E37094S01	RES,CF.1K-1/16W
R1009	06E37167S01	RES,CF.2.2K-1/16W
R1010	06E37141S01	RES,CF.1M-1/16W
R1011	06E37096S01	RES,CF.4.7K-1/16W
R1012	06E37255S01	RES,CF.10-1/16W
R1013	06E37232S01	RES,CF.100K-1/16W
R1015	06E37103S01	RES,CF.22K-1/16W
R1016	06E37098S01	RES,CF.10K-1/16W
R1017	06E37146S01	RES,CF.100-1/16W

R1018	06E35390S01	RES,CF.56K-1/16W
R1019	06E37096S01	RES,CF.4.7K-1/16W
R1020	06E37232S01	RES,CF.100K-1/16W
R1023	06E37137S01	RES,CF.5.6K-1/16W
R1024	06E35377S01	RES,CF.680-1/16W
R1028	06E37232S01	RES,CF.100K-1/16W
R1029	06E35390S01	RES,CF.56K-1/16W
R1030	06E37137S01	RES,CF.5.6K-1/16W
R1034	06E37255S01	RES,CF.10-1/16W
R1037	06E35390S01	RES,CF.56K-1/16W
R1038	06E37255S01	RES,CF.10-1/16W
R1043	06E35485S01	RES,CF.4.7-1/16W
R1044	06E35485S01	RES,CF.4.7-1/16W
R1045	06E37255S01	RES,CF.10-1/16W
R1050	06E37197S01	RES,CF.12K-1/16W
R1061	06E35482S01	RES,CF.220-1/4W
R1062	06E37094S01	RES,CF.1K-1/16W
R1063	06E37094S01	RES,CF.1K-1/16W
R1211	06E37167S01	RES,CF.2.2K-1/16W
R1215	06E37094S01	RES,CF.1K-1/16W
R1216	06E37094S01	RES,CF.1K-1/16W
R1217	06E37103S01	RES,CF.22K-1/16W
R1218	06E37094S01	RES,CF.1K-1/16W
R1219	06E37245S01	RES,CF.0-1/16W
R1220	06E37245S01	RES,CF.0-1/16W
VT1001	24T45428Y04	COIL,RF ANT1 FM
VT1002	24T45429Y04	COIL,RF RF FM
VT1003	24T45427Y03	COIL,RF OSC
VT1004	24T45563Y01	COIL,RF IFT 1
VT1005	24T45563Y02	COIL,RF IFT 2
XL1001	91E37946S01	CRYSTAL,10.25MHz
Z1001	91E37899S01	FIL,EMI
Z1002	91E37899S01	FIL,EMI
Z1013	91E37899S01	FIL,EMI
Z1014	91E37899S01	FIL,EMI
Z1015	24T25164Y17	IND,2.2uH

=======FRONT P.W.Board

C401	08S35349Y17	CAP,CER.2.2uF/6.3V
C405	08E37267S01	CAP,CER.47nF/25V
C406	08E37267S01	CAP,CER.47nF/25V
C407	08E37267S01	CAP,CER.47nF/25V
C408	08E37119S01	CAP,CER.680pF/50V
C441	08E37884S01	CAP,CER.22nF/50V
D405	48T15707Y01	DIODE,MA133
D406	48T15707Y01	DIODE,MA133
D407	48T15707Y01	DIODE,MA133
D408	48T15707Y01	DIODE,MA133
IC401	51T15186Y01	IC,LC75823W
LD401	48T25534Y01	LED,CP GRN BG1111C
LD402	48T25534Y01	LED,CP GRN BG1111C
LD403	48T25534Y01	LED,CP GRN BG1111C
LD404	48T25534Y01	LED,CP GRN BG1111C
LD405	48T25534Y01	LED,CP GRN BG1111C
LD406	48T25534Y01	LED,CP GRN BG1111C
LD407	48T25534Y01	LED,CP GRN BG1111C
LD408	48T25534Y01	LED,CP GRN BG1111C

LD409	48T25534Y01	LED,CP GRN BG1111C
LD410	48T25534Y01	LED,CP GRN BG1111C
LD411	48T25534Y01	LED,CP GRN BG1111C
LD412	48T25534Y01	LED,CP GRN BG1111C
LD413	48T25534Y01	LED,CP GRN BG1111C
LD414	48T25534Y01	LED,CP GRN BG1111C
LD415	48E37200S01	LED,SML512BC4T BLU
LD416	48E37200S01	LED,SML512BC4T BLU
LD417	48E37200S01	LED,SML512BC4T BLU
LD418	48E37200S01	LED,SML512BC4T BLU
LD419	48-00415Z01	LED,WHT NSCW505CT
Q401	48E36573S01	TR,DTC144EK
R401	06E35233S01	RES,CF.1K-1/10W
R402	06E35233S01	RES,CF.1K-1/10W
R403	06E35233S01	RES,CF.1K-1/10W
R404	06E35233S01	RES,CF.1K-1/10W
R405	06E37221S01	RES,CF.1K-1/4W
R406	06E35250S01	RES,CF.39K-1/10W
R407	06E35249S01	RES,CF.100-1/10W
R410	06E35243S01	RES,CF.7.5K-1/16W
R411	06E35242S01	RES,CF.4.3K-1/16W
R412	06E37105S01	RES,CF.3.3K-1/16W
R413	06E35240S01	RES,CF.2.2K-1/16W
R414	06E37169S01	RES,CF.1.8K-1/16W
R415	06E35234S01	RES,CF.1.3K-1/10W
R416	06E37264S01	RES,CF.39K-1/16W
R417	06E35244S01	RES,CF.15K-1/16W
R418	06E35243S01	RES,CF.7.5K-1/16W
R419	06E35242S01	RES,CF.4.3K-1/16W
R420	06E37105S01	RES,CF.3.3K-1/16W
R421	06E35240S01	RES,CF.2.2K-1/16W
R422	06E37169S01	RES,CF.1.8K-1/16W
R423	06E35234S01	RES,CF.1.3K-1/10W
R424	06E35246S01	RES,CF.43K-1/16W
R441	06E35236S01	RES,CF.1.5K-1/4W
R442	06E35236S01	RES,CF.1.5K-1/4W
R443	06E37221S01	RES,CF.1K-1/4W
R444	06E37221S01	RES,CF.1K-1/4W
R445	06E35236S01	RES,CF.1.5K-1/4W
R446	06E35236S01	RES,CF.1.5K-1/4W
R447	06E35237S01	RES,CF.1K-1/4W
R448	06E35237S01	RES,CF.1K-1/4W
R449	06E35237S01	RES,CF.1K-1/4W
R450	06E35237S01	RES,CF.1K-1/4W
R471	06E35237S01	RES,CF.1K-1/4W
R472	06E35237S01	RES,CF.1K-1/4W
R473	06E37902S01	RES,CF.2.7K-1/4W
R474	06E37902S01	RES,CF.2.7K-1/4W
RA402	06E37881S01	RES,ARRAY 1K-1/16W
SW404	40T65353Y01	SW TACT,DPST
SW405	40T65353Y01	SW TACT,DPST
SW406	40T65353Y01	SW TACT,DPST
SW407	40T65353Y01	SW TACT,DPST
SW408	40T65353Y01	SW TACT,DPST
SW409	40T65353Y01	SW TACT,DPST
SW410	40T65353Y01	SW TACT,DPST
SW411	40T65353Y01	SW TACT,DPST

SW412	40T65353Y01	SW TACT,DPST
SW413	40T65353Y01	SW TACT,DPST
SW414	40T65353Y01	SW TACT,DPST
SW415	40T65353Y01	SW TACT,DPST
SW416	40T65353Y01	SW TACT,DPST
SW417	40T65353Y01	SW TACT,DPST
SW418	40T65353Y01	SW TACT,DPST

=======TOP P.W.Board

C451	08S35349Y17	CAP,CER.2.2uF/6.3V
C455	08E37121S01	CAP,CER.22nF/50V
CH451	09T15153Y10	CONN,FFC 12P
IC451	51T25419Y01	RS-181
IC452	51T55639W03	RS-151
LD451	48T25534Y01	LED,GRN
LD452	48T25534Y01	LED,GRN
LD453	48T25534Y01	LED,GRN
LD454	48T25534Y01	LED,GRN
LD455	48T25534Y01	LED,GRN
LD456	48T25534Y01	LED,GRN
LD461	48E37200S01	LED,SML512BC4T BLU
Q451	48E37892S01	TR,DTA143EE
Q452	48E37156S01	TR,DTC124EE
Q457	48E37097S01	TR,DTC114EE
Q458	48E37914S01	TR,UMC2N
R451	06E37136S01	RES,CF.2.7K-1/16W
R452	06E35259S01	RES,CF.3.9K-1/16W
R453	06E37138S01	RES,CF.8.2K-1/16W
R454	06E35261S01	RES,CF.27K-1/16W
R455	06E35255S01	RES,CF.620-1/4W
R456	06E35254S01	RES,CF.470-1/4W
R457	06E29451S01	RES,CF.8.2K-1/4W
R458	06E29451S01	RES,CF.8.2K-1/4W
R461	06E37091S01	RES,CF.47-1/16W
R462	06E37146S01	RES,CF.100-1/16W
R463	06E37146S01	RES,CF.100-1/16W
SW451	40E37915S01	SW,TACT SPST
SW452	40E37915S01	SW,TACT SPST
SW453	40E37915S01	SW,TACT SPST
SW454	40E37915S01	SW,TACT SPST
SW455	40E37915S01	SW,TACT SPST

======= Miscellaneous

ANT101	09E37855S01	CONN,ANT 3P
CB502	09T65330Y15	CONN,BTB 15P
CB801	09E23591S01	CONN,WTB 16P
CH401	09T15298Y15	CONN,BTB
ET200	01E37878S01	ASSY CONNECTOR
ET202	01E35334S01	ASSY CONNECTOR
ET302	01E37877S01	ASSY CABLE,13P
LCD401	65T85233W06	LCD,WTD-21525
LCD7001	01T25528Y02	LCD,LQ065T5GG21B
M5904	44E37869S01	GEAR,L-MOTOR ASSY
M5905	44E37870S01	GEAR,T-MOTOR ASSY
M5906	44E37870S01	GEAR,T-MOTOR ASSY
SW401	18E37847S01	VR,ROTARY 10K

Exploded View (Cabinet) (1/2)

CVA-1014

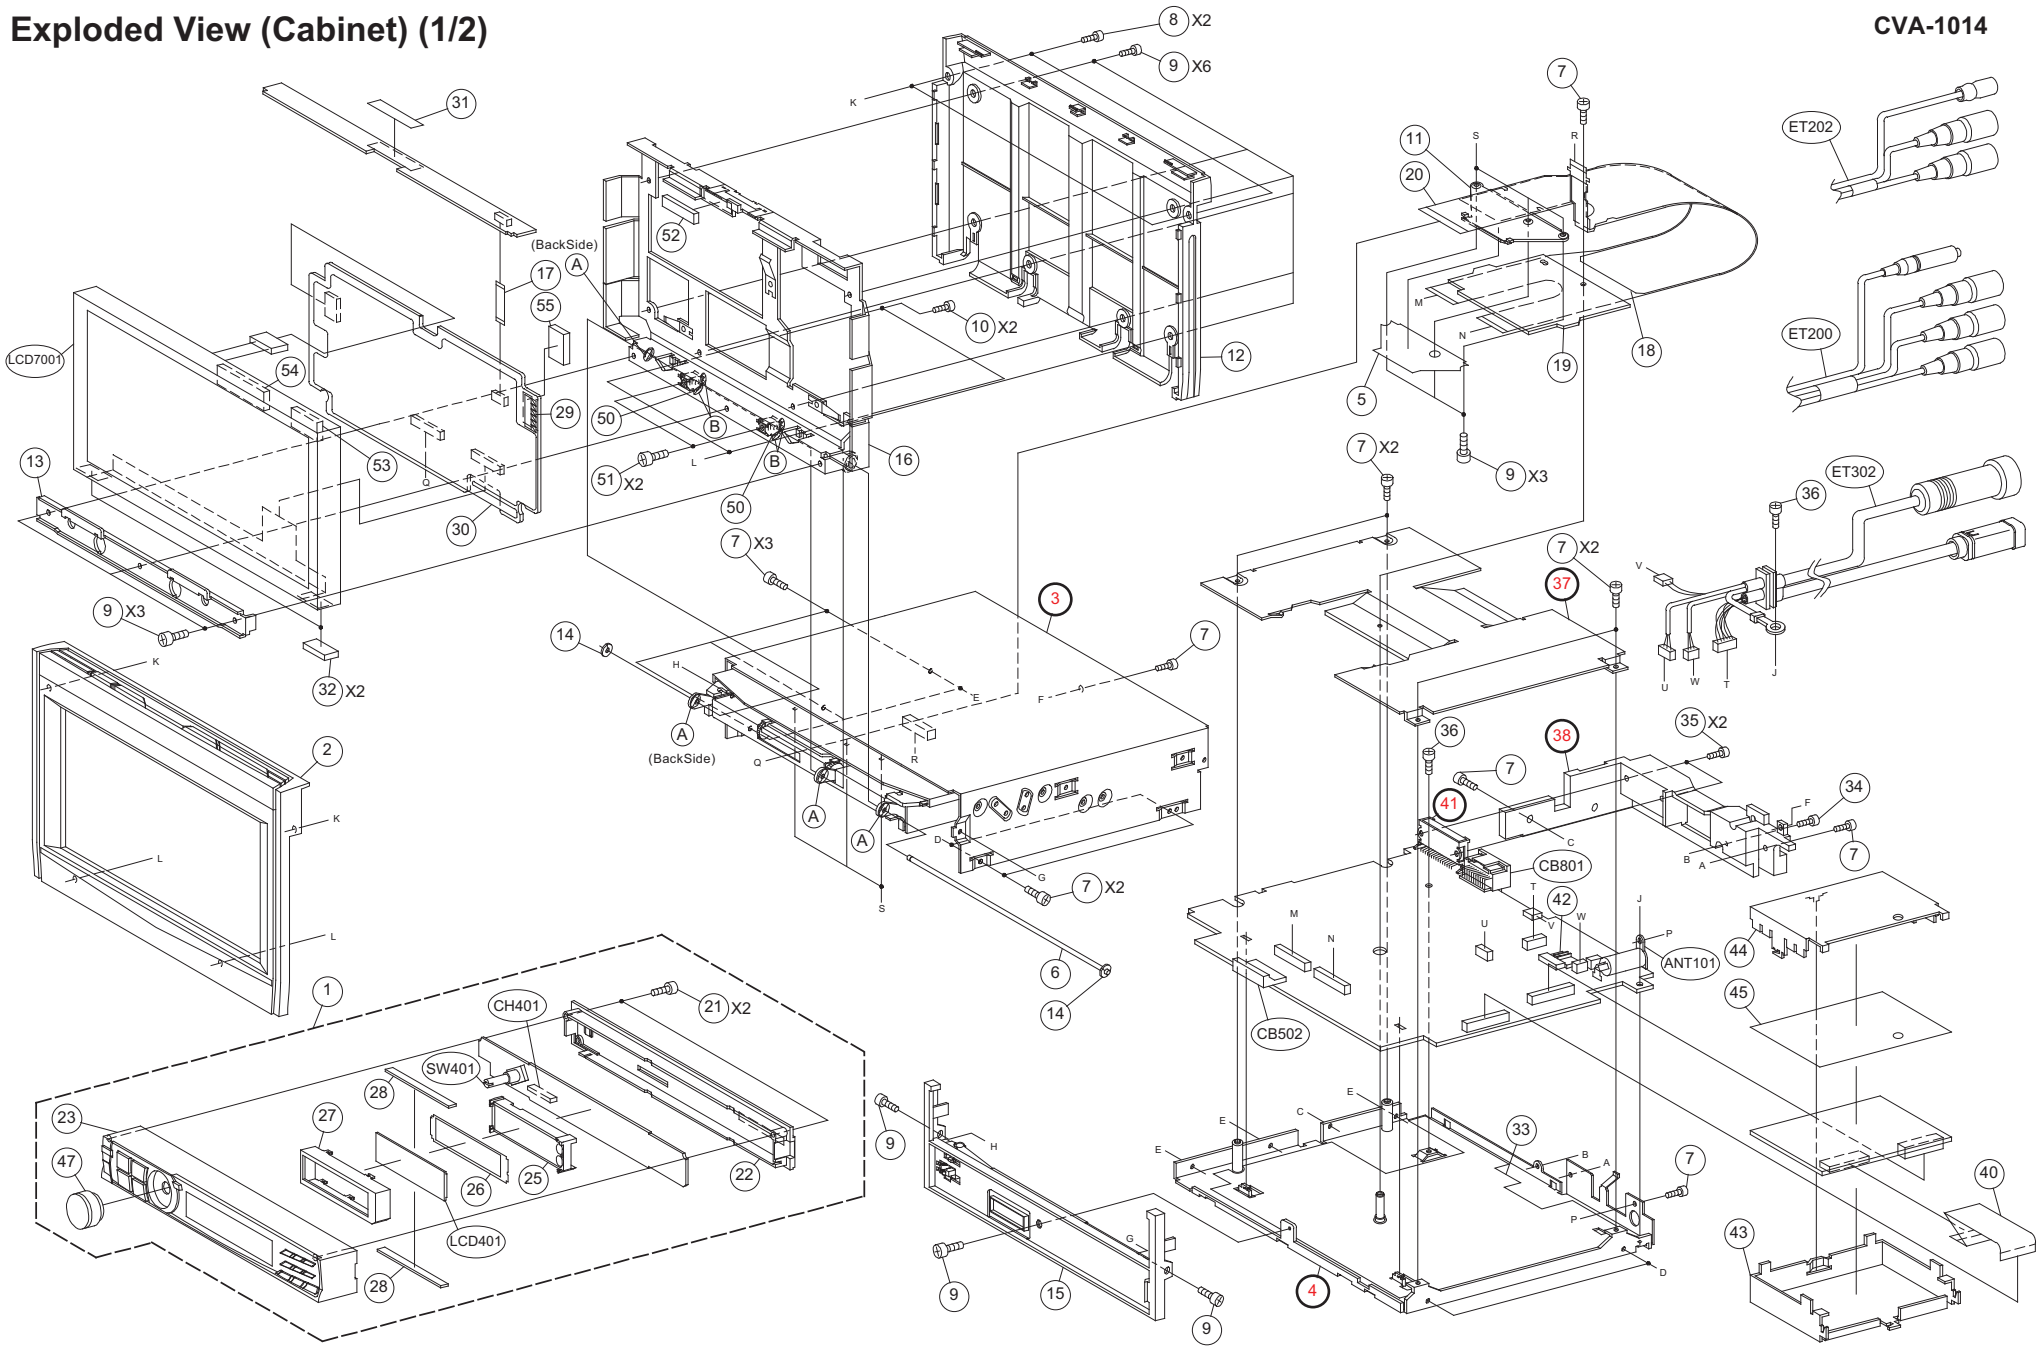

.....point of GREASE applied.

A	GREASE, E-PAST (11S42419J09)
B	GREASE, GPASTE (11S42419J19)

TO PARTS LIST TO CONTENTS

Exploded View (Cabinet) (2/2)

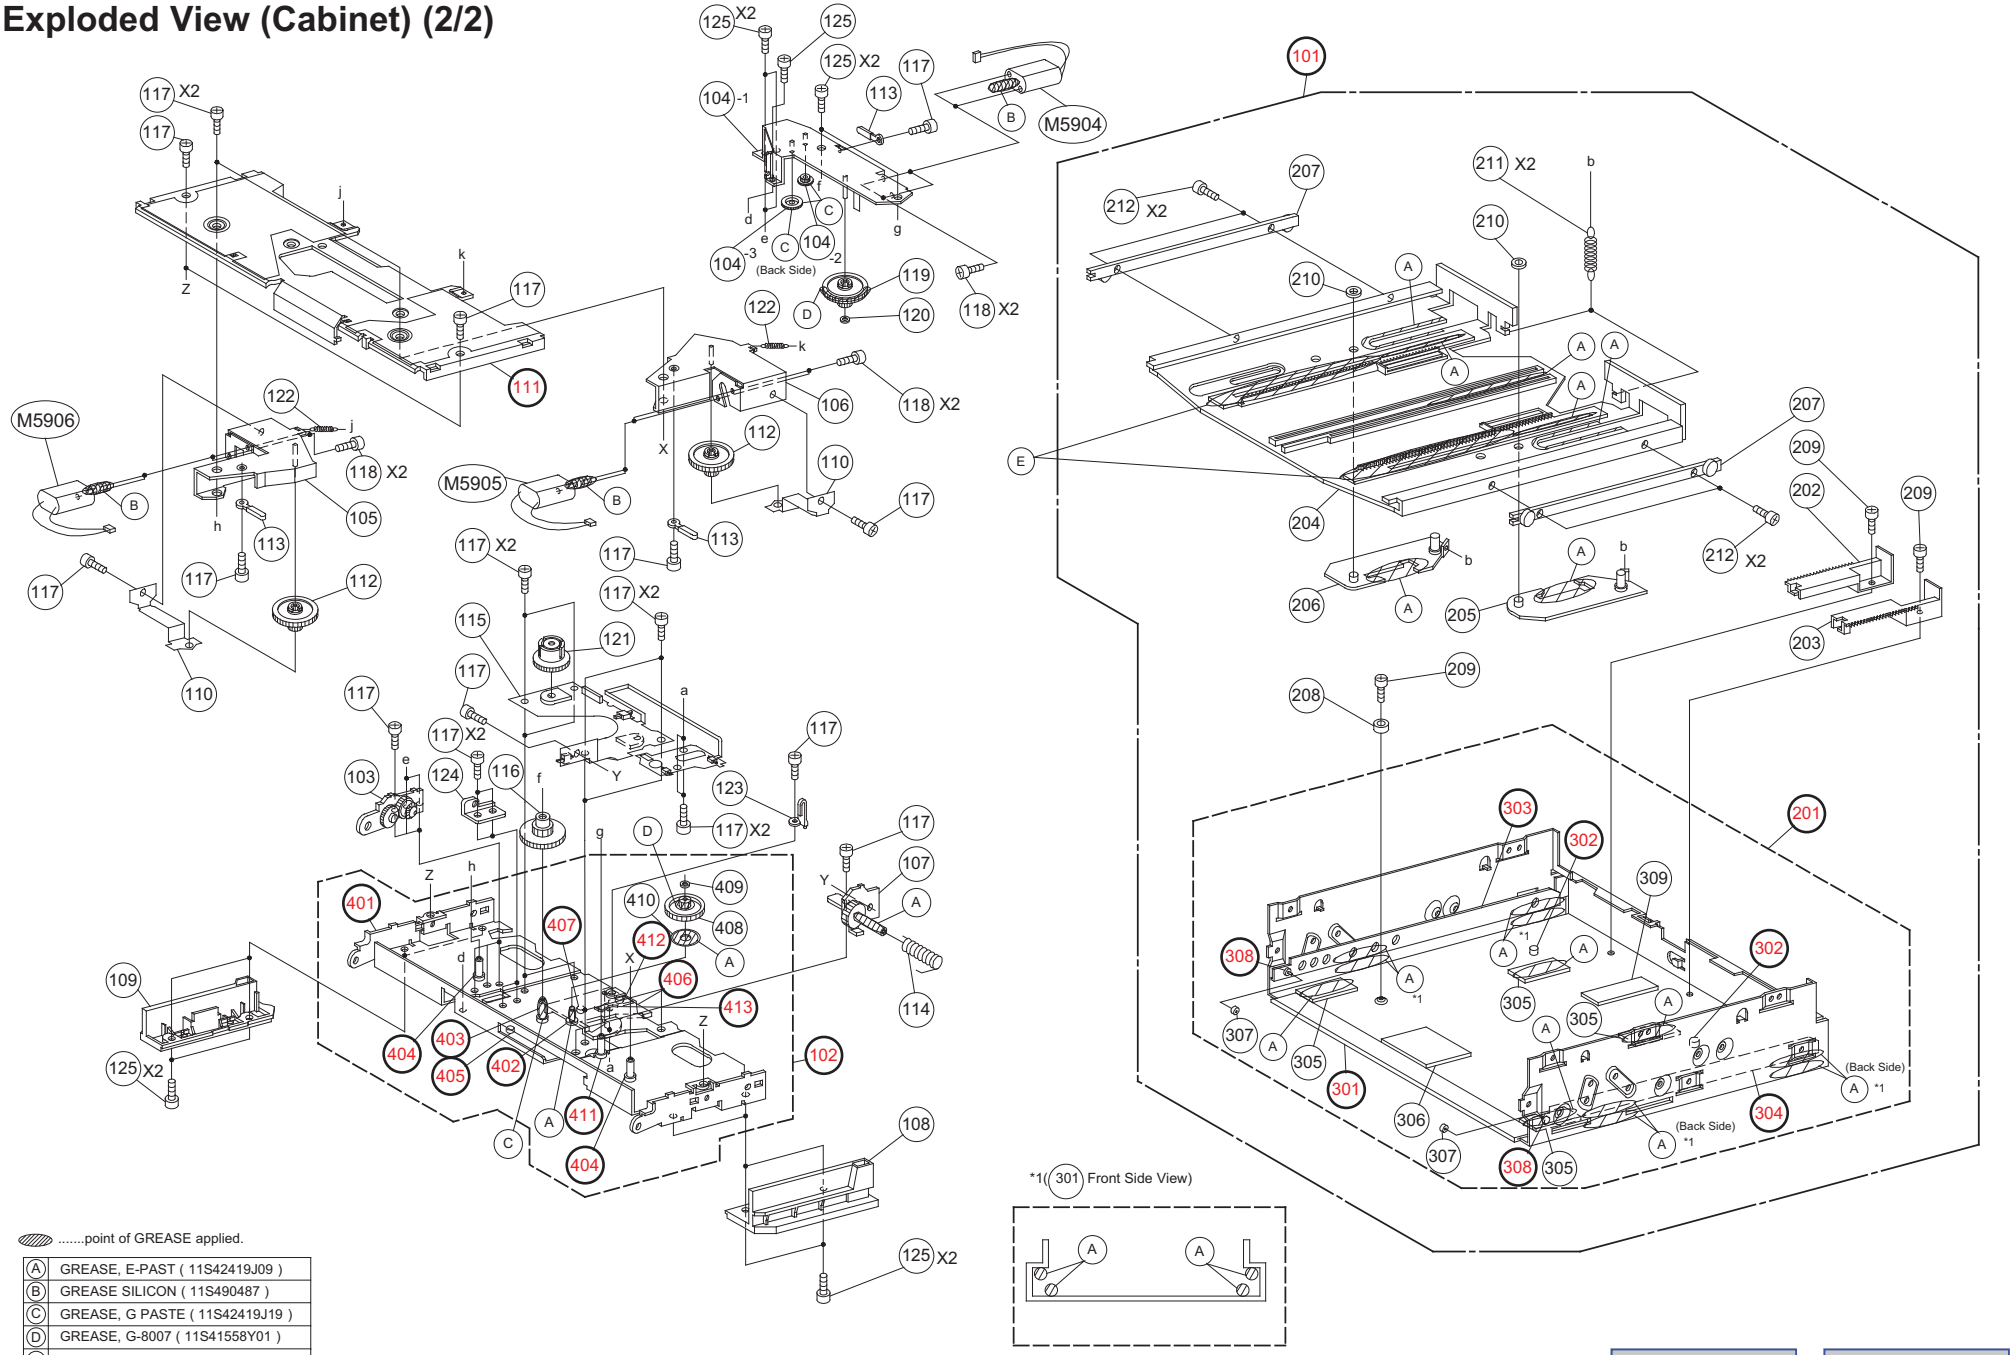

.....point of GREASE applied.

A	GREASE, E-PAST (11S42419J09)
B	GREASE SILICON (11S490487)
C	GREASE, G PASTE (11S42419J19)
D	GREASE, G-8007 (11S41558Y01)
E	HANARL (11T95136W01)

TO PARTS LIST TO CONTENTS

Attention in Assembling

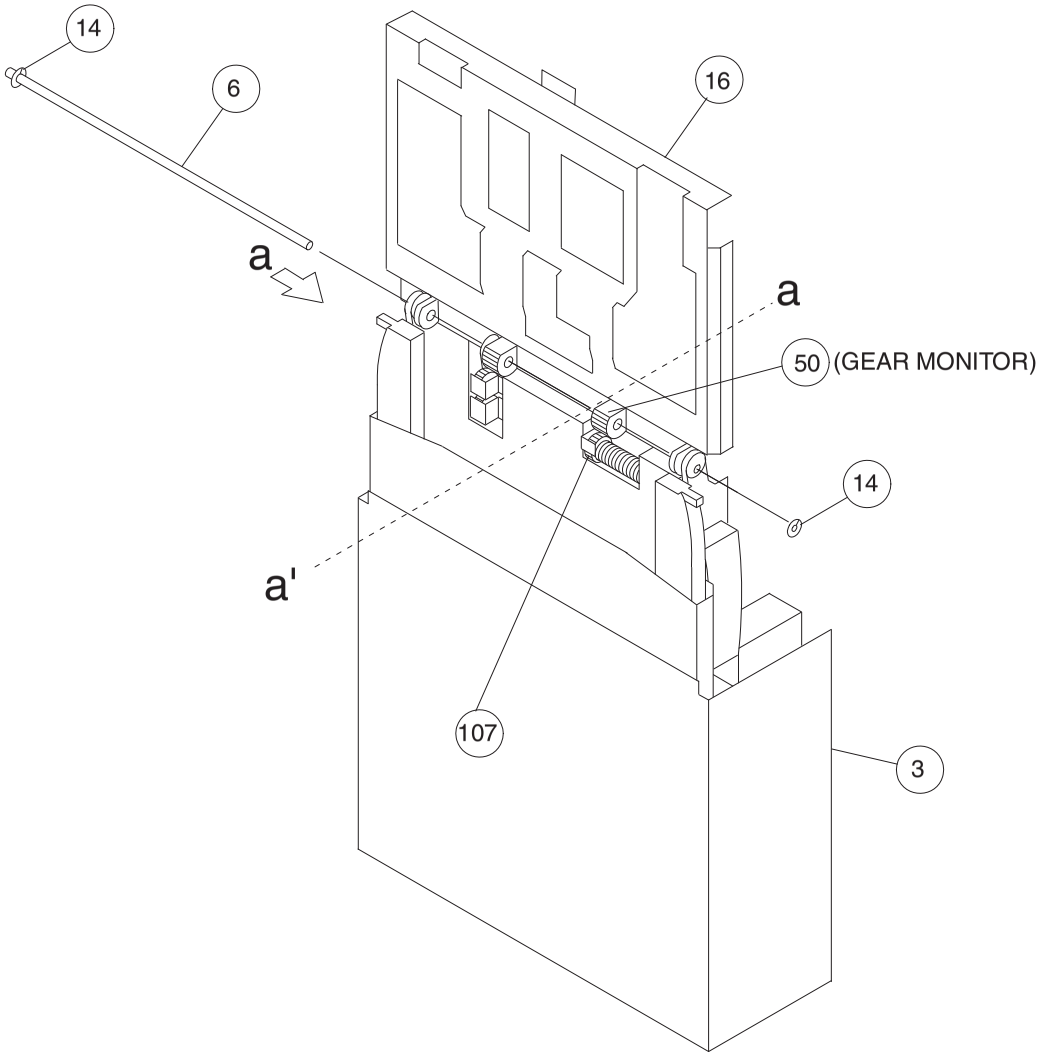

<The figure seen from the "a" direction / a-a' Cross section / spring side>

It engages a gear, and it is located.

- COVER TOP GEAR is fitted to GEAR MONITOR as the figure.

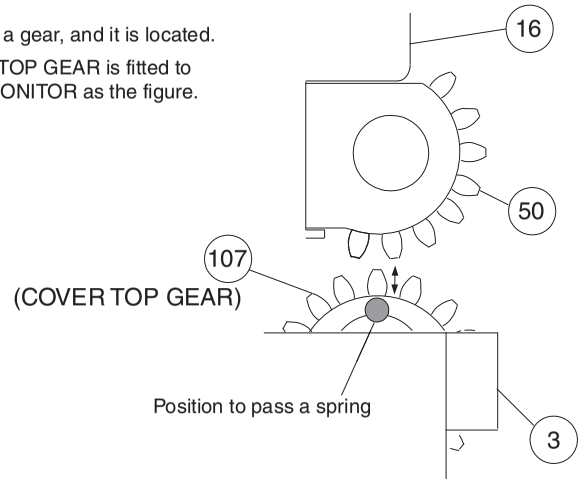

TO PARTS LIST TO CONTENTS

Cabinet Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

1	01E37875S01	ASS'Y NOSE UNIT
2	13E37880S01	ASS'Y,NOSE MONITOR
3	- - - - - - - - - - -	ASS'Y COVER TOP 1003
4	- - - - - - - - - - -	CHAS,BASE
5	14A61454Y01	INS,EPC-MECH
6	47A03190K01	SHAFT,MONITOR
7	03E35224S01	SCR,M2.6X6(P)
8	03E35225S01	SCR,M2X6(P)
9	03E35226S01	SCR,M2X3(S)
10	03E35227S01	SCR,M2X5(S)
11	15B03192K01	COVER,FPC-MECH
12	13D03183K01	NOSE,BOTTOM MONITOR
13	07B03189K01	BKT,LCD-SUB
14	04B41345P22	WASHER
15	13B03179K01	FRONT,ESC,ASS'Y
16	07C03185K01	BKT,LCD ASS'Y
17	30T25132Y17	FFC 10P
18	14A03210K01	INS,FPC MAIN
19	15A03193K01	HOLDER,FPC-MAIN
20	84T45542Y01	FPC PWB
21	03E35229S01	SCR,M1.7X12(P)
22	13D03184K01	NOSE,BOTTOM DF
23	13E37879S01	ASS'Y,NOSE PIECE
25	15C80989W01	CASE,LCD-ASS'Y
26	26A80991W01	SHEET,REFLECTOR
27	15B03194K01	COVER,LCD
28	75T85248W02	RUBBER,ELECTRIC
29	07T35194Y03	BKT,97-550-02-04
30	14E35252S01	INS,LCD
31	14A03535K01	INS,PWB TOP
32	75A03207K01	CUS,RUBBER
33	14B03236K01	INS,CHAS BASE
34	03E35329S01	SCR,M2.6X8(P)
35	03E35330S01	SCR,M2.6X14(WS)
36	03E35331S01	SCR,M2.6X6.5(WS)
37	- - - - - - - - - - -	COVER,PWB-MAIN
38	- - - - - - - - - - -	HEATSINK
40	30E37876S01	WIRE,FFC 40P
41	- - - - - - - - - - -	BKT,IC
42	36A70327W01	KNOB,SLIDE
43	15C50755Y01	CASE,SHIELD-A
44	15C50756Y03	CASE,SHIELD-B
45	14A03535K01	INS,TUNER
47	36E35231S01	KNOB,ROTARY ASSY
50	44A41305Y01	GEAR,MONITOR
51	03E35532S01	SCR,M3X6(WS)
52	75S61553Y10	CUS,RUBBER
53	75S61553Y11	CUS,RUBBER
54	75S61553Y12	CUS,RUBBER
55	75S61553Y15	CUS,RUBBER
101	- - - - - - - - - - -	CHAS,TOP ASSY
102	- - - - - - - - - - -	CHAS TUNER ASSY

103	07E37862S01	BKT,GEAR ASSY
104	07E37864S01	BKT,MTR TL ASSY
105	07A31694Y02	BKT,MTR-R
106	07A31697Y02	BKT,MTR-L
107	07E37863S01	BKT,SPRING ASSY
108	45C41333Y01	SLIDE,LOAD-L
109	45C41334Y01	SLIDE,LOAD-R
110	15A31703Y01	COVER,CLUTCH
111	- - - - - - - - - -	COVER,TURNER ASSY
112	44E37873S01	GEAR,CLUTCH ASSY
113	37A30331Y02	WIRE,BAND
114	41A31708Y01	SPRING,MONITOR
115	01T35508Y01	ASSY,FPC MECH T720
116	44A50311Y01	GEAR,KF4
117	03S94385F78	SCR,M2X2(BLK)
118	03S68259F23	SCREW,M2X3
119	44E37872S01	GEAR,CLUTCH ASSY
120	04B41345P02	WASHER
121	44E37871S01	GEAR,LPS ASSY
122	41A31716Y01	SPRING,MTR LD
123	15A40020Y01	HOLDER,FPC MECH
124	07A40411Y01	BKT,BEVEL
125	03S94385F24	SCREW,NYLOK
201	- - - - - - - - - -	COVER TOP ASS'Y
202	44B31651Y01	CHAS,RACK(R)
203	44B31650Y01	CHAS,RACK(L)
204	27D31652Y02	CHAS,BASE MID
205	45E37865S01	ARM LOCK(L) ASSY
206	45E37866S01	ARM LOCK(R) ASSY
207	07A31896Y01	BKT,SIDE
208	43A31659Y01	ROLLER,CENTER
209	03S94385F78	SCR,M2X2(BLK)
210	04B41345P22	WASHER
211	41A31660Y01	SPRING,ARM LOCK
212	03S94385F19	SCREW,M2X2.5
301	- - - - - - - - - -	COVER,TOP
302	- - - - - - - - - -	STUD,BASE STOP
303	- - - - - - - - - -	BKT,RAIL(R)
304	- - - - - - - - - -	BKT,RAIL(L)
305	75A40671Y02	CUS,COVER TOP A
306	75A40672Y01	CUS,COVER TOP B
307	43A41407Y01	ROLLER,SLIDE
308	- - - - - - - - - -	STUD,SLIDE
401	- - - - - - - - - -	CHAS,TURNER
402	- - - - - - - - - -	STUD,GEAR-L2
403	- - - - - - - - - -	STUD,3RD TL
404	- - - - - - - - - -	STUD,BKT MTR
405	- - - - - - - - - -	STUD,CENTER FR
406	- - - - - - - - - -	ARM,PAN SENS
407	- - - - - - - - - -	STUD,ARM PAN
408	44A21719Y01	GEAR,T-3
409	04B41345P14	WASHER
410	14A40506Y01	INS,GEAR T3
411	- - - - - - - - - -	STUD,3RD TL2
412	- - - - - - - - - -	STUD,CENTER PAN
413	- - - - - - - - - -	SPRING,EARTH