


EXPLODED VIEW

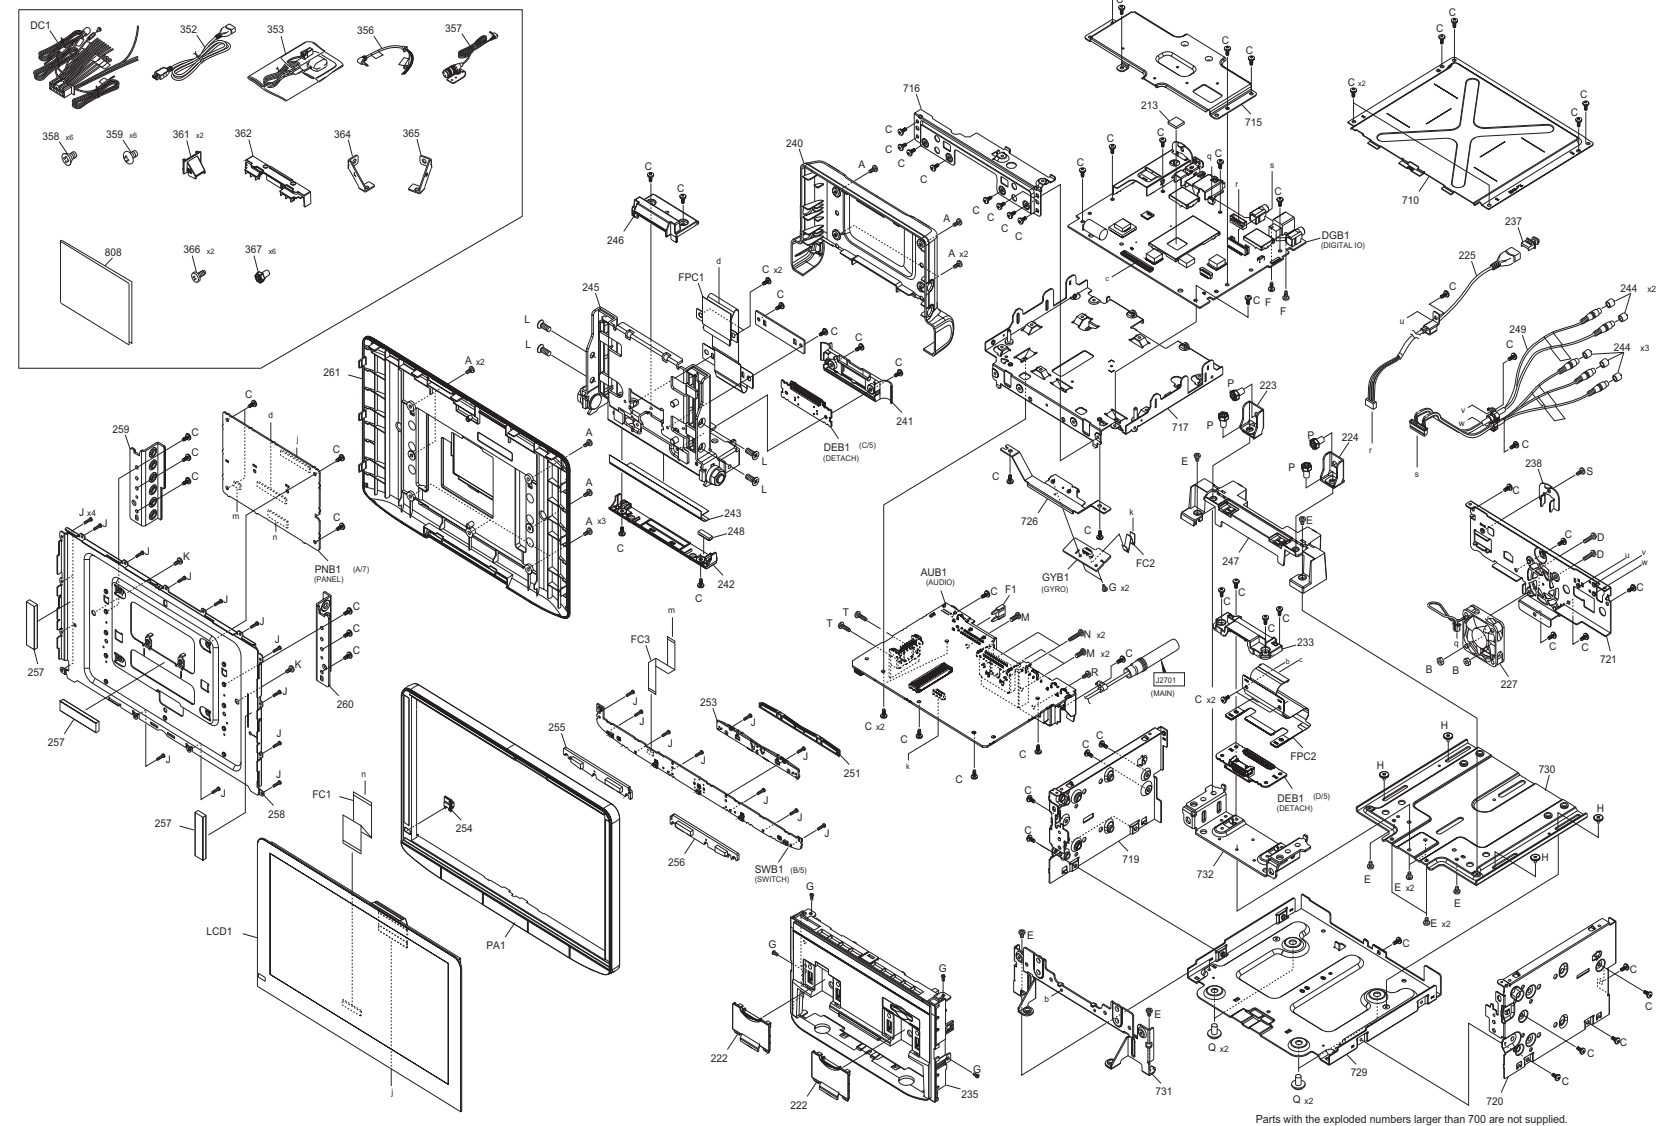

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW <M1MM>						
	AUB1	CB-XJ6153K02N	AUDIO PWB	XJ6-153K-02	1	K0_A
	AUB1	CB-XJ6167K02N	AUDIO PWB	XJ6-167K-02	1	K0_B
	DEB1	CB-XJ8092K07N	DETACH PWB	XJ8-092K-02	1	
	DGB1	CB-XJA080K03N	DIGITAL IO PWB	XJA-080K-03	1	K0_A
	DGB1	CB-XJA110K03N	DIGITAL IO PWB	XJA-110K-03	1	K0_B
	GYB1	CB-XJ5009J00N	GYRO PWB	XJ5-009J-00	1	
	PNB1	CB-XJ8092K04N	PANEL PWB	XJ8-092K-02	1	
	SWB1	CB-XJ8092K06N	SW PWB	XJ8-092K-02	1	
	FC1	E3G-0174-00	FFC WIRE		1	
	FC2	EF0AM051004AC	FFC WIRE		1	
	FC3	E3G-0175-00	FFC WIRE		1	
	FPC1	E3J-0061-00	FPC		1	
	FPC2	E3J-0060-00	FPC		1	
	DC1	E3A-0578-00	DC CORD		1	
Δ	F1	FZB10AU-150	BLADE FUSE		1	
	LCD1	B3H-0140-00	LCD ASSY		1	
	PA1	A6C-0143-15	PANEL ASSY		1	
	A	QYSDST2606MA	TAP SCREW	M2.6 x 6.0mm	11	
	B	QYNTS2600ZA	NUT	M2.6	2	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6.0mm	77	
	D	LV45522-001A	SPECIAL SCREW		2	
	E	NOZ-0150-00	TAPTITE SCREW		10	
	F	QYSDSG3006ZA	TAP SCREW	M3.0 x 6.0mm	2	
	G	QYSDST2005ZA	TAP SCREW	M2.0 x 5.0mm	6	
	H	NOZ-0355-00	STEPPED SCREW		4	
	J	VKZ4777-012	SCREW		24	
	K	N09-6909-05	STEPPED SCREW		2	
	L	N32-4012-43	F.HEAD M.SCREW		4	
	M	QYSPSG3008ZA	TAP SCREW	M3.0 x 8.0mm	3	
	N	QYSDST2614ZA	TAP SCREW	M2.6 x 14.0mm	2	
	P	NOZ-0367-01	SPECIAL SCREW		4	
	Q	N90-5008-48	TP HEAD M.SCREW		4	
	R	QYSDSF2608ZA	TAP SCREW	M2.6 x 8.0mm	1	
	S	QYSDST3006MA	TAP SCREW	M3.0 x 6.0mm	1	
	T	QYSDST2610ZA	TAP SCREW	M2.6 x 10.0mm	2	
	213	F0C-0071-00	COOL SHEET		1	
	222	F0G-0408-00	COVER		2	
	223	J2B-0590-00	BRACKET		1	
	224	J2B-0591-00	BRACKET		1	
	225	E3A-0732-00	USB CORD		1	
	227	F0K-0264-00	FAN		1	
	233	F0G-0403-00	COVER		1	
	235	A2C-0099-06	SUB PANEL		1	
	237	F0G-0282-00	J.COVER(USB)		1	
	238	F0G-0410-00	COVER		1	
	240	F0G-0402-00	HINGE COVER		1	
	241	F0G-0404-00	COVER		1	
	242	F0G-0421-00	COVER		1	
	243	G1G-0123-00	SHEET		1	
	244	F2K-0012-00	INS.COVER		5	
	245	J5A-0009-00	HINGE		1	
	246	F0G-0407-00	COVER		1	
	247	F0G-0405-00	COVER		1	
	248	G1B-0444-00	CUSHION		1	
	249	E3A-0808-00	CORD W.PINJACK		1	
	251	B1K-0177-00	LIGHTING BOARD		1	
	253	B1K-0178-10	LIGHTING BOARD		1	
	254	T6A-0099-00	PLASTIC LENS		1	
	255	B1K-0176-00	LIGHTING BOARD		1	
	256	B1K-0175-00	LIGHTING BOARD		1	
	257	G1D-0371-07	CONDUCT CUSHION		3	
	258	J2B-0595-00	BRACKET		1	
	259	J2K-0270-00	GUIDE		1	
	260	J2K-0271-00	GUIDE		1	
	261	A4G-0123-00	REAR COVER		1	
	352	E3A-0364-00	USB CORD	BLACK	1	
	353	T9A-0070-00	ANTENNA ASSY		1	
	356	E3A-0613-00	CORD WITH PLUG		1	
	357	T9B-0066-00	MICROPHONE		1	
	358	QYSSSP5008ZA	SCREW	M5.0 x 8.0mm	6	
	359	QYSTSP5008ZA	SCREW	M5.0 x 8.0mm	6	
	361	F0G-0409-00	COVER		2	
	362	F0G-0406-00	COVER		1	
	364	J2B-0592-00	BRACKET		1	
	365	J2B-0596-00	BRACKET		1	
	366	QYSDST3006MA	TAP SCREW	M3.0 x 6.0mm	2	
	367	NOZ-0367-01	SPECIAL SCREW		6	
	710	-----	TOP PLATE	NO SERVICE PART	1	
	715	-----	HEAT SINK	NO SERVICE PART	1	
	716	-----	BRACKET	NO SERVICE PART	1	
	717	-----	S.CHASSIS ASSY	NO SERVICE PART	1	
	719	-----	SIDE PLATE	NO SERVICE PART	1	
	720	-----	SIDE PLATE	NO SERVICE PART	1	
	721	-----	REAR PANEL	NO SERVICE PART	1	
	726	-----	BRACKET	NO SERVICE PART	1	
	729	-----	CHASS.CALK.ASSY	NO SERVICE PART	1	
	730	-----	SLIDER	NO SERVICE PART	1	
	731	-----	BRACKET	NO SERVICE PART	1	
	732	-----	SLIDE BASE	NO SERVICE PART	1	
	808	-----	GUIDE BOOK	NO SERVICE PART	1	

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
GYRO PWB ASSY (XJ5-009J-00) <XJ5>						
	C2	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C3	CK73HXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	R2	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	
	R3	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R5	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R6	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	
	R7	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R8	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R10	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	CN1	EC710AM-0510A	FFC FPC CONNE		1	
	SN1	-----	SENSOR	NO SERVICE PART	1	
AUDIO PWB ASSY (XJ6-153K-02) <XJ6>						
△	F171	F53-0513-08	PATTERN FUSE	4A	1	K0_A
	IC1	LV5680NPVC-H	MOS IC		1	K0_A
	IC31	NJU7108F3	MOS IC		1	K0_A
	IC41	XC6223B331P-G	ANALOG IC		1	K0_A
	IC101	JCV8031	ANALOG IC		1	K0_A
	IC115	TC7SH17FUJC	MOS IC		1	K0_A
	IC201	TDA7715LV	ANALOG IC		1	K0_A
	IC202	NJM8080RB1	ANALOG IC		1	K0_A
	IC203	NJM8080RB1	ANALOG IC		1	K0_A
	IC251	NJM8080RB1	ANALOG IC		1	K0_A
	IC252	NJM8080RB1	ANALOG IC		1	K0_A
	IC261	NJM2794RB2	BIPOLAR IC		1	K0_A
	IC290	TC74HCT4053FT	MOS IC		1	K0_A
	IC302	SI47901A2GE1A	MOS IC		1	K0_A
	IC303	W3F-0573-00	ROM IC		1	K0_A
	IC304	SN74AUP3G17CU	MOS IC		1	K0_A
	IC305	SN74AUP2G17CK	MOS IC		1	K0_A
	IC306	TCA9517DGK	MOS IC		1	K0_A
	IC307	SN74AUP2G17CK	MOS IC		1	K0_A
	IC351	MM3703F18HE	ANALOG IC		1	K0_A
	IC352	MM3703F33HE	ANALOG IC		1	K0_A
	IC511	TC7SET32FUJC	MOS IC		1	K0_A
	IC512	TC7SH17FUJC	MOS IC		1	K0_A
	IC601	NJW1240V	MOS IC		1	K0_A
	IC851	NJM2903CRB1	MOS IC		1	K0_A
	IC852	TC7SH126FUJC	MOS IC		1	K0_A
	IC2001	NJU7108F3	MOS IC		1	K0_A
	IC2301	-----	MCU IC	NO SERVICE PART	1	K0_A
	IC2302	XC6120N282N-G	MOS IC		1	K0_A
	IC2303	NJU7108F3	MOS IC		1	K0_A
	IC2501	AK7738VQ	MOS IC		1	K0_A
	IC2502	AK4388AET	ANALOG IC		1	K0_A
	IC2503	AK4388AET	ANALOG IC		1	K0_A
	IC2507	XC6209B502P-G	MOS IC		1	K0_A
	IC2508	MM3411A33NE	ANALOG IC		1	K0_A
	IC2601	NJM8080RB1	ANALOG IC		1	K0_A
	IC2602	NJM2871BF05	ANALOG IC		1	K0_A
	Q11	2SB1689	TRANSISTOR		1	K0_A
	Q12	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q51	KTC4075EP/Y/	TRANSISTOR		1	K0_A
	Q80	KRA307E-P	TRANSISTOR		1	K0_A
	Q81	KTA2014EP/Y/	TRANSISTOR		1	K0_A
	Q82	KTC4075EP/Y/	TRANSISTOR		1	K0_A
	Q90	KRC403E-P	DIGI TRANSISTOR		1	K0_A
	Q151	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q152	KRA306E-P	TRANSISTOR		1	K0_A
	Q155	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q156	KRA306E-P	TRANSISTOR		1	K0_A
	Q161	KRC410E-P	DIGI TRANSISTOR		1	K0_A
	Q162	KRC410E-P	DIGI TRANSISTOR		1	K0_A
	Q163	KRC410E-P	DIGI TRANSISTOR		1	K0_A
	Q164	KRC410E-P	DIGI TRANSISTOR		1	K0_A
	Q165	KRC410E-P	DIGI TRANSISTOR		1	K0_A
	Q166	KRC410E-P	DIGI TRANSISTOR		1	K0_A
	Q191	KRA306E-P	TRANSISTOR		1	K0_A
	Q193	KRC410E-P	DIGI TRANSISTOR		1	K0_A
	Q194	KRC410E-P	DIGI TRANSISTOR		1	K0_A
	Q2004	KRC404E-P	DIGI TRANSISTOR		1	K0_A
	Q2301	2SB1689	TRANSISTOR		1	K0_A
	Q2302	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q2303	KTA2014EP/Y/	TRANSISTOR		1	K0_A
	Q2304	KRA307E-P	TRANSISTOR		1	K0_A
	Q2305	KTC4075EP/Y/	TRANSISTOR		1	K0_A
	Q2306	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q2307	KTC4075EP/Y/	TRANSISTOR		1	K0_A
	Q2308	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q2309	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q2310	KTA2014EP/Y/	TRANSISTOR		1	K0_A
	Q2311	RE1L002SN	FET		1	K0_A
	Q2312	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q2313	RE1L002SN	FET		1	K0_A
	Q2314	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q2401	RE1C002ZP	FET		1	K0_A
	Q2402	RE1L002SN	FET		1	K0_A
	Q2501	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q2502	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	D1	D4F60-53	DIODE		1	K0_A
	D11	RB161MM-20	SCHOTTKY DIODE		1	K0_A
	D32	BZT52B16LSHF	ZENER DIODE		1	K0_A

MODEL		MARK	MODEL	MARK		
KW-Z1000W		K0_A	KW-Z1000W	K0_B		
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D41	GS1J-LTP	DIODE		1	K0_A
	D42	GS1J-LTP	DIODE		1	K0_A
	D43	GS1J-LTP	DIODE		1	K0_A
	D44	GS1J-LTP	DIODE		1	K0_A
	D55	BZT52B6V2LSHF	ZENER DIODE		1	K0_A
	D71	DAP202UM	DIODE		1	K0_A
	D80	1SS355-HF	DIODE		1	K0_A
	D90	1SS355-HF	DIODE		1	K0_A
	D101	DAP202UM	DIODE		1	K0_A
	D151	DAP202UM	DIODE		1	K0_A
	D155	DAP202UM	DIODE		1	K0_A
	D191	DAP202UM	DIODE		1	K0_A
	D202	1SS355-HF	DIODE		1	K0_A
	D203	DAP202UM	DIODE		1	K0_A
	D204	DAP202UM	DIODE		1	K0_A
	D205	DAP202UM	DIODE		1	K0_A
	D270	1SS355-HF	DIODE		1	K0_A
	D271	BZT52B4V7LSHF	ZENER DIODE		1	K0_A
	D2005	BZT52B8V2LSHF	ZENER DIODE		1	K0_A
	D2006	BZT52B10LSHF	ZENER DIODE		1	K0_A
	D2007	BZT52B16LSHF	ZENER DIODE		1	K0_A
	D2301	1SS355-HF	DIODE		1	K0_A
	D2401	1SS355-HF	DIODE		1	K0_A
	D2402	1SS355-HF	DIODE		1	K0_A
	D2409	1SS355-HF	DIODE		1	K0_A
	D2502	DAN217WM	DIODE		1	K0_A
	D2601	BZT52B11LSHF	ZENER DIODE		1	K0_A
	D2602	BZT52B11LSHF	ZENER DIODE		1	K0_A
	D2603	1SS355-HF	DIODE		1	K0_A
	C1	CD04AZ1C332M2	E CAPACITOR	3300uF 16V M	1	K0_A
	C11	CE32CB1V101M	E CAPACITOR	100uF 35V M	1	K0_A
	C12	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C13	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K0_A
	C14	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K0_A
	C15	CE32CB1A101M	E CAPACITOR	100uF 10V M	1	K0_A
	C16	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_A
	C18	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C19	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C20	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_A
	C21	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C22	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_A
	C23	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C24	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C25	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	K0_A
	C26	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C27	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_A
	C28	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_A
	C31	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C32	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C41	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C42	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C51	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C52	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C71	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C80	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C90	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C100	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_A
	C101	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C102	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C103	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C104	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C105	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C106	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C109	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C110	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C111	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C112	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C113	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C114	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C115	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C121	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C122	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C123	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C124	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C125	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C126	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C127	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C128	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C131	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_A
	C132	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_A
	C133	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_A
	C134	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_A
	C135	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_A
	C136	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_A
	C137	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_A
	C138	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_A
	C145	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C146	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C151	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_A
	C152	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_A
	C153	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C154	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C155	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C156	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C171	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C172	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C173	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C174	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C175	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C176	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C177	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C191	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C192	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C195	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C196	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C197	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C201	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K0_A
	C202	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C203	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C204	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C205	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C206	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C208	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C211	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C212	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C215	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C216	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C219	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C220	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C227	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C228	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C234	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C235	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C236	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C237	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C238	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C241	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C243	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C244	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C251	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C252	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C253	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C254	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C255	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C256	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C260	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C271	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C272	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C273	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C274	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C275	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C276	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C277	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C278	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C279	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	K0_A
	C283	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C284	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C285	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C287	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C288	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C289	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C290	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C291	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C292	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C293	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C294	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C302	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C309	CC73JCH1H030C	C CAPACITOR	3pF 50V C	1	K0_A
	C310	CC73JCH1H070D	C CAPACITOR	7pF 50V D	1	K0_A
	C311	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_A
	C312	CC73JCH1H330J	C CAPACITOR	33pF 50V J	1	K0_A
	C313	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	K0_A
	C314	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C316	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C317	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C319	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_A
	C320	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C321	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C324	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C325	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_A
	C326	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C327	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C328	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_A
	C329	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C330	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C331	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_A
	C332	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C333	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C335	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C337	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_A
	C338	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C351	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C352	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C353	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A

MODEL			MARK	MODEL	MARK	
KW-Z1000W			K0_A	KW-Z1000W	K0_B	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C354	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C356	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C357	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C358	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C359	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C360	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C361	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C501	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C502	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C503	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C511	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C512	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C601	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_A
	C602	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_A
	C603	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C604	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C605	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C606	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C610	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C611	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C612	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C613	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C614	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C616	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C618	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C619	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C711	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C712	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C713	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C714	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C715	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C716	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C721	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C722	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C793	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C794	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C851	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_A
	C852	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_A
	C854	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C855	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C2006	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C2186	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2301	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_A
	C2302	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_A
	C2303	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_A
	C2304	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2305	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2306	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2307	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2309	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C2310	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C2312	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2313	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C2314	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C2315	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C2316	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C2317	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2318	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2319	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2321	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2322	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2323	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2324	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2325	CE32CC0J331M	E CAPACITOR	330uF 6.3V M	1	K0_A
	C2331	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C2332	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2401	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2501	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2502	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2503	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2504	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2505	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2506	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2507	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2508	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C2509	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C2510	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C2512	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2513	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2514	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2515	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2516	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2517	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2527	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2528	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C2529	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2530	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2531	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C2532	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2533	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C2534	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K0_A
	C2535	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2536	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C2537	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2538	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C2539	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2540	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C2541	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C2542	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2543	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C2544	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2545	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2549	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	K0_A
	C2550	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	K0_A
	C2551	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_A
	C2552	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C2553	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2554	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_A
	C2556	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C2561	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2562	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2563	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2564	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2565	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2566	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2567	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2568	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C2571	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_A
	C2572	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2602	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2603	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C2605	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2606	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2607	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	K0_A
	C2609	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	K0_A
	C2611	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C2613	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	K0_A
	C2615	CK73JXR1A683K	C CAPACITOR	0.068uF 10V K	1	K0_A
	C2616	CK73JXR1A683K	C CAPACITOR	0.068uF 10V K	1	K0_A
	C2617	CK730DT1C476K	C CAPACITOR	47uF 16V K	1	K0_A
	C2621	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2622	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2623	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C2624	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C2625	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	R13	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R15	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	1	K0_A
	R17	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	1	K0_A
	R18	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R19	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R30	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R31	RK73EB2E622J	MG RESISTOR	6.2kΩ 1/4W J	1	K0_A
	R32	RK73EB2E622J	MG RESISTOR	6.2kΩ 1/4W J	1	K0_A
	R33	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	1	K0_A
	R34	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_A
	R35	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	K0_A
	R36	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	1	K0_A
	R37	RK73EB2E153J	MG RESISTOR	15kΩ 1/4W J	1	K0_A
	R38	RK73GH2A333D	MG RESISTOR	33kΩ 1/10W D	1	K0_A
	R39	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	K0_A
	R41	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	K0_A
	R42	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	K0_A
	R50	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R51	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K0_A
	R52	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K0_A
	R53	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K0_A
	R54	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0_A
	R55	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	K0_A
	R68	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R72	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R73	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	K0_A
	R74	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R80	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A
	R81	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R82	RK73FB2B103J	MG RESISTOR	10kΩ 1/8W J	1	K0_A
	R83	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R84	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R90	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	K0_A
	R91	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R100	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R103	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R104	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R115	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R140	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R142	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K0_A
	R143	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R144	RK73HB1J751J	MG RESISTOR	750Ω 1/16W J	1	K0_A
	R145	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0_A
	R146	RK73HB1J3R0J	MG RESISTOR	3.0Ω 1/16W J	1	K0_A
	R151	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A
	R152	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A
	R153	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A
	R154	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R155	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A
	R156	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A
	R159	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R161	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R162	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R163	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R164	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R165	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R166	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R171	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R172	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R173	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R174	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R175	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R176	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R191	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A
	R192	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A
	R193	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R194	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R195	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R196	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R201	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_A
	R202	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R204	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R205	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R206	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R211	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_A
	R212	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_A
	R213	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_A
	R214	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_A
	R215	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_A
	R216	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_A
	R217	RK73HH1J392D	MG RESISTOR	3.9kΩ 1/16W D	1	K0_A
	R218	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_A
	R219	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_A
	R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R251	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R252	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R253	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K0_A
	R254	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K0_A
	R255	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R256	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R257	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R258	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R260	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_A
	R261	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_A
	R272	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R273	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0_A
	R283	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R284	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R285	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R287	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R288	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R289	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R290	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R291	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R292	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R293	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_A
	R294	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R295	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R296	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R297	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R303	RK73HH1J510D	MG RESISTOR	51Ω 1/16W D	1	K0_A
	R304	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	1	K0_A
	R309	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R310	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R311	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R312	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R313	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R314	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R315	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R316	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R317	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R318	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R320	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R321	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R322	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R323	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R324	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R326	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R328	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R335	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R336	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R337	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R338	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R341	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R343	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R345	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R351	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R353	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R354	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R357	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	K0_A

MODEL			MARK	MODEL	MARK	
KW-Z1000W			K0_A	KW-Z1000W	K0_B	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R358	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	K0_A
	R359	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R360	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R361	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R367	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_A
	R368	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_A
	R369	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_A
	R370	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_A
	R371	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_A
	R372	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_A
	R373	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_A
	R500	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R501	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0_A
	R502	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0_A
	R503	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0_A
	R511	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R512	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R513	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A
	R514	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	K0_A
	R515	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R516	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R517	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R581	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R582	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R583	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R611	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_A
	R612	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R614	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R615	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R616	RK73HB1J684J	MG RESISTOR	680kΩ 1/16W J	1	K0_A
	R798	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	K0_A
	R851	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	K0_A
	R852	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	K0_A
	R855	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0_A
	R856	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	K0_A
	R857	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R859	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0_A
	R861	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R863	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R864	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R1101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R1102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R1103	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R1104	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R1111	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1	K0_A
	R1112	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1	K0_A
	R1113	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1	K0_A
	R1114	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1	K0_A
	R1146	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2008	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	1	K0_A
	R2009	RK73HH1J184D	MG RESISTOR	180kΩ 1/16W D	1	K0_A
	R2010	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	K0_A
	R2011	RK73HH1J392D	MG RESISTOR	3.9kΩ 1/16W D	1	K0_A
	R2012	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_A
	R2013	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	K0_A
	R2014	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1	K0_A
	R2015	RK73HH1J561D	MG RESISTOR	560Ω 1/16W D	1	K0_A
	R2301	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R2302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2303	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2304	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2307	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2310	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K0_A
	R2311	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2312	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2313	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2314	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2316	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2317	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R2318	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A
	R2319	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A
	R2320	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2321	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2322	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2323	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2324	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2325	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2326	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2327	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2328	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2329	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2331	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2332	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2333	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2334	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2335	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2336	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2337	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2338	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2339	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2340	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R2341	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A
	R2342	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R2343	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2344	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R2345	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A
	R2346	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2347	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R2348	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A
	R2349	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2350	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2351	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0_A
	R2352	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0_A
	R2355	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R2356	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2357	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2359	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2361	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2362	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2363	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2364	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2365	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2366	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2367	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2368	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2369	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2370	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2371	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2372	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2373	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2374	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2375	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0_A
	R2376	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_A
	R2377	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	K0_A
	R2378	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2379	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	K0_A
	R2380	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R2381	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2382	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2384	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2385	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2389	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2391	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0_A
	R2392	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2393	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2394	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2395	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R2396	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2397	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2398	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2400	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2401	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R2402	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A
	R2403	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A
	R2404	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2405	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2406	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2407	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2408	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2409	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R2501	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R2503	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2504	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2506	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2507	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2511	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A
	R2512	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A
	R2513	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A
	R2514	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A
	R2518	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A
	R2519	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A
	R2521	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A
	R2522	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A
	R2524	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2545	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2546	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2547	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2548	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2549	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2550	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R2551	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0_A
	R2552	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2553	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2554	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2555	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2556	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2557	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2558	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2559	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2560	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2561	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2562	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2563	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2564	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2565	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A

MODEL			MARK	MODEL	MARK	
KW-Z1000W			K0_A	KW-Z1000W	K0_B	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R2566	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R2567	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R2568	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K0_A
	R2569	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2570	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R2572	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2574	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R2575	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R2576	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R2577	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R2578	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_A
	R2579	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_A
	R2581	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R2587	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	K0_A
	R2588	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_A
	R2589	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_A
	R2590	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_A
	R2591	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_A
	R2592	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_A
	R2593	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_A
	R2594	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_A
	R2595	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_A
	R2596	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2609	RK73HB1J203J	MG RESISTOR	20kΩ 1/16W J	1	K0_A
	R2610	RK73HB1J203J	MG RESISTOR	20kΩ 1/16W J	1	K0_A
	R2612	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	K0_A
	R2614	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	K0_A
	R2616	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2617	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2618	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0_A
	R2620	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R2622	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_A
	R2624	RK73HB1J752J	MG RESISTOR	7.5kΩ 1/16W J	1	K0_A
	R2625	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	L1	L3D-0053-00	CHOKE COIL		1	K0_A
	L301	LK73G0BE1R0K	M.CHIP INDUCTOR		1	K0_A
	L302	LK73G0BE1R0K	M.CHIP INDUCTOR		1	K0_A
	L303	LK73G0BER33K	M.CHIP INDUCTOR		1	K0_A
	L304	LK73G0BER18K	M.CHIP INDUCTOR		1	K0_A
	L305	LK73G0BE68NK	M.CHIP INDUCTOR		1	K0_A
	L306	LK73G0BE1R5K	M.CHIP INDUCTOR		1	K0_A
	L601	LK73G0AQ1R0K	M.CHIP INDUCTOR		1	K0_A
	L2301	LB73G0FK-001	CHIP FERRITE		1	K0_A
	CN101	EB770AX-05E0A	B TO B CONNE		1	K0_A
	CN2301	EA720AT-1008A	W TO B CONNE		1	K0_A
	CN2303	EC710AM-0510A	FFC FPC CONNE		1	K0_A
△	F6	F53-0513-08	PATTERN FUSE	4A	1	K0_A
△	F7	F53-0513-08	PATTERN FUSE	4A	1	K0_A
△	F191	F53-0513-08	PATTERN FUSE	4A	1	K0_A
△	F581	F53-0513-08	PATTERN FUSE	4A	1	K0_A
	J1	E5J-0022-00	R.RECEPTACLE		1	K0_A
	J151	E6D-0025-00	PIN JACK		1	K0_A
	J191	E1B-0041-00	3.5D PHONE JACK		1	K0_A
	J501	E5G-0029-00	CYL.RECEPTACLE		1	K0_A
	J581	E1B-0041-00	3.5D PHONE JACK		1	K0_A
	J2601	E1B-0041-00	3.5D PHONE JACK		1	K0_A
	VA52	SDV1005E18//2	VARIATOR		1	K0_A
	VA55	SDV1005E18//2	VARIATOR		1	K0_A
	VA60	SDV1005E18//2	VARIATOR		1	K0_A
	VA72	SDV1005E18//2	VARIATOR		1	K0_A
	VA74	SDV1005E18//2	VARIATOR		1	K0_A
	VA75	SDV1005E18//2	VARIATOR		1	K0_A
	VA171	SDV1005A14//0	VARIATOR		1	K0_A
	VA172	SDV1005A14//0	VARIATOR		1	K0_A
	VA173	SDV1005A14//0	VARIATOR		1	K0_A
	VA174	SDV1005A14//0	VARIATOR		1	K0_A
	VA175	SDV1005A14//0	VARIATOR		1	K0_A
	VA176	SDV1005A14//0	VARIATOR		1	K0_A
	VA177	SDV1005A14//0	VARIATOR		1	K0_A
	VA195	SDV1005A14//0	VARIATOR		1	K0_A
	VA196	SDV1005A14//0	VARIATOR		1	K0_A
	VA197	SDV1005A14//0	VARIATOR		1	K0_A
	VA301	F0K-0010-00	SURGE ABSORBER		1	K0_A
	VA302	F0K-0014-00	SURGE ABSORBER		1	K0_A
	VA501	SDV1005A14//0	VARIATOR		1	K0_A
	VA502	SDV1005A14//0	VARIATOR		1	K0_A
	VA503	SDV1005A14//0	VARIATOR		1	K0_A
	VA511	SDV1005E18//2	VARIATOR		1	K0_A
	VA512	SDV1005E18//2	VARIATOR		1	K0_A
	VA513	SDV1005E18//2	VARIATOR		1	K0_A
	VA581	SDV1005A14//0	VARIATOR		1	K0_A
	VA582	SDV1005A14//0	VARIATOR		1	K0_A
	VA583	SDV1005A14//0	VARIATOR		1	K0_A
	VA851	SDV1005E18//2	VARIATOR		1	K0_A
	W301	E3A-0039-10	ANTENNA CABLE		1	K0_A
	X301	L7J-0194-00	QUARTZ CRYSTAL		1	K0_A
	X2301	L7J-0099-00	QUARTZ CRYSTAL		1	K0_A
	X2501	L7J-0026-00	QUARTZ CRYSTAL		1	K0_A
AUDIO PWB ASSY (XJ6-167K-02) <XJ6>						
	IC1	LV5680NPVC-H	MOS IC		1	K0_B
	IC31	NJU7108F3	MOS IC		1	K0_B
	IC41	XC6223B331P-G	ANALOG IC		1	K0_B

MODEL			MARK	MODEL	MARK	
KW-Z1000W			K0_A	KW-Z1000W	K0_B	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	IC101	JCV8031	ANALOG IC		1	K0_B
	IC115	TC7SH17FUJC	MOS IC		1	K0_B
	IC201	TDA7715LV-1	ANALOG IC		1	K0_B
	IC202	NJM8080RB1	ANALOG IC		1	K0_B
	IC203	NJM8080RB1	ANALOG IC		1	K0_B
	IC251	NJM8080RB1	ANALOG IC		1	K0_B
	IC252	NJM8080RB1	ANALOG IC		1	K0_B
	IC261	NJM2794RB2	BIPOLAR IC		1	K0_B
	IC290	TC74HCT4053FT	MOS IC		1	K0_B
	IC302	SI47901A2GE1A	MOS IC		1	K0_B
	IC303	W3F-0573-00	ROM IC		1	K0_B
	IC304	SN74AUP3G17CU	MOS IC		1	K0_B
	IC305	SN74AUP2G17CK	MOS IC		1	K0_B
	IC306	TCA9517DGK	MOS IC		1	K0_B
	IC307	SN74AUP2G17CK	MOS IC		1	K0_B
	IC351	MM3703F18HE	ANALOG IC		1	K0_B
	IC352	MM3703F33HE	ANALOG IC		1	K0_B
	IC511	TC7SET32FUJC	MOS IC		1	K0_B
	IC512	TC7SH17FUJC	MOS IC		1	K0_B
	IC601	NJW1240V	MOS IC		1	K0_B
	IC851	NJM2903CRB1	MOS IC		1	K0_B
	IC852	TC7SH126FUJC	MOS IC		1	K0_B
	IC2001	NJU7108F3	MOS IC		1	K0_B
	IC2301	-----	MCU IC	NO SERVICE PART	1	K0_B
	IC2302	XC6120N282N-G	MOS IC		1	K0_B
	IC2303	NJU7108F3	MOS IC		1	K0_B
	IC2501	AK7738VQ	MOS IC		1	K0_B
	IC2502	PCM1754DBQ	ANALOG IC		1	K0_B
	IC2503	PCM1754DBQ	ANALOG IC		1	K0_B
	IC2507	XC6209B502P-G	MOS IC		1	K0_B
	IC2508	MM3411A33NE	ANALOG IC		1	K0_B
	IC2601	NJM8080RB1	ANALOG IC		1	K0_B
	IC2602	NJM2871BF05	ANALOG IC		1	K0_B
	Q11	2SB1689	TRANSISTOR		1	K0_B
	Q12	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q51	KTC4075EP/Y/	TRANSISTOR		1	K0_B
	Q80	KRA307E-P	TRANSISTOR		1	K0_B
	Q81	KTA2014EP/Y/	TRANSISTOR		1	K0_B
	Q82	KTC4075EP/Y/	TRANSISTOR		1	K0_B
	Q90	KRC403E-P	DIGI TRANSISTOR		1	K0_B
	Q151	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q152	KRA306E-P	TRANSISTOR		1	K0_B
	Q155	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q156	KRA306E-P	TRANSISTOR		1	K0_B
	Q161	KRC410E-P	DIGI TRANSISTOR		1	K0_B
	Q162	KRC410E-P	DIGI TRANSISTOR		1	K0_B
	Q163	KRC410E-P	DIGI TRANSISTOR		1	K0_B
	Q164	KRC410E-P	DIGI TRANSISTOR		1	K0_B
	Q165	KRC410E-P	DIGI TRANSISTOR		1	K0_B
	Q166	KRC410E-P	DIGI TRANSISTOR		1	K0_B
	Q191	KRA306E-P	TRANSISTOR		1	K0_B
	Q193	KRC410E-P	DIGI TRANSISTOR		1	K0_B
	Q194	KRC410E-P	DIGI TRANSISTOR		1	K0_B
	Q2004	KRC404E-P	DIGI TRANSISTOR		1	K0_B
	Q2301	2SB1689	TRANSISTOR		1	K0_B
	Q2302	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q2303	KTA2014EP/Y/	TRANSISTOR		1	K0_B
	Q2304	KRA307E-P	TRANSISTOR		1	K0_B
	Q2305	KTC4075EP/Y/	TRANSISTOR		1	K0_B
	Q2306	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q2307	KTC4075EP/Y/	TRANSISTOR		1	K0_B
	Q2308	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q2309	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q2310	KTA2014EP/Y/	TRANSISTOR		1	K0_B
	Q2311	RE1L002SN	FET		1	K0_B
	Q2312	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q2313	RE1L002SN	FET		1	K0_B
	Q2314	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q2401	RE1C002ZP	FET		1	K0_B
	Q2402	RE1L002SN	FET		1	K0_B
	Q2501	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	Q2502	KRC407E-P	DIGI TRANSISTOR		1	K0_B
	D1	D4F60-53	DIODE		1	K0_B
	D11	RB161MM-20	SCHOTTKY DIODE		1	K0_B
	D32	BZT52B16LSHF	ZENER DIODE		1	K0_B
	D41	GS1J-LTP	DIODE		1	K0_B
	D42	GS1J-LTP	DIODE		1	K0_B
	D43	GS1J-LTP	DIODE		1	K0_B
	D44	GS1J-LTP	DIODE		1	K0_B
	D55	BZT52B6V2LSHF	ZENER DIODE		1	K0_B
	D71	DAP202UM	DIODE		1	K0_B
	D80	1SS355-HF	DIODE		1	K0_B
	D90	1SS355-HF	DIODE		1	K0_B
	D101	DAP202UM	DIODE		1	K0_B
	D151	DAP202UM	DIODE		1	K0_B
	D155	DAP202UM	DIODE		1	K0_B
	D191	DAP202UM	DIODE		1	K0_B
	D202	1SS355-HF	DIODE		1	K0_B
	D203	DAP202UM	DIODE		1	K0_B
	D204	DAP202UM	DIODE		1	K0_B
	D205	DAP202UM	DIODE		1	K0_B
	D270	1SS355-HF	DIODE		1	K0_B
	D271	BZT52B4V7LSHF	ZENER DIODE		1	K0_B

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D2005	BZT52B8V2LSHF	ZENER DIODE		1	K0_B
	D2006	BZT52B10LSHF	ZENER DIODE		1	K0_B
	D2007	BZT52B16LSHF	ZENER DIODE		1	K0_B
	D2301	1SS355-HF	DIODE		1	K0_B
	D2401	1SS355-HF	DIODE		1	K0_B
	D2402	1SS355-HF	DIODE		1	K0_B
	D2409	1SS355-HF	DIODE		1	K0_B
	D2502	DAN217WM	DIODE		1	K0_B
	D2601	BZT52B11LSHF	ZENER DIODE		1	K0_B
	D2602	BZT52B11LSHF	ZENER DIODE		1	K0_B
	D2603	1SS355-HF	DIODE		1	K0_B
	C1	CD04AZ1C332M2	E CAPACITOR	3300uF 16V M	1	K0_B
	C11	CE32CB1V101M	E CAPACITOR	100uF 35V M	1	K0_B
	C12	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C13	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K0_B
	C14	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K0_B
	C15	CE32CB1A101M	E CAPACITOR	100uF 10V M	1	K0_B
	C16	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_B
	C18	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C19	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C20	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_B
	C21	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C22	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_B
	C23	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C24	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C25	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	K0_B
	C26	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_B
	C27	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_B
	C28	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_B
	C31	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C32	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C41	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C42	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C51	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C52	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C71	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C80	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C90	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C100	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_B
	C101	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C102	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C103	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C104	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C105	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B
	C106	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B
	C109	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C110	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C111	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C112	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C113	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C114	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C115	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_B
	C121	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C122	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C123	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C124	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C125	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C126	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C127	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C128	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C131	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_B
	C132	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_B
	C133	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_B
	C134	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_B
	C135	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_B
	C136	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_B
	C137	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_B
	C138	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1	K0_B
	C145	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C146	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C151	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_B
	C152	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_B
	C153	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C154	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C155	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C156	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C171	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C172	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C173	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C174	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C175	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C176	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C177	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C191	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C192	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C195	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C196	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C197	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C201	CE32CB1C470M	E CAPACITOR	47uF 16V M	1	K0_B
	C202	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C203	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C204	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B

MODEL			MARK	MODEL	MARK	
KW-Z1000W			K0_A	KW-Z1000W	K0_B	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C205	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C206	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C208	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C211	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C212	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C215	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C216	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C219	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C220	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C227	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C228	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C234	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C235	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C236	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C237	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C238	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C241	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C243	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C244	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C251	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C252	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C253	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C254	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C255	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C256	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C260	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C271	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C272	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C273	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C274	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C275	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C276	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C277	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C278	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C279	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	K0_B
	C283	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C284	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C285	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C287	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C288	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C289	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C290	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C291	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C292	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C293	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C294	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C302	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C309	CC73JCH1H030C	C CAPACITOR	3pF 50V C	1	K0_B
	C310	CC73JCH1H070D	C CAPACITOR	7pF 50V D	1	K0_B
	C311	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_B
	C312	CC73JCH1H330J	C CAPACITOR	33pF 50V J	1	K0_B
	C313	CC73JCH1H010C	C CAPACITOR	1pF 50V C	1	K0_B
	C314	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C316	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C317	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C319	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_B
	C320	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C321	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C324	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C325	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_B
	C326	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C327	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C328	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_B
	C329	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C330	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C331	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_B
	C332	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C333	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C335	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C337	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_B
	C338	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C351	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C352	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C353	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C354	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C356	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C357	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C358	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C359	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C360	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C361	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C501	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C502	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C503	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C511	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_B
	C512	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_B
	C601	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_B
	C602	CE32CB1C100M	E CAPACITOR	10uF 16V M	1	K0_B
	C603	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C604	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C605	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C606	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B

MODEL			MARK	MODEL	MARK
KW-Z1000W			K0_A	KW-Z1000W	K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY Local
	C610	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_B
	C611	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C612	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C613	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C614	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C616	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C618	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C619	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_B
	C711	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1 K0_B
	C712	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1 K0_B
	C713	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1 K0_B
	C714	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1 K0_B
	C715	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1 K0_B
	C716	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1 K0_B
	C721	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1 K0_B
	C722	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1 K0_B
	C793	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1 K0_B
	C794	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1 K0_B
	C851	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1 K0_B
	C852	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1 K0_B
	C854	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B
	C855	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B
	C2006	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B
	C2186	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C2301	CE32CC1C221M	E CAPACITOR	220uF 16V M	1 K0_B
	C2302	CE32CC1C221M	E CAPACITOR	220uF 16V M	1 K0_B
	C2303	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1 K0_B
	C2304	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1 K0_B
	C2305	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2306	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2307	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2309	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1 K0_B
	C2310	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1 K0_B
	C2312	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2313	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B
	C2314	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B
	C2315	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B
	C2316	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B
	C2317	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2318	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2319	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2321	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C2322	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2323	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2324	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2325	CE32CC0J331M	E CAPACITOR	330uF 6.3V M	1 K0_B
	C2331	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B
	C2332	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2401	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C2501	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1 K0_B
	C2502	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1 K0_B
	C2503	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1 K0_B
	C2504	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1 K0_B
	C2505	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C2506	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C2507	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C2508	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1 K0_B
	C2509	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_B
	C2510	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1 K0_B
	C2512	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1 K0_B
	C2513	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1 K0_B
	C2514	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1 K0_B
	C2515	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1 K0_B
	C2516	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C2517	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C2527	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2528	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C2529	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C2530	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2531	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C2532	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2533	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C2534	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1 K0_B
	C2535	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2536	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C2537	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2538	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C2539	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2540	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C2541	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1 K0_B
	C2542	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2543	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C2544	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2545	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2549	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1 K0_B
	C2550	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1 K0_B
	C2551	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1 K0_B
	C2552	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C2553	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1 K0_B
	C2554	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1 K0_B
	C2556	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1 K0_B
	C2561	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1 K0_B
	C2562	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1 K0_B

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C2563	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C2564	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C2565	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C2566	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C2567	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C2568	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C2571	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_B
	C2572	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2602	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2603	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C2605	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2606	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2607	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	K0_B
	C2609	CC73JCH1H220J	C CAPACITOR	22pF 50V J	1	K0_B
	C2611	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C2613	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	K0_B
	C2615	CK73JXR1A683K	C CAPACITOR	0.068uF 10V K	1	K0_B
	C2616	CK73JXR1A683K	C CAPACITOR	0.068uF 10V K	1	K0_B
	C2617	CK73ODT1C476K	C CAPACITOR	47uF 16V K	1	K0_B
	C2621	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2622	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2623	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C2624	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C2625	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	R13	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R15	RK73HH1J273D	MG RESISTOR	27kΩ 1/16W D	1	K0_B
	R17	RK73HH1J472D	MG RESISTOR	4.7kΩ 1/16W D	1	K0_B
	R18	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R19	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R30	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R31	RK73EB2E622J	MG RESISTOR	6.2kΩ 1/4W J	1	K0_B
	R32	RK73EB2E622J	MG RESISTOR	6.2kΩ 1/4W J	1	K0_B
	R33	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	1	K0_B
	R34	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_B
	R35	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1	K0_B
	R36	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	1	K0_B
	R37	RK73EB2E153J	MG RESISTOR	15kΩ 1/4W J	1	K0_B
	R38	RK73GH2A333D	MG RESISTOR	33kΩ 1/10W D	1	K0_B
	R39	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	K0_B
	R41	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	K0_B
	R42	RK73FB2B472J	MG RESISTOR	4.7kΩ 1/8W J	1	K0_B
	R50	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R51	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K0_B
	R52	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K0_B
	R53	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K0_B
	R54	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0_B
	R55	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	K0_B
	R68	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R72	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_B
	R73	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	K0_B
	R74	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R80	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R81	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R82	RK73FB2B103J	MG RESISTOR	10kΩ 1/8W J	1	K0_B
	R83	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R84	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R90	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	K0_B
	R91	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R100	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R103	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R104	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R115	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R140	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R142	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K0_B
	R143	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R144	RK73HB1J751J	MG RESISTOR	750Ω 1/16W J	1	K0_B
	R145	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0_B
	R146	RK73HB1J3R0J	MG RESISTOR	3.0Ω 1/16W J	1	K0_B
	R151	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R152	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R153	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R154	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R155	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R156	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R159	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R161	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R162	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R163	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R164	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R165	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R166	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R171	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R172	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R173	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R174	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R175	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R176	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R191	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R192	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R193	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R194	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R195	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R196	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R201	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_B
	R202	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R204	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R205	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R206	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R211	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_B
	R212	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_B
	R213	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_B
	R214	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_B
	R215	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_B
	R216	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_B
	R217	RK73HH1J392D	MG RESISTOR	3.9kΩ 1/16W D	1	K0_B
	R218	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_B
	R219	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_B
	R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R251	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R252	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R253	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K0_B
	R254	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K0_B
	R255	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R256	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R257	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R258	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R260	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_B
	R261	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_B
	R272	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R273	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0_B
	R283	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R284	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R285	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R287	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R288	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R289	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R290	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R291	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R292	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R293	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_B
	R294	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R295	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R296	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R297	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R303	RK73HH1J510D	MG RESISTOR	51Ω 1/16W D	1	K0_B
	R304	RK73HB1J121J	MG RESISTOR	120Ω 1/16W J	1	K0_B
	R309	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R310	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R311	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R312	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R313	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R314	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R315	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R316	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R317	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R318	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R320	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R321	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R322	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R323	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R324	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R326	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R328	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R335	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R336	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R337	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R338	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R341	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R343	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R345	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R351	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R353	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R354	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R357	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	K0_B
	R358	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	K0_B
	R359	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R360	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R361	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R367	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_B
	R368	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_B
	R369	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_B
	R370	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_B
	R371	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_B
	R372	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_B
	R373	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_B
	R500	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R501	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0_B
	R502	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0_B
	R503	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0_B
	R511	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R512	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R513	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R514	RK73HB1J2R2J	MG RESISTOR	2.2Ω 1/16W J	1	K0_B

MODEL		MARK	MODEL		MARK
KW-Z1000W		K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY Local
	R515	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R516	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R517	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R581	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1 K0_B
	R582	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1 K0_B
	R583	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1 K0_B
	R611	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1 K0_B
	R612	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R614	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R615	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1 K0_B
	R616	RK73HB1J684J	MG RESISTOR	680kΩ 1/16W J	1 K0_B
	R798	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1 K0_B
	R851	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1 K0_B
	R852	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1 K0_B
	R855	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1 K0_B
	R856	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1 K0_B
	R857	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R859	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1 K0_B
	R861	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R863	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R864	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1 K0_B
	R1101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R1102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R1103	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R1104	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R1111	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1 K0_B
	R1112	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1 K0_B
	R1113	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1 K0_B
	R1114	RK73HB1J120J	MG RESISTOR	12Ω 1/16W J	1 K0_B
	R1146	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R2008	RK73HH1J223D	MG RESISTOR	22kΩ 1/16W D	1 K0_B
	R2009	RK73HH1J184D	MG RESISTOR	180kΩ 1/16W D	1 K0_B
	R2010	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1 K0_B
	R2011	RK73HH1J392D	MG RESISTOR	3.9kΩ 1/16W D	1 K0_B
	R2012	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1 K0_B
	R2013	RK73HH1J563D	MG RESISTOR	56kΩ 1/16W D	1 K0_B
	R2014	RK73HH1J753D	MG RESISTOR	75kΩ 1/16W D	1 K0_B
	R2015	RK73HH1J561D	MG RESISTOR	560Ω 1/16W D	1 K0_B
	R2301	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R2302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2303	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1 K0_B
	R2304	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2307	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2310	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1 K0_B
	R2311	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2312	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R2313	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2314	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R2316	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R2317	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R2318	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1 K0_B
	R2319	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1 K0_B
	R2320	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R2321	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2322	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R2323	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2324	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2325	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2326	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2327	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R2328	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2329	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R2331	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2332	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R2333	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2334	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2335	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1 K0_B
	R2336	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2337	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2338	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2339	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2340	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R2341	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1 K0_B
	R2342	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2343	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2344	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R2345	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1 K0_B
	R2346	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2347	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R2348	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1 K0_B
	R2349	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2350	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1 K0_B
	R2351	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1 K0_B
	R2352	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1 K0_B
	R2355	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R2356	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2357	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R2359	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R2361	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R2362	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R2363	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R2364	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R2365	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2366	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2367	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2368	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2369	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2370	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2371	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2372	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2373	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2374	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2375	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0_B
	R2376	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	K0_B
	R2377	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	K0_B
	R2378	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2379	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	K0_B
	R2380	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R2381	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2382	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2384	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2385	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2389	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2391	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0_B
	R2392	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2393	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2394	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2395	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R2396	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2397	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2398	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2400	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2401	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R2402	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R2403	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R2404	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2405	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2406	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2407	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2408	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2409	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2501	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2502	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2503	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2504	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2505	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2506	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2507	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R2511	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R2512	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R2513	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R2514	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R2518	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_B
	R2519	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_B
	R2521	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_B
	R2522	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_B
	R2524	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2545	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2546	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2547	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2548	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2549	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2550	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R2551	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	K0_B
	R2552	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2553	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2554	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2555	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2556	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2557	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2558	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2559	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2560	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2561	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2562	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2563	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2564	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2565	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2566	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2567	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2568	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K0_B
	R2569	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R2570	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2572	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2574	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2575	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2576	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R2577	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2578	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_B
	R2579	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_B
	R2581	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2587	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	K0_B
	R2588	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_B
	R2589	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_B

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R2590	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_B
	R2591	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_B
	R2592	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_B
	R2593	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_B
	R2594	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_B
	R2595	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1	K0_B
	R2596	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R2609	RK73HB1J203J	MG RESISTOR	20kΩ 1/16W J	1	K0_B
	R2610	RK73HB1J203J	MG RESISTOR	20kΩ 1/16W J	1	K0_B
	R2612	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	K0_B
	R2614	RK73HB1J304J	MG RESISTOR	300kΩ 1/16W J	1	K0_B
	R2616	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R2617	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R2618	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0_B
	R2620	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_B
	R2622	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_B
	R2624	RK73HB1J752J	MG RESISTOR	7.5kΩ 1/16W J	1	K0_B
	R2625	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	L1	L3D-0053-00	CHOKE COIL		1	K0_B
	L301	LK73G0BE1R0K	M.CHIP INDUCTOR		1	K0_B
	L302	LK73G0BE1R0K	M.CHIP INDUCTOR		1	K0_B
	L303	LK73G0BER33K	M.CHIP INDUCTOR		1	K0_B
	L304	LK73G0BER18K	M.CHIP INDUCTOR		1	K0_B
	L305	LK73G0BE68NK	M.CHIP INDUCTOR		1	K0_B
	L306	LK73G0BE1R5K	M.CHIP INDUCTOR		1	K0_B
	L601	LK73G0AQ1R0K	M.CHIP INDUCTOR		1	K0_B
	L2301	LB73G0FK-001	CHIP FERRITE		1	K0_B
	CN101	EB770AX-05E0A	B TO B CONNE		1	K0_B
	CN2303	EC710AM-0510A	FFC FPC CONNE		1	K0_B
△	F6	F53-0513-08	PATTERN FUSE	4A	1	K0_B
△	F7	F53-0513-08	PATTERN FUSE	4A	1	K0_B
△	F171	F53-0513-08	PATTERN FUSE	4A	1	K0_B
△	F191	F53-0513-08	PATTERN FUSE	4A	1	K0_B
△	F581	F53-0513-08	PATTERN FUSE	4A	1	K0_B
	J1	E5J-0022-00	R.RECEPTACLE		1	K0_B
	J151	E6D-0025-00	PIN JACK		1	K0_B
	J191	E1B-0041-00	3.5D PHONE JACK		1	K0_B
	J501	E5G-0029-00	CYL.RECEPTACLE		1	K0_B
	J581	E1B-0041-00	3.5D PHONE JACK		1	K0_B
	J2601	E1B-0041-00	3.5D PHONE JACK		1	K0_B
	VA52	SDV1005E18//2	VARISTOR		1	K0_B
	VA55	SDV1005E18//2	VARISTOR		1	K0_B
	VA60	SDV1005E18//2	VARISTOR		1	K0_B
	VA72	SDV1005E18//2	VARISTOR		1	K0_B
	VA74	SDV1005E18//2	VARISTOR		1	K0_B
	VA75	SDV1005E18//2	VARISTOR		1	K0_B
	VA171	SDV1005A14//0	VARISTOR		1	K0_B
	VA172	SDV1005A14//0	VARISTOR		1	K0_B
	VA173	SDV1005A14//0	VARISTOR		1	K0_B
	VA174	SDV1005A14//0	VARISTOR		1	K0_B
	VA175	SDV1005A14//0	VARISTOR		1	K0_B
	VA176	SDV1005A14//0	VARISTOR		1	K0_B
	VA177	SDV1005A14//0	VARISTOR		1	K0_B
	VA195	SDV1005A14//0	VARISTOR		1	K0_B
	VA196	SDV1005A14//0	VARISTOR		1	K0_B
	VA197	SDV1005A14//0	VARISTOR		1	K0_B
	VA301	F0K-0010-00	SURGE ABSORBER		1	K0_B
	VA302	F0K-0014-00	SURGE ABSORBER		1	K0_B
	VA501	SDV1005A14//0	VARISTOR		1	K0_B
	VA502	SDV1005A14//0	VARISTOR		1	K0_B
	VA503	SDV1005A14//0	VARISTOR		1	K0_B
	VA511	SDV1005E18//2	VARISTOR		1	K0_B
	VA512	SDV1005E18//2	VARISTOR		1	K0_B
	VA513	SDV1005E18//2	VARISTOR		1	K0_B
	VA581	SDV1005A14//0	VARISTOR		1	K0_B
	VA582	SDV1005A14//0	VARISTOR		1	K0_B
	VA583	SDV1005A14//0	VARISTOR		1	K0_B
	VA851	SDV1005E18//2	VARISTOR		1	K0_B
	W301	E3A-0039-10	ANTENNA CABLE		1	K0_B
	X301	L7J-0194-00	QUARTZ CRYSTAL		1	K0_B
	X2301	L7J-0099-00	QUARTZ CRYSTAL		1	K0_B
	X2501	L7J-0026-00	QUARTZ CRYSTAL		1	K0_B
VIDEO PWB ASSY (XJ8-092K-02) <XJ8>						
	IC1	PICA38603-NV	IR DETECT UNIT		1	
	IC100	MM3703F33HE	ANALOG IC		1	
	IC300	W3F-0572-00	MCU IC		1	
	IC301	IC-PST8428U	MOS IC		1	
	IC302	TC7SH32FUJC	MOS IC		1	
	IC303	TC7SH17FUJC	MOS IC		1	
	IC500	NJW4131R-B	ANALOG IC		1	
	IC600	-----	MOS IC	NO SERVICE PART	1	
	IC601	XC6223B331P-G	ANALOG IC		1	
	IC700	OZ537SILN-B21	ANALOG IC		1	
	Q30	LSCR523UBFS8	TRANSISTOR		1	
	Q31	LSCR523UBFS8	TRANSISTOR		1	
	Q32	LSCR523UBFS8	TRANSISTOR		1	
	Q50	LSCR523UBFS8	TRANSISTOR		1	
	Q51	LSCR523UBFS8	TRANSISTOR		1	
	Q52	LSCR523UBFS8	TRANSISTOR		1	
	Q300	KRC407E-P	DIGI TRANSISTOR		1	
	Q301	KRC407E-P	DIGI TRANSISTOR		1	
	D1	NSSM124F	LED		1	
	D2	NSSM124F	LED		1	

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D3	NSSM124F	LED		1	
	D4	NSSM124F	LED		1	
	D5	NSSM124F	LED		1	
	D6	NSSM124F	LED		1	
	D7	NSSM124F	LED		1	
	D300	RB531SM-30	DIODE		1	
	D500	RB160MM-30	SCHOTTKY DIODE		1	
	D701	RB056LAM-40	SCHOTTKY DIODE		1	
	D3001	EDZCVFH6.8B	ZENER DIODE		1	
	D3002	EDZCVFH6.8B	ZENER DIODE		1	
	D4000	TPD4E05U06DQA	DIODE		1	
	D4001	TPD4E05U06DQA	DIODE		1	
	D4002	TPD4E05U06DQA	DIODE		1	
	C1	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C2	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C100	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C101	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C102	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C103	CK73HXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C104	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C105	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C200	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	
	C201	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C202	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C203	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C204	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C205	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C300	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C301	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C302	CK73HXR1H472K	C CAPACITOR	4700pF 50V K	1	
	C303	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C305	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C306	CK73HXR1A474K	C CAPACITOR	0.47uF 10V K	1	
	C307	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C308	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C309	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C310	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C317	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C318	CK73FXR0J476M	C CAPACITOR	47uF 6.3V M	1	
	C319	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C320	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C400	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C401	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C402	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	
	C403	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	
	C411	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C412	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C413	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C414	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C415	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C416	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C501	CK73HXR1H103K	C CAPACITOR	0.01uF 50V K	1	
	C502	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C504	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C505	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C506	CC73HCH1H560J	C CAPACITOR	56pF 50V J	1	
	C507	CK73FXR1H475K	C CAPACITOR	4.7uF 50V K	1	
	C508	CK73FXR1H475K	C CAPACITOR	4.7uF 50V K	1	
	C509	CK73FXR1H475K	C CAPACITOR	4.7uF 50V K	1	
	C510	CK73FXR1H475K	C CAPACITOR	4.7uF 50V K	1	
	C511	CK73FXR1H475K	C CAPACITOR	4.7uF 50V K	1	
	C512	CK73FXR1H475K	C CAPACITOR	4.7uF 50V K	1	
	C513	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C514	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C515	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C516	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C517	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C518	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	
	C600	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C601	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C602	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C603	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C604	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C605	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C606	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C610	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C611	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	
	C612	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C613	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C614	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C615	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	
	C616	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C617	CK73JXR1C103K	C CAPACITOR	0.01uF 16V K	1	
	C618	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	
	C619	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C620	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C621	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	
	C622	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	
	C623	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C624	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	
	C631	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	
	C632	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	

MODEL			MARK	MODEL	MARK
KW-Z1000W			K0_A	KW-Z1000W	K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY Local
	C633	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C634	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C635	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C636	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C637	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C638	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C639	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C640	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C641	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C642	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C643	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C644	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C645	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C646	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C647	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C648	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C649	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C650	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C651	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C652	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1
	C700	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1
	C701	CK73GXR1H105K	C CAPACITOR	1uF 50V K	1
	C702	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1
	C703	CK73GXR1H105K	C CAPACITOR	1uF 50V K	1
	C704	CK73HXR1C224K	C CAPACITOR	0.22uF 16V K	1
	C705	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1
	C707	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1
	C708	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1
	C709	CS77DBY1E101M	TA E CAPACITOR	100uF 25V M	1
	C711	CE32EL1V220M	E CAPACITOR	22uF 35V M	1
	C712	CE32EL1V220M	E CAPACITOR	22uF 35V M	1
	C713	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1
	C714	CB73LAE1V106M	FILM CAPACITOR	10uF 35V M	1
	C904	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1
	C905	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1
	C3003	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1
	C3004	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1
	C3005	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1
	C3006	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1
	C3007	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1
	C3008	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1
	C4000	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1
	C4001	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1
	C4002	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1
	C4003	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1
	C4004	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1
	C4005	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1
	C4006	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1
	C4007	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1
	R1	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1
	R10	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1
	R13	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1
	R14	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1
	R15	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1
	R19	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1
	R33	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	1
	R34	RK73FB2B100J	MG RESISTOR	10Ω 1/8W J	1
	R35	RK73FB2B100J	MG RESISTOR	10Ω 1/8W J	1
	R36	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1
	R37	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1
	R38	RK73HH1J301D	MG RESISTOR	300Ω 1/16W D	1
	R39	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1
	R40	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1
	R41	RK73HH1J301D	MG RESISTOR	300Ω 1/16W D	1
	R42	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1
	R43	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1
	R44	RK73HH1J301D	MG RESISTOR	300Ω 1/16W D	1
	R50	RK73EB2E681J	MG RESISTOR	680Ω 1/4W J	1
	R51	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1
	R52	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1
	R53	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1
	R54	RK73HH1J301D	MG RESISTOR	300Ω 1/16W D	1
	R55	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1
	R56	RK73HH1J301D	MG RESISTOR	300Ω 1/16W D	1
	R57	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1
	R58	RK73HH1J301D	MG RESISTOR	300Ω 1/16W D	1
	R107	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1
	R108	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1
	R109	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1
	R200	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
	R203	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
	R204	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1
	R206	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
	R207	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
	R209	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
	R211	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
	R213	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
	R214	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
	R215	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1
	R216	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1
	R217	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1
	R230	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R301	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R302	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R303	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R304	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R310	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R311	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R312	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R313	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R314	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R315	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R316	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R318	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R319	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R320	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R322	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R324	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R325	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R327	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R328	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R329	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R330	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R331	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R332	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R333	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R334	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R335	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R336	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R337	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R338	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R341	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R343	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R347	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R348	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R349	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R350	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R351	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R352	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R353	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R354	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R355	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R356	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R358	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R402	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	
	R403	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R410	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R411	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R412	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R413	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R414	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R416	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R500	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R501	RK73HH1J473D	MG RESISTOR	47kΩ 1/16W D	1	
	R502	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	
	R503	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R504	RK73HH1J681D	MG RESISTOR	680Ω 1/16W D	1	
	R506	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	
	R507	RK73HH1J224D	MG RESISTOR	220kΩ 1/16W D	1	
	R600	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R601	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R602	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R603	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R604	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R605	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R606	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R607	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R608	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R609	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R610	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R611	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R612	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R613	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R614	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R615	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R616	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R617	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R618	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R619	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R620	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R621	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R622	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R623	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R624	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R625	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R626	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R627	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R628	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R629	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R630	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R631	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R632	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R633	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R634	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R635	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R636	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R637	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R638	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R642	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R643	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R644	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R645	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R646	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R648	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R649	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R650	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R652	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R656	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R657	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R658	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	
	R662	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R665	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	
	R666	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R667	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R700	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R701	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R703	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R704	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R706	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R707	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R708	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	
	R711	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R712	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	
	R715	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	
	R716	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	
	R717	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R719	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	
	R4004	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R4005	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	R4006	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	R4007	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	R4008	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	R4009	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	R4010	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	R4011	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	R4012	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	R4013	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	R4014	RK73HH1J220D	MG RESISTOR	22Ω 1/16W D	1	
	L200	LB73E0FU-004	CHIP FERRITE		1	
	L300	LR73Z0AD100K	CHIP INDUCTOR		1	
	L400	LB73G0EA-002	CHIP FERRITE		1	
	L500	LR79Z0BH470M	CHIP INDUCTOR		1	
	L600	LR73Z0AD100K	CHIP INDUCTOR		1	
	L601	LR73Z0AD100K	CHIP INDUCTOR		1	
	L602	LR73Z0AD100K	CHIP INDUCTOR		1	
	L610	LB73G0DY-003	CHIP FERRITE		1	
	L611	LB73G0DY-003	CHIP FERRITE		1	
	L612	LB73G0DY-003	CHIP FERRITE		1	
	L613	LB73G0DY-003	CHIP FERRITE		1	
	L614	LB73G0DY-003	CHIP FERRITE		1	
	L615	LB73G0DY-003	CHIP FERRITE		1	
	L616	LB73G0DY-003	CHIP FERRITE		1	
	L617	LB73G0DY-003	CHIP FERRITE		1	
	L618	LB73G0DY-003	CHIP FERRITE		1	
	L619	LB73G0DY-003	CHIP FERRITE		1	
	L620	LB73G0DY-003	CHIP FERRITE		1	
	L621	LB73G0DY-003	CHIP FERRITE		1	
	L622	LB73G0DY-003	CHIP FERRITE		1	
	L623	LB73G0DY-003	CHIP FERRITE		1	
	L624	LB73G0DY-003	CHIP FERRITE		1	
	L625	LB73G0DY-003	CHIP FERRITE		1	
	L626	LB73G0DY-003	CHIP FERRITE		1	
	L627	LB73G0DY-003	CHIP FERRITE		1	
	L628	LB73G0DY-003	CHIP FERRITE		1	
	L629	LB73G0DY-003	CHIP FERRITE		1	
	L630	LB73G0DY-003	CHIP FERRITE		1	
	L631	LB73G0DY-003	CHIP FERRITE		1	
	L700	LR79Z0MZ100M	CHIP INDUCTOR		1	
	L701	LR79Z0MZ100M	CHIP INDUCTOR		1	
	CN1	EC720AA-0518A	FFC FPC CONNE		1	
	CN100	EC720BK-0564B	FFC FPC CONNE		1	
	CN200	EC720BK-0540B	FFC FPC CONNE		1	
	CN302	EC720AT-0510A	FFC FPC CONNE		1	
	CN400	EC720AA-0518A	FFC FPC CONNE		1	
	CN600	EC720CF-0570A	FFC FPC CONNE		1	
	CN601	EC720AA-0508A	FFC FPC CONNE		1	
	CN3001	EB770BT-0560C	B TO B CONNE		1	
	CN3002	EC720BK-0564B	FFC FPC CONNE		1	
	CN4000	EB740BT-0560A	B TO B CONNE		1	
	CN4001	EC720BK-0564B	FFC FPC CONNE		1	
	S1	S7A-0001-00	TACTILE PUSH SW		1	
	S2	S7A-0001-00	TACTILE PUSH SW		1	
	S3	S7A-0001-00	TACTILE PUSH SW		1	
	S4	S7A-0001-00	TACTILE PUSH SW		1	
	S5	S7A-0001-00	TACTILE PUSH SW		1	
	S3001	S6D-0001-00	LEVER SWITCH		1	
	VA100	SDV1005E18//0	VARISTOR		1	

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	VA101	SDV1005E18//0	VARISTOR		1	
	VA102	SDV1005E18//0	VARISTOR		1	
	VA103	SDV1005E18//0	VARISTOR		1	
	VA104	SDV1005E18//0	VARISTOR		1	
	VA107	SDV1005E18//0	VARISTOR		1	
	VA108	SDV1005E18//0	VARISTOR		1	
	VA109	SDV1005E18//0	VARISTOR		1	
	VA110	SDV1005E18//0	VARISTOR		1	
	VA111	SDV1005E18//0	VARISTOR		1	
	VA112	SDV1005E18//0	VARISTOR		1	
	VA113	SDV1005E18//0	VARISTOR		1	
	VA114	SDV1005E18//0	VARISTOR		1	
	VA115	SDV1005H26//0	VARISTOR		1	
	VA116	SDV1005H26//0	VARISTOR		1	
	VA117	SDV1005E18//0	VARISTOR		1	
	VA118	SDV1005E18//0	VARISTOR		1	
	VA400	SDV1005E18//0	VARISTOR		1	
	VA403	SDV1005E18//0	VARISTOR		1	
	VA404	SDV1005E18//0	VARISTOR		1	
	VA405	SDV1005E18//0	VARISTOR		1	
	VA406	SDV1005E18//0	VARISTOR		1	
	VA4000	SDV1005H26//0	VARISTOR		1	
	VA4001	SDV1005H26//0	VARISTOR		1	
	VA4002	SDV1005H26//0	VARISTOR		1	
	VA4003	SDV1005H26//0	VARISTOR		1	
	VA4004	SDV1005H26//0	VARISTOR		1	
	VA4005	SDV1005H26//0	VARISTOR		1	
	VA4006	SDV1005H26//0	VARISTOR		1	
	VA4007	SDV1005H26//0	VARISTOR		1	
	VA4008	SDV1005H26//0	VARISTOR		1	
	VA4009	SDV1005H26//0	VARISTOR		1	
	VA4010	SDV1005H26//0	VARISTOR		1	
	VA4011	SDV1005H26//0	VARISTOR		1	
	VA4012	SDV1005H26//0	VARISTOR		1	
	VA4013	SDV1005H26//0	VARISTOR		1	
	VA4014	SDV1005H26//0	VARISTOR		1	
	VA4015	SDV1005H26//0	VARISTOR		1	
	VA4016	SDV1005H26//0	VARISTOR		1	
	VA4017	SDV1005H26//0	VARISTOR		1	
	VA4018	SDV1005H26//0	VARISTOR		1	
	VA4019	SDV1005H26//0	VARISTOR		1	
	VA4020	SDV1005H26//0	VARISTOR		1	
	VA4021	SDV1005H26//0	VARISTOR		1	
	VA4022	SDV1005H26//0	VARISTOR		1	
DIGITAL IO PWB ASSY (XJA-080K-03) <XJA>						
	IC21	ML86251LAZ07F	MOS IC	BGA	1	K0_A
	IC22	TC7SH08FUJC	MOS IC		1	K0_A
	IC81	NJU7108F3	MOS IC		1	K0_A
	IC111	XC6209B502P-G	MOS IC		1	K0_A
	IC112	NJW1341VC3	MOS IC		1	K0_A
	IC151	AK8818VQ	MOS IC		1	K0_A
	IC231	TPS2543RTE	MOS IC		1	K0_A
	IC251	MM3411A18NE	ANALOG IC		1	K0_A
	IC252	RP108J081B-AE	MOS IC		1	K0_A
	IC401	IT68013FN/BX	MOS IC		1	K0_A
	IC402	XC6223B121P-G	ANALOG IC		1	K0_A
	IC451	TS3DV642A0RUA	MOS IC		1	K0_A
	IC701	TC7SET08FUJC	MOS IC		1	K0_A
	IC781	TC7SZ125FUJC	MOS IC		1	K0_A
	IC782	TC7SZ125FUJC	MOS IC		1	K0_A
	IC831	AK4387ET7	ANALOG IC		1	K0_A
	IC853	NJG1143UA2	MOS IC		1	K0_A
	IC854	UBX-M8030-KT	MOS IC		1	K0_A
	IC855	NJM2903CRB1	MOS IC		1	K0_A
	IC856	NJM2903CRB1	MOS IC		1	K0_A
	IC857	MM3608A33NH	ANALOG IC		1	K0_A
	IC858	MM3411A33NE	ANALOG IC		1	K0_A
	IC901	NJM8080RB1	ANALOG IC		1	K0_A
	IC902	NJM8080RB1	ANALOG IC		1	K0_A
	IC1001	TCC8034-0AX-I	MPU IC		1	K0_A
	IC1060	TC7WZ34FUJC	MOS IC		1	K0_A
	IC1151	TC7SH08FUJC	MOS IC		1	K0_A
	IC1152	RA8900CEUB	ANALOG IC		1	K0_A
	IC1153	TC7WZ34FUJC	MOS IC		1	K0_A
	IC1154	TC7WZ34FUJC	MOS IC		1	K0_A
	IC1601	K4F6E3S4HMGHC	DRAM IC		1	K0_A
	IC1701	WZZ-0092-00	PROGRAMMED IC		1	K0_A
	IC1751	-----	ROM IC	NO SERVICE PART	1	K0_A
	IC1801	MFI343S00177	MCU IC		1	K0_A
	IC2001	LM53635MQRNLQ	ANALOG IC		1	K0_A
	IC2101	DA9063-35HO-A	MCU IC		1	K0_A
	IC2151	XC1219B183F-G	ANALOG IC		1	K0_A
	IC2301	MP9843GL	MOS IC		1	K0_A
	IC2401	MP9843GL	MOS IC		1	K0_A
	IC2501	MP9843GL	MOS IC		1	K0_A
	IC2502	INA199B3DCK	ANALOG IC		1	K0_A
	IC2702	XC6223B151P-G	ANALOG IC		1	K0_A
	IC2703	TPS1H100AQWPQ	ANALOG IC		1	K0_A
	Q1	KRC407E-P	DIGI TRANSISTOR		1	K0_A
	Q21	KTC4075EP/Y/	TRANSISTOR		1	K0_A
	Q81	KTA2014EP/Y/	TRANSISTOR		1	K0_A
	Q111	RE1L002SN	FET		1	K0_A

MODEL		MARK	MODEL		MARK
KW-Z1000W		K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY Local
	Q112	RE1L002SN	FET		1 K0_A
	Q113	KRA307E-P	TRANSISTOR		1 K0_A
	Q114	KRC407E-P	DIGI TRANSISTOR		1 K0_A
	Q401	RE1L002SN	FET		1 K0_A
	Q741	KRC407E-P	DIGI TRANSISTOR		1 K0_A
	Q742	RE1C002ZP	FET		1 K0_A
	Q743	RE1C002ZP	FET		1 K0_A
	Q801	SSM3J372RF	FET		1 K0_A
	Q1151	RE1L002SN	FET		1 K0_A
	Q1153	KRC407E-P	DIGI TRANSISTOR		1 K0_A
	Q1202	KRA307E-P	TRANSISTOR		1 K0_A
	Q1203	LTC043ZEBFS8	DIGI TRANSISTOR		1 K0_A
	Q1801	KRC407E-P	DIGI TRANSISTOR		1 K0_A
	Q1802	KRC407E-P	DIGI TRANSISTOR		1 K0_A
	Q1803	KRC407E-P	DIGI TRANSISTOR		1 K0_A
	Q1804	KTA2014EP/Y/	TRANSISTOR		1 K0_A
	Q1805	KTC4075EP/Y/	TRANSISTOR		1 K0_A
	Q2101	KRC407E-P	DIGI TRANSISTOR		1 K0_A
	Q2102	RE1L002SN	FET		1 K0_A
	Q2103	RE1L002SN	FET		1 K0_A
	Q2501	LSCR523EBFS8	TRANSISTOR		1 K0_A
	Q2502	LSAR523EBFS8	TRANSISTOR		1 K0_A
	Q2503	KRC407E-P	DIGI TRANSISTOR		1 K0_A
	Q2504	KRC407E-P	DIGI TRANSISTOR		1 K0_A
	D401	1SS355-HF	DIODE		1 K0_A
	D741	DAN202UM	DIODE		1 K0_A
	D781	1SS355-HF	DIODE		1 K0_A
	D782	BZT52B5V6LSHF	ZENER DIODE		1 K0_A
	D783	BZT52B5V6LSHF	ZENER DIODE		1 K0_A
	D803	1SS355-HF	DIODE		1 K0_A
	D804	1SS355-HF	DIODE		1 K0_A
	D2001	1SS355-HF	DIODE		1 K0_A
	D2002	1SS355-HF	DIODE		1 K0_A
	D2003	RB085BM-40	SCHOTTKY DIODE		1 K0_A
	C1	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1 K0_A
	C5	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C6	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C21	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1 K0_A
	C22	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1 K0_A
	C23	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_A
	C24	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C25	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_A
	C26	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C27	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1 K0_A
	C28	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_A
	C29	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C31	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_A
	C32	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_A
	C33	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_A
	C34	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_A
	C35	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C36	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C37	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C38	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C39	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C40	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C41	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C42	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C43	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C44	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_A
	C45	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C46	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_A
	C47	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C48	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C49	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C50	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_A
	C51	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C52	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_A
	C53	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C55	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C57	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C58	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C59	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_A
	C61	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_A
	C62	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_A
	C63	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_A
	C64	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_A
	C66	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_A
	C67	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_A
	C68	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C69	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_A
	C70	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_A
	C71	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_A
	C72	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_A
	C74	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_A
	C75	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1 K0_A
	C76	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_A
	C77	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_A
	C81	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_A
	C82	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_A
	C83	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1 K0_A
	C91	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_A
	C111	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1 K0_A

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C112	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_A
	C113	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C116	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_A
	C117	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_A
	C119	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C122	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C123	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C124	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C125	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C126	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C127	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C128	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C129	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C131	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C132	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C134	CE32BJ1C470M	E CAPACITOR	47uF 16V M	1	K0_A
	C136	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C137	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C151	CK73EXR1C226K	C CAPACITOR	22uF 16V K	1	K0_A
	C152	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C153	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C154	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C155	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C156	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C158	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C159	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C160	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C231	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C232	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_A
	C251	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C252	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	K0_A
	C253	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C254	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K0_A
	C255	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C257	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C258	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K0_A
	C259	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C260	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C261	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C262	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C263	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C264	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C265	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C266	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C267	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C268	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C269	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C270	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C271	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K0_A
	C272	CC73HCH1H040C	C CAPACITOR	4pF 50V C	1	K0_A
	C273	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	K0_A
	C274	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K0_A
	C276	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K0_A
	C277	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C278	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C279	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C280	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	K0_A
	C281	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C282	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	K0_A
	C401	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C402	CC73JCH1H070C	C CAPACITOR	7pF 50V C	1	K0_A
	C403	CC73JCH1H070C	C CAPACITOR	7pF 50V C	1	K0_A
	C404	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_A
	C405	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_A
	C406	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_A
	C407	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_A
	C408	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C409	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C410	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C411	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C412	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C414	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C415	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C416	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_A
	C417	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C418	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_A
	C419	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C420	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C421	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C422	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C423	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C424	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_A
	C425	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C426	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C427	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_A
	C428	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C431	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C433	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	K0_A
	C434	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C435	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C436	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C437	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C438	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_A
	C451	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C452	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C701	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A
	C702	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C703	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_A
	C704	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_A
	C743	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C781	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C782	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C783	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C831	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C832	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_A
	C833	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C834	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_A
	C835	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C836	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C837	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C838	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C860	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	K0_A
	C861	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C862	CC73JCH1H020C	C CAPACITOR	2pF 50V C	1	K0_A
	C863	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_A
	C864	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_A
	C865	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_A
	C866	CC730CC1H1R8B	C CAPACITOR	1.8pF 50V B	1	K0_A
	C867	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_A
	C868	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_A
	C869	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_A
	C870	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K0_A
	C871	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_A
	C872	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_A
	C873	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_A
	C874	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_A
	C875	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_A
	C878	CC73JCH1H060C	C CAPACITOR	6pF 50V C	1	K0_A
	C879	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C880	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_A
	C881	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C882	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C883	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C884	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C886	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K0_A
	C901	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A
	C902	CC73JCH1H181J	C CAPACITOR	180pF 50V J	1	K0_A
	C903	CC73JCH1H181J	C CAPACITOR	180pF 50V J	1	K0_A
	C904	CC73JCH1H181J	C CAPACITOR	180pF 50V J	1	K0_A
	C905	CC73JCH1H181J	C CAPACITOR	180pF 50V J	1	K0_A
	C906	CC73JCH1E331J	C CAPACITOR	330pF 25V J	1	K0_A
	C907	CC73JCH1E331J	C CAPACITOR	330pF 25V J	1	K0_A
	C908	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C909	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C910	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C911	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C912	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C913	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C914	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_A
	C915	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C916	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_A
	C1001	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	K0_A
	C1060	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1151	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1152	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1153	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1154	CC73JCH1H080C	C CAPACITOR	8pF 50V C	1	K0_A
	C1155	CC73JCH1H080C	C CAPACITOR	8pF 50V C	1	K0_A
	C1157	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1158	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1159	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1303	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_A
	C1401	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C1402	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C1403	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C1404	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C1405	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1406	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C1407	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1408	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1409	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C1410	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1411	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1412	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1413	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1414	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1415	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1416	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1417	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1418	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1419	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1420	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1421	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1422	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A

MODEL			MARK	MODEL	MARK	
KW-Z1000W			K0_A	KW-Z1000W	K0_B	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1516	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1517	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1518	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1519	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1520	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1521	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1522	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1523	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1524	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1525	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1526	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1527	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1528	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1529	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1530	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1531	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1532	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1533	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1534	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1535	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1536	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1537	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1538	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1601	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C1602	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C1603	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C1604	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1605	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1606	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1607	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1608	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1609	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1610	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1611	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1612	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1613	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1614	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1615	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1616	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1617	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1618	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1619	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1620	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1621	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1622	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1623	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1624	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1625	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1626	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1627	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1628	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1629	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1630	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1631	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1632	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1633	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1634	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1635	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1636	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1637	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1638	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1639	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1640	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1641	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1642	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1643	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1644	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1645	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1646	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1647	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1648	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1649	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1650	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1651	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1652	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1653	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1654	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1655	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1656	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1657	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1658	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C1701	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1702	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1703	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1704	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1705	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1706	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1707	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C1751	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C1801	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2001	CD040CP1C222M	E CAPACITOR	2200uF 16V M	1	K0_A
	C2002	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K0_A

MODEL			MARK	MODEL	MARK	
KW-Z1000W			K0_A	KW-Z1000W	K0_B	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C2003	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2004	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C2005	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2006	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2007	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2008	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2009	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C2010	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C2011	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C2103	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C2104	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C2105	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C2106	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C2107	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C2108	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2109	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2110	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C2111	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2112	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	K0_A
	C2113	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C2114	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	K0_A
	C2115	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_A
	C2116	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2120	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C2121	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C2122	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C2123	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C2124	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C2125	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C2126	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C2127	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C2128	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C2129	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C2130	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2131	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_A
	C2132	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2133	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2134	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C2135	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C2136	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C2137	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C2138	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_A
	C2139	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_A
	C2151	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_A
	C2152	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_A
	C2218	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C2219	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C2220	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C2301	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2302	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2304	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C2305	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C2306	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_A
	C2308	CC73JCH1H680J	C CAPACITOR	68pF 50V J	1	K0_A
	C2309	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2310	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2311	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2312	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A
	C2313	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A
	C2314	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A
	C2401	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2402	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2404	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C2405	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C2406	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_A
	C2407	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2408	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_A
	C2409	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2410	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2411	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2412	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A
	C2413	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A
	C2418	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C2419	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C2420	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_A
	C2501	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2502	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	C2503	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C2504	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C2506	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_A
	C2507	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2508	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K0_A
	C2509	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2510	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2511	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_A
	C2512	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A
	C2513	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_A
	C2514	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2515	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_A
	C2516	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_A
	C2704	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K0_A
	C2705	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K0_A

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C2707	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C2708	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_A
	C2709	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_A
	R4	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	K0_A
	R5	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	K0_A
	R6	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R7	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R8	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	K0_A
	R9	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	K0_A
	R10	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R11	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R12	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R13	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R14	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R15	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R16	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R17	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R19	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R21	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R22	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R23	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R24	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R25	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R26	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R27	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R28	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R29	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R30	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_A
	R31	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_A
	R32	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R33	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R34	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R35	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R36	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_A
	R37	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R39	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_A
	R40	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_A
	R41	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_A
	R42	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R43	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R44	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	K0_A
	R49	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R57	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R63	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R70	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R71	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R72	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R73	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R81	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R82	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R83	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	1	K0_A
	R84	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	1	K0_A
	R85	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	1	K0_A
	R86	RK73HH1J823D	MG RESISTOR	82kΩ 1/16W D	1	K0_A
	R87	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	1	K0_A
	R88	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R113	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R114	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R115	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R116	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R120	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R122	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	K0_A
	R123	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R124	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	K0_A
	R125	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R126	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R129	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R151	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K0_A
	R155	RK73HH1J391D	MG RESISTOR	390Ω 1/16W D	1	K0_A
	R157	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A
	R158	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R159	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R160	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R161	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R231	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R232	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R234	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R235	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R237	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R252	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R254	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R255	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R256	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R257	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R258	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R259	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R260	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R261	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R262	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R263	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A
	R266	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R267	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R268	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A

MODEL			MARK	MODEL			MARK
KW-Z1000W			K0_A	KW-Z1000W			K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R270	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A	
	R271	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A	
	R273	RK73HH1J330D	MG RESISTOR	33Ω 1/16W D	1	K0_A	
	R274	RK73HH1J331D	MG RESISTOR	330Ω 1/16W D	1	K0_A	
	R275	RK73HH1J820D	MG RESISTOR	82Ω 1/16W D	1	K0_A	
	R276	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R277	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R278	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	K0_A	
	R280	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	K0_A	
	R281	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	K0_A	
	R282	RK73HH1J562D	MG RESISTOR	5.6kΩ 1/16W D	1	K0_A	
	R283	RK73HH1J162D	MG RESISTOR	1.6kΩ 1/16W D	1	K0_A	
	R378	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A	
	R379	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A	
	R384	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A	
	R385	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A	
	R401	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R403	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A	
	R404	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A	
	R405	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A	
	R406	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A	
	R407	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_A	
	R408	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A	
	R409	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A	
	R411	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A	
	R412	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A	
	R413	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K0_A	
	R414	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A	
	R415	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	K0_A	
	R416	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A	
	R417	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R418	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R419	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R420	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R421	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A	
	R422	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R423	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J	1	K0_A	
	R425	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A	
	R426	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_A	
	R427	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A	
	R428	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	K0_A	
	R429	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	K0_A	
	R430	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	K0_A	
	R431	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	K0_A	
	R432	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	K0_A	
	R433	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	K0_A	
	R434	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	K0_A	
	R435	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1	K0_A	
	R451	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R452	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R453	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A	
	R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R602	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R703	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R704	RK73HB1J750J	MG RESISTOR	75Ω 1/16W J	1	K0_A	
	R741	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1	K0_A	
	R742	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1	K0_A	
	R743	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	K0_A	
	R744	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1	K0_A	
	R745	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A	
	R746	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K0_A	
	R747	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K0_A	
	R748	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A	
	R749	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K0_A	
	R750	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	K0_A	
	R751	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	K0_A	
	R752	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1	K0_A	
	R753	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A	
	R754	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A	
	R781	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A	
	R782	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R783	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A	
	R784	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A	
	R786	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_A	
	R831	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R832	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R833	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R834	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R836	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A	
	R837	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A	
	R838	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A	
	R839	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0_A	
	R840	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_A	
	R841	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A	
	R842	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A	
	R843	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A	
	R844	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A	
	R853	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A	
	R854	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_A	
	R855	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A	
	R856	RK73HB1J750J	MG RESISTOR	75Ω 1/16W J	1	K0_A	
	R857	RK73PB2H300J	MG RESISTOR	30Ω 1/2W J	1	K0_A	

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R858	RK73PB2H300J	MG RESISTOR	30Ω 1/2W J	1	K0_A
	R859	RK73PB2H300J	MG RESISTOR	30Ω 1/2W J	1	K0_A
	R860	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R861	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	K0_A
	R862	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R863	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R864	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R865	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0_A
	R866	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R867	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R868	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R869	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R901	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R902	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R904	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K0_A
	R905	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K0_A
	R906	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K0_A
	R907	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K0_A
	R908	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K0_A
	R909	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K0_A
	R910	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K0_A
	R911	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K0_A
	R912	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_A
	R913	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_A
	R914	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_A
	R915	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_A
	R916	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R917	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	K0_A
	R918	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R919	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R920	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R922	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R923	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K0_A
	R1001	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1002	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1003	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1004	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1005	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1006	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1007	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1008	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1009	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1011	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1020	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_A
	R1021	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1022	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1023	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1024	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1025	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1026	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1027	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1028	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1029	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1030	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1031	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1032	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1033	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K0_A
	R1034	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K0_A
	R1055	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1056	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1057	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1058	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1059	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K0_A
	R1060	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K0_A
	R1061	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1063	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1064	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1065	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1066	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1071	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1072	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1074	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1076	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1077	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1078	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1088	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1089	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1090	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1091	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1092	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1093	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1094	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1095	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1096	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1097	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1098	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1099	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1100	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1101	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1112	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1114	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1121	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R1122	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1151	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R1152	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R1153	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R1154	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0_A
	R1159	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1160	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1161	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1163	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1164	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1165	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R1166	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1167	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1168	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1169	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1170	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1171	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1172	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1173	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1174	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1175	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1176	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1177	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1178	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1179	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1180	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1181	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1182	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1183	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1184	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1185	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1186	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1187	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	K0_A
	R1188	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1191	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1192	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1193	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1194	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K0_A
	R1195	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1196	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1197	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1198	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1203	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1204	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1205	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	K0_A
	R1206	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	K0_A
	R1208	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_A
	R1209	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_A
	R1218	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1219	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1220	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1221	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1225	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1227	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1231	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1232	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1233	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1234	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1251	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1252	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1253	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1264	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	K0_A
	R1265	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	K0_A
	R1266	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A
	R1267	RK73HH1J822D	MG RESISTOR	8.2kΩ 1/16W D	1	K0_A
	R1268	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1272	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1273	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1274	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1276	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1279	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1281	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1283	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1285	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1287	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1289	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1300	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1309	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1310	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_A
	R1311	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1312	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1313	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1314	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1315	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1316	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1317	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1318	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1319	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1320	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1321	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1322	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1323	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1324	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1325	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1326	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1327	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1603	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	K0_A
	R1604	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	K0_A
	R1605	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1607	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1609	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1611	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1614	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1	K0_A
	R1615	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1701	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1702	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R1703	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R1704	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R1705	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R1706	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R1707	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R1708	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R1709	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	K0_A
	R1710	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1711	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1714	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1715	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1716	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A
	R1717	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1718	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1719	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1720	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1721	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1722	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1723	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1724	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1725	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1751	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1752	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1753	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1754	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1755	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1756	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1757	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1758	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_A
	R1759	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1762	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1763	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1801	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1803	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1804	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1805	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1806	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1807	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K0_A
	R1809	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R1810	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1811	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1812	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1851	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1852	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1853	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1854	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1855	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1856	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A
	R1857	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1858	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1859	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1860	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1861	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1862	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1863	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_A
	R1864	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1865	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1866	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1867	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1869	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A
	R1871	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1872	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1874	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1875	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1876	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R1877	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R1878	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_A
	R2001	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_A
	R2002	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_A
	R2004	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1	K0_A
	R2005	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A
	R2006	RK73HB1J3R3J	MG RESISTOR	3.3Ω 1/16W J	1	K0_A
	R2007	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2102	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_A
	R2103	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2104	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A
	R2106	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_A
	R2109	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A
	R2111	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A

MODEL		MARK		MODEL		MARK	
KW-Z1000W		K0_A		KW-Z1000W		K0_B	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R2119	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R2120	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K0_A	
	R2121	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R2122	RZ73F0BS150J	RESISTOR	15Ω J	1	K0_A	
	R2123	RZ73F0BS330J	RESISTOR	33Ω J	1	K0_A	
	R2124	RZ73F0BS150J	RESISTOR	15Ω J	1	K0_A	
	R2125	RZ73F0BS330J	RESISTOR	33Ω J	1	K0_A	
	R2127	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A	
	R2129	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A	
	R2130	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_A	
	R2151	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A	
	R2152	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R2153	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R2218	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	K0_A	
	R2301	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R2302	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A	
	R2303	RK73HH1J471D	MG RESISTOR	470Ω 1/16W D	1	K0_A	
	R2304	RK73HH1J363D	MG RESISTOR	36kΩ 1/16W D	1	K0_A	
	R2306	RK73HH1J182D	MG RESISTOR	1.8kΩ 1/16W D	1	K0_A	
	R2307	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_A	
	R2308	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A	
	R2309	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A	
	R2310	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	K0_A	
	R2313	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K0_A	
	R2314	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K0_A	
	R2315	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K0_A	
	R2401	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R2402	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A	
	R2403	RK73HH1J471D	MG RESISTOR	470Ω 1/16W D	1	K0_A	
	R2404	RK73HH1J363D	MG RESISTOR	36kΩ 1/16W D	1	K0_A	
	R2406	RK73HH1J182D	MG RESISTOR	1.8kΩ 1/16W D	1	K0_A	
	R2407	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_A	
	R2408	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A	
	R2409	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A	
	R2410	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	K0_A	
	R2413	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A	
	R2418	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	K0_A	
	R2501	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_A	
	R2502	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_A	
	R2503	RK73HH1J471D	MG RESISTOR	470Ω 1/16W D	1	K0_A	
	R2504	RK73HH1J363D	MG RESISTOR	36kΩ 1/16W D	1	K0_A	
	R2506	RK73HH1J511D	MG RESISTOR	510Ω 1/16W D	1	K0_A	
	R2507	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	1	K0_A	
	R2508	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_A	
	R2509	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	K0_A	
	R2512	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A	
	R2513	RK73EB2E151J	MG RESISTOR	150Ω 1/4W J	1	K0_A	
	R2514	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A	
	R2515	RZ73F0CH30LJ	RESISTOR	0.03Ω 1/3W J	1	K0_A	
	R2516	RZ73F0CH30LJ	RESISTOR	0.03Ω 1/3W J	1	K0_A	
	R2517	RZ73F0CH30LJ	RESISTOR	0.03Ω 1/3W J	1	K0_A	
	R2518	RZ73F0CH30LJ	RESISTOR	0.03Ω 1/3W J	1	K0_A	
	R2519	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_A	
	R2520	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_A	
	R2521	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	K0_A	
	R2522	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_A	
	R2523	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0_A	
	R2524	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0_A	
	R2525	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_A	
	R2705	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_A	
	R2712	RK73HH1J911D	MG RESISTOR	910Ω 1/16W D	1	K0_A	
	RA853	RK74GB1J301J	MG RESISTOR	300Ω 1/16W J	1	K0_A	
	RA854	RK74GB1J301J	MG RESISTOR	300Ω 1/16W J	1	K0_A	
	RA855	RK74GB1J301J	MG RESISTOR	300Ω 1/16W J	1	K0_A	
	RA856	RK74GB1J301J	MG RESISTOR	300Ω 1/16W J	1	K0_A	
	L2	L3D-0039-00	CHOKE COIL		1	K0_A	
	L3	L3D-0039-00	CHOKE COIL		1	K0_A	
	L4	L3D-0039-00	CHOKE COIL		1	K0_A	
	L5	L3D-0039-00	CHOKE COIL		1	K0_A	
	L6	L3D-0039-00	CHOKE COIL		1	K0_A	
	L21	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L22	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L23	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L24	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L25	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L111	LR73Z0AC100K	CHIP INDUCTOR		1	K0_A	
	L251	LK73H0AM2N2S	M.CHIP INDUCTOR		1	K0_A	
	L252	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L253	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L254	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L255	LK73H0AM2N2S	M.CHIP INDUCTOR		1	K0_A	
	L256	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L401	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L402	LB73G0ED-004	CHIP FERRITE		1	K0_A	
	L801	LF73H0AB9N1B	F.C. INDUCTOR		1	K0_A	
	L802	LR79H0HU27NJ	CHIP INDUCTOR		1	K0_A	
	L803	LB73H0DZ-001	CHIP FERRITE		1	K0_A	
	L804	LR79H0HU7N5G	CHIP INDUCTOR		1	K0_A	
	L805	LB73H0DZ-001	CHIP FERRITE		1	K0_A	
	L2001	LR79Z0PX2R0N	CHIP INDUCTOR		1	K0_A	
	L2101	LR77Z0AK1R0M	CHIP INDUCTOR		1	K0_A	
	L2102	LR77Z0AK1R0M	CHIP INDUCTOR		1	K0_A	
	L2103	LR77Z0AK1R0M	CHIP INDUCTOR		1	K0_A	

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L2104	LR77Z0AK1R0M	CHIP INDUCTOR		1	K0_A
	L2105	LR77Z0AK1R0M	CHIP INDUCTOR		1	K0_A
	L2106	LR77Z0AK1R0M	CHIP INDUCTOR		1	K0_A
	L2301	LR79Z0PB2R2M	CHIP INDUCTOR		1	K0_A
	L2401	LR79Z0PB2R2M	CHIP INDUCTOR		1	K0_A
	L2501	LR79Z0PB2R2M	CHIP INDUCTOR		1	K0_A
	L2702	LB73G0ED-004	CHIP FERRITE		1	K0_A
	A251	W0C-0340-00	RF MODULE		1	K0_A
	AT251	T9A-0052-00	CHIP ANTENNA		1	K0_A
	AT252	T9A-0052-00	CHIP ANTENNA		1	K0_A
	CN1	EC720BK-0564B	FFC FPC CONNE		1	K0_A
	CN231	EA710AP-2009A	W TO B CONNE		1	K0_A
	CN601	EB760AX-05E0D	B TO B CONNE		1	K0_A
	CN701	EA710AT-1004A	W TO B CONNE		1	K0_A
	CN781	EA120CK-2004A	W TO B CONNE		1	K0_A
	CN851	EA710AP-2007A	W TO B CONNE		1	K0_A
	CN1851	EC720AT-0516A	FFC FPC CONNE		1	K0_A
△	F1	FZA10BF-R50	FUSE (CC)		1	K0_A
△	F92	F53-0513-08	PATTERN FUSE	4A	1	K0_A
△	F721	F53-0513-08	PATTERN FUSE	4A	1	K0_A
△	F741	F53-0513-08	PATTERN FUSE	4A	1	K0_A
△	F781	F53-0513-08	PATTERN FUSE	4A	1	K0_A
△	F782	F53-0513-08	PATTERN FUSE	4A	1	K0_A
△	F851	F53-0513-08	PATTERN FUSE	4A	1	K0_A
△	F901	F53-0513-08	PATTERN FUSE	4A	1	K0_A
	J401	E5J-0146-00	HDMI TERMINAL		1	K0_A
	J741	E1B-0041-00	3.5D PHONE JACK		1	K0_A
	J801	E5J-0023-00	R.RECEPTACLE		1	K0_A
	J901	E1B-0041-00	3.5D PHONE JACK		1	K0_A
	SF801	L7K-0074-00	SAW FILTER		1	K0_A
	VA233	SDV1005H26//0	VARIATOR		1	K0_A
	VA234	SDV1005H26//0	VARIATOR		1	K0_A
	VA401	AVRL101A1R1NB	VARIATOR		1	K0_A
	VA402	AVRL101A1R1NB	VARIATOR		1	K0_A
	VA403	AVRL101A1R1NB	VARIATOR		1	K0_A
	VA405	F0K-0176-00	SURGE ABSORBER		1	K0_A
	VA406	F0K-0176-00	SURGE ABSORBER		1	K0_A
	VA407	AVRL101A1R1NB	VARIATOR		1	K0_A
	VA408	EZJP0270EA	VARIATOR		1	K0_A
	VA741	SDV1005E18//2	VARIATOR		1	K0_A
	VA742	SDV1005E18//2	VARIATOR		1	K0_A
	VA743	SDV1005E18//2	VARIATOR		1	K0_A
	VA781	SDV1005A14//0	VARIATOR		1	K0_A
	VA782	SDV1005A14//0	VARIATOR		1	K0_A
	VA802	F0K-0029-00	SURGE ABSORBER		1	K0_A
	VA851	SDV1005E18//1	VARIATOR		1	K0_A
	VA852	SDV1005E18//1	VARIATOR		1	K0_A
	VA853	SDV1005E18//1	VARIATOR		1	K0_A
	VA854	SDV1005E18//1	VARIATOR		1	K0_A
	VA855	SDV1005E18//1	VARIATOR		1	K0_A
	VA856	SDV1005E18//1	VARIATOR		1	K0_A
	VA901	SDV1005A14//0	VARIATOR		1	K0_A
	VA902	SDV1005A14//0	VARIATOR		1	K0_A
	VA903	SDV1005A14//0	VARIATOR		1	K0_A
	X21	L7J-0146-00	QUARTZ CRYSTAL		1	K0_A
	X251	L7H-0052-00	SPXO		1	K0_A
	X401	L7J-0052-00	QUARTZ CRYSTAL		1	K0_A
	X801	L7H-0098-00	TCXO		1	K0_A
	X802	L7J-0095-00	QUARTZ CRYSTAL		1	K0_A
	X1151	L7J-0197-00	QUARTZ CRYSTAL		1	K0_A
DIGITAL IO PWB ASSY (XJA-110K-03) <XJA>						
	IC21	ML86251LAZ07F	MOS IC	BGA	1	K0_B
	IC22	TC7SH08FUJC	MOS IC		1	K0_B
	IC81	NJU7108F3	MOS IC		1	K0_B
	IC111	XC6209B502P-G	MOS IC		1	K0_B
	IC112	NJW1341VC3	MOS IC		1	K0_B
	IC231	TPS2543RTE	MOS IC		1	K0_B
	IC251	MM3411A18NE	ANALOG IC		1	K0_B
	IC252	RP108J081B-AE	MOS IC		1	K0_B
	IC401	IT68013FN/BX	MOS IC		1	K0_B
	IC402	XC6223B121P-G	ANALOG IC		1	K0_B
	IC451	TS3DV642A0RUA	MOS IC		1	K0_B
	IC701	TC7SET08FUJC	MOS IC		1	K0_B
	IC781	TC7SZ125FUJC	MOS IC		1	K0_B
	IC782	TC7SZ125FUJC	MOS IC		1	K0_B
	IC831	AK4387ET	ANALOG IC		1	K0_B
	IC853	NJG1143UA2	MOS IC		1	K0_B
	IC854	UBX-M8030-KT	MOS IC		1	K0_B
	IC855	NJM2903CRB1	MOS IC		1	K0_B
	IC856	NJM2903CRB1	MOS IC		1	K0_B
	IC857	MM3608A33NH	ANALOG IC		1	K0_B
	IC858	MM3411A33NE	ANALOG IC		1	K0_B
	IC901	NJM8080RB1	ANALOG IC		1	K0_B
	IC902	NJM8080RB1	ANALOG IC		1	K0_B
	IC1001	TCC8034-0AX-I	MPU IC		1	K0_B
	IC1060	TC7WZ34FUJC	MOS IC		1	K0_B
	IC1151	TC7SH08FUJC	MOS IC		1	K0_B
	IC1152	RA8900CEUB	ANALOG IC		1	K0_B
	IC1153	TC7WZ34FUJC	MOS IC		1	K0_B
	IC1154	TC7WZ34FUJC	MOS IC		1	K0_B
	IC1601	K4F6E3S4HMGHC	DRAM IC		1	K0_B
	IC1701	WZZ-0092-00	PROGRAMMED IC		1	K0_B

MODEL			MARK	MODEL	MARK
KW-Z1000W			K0_A	KW-Z1000W	K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY Local
	IC1751	-----	ROM IC	NO SERVICE PART	1 K0_B
	IC1801	MFI343S00177	MCU IC		1 K0_B
	IC2001	LM53635MQRNLQ	ANALOG IC		1 K0_B
	IC2101	DA9063-35HO-A	MCU IC		1 K0_B
	IC2151	XCL219B183F-G	ANALOG IC		1 K0_B
	IC2301	MP9843GL	MOS IC		1 K0_B
	IC2401	MP9843GL	MOS IC		1 K0_B
	IC2501	MP9843GL	MOS IC		1 K0_B
	IC2502	INA199B3DCK	ANALOG IC		1 K0_B
	IC2702	XC6223B151P-G	ANALOG IC		1 K0_B
	IC2703	TPS1H100AQWPQ	ANALOG IC		1 K0_B
	IC5001	ADV7390WBCPZ	MOS IC		1 K0_B
	IC5002	MM3608A18NH	ANALOG IC		1 K0_B
	Q1	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	Q21	KTC4075EP/Y/	TRANSISTOR		1 K0_B
	Q81	KTA2014EP/Y/	TRANSISTOR		1 K0_B
	Q111	RE1L002SN	FET		1 K0_B
	Q112	RE1L002SN	FET		1 K0_B
	Q113	KRA307E-P	TRANSISTOR		1 K0_B
	Q114	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	Q401	RE1L002SN	FET		1 K0_B
	Q741	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	Q742	RE1C002ZP	FET		1 K0_B
	Q743	RE1C002ZP	FET		1 K0_B
	Q801	SSM3J372RF	FET		1 K0_B
	Q1151	RE1L002SN	FET		1 K0_B
	Q1153	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	Q1202	KRA307E-P	TRANSISTOR		1 K0_B
	Q1203	LTC043ZEBFS8	DIGI TRANSISTOR		1 K0_B
	Q1801	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	Q1802	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	Q1803	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	Q1804	KTA2014EP/Y/	TRANSISTOR		1 K0_B
	Q1805	KTC4075EP/Y/	TRANSISTOR		1 K0_B
	Q2101	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	Q2102	RE1L002SN	FET		1 K0_B
	Q2103	RE1L002SN	FET		1 K0_B
	Q2501	LSCR523EBFS8	TRANSISTOR		1 K0_B
	Q2502	LSAR523EBFS8	TRANSISTOR		1 K0_B
	Q2503	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	Q2504	KRC407E-P	DIGI TRANSISTOR		1 K0_B
	D401	1SS355-HF	DIODE		1 K0_B
	D741	DAN202UM	DIODE		1 K0_B
	D781	1SS355-HF	DIODE		1 K0_B
	D782	BZT52B5V6LSHF	ZENER DIODE		1 K0_B
	D783	BZT52B5V6LSHF	ZENER DIODE		1 K0_B
	D803	1SS355-HF	DIODE		1 K0_B
	D804	1SS355-HF	DIODE		1 K0_B
	D2001	1SS355-HF	DIODE		1 K0_B
	D2002	1SS355-HF	DIODE		1 K0_B
	D2003	RB085BM-40	SCHOTTKY DIODE		1 K0_B
	C1	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1 K0_B
	C5	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C6	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C21	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1 K0_B
	C22	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1 K0_B
	C23	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C24	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C25	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_B
	C26	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C27	CC73JCH1H221J	C CAPACITOR	220pF 50V J	1 K0_B
	C28	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C29	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C31	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C32	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_B
	C33	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C34	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_B
	C35	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C36	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C37	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C38	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C39	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C40	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C41	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C42	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C43	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C44	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C45	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C46	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_B
	C47	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C48	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C49	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1 K0_B
	C50	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1 K0_B
	C51	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C52	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1 K0_B
	C53	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C55	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C57	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C58	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1 K0_B
	C59	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B
	C61	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1 K0_B
	C62	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1 K0_B

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C63	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C64	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C66	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C67	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C68	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C69	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C70	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C71	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C72	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C74	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C75	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_B
	C76	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C77	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C81	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C82	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C83	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	K0_B
	C91	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C111	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B
	C112	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_B
	C113	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C116	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_B
	C117	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_B
	C119	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C122	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C123	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C124	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C125	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C126	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C127	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C128	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C129	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C131	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C132	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C134	CE32BJ1C470M	E CAPACITOR	47uF 16V M	1	K0_B
	C136	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C137	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C231	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C232	CE32CC1C221M	E CAPACITOR	220uF 16V M	1	K0_B
	C251	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B
	C252	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	K0_B
	C253	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C254	CC73HCH1H0R5C	C CAPACITOR	0.5pF 50V C	1	K0_B
	C255	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C257	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C258	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K0_B
	C259	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C260	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C261	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C262	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C263	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C264	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C265	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C266	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C267	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C268	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C269	CC73JCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C270	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C271	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	K0_B
	C272	CC73HCH1H040C	C CAPACITOR	4pF 50V C	1	K0_B
	C273	CC73HCH1H060D	C CAPACITOR	6pF 50V D	1	K0_B
	C274	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K0_B
	C276	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K0_B
	C277	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C278	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C279	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C280	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	K0_B
	C281	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C282	CK73GXR1A475K	C CAPACITOR	4.7uF 10V K	1	K0_B
	C401	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B
	C402	CC73JCH1H070C	C CAPACITOR	7pF 50V C	1	K0_B
	C403	CC73JCH1H070C	C CAPACITOR	7pF 50V C	1	K0_B
	C404	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_B
	C405	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_B
	C406	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_B
	C407	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_B
	C408	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C409	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C410	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C411	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C412	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C414	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C415	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C416	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_B
	C417	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C418	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_B
	C419	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C420	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C421	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C422	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C423	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C424	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_B
	C425	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C426	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B

MODEL			MARK	MODEL			MARK
KW-Z1000W			K0_A	KW-Z1000W			K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C427	CK73HXR0J105K	C CAPACITOR	1uF 6.3V K	1	K0_B	
	C428	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B	
	C431	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C433	CK73EXR1A476K	C CAPACITOR	47uF 10V K	1	K0_B	
	C434	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C435	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C436	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C437	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B	
	C438	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_B	
	C451	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C452	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B	
	C701	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B	
	C702	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B	
	C703	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_B	
	C704	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_B	
	C743	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B	
	C781	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B	
	C782	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B	
	C783	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B	
	C831	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C832	CK73GXR0J106K	C CAPACITOR	10uF 6.3V K	1	K0_B	
	C833	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C834	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B	
	C835	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B	
	C836	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B	
	C837	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B	
	C838	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B	
	C860	CC73JCH1H120J	C CAPACITOR	12pF 50V J	1	K0_B	
	C861	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B	
	C862	CC73JCH1H020C	C CAPACITOR	2pF 50V C	1	K0_B	
	C863	CC73JCH1H180J	C CAPACITOR	18pF 50V J	1	K0_B	
	C864	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B	
	C865	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_B	
	C866	CC730CC1H1R8B	C CAPACITOR	1.8pF 50V B	1	K0_B	
	C867	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_B	
	C868	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_B	
	C869	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_B	
	C870	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K0_B	
	C871	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_B	
	C872	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_B	
	C873	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_B	
	C874	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_B	
	C875	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_B	
	C878	CC73JCH1H060C	C CAPACITOR	6pF 50V C	1	K0_B	
	C879	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B	
	C880	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0_B	
	C881	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B	
	C882	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B	
	C883	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B	
	C884	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B	
	C886	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	K0_B	
	C901	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B	
	C902	CC73JCH1H181J	C CAPACITOR	180pF 50V J	1	K0_B	
	C903	CC73JCH1H181J	C CAPACITOR	180pF 50V J	1	K0_B	
	C904	CC73JCH1H181J	C CAPACITOR	180pF 50V J	1	K0_B	
	C905	CC73JCH1H181J	C CAPACITOR	180pF 50V J	1	K0_B	
	C906	CC73JCH1E331J	C CAPACITOR	330pF 25V J	1	K0_B	
	C907	CC73JCH1E331J	C CAPACITOR	330pF 25V J	1	K0_B	
	C908	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B	
	C909	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B	
	C910	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B	
	C911	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B	
	C912	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B	
	C913	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B	
	C914	CK73JXR1H102K	C CAPACITOR	1000pF 50V K	1	K0_B	
	C915	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B	
	C916	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B	
	C1001	CK73JXR1E223K	C CAPACITOR	0.022uF 25V K	1	K0_B	
	C1060	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C1151	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C1152	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C1153	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B	
	C1154	CC73JCH1H080C	C CAPACITOR	8pF 50V C	1	K0_B	
	C1155	CC73JCH1H080C	C CAPACITOR	8pF 50V C	1	K0_B	
	C1157	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C1158	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C1159	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	
	C1303	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B	
	C1401	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B	
	C1402	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B	
	C1403	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B	
	C1404	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B	
	C1405	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B	
	C1406	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_B	
	C1407	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B	
	C1408	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B	
	C1409	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B	
	C1410	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B	
	C1411	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B	
	C1412	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B	
	C1413	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B	
	C1414	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B	

(No.MA750<Rev.002>)45/

MODEL			MARK	MODEL	MARK	
KW-Z1000W			K0_A	KW-Z1000W	K0_B	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1704	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C1705	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C1706	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C1707	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C1751	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C1801	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C2001	CD040CP1C222M	E CAPACITOR	2200uF 16V M	1	K0_B
	C2002	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K0_B
	C2003	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C2004	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_B
	C2005	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2006	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2007	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2008	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2009	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C2010	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B
	C2011	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B
	C2103	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_B
	C2104	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_B
	C2105	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_B
	C2106	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C2107	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C2108	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2109	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2110	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C2111	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2112	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	K0_B
	C2113	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C2114	CK73JXR1C224K	C CAPACITOR	0.22uF 16V K	1	K0_B
	C2115	CK73HXR1E474K	C CAPACITOR	0.47uF 25V K	1	K0_B
	C2116	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2120	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B
	C2121	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B
	C2122	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B
	C2123	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_B
	C2124	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_B
	C2125	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C2126	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C2127	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C2128	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_B
	C2129	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C2130	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2131	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C2132	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_B
	C2133	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_B
	C2134	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B
	C2135	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B
	C2136	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B
	C2137	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_B
	C2138	CK73EXR0J476M	C CAPACITOR	47uF 6.3V M	1	K0_B
	C2139	CK73FXR0J226M	C CAPACITOR	22uF 6.3V M	1	K0_B
	C2151	CK73GXR1C475K	C CAPACITOR	4.7uF 16V K	1	K0_B
	C2152	CK73FXR1E106K	C CAPACITOR	10uF 25V K	1	K0_B
	C2218	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B
	C2219	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B
	C2220	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B
	C2301	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2302	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2304	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C2305	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C2306	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_B
	C2308	CC73JCH1H680J	C CAPACITOR	68pF 50V J	1	K0_B
	C2309	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2310	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C2311	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C2312	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B
	C2313	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B
	C2314	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B
	C2401	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2402	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2404	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C2405	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C2406	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_B
	C2407	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C2408	CC73JCH1H470J	C CAPACITOR	47pF 50V J	1	K0_B
	C2409	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2410	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C2411	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C2412	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B
	C2413	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B
	C2418	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B
	C2419	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B
	C2420	CC73JCH1H050C	C CAPACITOR	5pF 50V C	1	K0_B
	C2501	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2502	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C2503	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C2504	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C2506	CK73JXR1H472K	C CAPACITOR	4700pF 50V K	1	K0_B
	C2507	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C2508	CC73JCH1H150J	C CAPACITOR	15pF 50V J	1	K0_B
	C2509	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2510	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C2511	CK73JXR1C104K	C CAPACITOR	0.1uF 16V K	1	K0_B
	C2512	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B
	C2513	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K0_B
	C2514	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2515	CK73JXR1A104K	C CAPACITOR	0.1uF 10V K	1	K0_B
	C2516	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C2704	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K0_B
	C2705	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K0_B
	C2707	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C2708	CK73HXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0_B
	C2709	CK73EXR1H475K	C CAPACITOR	4.7uF 50V K	1	K0_B
	C5001	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C5002	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C5003	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C5004	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C5005	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C5006	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C5007	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C5008	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C5009	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C5010	CK73HXR1C105K	C CAPACITOR	1uF 16V K	1	K0_B
	C5011	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	C5012	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C5013	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C5014	CK73JXR1H222K	C CAPACITOR	2200pF 50V K	1	K0_B
	C5015	CK73HXR1E224K	C CAPACITOR	0.22uF 25V K	1	K0_B
	C5016	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C5017	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C5018	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C5019	CK73JXR1H103K	C CAPACITOR	0.01uF 50V K	1	K0_B
	C5020	CK73JXR1E104K	C CAPACITOR	0.1uF 25V K	1	K0_B
	C5021	CK73GXR1A106K	C CAPACITOR	10uF 10V K	1	K0_B
	C5022	CK73HXR1A474K	C CAPACITOR	0.47uF 10V K	1	K0_B
	C5023	CK73GXR1E225K	C CAPACITOR	2.2uF 25V K	1	K0_B
	R4	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	K0_B
	R5	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	K0_B
	R6	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R7	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R8	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	K0_B
	R9	RK73HB1J560J	MG RESISTOR	56Ω 1/16W J	1	K0_B
	R10	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R11	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R12	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R13	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R14	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R15	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R16	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R17	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R19	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R21	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_B
	R22	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_B
	R23	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_B
	R24	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_B
	R25	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_B
	R26	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_B
	R27	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_B
	R28	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_B
	R29	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	K0_B
	R30	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_B
	R31	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_B
	R32	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R33	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R34	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R35	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R36	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	K0_B
	R37	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R39	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_B
	R40	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_B
	R41	RK73HH1J101D	MG RESISTOR	100Ω 1/16W D	1	K0_B
	R42	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R43	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R44	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	K0_B
	R49	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R57	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R63	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R70	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R71	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R72	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R73	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R81	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R82	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R83	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	1	K0_B
	R84	RK73HH1J474D	MG RESISTOR	470kΩ 1/16W D	1	K0_B
	R85	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	1	K0_B
	R86	RK73HH1J823D	MG RESISTOR	82kΩ 1/16W D	1	K0_B
	R87	RK73HH1J394D	MG RESISTOR	390kΩ 1/16W D	1	K0_B
	R88	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R113	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R114	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R115	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R116	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R120	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R122	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	K0_B

MODEL		MARK	MODEL		MARK
KW-Z1000W		K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY Local
	R123	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R124	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1 K0_B
	R125	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R126	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R129	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R231	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R232	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R234	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R235	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R237	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R252	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R254	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R255	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R256	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R257	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R258	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R259	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R260	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R261	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R262	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R263	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R266	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R267	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R268	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R270	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R271	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R273	RK73HH1J330D	MG RESISTOR	33Ω 1/16W D	1 K0_B
	R274	RK73HH1J331D	MG RESISTOR	330Ω 1/16W D	1 K0_B
	R275	RK73HH1J820D	MG RESISTOR	82Ω 1/16W D	1 K0_B
	R276	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R277	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R278	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1 K0_B
	R280	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1 K0_B
	R281	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1 K0_B
	R282	RK73HH1J562D	MG RESISTOR	5.6kΩ 1/16W D	1 K0_B
	R283	RK73HH1J162D	MG RESISTOR	1.6kΩ 1/16W D	1 K0_B
	R378	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R379	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R384	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R385	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R401	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R403	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R404	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R405	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R406	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R407	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1 K0_B
	R408	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R409	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
	R411	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R412	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R413	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1 K0_B
	R414	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R415	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1 K0_B
	R416	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R417	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R418	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R419	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R420	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R421	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R422	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R423	RK73GB2A390J	MG RESISTOR	39Ω 1/10W J	1 K0_B
	R425	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R426	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1 K0_B
	R427	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R428	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1 K0_B
	R429	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1 K0_B
	R430	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1 K0_B
	R431	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1 K0_B
	R432	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1 K0_B
	R433	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1 K0_B
	R434	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1 K0_B
	R435	RK73HB1J270J	MG RESISTOR	27Ω 1/16W J	1 K0_B
	R451	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R452	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R453	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R602	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R703	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R704	RK73HB1J750J	MG RESISTOR	75Ω 1/16W J	1 K0_B
	R741	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1 K0_B
	R742	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1 K0_B
	R743	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1 K0_B
	R744	RK73GH2A472D	MG RESISTOR	4.7kΩ 1/10W D	1 K0_B
	R745	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1 K0_B
	R746	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1 K0_B
	R747	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1 K0_B
	R748	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R749	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1 K0_B
	R750	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1 K0_B
	R751	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1 K0_B
	R752	RK73EB2E511J	MG RESISTOR	510Ω 1/4W J	1 K0_B
	R753	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R754	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R781	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R782	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R783	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R784	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R786	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	K0_B
	R831	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R832	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R833	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R834	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R836	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R837	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R838	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R839	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	K0_B
	R840	RK73GB2A2R2J	MG RESISTOR	2.2Ω 1/10W J	1	K0_B
	R841	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_B
	R842	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_B
	R843	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_B
	R844	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_B
	R853	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R854	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R855	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R856	RK73HB1J750J	MG RESISTOR	75Ω 1/16W J	1	K0_B
	R857	RK73PB2H300J	MG RESISTOR	30Ω 1/2W J	1	K0_B
	R858	RK73PB2H300J	MG RESISTOR	30Ω 1/2W J	1	K0_B
	R859	RK73PB2H300J	MG RESISTOR	30Ω 1/2W J	1	K0_B
	R860	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R861	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	K0_B
	R862	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R863	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R864	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R865	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0_B
	R866	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R867	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R868	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R869	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R901	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R902	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R904	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K0_B
	R905	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K0_B
	R906	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K0_B
	R907	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K0_B
	R908	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K0_B
	R909	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	K0_B
	R910	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K0_B
	R911	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	K0_B
	R912	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_B
	R913	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_B
	R914	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_B
	R915	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_B
	R916	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R917	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	K0_B
	R918	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R919	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R920	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R922	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R923	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	K0_B
	R1001	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1002	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1003	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1004	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1005	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1006	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1007	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1008	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1009	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1011	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R1020	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_B
	R1021	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1022	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1023	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1024	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1025	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1026	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1027	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1028	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1029	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1030	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1031	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1032	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1033	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K0_B
	R1034	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K0_B
	R1055	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1056	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1057	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1058	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1059	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K0_B
	R1060	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	K0_B
	R1061	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1063	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1064	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1065	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1066	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1071	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1072	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1074	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1076	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1077	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1078	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1088	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1089	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1090	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1091	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1092	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1093	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1094	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1095	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1096	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1097	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1098	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1099	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1100	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1101	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1112	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1114	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1121	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R1122	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1151	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R1152	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R1153	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R1154	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	K0_B
	R1159	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1160	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1161	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1163	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1164	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1165	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0_B
	R1166	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1167	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1168	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1169	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1170	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1171	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1172	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1173	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1174	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1175	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1176	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1177	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1178	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1179	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1180	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1181	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1182	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1183	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R1184	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1185	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R1186	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1187	RK73HB1J474J	MG RESISTOR	470kΩ 1/16W J	1	K0_B
	R1188	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R1191	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1192	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1193	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1194	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K0_B
	R1195	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1196	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1197	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1198	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1203	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1204	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1205	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	K0_B
	R1206	RK73HH1J201D	MG RESISTOR	200Ω 1/16W D	1	K0_B
	R1208	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_B
	R1209	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_B
	R1218	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1219	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1220	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1221	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1225	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	K0_B
	R1227	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1231	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1232	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1233	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1234	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1251	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1252	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1253	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R1264	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	K0_B
	R1265	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	K0_B
	R1266	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R1267	RK73HH1J822D	MG RESISTOR	8.2kΩ 1/16W D	1	K0_B
	R1268	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R1272	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R1273	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R1274	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B

MODEL		MARK	MODEL		MARK
KW-Z1000W		K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY Local
	R1276	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1279	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R1281	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R1283	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R1285	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R1287	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R1289	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R1300	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1309	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R1310	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1 K0_B
	R1311	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1312	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1313	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1314	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1315	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1316	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1317	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1318	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1319	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1320	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1321	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1322	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1323	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1324	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1325	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1326	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1327	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1603	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1 K0_B
	R1604	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1 K0_B
	R1605	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R1607	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R1609	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1611	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1614	RK73HH1J241D	MG RESISTOR	240Ω 1/16W D	1 K0_B
	R1615	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1701	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1702	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R1703	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R1704	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R1705	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R1706	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R1707	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R1708	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R1709	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1 K0_B
	R1710	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1711	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1714	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R1715	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1716	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1 K0_B
	R1717	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1718	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1719	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1720	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1721	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1722	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1723	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1724	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1725	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1751	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1752	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1753	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1754	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1755	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1756	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1757	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1758	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1 K0_B
	R1759	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R1762	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R1763	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R1801	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R1803	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R1804	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R1805	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1 K0_B
	R1806	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R1807	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1 K0_B
	R1809	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1 K0_B
	R1810	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1 K0_B
	R1811	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1812	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1 K0_B
	R1851	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1852	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1853	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R1854	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R1855	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R1856	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1 K0_B
	R1857	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1858	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1859	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1860	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1861	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1862	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B
	R1863	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1 K0_B

MODEL			MARK	MODEL		MARK
KW-Z1000W			K0_A	KW-Z1000W		K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1864	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1865	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1866	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1867	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1869	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R1871	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R1872	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R1874	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R1875	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R1876	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R1877	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R1878	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	K0_B
	R2001	RK73HH1J303D	MG RESISTOR	30kΩ 1/16W D	1	K0_B
	R2002	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_B
	R2004	RK73HB1J681J	MG RESISTOR	680Ω 1/16W J	1	K0_B
	R2005	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R2006	RK73HB1J3R3J	MG RESISTOR	3.3Ω 1/16W J	1	K0_B
	R2007	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2102	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_B
	R2103	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2104	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R2106	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_B
	R2109	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2111	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R2119	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2120	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	K0_B
	R2121	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2122	RZ73F0BS150J	RESISTOR	15Ω J	1	K0_B
	R2123	RZ73F0BS330J	RESISTOR	33Ω J	1	K0_B
	R2124	RZ73F0BS150J	RESISTOR	15Ω J	1	K0_B
	R2125	RZ73F0BS330J	RESISTOR	33Ω J	1	K0_B
	R2127	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R2129	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R2130	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R2151	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R2152	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2153	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2218	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	K0_B
	R2301	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2302	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R2303	RK73HH1J471D	MG RESISTOR	470Ω 1/16W D	1	K0_B
	R2304	RK73HH1J363D	MG RESISTOR	36kΩ 1/16W D	1	K0_B
	R2306	RK73HH1J182D	MG RESISTOR	1.8kΩ 1/16W D	1	K0_B
	R2307	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	K0_B
	R2308	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R2309	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R2310	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	K0_B
	R2313	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K0_B
	R2314	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K0_B
	R2315	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K0_B
	R2401	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2402	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R2403	RK73HH1J471D	MG RESISTOR	470Ω 1/16W D	1	K0_B
	R2404	RK73HH1J363D	MG RESISTOR	36kΩ 1/16W D	1	K0_B
	R2406	RK73HH1J182D	MG RESISTOR	1.8kΩ 1/16W D	1	K0_B
	R2407	RK73HH1J103D	MG RESISTOR	10kΩ 1/16W D	1	K0_B
	R2408	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R2409	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R2410	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	K0_B
	R2413	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2418	RK73HH1J100D	MG RESISTOR	10Ω 1/16W D	1	K0_B
	R2501	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	K0_B
	R2502	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	K0_B
	R2503	RK73HH1J471D	MG RESISTOR	470Ω 1/16W D	1	K0_B
	R2504	RK73HH1J363D	MG RESISTOR	36kΩ 1/16W D	1	K0_B
	R2506	RK73HH1J511D	MG RESISTOR	510Ω 1/16W D	1	K0_B
	R2507	RK73HH1J113D	MG RESISTOR	11kΩ 1/16W D	1	K0_B
	R2508	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0_B
	R2509	RK73HH1J623D	MG RESISTOR	62kΩ 1/16W D	1	K0_B
	R2512	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2513	RK73EB2E151J	MG RESISTOR	150Ω 1/4W J	1	K0_B
	R2514	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2515	RZ73F0CH30LJ	RESISTOR	0.03Ω 1/3W J	1	K0_B
	R2516	RZ73F0CH30LJ	RESISTOR	0.03Ω 1/3W J	1	K0_B
	R2517	RZ73F0CH30LJ	RESISTOR	0.03Ω 1/3W J	1	K0_B
	R2518	RZ73F0CH30LJ	RESISTOR	0.03Ω 1/3W J	1	K0_B
	R2519	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R2520	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K0_B
	R2521	RK73HH1J102D	MG RESISTOR	1kΩ 1/16W D	1	K0_B
	R2522	RK73HH1J104D	MG RESISTOR	100kΩ 1/16W D	1	K0_B
	R2523	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0_B
	R2524	RK73HB1J224J	MG RESISTOR	220kΩ 1/16W J	1	K0_B
	R2525	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0_B
	R2705	RK73HB1J221J	MG RESISTOR	220Ω 1/16W J	1	K0_B
	R2712	RK73HH1J911D	MG RESISTOR	910Ω 1/16W D	1	K0_B
	R5009	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0_B
	R5011	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R5012	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K0_B
	R5016	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	K0_B
	R5017	RK73HH1J151D	MG RESISTOR	150Ω 1/16W D	1	K0_B
	R5018	RK73HH1J200D	MG RESISTOR	20Ω 1/16W D	1	K0_B
	R5019	RK73HH1J392D	MG RESISTOR	3.9kΩ 1/16W D	1	K0_B
	R5020	RK73HH1J301D	MG RESISTOR	300Ω 1/16W D	1	K0_B

MODEL	MARK	MODEL	MARK
KW-Z1000W	K0_A	KW-Z1000W	K0_B

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
		R5021	RK73HH1J221D	MG RESISTOR	220Ω 1/16W D	1 K0_B
		R5023	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1 K0_B
		RA853	RK74GB1J301J	MG RESISTOR	300Ω 1/16W J	1 K0_B
		RA854	RK74GB1J301J	MG RESISTOR	300Ω 1/16W J	1 K0_B
		RA855	RK74GB1J301J	MG RESISTOR	300Ω 1/16W J	1 K0_B
		RA856	RK74GB1J301J	MG RESISTOR	300Ω 1/16W J	1 K0_B
		L2	L3D-0039-00	CHOKE COIL		1 K0_B
		L3	L3D-0039-00	CHOKE COIL		1 K0_B
		L4	L3D-0039-00	CHOKE COIL		1 K0_B
		L5	L3D-0039-00	CHOKE COIL		1 K0_B
		L6	L3D-0039-00	CHOKE COIL		1 K0_B
		L21	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L22	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L23	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L24	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L25	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L111	LR73Z0AC100K	CHIP INDUCTOR		1 K0_B
		L251	LK73H0AM2N2S	M.CHIP INDUCTOR		1 K0_B
		L252	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L253	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L254	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L255	LK73H0AM2N2S	M.CHIP INDUCTOR		1 K0_B
		L256	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L401	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L402	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L801	LF73H0AB9N1B	F.C. INDUCTOR		1 K0_B
		L802	LR79H0HU27NJ	CHIP INDUCTOR		1 K0_B
		L803	LB73H0DZ-001	CHIP FERRITE		1 K0_B
		L804	LR79H0HU7N5G	CHIP INDUCTOR		1 K0_B
		L805	LB73H0DZ-001	CHIP FERRITE		1 K0_B
		L2001	LR79Z0PX2R0N	CHIP INDUCTOR		1 K0_B
		L2101	LR77Z0AK1R0M	CHIP INDUCTOR		1 K0_B
		L2102	LR77Z0AK1R0M	CHIP INDUCTOR		1 K0_B
		L2103	LR77Z0AK1R0M	CHIP INDUCTOR		1 K0_B
		L2104	LR77Z0AK1R0M	CHIP INDUCTOR		1 K0_B
		L2105	LR77Z0AK1R0M	CHIP INDUCTOR		1 K0_B
		L2106	LR77Z0AK1R0M	CHIP INDUCTOR		1 K0_B
		L2301	LR79Z0PB2R2M	CHIP INDUCTOR		1 K0_B
		L2401	LR79Z0PB2R2M	CHIP INDUCTOR		1 K0_B
		L2501	LR79Z0PB2R2M	CHIP INDUCTOR		1 K0_B
		L2702	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L5001	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L5002	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L5003	LB73G0ED-004	CHIP FERRITE		1 K0_B
		L5004	LB73G0ED-004	CHIP FERRITE		1 K0_B
		A251	W0C-0340-00	RF MODULE		1 K0_B
		AT251	T9A-0052-00	CHIP ANTENNA		1 K0_B
		AT252	T9A-0052-00	CHIP ANTENNA		1 K0_B
		CN1	EC720BK-0564B	FFC FPC CONNE		1 K0_B
		CN231	EA710AP-2009A	W TO B CONNE		1 K0_B
		CN601	EB760AX-05E0D	B TO B CONNE		1 K0_B
		CN701	EA710AT-1004A	W TO B CONNE		1 K0_B
		CN781	EA120CK-2004A	W TO B CONNE		1 K0_B
		CN851	EA710AP-2007A	W TO B CONNE		1 K0_B
		CN1851	EC720AT-0516A	FFC FPC CONNE		1 K0_B
△		F1	FZA10BF-R50	FUSE (CC)		1 K0_B
△		F92	F53-0513-08	PATTERN FUSE	4A	1 K0_B
△		F721	F53-0513-08	PATTERN FUSE	4A	1 K0_B
△		F741	F53-0513-08	PATTERN FUSE	4A	1 K0_B
△		F781	F53-0513-08	PATTERN FUSE	4A	1 K0_B
△		F782	F53-0513-08	PATTERN FUSE	4A	1 K0_B
△		F851	F53-0513-08	PATTERN FUSE	4A	1 K0_B
△		F901	F53-0513-08	PATTERN FUSE	4A	1 K0_B
		J401	E5J-0146-00	HDMI TERMINAL		1 K0_B
		J741	E1B-0041-00	3.5D PHONE JACK		1 K0_B
		J801	E5J-0023-00	R.RECEPTACLE		1 K0_B
		J901	E1B-0041-00	3.5D PHONE JACK		1 K0_B
		SF801	L7K-0074-00	SAW FILTER		1 K0_B
		VA233	SDV1005H26//0	VARIATOR		1 K0_B
		VA234	SDV1005H26//0	VARIATOR		1 K0_B
		VA401	AVRL101A1R1NB	VARIATOR		1 K0_B
		VA402	AVRL101A1R1NB	VARIATOR		1 K0_B
		VA403	AVRL101A1R1NB	VARIATOR		1 K0_B
		VA405	F0K-0176-00	SURGE ABSORBER		1 K0_B
		VA406	F0K-0176-00	SURGE ABSORBER		1 K0_B
		VA407	AVRL101A1R1NB	VARIATOR		1 K0_B
		VA408	EZJP0270EA	VARIATOR		1 K0_B
		VA741	SDV1005E18//2	VARIATOR		1 K0_B
		VA742	SDV1005E18//2	VARIATOR		1 K0_B
		VA743	SDV1005E18//2	VARIATOR		1 K0_B
		VA781	SDV1005A14//0	VARIATOR		1 K0_B
		VA782	SDV1005A14//0	VARIATOR		1 K0_B
		VA802	F0K-0029-00	SURGE ABSORBER		1 K0_B
		VA851	SDV1005E18//1	VARIATOR		1 K0_B
		VA852	SDV1005E18//1	VARIATOR		1 K0_B
		VA853	SDV1005E18//1	VARIATOR		1 K0_B
		VA854	SDV1005E18//1	VARIATOR		1 K0_B
		VA855	SDV1005E18//1	VARIATOR		1 K0_B
		VA856	SDV1005E18//1	VARIATOR		1 K0_B
		VA901	SDV1005A14//0	VARIATOR		1 K0_B
		VA902	SDV1005A14//0	VARIATOR		1 K0_B
		VA903	SDV1005A14//0	VARIATOR		1 K0_B

MODEL			MARK	MODEL			MARK
KW-Z1000W			K0_A	KW-Z1000W			K0_B
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	X21	L7J-0146-00	QUARTZ CRYSTAL		1	K0_B	
	X251	L7H-0052-00	SPXO		1	K0_B	
	X401	L7J-0052-00	QUARTZ CRYSTAL		1	K0_B	
	X801	L7H-0159-00	TCXO		1	K0_B	
	X802	L7J-0095-00	QUARTZ CRYSTAL		1	K0_B	
	X1151	L7J-0197-00	QUARTZ CRYSTAL		1	K0_B	