


2. EXPLODED VIEWS AND PARTS LIST

2.1 PACKING

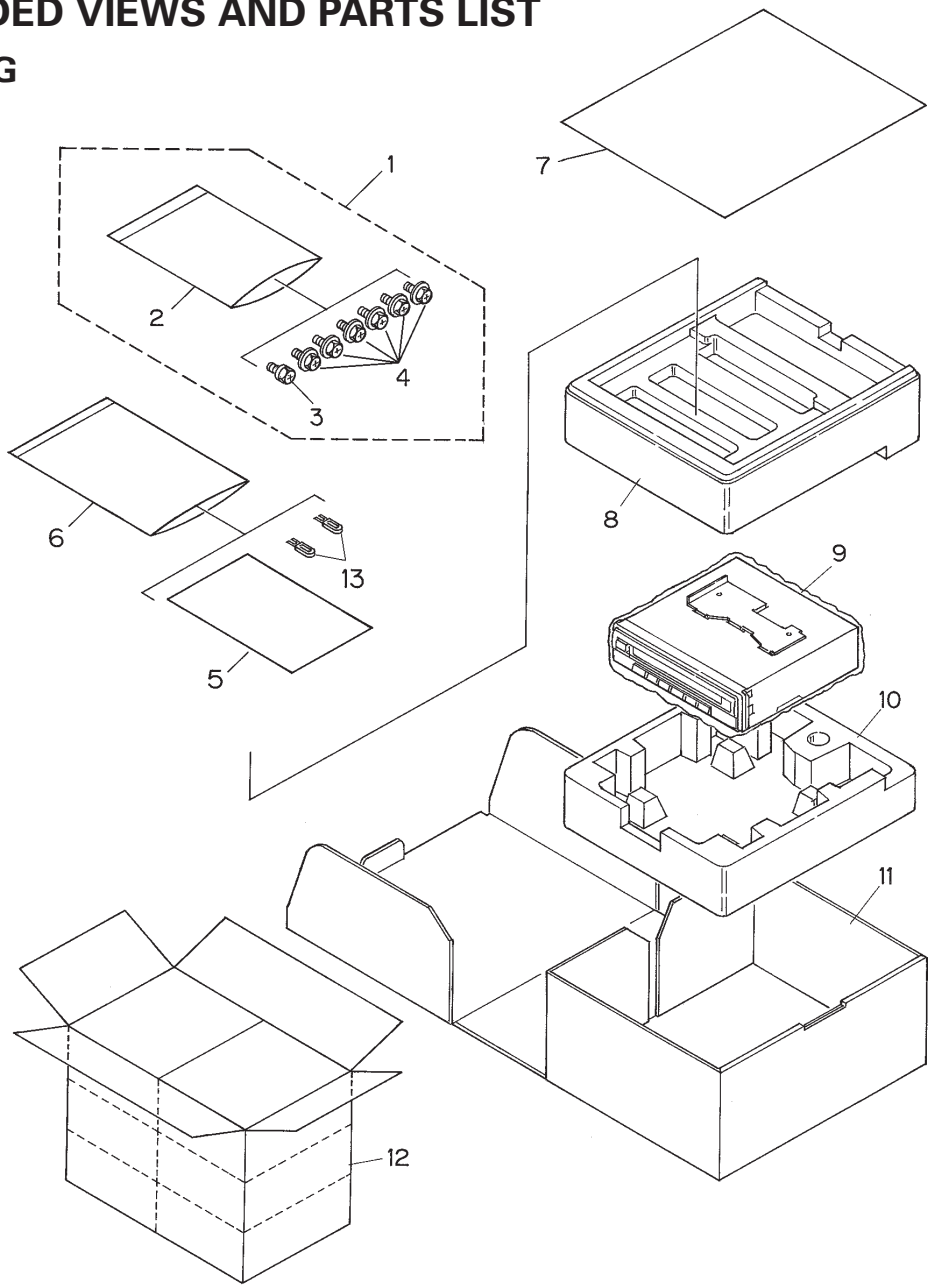


NOTE:

- Parts marked by “*” are generally unavailable because they are not in our Master Spare Parts List.
- Screws adjacent to ▽ mark on the product are used for disassembly.

● PACKING SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1	Screw Assy	CEA2537		11	Carton(CDX-MG6346ZH/ES)	CHG3909
*	2	Polyethylene Bag	CEG-127			Carton(CDX-MG6446ZH/ES)	CHG3991
	3	Screw	HMF40P060FZK		12	Contain Box(CDX-MG6346ZH/ES)	CHL3909
	4	Screw	HMF50P080FMC			Contain Box(CDX-MG6446ZH/ES)	CHL3991
	5	Owner’s Manual(English)	CRB1561	*	13	Band	CNF-512
	6	Polyethylene Bag	CEG1116				
*	7	Sheet	CHW1402				
	8	Protector	CHP2123				
*	9	Polyethylene Bag	E36-609				
	10	Protector	CHP2124				


2.2 EXTERIOR

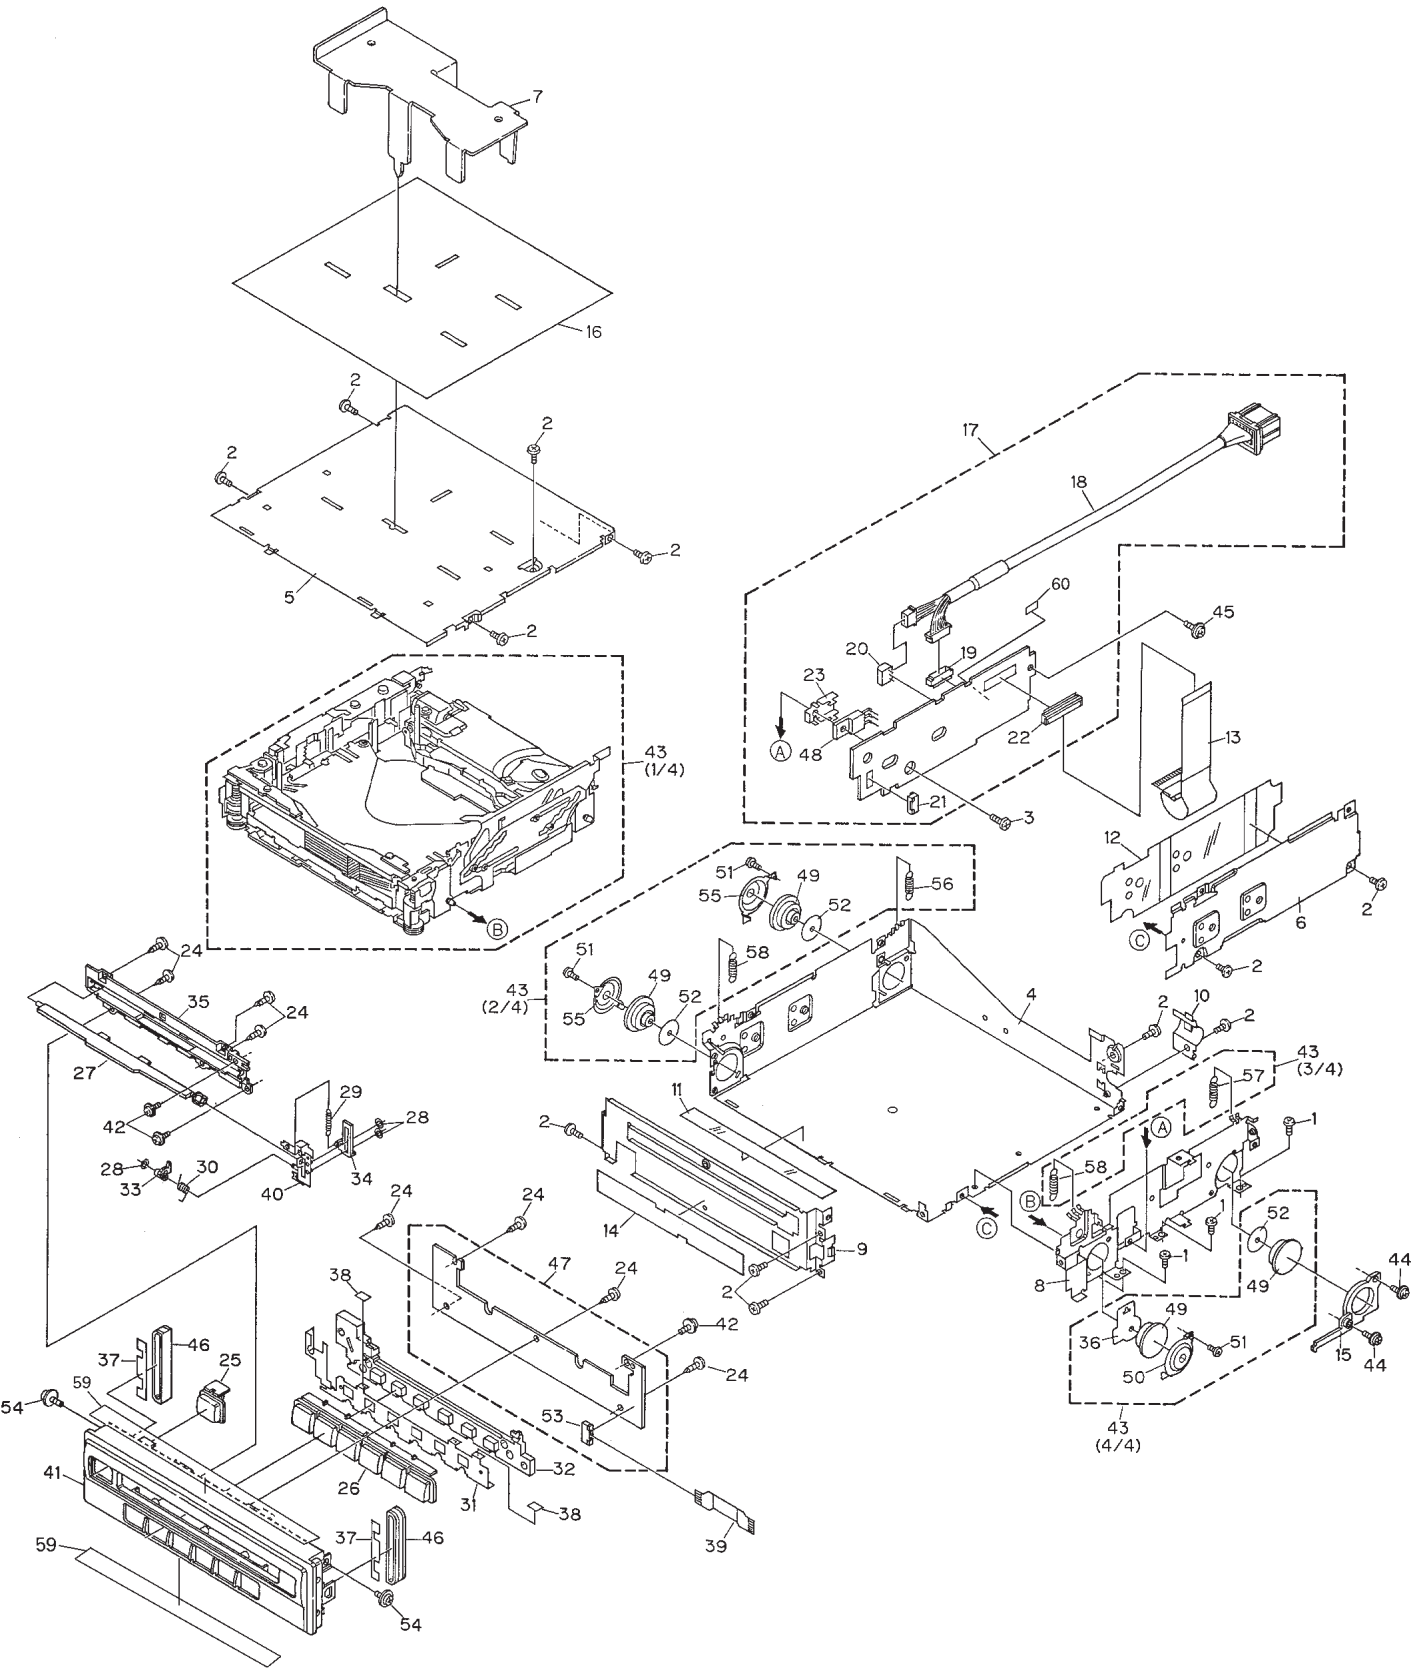

● EXTERIOR SECTION PARTS LIST

Mark No.	Description	Part No.	Mark No.	Description	Part No.
1	Screw	BMZ20P020FMC	29	Spring	CBH2201
2	Screw	BMZ26P030FMC	30	Spring	CBH2200
3	Screw	BMZ26P060FMC	31	Conductor	CNC8051
4	Chassis Unit(CDX-MG6346ZH/ES)	CXB3407	32	Lighting Conductor	CNV5901
	Chassis Unit(CDX-MG6446ZH/ES)	CXB5581	33	Gear	CNV5547
5	Case	CNB2354	34	Arm	CNV5548
6	Side Frame	CNB2397	35	Guide	CNV5880
7	Bracket	CNC7878	36	Sheet	CNM6318
8	Bracket(CDX-MG6346ZH/ES)	CNC8026	37	Double Faced Tape	CNM6424
	Bracket(CDX-MG6446ZH/ES)	CNC8816	38	Insulator	CNM6512
9	Front Frame	CNC8110	39	PCB	CNP5373
10	Holder	CNC8111	40	Bracket Unit	CXB3111
11	Insulator	CNM5969	41	Grille Unit	CXB3409
12	Insulator	CNM6112	42	Screw	IMS20P040FMC
13	PCB	CNP5516	43	CD Mechanism Module(G1)	CXK4702
14	Insulator	CNM6409	44	Screw	IMS20P040FMC
15	Holder	CNV5543	45	Screw	IMS26P040FMC
* 16	Caution Label	CRP1200	46	Cushion	CNV5674
17	Extension Unit	CWM6677	47	Keyboard Unit	CWM6289
18	Cord	CDE6148	48	Transistor(Q708)	2SB1335A
19	Connector(CN102)	CKS2200	49	Damper	CNV5120
20	Connector(CN103)	CKS3597	50	Holder	CNC7826
21	Connector(CN701)	CKS3785	51	Screw	CBA1250
22	Connector(CN101)	CKS3989	52	Sheet	CNM5981
23	Holder	CNC8031	53	Connector(CN901)	CKS3785
24	Screw	BPZ20P060FMC	54	Screw	IMS26P030FZK
25	Button	CAC5864	55	Holder	CNC7477
26	Button	CAC5865	56	Spring(Left Rear)	CBH2365
27	Door	CAT2003	57	Spring(Right Rear)(Black)	CBH2361
28	Washer	CBF1038	58	Spring(Front)	CBH2360
			59	Spacer	CNM6658
			60	Spacer	CNM6626

2.3 CD MECHANISM

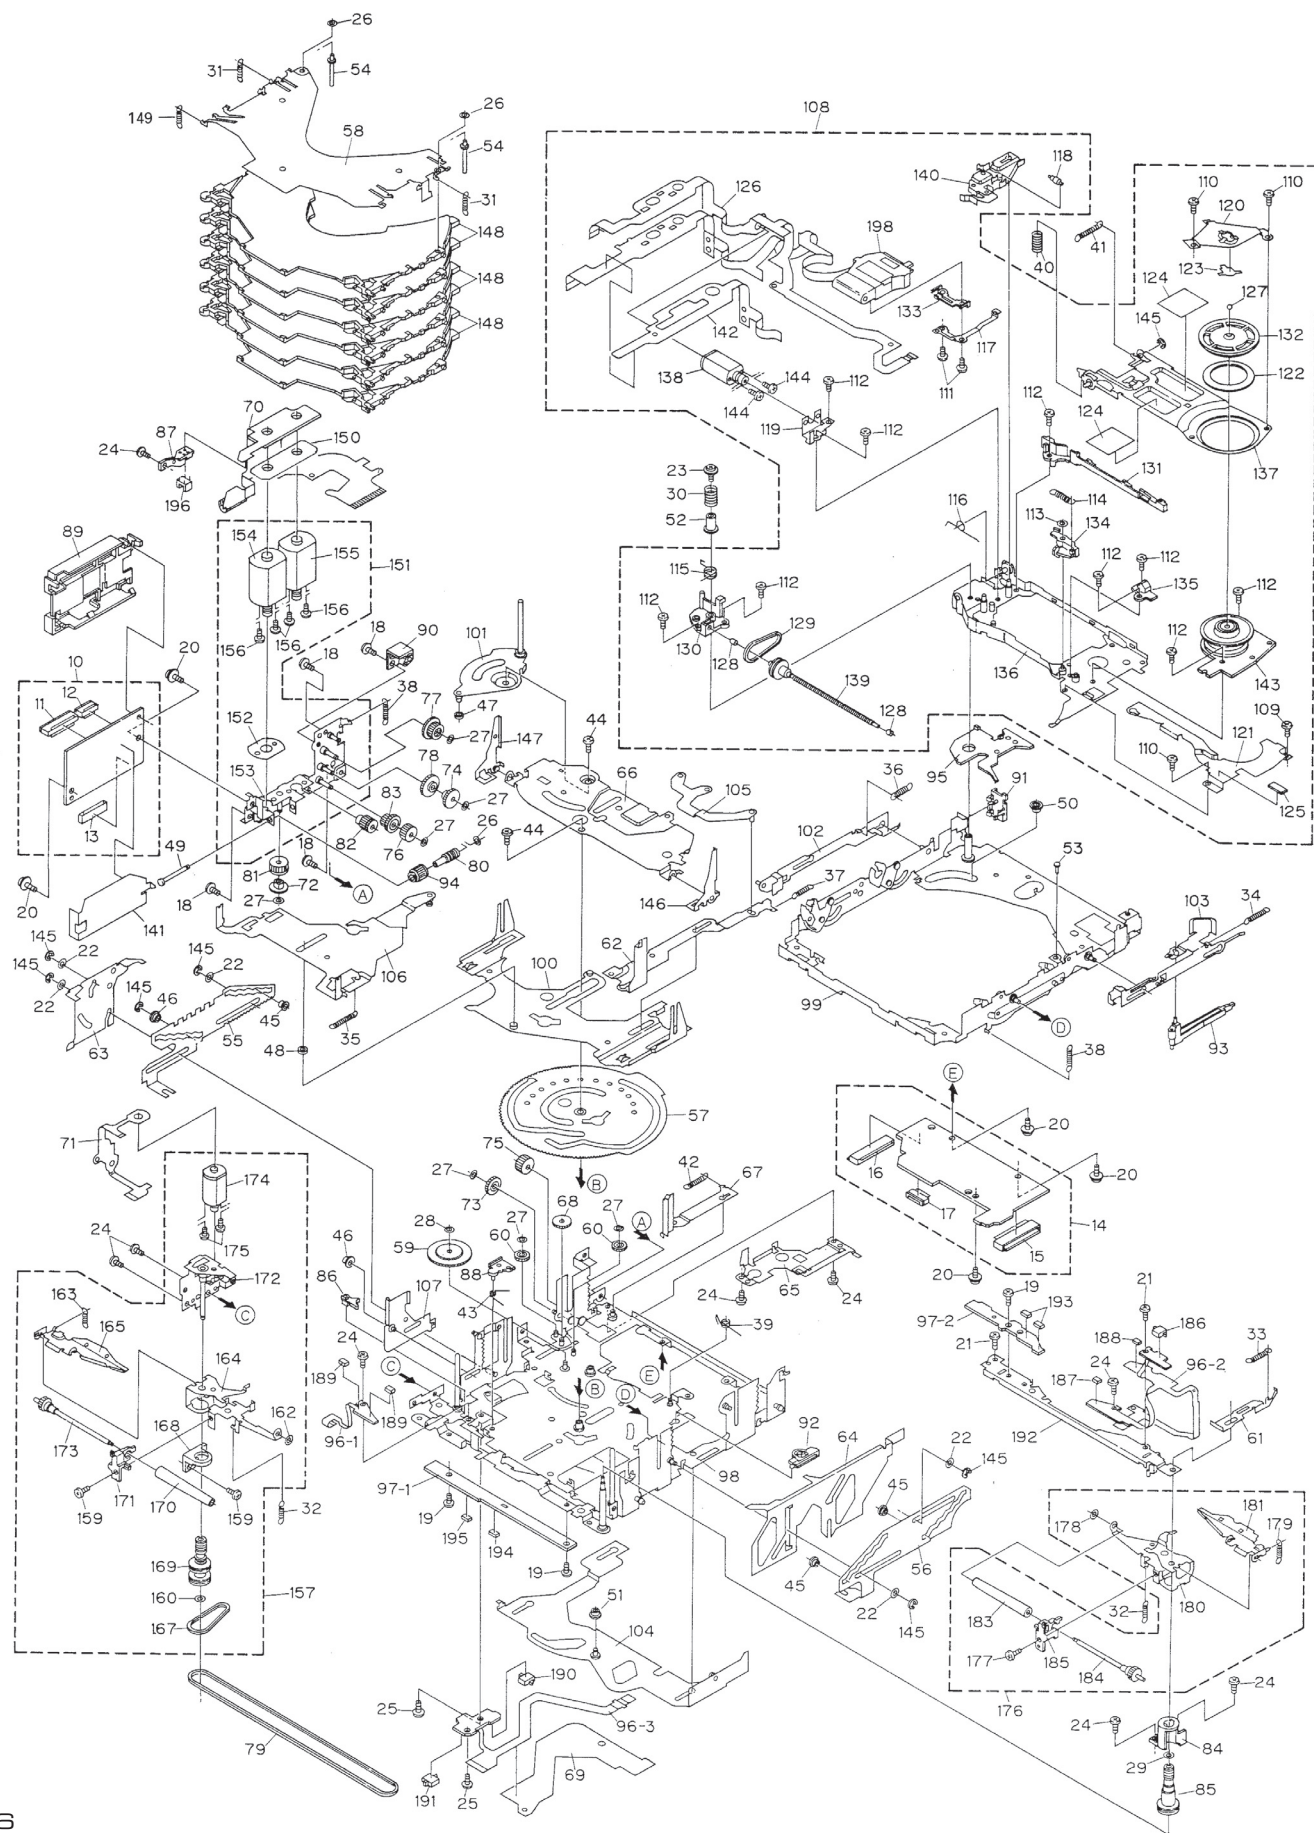

● CD MECHANISM SECTION PARTS LIST

Mark	No.	Description	Part No.	Mark	No.	Description	Part No.
	1-9	●●●●●			54	Shaft	CLA3693
	10	CD Core Unit(Servo Unit)	CWX2202		55	Steer	CNC7215
	11	Connector(CN101)	CKS2764		56	Steer	CNC7216
	12	Connector(CN301)	CKS3966		57	Cam	CNC7227
	13	Connector(CN201)	CKS3991	*	58	Holder	CNC7235
	14	CD Core Unit(STS Unit)	CWX2203		59	Gear	CNC7236
	15	Connector(CN701)	CKS3989		60	Gear	CNC7238
	16	Connector(CN801)	CKS3989		61	Lever	CNC7243
	17	Connector(CN802)	CKS4054		62	Lever	CNC7244
	18	Screw	CBA1037		63	Lever	CNC7245
	19	Screw	CBA1041		64	Lever	CNC7246
	20	Screw	CBA1076		65	Cover	CNC7441
	21	Screw	CBA1250		66	Holder	CNC8613
	22	Screw	CBA1405		67	Lever	CNC8024
	23	Screw	CBA1452		68	Gear	CNC8140
	24	Screw	CBA1453		69	Sheet	CNM5831
	25	Screw	CBA1479		70	PCB	CNP5680
	26	Washer	CBF1037		71	PCB	CNP5681
	27	Washer	CBF1038		72	Gear	CNR1479
	28	Washer	CBF1039		73	Gear	CNR1481
	29	Washer	CBF1064		74	Gear	CNR1495
	30	Spring	CBH2007		75	Gear	CNR1501
	31	Spring	CBH2271		76	Gear	CNR1502
	32	Spring	CBH2274		77	Gear	CNR1540
	33	Spring	CBH2014		78	Gear	CNR1541
	34	Spring	CBH2015		79	Belt	CNT1080
	35	Spring	CBH2016		80	Worm Gear	CNV5046
	36	Spring	CBH2017		81	Gear	CNV5047
	37	Spring	CBH2290		82	Gear	CNV5048
	38	Spring	CBH2019		83	Gear	CNV5049
	39	Spring	CBH2064		84	Holder	CNV5056
	40	Spring	CBH2195		85	Pulley	CNV5058
	41	Spring	CBH2196		86	Arm	CNV5061
	42	Spring	CBH2224		87	Spacer	CNV5066
	43	Spring	CBH2250		88	Arm	CNV5189
	44	Screw	CBA1082		89	Cover	CNV5207
	45	Roller	CLA3154		90	Cover	CNV5424
	46	Roller	CLA3157		91	Cover	CNV5425
	47	Roller	CLA3159		92	Lever	CNV5427
	48	Roller	CLA3160		93	Arm	CNV5491
	49	Shaft	CLA3179		94	Gear	CNV5519
	50	Spacer	CLA3194		95	Holder	CNV5648
	51	Roller	CLA3248		96	Composite PCB	CNX3141
	52	Bush	CLA3353		97	Composite PCB	CNX2989
*	53	Shaft	CLA3469		98	Chassis Unit	CXB4314

Mark No.	Description	Part No.	Mark No.	Description	Part No.
99	Frame Unit	CXB2702	144	Screw	JFZ14P020FZK
100	Lever Unit	CXB2703	145	Washer	YE15FUC
101	Arm Unit	CXB2704	146	Arm Unit	CXB4953
102	Lever Unit	CXB2708	147	Arm Unit	CXB4954
103	Lever Unit	CXB2709	148	Tray Assy	CXB4307
104	Lever Unit	CXB2711	149	Spring	CBH2269
105	Arm Unit	CXB2712	150	Sheet	CNM6699
106	Lever Unit	CXB2713	151	Cam Motor Assy	CXB3170
107	Lever Unit	CXB2714	152	Spacer	CNC8289
108	Carriage Mechanism Unit(G1)	CXB5639	* 153	Bracket Unit	CXB4165
109	Screw	CBA1041	* 154	Motor Unit(M1 Cam Gear)	CXB3174
110	Screw	CBA1250	* 155	Motor Unit(M3 ELV)	CXB3175
111	Screw	CBA1362	156	Screw	JFZ20P025FMC
112	Screw	CBA1471	157	Loading Arm L Assy	CXB3171
113	Washer	CBF1038	158	●●●●●	
114	Spring	CBH2008	159	Screw	CBA1453
115	Spring	CBH2009	160	Washer	CBF1038
116	Spring	CBH2010	161	●●●●●	
117	Spring	CBL1335	162	Washer	CBF1074
118	Roller	CLA3707	163	Spring	CBH2136
* 119	Bracket	CNC7228	* 164	Arm	CNC7241
120	Guide Unit	CXB4417	* 165	Arm	CXB4449
121	Cover	CNC7628	166	●●●●●	
122	Sheet	CNM6414	167	Belt	CNT1079
123	Sheet	CNM5378	168	Holder	CNV5055
124	Sheet	CNM5695	169	Pulley	CNV5057
125	Sheet	CNM5827	170	Roller	CNV5064
126	PCB	CNP4978	171	Guide	CNV5125
127	Ball	CNR1189	* 172	Bracket Unit	CXB4316
128	Bearing	CNR1423	173	Roller Gear Unit	CXB3176
129	Belt	CNT1079	* 174	Motor Unit(M2 LOAD)	CXB3177
130	Holder	CNV5037	175	Screw	JFZ14P020FMC
131	Guide	CNV5040	176	Loading Arm R Assy	CXB3172
132	Clamper	CNV5042	177	Screw	CBA1453
133	Rack	CNV5111	178	Washer	CBF1074
134	Arm	CNV5579	179	Spring	CBH2136
135	Holder	CNV5759	* 180	Arm	CNC7242
* 136	Chassis	CXB2698	* 181	Arm	CXB4448
137	Arm Unit	CXB2705	182	●●●●●	
138	Motor Unit(M4 CARRIAGE)	CXB3178	183	Roller	CNV5064
139	Screw Unit	CXB3179	184	Roller Gear Unit	CXB3176
140	Lever Unit	CXB4450	185	Guide	CNV5126
141	Insulator	CNM6306	186	Switch(S885 MAX)	CSN1052
142	Spacer	CNM6345	187	LED(D883)	CL202IRXTU
143	Motor(M5 SPINDLE)	CXM1120	188	Photo-transistor(Q881)	CPT230SCTD(CD)

Mark	No.	Description	Part No.
	189	LED(D891,892)	CL202IRXTU
	190	Switch(S887 CLAMP)	CSN1051
	191	Switch(S886 ELV HOME)	CSN1052
	192	Bracket Unit	CXB4306
	193	Photo-transistor(Q851,852)	CPT230SCTD(CD)
	194	Resistor(R856)	RS1/8S911J
	195	Resistor(R857)	RS1/8S821J
	196	Photo-interrupter(Q1)	RPI-221
	197	•••••	
	198	Pickup Unit(Service)(P8)	CXX1311

5. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor
RS1/○S○○○○J,RS1/○○S○○○J
Chip Capacitor (except for CQS.....)
CKS....., CCS....., CSZS.....

====Circuit Symbol and No.==Part Name			Part No.	====Circuit Symbol and No.==Part Name			Part No.
A Unit Number : CWM6677 Unit Name : Extension Unit							
MISCELLANEOUS							
IC	101	IC	NJM4558MD	R	111		RS1/16S822J
IC	102	IC	NJM4558MD	R	112		RS1/16S153J
IC	103	IC	TC74HC4066AF	R	113		RS1/16S104J
IC	501	IC	CA0008AM	R	114		RS1/16S104J
IC	601	IC	PD5540A	R	115		RS1/16S104J
IC	701	IC	PAJ002A				
Q	101	Transistor	DTC143TK	R	116		RS1/16S104J
Q	102	Transistor	DTC143TK	R	117		RS1/16S221J
Q	103	Transistor	FMC2A	R	118		RS1/16S221J
Q	104	Transistor	DTA124EU	R	119		RS1/16S221J
				R	120		RS1/16S221J
Q	701	Transistor	2SA1162				
Q	702	Transistor	2SB1189	R	121		RS1/16S103J
Q	721	Transistor	2SC2712	R	501		RS1/8S101J
Q	731	Transistor	2SC2712	R	502		RS1/8S101J
Q	732	Transistor	2SA1162	R	601		RS1/16S473J
				R	602		RS1/16S473J
Q	733	Transistor	2SD1760F5				
Q	734	Transistor	2SD1760F5	R	603		RS1/16S473J
Q	741	Transistor	2SK1485	R	604		RS1/16S102J
Q	742	Transistor	2SK1485	R	605		RS1/16S222J
Q	751	Transistor	FMC2A	R	606		RS1/16S222J
				R	607		RS1/16S222J
Q	753	Transistor	FMW1				
Q	754	Transistor	2SB1335A	R	608		RS1/16S222J
D	101	Diode	DAP202U	R	609		RS1/16S222J
D	701	Diode	ERA15-10Y1	R	610		RS1/16S222J
D	702	Diode	1SS355	R	611		RS1/16S561J
				R	612		RS1/16S561J
Q	753	Transistor	FMW1				
Q	754	Transistor	2SB1335A	R	613		RS1/16S561J
D	101	Diode	DAP202U	R	614		RS1/16S561J
D	701	Diode	ERA15-10Y1	R	615		RS1/16S103J
D	702	Diode	1SS355	R	616		RS1/16S103J
				R	617		RS1/16S163J
D	703	Diode	1SS355				
D	704	Diode	1SS355	R	618		RS1/16S222J
D	705	Diode	MA1Z240	R	619		RS1/16S0R0J
D	706	Diode	1SR154-400	R	620		RS1/16S473J
D	721	Diode	1SS355	R	621		RS1/16S433J
				R	622		RS1/16S103J
D	731	Diode	HZU8R2(B3)				
D	741	Diode	DAN202U	R	640		RS1/16S471J
D	751	Diode	UDZS6R2(B)	R	641		RS1/16S471J
L	701	Coil	CTH1190	R	642		RS1/16S471J
L	702	Inductor	LCTB100K2125	R	643		RS1/16S471J
				R	644		RS1/16S471J
TH	601	Thermistor	CCX1032				
TH	701	Switch	CCX1047	R	649		RS1/16S222J
X	601	Radiator 6.290MHz	CSS1451	R	651		RS1/16S222J
				R	652		RS1/16S471J
				R	653		RS1/16S471J
				R	654		RS1/16S471J
RESISTORS							
R	101		RS1/16S332J				
R	102		RS1/16S332J	R	655		RS1/16S471J
R	103		RS1/16S333J	R	656		RS1/16S471J
R	104		RS1/16S333J	R	657		RS1/16S471J
R	105		RS1/16S103J	R	658		RS1/16S471J
				R	659		RS1/16S471J
R	106		RS1/16S822J				
R	107		RS1/16S822J	R	660		RS1/16S471J
R	108		RS1/16S103J	R	661		RS1/16S102J
R	109		RS1/16S153J	R	662		RS1/16S102J
R	110		RS1/16S822J	R	663		RS1/16S102J
				R	664		RS1/16S102J

====Circuit Symbol and No.====Part Name

Part No.

R 665	RS1/16S102J
R 666	RS1/16S471J
R 667	RS1/16S471J
R 668	RS1/16S331J
R 669	RS1/16S331J
R 670	RS1/16S331J
R 671	RS1/16S331J
R 672	RS1/16S331J
R 673	RS1/16S471J
R 674	RS1/16S471J
R 675	RS1/16S471J
R 676	RS1/16S471J
R 677	RS1/16S222J
R 678	RS1/16S222J
R 679	RS1/16S222J
R 680	RS1/16S154J
R 681	RS1/16S222J
R 682	RS1/16S102J
R 683	RS1/16S912J
R 685	RS1/16S102J
R 689	RS1/16S103J
R 690	RS1/16S103J
R 691	RS1/16S273J
R 692	RS1/16S202J
R 693	RS1/16S512J
R 694	RS1/16S104J
R 695	RS1/16S104J
R 696	RS1/16S104J
R 697	RS1/16S222J
R 698	RS1/16S222J
R 699	RS1/16S222J
R 701	RS1/10S204J
R 702	RS1/16S104J
R 703	RS1/16S153J
R 704	RS1/16S473J
R 705	RS1/16S683J
R 706	RS1/16S473J
R 707	RS1/16S223J
R 708	RS1/8S101J
R 709	RS1/8S101J
R 711	RS1/16S103J
R 712	RS1/8S3R9J
R 713	RS1/16S102J
R 714	RS1/16S473J
R 715	RS1/16S473J
R 716	RS1/16S473J
R 717	RS1/16S473J
R 718	RS1/16S473J
R 719	RS1/8S101J
R 721	RS1/8S103J
R 722	RS1/16S473J
R 723	RS1/16S152J
R 731	RS1/10S681J
R 732	RS1/16S223J
R 733	RS1/16S103J
R 734	RS1/16S223J
R 735	RS1/16S223J
R 736	RS1/4S2R2J
R 737	RS1/4S2R2J
R 738	RS1/16S104J
R 741	RS1/16S223J
R 742	RS1/16S223J
R 743	RS1/16S103J
R 744	RS1/16S103J
R 751	RS1/16S101J
R 752	RS1/16S473J
R 753	RS1/10S223J
R 754	RS1/16S101J
R 755	RS1/4S221J
R 756	RS1/16S681J

====Circuit Symbol and No.====Part Name

Part No.

R 757	RS1/16S511J
R 758	RS1/16S561J
R 759	RS1/16S103J
R 760	RS1/16S273J
CAPACITORS	
C 101	CEV4R7M35
C 102	CEV4R7M35
C 103	CEV4R7M35
C 104	CEV4R7M35
C 105	CCSRCH101J50
C 106	CCSRCH101J50
C 107	CCSRCH101J50
C 108	CCSRCH101J50
C 109	CKSRYB473K16
C 110	CKSRYB473K16
C 111	CEV4R7M35
C 112	CEV4R7M35
C 113	CEV4R7M35
C 114	CEV4R7M35
C 501	CKSRYB102K50
C 502	CKSRYB102K50
C 503	CKSRYB104K16
C 601	CKSRYB104K16
C 603	CKSRYB103K50
C 605	CKSRYB103K50
C 651	CKSRYB103K50
C 701	CEAT471M16
C 702	CEAT471M16
C 703	CKSQYB104K25
C 704	CKSRYB223K25
C 705	CKSRYB103K50
C 706	CKSRYB103K50
C 707	CKSRYB103K50
C 708	CSZSC220M16
C 709	CCL1049
C 710	CKSRYB103K50
C 711	CKSRYB473K16
C 712	CKSRYB473K16
C 713	CEV100M16
C 721	CKSRYB103K50
C 731	CEV4R7M35
C 732	CKSRYB473K16
C 751	CKSRYB473K16
C 752	CKSRYB103K50
C 753	CEV220M16
C 754	CKSRYB473K16
C 755	CEV220M6R3

B Unit Number : CWM6289
Unit Name : Keyboard Unit

MISCELLANEOUS

IC 901	IC	BU2092FV
Q 903	Transistor	2SA1586
Q 904	Transistor	DTC123JU
Q 905	Chip Transistor	2SC2712
D 901	Diode	1SS355
D 902	Diode	1SS355
D 903	Diode	1SS355
D 905	LED	CL200PGCTU
D 906	LED	CL150DCD(AB)
D 907	LED	CL200PGCTU
D 908	LED	CL150DCD(AB)
D 909	LED	CL200PGCTU
D 910	LED	CL150DCD(AB)
D 911	LED	CL200PGCTU
D 912	LED	CL150DCD(AB)

====Circuit Symbol and No.====Part Name	Part No.	====Circuit Symbol and No.====Part Name	Part No.
D 913 LED	CL200PGCTU	R 112	RS1/16S222J
D 914 LED	CL150DCD(AB)	R 113	RS1/16S103J
D 915 LED	CL200PGCTU	R 114	RS1/16S103J
D 916 LED	CL150DCD(AB)	R 115	RS1/16S102J
D 917 Diode	UDZ2R7(B)	R 116	RS1/16S163J
D 918 Diode	UDZ2R7(B)	R 117	RS1/16S163J
S 901 Switch	CSG1043	R 120	RS1/16S101J
S 902 Switch	CSG1043	R 121	RS1/16S101J
S 903 Switch	CSG1043	R 125	RS1/16S0R0J
S 904 Switch	CSG1043	R 201	RS1/16S104J
S 905 Switch	CSG1043	R 202	RS1/16S103J
S 906 Switch	CSG1043	R 203	RS1/16S332J
S 907 Switch	CSG1043	R 204	RS1/16S752J
S 910 Spring Switch	CSN1033	R 205	RS1/16S752J
IL 901 Lamp 60mA 8V	CEL1526	R 206	RS1/16S101J
IL 902 Lamp 60mA 8V	CEL1526	R 250	RS1/16S331J
IL 903 Lamp 60mA 8V	CEL1568	R 251	RS1/16S331J
IL 904 Lamp 60mA 8V	CEL1568	R 252	RS1/16S331J
		R 253	RS1/16S331J
		R 254	RS1/16S331J
RESISTORS			
R 901	RS1/10S561J	R 255	RS1/16S471J
R 902	RS1/10S561J	R 256	RS1/16S471J
R 903	RS1/10S561J	R 259	RS1/16S221J
R 904	RS1/10S561J	R 263	RS1/16S471J
R 910	RS1/8S511J	R 269	RS1/16S0R0J
R 911	RS1/8S511J	R 274	RS1/16S471J
R 912	RS1/8S511J	R 277	RS1/16S471J
R 913	RS1/8S511J	R 301	RS1/16S103J
R 914	RS1/8S511J	R 302	RS1/16S153J
R 915	RS1/8S511J	R 303	RS1/16S103J
R 916	RS1/8S511J	R 304	RS1/16S273J
R 917	RS1/8S511J	R 305	RS1/16S103J
R 918	RS1/8S511J	R 306	RS1/16S752J
R 919	RS1/8S511J	R 307	RS1/16S103J
R 920	RS1/8S511J	R 308	RS1/16S103J
R 921	RS1/8S511J	R 309	RS1/16S471J
R 931	RS1/8S510J	R 311	RS1/16S471J
R 932	RS1/8S510J		
R 934	RS1/10S223J	CAPACITORS	
R 935	RS1/10S102J	C 101	CEV101M6R3
R 936	RS1/10S103J	C 102	CKSQYB104K16
R 937	RS1/10S362J	C 103	CEV470M6R3
R 938	RS1/10S472J	C 104	CKSQYB334K16
		C 105	CCSRCH240J50
CAPACITORS			
C 901	CKSQYB104K50	C 106	CKSRYB222K50
		C 107	CEV4R7M35
		C 108	CKSRYB273K25
		C 109	CCSRCH101J50
		C 110	CKSQYB104K16
MISCELLANEOUS			
IC 101 IC	UPC2572GS	C 111	CKSRYB332K50
IC 201 IC	UPD63702AGF	C 112	CKSQYB473K16
IC 301 IC	BA5986FM	C 113	CKSRYB103K25
Q 101 Transistor	2SD1664	C 114	CKSRYB391K50
Q 102 Transistor	UMD2N	C 115	CCSRCH121J50
D 301 Diode	1SR154-400	C 116	CKSRYB682K50
X 201 Ceramic Resonator 16.934MHz	CSS1457	C 117	CKSRYB333K16
EF 201 Filter	CCG1076	C 118	CKSQYB334K16
		C 119	CKSQYB334K16
		C 120	CKSQYB334K16
RESISTORS			
R 101	RS1/8S100J	C 121	CKSQYB334K16
R 102	RS1/8S120J	C 122	CKSQYB104K16
R 104	RS1/16S822J	C 123	CKSRYB472K50
R 105	RS1/16S682J	C 124	CKSQYB104K16
R 106	RS1/16S183J	C 125	CCSRCH5R0C50
R 107	RS1/16S822J	C 126	CKSRYB153K25
R 108	RS1/16S333J	C 127	CKSRYB102K50
R 109	RS1/16S683J	C 201	CKSQYB334K16
R 110	RS1/16S134J	C 202	CKSQYB104K16
R 111	RS1/16S273J	C 203	CKSQYB104K16

====Circuit Symbol and No.====Part Name	Part No.
C 204	CKSRYP471K50
C 207	CKSQYB683K16
C 208	CKSRYP821K50
C 209	CKSRYP273K25
C 210	CKSQYB334K16
C 211	CKSQYB334K16
C 212	CKSQYB334K16
C 213 22μF/6.3V	CCH1300
C 301	CEV101M10
C 302	CEV101M10

D Unit Number : CWX2203
Unit Name : CD Core Unit(STS Unit)

MISCELLANEOUS

IC 501 IC	CXD2511R
IC 502 IC	MSM514400DP-60TS
IC 601 IC	AK4321VF
IC 701 IC	BA05SFP
IC 801 IC	LB1836M
IC 802 IC	LB1836M
Q 801 Transistor	DTA123JK
Q 802 Transistor	UN2211
D 701 Diode	1SR154-400
D 702 Diode	1SR154-400
D 703 Diode	1SS355
D 704 Diode	1SS355
D 705 Diode	1SS355
D 706 Diode	1SS355
D 707 Diode	1SS355
D 708 Diode	1SS355
S 801 Spring Switch(LOAD)	CSN1052
S 802 Spring Switch(DOOR)	CSN1052
S 803 Spring Switch(MODE)	CSN1052
EF 701 Filter	CCG1051
EF 702 Filter	CCG1051

RESISTORS

R 501	RS1/16S102J
R 502	RS1/16S202J
R 503	RS1/16S392J
R 504	RS1/16S822J
R 505	RS1/16S163J
R 506	RS1/16S512J
R 507	RS1/16S182J
R 508	RS1/16S222J
R 509	RS1/16S102J
R 510	RS1/16S102J
R 511	RS1/16S102J
R 512	RS1/16S102J
R 513	RS1/16S102J
R 514	RS1/16S471J
R 601	RS1/16S101J
R 602	RS1/16S101J
R 603	RS1/16S471J
R 604	RS1/16S471J
R 701	RS1/10S0R0J
R 702	RS1/10S100J
R 716	RS1/16S471J
R 717	RS1/16S471J
R 718	RS1/16S471J
R 801	RS1/10S102J

CAPACITORS

C 501	CKSQYB334K16
C 502	CKSQYB334K16
C 503	CKSQYB334K16
C 504	CCSRCH471J50
C 506	CCSRCH221J50

====Circuit Symbol and No.====Part Name	Part No.
C 601	CKSQYB334K16
C 602	CCSRCH221J50
C 603	CKSQYB334K16
C 604	CKSQYB334K16
C 605 22μF/6.3V	CCH1300
C 606	CKSQYB334K16
C 701 22μF/6.3V	CCH1300
C 702	CEVL101M6R3
C 703	CKSQYB334K16
C 704	CKSQYB334K16
C 801	CKSQYB104K25
C 802	CKSQYB104K25
C 803	CEVL220M16

E Unit Number :
Unit Name : Motor PCB(B)

M 4	Motor Unit(Carriage)	CXB3178
M 5	Motor(Spindle)	CXM1120

F Unit Number :
Unit Name : Motor PCB(A)

Q 1	Photo-interrupter	RPI-221
M 1	Motor Unit(Cam Gear)	CXB3174
M 3	Motor Unit(ELV)	CXB3175

G Unit Number :
Unit Name : PCB Unit(D)

Q 851	Photo-transistor	CPT230SCTD(CD)
Q 852	Photo-transistor	CPT230SCTD(CD)

H Unit Number :
Unit Name : PCB Unit(B)

S 886	Spring Switch(ELV Home)	CSN1052
S 887	Spring Switch(Clamp)	CSN1051

I Unit Number :
Unit Name : PCB Unit(E)

R 856	RS1/8S911J
R 857	RS1/8S821J

J Unit Number :
Unit Name : PCB Unit(C)

Q 881	Photo-transistor	CPT230SCTD(CD)
D 883	Chip LED	CL202IRXTU
S 885	Spring Switch(MAX)	CSN1052

K Unit Number :
Unit Name : Load Motor PCB

M 2	Motor Unit(Load)	CXB3177
-----	------------------	---------

L Unit Number :
Unit Name : PCB Unit(A)

D 891	Chip LED	CL202IRXTU
D 892	Chip LED	CL202IRXTU

Miscellaneous Parts List

Pickup Unit(Service)(P8)	CXX1311
--------------------------	---------