


EXPLODED VIEW (UNIT)

Block No.M1MM

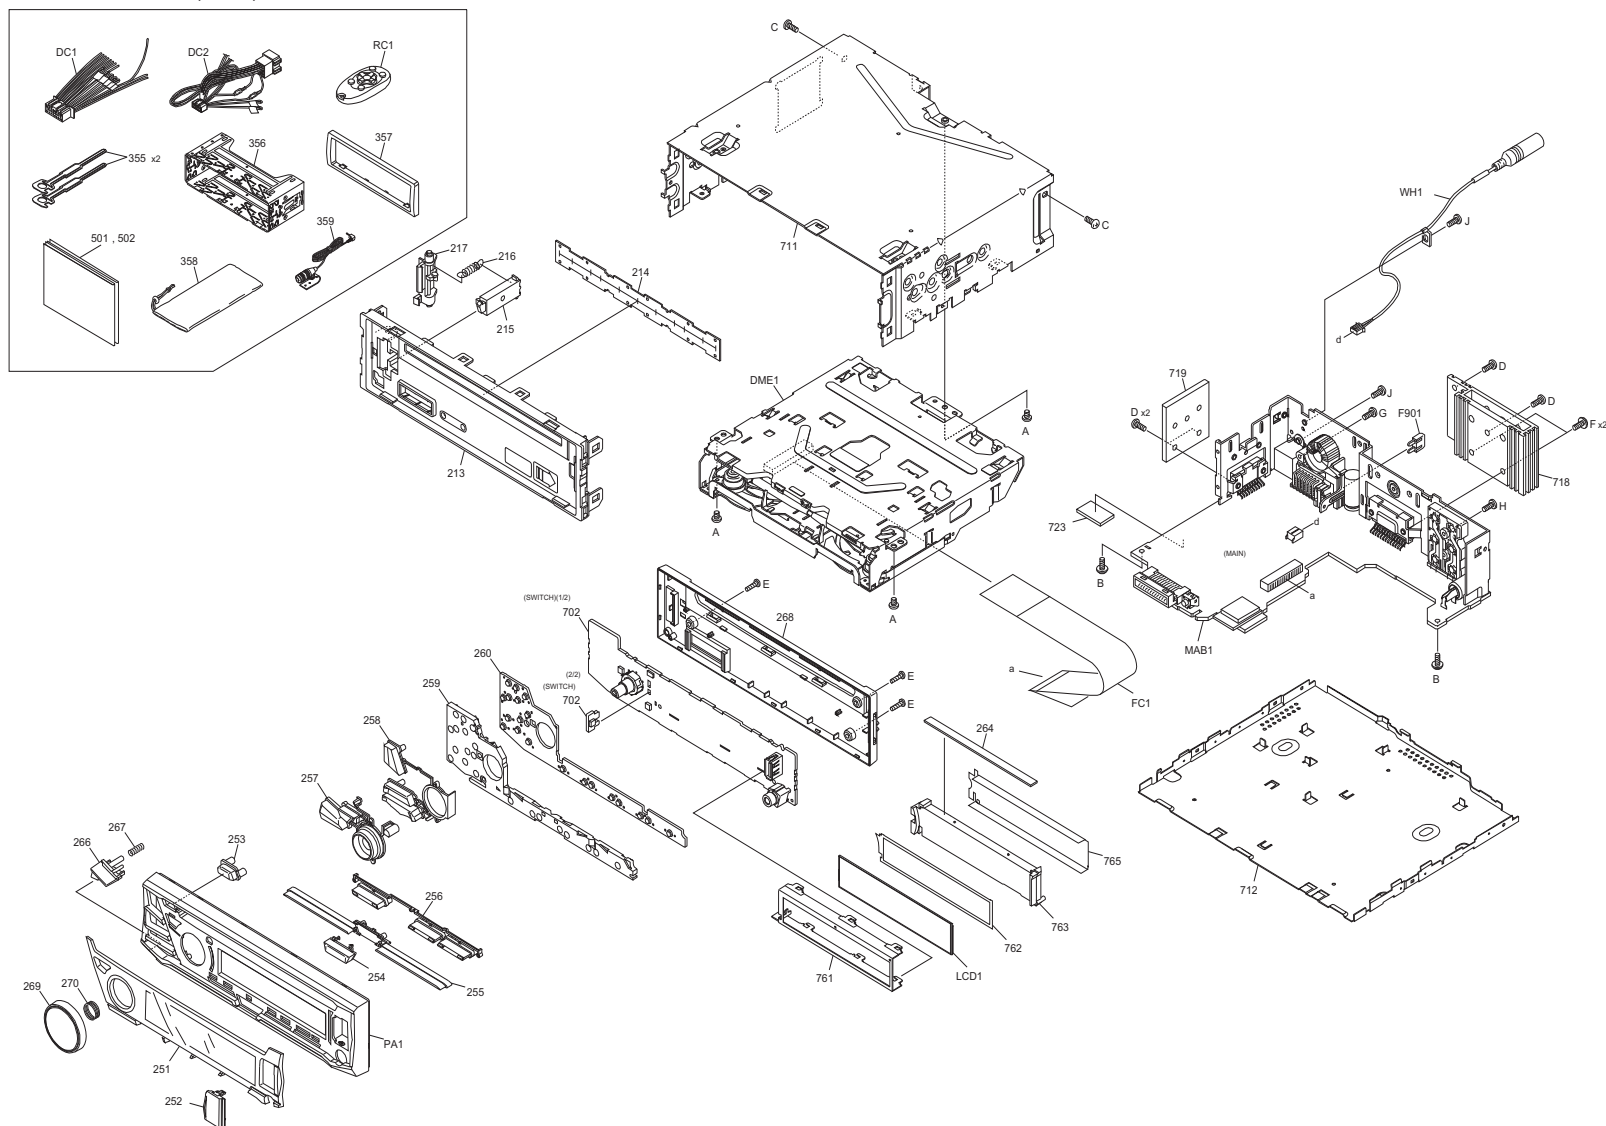

No.MA618

Parts with the exploded numbers larger than 700 are not supplied.

created date:2016-03-23

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (UNIT) <M1MM>

△	DC1	QAM1331-001	DC CORD		1	A,C,D,E,G,J,K,L
△	DC2	QAM1343-002	DC CORD		1	B,F,H
△	DC2	QAM1378-001	DC CORD		1	I
	DME1	XJJ-0410-00	CD MECHANISM		1	
△	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	WJT0307-001A-E	E-CARD WIRE		1	
	LCD1	B3H-0029-00	LCD		1	
	MAB1	CB-J1127010KN	MAIN PWB ASSY	XJ1-1270-10	1	A
	MAB1	CB-J1127271EN	MAIN PWB ASSY	XJ1-1272-71	1	B,F
	MAB1	CB-J1127411H2N	MAIN PWB ASSY	XJ1-1274-11	1	C
	MAB1	CB-J1127021MN	MAIN PWB ASSY	XJ1-1270-21	1	D
	MAB1	CB-J1127022M2N	MAIN PWB ASSY	XJ1-1270-22	1	E
	MAB1	CB-J1127011KN	MAIN PWB ASSY	XJ1-1270-11	1	G,K,L
	MAB1	CB-J1127272EN	MAIN PWB ASSY	XJ1-1272-72	1	H
	MAB1	CB-J1127012KN	MAIN PWB ASSY	XJ1-1270-12	1	J
	PA1	A6D-0054-00	PANEL		1	A,B,C,D,E,F,G,H,J,K,L
	PA1	A6D-0054-02	PANEL		1	I
	RC1	RM-RK52M	REMOCON UNIT		1	A,C,D,E,G,I,J,K,L
	WH1	E3A-0212-00	CORD W.CON.		1	J
	A	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	B	GE40377-002A	SPECIAL SCREW		2	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	D	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	4	
	E	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	3	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSPSG3008ZA	TAP SCREW	M3 x 8mm	1	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	J	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	J
	213	A2C-0021-00	SUB PANEL		1	A,B,C,D,E,F,G,H,J,K,L
	213	A2C-0021-05	SUB PANEL		1	I
	214	F1K-0035-00	BLIND PLATE		1	
	215	D1A-0023-00	LEVER		1	A,B,C,D,E,F,G,H,J,K,L
	215	D1A-0023-01	LEVER		1	I
	216	G0A-0027-00	EXTEN.SPRING		1	
	217	D1A-0022-00	LEVER		1	A,B,C,D,E,F,G,H,J,K,L
	217	D1A-0022-01	LEVER		1	I
	251	B1A-0035-0G	FRONT GLASS		1	A
	251	B1A-0035-0J	FRONT GLASS		1	B
	251	B1A-0035-0H	FRONT GLASS		1	C,D,E
	251	B1A-0036-01	FRONT GLASS		1	F
	251	B1A-0035-0K	FRONT GLASS		1	G
	251	B1A-0035-0M	FRONT GLASS		1	H
	251	B1A-0035-0Y	FRONT GLASS		1	I
	251	B1A-0036-02	FRONT GLASS		1	J
	251	B1A-0036-05	FRONT GLASS		1	K
	251	B1A-0036-08	FRONT GLASS		1	L
	252	F0G-0101-00	COVER		1	A,B,C,D,E,F,G,H,J,K,L
	252	F0G-0101-01	COVER		1	I
	253	K2E-0027-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,J,K,L
	253	K2E-0027-01	PUSH KNOB		1	I
	254	K2E-0032-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,J,K,L
	254	K2E-0032-01	PUSH KNOB		1	I
	254	K2E-0034-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,J,K,L
	255	K2E-0034-01	PUSH KNOB		1	I
	256	K2F-0033-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,J,K,L
	256	K2F-0033-01	PUSH KNOB		1	I
	257	K2F-0036-02	PUSH KNOB		1	A,B,C,D,E,F,G,H,J,K,L
	257	K2F-0036-06	PUSH KNOB		1	I
	258	K2F-0031-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,J,K,L
	258	K2F-0031-01	PUSH KNOB		1	I
	259	B1K-0040-02	LIGHTING BOARD		1	A,B,C,D,E,F,G,H,J,K,L
	259	B1K-0040-03	LIGHTING BOARD		1	I
	260	E2K-0025-00	CONDUCT RUBBER		1	
	264	E2K-0036-00	CONDUCT RUBBER		1	
	266	K2E-0029-00	PUSH KNOB		1	A,B,C,D,E,F,G,H,J,K,L
	266	K2E-0029-02	PUSH KNOB		1	I
	267	G0A-0056-00	COMP.SPRING		1	
	268	A4G-0029-00	REAR COVER		1	A,B,C,D,E,F,G,H,J,K,L
	268	A4G-0029-01	REAR COVER		1	I
	269	K2K-0167-00	KNOB		1	A,B,C,D,E,F,G,H,J,K,L
	269	K2K-0167-03	KNOB		1	I
	270	G0A-0056-01	COMP.SPRING		1	
	355	GE40685-001A	HOOK		2	
	356	GE20362-002A	MOUNTING SLEEVE		1	
	357	BOH-0015-10	ESCUTCHEON		1	A,B,C,D,E,F,G,H,J,K,L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
357		B0H-0015-12	ESCUTCHEON		1	I
358		GE40521-001A	CARRYING CASE		1	C,D,E,I
359		QAN0109-001	MICROPHONE		1	
501		B5A-0813-10	INST.MANUAL	ENG FRE SPA	1	A,G,J,K
501		B5A-0816-00	INST.MANUAL	ENG FRE GER RUS	1	B,F,H
501		B5A-0814-01	INST.MANUAL	KOR	1	C
501		B5A-0814-00	INST.MANUAL	ENG PER THA ARA	1	D
501		B5A-0815-00	INST.MANUAL	ENG FRE RUS TUR	1	E
501		B5A-0838-00	INST.MANUAL	POR	1	I
501		B5A-1266-00	INST.MANUAL	ENG FRE SPA	1	L
502		B5A-0816-01	INST.MANUAL	SPA ITA POR DUT	1	B,F,H
502		B5A-0814-02	INST.MANUAL	CHI(TAIWAN)	1	C
502		B5A-0815-01	INST.MANUAL	PER ARA	1	E
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	A,C,D,E
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	B,F
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	G,J,K,L
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	H
702		-----	SWITCH PWB ASSY	NO SERVICE PART	1	I
711		-----	TOP COVER	NO SERVICE PART	1	A,C,D,E,G,J,K,L
711		-----	TOP COVER	NO SERVICE PART	1	B,F,H
711		-----	TOP COVER	NO SERVICE PART	1	I
712		-----	BOTTOM PLATE	NO SERVICE PART	1	A,B,C,D,E,F,G,H,J,K,L
712		-----	BOTTOM PLATE	NO SERVICE PART	1	L
718		-----	HEAT SINK	NO SERVICE PART	1	
719		-----	REG HEAT SINK	NO SERVICE PART	1	
723		-----	COOL SHEET	NO SERVICE PART	1	
761		-----	LCD CASE	NO SERVICE PART	1	
762		-----	OPTI.DIFFUSER	NO SERVICE PART	1	
763		-----	LIGHTING BOARD	NO SERVICE PART	1	
765		-----	REF.SHEET	NO SERVICE PART	1	


EXPLODED VIEW (CD MECHANISM: XJJ-0410-00)

Block No.MBMM

Grease

★ JVS-1003

● W01-2067-08

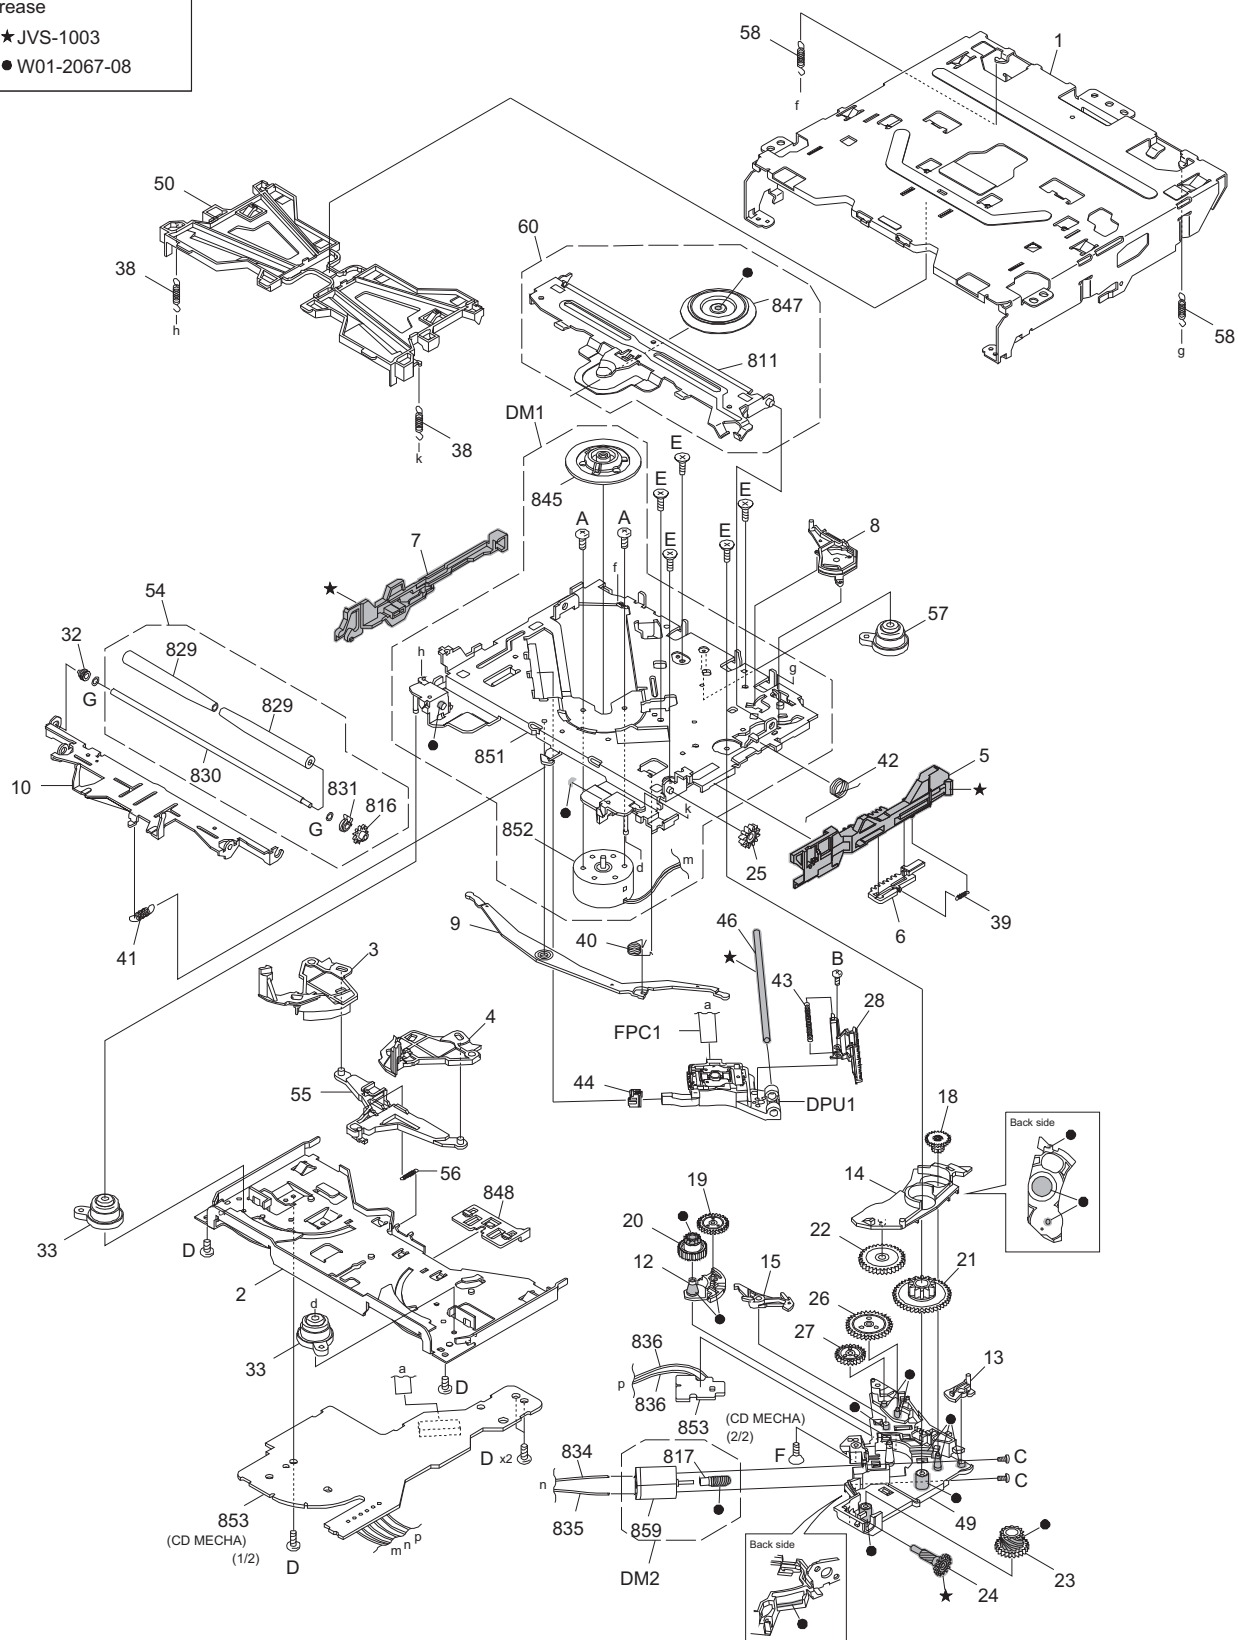

Parts with the exploded numbers larger than 800 are not supplied.

No.MA618

created date:2016-03-23

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (CD MECHANISM: XJJ-0410-00) <MBMM>

DM1	CM-FC2-MD	MD CHASSIS ASSY		1
DM2	CM-FC2-M	LOADING MOTOR ASSY		1
DPU1	T2F-0002-00	CD OPT PICKUP		1
FPC1	QAL1465-001	FPC		1
A	LV45568-001A	MINI SCREW		2
B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1
C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2
D	VKZ4539-054	MINI SCREW		5
E	LV45818-001A	G.HOLDER SCREW		5
F	LV45815-001A	M. SHAFT SCREW		1
G	LV45816-001A	ROLLER WASHER		2
1	LV11877-003A	OUTER CHASSIS		1
2	LV11878-004A	LOWER CHASSIS		1
3	LV3A174-002A	DISC ARM L		1
4	LV3A175-001A	DISC ARM R		1
5	LV23057-001A	SLIDER R		1
6	LV3A178-001A	TRIGGER SLIDER		1
7	LV23058-001A	SLIDER L		1
8	LV3A179-002A	TRIGGER ARM		1
9	LV3A173-001A	JOINT LEVER		1
10	LV23055-003A	ROLLER LEVER		1
12	LV3A181-002A	TRANSFER ARM		1
13	LV45797-002A	SL LOCK CAM		1
14	LV3A182-003A	SL LOCK ARM		1
15	LV3A183-001A	PICK LOCK ARM		1
18	LV3A187-002A	HELICAL GEAR 1		1
19	LV3A188-001A	TRANSFER GEAR		1
20	LV3A189-001A	LOAD GEAR H		1
21	LV3A190-001A	DRIVE GEAR		1
22	LV3A191-001A	JOINT GEAR		1
23	LV3A192-001A	WORM GEAR 2		1
24	LV3A193-001A	HELICAL GEAR 2		1
25	LV3A194-001A	LOAD GEAR V		1
26	LV3A195-001A	PICK GEAR 1		1
27	LV3A196-001A	PICK GEAR 2		1
28	LV3A197-001A	RACK GEAR		1
32	LV45796-001A	R.RETAINER L		1
33	D3K-0002-00	DAMPER		2
38	LV45809-001A	FLOAT SPRING(F)		2
39	LV45810-001A	TRIGGER SPRING		1
40	LV45811-001A	LOAD SPRING		1
41	LV45812-001A	ROLLER SPRING		1
42	LV45813-002A	CLAMP SPRING		1
43	LV45814-001A	PICK SPRING		1
44	LV36813-201A	SUB GUIDE CAP		1
46	LV44555-001A	MAIN SHAFT		1
49	LV11881-002A	GEAR HOLDER		1
50	LV11880-003A	DISC GUIDE		1
54	CM-FC2-R	ROLLER ASSY		1
55	D10-7176-03	ARM		1
56	G01-4809-04	EXTEN.SPRING		1
57	D3K-0003-00	DAMPER		1
58	LV45835-001A	FLOAT SPRING(R)		2
60	LV3A271-001A	CL BASE ASSY		1
811	-----	CLAMP ARM	NO SERVICE PART	1
816	-----	ROLLER GEAR	NO SERVICE PART	1
817	-----	WORM GEAR 1	NO SERVICE PART	1
829	-----	ROLLER	NO SERVICE PART	2
830	-----	ROLLER SHAFT	NO SERVICE PART	1
831	-----	R.RETAINER R	NO SERVICE PART	1
834	-----	SIN TWIST WIRE	NO SERVICE PART	1
835	-----	SIN TWIST WIRE	NO SERVICE PART	1
836	-----	SIN TWIST WIRE	NO SERVICE PART	2
845	-----	HC TURN TABLE	NO SERVICE PART	1
847	-----	CLAMPER	NO SERVICE PART	1
848	-----	WIRE HOLDER	NO SERVICE PART	1
851	-----	MD CHASSIS ASSY	NO SERVICE PART	1
852	-----	SPINDLE MOTOR	NO SERVICE PART	1
853	-----	CD PWB ASSY	NO SERVICE PART	1
859	-----	MOTOR	NO SERVICE PART	1

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

MAIN PWB ASSY (XJ1-127x-xx) <XJ1>

	IC101	TC74HCT4053FT	MOS IC		1	J
	IC102	NJM8065V	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC161	NJM8065V	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC162	NJM8065V	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC163	NJM8065V	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC164	NJM11100F1	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC220	NJM8065V	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
△	IC301	JCV8034	IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC411	MF1337S395901	MCU IC		1	G,H,J,K,L
	IC470	TC7SH08FU-X	IC(DIGITAL)		1	J
	IC540	BD2242G-G	MOS IC		1	A,B,C,D,E,F,G,H,J,K,L
△	IC601	TEF6657HN-X	IC		1	A,B,C,D,E,F,G,H,J,K,L
△	IC701	STA1080	MPU IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC702	TC7SH08FU-X	IC(DIGITAL)		1	A,B,C,D,E,F,G,H,J,K,L
△	IC821	W3F-0138-00	ROM IC		1	A,B,C,D,E,F,G,H,J,K,L
△	IC822	E25QH16A104HI	ROM IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC831	BU4228F-W	IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC841	BR24T02FJ-W-X	IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC851	BD00IA5WEFJ	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC862	MP9943AGQ	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
△	IC901	LV5685PV-H	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC930	BD33IC0WEFJ	ANALOG IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC941	BU33TD3WG-W	IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC941	BU33TD3WG	MOS IC		1	L
	IC1303	W0C-0167-00	CIRCUIT MODULE		1	A,B,C,D,E,F,G,H,J,K,L
	Q220	2SC1623/5-6/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q240	IMX9	DUAL TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q270	LTA024EEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q271	LSAR523UBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q272	LTC024EEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q273	LTA024EEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q360	LSCR523UBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q370	IMX9	DUAL TRANSISTOR		1	E,G,H,J,K,L
	Q380	IMX9	DUAL TRANSISTOR		1	E,G,H,J,K,L
	Q470	LTC014EEBFS8	DIGI TRANSISTOR		1	J
	Q471	LTC043TEB-X	DIGI TRANSISTOR		1	J
	Q880	LTC043EUBFS8	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q920	LTA014YEBFS8	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q2001	LTA043EEBFS8	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q2002	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q2010	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q2011	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q2020	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q2021	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q2030	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q2031	LTC043TEB-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	D100	DZ2J075M	ZENER DIODE		1	A,B,C,D,E,F,G,H,J,K,L
	D101	DZ2J075M	ZENER DIODE		1	A,B,C,D,E,F,G,H,J,K,L
	D220	DZ2J068M	ZENER DIODE		1	J
	D221	DZ2J068M	ZENER DIODE		1	J
	D222	DZ2J056M	ZENER DIODE		1	A,B,C,D,E,F,G,H,J,K,L
	D271	BAW56-TP-X	SI DIODE		1	A,B,C,D,E,F,G,H,J,K,L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	D273	DA2J101	DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D360	DZ2J068M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D390	MBRX130	SCHOTTKY DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D391	MBR0530-X	SB DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D400	RB521SM-30-X	SB DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D401	DZ2J051M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D471	RSB6.8SM-X	BP Z DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D472	RSB6.8SM-X	BP Z DIODE		1	L J	
	D473	RSB6.8SM-X	BP Z DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D474	RSB6.8SM-X	BP Z DIODE		1	L J	
	D475	DZ2J068M	ZENER DIODE		1	L J	
	D476	DZ2J068M	ZENER DIODE		1	L J	
	D701	DZ2J051M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D702	DZ2J051M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D704	DZ2J051M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D706	DZ2J051M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D707	DZ2J051M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D709	DZ2J051M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D710	DZ2J051M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D711	DZ2J051M	ZENER DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D862	DB22306	SCHOTTKY DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D902	SK34A-L-X	SB DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D903	SK34A-L-X	SB DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D930	GS1J-LTP-X	SI DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
△	D930	GS1J-LTP	DIODE		1	L	
	D990	1N5401-BPC04	SI DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D2005	DA2J101	DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D2006	DA2J101	DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D2008	DA2J101	DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	D2009	DA2J101	DIODE		1	L A,B,C,D,E,F,G,H,J,K,	
	C103	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C104	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C105	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C106	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C120	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,	
	C121	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,	
	C122	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C123	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C124	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	L A,B,C,D,E,F,G,H,J,K,	
	C125	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	L A,B,C,D,E,F,G,H,J,K,	
	C126	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C127	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C146	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C160	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C161	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C162	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,	
	C163	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,	
	C164	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,	
	C165	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C166	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C167	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C169	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C170	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C171	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C172	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C173	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C174	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C175	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C176	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C177	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C179	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C180	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C181	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C182	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C183	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C184	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C185	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C186	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C187	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C189	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C190	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C191	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C192	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C193	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C194	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C195	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C196	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C197	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C198	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C222	CK73GBB1H333K	C CAPACITOR	0.033uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C223	CK73GBB1H333K	C CAPACITOR	0.033uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C224	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C225	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C226	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C227	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C228	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C229	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C230	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C231	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C234	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C235	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C236	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C237	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C251	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C261	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C273	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	A,B,C,D,E,F,G,H,J,K, L
	C311	CK73FBB0J475K	C CAPACITOR	4.7uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C321	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	E,G,H,J,K,L
	C331	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	E,G,H,J,K,L
	C341	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	J
	C351	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	J
	C360	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C361	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C402	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C410	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	G,H,J,K,L
	C472	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C473	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	J
	C474	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	J
	C475	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	J
	C540	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C541	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C542	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C603	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C604	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C606	CC73HCH1H090D	C CAPACITOR	9pF 50V D	1	A,B,C,D,E,F,G,H,J,K, L
	C607	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	A,B,C,D,E,F,G,H,J,K, L
	C608	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C609	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C610	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C611	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	A,B,C,D,E,F,G,H,J,K, L
	C612	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C614	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C616	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C617	CK73HBB0J224K	C CAPACITOR	0.22uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C618	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C619	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C620	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C621	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C702	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C703	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C704	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C705	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C706	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C707	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	A,B,C,D,E,F,G,H,J,K, L
	C708	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C709	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	A,B,C,D,E,F,G,H,J,K, L
	C710	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C711	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C713	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C714	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C716	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C719	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C720	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C722	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C724	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C725	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C726	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C727	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C728	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C729	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C730	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C731	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C733	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C735	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C736	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1	A,B,C,D,E,F,G,H,J,K, L
	C737	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1	A,B,C,D,E,F,G,H,J,K, L
	C738	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C740	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C741	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	A,B,C,D,E,F,G,H,J,K, L
	C742	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C750	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C756	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C757	CC73HCH1H330J	C CAPACITOR	33pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C821	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C824	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C830	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C831	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C840	CK73GBB1C473K	C CAPACITOR	0.047uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C851	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C868	QE20850-157Z	E CAPACITOR	150uF	1	A,B,C,D,E,F,G,H,J,K, L
	C871	CK73HBB0J224K	C CAPACITOR	0.22uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C873	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C876	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C878	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C880	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C881	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C883	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C903	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	A,B,C,D,E,F,G,H,J,K, L
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	A,B,C,D,E,F,G,H,J,K, L
	C906	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	L A,B,C,D,E,F,G,H,J,K,
	C908	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	L A,B,C,D,E,F,G,H,J,K,
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C912	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	L A,B,C,D,E,F,G,H,J,K,
	C914	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	L A,B,C,D,E,F,G,H,J,K,
	C916	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C930	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C931	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	L A,B,C,D,E,F,G,H,J,K,
	C932	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	L A,B,C,D,E,F,G,H,J,K,
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	L A,B,C,D,E,F,G,H,J,K,
	C941	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C942	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,
	C990	QE20981-228	E CAPACITOR	2200uF	1	L A,B,C,D,E,F,G,H,J,K,
	C1003	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C1010	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,C,D,E,G,K,L
	C1011	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,C,D,E,G,K,L
	C1012	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,C,D,E,G,K,L
	C1013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,C,D,E,G,K,L
	C1014	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,C,D,E,G,K,L
	C1015	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,C,D,E,G,K,L
	C1016	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,C,D,E,G,K,L
	C1017	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,C,D,E,G,K,L
	C1020	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,
	C1300	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	L A,B,C,D,E,F,G,H,J,K,
	C1301	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C1600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C1601	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C1602	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C1603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C1604	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C1900	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2003	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2005	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2006	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	L
	C2007	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2010	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2011	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2012	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2014	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2015	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2016	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2017	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2018	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2019	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2021	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2022	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2023	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2024	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2025	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2026	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	L A,B,C,D,E,F,G,H,J,K,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C2029	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	L A,B,C,D,E,F,G,H,J,K,
	C2030	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	L A,B,C,D,E,F,G,H,J,K,
	C2031	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2032	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2033	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2034	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2035	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2036	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2038	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2039	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2040	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	L A,B,C,D,E,F,G,H,J,K,
	C2041	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2042	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2043	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2044	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2045	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2047	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2048	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2049	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2050	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2051	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2052	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2055	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2056	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2058	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2060	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2061	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2062	CK73EBB1E105K	C CAPACITOR	1uF 25V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2063	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2064	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2065	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2066	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2067	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2069	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2070	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	C2072	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2073	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	L A,B,C,D,E,F,G,H,J,K,
	C2074	CK73EBB1E105K	C CAPACITOR	1uF 25V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2077	CK73EBB1E105K	C CAPACITOR	1uF 25V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2080	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	L A,B,C,D,E,F,G,H,J,K,
	C2081	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2083	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2086	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2087	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2088	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	L A,B,C,D,E,F,G,H,J,K,
	C2089	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	L A,B,C,D,E,F,G,H,J,K,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C2090	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2091	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2092	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2093	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2094	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2095	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2096	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2097	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2098	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2099	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2100	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2101	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2102	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2103	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2105	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2106	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2107	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2108	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2109	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2110	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C2111	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2112	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C2114	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2115	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2116	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2117	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,J,K, L
	C2118	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	A,B,C,D,E,F,G,H,J,K, L
	C2120	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	C2121	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,J,K, L
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R105	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,K,L
	R106	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,K,L
	R107	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,K,L
	R110	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	J
	R111	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	J
	R112	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	J
	R113	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	J
	R114	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	J
	R115	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	J
	R120	RK73HB1J913J	MG RESISTOR	91kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R121	RK73HB1J913J	MG RESISTOR	91kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R122	RK73HB1J913J	MG RESISTOR	91kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R123	RK73HB1J913J	MG RESISTOR	91kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R124	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R125	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R126	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R127	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R146	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R147	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R148	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R149	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R150	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R151	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R152	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R153	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	L E,G,H,J,K,L
	R154	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R155	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	L E,G,H,J,K,L
	R156	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R157	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R158	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R159	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R160	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R161	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R162	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R163	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R164	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R165	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R166	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R167	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R168	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	L J
	R169	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R170	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R171	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R172	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R173	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R174	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R175	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R176	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R177	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R178	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R179	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R180	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R181	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R182	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R183	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R184	RK73GH2A392D	MG RESISTOR	3.9kΩ 1/10W D	1	L A,B,C,D,E,F,G,H,J,K,
	R185	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R186	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R187	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R188	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R189	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R190	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R191	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R192	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	L J
	R193	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R194	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R195	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R196	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R197	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R198	RK73GH2A102D	MG RESISTOR	1kΩ 1/10W D	1	A,B,C,D,E,F,G,H,J,K,L
	R199	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R200	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R201	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R221	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R222	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R223	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R224	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R225	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R226	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R227	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R229	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R230	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R231	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R232	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R233	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R234	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R236	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R237	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R238	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R239	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R240	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R250	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R251	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R254	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R260	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R262	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R264	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R272	RK73HB1J303J	MG RESISTOR	30kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R273	RK73EB2E223J	MG RESISTOR	22kΩ 1/4W J	1	A,B,C,D,E,F,G,H,J,K,L
	R302	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R303	RK73EB2E3R0J	MG RESISTOR	3Ω 1/4W J	1	A,B,C,D,E,F,G,H,J,K,L
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	E,G,H,J,K,L
	R321	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E,G,H,J,K,L
	R322	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E,G,H,J,K,L
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	E,G,H,J,K,L
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	E,G,H,J,K,L
	R331	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	E,G,H,J,K,L
	R332	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	E,G,H,J,K,L
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	E,G,H,J,K,L
	R340	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	J
	R341	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	J
	R342	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R343	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	J
	R350	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	J
	R351	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	J
	R352	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	J
	R353	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	J

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R360	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R361	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R362	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R363	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R364	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	A,B,C,D,E,F,G,H,J,K,L
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R402	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R410	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	G,H,J,K,L
	R411	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	G,H,J,K,L
	R412	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	G,H,J,K,L
	R413	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	G,H,J,K,L
	R414	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	G,H,J,K,L
	R467	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	J
	R468	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	J
	R469	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	J
	R471	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	J
	R472	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	J
	R473	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	J
	R474	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	1	J
	R475	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	J
	R476	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	J
	R477	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	J
	R540	RK73GH2A123D	MG RESISTOR	12kΩ 1/10W D	1	A,B,C,D,E,F,G,H,J,K,L
	R542	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R543	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R600	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	A,B,C,D,E,F,G,H,J,K,L
	R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R602	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R603	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R604	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R605	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R611	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R680	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R682	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R683	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R684	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R685	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R690	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R691	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R702	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R703	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R704	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R705	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R709	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R710	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R711	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R712	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R713	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R714	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R715	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R718	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	R721	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R723	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R725	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R726	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R730	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R731	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R734	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R737	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R739	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R740	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R742	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R743	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R744	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R746	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R748	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R750	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R752	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R755	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R756	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R768	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	B,E,F,H
	R768	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	C,D
	R769	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,G,J,K,L
	R769	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	B,E,F,H
	R769	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	C,D
	R770	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	C,G,H,K,L
	R770	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	J
	R771	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	A,B,D,E,F
	R771	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	C,G,H,K,L
	R771	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	J
	R772	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R777	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R778	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R781	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R782	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R783	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R785	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R788	RK73GH2A823D	MG RESISTOR	82kΩ 1/10W D	1	A,B,C,D,E,F,G,H,J,K, L
	R789	RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D	1	A,B,C,D,E,F,G,H,J,K, L
	R790	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R792	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R794	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R795	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R796	RK73GH2A302D	MG RESISTOR	3kΩ 1/10W D	1	A,B,C,D,E,F,G,H,J,K, L
	R797	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R798	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R799	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R800	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R801	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R802	RK73HB1J203J	MG RESISTOR	20kΩ 1/16W J	1	B,F,H
	R803	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	A,C,D,E,G,J,K,L
	R805	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R806	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R808	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R809	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R820	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R823	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R824	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R827	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R828	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R829	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R830	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R840	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R841	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R842	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R850	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	L A,B,C,D,E,F,G,H,J,K,
	R851	RK73HH1J243D	MG RESISTOR	24kΩ 1/16W D	1	L A,B,C,D,E,F,G,H,J,K,
	R868	RK73GB2A512J	MG RESISTOR	5.1kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R869	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R871	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R872	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R873	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	L A,B,C,D,E,F,G,H,J,K,
	R875	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	L A,B,C,D,E,F,G,H,J,K,
	R876	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	L A,B,C,D,E,F,G,H,J,K,
	R878	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R880	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R889	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R905	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R940	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	1	L A,B,C,D,E,F,G,H,J,K,
	R980	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	L A,B,C,D,E,F,G,H,J,K,
	R981	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	L A,B,C,D,E,F,G,H,J,K,
	R982	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	L A,B,C,D,E,F,G,H,J,K,
	R984	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	L A,B,C,D,E,F,G,H,J,K,
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R1300	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R1302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R1303	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2001	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2003	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2004	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2005	RK73EB2E2R2J	MG RESISTOR	2.2Ω 1/4W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2007	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	J A,B,C,D,E,F,G,H,J,K,
	R2008	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2009	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2014	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2016	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2017	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,
	R2020	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	L A,B,C,D,E,F,G,H,K,L
	R2021	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	L A,B,C,D,E,F,G,H,K,L
	R2023	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	L A,B,C,D,E,F,G,H,K,L
	R2025	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	L A,B,C,D,E,F,G,H,K,L
	R2026	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	L A,B,C,D,E,F,G,H,K,L
	R2030	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	J A,B,C,D,E,F,G,H,K,L
	R2031	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	J
	R2032	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	J
	R2033	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	L A,B,C,D,E,F,G,H,J,K,

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R2034	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2038	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2039	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	L
	R2040	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	A,B,C,D,E,F,G,H,J,K, L
	R2042	RK73HB1J303J	MG RESISTOR	30kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2045	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2046	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2047	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2048	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2049	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2050	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2054	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2055	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2056	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2057	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2058	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2059	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2060	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2061	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2062	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2063	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2064	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2065	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2066	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2067	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2069	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2070	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2071	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2072	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2073	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2076	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2079	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2082	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2087	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2088	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2089	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	R2090	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K, L
	L411	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	A,B,C,D,E,F,G,H,J,K, L
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	A,B,C,D,E,F,G,H,J,K, L
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	A,B,C,D,E,F,G,H,J,K, L
	L602	LK73G0BER47K	M.CHIP INDUCTOR		1	A,B,C,D,E,F,G,H,J,K, L
	L603	NQLM93K-R10X	INDUCTOR	0.1uH K	1	A,B,C,D,E,F,G,H,J,K, L
	L604	LK73G0BE1R0K	M.CHIP INDUCTOR		1	A,B,C,D,E,F,G,H,J,K, L
	L605	LK73G0BER22K	M.CHIP INDUCTOR		1	A,B,C,D,E,F,G,H,J,K, L
	L606	LK73G0BER12K	M.CHIP INDUCTOR		1	A,B,C,D,E,F,G,H,J,K, L
	L607	LK73G0BER15K	M.CHIP INDUCTOR		1	A,B,C,D,E,F,G,H,J,K, L
	L701	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	A,B,C,D,E,F,G,H,J,K, L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L702	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	L703	LB73H0AY-004	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L704	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	L705	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	L706	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L707	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L811	LB73H0AY-004	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L821	LB73G0BK-006	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L822	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L824	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L825	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L826	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L827	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L828	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L829	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L830	LB73G0BK-006	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L831	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	L863	NQLL6EM-100X	INDUCTOR	10uH M	1	A,B,C,D,E,F,G,H,J,K, L
	L864	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	A,B,C,D,E,F,G,H,J,K, L
	L990	QQR1927-001	CHOKE COIL		1	A,B,C,D,E,F,G,H,J,K, L
	L2000	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L2001	LB73H0CT-002	CHIP FERRITE		1	A,B,C,D,E,F,G,H,J,K, L
	L2002	NQR0593-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	L2003	NQR0593-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	L2004	NQR0593-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	L2005	LR73Z0AD100M	CHIP INDUCTOR	10uH	1	A,B,C,D,E,F,G,H,J,K, L
	L2008	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	L2009	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	L2010	NQR0713-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,J,K, L
	CN220	QGA2001F1-02	W TO B CONNE	W-B (1-2)	1	J
	CN502	QGF1040F1-26	FFC/FPC CONNE	FFC/FPC (1-26)	1	A,B,C,D,E,F,G,H,J,K, L
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	A,B,C,D,E,F,G,H,J,K, L
	CN990	QNZ0607-001	CAR CONNECTOR		1	A,B,C,D,E,F,G,H,J,K, L
△	E2	QZW0010-001	STYLE PIN		1	J
	F1	F53-0513-08	PATTERN FUSE	4A	1	A,B,C,D,E,F,G,H,J,K, L
△	F2	F53-0513-08	PATTERN FUSE	4A	1	A,B,C,D,E,F,G,H,J,K, L
△	F3	FZA10BH-2R5	FUSE (CC)		1	A,B,C,D,E,F,G,H,J,K, L
	J220	E1B-0013-00	3.5D PHONE JACK		1	A,B,C,D,E,F,G,H,K,L
	J321	QNN0874-001	PIN JACK		1	A,B,C,D,F
	J321	QNN0868-001	PIN JACK		1	E,G,H,K,L
	J321	QNN0866-001	PIN JACK		1	J
	J470	QNZ0907-001	CIR CONNECTOR		1	J
	J600	QNB0356-001	ANT TERMINAL		1	A,B,C,D,E,F,G,H,J,K, L
	S830	QSW0648-001Z	TACT SWITCH		1	A,B,C,D,E,F,G,H,J,K, L
	VA600	NAF0024-001X	ESD SUPPRESSOR		1	A,B,C,D,E,F,G,H,J,K, L
	VA703	F0K-0010-00	SURGE ABSORBER		1	A,B,C,D,E,F,G,H,J,K, L
	VA705	F0K-0010-00	SURGE ABSORBER		1	A,B,C,D,E,F,G,H,J,K, L
	X600	QAX0969-001Z	CRYSTAL		1	A,B,C,D,E,F,G,H,J,K, L
	X701	L7J-0092-00	QUARTZ CRYSTAL		1	A,B,C,D,E,F,G,H,J,K, L
	X702	NAX1256-001X	CRYSTAL		1	A,B,C,D,E,F,G,H,J,K, L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

MAIN PWB ASSY (XJ1-1283-20) <XJ1>

	IC102	NJM8065V	ANALOG IC		1	
	IC161	NJM8065V	ANALOG IC		1	
	IC162	NJM8065V	ANALOG IC		1	
	IC163	NJM8065V	ANALOG IC		1	
	IC164	NJM11100F1	ANALOG IC		1	
	IC220	NJM8065V	ANALOG IC		1	
△	IC301	JCV8034	IC		1	
	IC411	MFI337S395901	MCU IC		1	
	IC540	BD2242G-G	MOS IC		1	
△	IC601	TEF6657HN-X	IC		1	
△	IC701	STA1080	MPU IC		1	
	IC702	TC7SH08FU-X	IC(DIGITAL)		1	
△	IC821	W3F-0138-00	ROM IC		1	
△	IC822	E25QH16A104HI	ROM IC		1	
	IC831	BU4228F-W	IC		1	
	IC841	BR24T02FJ-W-X	IC		1	
	IC851	BD001A5WEFJ	ANALOG IC		1	
	IC862	MP9943AGQ	ANALOG IC		1	
△	IC901	LV5685PV-H	ANALOG IC		1	
	IC930	BD331C0WEFJ	ANALOG IC		1	
	IC941	BU33TD3WG	MOS IC		1	
	IC1303	W0C-0167-00	CIRCUIT MODULE		1	
	Q220	2SC1623/5-6/-X	TRANSISTOR		1	
	Q240	IMX9	DUAL TRANSISTOR		1	
	Q270	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q271	LSAR523UBFS8	TRANSISTOR		1	
	Q272	LTC024EEB-X	DIGI TRANSISTOR		1	
	Q273	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q360	LSCR523UBFS8	TRANSISTOR		1	
	Q370	IMX9	DUAL TRANSISTOR		1	
	Q380	IMX9	DUAL TRANSISTOR		1	
	Q880	LTC043EUBFS8	DIGI TRANSISTOR		1	
	Q920	LTA014YEBFS8	DIGI TRANSISTOR		1	
	Q2001	LTA043EEBFS8	DIGI TRANSISTOR		1	
	Q2002	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q2010	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q2011	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q2020	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q2021	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q2030	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q2031	LTC043TEB-X	DIGI TRANSISTOR		1	
	D100	DZ2J075M	ZENER DIODE		1	
	D101	DZ2J075M	ZENER DIODE		1	
	D222	DZ2J056M	ZENER DIODE		1	
	D271	BAW56-TP-X	SI DIODE		1	
	D273	DA2J101	DIODE		1	
	D360	DZ2J068M	ZENER DIODE		1	
	D390	MBRX130	SCHOTTKY DIODE		1	
	D391	MBR0530-X	SB DIODE		1	
	D400	RB521SM-30-X	SB DIODE		1	
	D401	DZ2J051M	ZENER DIODE		1	
	D471	RSB6.8SM-X	BP Z DIODE		1	
	D473	RSB6.8SM-X	BP Z DIODE		1	
	D701	DZ2J051M	ZENER DIODE		1	
	D702	DZ2J051M	ZENER DIODE		1	
	D704	DZ2J051M	ZENER DIODE		1	
	D706	DZ2J051M	ZENER DIODE		1	
	D707	DZ2J051M	ZENER DIODE		1	
	D709	DZ2J051M	ZENER DIODE		1	
	D710	DZ2J051M	ZENER DIODE		1	
	D711	DZ2J051M	ZENER DIODE		1	
	D862	DB22306	SCHOTTKY DIODE		1	
	D902	SK34A-L-X	SB DIODE		1	
	D903	SK34A-L-X	SB DIODE		1	
	D930	GS1J-LTP	DIODE		1	
△	D990	1N5401-BPC04	SI DIODE		1	
	D2005	DA2J101	DIODE		1	
	D2006	DA2J101	DIODE		1	
	D2008	DA2J101	DIODE		1	
	D2009	DA2J101	DIODE		1	
	C103	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C104	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C105	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C106	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C120	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	
	C121	CC73HCH1H180J	C CAPACITOR	18pF 50V J	1	
	C122	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C123	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C124	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C125	CC73HCH1H050C	C CAPACITOR	5pF 50V C	1	
	C126	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C127	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C146	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C160	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C161	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C162	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	
	C163	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	
	C164	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C165	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C166	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C167	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C169	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C170	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C171	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C172	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C173	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C174	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	I
	C175	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C176	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C177	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C179	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C180	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C181	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C182	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C183	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	I
	C184	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C185	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C186	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C187	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C189	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C190	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	I
	C191	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C192	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C193	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	I
	C194	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C195	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C196	CC73HCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C197	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C198	CK73HBB1H221K	C CAPACITOR	220pF 50V K	1	I
	C222	CK73GBB1H333K	C CAPACITOR	0.033uF 50V K	1	I
	C223	CK73GBB1H333K	C CAPACITOR	0.033uF 50V K	1	I
	C224	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C225	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C226	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	I
	C227	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C228	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C229	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C230	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C231	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C234	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	I
	C235	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	I
	C236	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C237	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	I
	C251	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	I
	C261	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	I
	C273	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	I
	C311	CK73FBB0J475K	C CAPACITOR	4.7uF 6.3V K	1	I
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	I
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	I
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	I
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	I
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	I
	C321	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	I
	C331	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	I
	C360	CK73GBB1C105K	C CAPACITOR	1uF 16V K	1	I
	C361	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	I
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	I
	C402	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C410	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C472	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C540	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	I
	C541	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	I
	C542	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C603	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C604	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	1	I
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	I
	C606	CC73HCH1H090D	C CAPACITOR	9pF 50V D	1	I
	C607	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	I
	C608	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	I
	C609	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C610	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	I
	C611	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	I
	C612	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C614	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	I
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	I
	C616	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	I
	C617	CK73HBB0J224K	C CAPACITOR	0.22uF 6.3V K	1	I
	C618	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C619	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C620	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C621	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C702	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C703	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C704	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C705	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	I
	C706	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C707	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	I
	C708	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C709	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	I
	C710	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	I
	C711	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C713	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C714	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C716	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C719	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C720	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C722	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C724	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C725	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C726	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C727	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C728	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C729	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	I
	C730	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C731	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	I
	C733	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	I
	C735	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C736	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1	I
	C737	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1	I
	C738	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C740	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C741	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	I
	C742	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C750	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	I
	C756	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C757	CC73HCH1H330J	C CAPACITOR	33pF 50V J	1	I
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C821	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C824	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C830	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C831	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	I
	C840	CK73GBB1C473K	C CAPACITOR	0.047uF 16V K	1	I
	C851	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	I
	C868	QE20850-157Z	E CAPACITOR	150uF	1	I
	C871	CK73HBB0J224K	C CAPACITOR	0.22uF 6.3V K	1	I
	C873	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	I
	C876	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C878	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	I
	C880	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C881	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	I
	C883	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	I
	C903	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	I
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	I
	C906	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	I
	C908	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C912	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C914	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C916	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C930	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C931	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C932	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C941	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C942	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	I
	C990	QE20981-228	E CAPACITOR	2200uF	1	I
	C1003	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C1010	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C1011	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C1012	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C1013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C1014	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C1015	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C1016	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C1017	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C1020	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	I
	C1300	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C1301	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C1600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C1601	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C1602	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C1603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C1604	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C1900	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2003	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C2005	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2006	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	I
	C2007	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2010	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C2011	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2012	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C2013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2014	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2015	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C2016	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2017	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C2018	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2019	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C2021	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2022	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	I
	C2023	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	I
	C2024	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2025	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2026	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C2029	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	I
	C2030	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	I
	C2031	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2032	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	I
	C2033	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2034	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2035	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C2036	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2038	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2039	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2040	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	I
	C2041	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2042	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2043	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2044	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2045	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C2047	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2048	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2049	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2050	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2051	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	I
	C2052	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	I
	C2055	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2056	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2058	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2060	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C2061	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2062	CK73EBB1E105K	C CAPACITOR	1uF 25V K	1	I
	C2063	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2064	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2065	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C2066	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	C2067	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2069	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	I
	C2070	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	I
	C2072	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C2073	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2074	CK73EBB1E105K	C CAPACITOR	1uF 25V K	1	I
	C2077	CK73EBB1E105K	C CAPACITOR	1uF 25V K	1	I
	C2080	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	I
	C2081	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2083	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2086	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2087	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C2088	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	I
	C2089	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	I
	C2090	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	I
	C2091	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	I
	C2092	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	I
	C2093	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	I
	C2094	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	I
	C2095	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	I
	C2096	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	I
	C2097	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	I
	C2098	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	I
	C2099	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	I
	C2100	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	I
	C2101	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	I
	C2102	CK73HBB1H331K	C CAPACITOR	330pF 50V K	1	I
	C2103	CK73FXR1A106K	C CAPACITOR	10uF 10V K	1	I
	C2105	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	I
	C2106	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2107	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2108	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2109	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2110	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2111	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C2112	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2114	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C2115	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C2116	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2117	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	I
	C2118	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	I
	C2120	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C2121	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	I	
	R101	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R102	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R105	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R106	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R107	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R120	RK73HB1J913J	MG RESISTOR	91kΩ 1/16W J	1	I	
	R121	RK73HB1J913J	MG RESISTOR	91kΩ 1/16W J	1	I	
	R122	RK73HB1J913J	MG RESISTOR	91kΩ 1/16W J	1	I	
	R123	RK73HB1J913J	MG RESISTOR	91kΩ 1/16W J	1	I	
	R124	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I	
	R125	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I	
	R126	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I	
	R127	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I	
	R146	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	I	
	R147	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R148	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R149	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R150	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	I	
	R151	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R152	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	1	I	
	R153	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	I	
	R154	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	1	I	
	R155	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	I	
	R156	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	I	
	R157	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	I	
	R158	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R159	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R160	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R161	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	I	
	R162	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R163	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R164	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R165	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	I	
	R166	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R167	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	1	I	
	R169	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R170	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	I	
	R171	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R172	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R173	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	I	
	R174	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R175	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R176	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R177	RK73GB2A120J	MG RESISTOR	12Ω 1/10W J	1	I	
	R178	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	I	
	R179	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R180	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R181	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R182	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	I	
	R183	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R184	RK73GH2A392D	MG RESISTOR	3.9kΩ 1/10W D	1	I	
	R185	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	I	
	R186	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R187	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R188	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R189	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R190	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	I	
	R191	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R193	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R194	RK73GB2A202J	MG RESISTOR	2kΩ 1/10W J	1	I	
	R195	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R196	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R197	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	I	
	R198	RK73GH2A102D	MG RESISTOR	1kΩ 1/10W D	1	I	
	R199	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	I	
	R200	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R201	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I	
	R221	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I	
	R222	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R223	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	I	
	R224	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R225	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	I	
	R226	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	I	
	R227	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	I	
	R229	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	I	
	R230	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	I	
	R231	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R232	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R233	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	I	
	R234	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	I	
	R236	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R237	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	I	
	R238	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R239	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R240	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	I	
	R250	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	I	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R251	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	I
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	I
	R254	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R260	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	I
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	I
	R262	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	I
	R264	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	I
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	I
	R272	RK73HB1J303J	MG RESISTOR	30kΩ 1/16W J	1	I
	R273	RK73EB2E223J	MG RESISTOR	22kΩ 1/4W J	1	I
	R302	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	I
	R303	RK73EB2E3R0J	MG RESISTOR	3Ω 1/4W J	1	I
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	I
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	I
	R321	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	I
	R322	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	I
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	I
	R331	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	I
	R332	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	I
	R360	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	I
	R361	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	I
	R362	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	I
	R363	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	I
	R364	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	I
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	I
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	I
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	I
	R402	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I
	R410	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R411	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R412	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R413	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R414	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	I
	R540	RK73GH2A123D	MG RESISTOR	12kΩ 1/10W D	1	I
	R542	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	I
	R543	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I
	R600	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	I
	R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R602	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	I
	R603	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	I
	R604	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	I
	R605	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	I
	R611	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R680	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	I
	R682	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R683	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I
	R684	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	I
	R685	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	I
	R690	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I
	R691	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I
	R702	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I
	R703	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R704	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I
	R705	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R709	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R710	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I
	R711	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I
	R712	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I
	R713	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R714	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I
	R715	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R718	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R721	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R723	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R725	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R726	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I
	R730	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I
	R731	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R734	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R737	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R739	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	I
	R740	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	I
	R742	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R743	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I
	R744	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R746	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I
	R748	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R750	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R752	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R755	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I
	R756	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R769	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I
	R770	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	I
	R771	RK73HB1J273J	MG RESISTOR	27kΩ 1/16W J	1	I
	R772	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R777	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I
	R778	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	R781	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R782	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R783	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R785	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R788	RK73GH2A823D	MG RESISTOR	82kΩ 1/10W D	1	I	
	R789	RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D	1	I	
	R790	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R792	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R794	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I	
	R795	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I	
	R796	RK73GH2A302D	MG RESISTOR	3kΩ 1/10W D	1	I	
	R797	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I	
	R798	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I	
	R799	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	I	
	R800	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R801	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I	
	R803	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	I	
	R805	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	I	
	R806	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	I	
	R808	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I	
	R809	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	I	
	R820	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I	
	R823	RK73GB2A470J	MG RESISTOR	47Ω 1/10W J	1	I	
	R824	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	I	
	R827	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R828	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	I	
	R829	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R830	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I	
	R840	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I	
	R841	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I	
	R842	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I	
	R850	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	I	
	R851	RK73HH1J243D	MG RESISTOR	24kΩ 1/16W D	1	I	
	R868	RK73GB2A512J	MG RESISTOR	5.1kΩ 1/10W J	1	I	
	R869	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	I	
	R871	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	I	
	R872	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	I	
	R873	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	I	
	R875	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	I	
	R876	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	I	
	R878	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	I	
	R880	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I	
	R889	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	I	
	R905	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I	
	R940	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	1	I	
	R980	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	I	
	R981	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	I	
	R982	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	I	
	R984	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	I	
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	I	
	R1300	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	I	
	R1302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I	
	R1303	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I	
	R2001	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R2003	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	I	
	R2004	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	I	
	R2005	RK73EB2E2R2J	MG RESISTOR	2.2Ω 1/4W J	1	I	
	R2008	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I	
	R2009	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	I	
	R2014	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R2016	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	I	
	R2017	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	I	
	R2020	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R2021	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R2023	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R2025	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R2026	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R2033	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R2034	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	I	
	R2038	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	I	
	R2039	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R2040	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	I	
	R2042	RK73HB1J303J	MG RESISTOR	30kΩ 1/16W J	1	I	
	R2045	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R2046	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R2047	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R2048	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R2049	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R2050	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I	
	R2054	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I	
	R2055	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R2056	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	I	
	R2057	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	I	
	R2058	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R2059	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R2060	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I	
	R2061	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	I	
	R2062	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	I	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R2063	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I
	R2064	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I
	R2065	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	I
	R2066	RK73HB1J432J	MG RESISTOR	4.3kΩ 1/16W J	1	I
	R2067	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	I
	R2069	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	I
	R2070	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R2071	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R2072	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	I
	R2073	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I
	R2076	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	I
	R2079	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I
	R2082	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I
	R2087	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I
	R2088	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I
	R2089	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I
	R2090	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	I
	L411	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	I
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	I
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	I
	L602	LK73G0BER47K	M.CHIP INDUCTOR		1	I
	L603	NQLM93K-R10X	INDUCTOR	0.1uH K	1	I
	L604	LK73G0BE1R0K	M.CHIP INDUCTOR		1	I
	L605	LK73G0BER22K	M.CHIP INDUCTOR		1	I
	L606	LK73G0BER12K	M.CHIP INDUCTOR		1	I
	L607	LK73G0BER15K	M.CHIP INDUCTOR		1	I
	L701	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	I
	L702	NQR0713-001X	FERRITE BEADS		1	I
	L703	LB73H0AY-004	CHIP FERRITE		1	I
	L704	NQR0713-001X	FERRITE BEADS		1	I
	L705	NQR0713-001X	FERRITE BEADS		1	I
	L706	LB73H0CT-002	CHIP FERRITE		1	I
	L707	LB73H0CT-002	CHIP FERRITE		1	I
	L811	LB73H0AY-004	CHIP FERRITE		1	I
	L821	LB73G0BK-006	CHIP FERRITE		1	I
	L822	LB73H0CT-002	CHIP FERRITE		1	I
	L824	LB73H0CT-002	CHIP FERRITE		1	I
	L825	LB73H0CT-002	CHIP FERRITE		1	I
	L826	LB73H0CT-002	CHIP FERRITE		1	I
	L827	LB73H0CT-002	CHIP FERRITE		1	I
	L828	LB73H0CT-002	CHIP FERRITE		1	I
	L829	LB73H0CT-002	CHIP FERRITE		1	I
	L830	LB73G0BK-006	CHIP FERRITE		1	I
	L831	NQR0713-001X	FERRITE BEADS		1	I
	L863	NQLL6EM-100X	INDUCTOR	10uH M	1	I
	L864	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	I
	L990	QQR1927-001	CHOKE COIL		1	I
	L2000	LB73H0CT-002	CHIP FERRITE		1	I
	L2001	LB73H0CT-002	CHIP FERRITE		1	I
	L2002	NQR0593-001X	FERRITE BEADS		1	I
	L2003	NQR0593-001X	FERRITE BEADS		1	I
	L2004	NQR0593-001X	FERRITE BEADS		1	I
	L2005	LR73Z0AD100M	CHIP INDUCTOR	10uH	1	I
	L2008	NQR0713-001X	FERRITE BEADS		1	I
	L2009	NQR0713-001X	FERRITE BEADS		1	I
	L2010	NQR0713-001X	FERRITE BEADS		1	I
	CN502	QGF1040F1-26	FFC/FPC CONNE	FFC/FPC (1-26)	1	I
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	I
	CN990	QNZ0607-001	CAR CONNECTOR		1	I
△	F1	F53-0513-08	PATTERN FUSE	4A	1	I
△	F2	F53-0513-08	PATTERN FUSE	4A	1	I
△	F3	FZA10BH-2R5	FUSE (CC)		1	I
	J220	E1B-0013-00	3.5D PHONE JACK		1	I
	J321	QNN0868-001	PIN JACK		1	I
	J600	QNB0356-001	ANT TERMINAL		1	I
	S830	QSW0648-001Z	TACT SWITCH		1	I
	VA600	NAF0024-001X	ESD SUPPRESSOR		1	I
	VA703	F0K-0010-00	SURGE ABSORBER		1	I
	VA705	F0K-0010-00	SURGE ABSORBER		1	I
	X600	QAX0969-001Z	CRYSTAL		1	I
	X701	L7J-0092-00	QUARTZ CRYSTAL		1	I
	X702	NAX1256-001X	CRYSTAL		1	I
SWITCH PWB ASSY (XJ6-065x-xx) <XJ6>						
	IC1	BU97520AKV-M	MOS IC		1	A,B,C,D,E,F,G,H,J,K,L
	IC90	PIC95603-X	IR DETECT UNIT		1	A,C,D,E,G,J,K
	IC90	PIC95603	IR DETECT UNIT		1	L
	Q1	LSCR523UBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q50	LSCR523EBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	Q51	LSCR523EBFS8	TRANSISTOR		1	A,B,C,D,E,F,G,H,J,K,L
	D1	DZ2J056M	ZENER DIODE		1	A,B,C,D,E,F,G,H,J,K,L
	D2	MBRX130	SCHOTTKY DIODE		1	A,B,C,D,E,F,G,H,J,K,L
	D21	LRT67DU1V211	LED		1	A,B,C,D,E,F
	D21	ASMTUBB5ZT3Y2	LED		1	G,H,J,K,L
	D22	LRT67DU1V211	LED		1	A,B,C,D,E,F
	D22	ASMTUBB5ZT3Y2	LED		1	G,H,J,K,L

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D23	LRT67DU1V211	LED		1	A,B,C,D,E,F
	D23	ASMTUBB5ZT3Y2	LED		1	G,H,J,K,L
	D49	NHSW157B	LED		1	A,B,C,D,E,F,G,H,J,K,L
	D80	DZ2J051M	ZENER DIODE		1	A,B,C,D,E,F,G,H,J,K,L
	D81	DZ2J051M	ZENER DIODE		1	A,B,C,D,E,F,G,H,J,K,L
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,J,K,L
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,J,K,L
	C6	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K,L
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,J,K,L
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,J,K,L
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K,L
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	A,B,C,D,E,F,G,H,J,K,L
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	A,B,C,D,E,F,G,H,J,K,L
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K,L
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,J,K,L
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A,B,C,D,E,F,G,H,J,K,L
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	A,B,C,D,E,F,G,H,J,K,L
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A,C,D,E,G,J,K,L
	R1	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R5	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	1	A,B,C,D,E,F,G,H,J,K,L
	R6	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	A,B,C,D,E,F,G,H,J,K,L
	R7	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,J,K,L
	R20	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F
	R20	RK73FB2B391J	MG RESISTOR	390Ω 1/8W J	1	G,H,J,K,L
	R22	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F
	R22	RK73FB2B391J	MG RESISTOR	390Ω 1/8W J	1	G,H,J,K,L
	R24	RK73FB2B621J	MG RESISTOR	620Ω 1/8W J	1	A,B,C,D,E,F
	R24	RK73FB2B391J	MG RESISTOR	390Ω 1/8W J	1	G,H,J,K,L
	R48	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	A,B,C,D,E,F,G,H,J,K,L
	R49	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	A,B,C,D,E,F,G,H,J,K,L
	R50	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R51	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	1	A,B,C,D,E,F,G,H,J,K,L
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	A,B,C,D,E,F,G,H,J,K,L
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	A,B,C,D,E,F,G,H,J,K,L
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	A,B,C,D,E,F,G,H,J,K,L
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	A,B,C,D,E,F,G,H,J,K,L
	R81	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	A,B,C,D,E,F,G,H,J,K,L
	R91	RK73GB2A622J	MG RESISTOR	6.2kΩ 1/10W J	1	A,C,D,E,G,J,K,L
	R1006	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,C,D,E,G,J,K,L
	R1008	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	A,C,D,E,G,J,K,L
	R1009	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A,C,D,E,G,J,K,L
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,J,K,L
	CN1	QGZ2006K1-20X	DETACHABLE CONN	(1-20)	1	A,B,C,D,E,F,G,H,J,K,L
	FL80	L7K-0030-00	FILTER		1	A,B,C,D,E,F,G,H,J,K,L
	J60	QNS0279-001	3.5 JACK		1	A,B,C,D,E,F,G,H,J,K,L
	J80	E5J-0069-00	USB TERMINAL		1	A,B,C,D,E,F,G,H,J,K,L
	S20	QSW1308-001	ROTARY ENCODER		1	A,B,C,D,E,F,G,H,J,K,L

SWITCH PWB ASSY (XJ6-0673-20) <XJ6>

IC1	BU97520AKV-M	MOS IC	1	I
IC90	PIC95603	IR DETECT UNIT	1	I
Q1	LSCR523UBFS8	TRANSISTOR	1	I
Q50	LSCR523EBFS8	TRANSISTOR	1	I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q51	LSCR523EBFS8	TRANSISTOR		1	I
	D1	DZ2J056M	ZENER DIODE		1	I
	D2	MBRX130	SCHOTTKY DIODE		1	I
	D21	ASMTUBB5ZT3Y2	LED		1	I
	D22	ASMTUBB5ZT3Y2	LED		1	I
	D23	ASMTUBB5ZT3Y2	LED		1	I
	D49	NHSW157B	LED		1	I
	D80	DZ2J051M	ZENER DIODE		1	I
	D81	DZ2J051M	ZENER DIODE		1	I
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	I
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	I
	C6	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	I
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	I
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	I
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	I
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	I
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	I
	R1	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	I
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	I
	R5	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	1	I
	R6	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	I
	R7	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	I
	R20	RK73FB2B391J	MG RESISTOR	390Ω 1/8W J	1	I
	R22	RK73FB2B391J	MG RESISTOR	390Ω 1/8W J	1	I
	R24	RK73FB2B391J	MG RESISTOR	390Ω 1/8W J	1	I
	R48	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	I
	R49	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	I
	R50	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	I
	R51	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	1	I
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	I
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	I
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	I
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	I
	R81	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	I
	R91	RK73GB2A622J	MG RESISTOR	6.2kΩ 1/10W J	1	I
	R1006	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I
	R1008	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	I
	R1009	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	I
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	I
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	I
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	I
	CN1	QGZ2006K1-20X	DETACHABLE CONN	(1-20)	1	I
	FL80	L7K-0030-00	FILTER		1	I
	J60	QNS0279-001	3.5 JACK		1	I
	J80	E5J-0069-00	USB TERMINAL		1	I
	S20	QSW1308-001	ROTARY ENCODER		1	I
CD MECHA PWB ASSY (XJD-0030-00) <XJD>						
	IC1	MN6627553APA	IC		1	I
	IC2	BD8266EFV-M-X	IC		1	I
	Q1	2SA2188/E/-X	TRANSISTOR		1	I
	C1	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C3	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C4	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C7	CK73GBB1C334K	C CAPACITOR	0.33uF 16V K	1	I
	C8	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	I
	C9	CK73HBB1C823K	C CAPACITOR	0.082uF 16V K	1	I
	C10	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	I
	C11	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C12	CK73HBB1E153K	C CAPACITOR	0.015uF 25V K	1	I
	C13	CC73HCH1H681J	C CAPACITOR	680pF 50V J	1	I
	C14	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C15	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	I
	C16	CK730AU0J105K	C CAPACITOR	1uF 6.3V K	1	I
	C17	CK73GBB1C334K	C CAPACITOR	0.33uF 16V K	1	I
	C18	CK73HBB1H332K	C CAPACITOR	3300pF 50V K	1	I
	C19	CK73HBB1E223K	C CAPACITOR	0.022uF 25V K	1	I
	C20	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	I
	C21	CK73GBB1C334K	C CAPACITOR	0.33uF 16V K	1	I
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	I
	C27	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C28	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C50	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	I
	C51	CK73HBB1H682K	C CAPACITOR	6800pF 50V K	1	I
	C52	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C53	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	I
	C55	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C60	CC73HCH1H821J	C CAPACITOR	820pF 50V J	1	I
	C61	CC73HCH1H821J	C CAPACITOR	820pF 50V J	1	I
	C62	CK73GXR0J106M	C CAPACITOR	10uF 6.3V M	1	I
	C82	CC73HCH1H471J	C CAPACITOR	470pF 50V J	1	I
	C83	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	I
	C84	CC73HCH1H120J	C CAPACITOR	12pF 50V J	1	I
	C85	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	I
	C244	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1	I
	R3	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	I
	R4	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R770BTK	A	KD-R771BTE	B	KD-R771BTH2	C	KD-R771BTM	D
KD-R771BTMM2	E	KD-R774BTE	F	KD-R870BTK	G	KD-R871BTE	H
KD-R871BTR2	I	KD-R875BTSK	J	KD-RD87BTK	K	KD-SR82BTK	L

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R7	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R8	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R9	RK73HB1J823J	MG RESISTOR	82kΩ 1/16W J	1	
	R10	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R11	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R12	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	
	R17	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R18	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R20	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R21	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R23	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	
	R24	RK73HB1J272J	MG RESISTOR	2.7kΩ 1/16W J	1	
	R26	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R28	RK73HB1J114J	MG RESISTOR	110kΩ 1/16W J	1	
	R31	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R32	RK73HB1J821J	MG RESISTOR	820Ω 1/16W J	1	
	R33	RK73HB1J131J	MG RESISTOR	130Ω 1/16W J	1	
	R37	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R44	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R47	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R305	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	RA1	RK74HB1J562J	NET RESISTOR	5.6kΩ 1/16W J	1	
	RA2	RK74HB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	L1	LB73G0BF-002	CHIP FERRITE		1	
	L2	LB73H0AY-004	CHIP FERRITE		1	
	L3	LB73H0AY-004	CHIP FERRITE		1	
	CN1	QGF1044F2-26X	FFC/FPC CONNE	FFC/FPC (1-26)	1	
	CN2	QGF0522F6-15W	FFC/FPC CONNE	FFC/FPC (1-15)	1	
	S1	NSW0291-001X	DETECT SWITCH		1	
	S2	NSW0291-001X	DETECT SWITCH		1	
	S3	NSW0313-001X	DETECT SWITCH		1	
	X1	NAX1158-001X	CRYSTAL		1	