


# Exploded view of general assembly

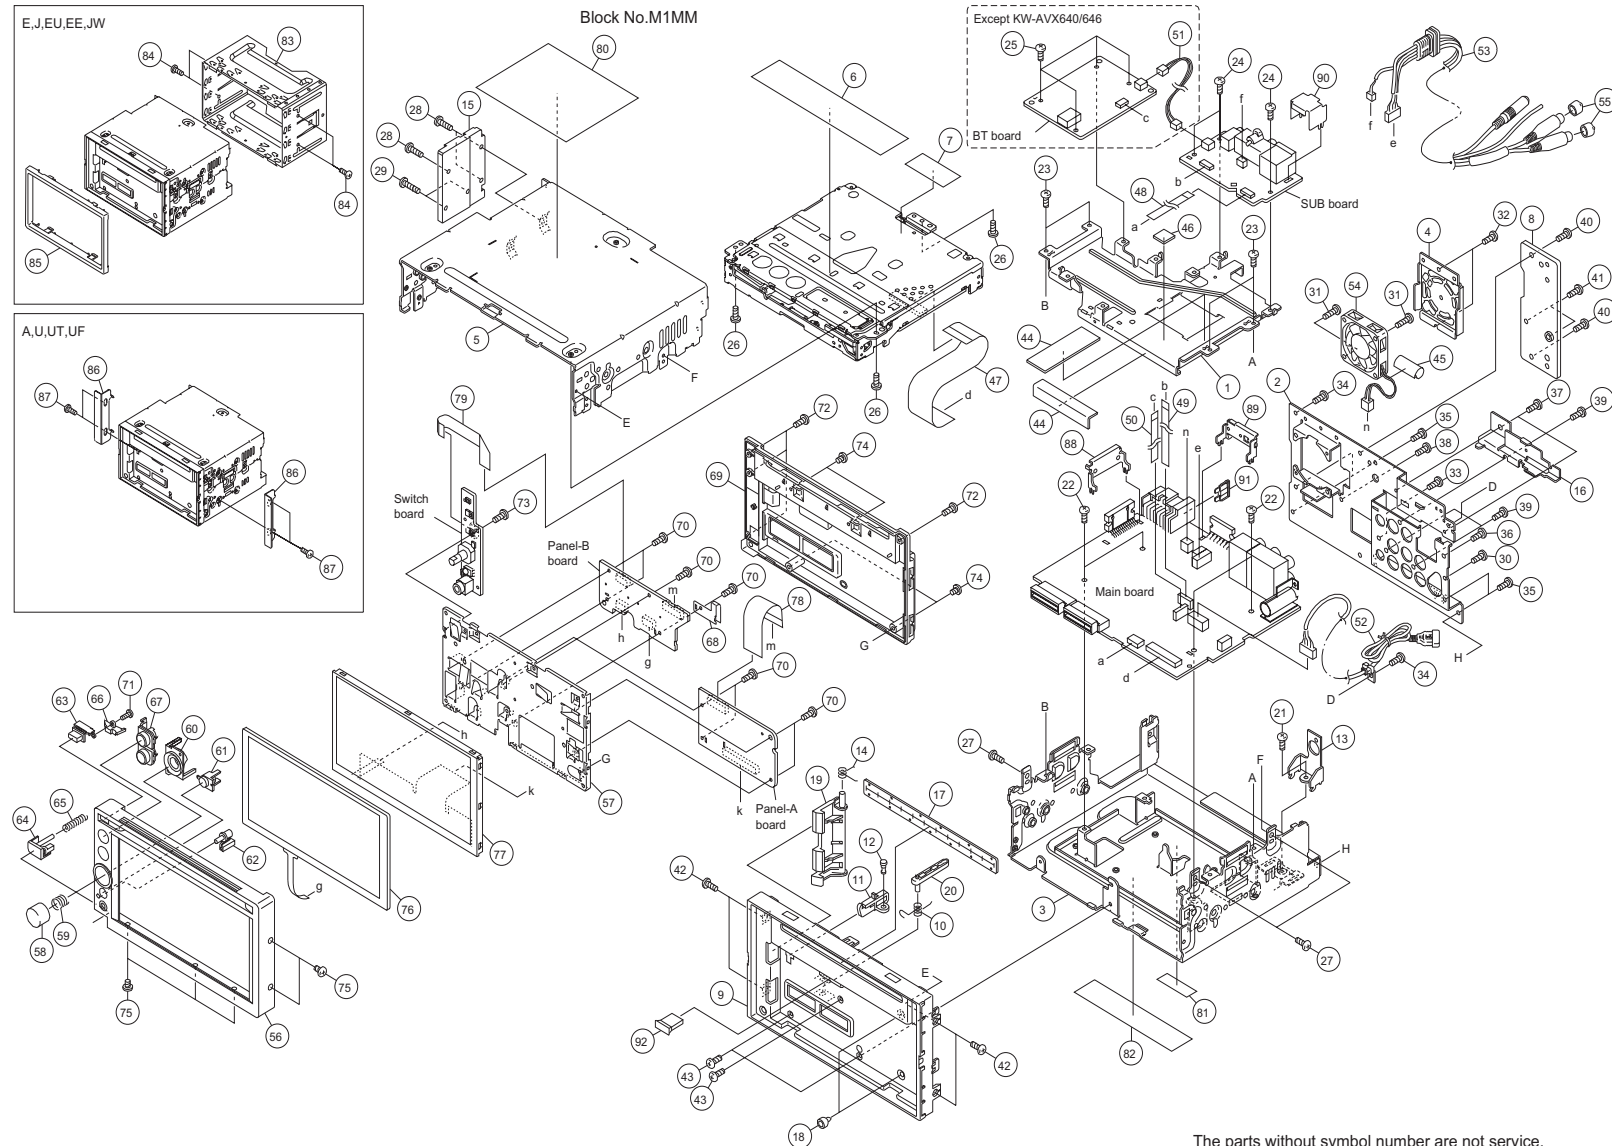

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

General assembly <M1MM>

1		LV22863-001A	CENTER CHASSIS		1	
2		LV22864-003A	REAR BKT		1	A,I
2		LV22864-006A	REAR BKT		1	B,D,E,F
2		LV22864-005A	REAR BKT		1	C
2		LV22864-004A	REAR BKT		1	G,H,J,K,L,M,N
3		LV39076-001A	B.CHASSIS ASSY		1	
4		LV39077-001A	FAN COVER		1	
5		LV11723-001A	TOP CHASSIS		1	
6		LV40848-093A	SPACER(P)		1	
7		LV40848-094A	SPACER(P)		1	
8		LV39078-001A	REAR HEAT SINK		1	
9		LV11724-001A	FRONT CHASSIS		1	A,G,H,I,J,K,L,M,N
9		LV11724-002A	FRONT CHASSIS		1	B,C,D,E,F
10		LV45282-001A	KICK SPRING		1	
11		LV39081-001A	RELEASED LEVER		1	
12		LV45503-001A	SHAFT(RELEASE)		1	
13		LV39080-001A	TUNER BKT		1	
14		LV45281-002A	LOCK SPRING		1	
15		LV38882-003A	SIDE HEAT SINK		1	
16		LV38884-001A	REAR BKT B		1	
17		LV45134-003A	BLIND		1	
18		LV44748-002A	DUMPER		2	
19		LV22752-001A	LOCK LEVER		1	
20		LV38632-001A	KICK LEVER		1	
21		LV44615-003A	SPECIAL SCREW		1	
22		LV44615-003A	SPECIAL SCREW		4	
23		LV44615-003A	SPECIAL SCREW		4	
24		LV44615-003A	SPECIAL SCREW		3	
25		LV44615-003A	SPECIAL SCREW		4	A,G,H,I,J,K,L,M,N
26		LV44800-004A	SPECIAL SCREW		3	
27		LV41200-004A	SPECIAL SCREW		3	
28		GE40377-003A	SPECIAL SCREW		3	
29		LV41200-007A	SPECIAL SCREW		2	
30		LV41200-004A	SPECIAL SCREW		1	
31		LV45522-002A	SPECIAL SCREW		2	
32		LV41200-004A	SPECIAL SCREW		2	
33		LV41200-004A	SPECIAL SCREW		1	
34		LV41200-004A	SPECIAL SCREW		2	
35		LV41200-004A	SPECIAL SCREW		4	
36		LV41200-004A	SPECIAL SCREW		1	
37		LV41200-004A	SPECIAL SCREW		2	
38		LV41200-004A	SPECIAL SCREW		1	A,C,I
39		QYSDSF3010ZA	TAP SCREW	M3 x 10mm	3	
40		GE40377-003A	SPECIAL SCREW		2	
41		QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	2	
42		QYSDST2004ZA	TAP SCREW	M2 x 4mm	4	
43		QYSDST2006MA	TAP SCREW	M2 x 6mm	3	
44		LV40847-019A	SPACER(H)		2	
45		LV40847-006A	SPACER(H)		1	
46		VYSH101-009	SPACER		1	
47		QUQY05-5013BC-E	FFC WIRE	50pin 13cm	1	
48		QUQY05-1216BC-E	FFC WIRE	12pin 16cm	1	
49		QUQY05-1205BC-E	FFC WIRE	12pin 5cm	1	
50		QUQY05-1207BC-E	FFC WIRE	12pin 7cm	1	A,G,H,I,J,K,L,M,N
51		WJJ1184-001A-E	E-SI C WIRE C-C		1	A,G,H,I,J,K,L,M,N
52		QAM1360-001	USB CABLE		1	
53		QAM1348-002	CAR CABLE		1	
54	△	QAR0521-001	COOLING FAN		1	
55		GE40101-001A	PIN CAP		2	
56		LV11725-002A	FRONT PANEL		1	A
56		LV11725-008A	FRONT PANEL		1	B
56		LV11725-007A	FRONT PANEL		1	C
56		LV11725-009A	FRONT PANEL		1	D,E
56		LV11725-011A	FRONT PANEL		1	F
56		LV11725-003A	FRONT PANEL		1	G,H
56		LV11725-001A	FRONT PANEL		1	I
56		LV11725-004A	FRONT PANEL		1	J,K,L,M
56		LV11725-005A	FRONT PANEL		1	N
57		LV39094-001A	PANEL BKT ASSY		1	
58		LV39082-001A	VOL KNOB		1	A
58		LV39082-002A	VOL KNOB		1	
59		GE40127-006A	KNOB SPRING		1	B,C,D,E,F,G,H,I,J,K,L,M,N
60		LV39083-001A	KNOB LENS		1	
61		LV39084-001A	REMOTE LENS		1	
62		LV39085-001A	RESET BUTTON		1	
63		LV39086-001A	EJECT BUTTON		1	
64		LV39087-001A	DETACH BUTTON		1	
65		LV45283-001A	COMPRESSION SPRING		1	
66		LV39088-003A	DISC LENS		1	
67		LV39095-001A	BUTTON ASSY		1	
68		LV39092-001A	EARTH PLATE		1	
69		LV11726-002A	REAR COVER		1	
70		LV44615-003A	SPECIAL SCREW		8	
71		VKZ4777-010	MINI SCREW		1	
72		VKZ4777-010	MINI SCREW		4	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	73	LV44615-004A	SPECIAL SCREW		1	
	74	LV44159-005A	MINI SCREW		4	
	75	LV43819-009A	SPECIAL SCREW		5	
	76	QAL1306-001	TOUCH PANEL		1	
	77	QLD0676-001	LCD MODULE		1	
	78	QUQY05-3005BC-E	FFC WIRE	30pin 5cm	1	
	79	WJT0262-001A-E	E-CARD WIRE		1	
	80	LV39280-001A	NAME PLATE		1	A
	80	LV39290-003A	NAME PLATE		1	B
	80	LV39289-001A	NAME PLATE		1	C
	80	LV39291-003A	NAME PLATE		1	D
	80	LV39292-001A	NAME PLATE		1	E
	80	LV39492-001A	NAME PLATE		1	F
	80	LV39282-003A	NAME PLATE		1	G
	80	LV39283-001A	NAME PLATE		1	H
	80	LV39279-001A	NAME PLATE		1	I
	80	LV39287-001A	NAME PLATE		1	J
	80	LV39284-003A	NAME PLATE		1	K
	80	LV39285-001A	NAME PLATE		1	L,M
	80	LV39281-001A	NAME PLATE		1	N
	81	GE40442-001A	FCC RULE LABEL		1	A,C,I
	82	LV39357-002A	UT LABEL		1	M
	83	LV22812-002A	SLEEVE ASSY		1	A,B,C,D,G,H,I,K,N
	84	QYSSSP5008ZA	SCREW	M5 x 8mm	4	A,B,C,D,G,H,I,K,N
	85	LV22463-005A	TRIM PLATE		1	A,B,C,D,G,H,I,K,N
	86	LV36544-001A	TRANSPORT BKT		2	E,F,J,L,M
	87	QYSDSP5008ZA	SCREW	M5 x 8mm	4	E,F,J,L,M
	88	LV43967-001A	IC BRACKET(POW)		1	
	89	LV45502-002A	IC BRACKET		1	
	90	LV45563-001A	RGB BKT		1	
△	91	QMFZ064-100-J1	FUSE	10A	1	
	92	QAU0526-001	RF MODULE		1	A,G,H,I,J,K,L,M,N


# DVD mechanism assembly

Block No.MJMM

FMU-XM2-11D

**Grease**

- ★ =JVG-31N
- =JVS-1003
- ▲ =CFD-006ZR
- =JC-803B
- =1401C
- △ =G332

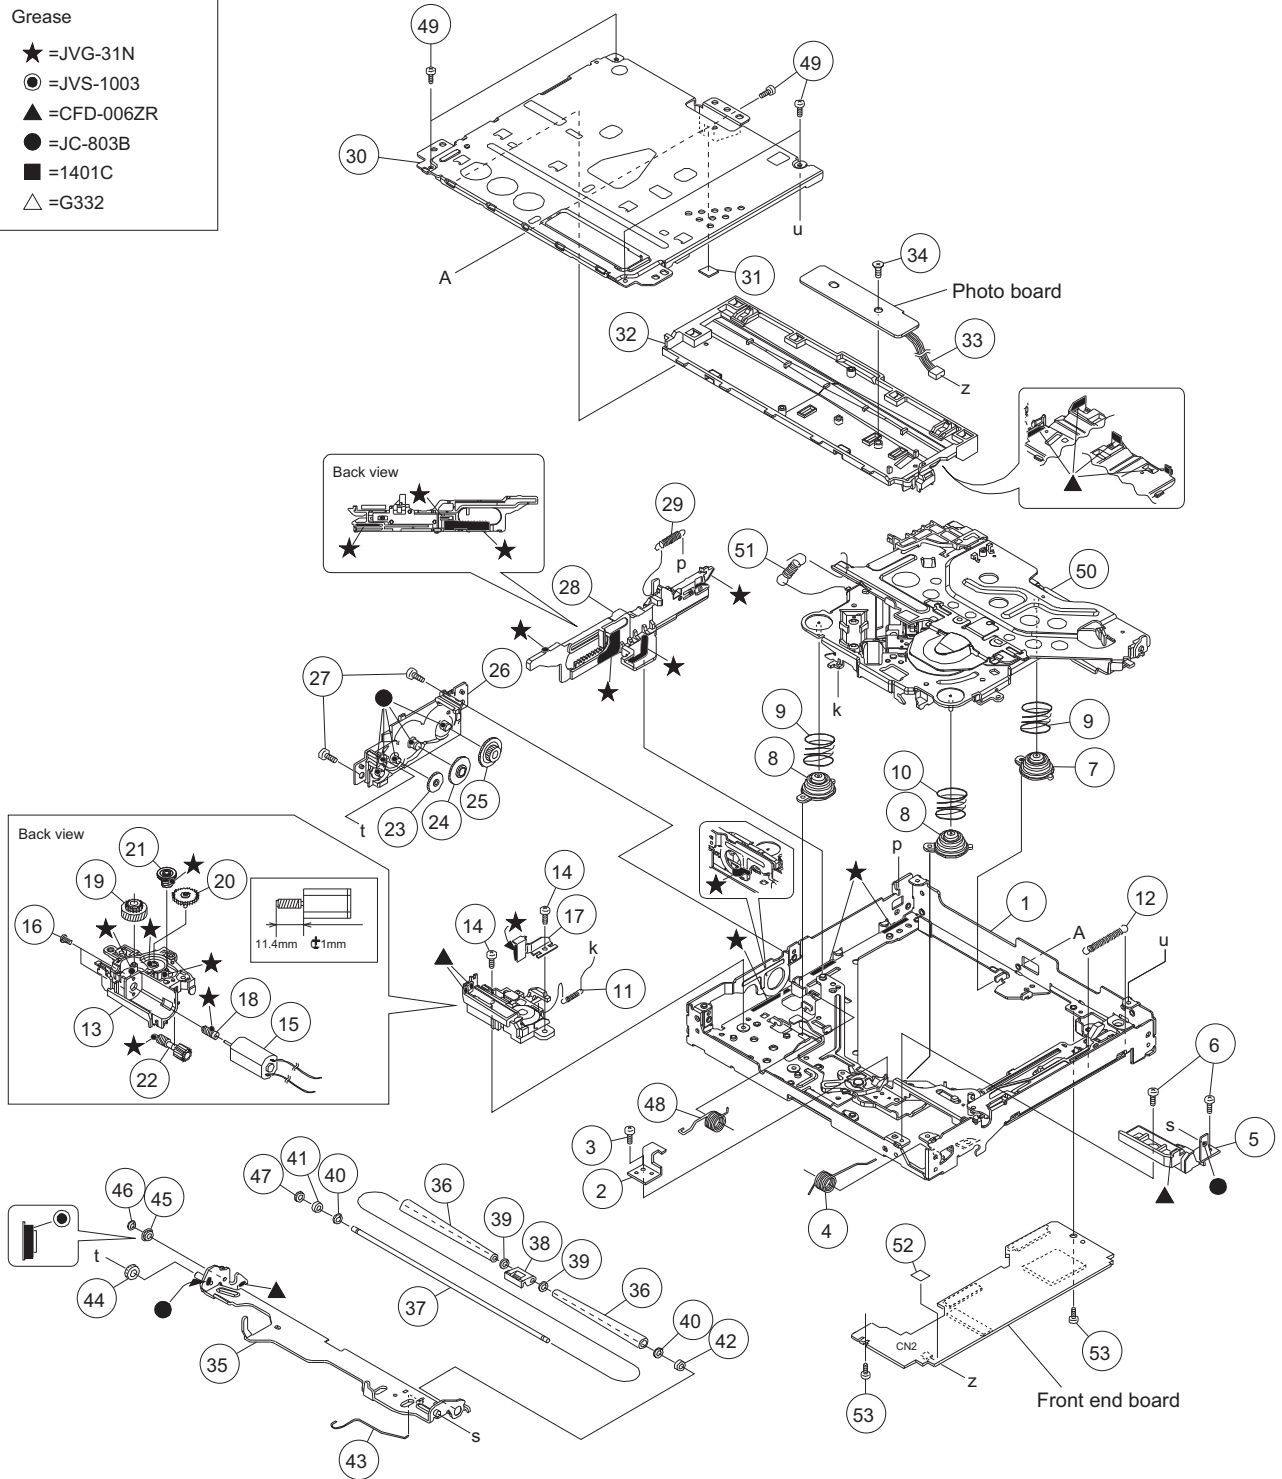

The parts without symbol number are not service.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

DVD mechanism (FMU-XM2-11D) <MJMM>

1	LV11434-010A	FRAME UNIT			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
2	LV45021-001A	STOPPER			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
3	LV44959-002A	SPECIAL SCREW			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
4	LV45249-002A	L A SPRING(R) 2			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
5	LV37639-002A	L ARM HOLDER			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
6	VKZ4539-054	MINI SCREW			2	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
7	LV37640-001A	DAMPER(R)			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
8	LV37641-001A	DAMPER(F)			2	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
9	LV45074-001A	DAMPER SPRING B			2	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
10	LV45073-001A	DAMPER SPRING A			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
11	LV44897-002A	FLOATING SPRING			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
12	LV44894-001A	LOCK SLIDER SPRING			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
13	LV11436-001A	MOTOR HOLDER			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
14	LV45135-001A	MINI TAP SCREW			2	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
15	QAR0465-001	LOADING MOTOR			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
16	QYSPSPU1425MA	SCREW	M1.4 x 2.5mm		2	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
17	LV37642-001A	MOTOR TH SPRING			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
18	LV37643-002A	MOTOR WORM GEAR			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
19	LV37644-002A	M WHEEL GEAR			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
20	LV37645-002A	M CONNECT GEAR			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
21	LV37646-001A	A WORM GEAR			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
22	LV37647-001A	A WHEEL GEAR			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
23	LV37648-001A	ACT GEAR			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
24	LV37649-001A	A CONNECT GAER			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
25	LV37650-001A	LOAD GAER			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
26	LV22553-003A	GEAR BASE			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
27	VKZ4539-054	MINI SCREW			2	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
28	LV37688-002A	SLIDE CAM ASSY			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
29	LV45090-001A	S.CAM SPRING			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
30	LV11437-003A	TOP COVER			1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	31	LV45157-001A	SPACER		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	32	LV11600-001A	DISC PLATE 2		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	33	WJM0515-001A-E	E-SI C WIRE C-F		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	34	LV44586-001A	SPECIAL SCREW		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	35	LV22735-001A	LOADIN ARM AS 2		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	36	LV44902-002A	ROLLER		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	37	LV45244-001A	ROLLER SHAFT 2		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	38	LV37652-002A	SHAFT GUIDE		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	39	LV45252-001A	WASHER		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	40	LV44960-001A	SLIT WASHER		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	41	LV44904-001A	ROLLER COLLAR L		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	42	LV45221-001A	R. COLLAR R2		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	43	LV45235-001A	L ARM ROD		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	44	LV37653-001A	CONNECT GEAR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	45	LV37654-001A	MIDDLE GEAR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	47	LV37655-001A	ROLLER GEAR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	48	LV45248-001A	L A SPRING(L) 2		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	49	VKZ4539-054	MINI SCREW		5	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	50	CM-FMUXM1D	TRA MECHA UNIT		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	51	LV44910-002A	CLAMPER SPRING		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	52	LV45289-002A	SPACER(P)		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	53	VKZ4539-054	MINI SCREW		2	A,B,C,D,E,F,G,H,I,J,K,L,M,N

Electrical parts list Main board <01>

IC11	TEF6614TV1S3-X	IC	1	
IC101	TB2926CHQ	IC	1	
IC141	TDA7415CB	IC	1	
IC151	TC7SET02FU-J-X	IC(DIGITAL)	1	
IC161	TC74HCT4053AFTX	IC	1	
IC191	NJM4565E-X	IC	1	
IC261	NJM2584AM-X	IC	1	
IC701	JVM496E	IC(MCU)	1	
IC721	R1EX24016ASAA-X	IC	1	
IC731	XC6120N242NG-X	IC	1	
IC751	TC7SET08FU-J-X	IC(DIGITAL)	1	
IC761	TC7SET08FU-J-X	IC(DIGITAL)	1	
IC762	TC7SH08FU-X	IC	1	
IC801	LV5680P	IC	1	
IC802	TPS54140DGQ-X	IC	1	
IC803	BA9743AFV-X	IC	1	
IC821	XC6213B332NG-X	IC	1	
IC831	TPS54140DGQ-X	IC	1	
IC851	BAJ5CC0FP-X	IC	1	
IC931	TC74VHCT126AFTX	IC	1	A,C,I
Q731	RT1P141U-X	DIGI TRANSISTOR	1	
Q791	2SA812A/5-6/-X	TRANSISTOR	1	
Q801	RT1N441U-X	DIGI TRANSISTOR	1	
Q802	RT1P441U-X	DIGI TRANSISTOR	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q803	RT1N141U-X	DIGI TRANSISTOR		1	
	Q804	RT1P141U-X	DIGI TRANSISTOR		1	
	Q805	RT1N141U-X	DIGI TRANSISTOR		1	
	Q821	RT1P141U-X	DIGI TRANSISTOR		1	
	Q822	RT1N441U-X	DIGI TRANSISTOR		1	
	Q871	MTM98140-X	TRANSISTOR		1	
	Q872	RT1P141U-X	DIGI TRANSISTOR		1	
	Q873	RT1N441U-X	DIGI TRANSISTOR		1	
	Q874	RT1N141U-X	DIGI TRANSISTOR		1	
	Q875	RT1P141U-X	DIGI TRANSISTOR		1	
	Q921	ISA1602AM1/EF/X	TRANSISTOR		1	
	Q922	RT1N144U-X	DIGI TRANSISTOR		1	
	Q971	2SC4081UB/QR/-X	TRANSISTOR		1	
	Q972	2SC4081UB/QR/-X	TRANSISTOR		1	
	Q1121	IMX9-W	PAIR TRANSISTOR		1	
	Q1221	IMX9-W	PAIR TRANSISTOR		1	
	Q1301	RT1N141U-X	DIGI TRANSISTOR		1	
	Q1302	RT1P141U-X	DIGI TRANSISTOR		1	
	Q1401	INC2002AC1-X	TRANSISTOR		1	
	Q1501	RT1P141U-X	DIGI TRANSISTOR		1	
	Q1503	RT1P141U-X	DIGI TRANSISTOR		1	
	Q1505	RT1N436U-X	DIGI TRANSISTOR		1	
	Q1507	RT1N436U-X	DIGI TRANSISTOR		1	
	Q1941	RT1P141U-X	DIGI TRANSISTOR		1	
	Q1951	RT1N141U-X	DIGI TRANSISTOR		1	
	Q1961	RT1N141U-X	DIGI TRANSISTOR		1	
	Q6221	RT1P436U-X	DIGI TRANSISTOR		1	
	Q6222	RT1P436U-X	DIGI TRANSISTOR		1	
	Q6223	RT1N436U-X	DIGI TRANSISTOR		1	
	Q6224	RT1N436U-X	DIGI TRANSISTOR		1	
	Q8021	RT1N141U-X	DIGI TRANSISTOR		1	
	Q8022	RT1N141U-X	DIGI TRANSISTOR		1	
	Q8101	RSQ030P03-W	MOS FET		1	
	Q8102	2SC1623A/5-6/-X	TRANSISTOR		1	
	Q8103	2SA812A/5-6/-X	TRANSISTOR		1	
	Q8104	RT1N141U-X	DIGI TRANSISTOR		1	
	Q8201	RTQ035N03-W	MOS FET		1	
	Q8202	2SA812A/5-6/-X	TRANSISTOR		1	
	Q8203	2SC1623A/5-6/-X	TRANSISTOR		1	
	Q8301	2SC1623A/5-6/-X	TRANSISTOR		1	
	D751	RKZ6.2B2KG-X	Z DIODE		1	
	D752	RKZ6.2B2KG-X	Z DIODE		1	
	D753	RKZ6.2B2KG-X	Z DIODE		1	
	D754	RKZ6.2B2KG-X	Z DIODE		1	
	D755	RKZ6.2B2KG-X	Z DIODE		1	
	D821	CRS03-W	SB DIODE		1	
	D871	RKZ18B2KG-X	Z DIODE		1	
	D901	1N5402-BPC04	SI DIODE		1	
	D902	GS1J-LTP-X	DIODE		1	B,D,G,K
	D971	RKZ6.8B2KG-X	Z DIODE		1	
	D972	RKZ6.8B2KG-X	Z DIODE		1	
	D1121	MC2836-X	DIODE		1	
	D1221	MC2836-X	DIODE		1	
	D1303	HSU119-X	SI DIODE		1	
	D1304	HSU119-X	SI DIODE		1	
	D1351	HSU119-X	SI DIODE		1	
	D1352	HSU119-X	SI DIODE		1	
	D1371	CRS03-W	SB DIODE		1	
	D1372	RKZ5.6B2KG-X	Z DIODE		1	
	D1381	CRS03-W	SB DIODE		1	A,C,I
	D1401	MC2836-X	DIODE		1	
	D1402	MC2836-X	DIODE		1	
	D1403	MC2836-X	DIODE		1	
	D1501	MC2836-X	DIODE		1	
	D1503	MC2836-X	DIODE		1	
	D1911	CRS03-W	SB DIODE		1	
	D1912	CRS03-W	SB DIODE		1	
	D1921	MBRX130-TP-X	SB DIODE		1	A,C,E,F,I,J,L,M,N
	D1922	MBRX130-TP-X	SB DIODE		1	A,C,E,F,I,J,L,M,N
	D1931	MC2836-X	DIODE		1	
	D1941	HSU119-X	SI DIODE		1	
	D1961	RKZ18B2KG-X	Z DIODE		1	
	D1971	RKZ6.2B2KG-X	Z DIODE		1	
	D7301	HSU119-X	SI DIODE		1	
	D8001	RB051L-40-X	SB DIODE		1	
	D8002	HSU119-X	SI DIODE		1	
	D8011	CRS03-W	SB DIODE		1	
	D8021	RKZ6.2B2KG-X	Z DIODE		1	
	D8022	RKZ6.2B2KG-X	Z DIODE		1	
	D8031	RB051L-40-X	SB DIODE		1	
	D8101	RB051L-40-X	SB DIODE		1	
	D8106	RKZ6.2B2KG-X	Z DIODE		1	
	D8201	CRS03-W	SB DIODE		1	
	D8203	RB521S-30-X	SB DIODE		1	
	D8204	RB521S-30-X	SB DIODE		1	
	D8205	RB521S-30-X	SB DIODE		1	
	D8301	HSU119-X	SI DIODE		1	
	D8501	HSU119-X	SI DIODE		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C8	NDCA1HJ-270W	C CAPACITOR	27pF 50V J	1	
	C9	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C10	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C12	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C13	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C14	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C16	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C17	QETN1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C18	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C19	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C20	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	1	
	C21	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C22	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C23	NDCA1HJ-100W	C CAPACITOR	10pF 50V J	1	
	C24	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C25	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C26	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C27	NDCA1HJ-150W	C CAPACITOR	15pF 50V J	1	
	C29	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C30	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C42	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C45	NDCA1HJ-7R0W	C CAPACITOR	7pF 50V J	1	
	C46	NDCA1HJ-2R0W	C CAPACITOR	2pF 50V J	1	
	C50	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C260	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C262	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C272	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C282	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C705	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C713	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C714	NDCA1HJ-120W	C CAPACITOR	12pF 50V J	1	
	C715	NDCA1HJ-120W	C CAPACITOR	12pF 50V J	1	
	C717	NDCA1HJ-120W	C CAPACITOR	12pF 50V J	1	
	C718	NDCA1HJ-120W	C CAPACITOR	12pF 50V J	1	
	C723	QETN1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C801	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C802	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C803	QETN1AM-227Z	E CAPACITOR	220uF 10V M	1	
	C804	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C805	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C806	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C807	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C808	QETN1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C809	QETN1CM-227Z	E CAPACITOR	220uF 16V M	1	
	C812	QETN1HM-226Z	E CAPACITOR	22uF 50V M	1	
	C816	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C820	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C821	QETN0JM-108Z	E CAPACITOR	1000uF 6.3V M	1	
	C822	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C871	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C872	NCB31CK-334X	C CAPACITOR	0.33uF 16V K	1	
	C901	QEZ0769-278	E CAPACITOR	2700uF	1	
	C902	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	
	C904	QEKJ1HM-225Z	E CAPACITOR	2.2uF 50V M	1	
	C921	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C931	NCBA1CK-473W	C CAPACITOR	0.047uF 16V K	1	A,C,I
	C962	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C1101	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1102	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1106	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C1111	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1112	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1116	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C1121	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1122	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1131	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1132	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1151	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1161	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1162	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1163	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C1164	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1165	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1166	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1167	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,C,I
	C1170	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1181	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	A,C,I
	C1191	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1192	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1193	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C1194	NCBA1EK-682W	C CAPACITOR	6800pF 25V K	1	
	C1195	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C1201	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1202	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1206	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C1211	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C1212	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1216	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C1221	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1222	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1231	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1232	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1251	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1261	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1262	QEKJ1HM-475Z	E CAPACITOR	4.7uF 50V M	1	
	C1263	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C1264	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1265	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1266	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1267	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,C,I
	C1270	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1281	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	A,C,I
	C1291	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1292	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1293	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C1294	NCBA1EK-682W	C CAPACITOR	6800pF 25V K	1	
	C1295	NCBA1HK-471W	C CAPACITOR	470pF 50V K	1	
	C1301	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C1303	NDCA1HJ-820W	C CAPACITOR	82pF 50V J	1	
	C1304	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1306	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1308	NDCA1HJ-820W	C CAPACITOR	82pF 50V J	1	
	C1309	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C1312	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1313	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1351	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C1360	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C1364	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1365	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1367	NDCA1HJ-330W	C CAPACITOR	33pF 50V J	1	
	C1368	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1369	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1370	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C1371	QETN1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C1373	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	1	
	C1374	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	
	C1375	QEKJ1HM-105Z	E CAPACITOR	1uF 50V M	1	
	C1376	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	
	C1378	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1380	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,C,I
	C1383	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C1391	QETN1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C1392	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1393	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1400	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C1401	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C1402	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1501	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C1602	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C1603	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C1604	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C1911	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C1932	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C1942	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C1952	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	C1963	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C6221	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C6222	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7088	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7089	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C7092	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C7093	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C7094	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7095	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7104	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7106	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7107	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7108	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7109	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7121	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7301	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7302	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C7501	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7601	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C7602	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C8000	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C8001	NDCA1HJ-100W	C CAPACITOR	10pF 50V J	1	
	C8002	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C8003	QEKJ1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C8004	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8005	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C8006	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	1	
	C8007	NCBA1HK-272W	C CAPACITOR	2700pF 50V K	1	
	C8008	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C8009	QETN1AM-477Z	E CAPACITOR	470uF 10V M	1	
	C8031	NDCA1HJ-100W	C CAPACITOR	10pF 50V J	1	
	C8032	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C8033	QEKJ1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C8034	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8035	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C8036	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	1	
	C8037	NCBA1HK-272W	C CAPACITOR	2700pF 50V K	1	
	C8038	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C8039	QEKJ0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C8101	NCB31AK-334X	C CAPACITOR	0.33uF 10V K	1	
	C8103	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C8106	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8107	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C8108	QETN1AM-477Z	E CAPACITOR	470uF 10V M	1	
	C8201	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	1	
	C8203	NCBA1HK-222W	C CAPACITOR	2200pF 50V K	1	
	C8204	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C8205	NCBA1HK-391W	C CAPACITOR	390pF 50V K	1	
	C8206	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8207	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8208	QETN1HM-107Z	E CAPACITOR	100uF 50V M	1	
	C8209	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C8210	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C8213	QETN1HM-226Z	E CAPACITOR	22uF 50V M	1	
	C8301	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C8302	NCBA1HK-272W	C CAPACITOR	2700pF 50V K	1	
	C8303	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C8304	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C8306	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C8501	NCB21EK-334X	C CAPACITOR	0.33uF 25V K	1	
	C8502	QEKJ1CM-226Z	E CAPACITOR	22uF 16V M	1	
	R1	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,D,E,F,G,H,J,K,L,M,N
	R14	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R16	NRSA6AJ-684W	MG RESISTOR	680kΩ 1/16W J	1	
	R19	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R21	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	
	R22	NRSA6AJ-684W	MG RESISTOR	680kΩ 1/16W J	1	
	R23	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R262	NRSA6AD-181W	MG RESISTOR	180Ω 1/16W D	1	
	R263	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R272	NRSA6AD-181W	MG RESISTOR	180Ω 1/16W D	1	
	R273	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R282	NRSA6AD-181W	MG RESISTOR	180Ω 1/16W D	1	
	R283	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R700	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R701	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R702	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,C,I
	R702	NRSA6AJ-332W	MG RESISTOR	3.3kΩ 1/16W J	1	B,G
	R702	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	D,K
	R702	NRSA6AJ-912W	MG RESISTOR	9.1kΩ 1/16W J	1	E,F,J,L,M
	R702	NRSA6AJ-622W	MG RESISTOR	6.2kΩ 1/16W J	1	H
	R702	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	N
	R703	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R704	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R704	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	B,C,D,E,F
	R707	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R708	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R709	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R711	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R712	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	1	
	R734	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R735	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R740	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	B,C,D,E,F
	R741	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R743	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R747	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R749	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R750	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R752	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	N
	R753	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R757	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	B,C,D,E,F
	R765	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R766	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R774	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R776	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R777	NRSA6AJ-272W	MG RESISTOR	2.7kΩ 1/16W J	1	
	R780	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R781	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R782	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R790	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R792	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R794	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R796	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R797	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R798	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R799	NRSA6AJ-474W	MG RESISTOR	470kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R801	NRSA63D-103X	MG RESISTOR	10kΩ 1/16W D	1	
	R803	NRSA63D-562X	MG RESISTOR	5.6kΩ 1/16W D	1	
	R806	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	1	
	R807	NRSA6AD-273W	MG RESISTOR	27kΩ 1/16W D	1	
	R808	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	1	
	R809	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J	1	
	R813	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	
	R815	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,C,E,F,I,J,L,M,N
	R851	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R852	NRSA6AD-181W	MG RESISTOR	180Ω 1/16W D	1	
	R871	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R872	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R873	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R874	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R875	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R921	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R922	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R931	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,C,I
	R932	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,C,I
	R933	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,C,I
	R934	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,C,I
	R935	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,C,I
	R936	NRSA6AJ-392W	MG RESISTOR	3.9kΩ 1/16W J	1	A,C,I
	R937	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,C,I
	R938	NRSA6AJ-392W	MG RESISTOR	3.9kΩ 1/16W J	1	A,C,I
	R939	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J	1	A,C,I
	R940	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J	1	A,C,I
	R941	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	A,C,I
	R942	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	A,C,I
	R961	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	
	R971	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	
	R972	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	
	R973	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	
	R974	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R975	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R976	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	1	
	R1101	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1102	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R1103	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1111	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1112	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R1113	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1121	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1122	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1123	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1124	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1131	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1132	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1133	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1134	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1135	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1151	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1152	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1161	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1162	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1166	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1181	NRSA6AJ-752W	MG RESISTOR	7.5kΩ 1/16W J	1	A,C,I
	R1182	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	A,C,I
	R1191	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1192	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1193	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1194	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1195	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1196	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1201	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1202	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R1203	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1211	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1212	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R1213	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1221	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1222	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1223	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1224	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1231	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R1232	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1233	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R1234	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1235	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1251	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1252	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R1261	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1262	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1266	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1281	NRSA6AJ-752W	MG RESISTOR	7.5kΩ 1/16W J	1	A,C,I
	R1282	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	A,C,I
	R1291	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1292	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1293	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1294	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1295	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1296	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1301	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R1302	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1303	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1304	NRSA6AJ-331W	MG RESISTOR	330Ω 1/16W J	1	
	R1307	NRSA6AJ-430W	MG RESISTOR	43Ω 1/16W J	1	
	R1308	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R1309	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R1321	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R1351	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R1361	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1362	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1367	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R1368	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R1369	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1370	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1371	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R1372	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R1373	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R1374	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R1375	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1391	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1392	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1393	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1394	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1401	NRSA02J-221X	MG RESISTOR	220Ω 1/10W J	1	
	R1402	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1403	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J	1	
	R1404	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1501	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1602	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1603	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1912	NRS181J-332X	MG RESISTOR	3.3kΩ 1/8W J	1	
	R1921	NRSA02J-472X	MG RESISTOR	4.7kΩ 1/10W J	1	A,C,E,F,I,J,L,M,N
	R1931	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1932	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	1	
	R1933	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R1942	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R1943	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1952	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R1953	NRSA6AJ-273W	MG RESISTOR	27kΩ 1/16W J	1	
	R1961	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R1971	NRS181J-152X	MG RESISTOR	1.5kΩ 1/8W J	1	
	R6221	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R6222	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R7008	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7011	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	A,C,I
	R7012	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7014	NRSA6AJ-154W	MG RESISTOR	150kΩ 1/16W J	1	
	R7017	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7024	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7025	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7038	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7040	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7046	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R7047	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7048	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R7063	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7064	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7065	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R7066	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R7072	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R7073	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R7088	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7089	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7092	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7093	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7094	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7095	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7103	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7115	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R7116	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R7118	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	
	R7119	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7121	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7122	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R7130	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R7201	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7202	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7301	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R7302	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R7303	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R7304	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R7502	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R7503	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R7504	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R7601	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R7602	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R7603	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R7604	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R7777	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8000	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8001	NRSA6AJ-394W	MG RESISTOR	390kΩ 1/16W J	1	
	R8002	NRSA6AJ-392W	MG RESISTOR	3.9kΩ 1/16W J	1	
	R8004	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8006	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R8007	NRSA6AD-823W	MG RESISTOR	82kΩ 1/16W D	1	
	R8008	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D	1	
	R8031	NRSA6AJ-394W	MG RESISTOR	390kΩ 1/16W J	1	
	R8032	NRSA6AJ-392W	MG RESISTOR	3.9kΩ 1/16W J	1	
	R8033	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8034	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8035	NRSA6AJ-682W	MG RESISTOR	6.8kΩ 1/16W J	1	
	R8036	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R8037	NRSA6AD-823W	MG RESISTOR	82kΩ 1/16W D	1	
	R8038	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D	1	
	R8039	NRSA6AJ-820W	MG RESISTOR	82Ω 1/16W J	1	
	R8041	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	
	R8042	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8043	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R8101	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	1	
	R8102	NRSA6AJ-823W	MG RESISTOR	82kΩ 1/16W J	1	
	R8103	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	1	
	R8104	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	1	
	R8105	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R8106	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R8107	NRSA6AJ-222W	MG RESISTOR	2.2kΩ 1/16W J	1	
	R8109	NRSA6AD-471W	MG RESISTOR	470Ω 1/16W D	1	
	R8110	NRSA6AD-122W	MG RESISTOR	1.2kΩ 1/16W D	1	
	R8111	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	
	R8115	NRSA6AJ-5R6W	MG RESISTOR	5.6Ω 1/16W J	1	
	R8201	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	1	
	R8202	NRSA6AJ-683W	MG RESISTOR	68kΩ 1/16W J	1	
	R8203	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	1	
	R8204	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	1	
	R8205	NRSA6AJ-562W	MG RESISTOR	5.6kΩ 1/16W J	1	
	R8206	NRSA6AJ-821W	MG RESISTOR	820Ω 1/16W J	1	
	R8207	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R8208	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R8209	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	1	
	R8210	NRSA6AD-123W	MG RESISTOR	12kΩ 1/16W D	1	
	R8211	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	
	R8212	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R8213	NRSA6AJ-123W	MG RESISTOR	12kΩ 1/16W J	1	
	R8214	NRSA6AJ-150W	MG RESISTOR	15Ω 1/16W J	1	
	R8215	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	1	
	R8216	NRSA02J-100X	MG RESISTOR	10Ω 1/10W J	1	
	R8217	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R8301	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	
	R8302	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R8303	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	
	R8309	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R9993	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R9998	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R9999	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	RA721	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	A,C,I
	RA722	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	A,G,H,I,J,K,L,M,N
	RA723	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA724	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	RA725	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	RA729	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA731	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	L1	QQR1872-001	RF COIL		1	
	L2	QQL244J-561Z	COIL	560uH J	1	
	L3	NQL093K-R27X	P COIL	0.27uH K	1	
	L5	QQL244J-561Z	COIL	560uH J	1	
	L6	NQL79GM-4R7X	COIL	4.7uH M	1	
	L8	NQL093K-R47X	P COIL	0.47uH K	1	
	L9	NQL093K-4R7X	P COIL	4.7uH K	1	
	L10	NQL093K-R47X	P COIL	0.47uH K	1	
	L11	NQL093K-1R8X	P COIL	1.8uH K	1	
	L702	NQL382M-220X	COIL	22uH M	1	
	L801	NQL52EM-220X	COIL	22uH M	1	
	L901	QQR1883-001	CHOCOE COIL		1	
	L902	NQL79GM-101X	COIL	100uH M	1	
	L961	NQR0536-001X	CHOCOE COIL		1	
	L8001	NQLC8CM-220X	COIL	22uH M	1	
	L8002	NQL52EM-220X	COIL	22uH M	1	
	L8031	NQLC8CM-220X	COIL	22uH M	1	
	L8101	NQLC8CM-220X	COIL	22uH M	1	
	L8201	NQLC8CM-470X	COIL	47uH M	1	
	BK101	LV44247-011A	SHIELD TIGHT		1	A,C,I

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	BK102	LV45619-001A	SHIELD		1	A,C,I
	CN101	QGA2501C1-04	CONNECTOR	W-B (1-4)	1	
	CN103	QGF0536C3-12W	CONNECTOR	FFC/FPC (1-12)	1	A,G,H,I,J,K,L,M,N
	CN104	QGF0536C3-12W	CONNECTOR	FFC/FPC (1-12)	1	
	CN105	QGF0534F5-50X	CONNECTOR	FFC/FPC (1-50)	1	
	CN108	QGF0534F5-12X	CONNECTOR	FFC/FPC (1-12)	1	
	CN110	QGA1002F1-08X	CONNECTOR	W-B (1-8)	1	
	CN111	QGA2001C1-05	CONNECTOR	W-B (1-5)	1	
	CN112	QGA2001C1-02	CONNECTOR	W-B (1-2)	1	
	CN114	QGZ1102J1-20	CONNECTOR	(1-20)	1	
	CN115	QGZ1102J1-20	CONNECTOR	(1-20)	1	
	CN901	QNZ0607-001	CAR CONNECTOR		1	
	EP101	NNZ0129-001X	EARTH TERMINAL		1	
△	F801	NMFZ028-5R0X-J1	FUSE	5A	1	
△	F831	NMFZ028-2R0X-J1	FUSE	2A	1	
	J101	QNB0348-001	ANT TERMINAL		1	
	J1001	QNN0870-001	PIN JACK		1	
	J1002	QNN0732-001	AUX JACK		1	
	J1381	QNZ0095-001	CONNECTOR		1	A,C,I
	K1	NQR0269-026X	FERRITE BEADS	10.500mA	1	A,C,I
	TH131	NAD0052-471X	P THERMISTOR	470Ω	1	
	VA111	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA121	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	X1	QAX0952-001Z	CRYSTAL		1	
	X701	QAX0958-001Z	CXO		1	
	X702	QAX0961-001	CRYSTAL		1	
	Panel-A board <02>					
	IC401	MN103SH23	IC(MCU)		1	
	IC403	S-80827CNNB-G-W	IC		1	
	IC404	TC7SZ17FE-X	IC(DIGITAL)		1	
	IC405	XC6213B122NG-X	IC		1	
	IC406	TC7SP3125TU-X	IC(DIGITAL)		1	
	IC431	M12L1281687TG2L	IC(DIGITAL)		1	
	IC431	or A3V28S40FTP-G6	IC		1	
	IC441	JVM490D	PROGRAMED IC		1	
	IC441	JVM490E	PROGRAMED IC		1	A,B,C,D,E,G,H,I,J,K,L,M, N F
	IC501	NJM2831F92-X	IC		1	
	IC511	NJM2904V-X	IC		1	
	Q4001	RT1N141U-X	DIGI TRANSISTOR		1	
	Q4002	RT1N141U-X	DIGI TRANSISTOR		1	
	Q4601	ISA1602AM1/EF/X	TRANSISTOR		1	
	Q4611	ISA1602AM1/EF/X	TRANSISTOR		1	
	Q4621	ISA1602AM1/EF/X	TRANSISTOR		1	
	Q4631	ISA1602AM1/EF/X	TRANSISTOR		1	
	Q5201	RT1N141U-X	DIGI TRANSISTOR		1	
	Q5202	2SC4154/EF-X	TRANSISTOR		1	
	Q5203	2SC4154/EF-X	TRANSISTOR		1	
	Q5301	ISA1602AM1/EF/X	TRANSISTOR		1	
	Q5302	ISA1602AM1/EF/X	TRANSISTOR		1	
	D4001	HSU119-X	SI DIODE		1	
	D5201	HSU119-X	SI DIODE		1	
	D5202	RKZ18B2KG-X	Z DIODE		1	
	C4001	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	1	
	C4002	NDCA1HJ-6R0W	C CAPACITOR	6pF 50V J	1	
	C4010	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4013	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4019	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4020	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4028	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4038	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4039	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4049	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4051	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4055	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4056	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4057	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4062	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4066	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4067	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4069	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4074	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4075	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4085	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4094	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	
	C4095	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4097	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4103	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4106	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4107	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4120	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4121	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4122	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4129	NDC31HJ-151X	C CAPACITOR	150pF 50V J	1	
	C4135	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4145	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4154	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C4155	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C4156	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4157	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4158	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4159	NDCA1HJ-101W	C CAPACITOR	100pF 50V J	1	
	C4160	NDCA1HJ-330W	C CAPACITOR	33pF 50V J	1	
	C4161	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	1	
	C4163	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4164	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4165	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4166	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4168	NCJ20JM-226X-R	C CAPACITOR	22uF 6.3V M	1	
	C4169	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4171	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4172	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4173	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4176	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4177	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4178	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4182	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4183	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4190	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4196	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4201	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4210	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4217	NCB20JK-475X	C CAPACITOR	4.7uF 6.3V K	1	
	C4218	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4301	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4303	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4309	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4314	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4327	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4343	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4349	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4354	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4408	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4409	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4601	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C4602	NDCA1HJ-680W	C CAPACITOR	68pF 50V J	1	
	C4604	NDCA1HJ-180W	C CAPACITOR	18pF 50V J	1	
	C4605	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C4614	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	1	
	C4615	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4616	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4624	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	1	
	C4625	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4626	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4634	NDCA1HJ-560W	C CAPACITOR	56pF 50V J	1	
	C4635	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C4636	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C5001	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5002	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C5003	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C5004	NCJ21CK-106X-R	C CAPACITOR	10uF 16V K	1	
	C5005	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	
	C5010	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C5011	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5103	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C5201	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5202	NCB21EK-105X	C CAPACITOR	1uF 25V K	1	
	C5203	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C5301	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C5302	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	R4001	NRSA6AJ-681W	MG RESISTOR	680Ω 1/16W J	1	
	R4002	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R4030	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4053	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4054	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4058	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4059	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4060	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4062	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4063	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4064	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4065	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4066	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4067	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4068	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	
	R4069	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4070	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4077	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4078	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4079	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4083	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4091	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4127	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4128	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R4129	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4130	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4131	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4132	NRSA6AJ-220W	MG RESISTOR	22Ω 1/16W J	1	
	R4133	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4136	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4137	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4138	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	
	R4147	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	
	R4149	NRSA6AJ-750W	MG RESISTOR	75Ω 1/16W J	1	
	R4161	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4164	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	
	R4166	NRSA6AJ-2R2W	MG RESISTOR	2.2Ω 1/16W J	1	
	R4167	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R4402	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	
	R4601	NRSA6AJ-391W	MG RESISTOR	390Ω 1/16W J	1	
	R4606	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	
	R4608	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R4611	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4613	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4614	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4615	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R4618	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R4621	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4623	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4624	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4625	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R4628	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R4631	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R4633	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4634	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R4635	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	
	R4638	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R4640	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R5001	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	
	R5002	NRSA6AD-161W	MG RESISTOR	160Ω 1/16W D	1	
	R5003	NRSA6AD-430W	MG RESISTOR	43Ω 1/16W D	1	
	R5004	NRSA6AD-360W	MG RESISTOR	36Ω 1/16W D	1	
	R5005	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	
	R5006	NRSA6AD-161W	MG RESISTOR	160Ω 1/16W D	1	
	R5007	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	
	R5008	NRSA6AD-360W	MG RESISTOR	36Ω 1/16W D	1	
	R5009	NRSA6AD-430W	MG RESISTOR	43Ω 1/16W D	1	
	R5010	NRSA6AD-161W	MG RESISTOR	160Ω 1/16W D	1	
	R5011	NRSA6AD-620W	MG RESISTOR	62Ω 1/16W D	1	
	R5020	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R5106	NRSA6AD-822W	MG RESISTOR	8.2kΩ 1/16W D	1	
	R5107	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	1	
	R5109	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R5201	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R5203	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	1	
	R5204	NRSA6AJ-183W	MG RESISTOR	18kΩ 1/16W J	1	
	R5205	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R5302	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R5303	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	
	R5304	NRSA6AJ-562W	MG RESISTOR	5.6kΩ 1/16W J	1	
	RA401	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA402	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA403	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA404	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA405	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA406	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA407	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA408	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA409	NRB04CJ-680W	NET RESISTOR	68Ω J	1	
	RA415	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA416	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA417	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA418	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA419	NRB04CJ-101W	NET RESISTOR	100Ω J	1	
	RA420	NRB04CJ-330W	NET RESISTOR	33Ω J	1	
	L4001	NQL79GM-470X	COIL	47uH M	1	
	L4601	NQLD8DJ-470X	COIL	47uH J	1	
	CN401	QGF0534F5-30X	CONNECTOR	FFC/FPC (1-30)	1	
	CN501	QGF0572F1-60X	CONNECTOR	FFC/FPC (1-60)	1	
	EP401	NNZ0129-001X	EARTH TERMINAL		1	
	X4001	NAX1038-001X	CRYSTAL		1	
Panel-B board <03>						
	IC651	KSM-2003TN5B	IR DETECT UNIT		1	
	Q6001	2SC4154/EF/-X	TRANSISTOR		1	
	Q6002	2SC4154/EF/-X	TRANSISTOR		1	
	Q6003	2SC4154/EF/-X	TRANSISTOR		1	
	Q6004	2SC4154/EF/-X	TRANSISTOR		1	
	Q6005	2SD1664/QR/-W	TRANSISTOR		1	
	Q6006	2SC4154/EF/-X	TRANSISTOR		1	
	Q6007	2SC4154/EF/-X	TRANSISTOR		1	
	Q6008	2SC4154/EF/-X	TRANSISTOR		1	
	Q6009	2SC4154/EF/-X	TRANSISTOR		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	Q6010	RT1P141U-X	DIGI TRANSISTOR		1	
	Q6011	RT1N141U-X	DIGI TRANSISTOR		1	
	Q6201	2SC4154/EF/-X	TRANSISTOR		1	
	Q6202	2SC4154/EF/-X	TRANSISTOR		1	
	Q6203	2SC4154/EF/-X	TRANSISTOR		1	
	D6001	RKZ30BKX-X	Z DIODE		1	
	D6041	RKZ18B2KG-X	Z DIODE		1	
	D6042	HSU119-X	SI DIODE		1	
	D6101	RKZ6.2B2KG-X	Z DIODE		1	
	D6102	RKZ6.2B2KG-X	Z DIODE		1	
	D6103	RKZ6.2B2KG-X	Z DIODE		1	
	D6104	RKZ6.2B2KG-X	Z DIODE		1	
	D6501	NSSM065T-X	LED		1	
	D6502	NSSM065T-X	LED		1	
	D6503	NSSM065T-X	LED		1	
	D6504	NSSM065T-X	LED		1	
	D6506	SML-D12V8W/PQ-X	LED		1	
	D6507	SML-D12V8W/PQ-X	LED		1	
	C6001	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C6002	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C6003	NCB21EK-105X	C CAPACITOR	1uF 25V K	1	
	C6004	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C6101	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6102	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6103	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6104	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6110	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	
	C6111	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6112	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C6502	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	R6001	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	1	
	R6002	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R6003	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	1	
	R6004	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R6005	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	1	
	R6006	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R6007	NRSA6AJ-181W	MG RESISTOR	180Ω 1/16W J	1	
	R6008	NRSA6AJ-221W	MG RESISTOR	220Ω 1/16W J	1	
	R6010	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R6012	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	
	R6013	NRSA6AJ-121W	MG RESISTOR	120Ω 1/16W J	1	
	R6111	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R6112	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R6201	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R6202	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R6203	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	
	R6204	NRSA6AD-301W	MG RESISTOR	300Ω 1/16W D	1	
	R6207	NRSA6AD-271W	MG RESISTOR	270Ω 1/16W D	1	
	R6208	NRSA6AD-301W	MG RESISTOR	300Ω 1/16W D	1	
	R6209	NRSA6AD-331W	MG RESISTOR	330Ω 1/16W D	1	
	R6210	NRSA6AD-391W	MG RESISTOR	390Ω 1/16W D	1	
	R6212	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	1	
	R6501	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R6502	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R6509	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	
	R6510	NRSA6AJ-152W	MG RESISTOR	1.5kΩ 1/16W J	1	
	RA601	NRB04CJ-821W	NET RESISTOR	820Ω J	1	
	RA602	NRB04CJ-102W	NET RESISTOR	1kΩ J	1	
	RA603	NRB04CJ-470W	NET RESISTOR	47Ω J	1	
	CN601	QGZ1102K2-20X	CONNECTOR	(1-20)	1	
	CN602	QGZ1102K2-20X	CONNECTOR	(1-20)	1	
	CN603	QGF0534F5-30X	CONNECTOR	FFC/FPC (1-30)	1	
	CN604	QGF0534F5-17X	CONNECTOR	FFC/FPC (1-17)	1	
	CN605	QGF0534F5-10X	CONNECTOR	FFC/FPC (1-10)	1	
	CN606	QGF1039F3-04X	CONNECTOR	FFC/FPC (1-4)	1	
	CN651	QGF0534F5-17X	CONNECTOR	FFC/FPC (1-17)	1	
	J652	QNS0299-001	3.5 JACK		1	
	JS651	QSW1279-001	ROTARY ENCODER		1	
	S6501	NSW0335-001X	TACT SWITCH		1	
	S6502	NSW0335-001X	TACT SWITCH		1	
	S6503	NSW0335-001X	TACT SWITCH		1	
	S6504	NSW0335-001X	TACT SWITCH		1	
	VA602	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA604	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA606	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA608	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA611	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA618	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA620	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA621	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA622	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA623	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA624	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA625	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA626	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA627	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA628	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA630	NAF0034-270X	VARIATOR(ZNR)	27V	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	VA638	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA640	NAF0034-270X	VARIATOR(ZNR)	27V	1	
<b>Sub board &lt;04&gt;</b>						
	IC201	NJM2561F1-X	IC		1	
	IC211	NJM2535V-X	IC		1	
	IC221	NJM2505AF-X	IC		1	
	IC231	NJM2535V-X	IC		1	
	D223	HSU119-X	SI DIODE		1	
	D224	HSU119-X	SI DIODE		1	
	D296	HSU119-X	SI DIODE		1	
	D297	HSU119-X	SI DIODE		1	
	C200	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C201	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C202	QETN1AM-477Z	E CAPACITOR	470uF 10V M	1	
	C203	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C211	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C212	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C214	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C221	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C222	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C223	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	
	C224	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C231	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C233	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C234	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	
	C261	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C271	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C281	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	
	C296	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	1	
	C2102	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C2202	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C2302	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	R201	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	
	R203	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R213	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R216	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R218	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R221	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R222	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	
	R224	NRSA6AJ-390W	MG RESISTOR	39Ω 1/16W J	1	
	R225	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R226	NRSA6AJ-104W	MG RESISTOR	100kΩ 1/16W J	1	
	R228	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	
	R235	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	
	R238	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R244	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R247	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	
	R248	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	
	R251	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R252	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R261	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R268	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	
	R271	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R278	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	
	R281	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	
	R288	NRSA63J-750X	MG RESISTOR	75Ω 1/16W J	1	
	R291	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	1	
	R295	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R296	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R2101	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	R2201	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1	
	L200	QQL244K-220Z	P COIL	22uH K	1	
	CN201	QGF0534F5-12X	CONNECTOR	FFC/FPC (1-12)	1	
	CN202	QGF0534F5-12X	CONNECTOR	FFC/FPC (1-12)	1	
	CN231	QGA2001F1-02	CONNECTOR	W-B (1-2)	1	A,G,H,I,J,K,L,M,N
	CN241	QGA2501C1-02	CONNECTOR	W-B (1-2)	1	
	J201	QNN0011-002	PIN JACK		1	
	J261	QND0162-001	DIN CONNECTOR		1	
	J2000	QNS0283-001	3.5 JACK		1	A,G,H,I,J,K,L,M,N
	P201	QZW0112-002	WIRE CLAMP		1	
	P202	QZW0010-001	STYLE PIN		1	A,G,H,I,J,K,L,M,N
	P203	QZW0010-001	STYLE PIN		1	
	VA201	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA210	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA220	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA221	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA241	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA251	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA252	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA261	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA271	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA281	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA291	NAF0034-270X	VARIATOR(ZNR)	27V	1	
	VA295	NAF0034-270X	VARIATOR(ZNR)	27V	1	
<b>BT board Except KW-AVX640/646/648&lt;05&gt;</b>						
	IC301	TCC8600	IC		1	A,G,H,I,J,K,L,M,N
	IC302	JVM501B	PROGRAMED IC		1	A,G,H,I,J,K,L,M,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	IC303	M12L1281687TG2L	IC(DIGITAL)		1	A,G,H,I,J,K,L,M,N
	IC303	or H57V1262GTR-75C	IC		1	A,G,H,I,J,K,L,M,N
	IC311	R1EX24256ASAS-X	IC		1	A,G,H,I,J,K,L,M,N
	IC331	AK4387ET-X	IC		1	A,G,H,I,J,K,L,M,N
	IC332	NJM4565E-X	IC		1	A,G,H,I,J,K,L,M,N
	IC341	NJM4565E-X	IC		1	A,G,H,I,J,K,L,M,N
	IC371	XC6213B182NG-X	IC		1	A,G,H,I,J,K,L,M,N
	Q3001	2SB1424(QR/-W	TRANSISTOR		1	A,G,H,I,J,K,L,M,N
	Q3002	RT1N141U-X	DIGI TRANSISTOR		1	A,G,H,I,J,K,L,M,N
	Q3311	2SC1623A/5-6/-X	TRANSISTOR		1	A,G,H,I,J,K,L,M,N
	D3003	HSU119-X	SI DIODE		1	A,G,H,I,J,K,L,M,N
	D3311	RKZ6.2B2KG-X	Z DIODE		1	A,G,H,I,J,K,L,M,N
	D3312	HSU119-X	SI DIODE		1	A,G,H,I,J,K,L,M,N
	C311	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	A,G,H,I,J,K,L,M,N
	C331	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	A,G,H,I,J,K,L,M,N
	C333	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C335	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C337	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C339	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	A,G,H,I,J,K,L,M,N
	C341	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C343	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C371	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C372	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3001	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	A,G,H,I,J,K,L,M,N
	C3010	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3100	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3102	NCBA1HK-821W	C CAPACITOR	820pF 50V K	1	A,G,H,I,J,K,L,M,N
	C3103	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	A,G,H,I,J,K,L,M,N
	C3104	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3142	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3143	NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	A,G,H,I,J,K,L,M,N
	C3145	NCBA1CK-123W	C CAPACITOR	0.012uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3146	NCBA1CK-123W	C CAPACITOR	0.012uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3147	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3151	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3152	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3202	NCBA1HK-821W	C CAPACITOR	820pF 50V K	1	A,G,H,I,J,K,L,M,N
	C3203	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	A,G,H,I,J,K,L,M,N
	C3204	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3241	NCBA1HK-102W	C CAPACITOR	1000pF 50V K	1	A,G,H,I,J,K,L,M,N
	C3242	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3243	NDCA1HJ-471W	C CAPACITOR	470pF 50V J	1	A,G,H,I,J,K,L,M,N
	C3301	NEAF1CM-107X	E CAPACITOR	100uF 16V M	1	A,G,H,I,J,K,L,M,N
	C3302	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3303	NEAF1CM-476X	E CAPACITOR	47uF 16V M	1	A,G,H,I,J,K,L,M,N
	C3304	NCBA1CK-123W	C CAPACITOR	0.012uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3311	NEAF1CM-107X	E CAPACITOR	100uF 16V M	1	A,G,H,I,J,K,L,M,N
	C3322	NCBA1CK-104W	C CAPACITOR	0.1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3323	NEAF1CM-476X	E CAPACITOR	47uF 16V M	1	A,G,H,I,J,K,L,M,N
	C3324	NCBA1HK-821W	C CAPACITOR	820pF 50V K	1	A,G,H,I,J,K,L,M,N
	C3325	NDCA1HJ-151W	C CAPACITOR	150pF 50V J	1	A,G,H,I,J,K,L,M,N
	C3326	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3407	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3409	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3410	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3419	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3424	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3426	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3440	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3443	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3454	NDCA1HJ-270W	C CAPACITOR	27pF 50V J	1	A,G,H,I,J,K,L,M,N
	C3455	NDCA1HJ-330W	C CAPACITOR	33pF 50V J	1	A,G,H,I,J,K,L,M,N
	C3458	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3465	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3468	NCBA1CK-103W	C CAPACITOR	0.01uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3469	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3472	NCBA1HK-122W	C CAPACITOR	1200pF 50V K	1	A,G,H,I,J,K,L,M,N
	C3473	NCJA0JK-105W-R	C CAPACITOR	1uF 6.3V K	1	A,G,H,I,J,K,L,M,N
	C3475	NDCA1HJ-331W	C CAPACITOR	330pF 50V J	1	A,G,H,I,J,K,L,M,N
	C3477	NCB31CK-154X	C CAPACITOR	0.15uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3484	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3491	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3492	NCBA1CK-473W	C CAPACITOR	0.047uF 16V K	1	A,G,H,I,J,K,L,M,N
	C3524	NCBA1AK-104W	C CAPACITOR	0.1uF 10V K	1	A,G,H,I,J,K,L,M,N
	C3575	NDCA1HJ-220W	C CAPACITOR	22pF 50V J	1	A,G,H,I,J,K,L,M,N
	R322	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R323	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R324	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3001	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3002	NRSA6AJ-471W	MG RESISTOR	470Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3003	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3004	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3005	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3008	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3010	NRSA6AJ-100W	MG RESISTOR	10Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3101	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3102	NRSA6AJ-243W	MG RESISTOR	24kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3103	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R3142	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3143	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3144	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3145	NRSA6AJ-333W	MG RESISTOR	33kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3146	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3151	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3152	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3201	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3202	NRSA6AJ-243W	MG RESISTOR	24kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3203	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3241	NRSA6AJ-822W	MG RESISTOR	8.2kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3242	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3243	NRSA6AJ-124W	MG RESISTOR	120kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3311	NRSA6AJ-122W	MG RESISTOR	1.2kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3312	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3313	NRSA6AJ-680W	MG RESISTOR	68Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3321	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3322	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3323	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3324	NRSA6AJ-243W	MG RESISTOR	24kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3325	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3326	NRSA6AJ-473W	MG RESISTOR	47kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3404	NRSA6AJ-102W	MG RESISTOR	1kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3415	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3444	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3446	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3447	NRSA6AJ-470W	MG RESISTOR	47Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3454	NRSA6AJ-151W	MG RESISTOR	150Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3455	NRSA6AJ-105W	MG RESISTOR	1MΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3460	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3463	NRSA6AJ-101W	MG RESISTOR	100Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3468	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3469	NRSA6AJ-223W	MG RESISTOR	22kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3478	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3479	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3480	NRSA6AJ-153W	MG RESISTOR	15kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3482	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3483	NRSA6AJ-330W	MG RESISTOR	33Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3491	NRSA6AJ-103W	MG RESISTOR	10kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3493	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3494	NRSA6AJ-271W	MG RESISTOR	270Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3577	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3586	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3587	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3589	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3593	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	R3594	NRSA6AJ-472W	MG RESISTOR	4.7kΩ 1/16W J	1	A,G,H,I,J,K,L,M,N
	RA301	NRB04CJ-680W	NET RESISTOR	68Ω J	1	A,G,H,I,J,K,L,M,N
	RA302	NRB04CJ-680W	NET RESISTOR	68Ω J	1	A,G,H,I,J,K,L,M,N
	RA303	NRB04CJ-680W	NET RESISTOR	68Ω J	1	A,G,H,I,J,K,L,M,N
	RA304	NRB04CJ-680W	NET RESISTOR	68Ω J	1	A,G,H,I,J,K,L,M,N
	RA305	NRB04CJ-470W	NET RESISTOR	47Ω J	1	A,G,H,I,J,K,L,M,N
	RA306	NRB04CJ-472W	NET RESISTOR	4.7kΩ J	1	A,G,H,I,J,K,L,M,N
	RA307	NRB04CJ-101W	NET RESISTOR	100Ω J	1	A,G,H,I,J,K,L,M,N
	L3001	NQR0536-001X	CHOCO COIL		1	A,G,H,I,J,K,L,M,N
	L3301	NQL79GM-470X	COIL	47uH M	1	A,G,H,I,J,K,L,M,N
	L3462	NQL093K-1R8X	P COIL	1.8uH K	1	A,G,H,I,J,K,L,M,N
	L3473	NQL79GM-330X	COIL	33uH M	1	A,G,H,I,J,K,L,M,N
	B301	NRSA6AJ-0R0W	MG RESISTOR	0Ω 1/16W J	1	A,G,H,I,J,K,L,M,N
	CN301	QNZ1037-001	USB CONNECTOR		1	A,G,H,I,J,K,L,M,N
	CN311	QGF0534F5-12X	CONNECTOR	FFC/FPC (1-12)	1	A,G,H,I,J,K,L,M,N
	CN341	QGA2001F6-02X	CONNECTOR	W-B (1-2)	1	A,G,H,I,J,K,L,M,N
	X3402	NAX1121-001X	CRYSTAL		1	A,G,H,I,J,K,L,M,N

Front end board (FMU-XM2-11D) <06>

IC1	BD8215EFV-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
IC3	MM3233CF-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
IC7	TC7PA53FU-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
IC8	MFI341S2162-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
IC9	RT3CLLM/EF-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
IC10	RT3K11M-X	MOS FET ARRAY		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
IC301	MN2DS0018MA	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
IC302	MM1701CH-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	IC308	NJU6368PF1-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	IC398	JVM487D	PROGRAMED IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	IC399	A3V28S40FTP-G6	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	IC400	AK4387ET-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	IC481	R1EX24032ATAA-X	IC		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	IC501	TC74LCX373FT-X	IC(DIGITAL)		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	IC502	TC74LCX373FT-X	IC(DIGITAL)		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	Q2	RT1N141U-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	Q4	DSC2001/R/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	Q7	DSC2001/R/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	Q101	2SB1424/R/-W	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	Q103	2SB1424/R/-W	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	Q105	2SC4617/QR/-X	TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	Q301	RT1N441U-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	Q302	RT1N441U-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	Q304	RT1N441U-X	DIGI TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	D6	AN1102W-6-X	IR LED		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	D7	AN1102W-6-X	IR LED		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	D9	PS1192HB-22-X	PHOTO TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	D11	PS1192HB-22-X	PHOTO TRANSISTOR		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C2	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C3	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C4	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C5	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C6	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C7	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C8	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C9	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C11	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C12	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C13	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C14	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C15	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C16	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C17	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C18	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C19	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C20	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C21	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C22	NCJ10JM-476X-A	C CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C23	NCJ10JM-476X-A	C CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C24	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C25	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C26	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C31	NCB31HK-122X	C CAPACITOR	1200pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C32	NCB31HK-122X	C CAPACITOR	1200pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C48	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C50	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C51	NDC31HJ-4R0X	C CAPACITOR	4pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C52	NDC31HJ-5R0X	C CAPACITOR	5pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C60	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C63	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C65	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C66	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C67	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C68	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C69	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C70	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C71	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C72	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C73	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C74	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C75	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C76	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C77	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C78	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C79	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C80	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C81	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C82	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C83	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C84	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C85	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C86	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C87	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C88	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C89	NCB31HK-183X	C CAPACITOR	0.018uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C90	NCB31HK-562X	C CAPACITOR	5600pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C91	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C92	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C93	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C99	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C100	NCB31CK-684X	C CAPACITOR	0.68uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C101	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C102	NCB31CK-684X	C CAPACITOR	0.68uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C109	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C113	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C117	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C118	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C121	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C122	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C126	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C127	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C128	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C129	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C130	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C131	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C132	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C133	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C134	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C135	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C136	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C137	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C139	NCJ20JM-226X-A	C CAPACITOR	22uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C142	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C143	NCB10JK-226X-R	C CAPACITOR	22uF 6.3V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C145	NCJ11AK-476X-A	C CAPACITOR	47uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C148	NCB31HK-331X	C CAPACITOR	330pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C149	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C151	NCB31CK-473X	C CAPACITOR	0.047uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C155	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C156	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C161	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C162	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C164	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C165	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C168	NCB31HK-272X	C CAPACITOR	2700pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C170	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C173	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C174	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C175	NCJ41CK-476X-A	C CAPACITOR	47uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	C176	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C177	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C178	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C197	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C199	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C200	NCJ10JM-476X-A	C CAPACITOR	47uF 6.3V M	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C201	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C205	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C206	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C211	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C215	NDC31HJ-181X	C CAPACITOR	180pF 50V J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C216	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C218	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C219	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C220	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C222	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C223	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C224	NCB21AK-225X	C CAPACITOR	2.2uF 10V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C225	NCJ41CK-476X-A	C CAPACITOR	47uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C228	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C229	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C232	NCJ41CK-476X-A	C CAPACITOR	47uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C233	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C235	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C237	NCB31HK-221X	C CAPACITOR	220pF 50V K	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C238	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C240	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C241	NCB31CK-104X	C CAPACITOR	0.1uF 16V	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C251	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	C252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R36	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R37	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R46	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R47	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R49	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R51	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R52	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R53	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R54	NRSA6AD-910W	MG RESISTOR	91Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R55	NRSA6AD-910W	MG RESISTOR	91Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R56	NRSA6AD-432W	MG RESISTOR	4.3kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R57	NRSA6AD-242W	MG RESISTOR	2.4kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R58	NRZ0122-390X	MG RESISTOR	39Ω	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R59	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R60	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R61	NRSA6AD-471W	MG RESISTOR	470Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R62	NRSA6AD-471W	MG RESISTOR	470Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R64	NRSA63D-432X	MG RESISTOR	4.3kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R65	NRSA63D-242X	MG RESISTOR	2.4kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R66	NRZ0122-270X	MG RESISTOR	27Ω	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R67	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R68	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R69	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R70	NRSA6AD-471W	MG RESISTOR	470Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R79	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R83	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R87	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R89	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R90	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R92	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R93	NRSA6AD-222W	MG RESISTOR	2.2kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R94	NRSA6AD-222W	MG RESISTOR	2.2kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R99	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R100	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R105	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R107	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R112	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R113	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R114	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R117	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R118	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R119	NRSA63D-471X	MG RESISTOR	470Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R120	NRSA63J-152X	MG RESISTOR	1.5kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R122	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R128	NRSA6AD-270W	MG RESISTOR	27Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R129	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R131	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R132	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R133	NRSA6AD-223W	MG RESISTOR	22kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R134	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R136	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R137	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R141	NRSA63D-332X	MG RESISTOR	3.3kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R144	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R145	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R152	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R153	NRSA6AD-162W	MG RESISTOR	1.6kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R154	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R156	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R160	NRSA63D-303X	MG RESISTOR	30kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R163	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R164	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R165	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R166	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R168	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R170	NRSA6AD-151W	MG RESISTOR	150Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R171	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R172	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R173	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R174	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R177	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R189	NRSA6AD-331W	MG RESISTOR	330Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R190	NRSA6AD-331W	MG RESISTOR	330Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R195	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R211	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R213	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R215	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R216	NRSA63D-122X	MG RESISTOR	1.2kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R217	NRSA6AD-100W	MG RESISTOR	10Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R219	NRSA63J-150X	MG RESISTOR	15Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R220	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R226	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R229	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R233	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R240	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R241	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R242	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R248	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R250	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R252	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R253	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R254	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R255	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R258	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R259	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R260	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R265	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R267	NRSA6AD-472W	MG RESISTOR	4.7kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R268	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R270	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R272	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R273	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R275	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R303	NRZ0098-R18X	MG RESISTOR	0.18Ω	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R305	NRS181F-330X	MG RESISTOR	33Ω 1/8W F	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R306	NRS181F-330X	MG RESISTOR	33Ω 1/8W F	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R309	NRZ0098-R47X	MG RESISTOR	0.47Ω	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R310	NRSA6AD-333W	MG RESISTOR	33kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R311	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R318	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R319	NRSA6AD-622W	MG RESISTOR	6.2kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R323	NRSA6AD-391W	MG RESISTOR	390Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R324	NRSA63D-682X	MG RESISTOR	6.8kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R325	NRSA63D-753X	MG RESISTOR	75kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R329	NRZ0098-R47X	MG RESISTOR	0.47Ω	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R352	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R357	NRZ0098-R22X	MG RESISTOR	0.22Ω	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R359	NRSA6AD-243W	MG RESISTOR	24kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R362	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R364	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N
	R365	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M ,N

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R366	NRZ0098-R22X	MG RESISTOR	0.22Ω	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R367	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R369	NRZ0098-R22X	MG RESISTOR	0.22Ω	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R371	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R375	NRSA6AD-152W	MG RESISTOR	1.5kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R376	NRSA6AD-822W	MG RESISTOR	8.2kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R379	NRSA63D-332X	MG RESISTOR	3.3kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R380	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R382	NRSA6AD-102W	MG RESISTOR	1kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R383	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R384	NRSA6AD-104W	MG RESISTOR	100kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R386	NRSA6AD-184W	MG RESISTOR	180kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R387	NRSA63D-473X	MG RESISTOR	47kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R391	NRSA6AD-822W	MG RESISTOR	8.2kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R392	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R393	NRSA6AD-103W	MG RESISTOR	10kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R394	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R397	NRSA6AD-101W	MG RESISTOR	100Ω 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R400	NRSA6AD-153W	MG RESISTOR	15kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R402	NRSA6AD-473W	MG RESISTOR	47kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R403	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R406	NRZ0098-R22X	MG RESISTOR	0.22Ω	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R417	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R419	NRSA63D-104X	MG RESISTOR	100kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	R420	NRSA6AD-184W	MG RESISTOR	180kΩ 1/16W D	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	CN1	QGF0523F3-20W	CONNECTOR	FFC/FPC (1-20)	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	CN2	QGA1002F1-03X	CONNECTOR	W-B (1-3)	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	CN101	QGF0522F2-30W	CONNECTOR	FFC/FPC (1-30)	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	CN403	QGF0534F5-50X	CONNECTOR	FFC/FPC (1-50)	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K101	NQR0007-002X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K102	NQR0007-002X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N


MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	K103	NQR0502-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K104	NQR0502-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K105	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K108	NQR0129-002X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K110	NQR0129-002X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K111	NQR0129-002X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K112	NQR0129-002X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K113	NQR0502-001X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K114	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K115	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K116	NQR0129-002X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K117	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K118	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K119	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K120	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K132	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K133	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K135	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K136	NQR0022-005X	FERRITE BEADS		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K137	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K141	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	K142	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	S1	NSW0313-001X	DETECT SWITCH		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	X351	NAX0741-001X	CRYSTAL	27.000MHz	1	A,B,C,D,E,F,G,H,I,J,K,L,M,N
	X354	NAX0927-001X	CRYSTAL		1	A,B,C,D,E,F,G,H,I,J,K,L,M,N

# Packing materials and accessories

Block No.M3MM

No additional / supplemental order of WARRANTY CARDS are available.

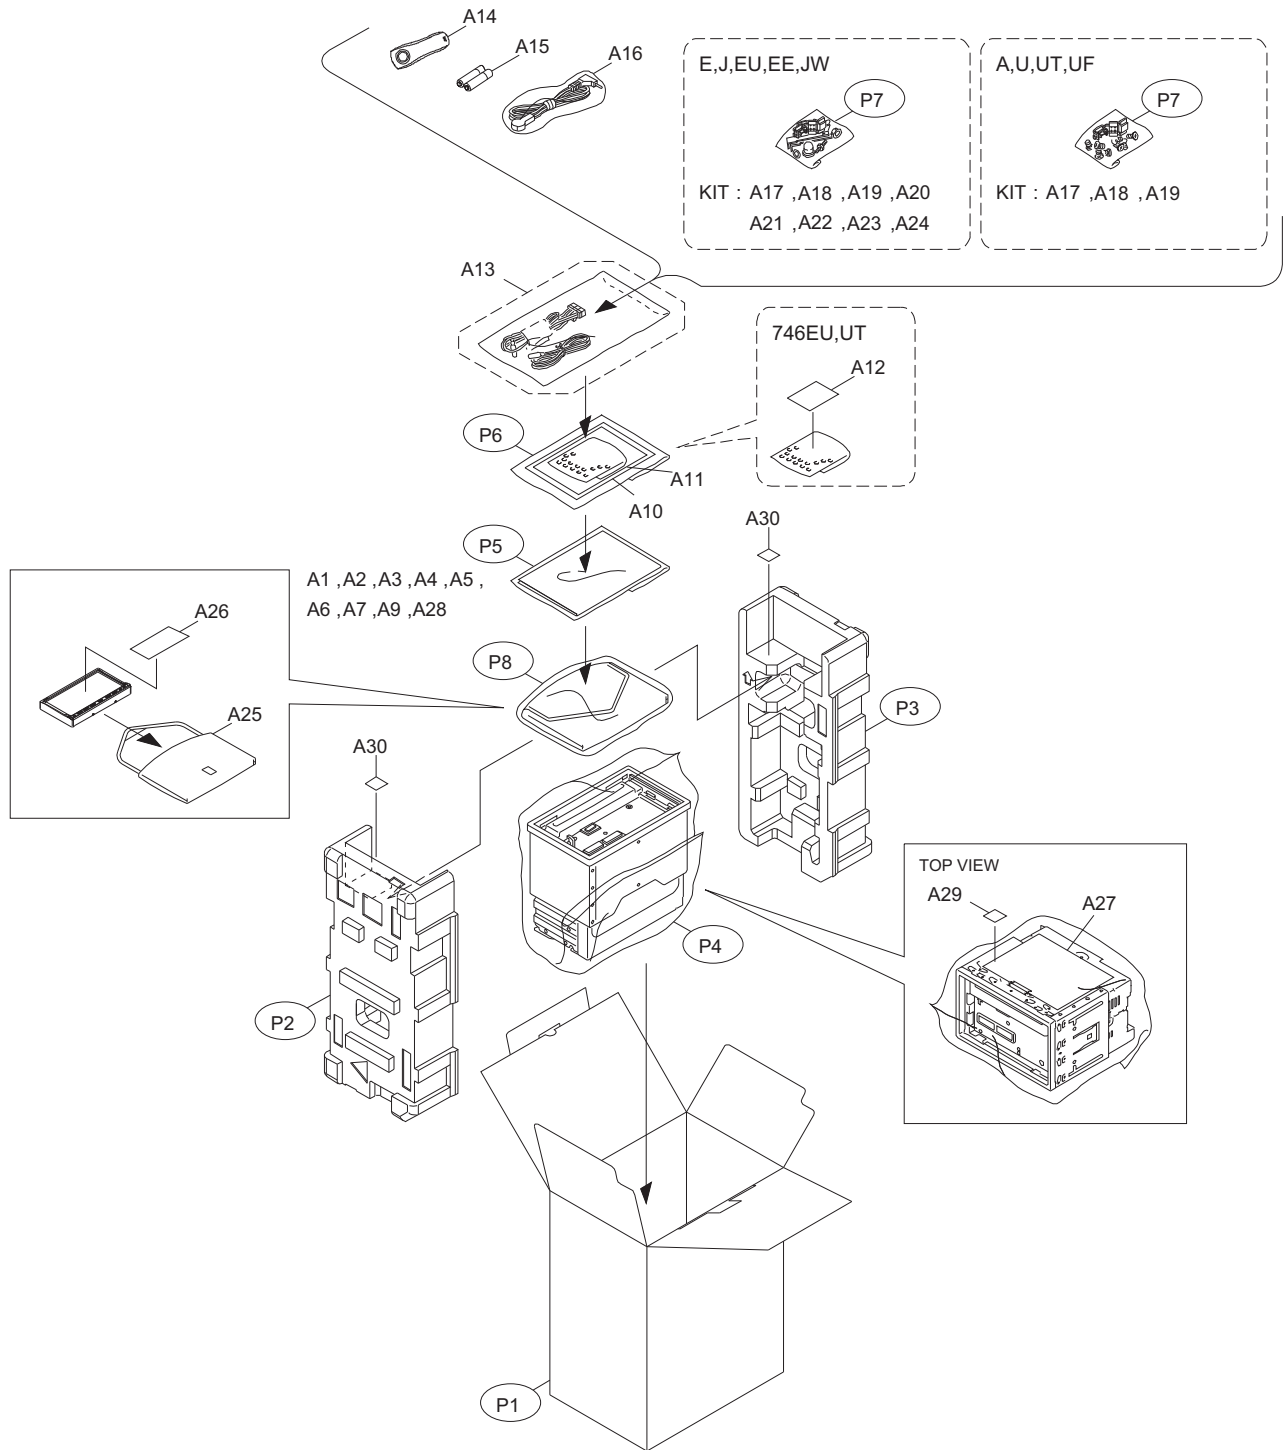

The parts without symbol number are not service.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KW-ADV794J	A	KW-AVX640E	B	KW-AVX640J	C	KW-AVX646EU	D
KW-AVX646U	E	KW-AVX648UF	F	KW-AVX740E	G	KW-AVX740EE	H
KW-AVX740J	I	KW-AVX746A	J	KW-AVX746EU	K	KW-AVX746U	L
KW-AVX746UT	M	KW-AVX748JW	N				

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

Packing and accessories <M3MM>

A1	LVT2173-001A	INST BOOK	ENG SPA FRE	1	A,C,I,N
A1	LVT2174-001A	INST BOOK	ENG GER FRE DUT	1	B,G
A1	LVT2176-001A	INST BOOK	ENG SPA FRE	1	D,K
A1	LVT2177-001A	INST BOOK	ENG CHI(TAIWAN)	1	E,L,M
A1	LVT2242-001A	INST BOOK	CHI(PEKIN)	1	F
A1	LVT2175-001A	INST BOOK	RUS UKR	1	H
A1	LVT2178-001A	INST BOOK	ENG	1	J
A2	LVT2174-003A	INST BOOK	SPA ITA POR SWE	1	B,G
A2	LVT2176-003A	INST BOOK	TUR RUS PER	1	D,K
A2	LVT2177-003A	INST BOOK	THA ARA PER	1	E,L
A3	LVT2173-002A	INSTALL MANUAL	ENG SPA FRE	1	A,C,I,N
A3	LVT2174-002A	INSTALL MANUAL	ENG GER FRE DUT	1	B,G
A3	LVT2176-002A	INSTALL MANUAL	ENG SPA FRE	1	D,K
A3	LVT2177-002A	INSTALL MANUAL	ENG CHI(TAIWAN)	1	E,L,M
A3	LVT2242-002A	INSTALL MANUAL	CHI(PEKIN)	1	F
A3	LVT2175-002A	INSTALL MANUAL	RUS UKR	1	H
A3	LVT2178-002A	INSTALL MANUAL	ENG	1	J
A4	LVT2174-004A	INSTALL MANUAL	SPA ITA POR SWE	1	B,G
A4	LVT2176-004A	INSTALL MANUAL	TUR RUS PER	1	D,K
A4	LVT2177-004A	INSTALL MANUAL	THA ARA PER	1	E,L
A5	-----	WARRANTY CARD	BT-51029-3	1	A
A5	-----	WARRANTY CARD	BT-54043-1	1	B,G,H
A5	-----	WARRANTY CARD	BT-51018-6	1	C,I
A5	-----	WARRANTY CARD	BT-59033-1	1	F
A6	-----	WARRANTY CARD	BT-52008-1	1	A,C,I
A7	BT-51044-1	REGIS. CARD		1	A,C,I
A9	VND3050-002	IDENTITY CARD		1	B,G
A10	GET0617-001E	USB/BT ADP SHEET		1	A,G,H,I,J,K,L,M,N
A11	LVT2224-001A	CAUTION SHEET		1	A,G,H,I,J,K,L,M,N
A12	GE40476-001A	BT LABEL		1	K
A12	GE40496-001A	UT LABEL		1	M
A13	QAM1351-001	CAR CABLE		1	A,C,E,F,I,J,L,M,N
A13	QAM1352-001	CAR CABLE		1	B,D,G,H,K
A14	RM-RK252	REMOCON UNIT		1	A,D,E,F,J,K,L,M,N
A15	-----	BATTERY		2	A,D,E,F,J,K,L,M
A16	QAN0109-001	MICROPHONE		1	A,G,H,I,J,K,L,M,N
A17	LV41478-001A	CORD CONNECTER		1	
A18	QYSDSP5008ZA	SCREW	M5 x 8mm	8	A,B,C,D,G,H,I,K,N
A18	QYSDSP5008ZA	SCREW	M5 x 8mm	4	E,F,J,L,M
A19	QYSSSP5008ZA	SCREW	M5 x 8mm	4	A,B,C,D,G,H,I,K,N
A19	QYSSSP5008ZA	SCREW	M5 x 8mm	8	E,F,J,L,M
A20	LV45399-001A	HOOK		2	A,B,C,D,G,H,I,K,N
A21	VKZ4027-202	PLUG NUT		1	A,B,C,D,G,H,I,K,N
A22	GE40426-002A	MOUNT BOLT		1	A,B,C,D,G,H,I,K,N
A23	VKZ4328-003	LOCK NUT		1	A,B,C,D,G,H,I,K,N
A24	QYWWSS53A008ZA	WASHER	0mm/5.3mm x	1	A,B,C,D,G,H,I,K,N
A25	LV45104-001A	SOFT CASE		1	
A26	LVT1970-001A	CAUTION SHEET		1	
A27	LV44661-009A	CAUTION SHEET		1	A,B,C,D,G,H,I,K,N
A27	LV44661-010A	CAUTION SHEET		1	E,F,J,L,M
A28	BT-59022-9	SVC CENTER LIST		1	F
A29	LV44928-303A	RECYCLE MARK		1	F
A30	LV44927-301A	RECYCLE MARK		2	F
KIT	SRW-MA473	SCREW PARTS KIT	A18 A19 A20 A21 A22 A23 A24 A25	1	A,B,C,D,G,H,I,K,N
KIT	SRW-MA443-3	SCREW PARTS KIT	A18 A19 A20	1	E,F,J,L,M
P1	LV39270-001A	CARTON		1	A
P1	LV39276-002A	CARTON		1	B
P1	LV39275-001A	CARTON		1	C
P1	LV39277-001A	CARTON		1	D,E
P1	LV39493-001A	CARTON		1	F
P1	LV39272-002A	CARTON		1	G
P1	LV39278-001A	CARTON		1	H
P1	LV39269-001A	CARTON		1	I
P1	LV39273-001A	CARTON		1	J,K,L,M
P1	LV39271-001A	CARTON		1	N
P2	LV11770-001A	CUSHION LEFT		1	A,B,C,D,G,H,I,K,N
P2	LV11772-002A	CUSHION LEFT		1	E,F,J,L,M
P3	LV11769-001A	CUSHION RIGHT		1	A,B,C,D,G,H,I,K,N
P3	LV11771-002A	CUSHION RIGHT		1	E,F,J,L,M
P4	QPC03504015PL	POLY BAG	35cm x 40cm	1	
P5	FSPG4002-001	POLY BAG		1	
P6	FSPG4002-001	POLY BAG		1	A,G,H,I,J,K,L,M,N
P7	QPA00801205	POLY BAG	8cm x 12cm	1	
P8	FSPG4002-001	POLY BAG		1	