9. EXPLODED VIEWS AND PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *Screws adjacent to ▼ mark on product are used for disassembly.*
● *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*
● *Nos. indicate the pages and Nos. in the service manual for the base model.*

9.1 PACKING SECTION

DJM-900NXS/SYXJ8, DJM-900SRT/LSYXJ8, DJM-900SRT/UXJCB and DJM-900SRT/XJCN5 are constructed the same except for the following:


Mark	No.	Symbol and Description	DJM-900NXS /SYXJ8	DJM-900SRT /LSYXJ8	DJM-900SRT /UXJCB	DJM-900SRT /XJCN5	Remarks
		PACKING SECTION					
⚠	P89-1	Power Cord	ADG7062	ADG7062	DDG1108	ADG7105	
	P89-3	CD-ROM	DXX2694	DXX2757	DXX2757	DXX2757	Installation Disc
NSP		CD-ROM	Not used	DXX2734	DXX2734	DXX2734	Serato DJ CONTROL CD
	P89-4	Operating Instructions (En/Fr/De/It/Nl/Es/Ru)	DRB1569	Not used	Not used	Not used	
	P89-4	Operating Instructions (En/Fr/De/It/Nl/Es/Ru)	Not used	DRB1701	Not used	Not used	
	P89-5	Operating Instructions (En)	Not used	Not used	DRB1702	Not used	
	P89-8	Operating Instructions (Zhcn)	Not used	Not used	Not used	DRB1703	
NSP	P89-9	Warranty Card	ARY7158	ARY7158	Not used	Not used	
NSP	P89-10	Flier	DRH1108	Not used	Not used	Not used	
	P89-13	Pad A	DHA1854	Not used	Not used	Not used	
	P89-13	Pad/F	Not used	DHA1896	DHA1896	DHA1896	
	P89-14	Pad B	DHA1855	Not used	Not used	Not used	
	P89-14	Pad/R	Not used	DHA1897	DHA1897	DHA1897	
	P89-16	Packing Case	DHG3077	DHG3291	DHG3292	DHG3294	
NSP		Leaflet/FPC	Not used	DRM1377	Not used	DRM1377	
NSP		Leaflet/FIR	Not used	DRM1378	DRM1378	DRM1378	
NSP		Leaflet/QSG	Not used	DRM1380	DRM1380	DRM1380	
NSP		Leaflet/ERT	Not used	DRM1384	DRM1384	DRM1384	
		Packing Board	Not used	DHB1002	DHB1002	DHB1002	
NSP		Poly Bag	Not used	AHG7082	AHG7082	AHG7082	
NSP		Record Assy/DVS	Not used	DXX2733	DXX2733	DXX2733	Serato DJ CONTROL VINYL
NSP		Leaflet/SUF	DRH1204	Not used	Not used	Not used	
NSP		Leaflet/TEN	DRY1262	Not used	Not used	Not used	
NSP		Leaflet/TFR	DRY1263	Not used	Not used	Not used	
		Label	Not used	Not used	DRW2594	Not used	

9.2 EXTERIOR SECION

DJM-900NXS/SYXJ8, DJM-900SRT/LSYXJ8, DJM-900SRT/UXJCB and DJM-900SRT/XJCN5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-900NXS /SYXJ8	DJM-900SRT /LSYXJ8	DJM-900SRT /UXJCB	DJM-900SRT /XJCN5	Remarks
		EXTERIOR SECION					
	P91-1	INPUT Assy	DWX3193	DWX3504	DWX3504	DWX3504	
	P91-3	TRM1 Assy	DWX3203	DWX3506	DWX3506	DWX3506	
	P91-4	TRM2 Assy	DWX3204	DWX3507	DWX3507	DWX3507	
	P91-5	TRM3 Assy	DWX3205	DWX3508	DWX3508	DWX3508	
	P91-6	TRM4 Assy	DWX3206	DWX3509	DWX3509	DWX3509	
	P91-9	Short Pin Plug	AKM7008	Not used	Not used	Not used	
	P91-9	Plug/PIN	Not used	DKM1024	DKM1024	DKM1024	
	P91-17	Extension Shaft A	DNK5365	Not used	Not used	Not used	
	P91-23	Front Panel	DNK5845	Not used	Not used	Not used	
	P91-23	Panel/FR	Not used	DNK6260	DNK6260	DNK6260	
	P91-26	Rotary SW Knob S (B)	DAA1178	Not used	Not used	Not used	
	P91-26	KNOB/RSW	Not used	DAA1308	DAA1308	DAA1308	
	P91-27	Rotary SW Knob S (C)	DAA1204	Not used	Not used	Not used	
	P91-27	Knob/CH	Not used	DAA1321	DAA1321	DAA1321	
NSP	P91-29	Label	Not used	Not used	DRW1975	Not used	
NSP	P91-30	Name Label	DRW2463	DAL1270	DAL1263	DAL1265	
NSP		Caution Label (L)	Not used	DRW2430	Not used	Not used	
NSP		Name Label/Ru	DRW2486	Not used	Not used	Not used	
NSP		Label/FCC	Not used	Not used	DRW2595	Not used	

EXTERIOR SECION

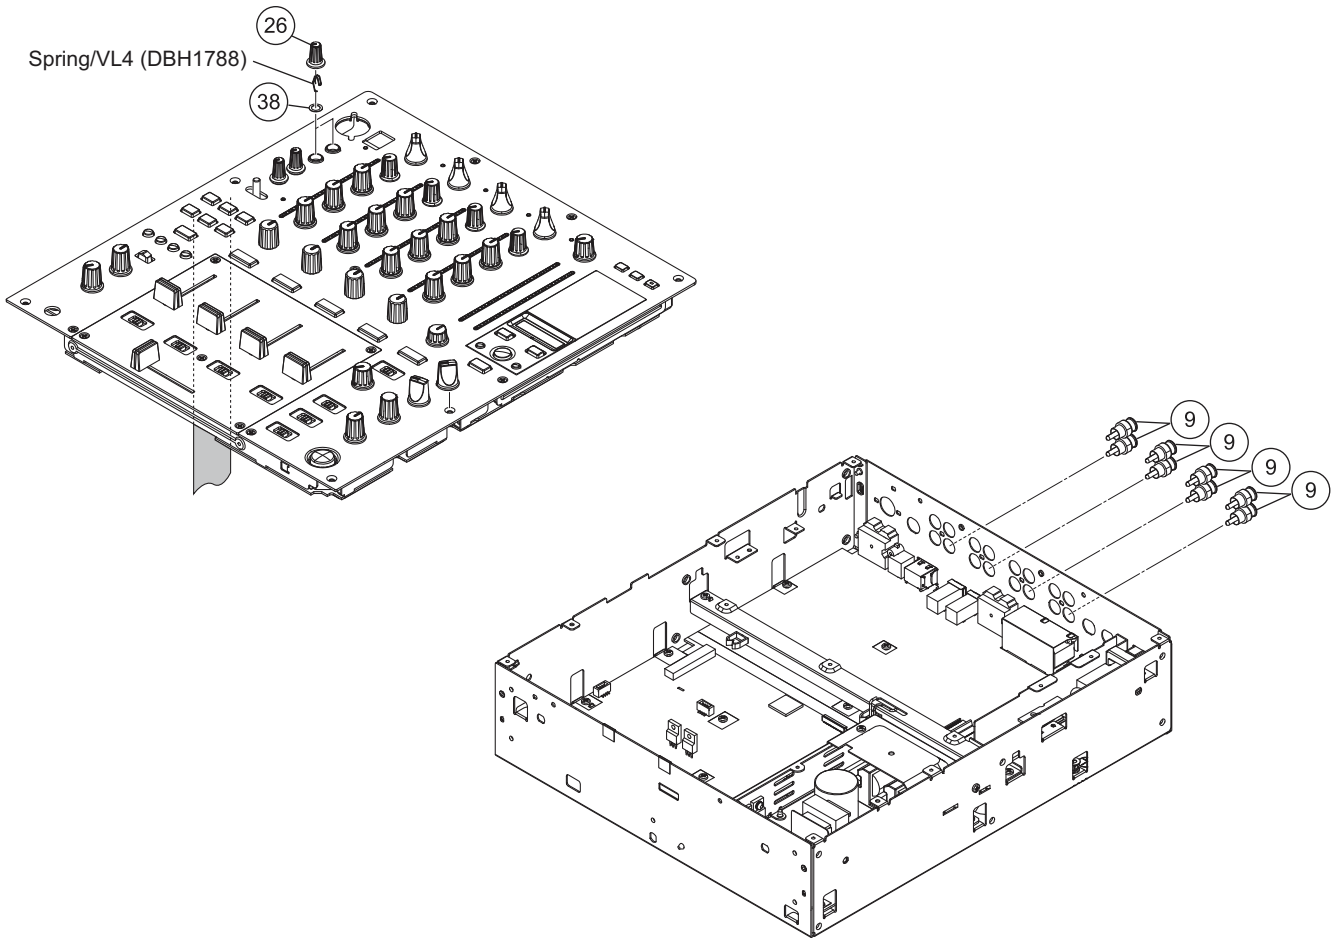

9.3 BOTTOM SECTION

DJM-900NXS/SYXJ8, DJM-900SRT/LSYXJ8, DJM-900SRT/UXJCB and DJM-900SRT/XJCN5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-900NXS /SYXJ8	DJM-900SRT /LSYXJ8	DJM-900SRT /UXJCB	DJM-900SRT /XJCN5	Remarks
		BOTTOM SECTION					
	P93-1	MAIN Assy	DWX3190	DWX3502	DWX3502	DWX3502	
	P93-2	SEND Assy	DWX3195	DWX3505	DWX3505	DWX3505	
⚠	P93-5	AC Inlet Assy (2P)	DKP3762	DKP3762	Not used	DKP3762	
⚠	P93-5	AC Inlet Assy (3P)	Not used	Not used	DKP3927	Not used	
	P93-9	Rear Panel	DNC2020	DNC2107	DNC2107	DNC2108	
	P93-34	Screw	Not used	Not used	PMH40P080FTC	Not used	

BOTTOM SECTION

*Caution : About No.17 Silicon Rubber D5 L DEB1456

During MAIN Assy disassembly, if the silicone sheet is found to be deformed, replace it with a new one.


Looking at the bottom panel of the Looking at the bottom panel of the chassis from the outside, check that the hole is covered by a silicon sheet and that the MAIN Assy is not seen through the hole.

9.4 CONTROL PANEL SECTION (1/2)

DJM-900NXS/SYXJ8, DJM-900SRT/LSYXJ8, DJM-900SRT/UXJCB and DJM-900SRT/XJCN5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-900NXS /SYXJ8	DJM-900SRT /LSYXJ8	DJM-900SRT /UXJCB	DJM-900SRT /XJCN5	Remarks
		CONTROL PANEL SECTION (1/2)					
	P95-6	FADC Assy	DWX3202	Not used	Not used	Not used	
NSP	P95-6	CRFD ASSY	Not used	DWX3258	DWX3258	DWX3258	
	P95-13	CRF Stay	DNF1870	Not used	Not used	Not used	
	P95-13	Stay/CRF	Not used	DNF1927	DNF1927	DNF1927	
	P95-15	Bush	DNK5974	Not used	Not used	Not used	
	P93-26	Rotary SW Knob (B)	DAA1176	Not used	Not used	Not used	
	P93-26	Knob/RSW	Not used	DAA1305	DAA1305	DAA1305	
	P93-27	Rotary SW Knob S (A)	DAA1177	Not used	Not used	Not used	
	P93-27	Knob/RSW	Not used	DAA1307	DAA1307	DAA1307	
	P95-33	Rotary SW Knob (HM)	DAA1256	Not used	Not used	Not used	
	P95-33	Knob/CL	Not used	DAA1320	DAA1320	DAA1320	
	P95-36	Button (CUE)	DAC2503	Not used	Not used	Not used	
	P95-36	Button/CUE	Not used	DAC2882	DAC2882	DAC2882	
	P95-37	Slider Knob 1	DAC2684	Not used	Not used	Not used	
	P95-37	Knob/SLD	Not used	DAC2935	DAC2935	DAC2935	
	P95-40	Fader Panel	DAH2830	Not used	Not used	Not used	
	P95-40	Panel/FD	Not used	DAH2971	DAH2971	DAH2971	
	P95-42	Control Panel	DNB1186	DNB1233	DNB1233	DNB1233	
	P95-44	CDC Panel	DNK5846	Not used	Not used	Not used	
	P95-44	Panel/CDC	Not used	DNK6258	DNK6258	DNK6258	
	P95-57	Screw	IMZ30P040FTC	BPZ30P080FTB	BPZ30P080FTB	BPZ30P080FTB	
	P95-61	Cross Fader Assy	Not used	DXA2257	DXA2257	DXA2257	

CONTROL PANEL SECTION (1/2)

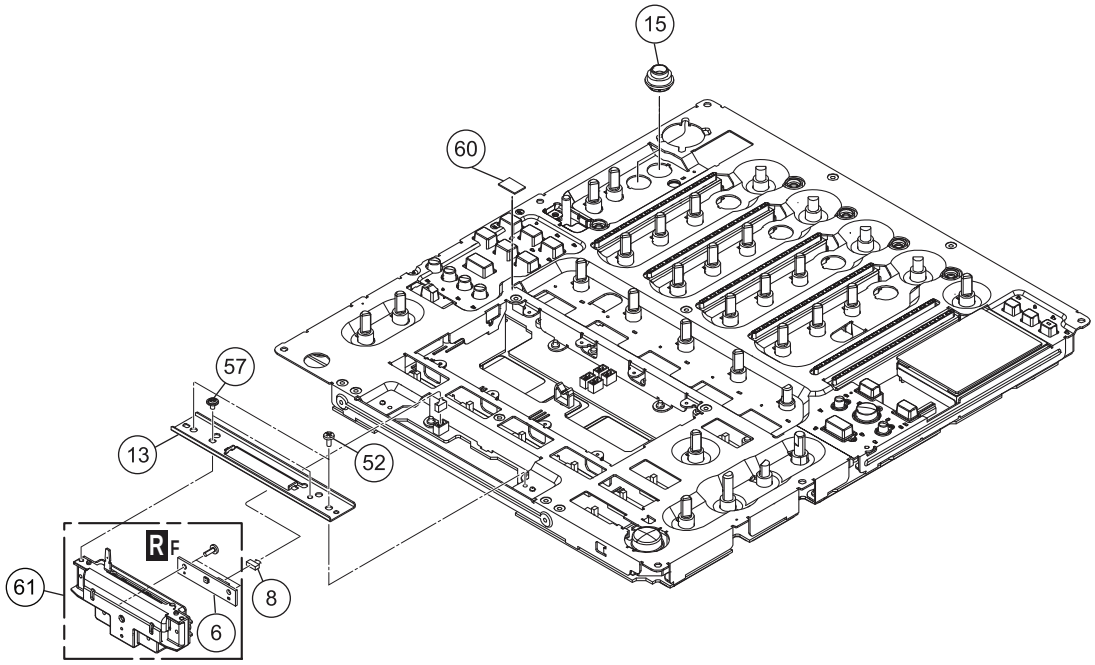

9.5 CONTROL PANEL SECTION (2/2)

DJM-900NXS/SYXJ8, DJM-900SRT/LSYXJ8, DJM-900SRT/UXJCB and DJM-900SRT/XJCN5 are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-900NXS /SYXJ8	DJM-900SRT /LSYXJ8	DJM-900SRT /UXJCB	DJM-900SRT /XJCN5	Remarks
		CONTROL PANEL SECTION (2/2)					
	P97-1	PNLA ASSY	DWX3196	DWX3503	DWX3503	DWX3503	
	P97-2	PNLB Assy	DWX3197	DWX3510	DWX3510	DWX3510	
	P97-7	Barrier	DEC3382	DEC3512	DEC3512	DEC3512	
	P97-11	Button (TAP)	DAC2653	Not used	Not used	Not used	
	P97-11	Button/TAP	Not used	DAC2931	DAC2931	DAC2931	
	P97-12	Button (LINK)	DAC2654	Not used	Not used	Not used	
	P97-12	Button/FDS	Not used	DAC2932	DAC2932	DAC2932	

12. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*
Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω	→	56×10^1	→	561 ····· RD1/4PU 5 6 1 J
47 kΩ	→	47×10^3	→	473 ····· RD1/4PU 4 7 3 J
0.5 Ω	→	R50		····· RN2H R 5 0 K
1 Ω	→	1R0		····· RS1P 1 R 0 K

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ	→	562×10^1	→	5621 ····· RN1/4PC 5 6 2 1 F

● *Meaning of the figures and others in the parentheses in the parts list.*
Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.
IC 301 (A, 91, 111) IC NJM2068V

LIST OF ASSEMBLIES

Mark	No.	Description	Part No.
NSP	1	..MOTHER ASSY	DWM2511
	2	..MAIN ASSY	DWX3502
	2	..CDCB ASSY	DWX3191
	2	..USBI ASSY	DWX3192
NSP	1	..AUDIO ASSY	DWM2512
	2	..INPUT ASSY	DWX3504
	2	..SEND ASSY	DWX3505
	2	..TRM1 ASSY	DWX3506
	2	..TRM2 ASSY	DWX3507
	2	..TRM3 ASSY	DWX3508
	2	..TRM4 ASSY	DWX3509
NSP	1	..SUB ASSY	DWM2420
	2	..ACSW ASSY	DWR1490
	2	..PNLB ASSY	DWX3510
	2	..FAD1 ASSY	DWX3198
	2	..FAD2 ASSY	DWX3199
	2	..FAD3 ASSY	DWX3200
	2	..FAD4 ASSY	DWX3201
	2	..MIC1 ASSY	DWX3207
	2	..HPJK ASSY	DWX3208
	1	..PNLA ASSY	DWX3503
⚠	1	..POWER SUPPLY ASSY	DWR1492
	1	..CROSS FADER ASSY	DXA2257
NSP	2	..CRFD ASSY	DWX3258

DJM-900NXS/SYXJ8, DJM-900SRT/LSYXJ8, DJM-900SRT/UXJCB and DJM-900SRT/XJCN5 are constructed the same except for the following:

Mark	Symbol and Description	DJM-900NXS /SYXJ8	DJM-900SRT /LSYXJ8	DJM-900SRT /UXJCB	DJM-900SRT /XJCN5	Remarks
NSP	1..AUDI ASSY	DWM2419	DWM2512	DWM2512	DWM2512	
	2..INPUT Assy	DWX3193	DWX3504	DWX3504	DWX3504	
	2..TRM1 Assy	DWX3203	DWX3506	DWX3506	DWX3506	
	2..TRM2 Assy	DWX3204	DWX3507	DWX3507	DWX3507	
	2..TRM3 Assy	DWX3205	DWX3508	DWX3508	DWX3508	
	2..TRM4 Assy	DWX3206	DWX3509	DWX3509	DWX3509	
	2..SEND Assy	DWX3195	DWX3505	DWX3505	DWX3505	
NSP	P.C.B ARD(AUDI)	DNP2625	Not used	Not used	Not used	
NSP	C MP SITE PCB	Not used	DNP2727	DNP2727	DNP2727	
NSP	1..M THER ASSY	DWM2418	DWM2511	DWM2511	DWM2511	
	2..MAIN Assy	DWX3190	DWX3502	DWX3502	DWX3502	
NSP	1..SUB ASSY	DWM2420	DWM2513	DWM2513	DWM2513	
	2..FADC Assy	DWX3202	Not used	Not used	Not used	
	2..PNLB Assy	DWX3197	DWX3510	DWX3510	DWX3510	
	1..CR SS FADER ASSY	Not used	DXA2257	DXA2257	DXA2257	
NSP	2..CRFD ASSY	Not used	DWX3258	DWX3258	DWX3258	
	1..PNLA ASSY	DWX3196	DWX3503	DWX3503	DWX3503	

CONTRAST OF PCB ASSEMBLIES

C F TRM1 ASSY

DWX3203 and DWX3506 are constructed the same except for the following:

Mark	Symbol and Description	DWX3203	DWX3506	Remarks
	R8201 Rotary R	DCS1119	DCS1118	

D F TRM2 ASSY

DWX3204 and DWX3507 are constructed the same except for the following:

Mark	Symbol and Description	DWX3204	DWX3507	Remarks
	R8401 Rotary R	DCS1119	DCS1118	

E F TRM3 ASSY

DWX3205 and DWX3508 are constructed the same except for the following:

Mark	Symbol and Description	DWX3205	DWX3508	Remarks
	R8601 Rotary R	DCS1119	DCS1118	

F F TRM4 ASSY

DWX3206 and DWX3509 are constructed the same except for the following:

Mark	Symbol and Description	DWX3206	DWX3509	Remarks
	R8801 Rotary R	DCS1119	DCS1118	

G F MAIN ASSY

DWX3190 and DWX3502 are constructed the same except for the following:

Mark	Symbol and Description	DWX3190	DWX3502	Remarks
NSP	IC502	DYW1798	DYW1834	
	IC702	MD56 82160-6TAZ	M12L2561616A-5T 2A	
	IC703	DYW1797	DYW1833	
	IC2011	DYW1799	DYW1835	
	IC2801, IC3003	RNB4580F	BA4580RF	
	1408, 2602	LSC4081UB	LSCR523UB	
	1409, 2603, 3411, 3412	LSA1576UB	LSAR523UB	
	2838, 2839	LSA1576UB	Not used	
	2836	LTC124EUB	Not used	
	2837	2SC3326	INC2002AC1	
	3405, 3407	2SC3076	2SD1760F5	
	3406, 3408	2SA1241	2SB1184F5	
	D1201, D1402, D1414	1SS301	DAN202UM	
	D1202, D1203	RB501 -40	RB501 M-40	
	D1401, D1415, D2807-D2824	1SS352	DA2J101	
	D1406	RKZ3.3K (B2)	DZ2J033M0	
	D2801	HZU5R1(B1)	DZ2J051M0	
	D2803-D2806	HZU3R0(B1)	DZ2J030M0	
	D2833, D2834, D3401-D3405	1SS352	DA2J101	
	R1208	RS1/16SS2202F	RS1/16SS273J	
	R1410	RS1/16SS912J	RS1/16SS392J	
	R1421	RS1/16SS6201F	RS1/16SS822J	
	R1401	RS1/16SS153J	RS1/16SS1502F	
	R1402	RS1/16SS123J	RS1/16SS1202F	
	R1406	RS1/16SS303J	RS1/16SS223J	
	R2884-R2887	Not used	RS1/10SR0R0J	
	R2888-R2891	RN1/16SE3902D	Not used	

Mark	Symbol and Description	DWX3190	DWX3502	Remarks
	R2987, R2993	RS1/16SS103J	Not used	
	R2988, R2989, R2991, R2992	RS1/16SS104J	Not used	
	R2994-R2997	RS1/16SS104J	Not used	
	R2990, R2998-R3000	RS1/16SS473J	Not used	
	C2808, C2809	CEH AW101M16	CEH AW221M6R3	
	C2827, C2828	CE W101M16	CEH AW221M6R3	
	C2861, C2863, C2865, C2867	CKSRYB473K50	Not used	
	C2862, C2864, C2866, C2868	CEH AW471M16	Not used	
	C2878, C2879	CC 1236	Not used	
	C2880	CEHANP101M16	Not used	
	C2885	Not used	CCSSCH102J50	
	C3025, C3027	CC 1195	CC 1236	

J F SEND ASSY

DWX3195 and DWX3505 are constructed the same except for the following:

Mark	Symbol and Description	DWX3195	DWX3505	Remarks
	IC6402	RNB4580F	NJM4565MD	

K F PNLA ASSY

DWX3196 and DWX3503 are constructed the same except for the following:

Mark	Symbol and Description	DWX3196	DWX3503	Remarks
	IC6601	DYW1800	DYW1836	
	6601, 6604, 6638- 6649	LSA1576UB	LSAR523UB	
	6652, 6654	LSA1576UB	LSAR523UB	
	6605- 6621	LSC4081UB	LSCR523UB	
	D6615, D6616, D6618-D6623	1SS352	Not used	
	D6742-D6763	1SS352	DA2J101	
	D6632-D6640, D6649-D6657	SLR-343MC(NP)	SLI-343M8 (HJ)	
	D6665-D6673, D6684-D6692	SLR-343MC(NP)	SLI-343M8 (HJ)	
	D6702-D6710, D6717-D6725	SLR-343MC(NP)	SLI-343M8 (HJ)	
	D6626, D6627, D6643, D6644	SLR-343 C(NP)	SLI-343U8R(HJK)	
	D6659, D6660, D6678, D6679	SLR-343 C(NP)	SLI-343U8R(HJK)	
	D6696, D6697, D6711, D6712	SLR-343 C(NP)	SLI-343U8R(HJK)	
	D6625, D6641, D6642, D6658	SLI-343YYW(TU)	SLR343BC4T(JK)	
	D6674-D6677, D6693-D6695	SLI-343YYW(TU)	SLR343BC4T(JK)	
	D6734	SLI-343YYW(TU)	SLR343BC4T(JK)	
	R6748, R6749	RS1/10SR102J	Not used	
	R6750, R6751	RS1/10SR750J	RS1/10SR102J	
	R6755-R6763	RS1/10SR680J	RS1/10SR391J	
	R6769, R6770, R6776, R6779	RS1/10SR820J	RS1/10SR151J	
	R6784, R6785, R6788, R6789	RS1/10SR820J	RS1/10SR151J	
	R6796, R6798, R6799	RS1/10SR820J	RS1/10SR151J	
	R6808	Not used	RS1/10SR680J	
	R6809	RS1/10SR470J	RS1/10SR151J	
	R6815	RS1/10SR680J	RS1/10SR121J	
	R6818	Not used	RS1/10SR151J	
	R6828	RS1/10SR680J	RS1/10SR151J	

Q F PNLB ASSY

DWX3197 and DWX3510 are constructed the same except for the following:

Mark	Symbol and Description	DWX3197	DWX3510	Remarks
	7001, 7002	LSC4081UB	LSCR523UB	
	D7008-D7011, D7014-D7027	1SS352	DA2J101	
	D7012, D7013	1SS352	Not used	

Mark	Symbol and Description	DWX3197	DWX3510	Remarks
	D7005, D7007	SLI-343YYW(TU)	SLR343BC4T(JK)	
	R7005, R7007	Not used	RS1/10SR151J	
	R7006, R7008	RS1/10SR820J	RS1/10SR181J	
	R7018, R7028	RS1/10SR151J	RS1/10SR181J	
	R7019, R7029	RS1/10SR151J	Not used	

PCB PARTS LIST

AF INPUT ASSY

SEMICONDUCTORS

Mark	No.	Description	Part No.
	IC	4002-4004,4006-4010	TC7SH08FUS1
	IC	4005	TC74VHC74FK
	IC	4201,4202,4402,4404	NJM4580MD
	IC	4401,4407,4801,4807	NJM4565MD
	IC	4403,4803,5203,5603	AK5358AET
	IC	4405,4601,4802,4804	NJM4580MD
	IC	4406,4806,5206,5606	CS5381-KZ
	IC	4408,4808,5208,5608	TC7WH157FK
	IC	4805,5001,5202,5204	NJM4580MD
	IC	5201,5207,5601,5607	NJM4565MD
	IC	5205,5401,5402,5602	NJM4580MD
	IC	5604,5605,6201,6203	NJM4580MD
	IC	5801	NJM4565MD
	IC	5802,6204	AK5358AET
	IC	6202	TC7S04FU
	IC	6205,6206	NJM4580MD
	Q	4001,4002	LSC4081UB
	Q	4201-4206,4401-4404	KTC801U
	Q	4207-4210,4405,4406	2SK3320
	Q	4211,4613,5013,5411	LTC124EUB
	Q	4601,4603,4606,4607	KTC801U
	Q	4610,4612,4805,4806	2SK3320
	Q	4801-4804,5001,5002	KTC801U
	Q	5005,5006,5201-5204	KTC801U
	Q	5010,5012,5205,5206	2SK3320
	Q	5401-5406,5601-5604	KTC801U
	Q	5407-5410,5605,5606	2SK3320
	Q	6201	LTC124EUB
	Q	6202-6205	2SK209
	Q	6206,6207,6210,6211	KTC801U
	Q	6208,6209,6212,6213	2SK3320
	D	4201,4202,4401,4402	DZ2J030M0
	D	4203,4204,4605,4606	DA2J101
	D	4403,4404,4803,4804	RB706F-40
	D	4405-4408,4805-4808	1SS302
	D	4602,4604,4801,4802	DZ2J030M0
	D	5002,5004,5201,5202	DZ2J030M0
	D	5005,5006,5403,5404	DA2J101
	D	5203,5204,5603,5604	RB706F-40
	D	5205-5208,5605-5608	1SS302
	D	5401,5402,5601,5602	DZ2J030M0
	D	5802,5803,6209,6210	RB706F-40
	D	6201,6202	1SS302
	D	6213-6216	UDZS15(B)

MISCELLANEOUS

Mark	No.	Description	Part No.
	JA	4201,4601,5001,5401 JACK	DKB1083
	JA	5801 6.5 DIA JACK	DKN1654
	JA	5802 6.5 DIA JACK	DKN1652
	JA	6201 6.5 DIA JACK	DKN1653
	JA	6202 CONNECTOR	DKN1188
	KN	4001-4003 EARTH TERMINAL	AKF7002
	VR	6201,6202 ROTARY VR	DCS1072
	RY	4201,4601,5001,5401 RELAY	VSR1008
	CN	4002 FFC CONNECT0R	VKN1811
	CN	4003 L-PLUG(11P)	KM200NA11L
	CN	4201,4601,5001,5401 11P PLUG	XKP3065
	CN	6201 CONNECTOR	CKS3561
	0	SHIELD CASE(MIDI)	DNH2736

RESISTORS

Mark	No.	Description	Part No.
	R	4034,4036,4037	RS1/4SA130J
	R	4202,4204,4216,4217	RN1/16SE1000D
	R	4206,4406,4607,4806	RN1/16SE4701D
	R	4207,4407,4608,4807	RN1/16SE4301D
	R	4208,4211,4213,4215	RN1/16SE4700D
	R	4209,4210,5409,5410	RN1/16SE2201D
	R	4212,4214,4220,4221	RN1/16SE4702D
	R	4218,4219,4408,4411	RN1/16SE4700D
	R	4222,4223,4623,4625	RS1/10SR1803D
	R	4224,4225,4424-4431	RN1/16SE1201D
	R	4228,4229,5428,5429	RS1/10SR470J
	R	4230,4231,5430,5431	RS1/10SR75R0D
	R	4232,4233,4236,4239	RN1/16SE1001D
	R	4234,4235,4237,4238	RN1/16SE2001D
	R	4240,4241,5440,5441	RS1/10SR7501D
	R	4248-4251,4600,4601	RS1/10SR0R0J
	R	4401,4433,4832,4878	RN1/16SE1202D
	R	4402,4419-4422,4434	RN1/16SE2001D
	R	4409,4410,4809,4810	RN1/16SE2002D
	R	4412,4414,4812,4814	RN1/16SE1303D
	R	4413,4609,4615,4617	RN1/16SE4700D
	R	4415,4416,4815,4816	RS1/10SR3303D
	R	4432,4801,5201,5601	RAB4CQ103J
	R	4439,4441,4443,4445	RN1/16SE2200D
	R	4440,4442,4444,4446	RN1/16SE4300D
	R	4448-4451,4848-4851	RN1/16SE6800D
	R	4452,4455,4456,4459	RN1/16SE3300D
	R	4453,4454,4457,4458	RN1/16SE1001D
	R	4475,4875,5275,5675	RS1/10SR5R1J
	R	4612,4613,5012,5013	RN1/16SE1000D
	R	4620,4621,5020,5021	RN1/16SE4702D
	R	4631,4633,4635,4637	RN1/16SE1001D
	R	4808,4811,4813,5009	RN1/16SE4700D
	R	4819-4822,4833,4879	RN1/16SE2001D
	R	4824-4831,5224-5231	RN1/16SE1201D
	R	4839,4841,4843,4845	RN1/16SE2200D
	R	4840,4842,4844,4846	RN1/16SE4300D
	R	4852,4855,4856,4859	RN1/16SE3300D
	R	4853,4854,4857,4858	RN1/16SE1001D

Mark	No.	Description	Part No.
R	5000,5001,5448-5451		RS1/10SR0R0J
R	5007,5206,5406,5606		RN1/16SE4701D
R	5008,5207,5407,5607		RN1/16SE4301D
R	5015,5017,5208,5211		RN1/16SE4700D
R	5023,5025,5422,5423		RS1/10SR1803D
R	5031,5033,5035,5037		RN1/16SE1001D
R	5209,5210,5609,5610		RN1/16SE2002D
R	5212,5214,5612,5614		RN1/16SE1303D
R	5213,5408,5411,5413		RN1/16SE4700D
R	5215,5216,5615,5616		RS1/10SR3303D
R	5219-5222,5233,5279		RN1/16SE2001D
R	5232,5278,5632,5678		RN1/16SE1202D
R	5239,5241,5243,5245		RN1/16SE2200D
R	5240,5242,5244,5246		RN1/16SE4300D
R	5248-5251,5648-5651		RN1/16SE6800D
R	5252,5255,5256,5259		RN1/16SE3300D
R	5253,5254,5257,5258		RN1/16SE1001D
R	5402,5404,5416,5417		RN1/16SE1000D
R	5412,5414,5420,5421		RN1/16SE4702D
R	5415,5418,5419,5608		RN1/16SE4700D
R	5424,5425,5624-5631		RN1/16SE1201D
R	5432,5433,5436,5439		RN1/16SE1001D
R	5434,5435,5437,5438		RN1/16SE2001D
R	5611,5613,6273,6274		RN1/16SE4700D
R	5619-5622,5633,5679		RN1/16SE2001D
R	5639,5641,5643,5645		RN1/16SE2200D
R	5640,5642,5644,5646		RN1/16SE4300D
R	5652,5655,5656,5659		RN1/16SE3300D
R	5653,5654,5657,5658		RN1/16SE1001D
R	5804,5805		RN1/16SE3602D
R	5808,5809		RS1/16SS1302D
R	5820,6217		RAB4CQ103J
R	6200,6202-6204		RS1/10SR0R0J
R	6205,6206		RS1/10SR221J
R	6208-6210,6237,6249		RS1/10SR0R0J
R	6214,6215,6260,6261		RN1/16SE1002D
R	6218,6219,6223,6227		RN1/16SE4701D
R	6220,6222,6264,6266		RN1/16SE1501D
R	6221,6265		RN1/16SE3300D
R	6224,6268		RN1/16SE1500D
R	6228,6229,6231,6232		RN1/16SE3900D
R	6230,6233		RN1/16SE2200D
R	6250,6255,6318,6319		RS1/10SR0R0J
R	6256-6259,6275,6276		RN1/16SE1000D
R	6262,6263,6267,6269		RN1/16SE4701D
R	6271,6272,6295,6296		RN1/16SE2201D
R	6277,6297,6298,6301		RN1/16SE4700D
R	6278,6279,6302,6303		RN1/16SE4702D
R	6280,6281,6304,6305		RN1/16SE1201D
R	6282,6283,6306,6307		RS1/10SR470J
R	6284,6285,6308,6309		RS1/10SR75R0D
R	6286-6289,6310-6313		RN1/16SE2001D
R	6290,6291,6314,6315		RS1/10SR7501D
R	6299,6300		RN1/16SE1000D
	Other Resistors		RS1/16SS###J

CAPACITORS

Mark	No.	Description	Part No.
C	4002-4008,4010,4020		CKSSYB104K16
C	4011,4015,4019,4023		CCSSCH102J50
C	4013,4017		CKSYB104K25
C	4014,4018,4454,4854		ACH1480
C	4022		CEHAT221M10
C	4024,4028,4032,4233		CKSSYB104K16
C	4027,4031,4434-4437		CCSSCH102J50
C	4030,6243		CEHAT101M10
C	4201-4204,4411,4414		CCSSCH101J50
C	4205,4206,5405,5406		CCSSCH221J50
C	4207,4208,4219,4220		CCSSCH331J50
C	4209,4210,4415,4416		CKSSYB474K6R3
C	4211,4213,5411,5413		CEHAT471M6R3
C	4212,4214,4417,4418		CKSSYB472K50
C	4215,4216,5415,5416		CKSRYB223K50
C	4217,4218,5417,5418		CKSSYB471K50
C	4221,4222,4464,4864		CFHXSQ103J16
C	4223,4227,4405,4407		CKSRYB104K25
C	4226,4228,4426,4429		CEHAZL101M25
C	4229-4232,4626,4627		CEANP100M35
C	4412,4413,4812,4813		CEHAT100M50
C	4419,4444,4819,4844		DCH1201
C	4420,4445,4446,4453		CKSSYB104K16
C	4421,4821,5221,5621		CCG1205
C	4422,4423,4430-4433		CKSRYB104K25
C	4424,4425,4824,4825		CEHAZL220M50
C	4428,4447,4448,4455		CKSSYB103K16
C	4438,4838,5238,5638		CKSSYB103K25
C	4449,4450,4849,4850		CCSRCH222J50
C	4451,4851,5251,5651		CEHAZL331M6R3
C	4452,4852,5252,5652		CEHAZL101M10
C	4456,4618,4621,4805		CKSRYB104K25
C	4458,4629,4820,4845		CKSSYB104K16
C	4466,4828,4847,4848		CKSSYB103K16
C	4603,4604,4607,4608		CCSSCH101J50
C	4610,4612,4815,4816		CKSSYB474K6R3
C	4614,4616,4817,4818		CKSSYB472K50
C	4622,4624,4826,4829		CEHAZL101M25
C	4807,4822,4823		CKSRYB104K25
C	4811,4814,5003,5004		CCSSCH101J50
C	4830-4833,4856,5018		CKSRYB104K25
C	4834-4837,5234-5237		CCSSCH102J50
C	4846,4853,4858,5029		CKSSYB104K16
C	4855,4866,5228,5247		CKSSYB103K16
C	5007,5008,5211,5214		CCSSCH101J50
C	5010,5012,5215,5216		CKSSYB474K6R3
C	5014,5016,5217,5218		CKSSYB472K50
C	5021,5205,5207,5222		CKSRYB104K25
C	5022,5024,5226,5229		CEHAZL101M25
C	5026,5027,5429-5432		CEANP100M35
C	5212,5213,5612,5613		CEHAT100M50
C	5219,5244,5619,5644		DCH1201
C	5220,5245,5246,5253		CKSSYB104K16
C	5223,5230-5233,5256		CKSRYB104K25
C	5224,5225,5624,5625		CEHAZL220M50
C	5248,5255,5266,5628		CKSSYB103K16
C	5249,5250,5649,5650		CCSRCH222J50
C	5254,5654		ACH1480
C	5258,5433,5620,5645		CKSSYB104K16
C	5264,5421,5422,5664		CFHXSQ103J16
C	5401-5404,5611,5614		CCSSCH101J50
C	5407,5408,5419,5420		CCSSCH331J50

Mark	No.	Description	Part No.
	C	5409,5410,5615,5616	CKSSYB474K6R3
	C	5412,5414,5617,5618	CKSSYB472K50
	C	5423,5427,5605,5607	CKSRYB104K25
	C	5426,5428,5626,5629	CEHAZL101M25
	C	5622,5623,5630-5633	CKSRYB104K25
	C	5634-5637,5803,5804	CCSSCH102J50
	C	5646,5653,5658,5815	CKSSYB104K16
	C	5647,5648,5655,5666	CKSSYB103K16
	C	5656,6222,6223,6238	CKSRYB104K25
	C	5801,5802	CCSSCH101J50
	C	5807,5810	CEAT470M25
	C	5808,5809,6208,6219	CKSSYB103K25
	C	5811,5812	CEHAT100M50
	C	5813,5814,5817,6227	DCH1201
	C	5816,5818,6217,6228	CKSSYB104K16
	C	5819	CKSSYB102K50
	C	5820,5821	CKSSYB103K16
	C	6214,6254,6267,6268	CKSSYB471K50
	C	6216,6221,6255,6258	CCSSCH471J50
	C	6218,6224	CEJQNP100M35
	C	6220,6257	CKSSYB331K50
	C	6225,6226	CEJQ100M35
	C	6229,6231	DCH1201
	C	6230,6232	CKSSYB104K16
	C	6233,6256	CKSSYB103K25
	C	6240	CKSRYB104K25
	C	6242	CKSRYB103K25
	C	6246,6247	CFTLA103J50
	C	6248-6253	CCSRCH102J50
	C	6259,6260,6279,6280	CCSSCH221J50
	C	6261,6262,6269,6270	CCSSCH331J50
	C	6263,6264,6283,6284	CEHAT471M6R3
	C	6265,6266,6285,6286	CKSRYB223K50
	C	6271,6272,6291,6292	CFHXSQ103J16
	C	6277,6278,6297,6298	CEANP100M35
	C	6281,6282,6289,6290	CCSSCH331J50
	C	6287,6288	CKSSYB471K50
	C	6299	CKSRYB102K50

RF CRFD ASSY

* When replacement of the CRFD Assy is required, be sure to order the CROSS FADER Assy (DXA2257) which is a parent Assy.