
EXPLODED VIEW/PARTS LIST

△ 11/01/2013
△ 08/06/2013

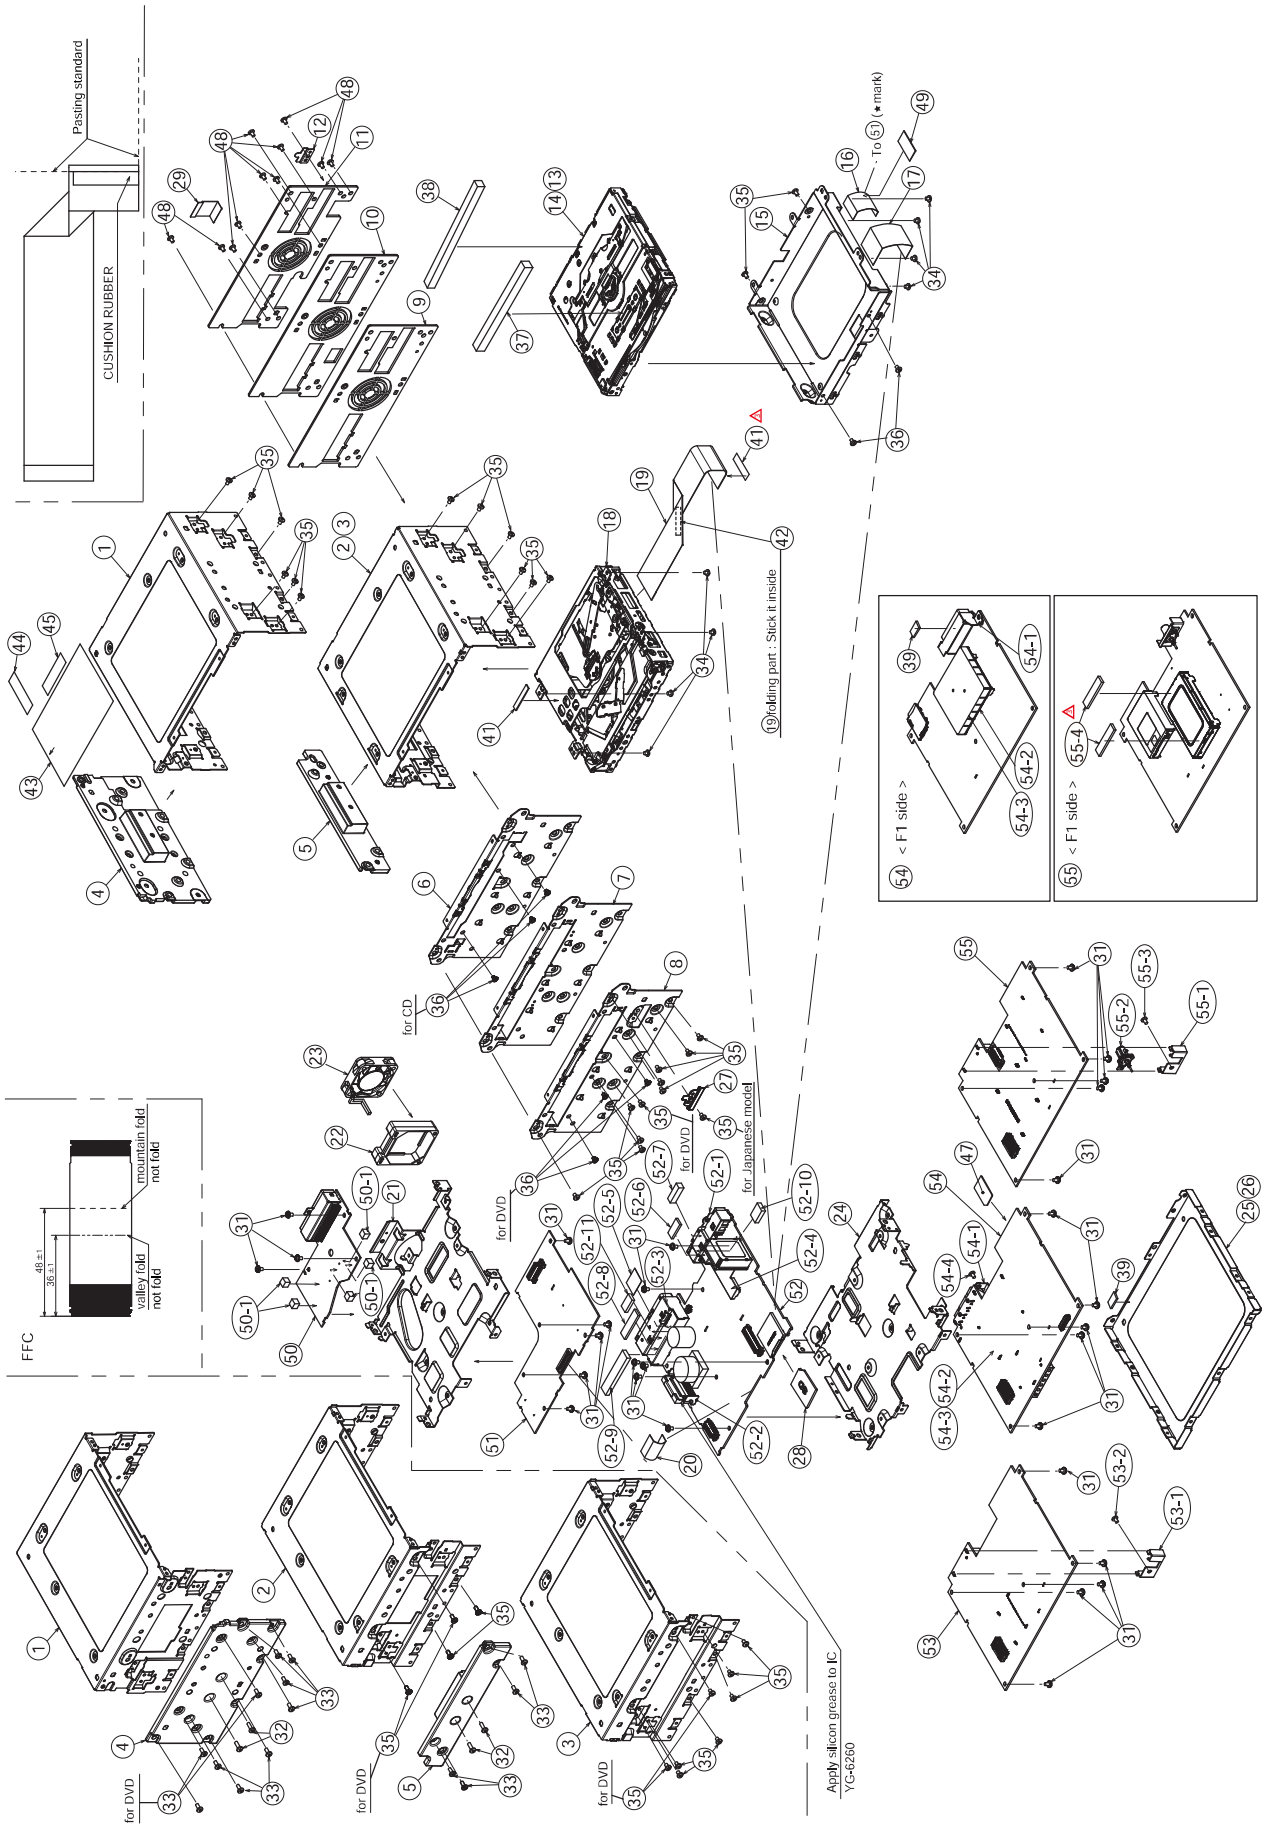

NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	*Not mounted(UPPER-CASE)	-
2	310-2010-01	UPPER CASE-S	1
3	----------	*Not mounted(UPPER-CASE-SB)	-
4	----------	*Not mounted(HEAT-SINK)	-
5	313-2173-00	HEAT SINK-S	1
6	948-1085-00	FRONT-CVR-ASSY	1
7	----------	*Not mounted(FRONT-COV-ASSY)	-
8	----------	*Not mounted(FRONT-COV-ASSY)	-
9	----------	*Not mounted(REAR-COVER)	-
10	307-0811-42	REAR-COVER-N	1
11	----------	*Not mounted(REAR-COVER-J)	-
12	----------	*Not mounted(B-CAS-SIM-CVR)	-
13	----------	*Not mounted(DVD-MECH-MODULE)	-
14	----------	*Not mounted(DVD-MECH-MODULE: ATA)	-
15	----------	*Not mounted(DVD-HLD-ASSY)	-
16	----------	*Not mounted(FLAT-WIRE-B)	-
17	----------	*Not mounted(FLAT-WIRE-A)	-
18	929-5210-81	CD-MECH-MODULE	1
19	816-4081-00	FLAT WIRE	1
20	----------	*Not mounted(FLAT-WIRE-D)	-
21	331-5363-01	IF-PWB-HOLDER	1
22	345-7038-00	FAN-RUBBER	1
23	020-3064-01	DC-MOTOR	1
24	331-5364-01	AUDIO-PWB-HOLDE	1
25	----------	*Not mounted(LOWER-CASE)	-
26	311-2061-01	LOWER CASE-S	1
27	----------	*Not mounted(SD-CVR)	-
28	----------	*Not mounted(SD-CARD)	-
29	----------	*Not mounted(ANT-TAPE)	-
30	----------	*Unused number	-
31	780-2604-50	IT SCREW	19
32	714-2608-8B	MACHINE SCREW	2
33	714-2606-8B	MACHINE SCREW	4
34	714-2603-8B	MACHINE SCREW	4
35	714-2604-8B	MACHINE SCREW	17
36	MJZ1024	SCREW(2.6x3.5)	3
37	----------	*Not mounted(GASKET-A)	-
38	----------	*Not mounted(GASKET-B)	-
39	----------	*Not mounted(GASKET-C)	-
40	----------	*Unused number	-
41	345-5994-00	CUSHION RUBBER	2

NO.	PART NO.	DESCRIPTION	Q'TY
42	347-9152-01	PAPER PART	1
43	----------	SETPLATE(114800-276: PN3502EA)	1
		SETPLATE(114855-276: PN3502EB)	1
		SETPLATE(114864-276: PN3502EC)	1
		SETPLATE(114874-276: PN3502EE)	1
		SETPLATE(158027-276: PN3502EI)	1
		SETPLATE(158042-276: PN3502EJ)	1
44	276-0779-00	SETPLATE(XM)	1
45	----------	*Not mounted(LABEL: B-CAS CARD ID)	-
46	----------	*Unused number	-
47	----------	*Not mounted(MINI B-CAS-CARD)	-
48	714-2605-8B	MACHINE SCREW	10
49	----------	*Not mounted(EMC-SHEET)	-
50	----------	IF PWB-2/2(399900-039)	(2/2)
50-1	----------	*Not mounted(GASKET-D)	-
51	----------	IF PWB-1/2(399900-039)	(1/2)
52	----------	MAIN PWB(405800-039)	1
52-1	331-5367-10	CN-HOLDER-AUDIO	1
52-2	331-5365-00	AMP-HOLDER	1
52-3	331-5366-01	CN-HOLDER-PWR	1
52-4	----------	*Not mounted(SHIELD-CASE)	-
52-5	347-9244-00	PAPER PART	1
52-6	----------	*Not mounted(GASKET-E)	-
52-7	----------	*Not mounted(GASKET-F)	-
52-8	----------	*Not mounted(GASKET-G)	-
52-9	----------	*Not mounted(GASKET-H)	-
52-10	----------	*Not mounted(GASKET-I)	-
52-11	----------	*Not mounted(GASKET-J)	-
53	----------	*Not mounted(DAB-PWB-ASSY)	-
53-1	----------	*Not mounted(CN-HOLDER-FAKRA)	-
53-2	----------	*Not mounted(MACHINE-SCREW)	-
54	----------	*Not mounted(12DTV-PWB-ASSY)	-
54-1	----------	*Not mounted(ANTENNA-JACK HOLDER)	-
54-2	----------	*Not mounted(SHIELD-CASE: BOTTOM)	-
54-3	----------	*Not mounted(SHIELD-CASE: TOP)	-
54-4	----------	*Not mounted(MACHINE-SCREW)	-
55	----------	XM/HD-PWB-ASSY(3502A7-78)	1
55-1	331-5391-00	FAKRA-ANT-HOLDER	1
55-2	855-0617-02	EXTENSION LEAD	1
55-3	714-2604-8B	MACHINE SCREW	1
55-4	347-9141-00	THEAMAL-SHEET	2

ELECTRICAL PARTS LIST

MAIN PWB(B1) section ⚠

* Neither the part numbers of parts on which software is written, nor part numbers of parts for which replacement is prohibited in the production process are listed in the parts list.

REF NO.	PART NO.	DESCRIPTION
C101	178-1062-88	10uF
C102	046-1042-78	0.1uF K B
C103	046-1042-78	0.1uF K B
C104	046-1042-78	0.1uF K B
C105	046-1042-78	0.1uF K B
C106	046-1042-78	0.1uF K B
C107	178-1062-88	10uF
C108	046-1042-78	0.1uF K B
C109	046-1042-78	0.1uF K B
C110	046-1042-78	0.1uF K B
C111	046-1042-78	0.1uF K B
C112	178-1062-88	10uF
C113	046-1042-78	0.1uF K B
C114	046-1042-78	0.1uF K B
C115	046-1032-78	0.01uF K B
C116	046-1042-78	0.1uF K B
C117	046-1042-78	0.1uF K B
C118	046-1042-78	0.1uF K B
C119	046-1042-78	0.1uF K B
C120	046-1042-78	0.1uF K B
C121	046-1042-78	0.1uF K B
C122	046-1042-78	0.1uF K B
C123	046-1032-78	0.01uF K B
C124	046-1042-78	0.1uF K B
C125	046-1042-78	0.1uF K B
C126	046-1042-78	0.1uF K B
C127	046-1042-78	0.1uF K B
C128	045-1011-50	100pFJ CH
C129	046-1042-78	0.1uF K B
C130	046-1042-78	0.1uF K B
C131	046-1042-78	0.1uF K B
C132	046-1042-78	0.1uF K B
C133	045-1011-50	100pFJ CH
C134	046-1042-78	0.1uF K B
C135	046-1042-78	0.1uF K B
C136	046-1042-78	0.1uF K B
C137	046-1042-78	0.1uF K B
C138	046-1042-78	0.1uF K B
C139	046-1042-78	0.1uF K B
C140	046-1042-78	0.1uF K B
C141	046-1042-78	0.1uF K B
C142	045-1201-50	12pFJ CH
C143	046-1042-78	0.1uF K B
C144	046-1042-78	0.1uF K B
C145	046-1042-78	0.1uF K B
C146	046-1042-78	0.1uF K B
C147	045-1201-50	12pFJ CH
C148	046-1042-78	0.1uF K B
C149	046-1042-78	0.1uF K B
C150	045-1011-50	100pFJ CH
C151	046-1042-78	0.1uF K B
C152	046-1042-78	0.1uF K B
C153	046-1042-78	0.1uF K B
C154	178-1062-88	10uF
C155	178-1062-88	10uF
C156	046-1042-78	0.1uF K B
C157	046-1042-78	0.1uF K B
C158	046-1042-78	0.1uF K B
C159	046-1042-78	0.1uF K B
C160	046-1042-78	0.1uF K B
C161	046-1042-78	0.1uF K B
C162	046-1042-78	0.1uF K B
C163	046-1042-78	0.1uF K B
C164	046-1042-78	0.1uF K B
C165	046-1042-78	0.1uF K B
C166	046-1042-78	0.1uF K B
C167	046-1042-78	0.1uF K B
C168	045-1007-50	10 +/-0.5pF CH
C169	045-1007-50	10 +/-0.5pF CH
C170	045-1201-50	12pFJ CH
C171	045-1201-50	12pFJ CH
C204	046-1042-78	0.1uF K B
C205	046-1042-78	0.1uF K B
C210	168-4752-98	4.7uF K
C211	168-4752-98	4.7uF K
C212	046-1042-78	0.1uF K B
C213	046-1042-78	0.1uF K B
C214	046-1042-78	0.1uF K B
C215	046-1042-78	0.1uF K B
C216	046-1042-78	0.1uF K B
C217	045-8097-50	8 +/-0.5pF CH
C218	046-1042-78	0.1uF K B
C219	045-1007-50	10 +/-0.5pF CH
C220	046-1042-78	0.1uF K B
C225	168-4752-98	4.7uF K
C226	046-1042-78	0.1uF K B
C228	046-1042-78	0.1uF K B
C229	045-2201-50	22pFJ CH
C230	046-1042-78	0.1uF K B
C231	042-0630-50	16V 100uF
C232	046-1042-78	0.1uF K B
C233	168-4752-98	4.7uF K
C234	046-1042-78	0.1uF K B
C236	046-1042-78	0.1uF K B
C237	043-0559-90	6.3V 22uF
C238	168-1052-78	16V 1uF K
C239	046-1042-78	0.1uF K B
C240	046-1042-78	0.1uF K B
C241	046-1042-78	0.1uF K B
C242	046-1042-78	0.1uF K B
C243	043-0552-90	6.3V 47uF M
C244	043-0559-90	6.3V 22uF
C245	168-1052-78	16V 1uF K
C246	046-1042-78	0.1uF K B
C247	045-2201-50	22pFJ CH
C248	046-1042-78	0.1uF K B
C249	046-1042-78	0.1uF K B
C250	045-2201-50	22pFJ CH
C251	046-1042-78	0.1uF K B
C252	046-1042-78	0.1uF K B
C253	046-1042-78	0.1uF K B
C254	046-1042-78	0.1uF K B
C255	046-1022-58	50V 1000pF
C256	046-1042-78	0.1uF K B
C257	045-4711-50	470pFJ CH
C258	042-4033-90	6.3V 220uF
C259	046-3322-58	3300pF K B
C260	046-1042-78	0.1uF K B
C262	046-3322-58	3300pF K B
C263	046-1022-58	50V 1000pF
C264	046-1022-58	50V 1000pF
C265	046-1022-58	50V 1000pF
C266	046-1022-58	50V 1000pF
C269	046-1022-58	50V 1000pF
C270	046-1022-58	50V 1000pF
C271	046-1022-58	50V 1000pF
C272	046-1022-58	50V 1000pF
C273	046-1042-78	0.1uF K B
C290	AAZ0331	6.3V 10uF
C291	043-4306-90	1uF
C292	043-4306-90	1uF
C293	043-0552-90	6.3V 47uF M
C294	043-0554-90	25V 10uF
C295	046-1022-58	50V 1000pF
C296	043-0554-90	25V 10uF
C306	166-2221-50	2200pF CH
C321	166-1201-50	12pF CH
C322	166-1201-50	12pF CH
C323	046-1022-58	50V 1000pF
C324	045-2201-50	22pFJ CH
C325	046-1022-58	50V 1000pF
C326	046-1022-58	50V 1000pF
C327	045-5096-50	5 +/-0.25pF CH
C328	045-1501-50	15pFJ CH
C329	046-1042-78	0.1uF K B
C330	046-1042-78	0.1uF K B
C331	045-3901-50	39pFJ CH
C332	045-3901-50	39pFJ CH
C333	045-1211-50	120pFJ CH
C334	045-1211-50	120pFJ CH
C335	045-2211-50	220pFJ CH
C336	046-1022-58	50V 1000pF
C337	046-3922-58	3900pF K B
C338	046-1022-58	50V 1000pF
C339	046-1022-58	50V 1000pF
C340	046-1022-58	50V 1000pF
C341	046-1032-78	0.01uF K B
C342	046-1032-78	0.01uF K B
C343	045-5096-50	5 +/-0.25pF CH
C344	045-5096-50	5 +/-0.25pF CH
C345	046-3322-58	3300pF K B
C346	046-3322-58	3300pF K B
C347	046-2232-78	0.022uF K B
C348	046-2232-78	0.022uF K B
C349	046-1022-58	50V 1000pF
C350	043-0563-90	16V 47uF
C351	046-2232-78	0.022uF K B
C352	043-0562-90	10V 0.22uF
C353	046-2232-78	0.022uF K B
C354	046-2232-78	0.022uF K B
C355	046-1022-58	50V 1000pF
C356	043-0563-90	16V 47uF
C357	046-2232-78	0.022uF K B
C358	043-0562-90	10V 0.22uF
C359	046-2232-78	0.022uF K B
C360	046-2232-78	0.022uF K B
C361	046-2232-78	0.022uF K B
C362	046-2232-78	0.022uF K B
C363	046-2232-78	0.022uF K B
C364	046-2232-78	0.022uF K B
C379	046-5612-58	560pF K B
C380	168-1052-78	16V 1uF K
C381	043-7701-90	2.2uF
C382	AAZ0293	25V 10uF 10%
C508	043-0559-90	6.3V 22uF
C510	046-1042-78	0.1uF K B
C518	045-1011-50	100pFJ CH
C527	045-1011-50	100pFJ CH
C601	043-7503-90	4.7uF
C602	045-1011-50	100pFJ CH
C603	046-3332-78	0.033uF K B
C604	043-6400-90	16V 4.7uF K
C605	165-4763-15	6.3V 47uF
C606	046-1042-78	0.1uF K B
C607	165-3363-25	10V 33uF
C610	046-1042-78	0.1uF K B
C701	045-2201-50	22pFJ CH
C703	045-2201-50	22pFJ CH
C705	046-1042-78	0.1uF K B
C708	046-1042-78	0.1uF K B
C709	045-2201-50	22pFJ CH
C710	045-2201-50	22pFJ CH
C712	045-2201-50	22pFJ CH
C714	045-2201-50	22pFJ CH
C715	045-2201-50	22pFJ CH
C716	045-2201-50	22pFJ CH
C717	045-2201-50	22pFJ CH
C801	046-1032-78	0.01uF K B
C802	046-1022-58	50V 1000pF
C803	168-1052-78	16V 1uF K
C805	046-1032-78	0.01uF K B
C806	046-1022-58	50V 1000pF
C807	045-1011-50	100pFJ CH
C808	043-0605-90	10V 2.2uF
C809	046-1042-78	0.1uF K B
C810	046-1032-78	0.01uF K B
C811	043-0605-90	10V 2.2uF
C812	046-1042-78	0.1uF K B
C901	042-0643-59	16V 47uF
C902	046-1042-78	0.1uF K B
C903	043-7400-90	16V 22uF
C904	043-7503-90	4.7uF
C905	046-1042-78	0.1uF K B
C906	046-1042-78	0.1uF K B
C907	045-2211-50	220pFJ CH
C908	046-2222-58	2200pF K B
C909	046-1022-58	50V 1000pF
C910	046-1042-78	0.1uF K B
C911	046-1032-78	0.01uF K B
C913	042-0560-84	16V 47uF
C914	043-7503-90	4.7uF
C915	043-7503-90	4.7uF
C916	043-0574-90	25V 1.0uF
C918	042-0643-54	25V 470uF
C920	046-1032-78	0.01uF K B
C921	043-6400-90	16V 4.7uF K
C922	046-1042-78	0.1uF K B

REF NO.	PART NO.	DESCRIPTION
C923	046-1022-58	50V 1000pF
C924	045-2211-50	220pFJ CH
C925	046-3322-58	3300pF K B
C926	046-1042-78	0.1uF K B
C927	043-7503-90	4.7uF
C928	043-7400-90	16V 22uF
C929	042-0643-59	16V 47uF
C934	178-1062-88	10uF
C935	046-1022-58	50V 1000pF
C938	046-1042-78	0.1uF K B
C939	043-5600-90	0.10uF
C940	042-0560-58	16V 10uF
C941	043-0603-90	16V 10uF
C943	046-1042-78	0.1uF K B
C945	178-1062-88	10uF
C946	043-0603-90	16V 10uF
C947	046-1222-38	1200pF K B
C948	043-0603-90	16V 10uF
C951	043-7503-90	4.7uF
C952	046-1042-78	0.1uF K B
C953	178-1062-88	10uF
C954	046-1042-78	0.1uF K B
C955	046-1042-78	0.1uF K B
C1105	168-1042-38	50V 0.1uF K
C1107	045-6097-50	6 +/-0.5pF CH
C1108	046-1022-58	50V 1000pF
C1109	045-6097-50	6 +/-0.5pF CH
C1113	168-1052-78	16V 1uF K
C1201	043-6401-90	16V 10uF
C1202	043-6401-90	16V 10uF
C1203	043-6401-90	16V 10uF
C1204	043-6401-90	16V 10uF
C1205	043-6401-90	16V 10uF
C1206	043-6401-90	16V 10uF
C1207	043-6401-90	16V 10uF
C1208	043-6401-90	16V 10uF
C1209	045-4711-50	470pFJ CH
C1210	045-4711-50	470pFJ CH
C1211	045-4711-50	470pFJ CH
C1212	045-4711-50	470pFJ CH
C1213	045-4711-50	470pFJ CH
C1214	045-4711-50	470pFJ CH
C1215	045-4711-50	470pFJ CH
C1216	045-4711-50	470pFJ CH
C1217	046-6832-78	0.068uF K B
C1218	043-6401-90	16V 10uF
C1219	043-6401-90	16V 10uF
C1220	046-6832-78	0.068uF K B
C1221	046-6832-78	0.068uF K B
C1222	043-6401-90	16V 10uF
C1223	043-6401-90	16V 10uF
C1224	046-6832-78	0.068uF K B
C1225	046-1042-78	0.1uF K B
C1226	046-1042-78	0.1uF K B
C1227	045-1007-50	10 +/-0.5pF CH
C1228	045-1007-50	10 +/-0.5pF CH
C1229	045-1007-50	10 +/-0.5pF CH
C1230	045-1007-50	10 +/-0.5pF CH
C1231	046-1042-78	0.1uF K B
C1232	046-1042-78	0.1uF K B
C1301	046-1042-78	0.1uF K B
C1302	043-0603-90	16V 10uF
C1303	043-6403-90	16V 4.7uF
C1304	043-6403-90	16V 4.7uF
C1305	043-6403-90	16V 4.7uF
C1306	043-6403-90	16V 4.7uF
C1307	043-6403-90	16V 4.7uF
C1308	043-6403-90	16V 4.7uF
C1309	043-6403-90	16V 4.7uF
C1310	043-6403-90	16V 4.7uF
C1311	043-0603-90	16V 10uF
C1312	043-0603-90	16V 10uF
C1313	043-0603-90	16V 10uF
C1314	043-0603-90	16V 10uF
C1318	046-1042-78	0.1uF K B
C1319	046-1042-78	0.1uF K B
C1320	168-1052-78	16V 1uF K
C1321	042-0560-84	16V 47uF
C1322	AAZ0293	25V 10uF 10%
C1323	168-1052-78	16V 1uF K
C1324	043-6401-90	16V 10uF
C1325	042-1762-90	35V 4.7uF M
C1326	043-5600-90	0.10uF

REF NO.	PART NO.	DESCRIPTION
C1327	042-4433-00	25V 3300uF
C1328	168-6822-55	6800pF K
C1329	168-6822-55	6800pF K
C1330	168-6822-55	6800pF K
C1331	168-6822-55	6800pF K
C1332	168-6822-55	6800pF K
C1333	168-6822-55	6800pF K
C1334	168-6822-55	6800pF K
C1335	168-6822-55	6800pF K
C1359	168-3342-58	0.33uF K
C1360	168-3342-58	0.33uF K
C1371	046-1042-78	0.1uF K B
C1372	046-1042-78	0.1uF K B
C1375	168-1032-55	0.01uF K
C1509	043-0570-90	16V 2.2uF K
C1510	043-0570-90	16V 2.2uF K
C1511	043-0570-90	16V 2.2uF K
C1512	043-0570-90	16V 2.2uF K
C1513	045-2201-50	22pFJ CH
C1514	045-2201-50	22pFJ CH
C1515	043-0570-90	16V 2.2uF K
C1516	043-0570-90	16V 2.2uF K
C1517	043-0570-90	16V 2.2uF K
C1518	043-0570-90	16V 2.2uF K
C1519	046-2232-78	0.022uF K B
C1520	046-2232-78	0.022uF K B
C1521	046-2232-78	0.022uF K B
C1522	046-2232-78	0.022uF K B
C1523	045-2201-50	22pFJ CH
C1524	045-2201-50	22pFJ CH
C1525	046-1822-38	1800pF K B
C1526	046-1822-38	1800pF K B
C1527	043-6401-90	16V 10uF
C1528	043-6401-90	16V 10uF
C1529	046-1822-38	1800pF K B
C1530	046-1822-38	1800pF K B
D302	001-9013-90	BA891
D303	001-9013-90	BA891
D304	001-9013-90	BA891
D305	001-9013-90	BA891
D307	001-2412-90	RR264M-400
D801	001-2403-90	M1F60
D802	001-2412-90	RR264M-400
D901	001-2403-90	M1F60
D902	001-2629-90	D1FM3-5063
D903	001-2633-90	1SS388-TPL3,F
D904	001-2633-90	1SS388-TPL3,F
IC101	----------	R5S72691P266FP (Microcomputer) (Software should be written on production) (043600-052) (Software of each model is different)
IC102	051-9326-80	IS45S16800E-6TLA1 [PN3502EA,B,C,E]
IC102	051-9326-81	IS45S16800F-6TLA1 [PN3502EI]
IC103	051-9833-10	MX29GL256FHT2I-90Q (FLASH-ROM)
IC108	051-7222-28	TC7SH08FU-TE85L,F
IC109	051-5481-90	S-1009N30I-M5T1U
IC110	051-5482-90	S-1009N11I-N4T1U
IC201	----------	SAF7741HV/N127 (DSP) (Thermal pad) (674710-051) [PN3502EA,B,C,E]
IC201	----------	SAF7741HV/N127ZK (DSP) (Exposed die pad) (674713-051) [PN3502EI]
IC202	051-7106-90	CD4052B-PWR
IC204	----------	S-24C64CI-T8T5U3 (E2PROM) (Software should be written on production) (943080-051) (Software of each model is different)
IC205	----------	BD00C0AWFP (Voltage regulator) (Thermal pad) (358290-051)
IC301	----------	TEF7000(Tuner) (Thermal pad) (402590-051)
IC302	----------	TEF7000(Tuner) (Thermal pad) (402590-051)
IC303	051-3741-90	NJM4184U2-15A (TE2)
IC601	----------	BD00D0AWHFP-TR (Voltage regulator) (Thermal pad) (370990-051)
IC702	051-7202-28	TC7SH32FU TE85L
IC703	051-7244-90	TC7WZ125FK-TE85L
IC801	----------	M30281FATHP (Power monitoring microcomputer) (Software should be written on production) (CMZ0561)
IC802	051-5481-90	S-1009N30I-M5T1U
IC803	051-5443-08	BD4850G-TR
IC804	051-5443-08	BD4850G-TR
IC901	----------	NJM2886DL3-05-TE1 (Voltage regulator) (Thermal pad) (336890-051)
IC902	----------	BD00C0AWFP (Voltage regulator) (Thermal pad) (358290-051)
IC904	051-3608-80	LTC3850IGN-1 #TRPBF
IC906	051-3724-80	S-1172B1C-E6T1U
IC907	051-3741-91	NJW4184U2-33A
IC1201	051-3019-90	NJM2060V
IC1202	051-3019-90	NJM2060V
IC1301	051-2064-00	TB2926HQ [PN3502EA,B,C,E]
IC1301	051-2076-00	TB2938HQ [PN3502EI]
IC1302	051-3034-90	NJM4558V
IC1303	051-2802-90	TDA7476
IC1501	051-3034-90	NJM4558V
J601	EBZ0031	30P
J701	074-3062-50	50P
J1301	074-4009-20	20P [PN3502EA,B,C,E]
J1301	074-4086-20	20P [PN3502EI]
J1402	074-3062-00	100P
J1501	074-1302-16	16P [PN3502EA,B,C,E]
J1501	074-4085-16	16P [PN3502EI]
J1502	074-1302-12	12P [PN3502EA,B,C,E]
J1502	074-4085-12	12P [PN3502EI]
L101	010-3104-54	600 ohm/100MHz
L102	010-3104-54	600 ohm/100MHz
L201	010-3104-54	600 ohm/100MHz
L202	010-3104-54	600 ohm/100MHz
L203	010-3104-54	600 ohm/100MHz
L204	010-3104-54	600 ohm/100MHz
L205	010-3104-54	600 ohm/100MHz
L206	010-3104-54	600 ohm/100MHz
L207	010-3104-54	600 ohm/100MHz

REF NO.	PART NO.	DESCRIPTION
L208	010-3104-54	600 ohm/100MHz
L209	010-3104-54	600 ohm/100MHz
L211	010-3104-54	600 ohm/100MHz
L212	010-3104-54	600 ohm/100MHz
L213	010-3104-54	600 ohm/100MHz
L214	010-3104-54	600 ohm/100MHz
L215	010-3104-54	600 ohm/100MHz
L216	010-3104-54	600 ohm/100MHz
L217	010-3104-54	600 ohm/100MHz
L218	010-3104-54	600 ohm/100MHz
L219	010-3104-54	600 ohm/100MHz
L220	010-3105-70	240ohm/100MHz
L221	010-3104-54	600 ohm/100MHz
L222	010-3104-54	600 ohm/100MHz
L223	010-3104-54	600 ohm/100MHz
L312	010-3100-68	3.3uH J
L314	010-3062-54	290nH
L316	010-3062-54	290nH
L318	010-3062-56	0.5uH
L319	010-3062-53	0.215uH
L320	010-3406-53	1.8uH J
L322	010-3104-54	600 ohm/100MHz
L323	010-3104-54	600 ohm/100MHz
L324	010-2290-52	330uH
L325	010-2290-52	330uH
L503	010-3104-54	600 ohm/100MHz
L601	010-3104-50	30 ohm/100MHz
L603	010-3104-50	30 ohm/100MHz
L701	010-3104-54	600 ohm/100MHz
L702	010-3104-54	600 ohm/100MHz
L703	010-3104-54	600 ohm/100MHz
L801	BAZ0431	10uH
L901	010-3538-52	3.9uH
L903	010-3538-51	3.3uH
L904	010-3104-50	30 ohm/100MHz
L905	010-3127-91	220 ohm/100MHz
L1102	BEZ0161	DLW31SN601SQ2
L1301	010-8063-00	DN-CL2541
NF101	060-3124-90	NFM18PS105R0J3 1uF
NF102	060-3124-90	NFM18PS105R0J3 1uF
NF107	060-3124-90	NFM18PS105R0J3 1uF
NF108	060-3124-90	NFM18PS105R0J3 1uF
P301	092-2210-00	ANTENNA RECEPT
P501	076-3066-30	30P
P901	076-0569-02	2P
P1102	074-4073-00	8P
Q201	125-2046-95	DTC143ZUB
Q202	125-7007-90	Si5441BDC-TI-E3
Q203	198-3018-00	2SK3018
Q204	198-3018-00	2SK3018
Q306	192-4116-51	2SC4116 G,L
Q502	192-4081-60	2SC4081UBTL [PN3502EI]
Q601	125-2046-95	DTC143ZUB
Q602	125-7011-90	RSR025P03TL
Q701	125-2046-95	DTC143ZUB
Q702	125-2046-95	DTC143ZUB
Q801	192-4116-51	2SC4116 G,L
Q802	125-0035-98	DTA114YUBTL
Q803	125-2046-95	DTC143ZUB
Q901	125-2046-95	DTC143ZUB
Q902	125-2046-95	DTC143ZUB
Q903	125-2046-95	DTC143ZUB
Q904	190-2060-00	2SA2060
Q905	125-8017-90	SP8K4-TB
Q906	125-8017-90	SP8K4-TB
Q909	125-9027-90	UPA1981TE
Q1101	125-2046-95	DTC143ZUB
Q1102	125-0021-93	DTA144EUA-T106
Q1304	125-9017-92	UMD3N-TR
Q1305	198-3018-00	2SK3018
Q1306	198-3018-00	2SK3018
R101	033-1031-15	1/16W 10k ohm J
R102	033-1031-15	1/16W 10k ohm J
R103	033-1031-15	1/16W 10k ohm J
R104	033-1031-15	1/16W 10k ohm J
R105	033-1031-15	1/16W 10k ohm J
R107	033-1031-15	1/16W 10k ohm J
R108	033-1031-15	1/16W 10k ohm J
R109	033-1031-15	1/16W 10k ohm J
R110	033-1031-15	1/16W 10k ohm J
R111	033-1031-15	1/16W 10k ohm J
R112	033-1031-15	1/16W 10k ohm J
R113	033-1031-15	1/16W 10k ohm J
R114	033-1031-15	1/16W 10k ohm J
R117	033-1031-15	1/16W 10k ohm J
R119	033-1031-15	1/16W 10k ohm J
R120	033-1031-15	1/16W 10k ohm J
R121	033-4721-15	1/16W 4.7k ohm J
R122	033-3301-15	1/16W 33 ohm J
R123	033-3301-15	1/16W 33 ohm J
R124	033-3301-15	1/16W 33 ohm J
R125	033-3301-15	1/16W 33 ohm J
R126	033-4721-15	1/16W 4.7k ohm J
R127	033-4721-15	1/16W 4.7k ohm J
R128	033-3301-15	1/16W 33 ohm J
R129	033-3301-15	1/16W 33 ohm J
R130	033-3301-15	1/16W 33 ohm J
R131	033-3301-15	1/16W 33 ohm J
R133	033-1021-15	1/16W 1k ohm J
R134	033-4721-15	1/16W 4.7k ohm J
R135	033-3301-15	1/16W 33 ohm J
R136	033-4701-15	1/16W 47 ohm J
R137	032-0150-54	1/16W 1k ohm F
R138	033-0000-05	1/16W 0 ohm
R139	033-4721-15	1/16W 4.7k ohm J
R140	033-4721-15	1/16W 4.7k ohm J
R141	033-4721-15	1/16W 4.7k ohm J
R142	032-0221-76	1/16W 24k ohm F
R144	033-3321-15	1/16W 3.3k ohm J
R146	033-6811-15	1/16W 680 ohm J
R147	032-0150-65	1/16W 5.6k ohm F
R148	033-0000-05	1/16W 0 ohm
R150	033-0000-05	1/16W 0 ohm
R151	033-0000-05	1/16W 0 ohm
R152	033-1031-15	1/16W 10k ohm J
R153	033-0000-05	1/16W 0 ohm
R155	033-1031-15	1/16W 10k ohm J
R157	033-4721-15	1/16W 4.7k ohm J
R158	033-4721-15	1/16W 4.7k ohm J
R159	033-4721-15	1/16W 4.7k ohm J
R160	033-4721-15	1/16W 4.7k ohm J
R161	033-4721-15	1/16W 4.7k ohm J
R162	033-0000-05	1/16W 0 ohm
R163	033-0000-05	1/16W 0 ohm
R164	033-1011-15	1/16W 100 ohm J
R165	033-1011-15	1/16W 100 ohm J
R166	033-1021-15	1/16W 1k ohm J
R167	033-0000-05	1/16W 0 ohm
R168	033-0000-05	1/16W 0 ohm
R169	033-1011-15	1/16W 100 ohm J
R170	033-1011-15	1/16W 100 ohm J
R171	033-1031-15	1/16W 10k ohm J
R172	033-1031-15	1/16W 10k ohm J
R173	032-0150-59	1/16W 100k ohm F
R181	033-1011-15	1/16W 100 ohm J
R182	033-1011-15	1/16W 100 ohm J
R183	033-0000-05	1/16W 0 ohm
R184	033-0000-05	1/16W 0 ohm
R185	033-1011-15	1/16W 100 ohm J
R186	033-1011-15	1/16W 100 ohm J
R197	033-2211-15	1/16W 220 ohm J
R198	033-2211-15	1/16W 220 ohm J
R199	033-2211-15	1/16W 220 ohm J
R201	033-1811-15	1/16W 180 ohm J
R202	033-1811-15	1/16W 180 ohm J
R203	033-1811-15	1/16W 180 ohm J
R204	033-1811-15	1/16W 180 ohm J
R205	032-0221-75	1/16W 47k ohm F
R206	032-0221-75	1/16W 47k ohm F
R209	033-0000-05	1/16W 0 ohm
R210	033-0000-05	1/16W 0 ohm
R211	032-0221-75	1/16W 47k ohm F
R212	032-0221-75	1/16W 47k ohm F
R213	032-0150-53	1/16W 33k ohm F
R214	032-0150-53	1/16W 33k ohm F
R217	033-0000-05	1/16W 0 ohm
R218	033-0000-05	1/16W 0 ohm
R219	033-1031-15	1/16W 10k ohm J
R220	033-1031-15	1/16W 10k ohm J
R221	033-1031-15	1/16W 10k ohm J
R222	032-0221-74	1/16W 10k ohm 1%
R223	032-0221-74	1/16W 10k ohm 1%
R225	033-0000-05	1/16W 0 ohm
R226	033-0000-05	1/16W 0 ohm
R227	119-1001-15	1/10W 10 ohm
R228	033-1031-15	1/16W 10k ohm J
R229	033-1011-15	1/16W 100 ohm J
R230	033-4731-15	1/16W 47k ohm J
R231	033-1031-15	1/16W 10k ohm J
R232	033-1031-15	1/16W 10k ohm J
R233	032-0150-52	1/16W 20k ohm F
R234	032-0150-52	1/16W 20k ohm F
R235	032-0150-52	1/16W 20k ohm F
R236	032-0150-52	1/16W 20k ohm F
R237	033-2201-15	1/16W 22 ohm J
R238	032-0150-59	1/16W 100k ohm F
R239	032-0150-59	1/16W 100k ohm F
R240	032-0150-52	1/16W 20k ohm F
R241	032-0150-52	1/16W 20k ohm F
R242	032-0150-52	1/16W 20k ohm F
R243	032-0150-52	1/16W 20k ohm F
R244	032-0150-53	1/16W 33k ohm F
R245	032-0150-53	1/16W 33k ohm F
R246	032-0150-53	1/16W 33k ohm F
R247	033-1011-15	1/16W 100 ohm J
R248	032-0150-53	1/16W 33k ohm F
R249	033-4731-15	1/16W 47k ohm J
R250	033-1031-15	1/16W 10k ohm J
R252	033-0000-05	1/16W 0 ohm
R253	033-1031-15	1/16W 10k ohm J
R254	033-0000-05	1/16W 0 ohm
R255	033-0000-05	1/16W 0 ohm
R256	033-1011-15	1/16W 100 ohm J
R257	033-1011-15	1/16W 100 ohm J
R258	033-0000-05	1/16W 0 ohm
R260	033-1011-15	1/16W 100 ohm J
R261	033-1011-15	1/16W 100 ohm J
R262	033-1031-15	1/16W 10k ohm J
R263	033-1011-15	1/16W 100 ohm J
R264	033-2201-15	1/16W 22 ohm J
R266	033-3921-15	1/16W 3.9k ohm J
R267	033-1021-15	1/16W 1k ohm J
R268	033-1021-15	1/16W 1k ohm J
R269	033-3921-15	1/16W 3.9k ohm J
R270	033-1021-15	1/16W 1k ohm J
R271	033-1021-15	1/16W 1k ohm J
R272	033-3921-15	1/16W 3.9k ohm J
R273	033-3921-15	1/16W 3.9k ohm J
R274	033-0000-05	1/16W 0 ohm
R275	033-0000-05	1/16W 0 ohm
R280	033-0000-05	1/16W 0 ohm
R281	033-0000-05	1/16W 0 ohm
R284	033-1031-15	1/16W 10k ohm J
R285	033-1031-15	1/16W 10k ohm J
R286	033-1031-15	1/16W 10k ohm J
R287	033-1031-15	1/16W 10k ohm J
R289	033-1011-15	1/16W 100 ohm J
R290	033-1011-15	1/16W 100 ohm J
R291	033-1011-15	1/16W 100 ohm J
R294	032-0221-63	1/16W 12k ohm F
R295	032-0221-63	1/16W 12k ohm F
R296	032-0221-61	1/16W 6.8k ohm F
R301	033-0000-05	1/16W 0 ohm
R305	033-0000-05	1/16W 0 ohm
R307	033-0000-05	1/16W 0 ohm
R316	033-1811-15	1/16W 180 ohm J
R317	033-1811-15	1/16W 180 ohm J
R318	033-3311-15	1/16W 330 ohm J
R319	033-3311-15	1/16W 330 ohm J
R320	033-1051-15	1/16W 1M ohm J
R321	033-1051-15	1/16W 1M ohm J
R322	033-4741-15	1/16W 470k ohm J
R323	033-1201-15	1/16W 12 ohm
R324	033-4741-15	1/16W 470k ohm J
R325	033-1201-15	1/16W 12 ohm
R326	033-1051-15	1/16W 1M ohm J
R327	033-1051-15	1/16W 1M ohm J
R328	033-5601-15	1/16W 56 ohm J
R333	033-2231-15	1/16W 22k ohm J
R334	033-2231-15	1/16W 22k ohm J
R335	033-3921-15	1/16W 3.9k ohm J
R336	033-3921-15	1/16W 3.9k ohm J
R337	033-0000-05	1/16W 0 ohm

REF NO.	PART NO.	DESCRIPTION
R339	033-0000-05	1/16W 0 ohm
R340	033-0000-05	1/16W 0 ohm
R343	033-0000-05	1/16W 0 ohm
R344	033-0000-05	1/16W 0 ohm
R345	033-4721-15	1/16W 4.7k ohm J
R346	033-4721-15	1/16W 4.7k ohm J
R347	033-0000-05	1/16W 0 ohm
R348	033-0000-05	1/16W 0 ohm
R351	033-0000-05	1/16W 0 ohm
R352	033-0000-05	1/16W 0 ohm
R353	033-0000-05	1/16W 0 ohm
R354	033-0000-05	1/16W 0 ohm
R355	033-0000-05	1/16W 0 ohm
R356	033-0000-05	1/16W 0 ohm
R357	033-0000-05	1/16W 0 ohm
R358	033-0000-05	1/16W 0 ohm
R359	116-2201-15	1/4W 22 ohm
R360	116-2201-15	1/4W 22 ohm
R361	116-2201-15	1/4W 22 ohm
R362	116-2201-15	1/4W 22 ohm
R363	033-4731-15	1/16W 47k ohm J
R364	033-1031-15	1/16W 10k ohm J
R365	033-4731-15	1/16W 47k ohm J
R366	033-0000-05	1/16W 0 ohm
R367	033-0000-05	1/16W 0 ohm
R370	033-0000-05	1/16W 0 ohm
R371	116-0000-05	1/4W 0 ohm JW
R372	119-1041-15	1/10W 100k ohm
R509	033-1041-15	1/16W 100k ohm J
R510	033-1021-15	1/16W 1k ohm J
R511	033-1031-15	1/16W 10k ohm J
R512	033-1031-15	1/16W 10k ohm J
R513	033-1011-15	1/16W 100 ohm J
R514	033-1011-15	1/16W 100 ohm J
R518	033-1021-15	1/16W 1k ohm J
R521	033-1041-15	1/16W 100k ohm J
R546	119-1031-15	1/10W 10k ohm [PN3502EI]
R547	033-0000-05	1/16W 0 ohm [PN3502EA,B,C,E]
R601	033-1021-15	1/16W 1k ohm J
R602	033-0000-05	1/16W 0 ohm
R603	119-1831-15	1/10W 18k ohm
R604	119-1021-15	1/10W 1k ohm
R605	032-0221-65	1/16W 68k ohm F
R606	032-0221-61	1/16W 6.8k ohm F
R607	033-3331-15	1/16W 33k ohm J
R608	033-3331-15	1/16W 33k ohm J
R609	033-3331-15	1/16W 33k ohm J
R661	033-0000-05	1/16W 0 ohm
R662	033-0000-05	1/16W 0 ohm
R663	033-0000-05	1/16W 0 ohm
R701	033-1031-15	1/16W 10k ohm J
R703	033-1031-15	1/16W 10k ohm J
R704	033-1041-15	1/16W 100k ohm J
R705	033-4731-15	1/16W 47k ohm J
R708	033-1031-15	1/16W 10k ohm J
R709	033-4721-15	1/16W 4.7k ohm J
R710	033-0000-05	1/16W 0 ohm
R711	033-0000-05	1/16W 0 ohm
R712	033-4741-15	1/16W 470k ohm J
R715	033-1041-15	1/16W 100k ohm J
R716	033-1041-15	1/16W 100k ohm J
R717	033-0000-05	1/16W 0 ohm
R720	033-0000-05	1/16W 0 ohm
R721	033-0000-05	1/16W 0 ohm
R722	033-0000-05	1/16W 0 ohm
R723	033-4741-15	1/16W 470k ohm J
R725	033-0000-05	1/16W 0 ohm
R726	033-0000-05	1/16W 0 ohm
R728	033-0000-05	1/16W 0 ohm
R729	033-0000-05	1/16W 0 ohm
R731	119-0000-05	1/10W 0 ohm JW
R732	119-0000-05	1/10W 0 ohm JW
R735	119-0000-05	1/10W 0 ohm JW
R747	033-1031-15	1/16W 10k ohm J
R749	033-1031-15	1/16W 10k ohm J
R801	AQZ0457	1/16W 150k ohm 1%
R802	033-0000-05	1/16W 0 ohm
R803	AQZ0461	1/16W 270k ohm 1%
R804	033-0000-05	1/16W 0 ohm
R805	033-4731-15	1/16W 47k ohm J
R806	033-1031-15	1/16W 10k ohm J
R807	033-4731-15	1/16W 47k ohm J
R808	033-5611-15	1/16W 560 ohm J
R809	033-1031-15	1/16W 10k ohm J
R810	032-0208-51	1/4W 15k ohm
R813	032-0150-59	1/16W 100k ohm F
R814	033-0000-05	1/16W 0 ohm
R815	AQZ0468	1/16W 1M ohm 1%
R816	033-0000-05	1/16W 0 ohm
R817	033-4731-15	1/16W 47k ohm J
R818	033-4731-15	1/16W 47k ohm J
R819	033-1031-15	1/16W 10k ohm J
R821	033-4731-15	1/16W 47k ohm J
R822	033-1011-15	1/16W 100 ohm J
R823	033-1011-15	1/16W 100 ohm J
R824	032-0150-54	1/16W 1k ohm F
R825	032-0150-59	1/16W 100k ohm F
R827	033-1041-15	1/16W 100k ohm J
R829	033-1041-15	1/16W 100k ohm J
R830	033-4721-15	1/16W 4.7k ohm J
R831	033-1011-15	1/16W 100 ohm J
R832	033-4721-15	1/16W 4.7k ohm J
R833	033-1011-15	1/16W 100 ohm J
R834	033-4721-15	1/16W 4.7k ohm J
R835	033-1011-15	1/16W 100 ohm J
R836	033-0000-05	1/16W 0 ohm
R837	033-1011-15	1/16W 100 ohm J
R838	033-1011-15	1/16W 100 ohm J
R839	033-1031-15	1/16W 10k ohm J
R902	033-1031-15	1/16W 10k ohm J
R903	033-1031-15	1/16W 10k ohm J
R904	032-0225-66	1/16W 3.6k ohm +/-0.5%
R905	032-0225-88	1/16W 1.5k ohm +/-0.5%
R906	032-0225-87	1/16W 75 ohm +/-0.5%
R907	032-0225-75	1/16W 1.3k ohm +/-0.5%
R908	032-0225-86	1/16W 39 ohm +/-0.5%
R910	116-1031-15	1/4W 10k ohm
R912	116-2221-15	1/4W 2.2k ohm
R913	032-0224-51	1/2W 0.010 ohm F
R914	116-2221-15	1/4W 2.2k ohm
R915	AQZ0402	1/16W 10 ohm 1%
R916	AQZ0402	1/16W 10 ohm 1%
R917	032-0221-83	1/16W 3.3k ohm F
R918	116-0000-05	1/4W 0 ohm JW
R921	032-0221-50	1/16W 43k ohm F
R922	033-0000-05	1/16W 0 ohm
R923	116-3011-15	1/4W 300 ohm
R924	116-3311-15	1/4W 330 ohm
R925	033-4791-15	1/16W 4.7 ohm
R926	AQZ0441	1/16W 8.2k ohm +/-1%
R927	116-2291-15	1/4W 2.2 ohm
R928	032-0225-73	1/16W 15k ohm
R929	033-4791-15	1/16W 4.7 ohm
R930	AQZ0451	1/16W 47k ohm 1%
R931	033-0000-05	1/16W 0 ohm
R934	AQZ0402	1/16W 10 ohm 1%
R935	AQZ0402	1/16W 10 ohm 1%
R936	033-1041-15	1/16W 100k ohm J
R937	032-0221-73	1/16W 2.2k ohm 1%
R938	032-0224-51	1/2W 0.010 ohm F
R940	116-0000-05	1/4W 0 ohm JW
R941	033-1031-15	1/16W 10k ohm J
R944	032-0221-86	1/16W 82k ohm F
R946	032-0221-80	1/16W 6.2k ohm F
R947	033-0000-05	1/16W 0 ohm
R949	033-0000-05	1/16W 0 ohm
R950	033-1041-15	1/16W 100k ohm J
R951	116-0000-05	1/4W 0 ohm JW
R952	032-0221-56	1/16W 22k ohm F
R953	033-2221-15	1/16W 2.2k ohm J
R954	119-1021-15	1/10W 1k ohm
R955	033-1021-15	1/16W 1k ohm J
R956	116-1511-15	1/4W 150 ohm
R957	116-1511-15	1/4W 150 ohm
R958	032-0221-66	1/16W 270 ohm F
R1109	119-5621-15	1/10W 5.6k ohm
R1127	033-5611-15	1/16W 560 ohm J
R1201	032-0221-64	1/16W 39k ohm F
R1202	032-0221-64	1/16W 39k ohm F
R1203	032-0221-64	1/16W 39k ohm F
R1204	032-0221-64	1/16W 39k ohm F
R1205	032-0221-64	1/16W 39k ohm F
R1206	032-0221-64	1/16W 39k ohm F
R1207	032-0221-64	1/16W 39k ohm F
R1208	032-0221-64	1/16W 39k ohm F
R1209	032-0221-64	1/16W 39k ohm F
R1210	032-0221-64	1/16W 39k ohm F
R1211	032-0221-64	1/16W 39k ohm F
R1212	032-0221-64	1/16W 39k ohm F
R1213	032-0221-62	1/16W 8.2k ohm F
R1214	032-0221-62	1/16W 8.2k ohm F
R1215	032-0221-62	1/16W 8.2k ohm F
R1216	032-0221-62	1/16W 8.2k ohm F
R1217	032-0221-62	1/16W 8.2k ohm F
R1218	032-0221-62	1/16W 8.2k ohm F
R1219	032-0221-62	1/16W 8.2k ohm F
R1220	032-0221-62	1/16W 8.2k ohm F
R1221	032-0150-59	1/16W 100k ohm F
R1222	032-0150-59	1/16W 100k ohm F
R1223	032-0150-59	1/16W 100k ohm F
R1224	032-0150-59	1/16W 100k ohm F
R1225	032-0150-59	1/16W 100k ohm F
R1226	032-0150-59	1/16W 100k ohm F
R1227	032-0150-59	1/16W 100k ohm F
R1228	032-0150-59	1/16W 100k ohm F
R1233	032-0150-59	1/16W 100k ohm F
R1234	032-0150-59	1/16W 100k ohm F
R1235	032-0150-59	1/16W 100k ohm F
R1236	032-0150-59	1/16W 100k ohm F
R1305	033-0000-05	1/16W 0 ohm
R1306	033-0000-05	1/16W 0 ohm
R1307	033-0000-05	1/16W 0 ohm
R1308	033-0000-05	1/16W 0 ohm
R1328	033-1031-15	1/16W 10k ohm J
R1329	033-3331-15	1/16W 33k ohm J
R1330	033-4731-15	1/16W 47k ohm J
R1337	033-1011-15	1/16W 100 ohm J
R1338	033-1011-15	1/16W 100 ohm J
R1339	033-1021-15	1/16W 1k ohm J
R1340	033-4731-15	1/16W 47k ohm J
R1345	033-3321-15	1/16W 3.3k ohm J
R1346	033-1031-15	1/16W 10k ohm J
R1349	033-1031-15	1/16W 10k ohm J
R1351	033-0000-05	1/16W 0 ohm
R1352	033-1001-15	1/16W 10 ohm J
R1353	033-1001-15	1/16W 10 ohm J
R1355	033-0000-05	1/16W 0 ohm
R1356	033-1001-15	1/16W 10 ohm J
R1357	033-1001-15	1/16W 10 ohm J
R1371	033-1021-15	1/16W 1k ohm J
R1372	033-1021-15	1/16W 1k ohm J
R1373	033-0000-05	1/16W 0 ohm
R1374	033-0000-05	1/16W 0 ohm
R1375	033-0000-05	1/16W 0 ohm
R1378	033-0000-05	1/16W 0 ohm
R1501	119-1531-15	1/10W 15k ohm
R1502	119-1531-15	1/10W 15k ohm
R1503	032-0221-75	1/16W 47k ohm F
R1504	032-0221-75	1/16W 47k ohm F
R1505	032-0221-75	1/16W 47k ohm F
R1506	032-0221-75	1/16W 47k ohm F
R1507	032-0221-75	1/16W 47k ohm F
R1508	032-0221-75	1/16W 47k ohm F
R1509	119-3331-15	1/10W 33k ohm
R1510	119-3331-15	1/10W 33k ohm
R1511	119-2221-15	1/10W 2.2k ohm
R1512	119-2221-15	1/10W 2.2k ohm
R1513	032-0221-75	1/16W 47k ohm F
R1514	033-0000-05	1/16W 0 ohm
R1515	033-0000-05	1/16W 0 ohm
R1516	033-0000-05	1/16W 0 ohm
R1517	033-0000-05	1/16W 0 ohm
R1518	032-0221-75	1/16W 47k ohm F
R1519	033-4731-15	1/16W 47k ohm J
R1520	033-4731-15	1/16W 47k ohm J
R1521	033-4731-15	1/16W 47k ohm J
R1522	033-4731-15	1/16W 47k ohm J

REF NO.	PART NO.	DESCRIPTION
R1971	033-1011-15	1/16W 100 ohm J
RN101	050-0140-59	1/32W 33 ohm x4J
RN102	050-0140-59	1/32W 33 ohm x4J
RN103	050-0140-59	1/32W 33 ohm x4J
RN104	050-0140-59	1/32W 33 ohm x4J
RN105	050-0140-51	1/32W 22 ohm x4J
RN106	050-0140-51	1/32W 22 ohm x4J
RN107	050-0140-51	1/32W 22 ohm x4J
RN108	050-0140-51	1/32W 22 ohm x4J
RN109	050-0140-57	1/32W 10k ohm x4J
RN110	050-0140-57	1/32W 10k ohm x4J
RN111	050-0140-57	1/32W 10k ohm x4J
RN112	050-0140-57	1/32W 10k ohm x4J
RN114	050-0140-59	1/32W 33 ohm x4J
RN115	050-0140-51	1/32W 22 ohm x4J
RN116	050-0140-51	1/32W 22 ohm x4J
RN117	050-0140-51	1/32W 22 ohm x4J
RN118	050-0140-51	1/32W 22 ohm x4J
RN123	050-0140-57	1/32W 10k ohm x4J
RN124	050-0140-59	1/32W 33 ohm x4J
RN125	050-0140-59	1/32W 33 ohm x4J
RN126	050-0140-59	1/32W 33 ohm x4J
RN127	050-0140-59	1/32W 33 ohm x4J
RN128	050-0140-59	1/32W 33 ohm x4J
RN129	050-0140-59	1/32W 33 ohm x4J
RN201	050-0140-66	1/32W 47 ohm x4J
RN202	050-0140-52	1/32W 100 ohm x4J
RN501	050-0140-52	1/32W 100 ohm x4J
RN502	050-0140-52	1/32W 100 ohm x4J
RN505	050-0140-52	1/32W 100 ohm x4J
RN601	050-0140-51	1/32W 22 ohm x4J
RN602	050-0140-51	1/32W 22 ohm x4J
RN603	050-0140-51	1/32W 22 ohm x4J
RN604	050-0140-51	1/32W 22 ohm x4J
RN701	050-0140-52	1/32W 100 ohm x4J

REF NO.	PART NO.	DESCRIPTION
RN801	050-0140-67	1/32W 220 ohm x4J
RN802	050-0140-67	1/32W 220 ohm x4J
RN803	050-0140-62	1/32W 22k ohm X4J
RN804	050-0140-52	1/32W 100 ohm x4J
RN805	050-0140-52	1/32W 100 ohm x4J
RN806	050-0140-52	1/32W 100 ohm x4J
T301	010-4100-50	0.215uH
T302	010-4100-50	0.215uH
TH101	002-0315-00	TN10-3U153JT
VR801	001-9210-50	AVR-M1608C270MTAAD
VR1101	AQZ0761	EZJZ0V800AA
VR1102	AQZ0761	EZJZ0V800AA
VR1103	AQZ0761	EZJZ0V800AA
VR1501	001-9210-50	AVR-M1608C270MTAAD
VR1502	001-9210-50	AVR-M1608C270MTAAD
VR1503	001-9210-50	AVR-M1608C270MTAAD
VR1504	001-9210-50	AVR-M1608C270MTAAD
VR1505	001-9210-50	AVR-M1608C270MTAAD
VR1506	001-9210-50	AVR-M1608C270MTAAD
VR1507	001-9210-50	AVR-M1608C270MTAAD
VR1508	001-9210-50	AVR-M1608C270MTAAD
VR1509	001-9210-50	AVR-M1608C270MTAAD
VR1510	001-9210-50	AVR-M1608C270MTAAD

REF NO.	PART NO.	DESCRIPTION
VR1511	001-9210-50	AVR-M1608C270MTAAD
VR1512	001-9210-50	AVR-M1608C270MTAAD
VR1513	001-9210-50	AVR-M1608C270MTAAD
VR1514	001-9210-50	AVR-M1608C270MTAAD
VR1515	001-9210-50	AVR-M1608C270MTAAD
VR1516	001-9210-50	AVR-M1608C270MTAAD
VR1517	001-9210-50	AVR-M1608C270MTAAD
VR1518	001-9210-50	AVR-M1608C270MTAAD
VR1519	001-9210-50	AVR-M1608C270MTAAD
X101	061-3575-80	22.5792MHz
X102	061-3580-90	12MHz
X103	061-3593-80	NX3225GA 48MHz
X201	061-3589-90	41.6MHz
X801	060-1542-90	16MHz
ZD301	060-8107-50	SURGE PROTECTOR
ZD302	060-8107-50	SURGE PROTECTOR
ZD801	001-4301-48	HZU 9.1B3
ZD802	001-4313-58	HZU6C1L
ZD810	001-4301-48	HZU 9.1B3
ZD1302	001-4912-90	SM5S22A-HE3/2D
ZD1371	001-4305-19	UDZSTE-17 5.1B
ZD1372	001-4305-19	UDZSTE-17 5.1B
PWB	039-4058-00	PWB(WITHOUT COMPONENTS)

XM/HD PWB(B2) section ⚠

REF NO.	PART NO.	DESCRIPTION
C002	046-1022-58	50V 1000pF
C003	046-1022-58	50V 1000pF
C004	046-1022-58	50V 1000pF
C006	043-5703-90	50V 0.001uF
C007	043-7701-90	2.2uF
C008	042-4025-90	16V 47uF
C009	042-1753-90	16V 100uF M
C010	046-1042-78	0.1uF K B
C011	046-1042-78	0.1uF K B
C012	046-1022-58	50V 1000pF
C013	046-1022-58	50V 1000pF
C017	045-1011-50	100pFJ CH
C018	045-1801-50	18pFJ CH
C019	045-1801-50	18pFJ CH
C201	043-4306-90	1uF
C202	043-4306-90	1uF
C203	045-1011-50	100pFJ CH
C204	045-2201-50	22pFJ CH
C205	045-2201-50	22pFJ CH
C206	045-1011-50	100pFJ CH
C207	046-1022-58	50V 1000pF
C208	046-1042-78	0.1uF K B
C209	046-1042-78	0.1uF K B
C210	042-1753-90	16V 100uF M
C211	042-1755-90	16V 47uF
C212	046-1042-78	0.1uF K B
D001	001-2403-90	M1F60

REF NO.	PART NO.	DESCRIPTION
FE001	----------	TUNER(XM) (025302-941) [PN3502EA,B,C,E]
FE001	----------	TUNER(XM) (025303-941) [PN3502EI]
FE201	941-0239-70	TUNER PACK(HD)
IC001	----------	NJM2386ADL3-05-TE1 (Voltage regulator) (Thermal pad) (337490-051)
IC201	----------	BD12KA5FP-E2 (Voltage regulator) (Thermal pad) (357590-051)
J201	074-3066-30	30P
L002	010-3104-53	220 ohm/100MHz
L003	010-3104-53	220 ohm/100MHz
L004	010-3104-53	220 ohm/100MHz
L201	010-3104-54	600 ohm/100MHz
L202	010-3104-54	600 ohm/100MHz
NF005	060-3115-51	CKD310JB1C224 ST
NF201	060-3117-51	CKD510JB1E223 ST
NF202	060-3117-51	CKD510JB1E223 ST

REF NO.	PART NO.	DESCRIPTION
P001	076-3062-50	50P
R008	117-0000-05	1/8W 0 ohm JW
R009	117-0000-05	1/8W 0 ohm JW
R010	033-0000-05	1/16W 0 ohm
R022	032-0162-50	1/10W 0.51 ohm
R043	033-3311-15	1/16W 330 ohm J
R046	033-1021-15	1/16W 1k ohm J
R048	033-1021-15	1/16W 1k ohm J
R051	033-1021-15	1/16W 1k ohm J
R054	033-1021-15	1/16W 1k ohm J
R057	033-0000-05	1/16W 0 ohm
R058	033-3301-15	1/16W 33 ohm J
R059	033-3301-15	1/16W 33 ohm J
R060	033-1011-15	1/16W 100 ohm J
R62	033-0000-05	1/16W 0 ohm
R201	033-0000-05	1/16W 0 ohm
R202	033-0000-05	1/16W 0 ohm
R203	033-1011-15	1/16W 100 ohm J
R204	033-0000-05	1/16W 0 ohm
R205	033-0000-05	1/16W 0 ohm
R206	033-1021-15	1/16W 1k ohm J
R207	033-0000-05	1/16W 0 ohm
R208	033-0000-05	1/16W 0 ohm
R209	033-0000-05	1/16W 0 ohm
R210	033-0000-05	1/16W 0 ohm
R211	033-0000-05	1/16W 0 ohm
PWB	039-3956-00	PWB(WITHOUT COMPONENTS)

IF PWB(B3) section

REF NO.	PART NO.	DESCRIPTION
C3101	045-1011-50	100pFJ CH
C3103	042-0643-52	6.3V 1000uF
C3105	046-4722-58	4700pF K B
C3106	046-1042-78	0.1uF K B
C3108	043-6200-90	6.3V 10uF
C3110	046-1042-78	0.1uF K B
C3111	046-1042-78	0.1uF K B
C3115	046-1042-78	0.1uF K B
C3144	046-1042-78	0.1uF K B
C3151	045-1011-50	100pFJ CH
C3156	046-1042-78	0.1uF K B
CN3202	EAZ0928	40P

REF NO.	PART NO.	DESCRIPTION
IC3101	051-5357-90	BH76330FVM-TR
IC3103	051-6647-70	TJA1051T/3,118
J2501	074-3063-50	50P
L3101	010-3417-90	10uH
NF3101	010-3609-90	DLW43SH510XK2L
P2502	076-3062-00	100P
P3602	076-3062-50	50P
R3101	032-0140-12	1/10W 75 ohm F
R3103	033-4731-15	1/16W 47k ohm J
R3105	032-0210-35	1/10W 120 ohm F
R3106	032-0210-35	1/10W 120 ohm F
R3107	032-0210-35	1/10W 120 ohm F

REF NO.	PART NO.	DESCRIPTION
R3108	032-0210-35	1/10W 120 ohm F
R3111	033-0000-05	1/16W 0 ohm
R3112	032-0150-50	1/16W 10k ohm F
R3144	032-0140-12	1/10W 75 ohm F
RN3101	050-0140-52	1/32W 100 ohm x4J
RN3102	050-0140-57	1/32W 10k ohm x4J
VR3101	001-9210-50	AVR-M1608C270MTAAD
VR3107	001-9210-50	AVR-M1608C270MTAAD
PWB	039-3999-00	PWB(WITHOUT COMPONENTS)