


EXPLODED VIEW : PARTS LIST

Main section

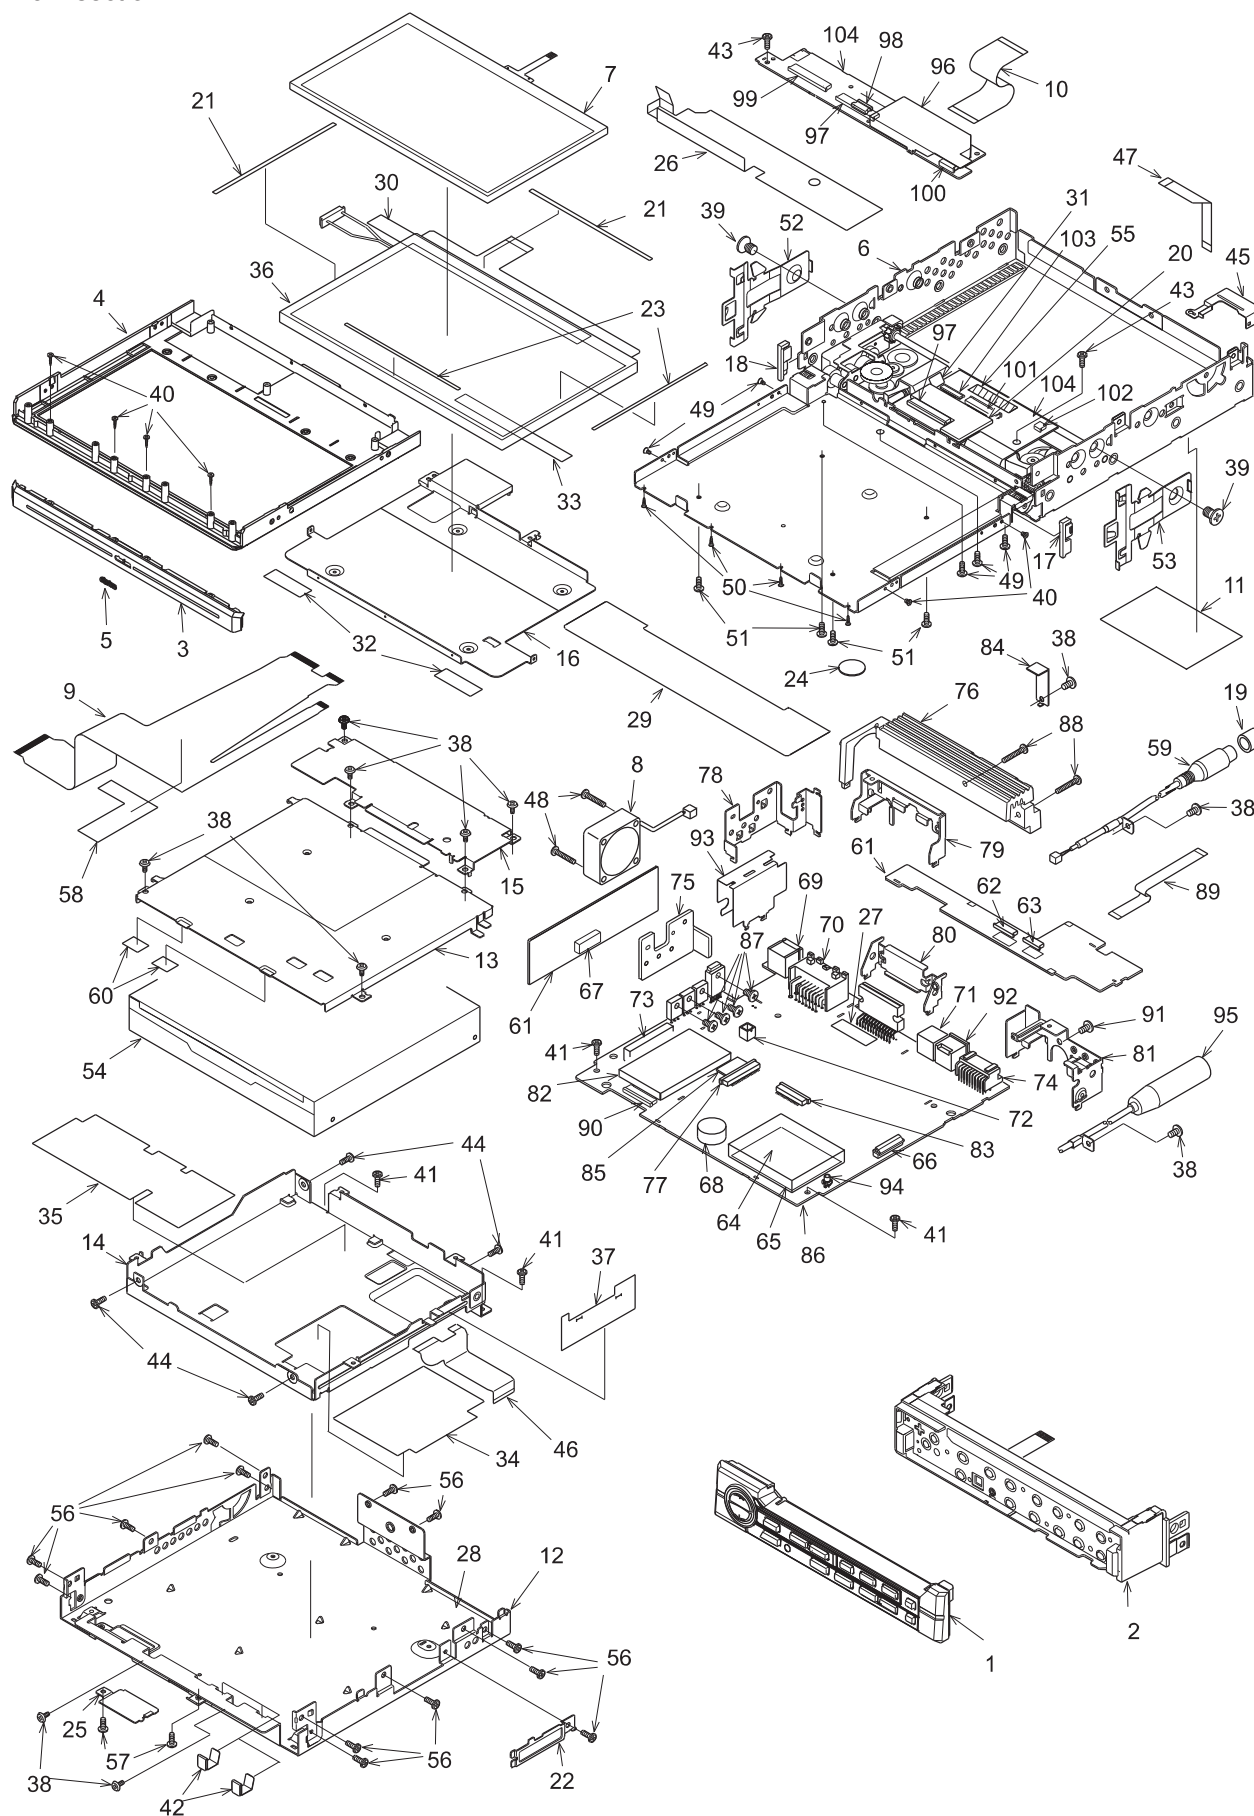


Note)Some parts depend on each model.The model name is specified in the description .
(B-A;QC-6823B-A, K-A;PF-QC-6823K-A, K-B;QC-6823K-B , K-C;QC-6823K-C)

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-558-600 DCP-559-800	DCP-ASSY(B-A) DCP-ASSY(K-A,K-B,K-C)	1	49	781-1722-50	PLATE SCREW(M1.7x2.2)	4
2	-----	INNER-ES-SECTION	1	50	781-1750-50	SCREW(phi1.7x2.2)	4
3	335-7790-00	TOP-CVR	1	51	781-2002-50	PLATE SCREW(M2.0X2)	4
4	370-6925-00	PANEL-ES	1	52	750-3137-03	SPRING(R)	1
5	378-0553-00	BADGE(CLARION)	1	53	750-3137-02	SPRING(L)	1
6	948-0692-05	SLIDE-MECH-ASSY	1	54	929-2504-00	DIGITAL-MECH	1
7	013-9710-00	TOUCH PANEL	1	55	347-5867-00	DOUBLE FACE	1
8	020-3042-01	DC-MOTOR	1	56	714-2604-8B	MACHINE SCREW(M2.6 x4)	13
9	039-2793-00	FPC(MAIN-LCD)	1	57	716-1468-01	SCREW (M2 x2.5)	2
10	039-2509-00	FPC(45P)	1	58	347-8033-00	INSULATOR	1
11	286-6827-01 276-0026-01 276-0027-01 276-0028-01	SETPLATE(B-A) SETPLATE(K-A) SETPLATE(K-B) SETPLATE(K-C)	1	59	855-5436-50	RCA PIN CORD	1
12	311-1921-00	LOWER CASE	1	60	353-0585-00	SHADE	2
13	331-4174-00	MECH-CVR	1	61	-----	SUB PWB	1
14	331-4175-00	MECH-BRKT	1	62	074-2001-64	OUTLET SOCKET	1
15	331-4176-00	HEAT SINK CVR	1	63	074-2001-62	OUTLET SOCKET	1
16	331-3884-01	LCD BRKT	1	64	880-2091D	TUNER	1
17	335-7163-10	SIDE-CVR(L)	1	65	347-7283-00	FILM	1
18	335-7164-10	SIDE-CVR(R)	1	66	074-1289-80	OUTLET SOCKET(30PDVD)	1
19	345-3799-20	RCA CAP	1	67	074-0881-17	OUTLET SOCKET	1
20	345-5470-00	RUBBER PART	1	68	060-0100-50	BUZZER	1
21	347-6085-00	DOUBLE FACE	2	69	074-1194-00	OUTLET SOCKET	1
22	331-4177-00	FPC-CVR(SIDE)	1	70	074-1214-00	OUTLET SOCKET	1
23	347-7038-00	SPACER	2	71	075-0385-00	JACK	1
24	347-7260-00	INSULATOR	1	72	076-0349-02	PLUG	2
25	331-4173-00	FPC COVER	1	73	076-0353-17	PLUG	1
26	347-7262-01	INSULATOR	1	74	076-0714-20	PLUG	1
27	347-7739-00	DOUBLE FACE	1	75	313-1970-00	HEAT SINK(TR)	1
28	347-8029-00	INSULATOR	1	76	313-1905-00	HEAT SINK(POWER IC)	1
29	347-8028-00	SHADE	1	77	074-1205-93	OUTLET SOCKET	1
30	347-7282-00	FILM	1	78	331-4178-00	IC-HOLDER	1
31	347-7300-00	INSULATOR	1	79	331-3850-00	CONECTOR HOLDER	1
32	347-7301-00	FILM	2	80	331-4179-00	IC HOLDER(POWER IC)	1
33	347-7302-00	DOUBLE FACE	1	81	331-4180-00	CONNECTOR HOLD	1
34	347-8030-00	PROTECT SHEET	1	82	331-4182-00	SHIELD CVR	1
35	347-8031-00	PROTECT SHEET	1	83	074-2001-64	OUTLET SOCKET	1
36	379-0468-00	TFT	1	84	331-4311-00	BACK-CVR	1
37	347-8032-00	PROTECT SHEET	1	85	347-7285-00	SPACER(FPC)	1
38	714-2605-8B	MACHINE SCREW(M2.6 x5)	11	86	-----	MAIN PWB	1
39	714-5008-4B	MACHINE SCREW(M5 x8)	2	87	714-2606-8B	MACHINE SCREW(M2.6 x6)	4
40	716-0872-61	PAD SCREW(M1.7 x6 BLK)	7	88	731-2612-8B	TAPTIGHT	2
41	716-0878-50	IT SCREW(M2.6 x5)	4	89	816-3013-50	FLAT WIRE(14P L65)	1
42	331-4231-00	EARTH PLATE	2	90	074-2011-70	OUTLET SOCKET(20P)	1
43	716-1816-50	IT SCREW(M2 x4)	2	91	714-3005-8B	MACHINE SCREW(M3 x5)	1
44	731-2608-8A	TAPTIGHT	4	92	074-1171-10	OUTLET SOCKET	1
45	331-3946-00	COVER PLATE	1	93	331-4181-00	SHIELD CVR(R)	1
46	039-2792-00	FPC(DVD-MECH)	1	94	074-4020-00	OUTLET SOCKET(ANT)	1
47	816-2650-00	FLAT WIRE(14P L39)	1	95	092-2226-00	ANT-RECEPT	1
48	780-2612-50	SCREW(M2.6 x12)	2	96	331-4199-00	SHIELD CVR	1
				97	074-2001-95	OUTLET SOCKET(45)	2
				98	074-1138-54	OUTLET SOCKET(4P)	1

NO.	PART NO.	DESCRIPTION	Q'TY
99	074-2001-80	OUTLET SOCKET	1
100	076-0568-00	PLUG(2P)	1
101	074-1189-85	OUTLET SOCKET(35P)	1

NO.	PART NO.	DESCRIPTION	Q'TY
102	074-2001-64	OUTLET SOCKET(14P)	1
103	074-2001-70	OUTLET SOCKET(20P)	1
104	-----	LCD PWB	


Inner Escutcheon section

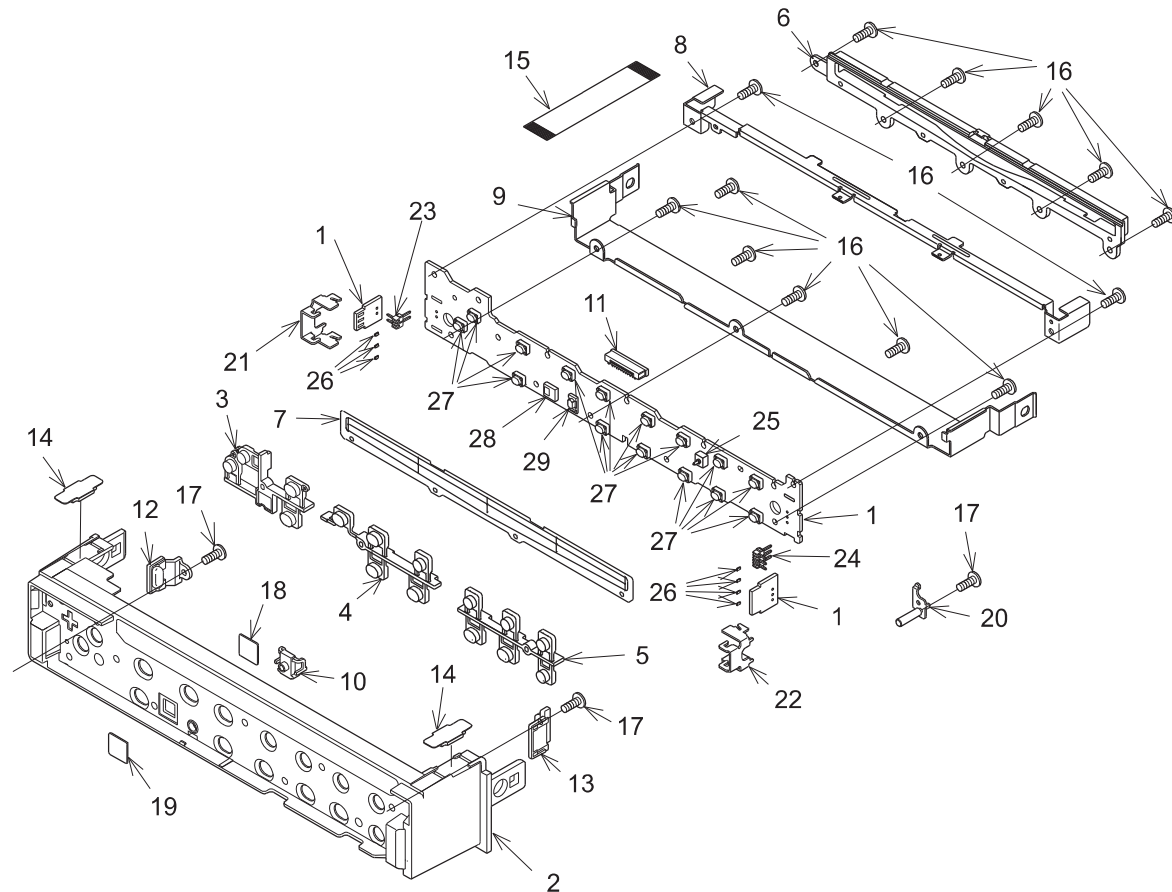

NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	SW PWB	1
2	370-6924-00	ESCUTCHEON(INNER)	1
3	382-7862-00	INNER-BUTTON(L)	1
4	382-7863-00	INNER-BUTTON(M)	1
5	382-7864-00	INNER-BUTTON(R)	1
6	335-7788-00	DISC GUIDE	1
7	346-0200-00	LEATHER SHEET	1
8	331-4168-00	DISCGUIDE PLATE	1
9	331-4169-00	ES-PLATE	1
10	382-7865-00	RESET BUTTON	1
11	074-1289-70	OUTLET SOCKET(20P)	1
12	335-7791-00	LED HOLDER(L)	1
13	335-7789-00	LED HOLDER(R)	1
14	347-7854-00	SLIDER	2
15	816-3012-50	FLAT WIRE(20P)	1

NO.	PART NO.	DESCRIPTION	Q'TY
16	716-0872-51	PAD SCREW(M1.7 x5)	13
17	716-0872-21	PAD SCREW(M1.7 x4)	3
18	624-0016-00	MAGNET	1
19	335-7787-00	IR PLATE	1
20	946-0088-00	MAGNET PLATE ASSY	1
21	331-4170-00	LED COVER(L)	1
22	331-4171-00	LED COVER(R)	1
23	076-0708-02	PLUG(2P)	1
24	076-2010-03	PLUG(3P)	1
25	013-7411-51	SWITCH	1
26	001-7097-90	DIODE(CL-194S-W)	7
27	013-6312-50	SWITCH	15
28	060-4017-90	IR-RECIEVER	1
29	013-6513-50	LUMI-SWITCH	1

DCP section

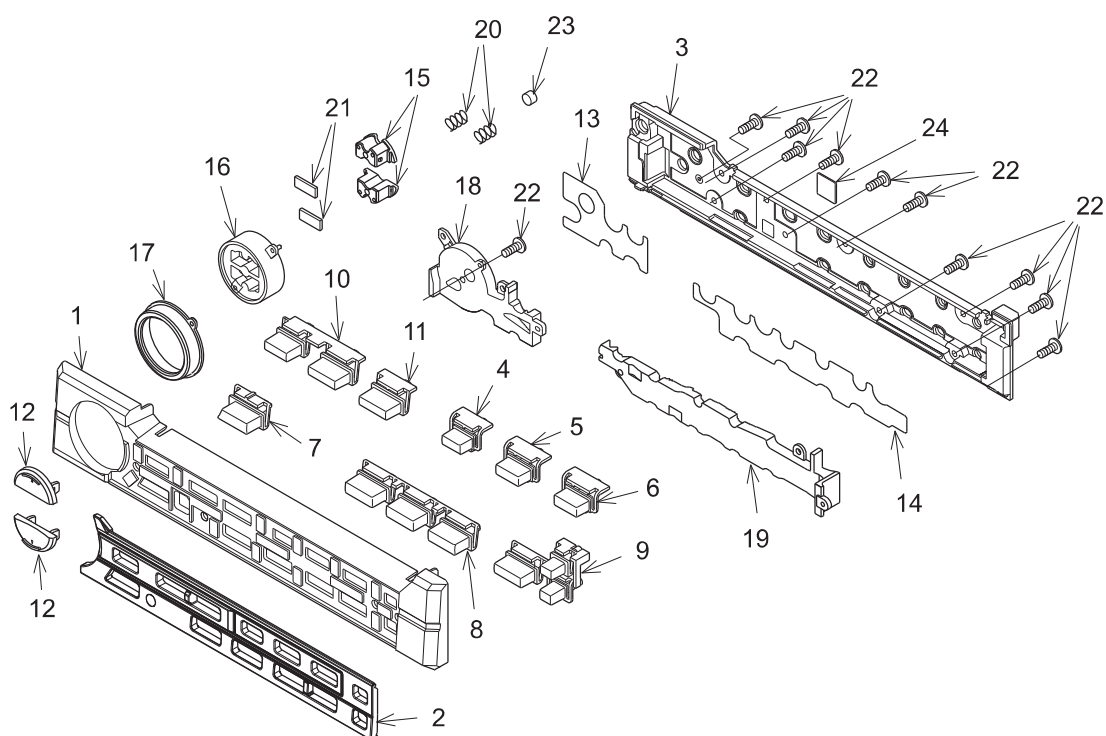

NO.	PART NO.	DESCRIPTION	Q'TY
1	370-6923-00	ESCUTCHEON(F)	1
2	373-1102-00 373-1102-01	DIAL-CVR(B-A) DIAL-CVR(K-A,K-B,K-C)	1
3	335-7781-00	REAR-CVR	1
4	382-7852-00	BUTTON(IPOD)	1
5	382-7853-00	BUTTON(TOP)	1
6	382-7854-00	BUTTON(CONT)	1
7	382-7855-00	BUTTON(SRC)	1
8	382-7856-00	BUTTON(BND/ADJ/M)	1
9	382-7857-00	BUTTON(ISR/OP/EJ)	1
10	382-7858-00	BUTTON(MUTE/DOWN)	1
11	382-7859-00	BUTTON(T-UP)	1
12	382-7860-00	BUTTON(VOL)	2

NO.	PART NO.	DESCRIPTION	Q'TY
13	347-8023-00	REFLECTOR(L)	1
14	347-8024-00	REFLECTOR(R)	1
15	335-7782-00	BUTTON HOLDER(VOL)	2
16	335-7783-00	RING PLATE	1
17	335-7784-00	RING COVER	1
18	335-7785-00	ILLUMI PLATE(L)	1
19	335-7786-00	ILLUMI PLATE(R)	1
20	750-6816-00	SPRING	2
21	347-8022-00	DOUBLE FACE(VOL)	2
22	716-0872-61	PAD SCREW(M1.7x6 BLK)	11
23	354-7593-00	MAGNET	1
24	335-7787-00	IR PLATE	1

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note)Some parts depend on each model.The model name is specified in the description .

(B-A;QC-6823B-A, K-A;PF-QC-6823K-A, K-B;QC-6823K-B , K-C;QC-6823K-C)

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
ANT101	092-2226-00	ANT-RECEPT	C173	166-1011-50	100pF CH	C258	043-0264-56	270pF
BL101	880-2091D	AM/FM TUNER	C174	168-2232-55	0.022uF K	C259	166-2701-50	27pF CH
C101	166-2201-50	22pF CH	C175	168-2232-55	0.022uF K	C260	043-0541-00	6.3V 22uF
C102	166-1511-50	150pF CH	C178	168-2232-55	0.022uF K	C262	043-0264-56	270pF
C104	168-1032-55	0.01uF K	C181	166-1007-50	10pF CH	C263	166-2701-50	27pF CH
C105	042-0643-51	16V 100uF	C182	166-1007-50	10pF CH	C265	043-0541-00	6.3V 22uF
C106	168-2232-55	0.022uF K	C184	168-1022-55	1000pF K	C266	043-0264-56	270pF
C107	166-1011-50	100pF CH	C185	168-1022-55	1000pF K	C267	166-2701-50	27pF CH
C108	168-1022-55	1000pF K	C186	168-1042-78	16V 0.1uF	C268	043-0541-00	6.3V 22uF
C109	168-1042-78	16V 0.1uF	C187	166-1011-50	100pF CH	C269	043-0264-56	270pF
C110	168-1042-78	16V 0.1uF	C188	163-4753-55	35V 4.7uF	C270	166-2701-50	27pF CH
C111	042-0560-84	16V 470uF	C189	168-1042-78	16V 0.1uF	C271	168-1032-55	0.01uF K
C112	043-0540-00	6.3V 10uF	C190	168-1022-55	1000pF K	C272	043-0541-00	6.3V 22uF
C113	043-0540-00	6.3V 10uF	C191	168-1022-55	1000pF K	C273	043-0264-56	270pF
C114	043-0540-00	6.3V 10uF	C192	163-4753-55	35V 4.7uF	C274	166-2701-50	27pF CH
C115	043-0540-00	6.3V 10uF	C193	168-1042-78	16V 0.1uF	C275	043-0541-00	6.3V 22uF
C116	168-1042-78	16V 0.1uF	C194	166-1811-50	180pF CH	C276	043-0264-56	270pF
C117	043-0540-00	6.3V 10uF	C195	168-1045-56	0.1uF Z	C277	166-2701-50	27pF CH
C118	043-0540-00	6.3V 10uF	C196	163-4753-55	35V 4.7uF	C280	168-1032-55	0.01uF K
C119	043-0540-00	6.3V 10uF	C197	042-0619-51	6.3V 56uF	C281	042-0592-58	16V 10uF
C120	166-1011-50	100pF CH	C198	168-1042-78	16V 0.1uF	C282	042-0592-58	16V 10uF
C121	166-1011-50	100pF CH	C199	168-1042-78	16V 0.1uF	C283	042-0592-58	16V 10uF
C122	178-1052-78	1uF	C201	168-1022-55	1000pF K	C284	042-0592-58	16V 10uF
C123	042-0592-58	16V 10uF	C202	043-0540-00	6.3V 10uF	C285	178-2242-78	0.22uF
C126	168-1042-78	16V 0.1uF	C203	168-1022-55	1000pF K	C286	178-2242-78	0.22uF
C127	042-0592-58	16V 10uF	C204	168-1022-55	1000pF K	C287	178-2242-78	0.22uF
C128	168-1042-78	16V 0.1uF	C205	043-0540-00	6.3V 10uF	C288	178-2242-78	0.22uF
C129	042-0595-84	10V 100uF	C206	043-0540-00	6.3V 10uF	C301	168-1042-78	16V 0.1uF
C130	168-1045-56	0.1uF Z	C207	168-1022-55	1000pF K	C302	168-1042-78	16V 0.1uF
C131	163-4753-55	35V 4.7uF	C208	168-1022-55	1000pF K	C304	042-0592-58	16V 10uF
C132	168-4712-55	470pF K	C209	043-0540-00	6.3V 10uF	C306	168-1042-78	16V 0.1uF
C133	168-4712-55	470pF K	C210	163-2273-25	10V 220uF	C307	042-0423-97	16V 10uF
C134	168-4712-55	470pF K	C211	043-0540-00	6.3V 10uF	C308	168-1042-78	16V 0.1uF
C135	168-4712-55	470pF K	C212	168-1022-55	1000pF K	C310	042-0423-20	10V 10uF
C136	168-1042-78	16V 0.1uF	C213	168-4712-55	470pF K	C311	168-1042-78	16V 0.1uF
C137	168-1045-56	0.1uF Z	C214	168-4712-55	470pF K	C312	042-0423-20	10V 10uF
C138	163-1073-15	6.3V 100uF	C215	043-0540-00	6.3V 10uF	C313	168-1042-78	16V 0.1uF
C139	163-2263-35	16V 22uF	C217	168-4712-55	470pF K	C314	042-0423-20	10V 10uF
C140	168-4735-56	0.047uF Z	C218	168-4712-55	470pF K	C316	168-1042-78	16V 0.1uF
C141	043-0540-00	6.3V 10uF	C219	043-0540-00	6.3V 10uF	C317	168-1045-56	0.1uF Z
C142	043-0540-00	6.3V 10uF	C221	168-4712-55	470pF K	C318	042-0630-50	16V 100uF
C143	166-4701-50	47pF CH	C222	168-4712-55	470pF K	C319	042-0630-50	16V 100uF
C144	166-4701-50	47pF CH	C223	043-0540-00	6.3V 10uF	C320	168-1042-78	16V 0.1uF
C145	168-1042-78	16V 0.1uF	C225	168-4712-55	470pF K	C322	042-0643-51	16V 100uF LOW-ESR
C146	166-1011-50	100pF CH	C226	168-4712-55	470pF K	C324	042-0643-51	16V 100uF LOW-ESR
C147	043-0540-00	6.3V 10uF	C227	043-0540-00	6.3V 10uF	C325	042-0643-51	16V 100uF LOW-ESR
C148	043-0540-00	6.3V 10uF	C229	168-6812-55	680pF K	C326	168-1045-56	0.1uF Z
C149	043-0540-00	6.3V 10uF	C230	168-6812-55	680pF K	C327	178-1052-78	1uF
C150	166-1011-50	100pF CH	C231	043-0540-00	6.3V 10uF	C328	178-1052-78	1uF
C153	166-1011-50	100pF CH	C233	168-6812-55	680pF K	C329	178-1052-78	1uF
C154	178-1052-78	1uF	C234	168-6812-55	680pF K	C330	178-1052-78	1uF
C155	168-1045-56	0.1uF Z	C235	043-0540-00	6.3V 10uF	C331	178-1052-78	1uF
C156	166-1011-50	100pF CH	C237	168-6812-55	680pF K	C332	178-1052-78	1uF
C157	168-1042-78	16V 0.1uF	C238	168-6812-55	680pF K	C333	168-1032-55	0.01uF K
C158	042-0560-84	16V 470uF	C239	043-0540-00	6.3V 10uF	C334	178-1052-78	1uF
C159	168-1045-56	0.1uF Z	C241	168-6812-55	680pF K	C335	168-1032-55	0.01uF K
C160	042-0619-51	6.3V 56uF	C242	168-6812-55	680pF K	C336	163-4763-35	16V 47uF
C161	168-1045-56	0.1uF Z	C243	042-0592-58	16V 10uF	C337	163-4763-15	6.3V 47uF
C162	042-0423-20	10V 10uF	C244	168-1042-78	16V 0.1uF	C338	166-3096-50	3pF CJ
C163	168-3335-56	0.033uF Z	C245	042-0592-58	16V 10uF	C339	163-4763-15	6.3V 47uF
C164	168-3322-55	3300pF K	C246	168-1042-78	16V 0.1uF	C340	163-4763-15	6.3V 47uF
C165	168-3322-55	3300pF K	C247	043-0541-00	6.3V 22uF	C341	168-1042-78	16V 0.1uF
C166	168-1045-56	0.1uF Z	C249	043-0264-56	270pF	C342	163-1073-35	16V 100uF
C167	163-1073-15	6.3V 100uF	C250	166-2701-50	27pF CH	C343	042-0643-52	6.3V 1000uF
C168	168-3322-55	3300pF K	C251	043-0541-00	6.3V 22uF	C344	168-4712-55	470pF K
C169	168-3322-55	3300pF K	C253	043-0264-56	270pF			
C170	168-2232-55	0.022uF K	C254	166-2701-50	27pF CH			
C171	168-4712-55	470pF K	C256	043-0541-00	6.3V 22uF			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C345	168-4712-55	470pF K	C490	168-1022-55	1000pF K	CCT419	050-0140-75	1/32W 330 ohm X4j
C401	168-1042-78	16V 0.1uF	C501	043-0540-00	6.3V 10uF	CCT420	050-0140-75	1/32W 330 ohm X4j
C402	043-0540-00	6.3V 10uF	C502	168-1042-78	16V 0.1uF	CCT421	050-0140-63	1/32W 47k ohm x4J
C403	043-0540-00	6.3V 10uF	C503	043-0540-00	6.3V 10uF	CCT422	050-0140-63	1/32W 47k ohm x4J
C404	168-1042-78	16V 0.1uF	C504	168-1042-78	16V 0.1uF	CCT505	050-0140-52	1/32W 100 ohm x4J
C405	168-1042-78	16V 0.1uF	C505	043-0551-90	6.3V 4.7uF M	CCT506	050-0140-52	1/32W 100 ohm x4J
C406	168-1042-78	16V 0.1uF	C506	166-1801-50	18pF CH	CCT507	050-0140-52	1/32W 100 ohm x4J
C407	168-4722-55	4700pF K	C507	166-2201-50	22pF CH	CCT508	050-0140-52	1/32W 100 ohm x4J
C408	166-2211-50	220pF CH	C508	166-1011-50	100pF CH	D101	001-0517-90	1SS355
C409	168-1042-78	16V 0.1uF	C509	168-1042-78	16V 0.1uF	D102	001-0517-90	1SS355
C410	043-0540-00	6.3V 10uF	C510	168-1042-78	16V 0.1uF	D103	001-0517-90	1SS355
C411	168-1042-78	16V 0.1uF	C511	178-1052-78	1uF	D104	001-0529-21	MA8039-H
C412	166-1007-50	10pF CH	C512	166-1011-50	100pF CH	D201	001-0529-29	MA8051-M
C413	166-1007-50	10pF CH	C513	168-1032-55	0.01uF K	D202	001-0517-90	1SS355
C414	166-1011-50	100pF CH	C514	168-1032-55	0.01uF K	D203	001-0517-90	1SS355
C415	168-1042-78	16V 0.1uF	C515	168-1022-55	1000pF K	D204	001-0529-44	MA8082-M
C416	168-1042-78	16V 0.1uF	C516	178-1052-78	1uF	D301	001-0517-90	1SS355
C417	168-1042-78	16V 0.1uF	C517	168-1042-78	16V 0.1uF	D302	001-0517-90	1SS355
C418	168-1042-78	16V 0.1uF	C518	168-1022-55	1000pF K	D303	001-0517-90	1SS355
C421	168-1042-78	16V 0.1uF	C519	178-1052-78	1uF	D304	001-1305-90	DAN217U-T106
C422	168-1042-78	16V 0.1uF	C521	042-1596-00	5.5V0.33F	D305	001-1305-90	DAN217U-T106
C423	043-0540-00	6.3V 10uF	C523	163-4763-15	6.3V 47uF	D306	001-1305-90	DAN217U-T106
C424	168-1042-78	16V 0.1uF	C605	178-4742-78	0.47uF	D501	001-0529-43	MA8082-L
C425	168-1042-78	16V 0.1uF	C606	042-0592-58	16V 10uF	D601	001-0592-00	RM4Z
C426	168-1042-78	16V 0.1uF	C607	163-1053-65	50V 1uF	D602	001-0517-90	1SS355
C427	168-1042-78	16V 0.1uF	C608	178-1052-78	1uF	D603	001-0517-90	1SS355
C428	043-0540-00	6.3V 10uF	C609	042-1545-00	16V2200uF	D604	001-0517-90	1SS355
C429	168-1042-78	16V 0.1uF	C610	172-2241-11	0.22uF	D605	001-0517-90	1SS355
C430	043-0540-00	6.3V 10uF	C611	168-1022-55	1000pF K	D606	001-0517-90	1SS355
C431	168-1042-78	16V 0.1uF	C612	168-1022-55	1000pF K	D607	001-2403-90	M1F60
C432	168-1042-78	16V 0.1uF	C613	168-1022-55	1000pF K	D608	001-2403-90	M1F60
C433	166-1011-50	100pF CH	C614	168-1022-55	1000pF K	D609	001-2403-90	M1F60
C434	168-1042-78	16V 0.1uF	C615	168-1022-55	1000pF K	D610	001-2403-90	M1F60
C435	166-1011-50	100pF CH	C616	168-1022-55	1000pF K	D611	001-0517-90	1SS355
C436	043-0540-00	6.3V 10uF	C617	168-1022-55	1000pF K	D612	001-2403-90	M1F60
C437	176-2221-50	2200pF CH	C618	168-1022-55	1000pF K	D613	001-0517-90	1SS355
C438	168-2222-55	2200pF K	C619	168-1042-78	16V 0.1uF	D614	001-0517-90	1SS355
C439	168-1042-78	16V 0.1uF	C620	042-1545-00	16V2200uF	D615	001-0517-90	1SS355
C441	168-1042-78	16V 0.1uF	C621	042-0627-90	16V 100uF	D616	001-0517-90	1SS355
C450	168-1042-78	16V 0.1uF	C622	042-0635-51	16V 39uF	D617	001-0529-26	MA8047-M
C451	168-1042-78	16V 0.1uF	C623	168-1042-78	16V 0.1uF	D618	001-0504-47	HZS9B3L
C452	166-5601-50	56pF CH	C624	168-1042-78	16V 0.1uF	D619	001-0529-43	MA8082-L
C454	168-1042-78	16V 0.1uF	C625	042-0627-90	16V 100uF	D620	001-2403-90	M1F60
C455	168-1042-78	16V 0.1uF	C626	168-1032-55	0.01uF K	D621	001-0517-90	1SS355
C456	168-1042-78	16V 0.1uF	C627	168-1032-55	0.01uF K	F602	060-8023-58	3A
C457	043-0540-00	6.3V 10uF	C628	042-0643-51	16V 100uF	IC101	051-0350-93	NJM4558M
C458	168-1042-78	16V 0.1uF	C629	042-0643-56	16V 470uF M	IC102	051-0350-93	NJM4558M
C459	168-1042-78	16V 0.1uF	C630	042-0643-56	16V 470uF M	IC103	051-1905-91	AN77L05M
C460	168-1042-78	16V 0.1uF	C631	163-4763-35	16V 47uF	IC104	051-6706-10	SAF7730H/N116F
C461	168-1042-78	16V 0.1uF	C632	042-0416-57	10V 47uF M TAN	IC105	051-3246-90	BA033FP
C462	168-1042-78	16V 0.1uF	C633	168-1042-78	16V 0.1uF	IC201	051-6703-08	AK4384VT
C463	043-0532-50	10V 10uF	C634	178-3342-78	0.33uF	IC202	051-6703-08	AK4384VT
C464	043-0532-50	10V 10uF	C635	043-0561-90	0.1uF	IC203	051-3026-90	NJM4580V
C465	168-1042-78	16V 0.1uF	C636	163-3363-45	25V 33uF	IC204	051-3026-90	NJM4580V
C466	166-1201-50	12pF CH	C637	042-0595-84	10V 100uF	IC205	051-3026-90	NJM4580V
C467	168-1042-78	16V 0.1uF	C638	163-2263-35	16V 22uF	IC206	051-3026-90	NJM4580V
C468	178-1052-78	1uF	C639	168-4732-78	0.047uF K	IC301	051-7243-48	SN74AHCT1G08DCKR
C469	178-1052-78	1uF	C640	166-1011-50	100pF CH	IC302	051-3317-90	LM1086IS-ADJ
C470	178-1052-78	1uF	C641	166-1011-50	100pF CH	IC303	051-3317-90	LM1086IS-ADJ
C471	178-1052-78	1uF	C642	166-1011-50	100pF CH	IC304	051-3289-00	BA09ST
C472	178-1052-78	1uF	C643	168-1045-56	0.1uF Z	IC305	051-5306-90	MM1117XF
C473	178-1052-78	1uF	C644	043-0561-92	0.47uF	IC306	051-5306-90	MM1117XF
C474	178-1052-78	1uF	C645	178-1052-78	1uF	IC307	051-5336-90	MM1227XFBF
C475	178-1052-78	1uF	C646	172-2241-11	0.22uF	IC308	051-5326-90	TK15420MTL
C476	178-1052-78	1uF	CCT403	050-0140-75	1/32W 330 ohm X4j	IC401	051-6456-00	YGV629-VZ
C477	168-1042-78	16V 0.1uF	CCT408	050-0140-75	1/32W 330 ohm X4j	IC402	051-7509-90	SN74LV123APWR
C478	168-1042-78	16V 0.1uF	CCT411	050-0140-75	1/32W 330 ohm X4j	IC403	051-7269-08	SN74AHC2G53HDCTR
C479	168-1042-78	16V 0.1uF	CCT412	050-0140-75	1/32W 330 ohm X4j	IC405	052-7079-00	TC58FVM5B3AFTG65
C480	168-1042-78	16V 0.1uF	CCT413	050-0140-75	1/32W 330 ohm X4j	IC451	051-7221-18	TC7SH04FU
C484	168-1042-78	16V 0.1uF	CCT414	050-0140-75	1/32W 330 ohm X4j	IC452	051-7221-18	TC7SH04FU
C485	168-1042-78	16V 0.1uF	CCT415	050-0140-63	1/32W 47k ohm x4J	IC454	051-5336-90	MM1227XFBF
C486	168-1042-78	16V 0.1uF	CCT416	050-0140-63	1/32W 47k ohm x4J	IC455	051-7275-08	TC7W32FU TE12L
C487	166-5601-50	56pF CH	CCT417	050-0140-75	1/32W 330 ohm X4j	IC456	051-7221-18	TC7SH04FU
C488	178-1052-78	1uF	CCT418	050-0140-75	1/32W 330 ohm X4j	IC457	051-5342-90	NJM2524V

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC458	051-7275-08	TC7W32FU TE12L	Q104	190-1298-00	2SA1298	R117	119-4731-15	1/10W 47k ohm
IC501	052-7078-01	uPD703276YGJ-512UENA	Q105	125-2026-95	UN521N	R118	119-1831-15	1/10W 18k ohm
IC502	051-9402-68	BR93L56F-W	Q106	125-7005-90	PHK04P02T	R119	119-4731-15	1/10W 47k ohm
IC503	051-5440-08	S-80931CNMC-G81	Q201	193-1306-00	2SD1306	R120	119-1831-15	1/10W 18k ohm
IC504	051-3406-90	NJM2078M	Q202	193-1306-00	2SD1306	R121	119-4731-15	1/10W 47k ohm
IC505	051-5410-38	BU4820G-TR	Q203	193-1306-00	2SD1306	R122	119-1831-15	1/10W 18k ohm
IC601	051-2057-00	TB2906HQ	Q204	193-1306-00	2SD1306	R125	119-1031-15	1/10W 10k ohm
IC602	051-3294-90	TA78DS10F	Q205	193-1306-00	2SD1306	R127	119-0000-05	1/10W 0 ohm JW
IC603	051-3335-90	AN77L04M	Q206	193-1306-00	2SD1306	R128	119-1021-15	1/10W 1k ohm
IC604	051-1855-08	TC7W14F	Q207	193-1306-00	2SD1306	R129	119-1221-15	1/10W 1.2k ohm
IC605	051-6600-58	HA12187FP	Q208	193-1306-00	2SD1306	R130	119-1041-15	1/10W 100k ohm
J101	074-4020-00	ANT	Q209	125-0021-95	DTA143ZUA-T106	R131	119-1241-15	1/10W 120k ohm
J301	074-1289-80	30p	Q210	125-0021-95	DTA143ZUA-T106	R132	119-1031-15	1/10W 10k ohm
J302	075-0385-00	JACK	Q211	125-2026-95	UN521N	R133	119-2231-15	1/10W 22k ohm
J303	074-1205-93	43P	Q212	125-2026-95	UN521N	R134	119-1031-15	1/10W 10k ohm
J501	074-2011-70	20p	Q213	192-4081-00	2SC4081	R135	119-2231-15	1/10W 22k ohm
J502	074-2001-64	14P	Q214	192-4081-00	2SC4081	R136	119-2231-15	1/10W 22k ohm
J601	074-1214-00	16P	Q301	190-1736-00	2SA1736	R137	119-1031-15	1/10W 10k ohm
J602	076-0353-17	PLUG 17P	Q302	125-2026-95	UN521N	R138	119-2231-15	1/10W 22k ohm
J603	074-1171-10	10P DIN iPod	Q303	190-1736-00	2SA1736	R139	119-1031-15	1/10W 10k ohm
J604	074-1194-00	13P Ce-NET	Q304	125-2026-95	UN521N	R140	119-1001-15	1/10W 10 ohm
L101	010-2003-04	30uH COIL	Q305	190-1736-00	2SA1736	R141	119-1041-15	1/10W 100k ohm
L102	010-2279-50	4.7uH	Q306	125-2026-95	UN521N	R142	119-8231-15	1/10W 82k ohm
L103	010-2279-50	4.7uH	Q401	125-9025-90	HN1C01FU-TE85N	R143	119-8231-15	1/10W 82k ohm
L104	010-3105-62	1k ohm/100MHz	Q501	125-2026-91	UN5211	R144	119-1041-15	1/10W 100k ohm
L105	010-3105-62	1k ohm/100MHz	Q504	192-4081-00	2SC4081	R145	032-0140-89	1/10W 47k ohm F
L106	010-3105-62	1k ohm/100MHz	Q505	192-4081-00	2SC4081	R146	032-0140-89	1/10W 47k ohm F
L107	010-3105-62	1k ohm/100MHz	Q506	192-4081-00	2SC4081	R147	032-0140-89	1/10W 47k ohm F
L108	010-3109-63	1k ohm/100MHz	Q601	190-1298-00	2SA1298	R148	032-0140-89	1/10W 47k ohm F
L109	010-3105-62	1k ohm/100MHz	Q602	125-2026-95	UN521N	R149	032-0140-89	1/10W 47k ohm F
L110	010-3105-62	1k ohm/100MHz	Q603	101-1143-00	2SB1143	R150	032-0140-89	1/10W 47k ohm F
L111	010-3103-64	1.5k ohm/100MHz	Q604	190-1736-00	2SA1736	R151	032-0140-89	1/10W 47k ohm F
L112	010-3105-62	1k ohm/100MHz	Q605	125-2026-95	UN521N	R152	032-0140-89	1/10W 47k ohm F
L113	010-3105-62	1k ohm/100MHz	Q606	125-0021-95	DTA143ZUA-T106	R153	119-1041-15	1/10W 100k ohm
L201	010-2285-56	2.25k ohm/100MHz	Q607	125-0021-95	DTA143ZUA-T106	R155	119-1011-15	1/10W 100 ohm
L202	010-2285-56	2.25k ohm/100MHz	Q608	190-1736-00	2SA1736	R156	119-1011-15	1/10W 100 ohm
L203	010-2285-58	1k ohm/100MHz	Q609	125-2026-95	UN521N	R157	119-1011-15	1/10W 100 ohm
L204	010-2285-56	2.25k ohm/100MHz	Q610	190-1298-00	2SA1298	R158	119-4721-15	1/10W 4.7k ohm
L205	010-2285-56	2.25k ohm/100MHz	Q611	125-2026-91	UN5211	R159	119-4721-15	1/10W 4.7k ohm
L206	010-2285-58	1k ohm/100MHz	Q612	101-1143-00	2SB1143	R161	119-1001-15	1/10W 10 ohm
L207	010-3103-64	1.5k ohm/100MHz	Q613	190-1736-00	2SA1736	R162	119-1011-15	1/10W 100 ohm
L208	010-3103-64	1.5k ohm/100MHz	Q614	125-2026-95	UN521N	R163	119-4721-15	1/10W 4.7k ohm
L209	010-3103-64	1.5k ohm/100MHz	Q615	190-1736-00	2SA1736	R164	119-1011-15	1/10W 100 ohm
L210	010-3103-64	1.5k ohm/100MHz	Q616	125-2026-95	UN521N	R165	119-1011-15	1/10W 100 ohm
L211	010-3103-64	1.5k ohm/100MHz	Q617	192-4081-00	2SC4081	R166	119-1031-15	1/10W 10k ohm
L212	010-3103-64	1.5k ohm/100MHz	Q618	190-1576-00	2SA1576A	R167	119-1031-15	1/10W 10k ohm
L213	010-3103-64	1.5k ohm/100MHz	Q619	192-4081-00	2SC4081	R168	119-1031-15	1/10W 10k ohm
L214	010-3103-64	1.5k ohm/100MHz	Q620	190-1298-00	2SA1298	R169	119-1011-15	1/10W 100 ohm
L301	010-3103-50	1500 ohm/100MHz	Q621	125-2026-92	UN5212	R170	119-4721-15	1/10W 4.7k ohm
L302	010-3103-50	1500 ohm/100MHz	Q622	102-3420-50	2SC3420GR,BL	R171	119-1031-15	1/10W 10k ohm
L303	010-3103-50	1500 ohm/100MHz	Q623	198-0302-50	2SK302 Y,GR	R172	119-1011-15	1/10W 100 ohm
L305	010-3104-50	30 ohm/100MHz	Q624	190-1576-00	2SA1576A	R173	119-1011-15	1/10W 100 ohm
L306	010-3104-50	30 ohm/100MHz	Q625	125-2026-92	UN5212	R174	119-1031-15	1/10W 10k ohm
L307	010-3104-50	30 ohm/100MHz	Q626	125-2026-92	UN5212	R175	119-1011-15	1/10W 100 ohm
L308	010-3104-50	30 ohm/100MHz	Q627	125-2026-92	UN5212	R176	119-1011-15	1/10W 100 ohm
L309	010-3104-50	30 ohm/100MHz	Q628	125-2026-92	UN5212	R177	119-1031-15	1/10W 10k ohm
L310	010-3104-50	30 ohm/100MHz	Q629	190-1736-00	2SA1736	R178	119-1021-15	1/10W 1k ohm
L311	010-3104-50	30 ohm/100MHz	Q630	125-2026-95	UN521N	R201	119-1021-15	1/10W 1k ohm
L312	010-3406-66	NLV25 22uH J	Q631	125-2026-92	UN5212	R202	119-1011-15	1/10W 100 ohm
L401	010-3104-50	30 ohm/100MHz	R101	119-1041-15	1/10W 100k ohm	R203	119-2711-15	1/10W 270 ohm
L402	010-2279-50	4.7uH	R102	119-1011-15	1/10W 100 ohm	R204	119-2711-15	1/10W 270 ohm
L403	010-3104-50	30 ohm/100MHz	R104	119-0000-05	1/10W 0 ohm JW	R205	119-2711-15	1/10W 270 ohm
L404	010-2279-50	4.7uH	R105	119-0000-05	1/10W 0 ohm JW	R206	119-1011-15	1/10W 100 ohm
L405	010-3104-50	30 ohm/100MHz	R106	119-1031-15	1/10W 10k ohm	R207	119-2711-15	1/10W 270 ohm
L406	010-3104-50	30 ohm/100MHz	R107	119-1031-15	1/10W 10k ohm	R208	119-2711-15	1/10W 270 ohm
L407	010-3104-50	30 ohm/100MHz	R108	119-1031-15	1/10W 10k ohm	R209	119-2711-15	1/10W 270 ohm
L501	010-2279-50	4.7uH	R109	119-1021-15	1/10W 1k ohm	R210	116-6801-15	1/4W 68 ohm
L502	010-2279-50	4.7uH	R110	119-1031-15	1/10W 10k ohm	R211	119-1031-15	1/10W 10k ohm
P201	076-0714-20	20P	R111	119-1021-15	1/10W 1k ohm	R212	119-1031-15	1/10W 10k ohm
P301	076-0349-02	2P	R112	119-2231-15	1/10W 22k ohm	R213	119-4731-15	1/10W 47k ohm
P601	076-0349-02	2P	R113	119-2231-15	1/10W 22k ohm	R214	119-1831-15	1/10W 18k ohm
Q102	190-1298-00	2SA1298	R114	119-1011-15	1/10W 100 ohm	R215	119-1031-15	1/10W 10k ohm
Q103	125-2026-95	UN521N	R115	119-4731-15	1/10W 47k ohm	R216	119-1031-15	1/10W 10k ohm
			R116	119-1831-15	1/10W 18k ohm	R217	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R218	119-4731-15	1/10W 47k ohm
R219	119-1831-15	1/10W 18k ohm
R220	119-1031-15	1/10W 10k ohm
R221	119-1031-15	1/10W 10k ohm
R222	119-1031-15	1/10W 10k ohm
R223	119-4731-15	1/10W 47k ohm
R224	119-1831-15	1/10W 18k ohm
R225	119-1031-15	1/10W 10k ohm
R226	119-1031-15	1/10W 10k ohm
R227	119-1031-15	1/10W 10k ohm
R228	119-4731-15	1/10W 47k ohm
R229	119-1831-15	1/10W 18k ohm
R230	119-1031-15	1/10W 10k ohm
R231	119-1031-15	1/10W 10k ohm
R232	119-1031-15	1/10W 10k ohm
R233	119-4731-15	1/10W 47k ohm
R234	119-1231-15	1/10W 12k ohm
R235	119-1031-15	1/10W 10k ohm
R236	119-1031-15	1/10W 10k ohm
R237	119-1031-15	1/10W 10k ohm
R238	119-4731-15	1/10W 47k ohm
R239	119-1231-15	1/10W 12k ohm
R240	119-1031-15	1/10W 10k ohm
R241	119-1031-15	1/10W 10k ohm
R242	119-1031-15	1/10W 10k ohm
R243	119-4731-15	1/10W 47k ohm
R244	119-1231-15	1/10W 12k ohm
R245	119-1031-15	1/10W 10k ohm
R246	119-1031-15	1/10W 10k ohm
R247	119-1031-15	1/10W 10k ohm
R248	119-4731-15	1/10W 47k ohm
R249	119-1231-15	1/10W 12k ohm
R250	119-1031-15	1/10W 10k ohm
R251	119-2231-15	1/10W 22k ohm
R252	119-3311-15	1/10W 330 ohm
R253	119-1021-15	1/10W 1k ohm
R254	119-1041-15	1/10W 100k ohm
R255	119-2231-15	1/10W 22k ohm
R256	119-3311-15	1/10W 330 ohm
R257	119-1021-15	1/10W 1k ohm
R258	119-1041-15	1/10W 100k ohm
R259	119-2231-15	1/10W 22k ohm
R260	119-3311-15	1/10W 330 ohm
R261	119-1021-15	1/10W 1k ohm
R262	119-1041-15	1/10W 100k ohm
R263	119-2231-15	1/10W 22k ohm
R264	119-3311-15	1/10W 330 ohm
R265	119-1021-15	1/10W 1k ohm
R266	119-1041-15	1/10W 100k ohm
R267	119-2231-15	1/10W 22k ohm
R268	119-3311-15	1/10W 330 ohm
R269	119-1021-15	1/10W 1k ohm
R270	119-1041-15	1/10W 100k ohm
R271	119-2231-15	1/10W 22k ohm
R272	119-3311-15	1/10W 330 ohm
R273	119-1021-15	1/10W 1k ohm
R274	119-1041-15	1/10W 100k ohm
R275	119-2231-15	1/10W 22k ohm
R276	119-3311-15	1/10W 330 ohm
R277	119-1021-15	1/10W 1k ohm
R278	119-1041-15	1/10W 100k ohm
R279	119-2231-15	1/10W 22k ohm
R280	119-3311-15	1/10W 330 ohm
R281	119-1021-15	1/10W 1k ohm
R282	119-1041-15	1/10W 100k ohm
R291	119-1021-15	1/10W 1k ohm
R292	119-8221-15	1/10W 8.2k ohm
R293	119-1021-15	1/10W 1k ohm
R294	119-8221-15	1/10W 8.2k ohm
R295	119-1021-15	1/10W 1k ohm
R296	119-2231-15	1/10W 22k ohm
R297	119-1021-15	1/10W 1k ohm
R298	119-2231-15	1/10W 22k ohm
R302	119-2211-15	1/10W 220 ohm

REF No.	PART No.	DESCRIPTION
R303	119-1031-15	1/10W 10k ohm
R304	119-3311-15	1/10W 330 ohm
R305	119-3311-15	1/10W 330 ohm
R306	119-1031-15	1/10W 10k ohm
R307	119-3311-15	1/10W 330 ohm
R308	119-3311-15	1/10W 330 ohm
R309	119-3311-15	1/10W 330 ohm
R310	119-3311-15	1/10W 330 ohm
R311	032-0140-66	1/10W 220 ohm F
R312	032-0140-98	1/10W 330 ohm F
R313	032-0140-13	1/10W 33 ohm F
R314	116-2211-15	1/4W 220 ohm
R315	032-0140-68	1/10W 680 ohm F
R316	032-0140-11	1/10W 300 ohm F
R317	119-0000-05	1/10W 0 ohm JW
R318	119-1031-15	1/10W 10k ohm
R319	119-4731-15	1/10W 47k ohm
R320	119-7501-15	1/10W 75 ohm
R321	119-7501-15	1/10W 75 ohm
R322	119-7501-15	1/10W 75 ohm
R323	119-2221-15	1/10W 2.2k ohm
R324	119-4721-15	1/10W 4.7k ohm
R325	119-2221-15	1/10W 2.2k ohm
R326	119-1011-15	1/10W 100 ohm
R327	119-4721-15	1/10W 4.7k ohm
R328	119-1031-15	1/10W 10k ohm
R329	119-1031-15	1/10W 10k ohm
R330	119-3901-15	1/10W 39 ohm
R331	119-7501-15	1/10W 75 ohm
R332	119-4731-15	1/10W 47k ohm
R333	119-1031-15	1/10W 10k ohm
R334	116-1221-15	1/4W 1.2k ohm
R335	116-1221-15	1/4W 1.2k ohm
R401	119-4731-15	1/10W 47k ohm
R402	119-1021-15	1/10W 1k ohm
R403	119-2021-15	1/10W 2k ohm
R404	119-4731-15	1/10W 47k ohm
R406	119-4731-15	1/10W 47k ohm
R407	119-4731-15	1/10W 47k ohm
R414	119-2721-15	1/10W 2.7k ohm
R421	119-1031-15	1/10W 10k ohm
R423	119-1051-15	1/10W 1M ohm
R426	119-2211-15	1/10W 220 ohm
R427	119-3311-15	1/10W 330 ohm
R428	119-2231-15	1/10W 22k ohm
R429	119-2231-15	1/10W 22k ohm
R430	119-2231-15	1/10W 22k ohm
R431	119-2231-15	1/10W 22k ohm
R433	119-3311-15	1/10W 330 ohm
R435	119-4731-15	1/10W 47k ohm
R436	119-4731-15	1/10W 47k ohm
R437	119-3311-15	1/10W 330 ohm
R438	032-0140-72	1/10W 470 ohm F
R439	032-0140-23	1/10W 68 ohm F
R440	119-2211-15	1/10W 220 ohm
R441	119-2211-15	1/10W 220 ohm
R442	119-4731-15	1/10W 47k ohm
R445	032-0140-23	1/10W 68 ohm F
R446	119-4731-15	1/10W 47k ohm
R450	119-1031-15	1/10W 10k ohm
R451	119-1031-15	1/10W 10k ohm
RR456	119-4731-15	1/10W 47k ohm
R463	119-4731-15	1/10W 47k ohm
R464	119-3311-15	1/10W 330 ohm
R465	119-0000-05	1/10W 0 ohm JW
R466	119-1011-15	1/10W 100 ohm
R467	119-1021-15	1/10W 1k ohm
R468	119-2221-15	1/10W 2.2k ohm
R469	119-4731-15	1/10W 47k ohm
R471	119-1011-15	1/10W 100 ohm
R473	032-0140-12	1/10W 75 ohm F
R474	032-0140-12	1/10W 75 ohm F
R475	032-0140-12	1/10W 75 ohm F
R478	119-7501-15	1/10W 75 ohm

REF No.	PART No.	DESCRIPTION
R479	119-7501-15	1/10W 75 ohm
R480	119-7501-15	1/10W 75 ohm
R481	119-7501-15	1/10W 75 ohm
R482	119-1011-15	1/10W 100 ohm
R483	119-1011-15	1/10W 100 ohm
R484	119-4731-15	1/10W 47k ohm
R486	119-1011-15	1/10W 100 ohm
R487	119-2201-15	1/10W 22 ohm
R489	119-1011-15	1/10W 100 ohm
R504	119-4721-15	1/10W 4.7k ohm
R505	119-4721-15	1/10W 4.7k ohm
R506	119-4721-15	1/10W 4.7k ohm
R507	119-4721-15	1/10W 4.7k ohm
R508	119-1021-15	1/10W 1k ohm
R509	119-1041-15	1/10W 100k ohm
R510	119-1031-15	1/10W 10k ohm
R511	119-1031-15	1/10W 10k ohm
R512	119-1031-15	1/10W 10k ohm
R513	119-1031-15	1/10W 10k ohm
R514	119-4711-15	1/10W 470 ohm
R515	119-1031-15	1/10W 10k ohm
R516	119-2231-15	1/10W 22k ohm
R518	119-1031-15	1/10W 10k ohm
R519	119-1031-15	1/10W 10k ohm
R520	119-1031-15	1/10W 10k ohm
R521	119-1021-15	1/10W 1k ohm
R522	119-1031-15	1/10W 10k ohm
R523	119-1031-15	1/10W 10k ohm
R524	119-1021-15	1/10W 1k ohm
R525	119-1041-15	1/10W 100k ohm
R529	119-1031-15	1/10W 10k ohm
R530	119-1031-15	1/10W 10k ohm
R531	119-1031-15	1/10W 10k ohm (B-A,K-B)
R532	119-1031-15	1/10W 10k ohm (K-A,C)
R533	119-1031-15	1/10W 10k ohm
R535	119-1031-15	1/10W 10k ohm (K-A,C)
R536	119-1031-15	1/10W 10k ohm (B-A,K-B)
R537	119-1031-15	1/10W 10k ohm
R538	119-1011-15	1/10W 100 ohm
R539	119-1021-15	1/10W 1k ohm
R540	119-1021-15	1/10W 1k ohm
R541	119-1031-15	1/10W 10k ohm
R543	119-4731-15	1/10W 47k ohm
R544	119-2231-15	1/10W 22k ohm
R545	119-1031-15	1/10W 10k ohm
R546	119-1031-15	1/10W 10k ohm
R547	119-1031-15	1/10W 10k ohm
R548	119-1031-15	1/10W 10k ohm
R549	119-1031-15	1/10W 10k ohm
R550	119-1031-15	1/10W 10k ohm
R551	119-1031-15	1/10W 10k ohm
R552	119-1031-15	1/10W 10k ohm
R553	119-1031-15	1/10W 10k ohm
R554	119-4741-15	1/10W 470k ohm
R555	032-0140-03	1/10W 220k ohm F
R556	032-0140-16	1/10W 180k ohm F
R557	119-1041-15	1/10W 100k ohm
R558	119-1041-15	1/10W 100k ohm
R559	119-1031-15	1/10W 10k ohm
R560	119-1041-15	1/10W 100k ohm
R561	119-1031-15	1/10W 10k ohm
R562	119-1041-15	1/10W 100k ohm
R563	032-0140-66	1/10W 220 ohm F
R564	032-0140-67	1/10W 3.3k ohm F
R565	119-1051-15	1/10W 1M ohm
R566	032-0140-03	1/10W 220k ohm F
R567	032-0140-52	1/10W 33k ohm F
R568	032-0140-56	1/10W 12k ohm F
R569	119-1041-15	1/10W 100k ohm
R570	119-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R571	119-1031-15	1/10W 10k ohm	R630	116-1591-15	1/4W 1.5 ohm	R657	032-0176-06	1/3W 220 ohm J
R572	119-1011-15	1/10W 100 ohm	R631	116-1591-15	1/4W 1.5 ohm	R659	119-3321-15	1/10W 3.3k ohm
R573	119-1011-15	1/10W 100 ohm	R632	116-1591-15	1/4W 1.5 ohm	R660	116-6801-15	1/4W 68 ohm
R605	119-1031-15	1/10W 10k ohm	R633	116-1591-15	1/4W 1.5 ohm	R661	119-1001-15	1/10W 10 ohm
R606	119-4731-15	1/10W 47k ohm	R634	116-1591-15	1/4W 1.5 ohm	R681	119-1031-15	1/10W 10k ohm
R608	119-1031-15	1/10W 10k ohm	R635	119-3321-15	1/10W 3.3k ohm	R682	119-1031-15	1/10W 10k ohm
R609	116-1221-15	1/4W 1.2k ohm	R636	119-1031-15	1/10W 10k ohm	R683	119-1031-15	1/10W 10k ohm
R610	119-1001-15	1/10W 10 ohm	R637	119-3321-15	1/10W 3.3k ohm	R684	119-1031-15	1/10W 10k ohm
R611	119-1031-15	1/10W 10k ohm	R638	116-1591-15	1/4W 1.5 ohm	R685	119-2231-15	1/10W 22k ohm
R612	116-1221-15	1/4W 1.2k ohm	R639	032-0176-06	1/3W 220 ohm J	R686	119-2231-15	1/10W 22k ohm
R613	116-1221-15	1/4W 1.2k ohm	R640	032-0176-06	1/3W 220 ohm J	R687	119-2231-15	1/10W 22k ohm
R614	119-1031-15	1/10W 10k ohm	R641	119-1031-15	1/10W 10k ohm	R688	119-2231-15	1/10W 22k ohm
R615	119-1031-15	1/10W 10k ohm	R642	119-1531-15	1/10W 15k ohm	SUP101	060-0122-10	DSP-201M-S00B
R616	032-0140-50	1/10W 10k ohm F	R643	119-4721-15	1/10W 4.7k ohm	TH501	002-0315-00	TN10-3U153JT
R617	119-1031-15	1/10W 10k ohm	R644	119-4731-15	1/10W 47k ohm	TM301	073-0768-90	TERMINAL
R618	116-1521-15	1/4W 1.5k ohm	R645	119-1011-15	1/10W 100 ohm	TM601	073-0768-90	TERMINAL
R619	116-1521-15	1/4W 1.5k ohm	R646	119-1031-15	1/10W 10k ohm	VR401	012-6009-53	2.2k ohm B VR
R620	119-1031-15	1/10W 10k ohm	R647	119-4721-15	1/10W 4.7k ohm	VR451	012-6009-53	2.2k ohm B VR
R621	119-5611-15	1/10W 560 ohm	R648	032-0140-21	1/10W 549k ohm F	X101	061-3537-90	41.6MHz
R622	119-2201-15	1/10W 22 ohm	R649	119-4711-15	1/10W 470 ohm	X401	061-3554-90	9.5979MHz
R623	119-1031-15	1/10W 10k ohm	R650	119-1021-15	1/10W 1k ohm	X501	060-1541-90	3.14MHz
R624	032-0176-06	1/3W 220 ohm J	R651	119-1021-15	1/10W 1k ohm	X502	061-3522-90	32.768KHz
R625	116-1521-15	1/4W 1.5k ohm	R652	119-1031-15	1/10W 10k ohm	X503	060-0100-51	BUZZER
R626	119-1031-15	1/10W 10k ohm	R653	119-1031-15	1/10W 10k ohm	PWB	039-2867-01	PWB(WITHOUT COMPONENT)
R627	032-0176-06	1/3W 220 ohm J	R654	119-1021-15	1/10W 1k ohm			
R628	119-2231-15	1/10W 22k ohm	R655	119-1031-15	1/10W 10k ohm			
R629	116-1591-15	1/4W 1.5 ohm	R656	032-0176-06	1/3W 220 ohm J			

Sub PWB(B2) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C501	163-1073-35	16V 100uF	C588	178-1052-78	1uF	R501	119-4711-15	1/10W 470 ohm
C502	043-0561-90	0.1uF	C589	178-1052-78	1uF	R502	119-0000-05	1/10W 0 ohm JW
C503	043-0561-90	0.1uF	C590	042-0643-52	6.3V 1000uF	R555	119-1001-15	1/10W 10 ohm
C551	042-0643-50	35V 22uF	C591	042-0643-51	16V 100uF	R556	119-1841-15	1/10W 180k ohm
C552	042-0630-50	16V 100uF	D501	001-0529-32	MA8056-M	R557	119-6841-15	1/10W 680k ohm
C553	042-0643-57	16V 220uF	D502	001-0529-42	MA8075-H	R558	119-3931-15	1/10W 39k ohm
C554	042-0630-50	16V 100uF	D552	001-0516-90	MA111	R559	119-3311-15	1/10W 330 ohm
C555	042-0643-50	35V 22uF	D553	001-0516-90	MA111	R560	119-6841-15	1/10W 680k ohm
C556	168-1042-78	16V 0.1uF	D554	001-2628-90	RB160M-40	R561	119-2231-15	1/10W 22k ohm
C557	042-0643-51	16V 100uF	D555	001-0516-90	MA111	R562	119-2221-15	1/10W 2.2k ohm
C558	042-0560-58	16V 10uF	D556	001-0516-90	MA111	R575	119-1031-15	1/10W 10k ohm
C559	042-0643-55	35V 4.7uF	D575	001-0608-90	D1FS4	R576	119-1031-15	1/10W 10k ohm
C560	168-1022-55	1000pF K	D576	001-0507-90	DAP202K	R577	119-1031-15	1/10W 10k ohm
C561	168-2222-55	2200pF K	IC501	051-1014-00	TA7291P	R578	119-5631-15	1/10W 56k ohm
C562	042-0643-50	35V 22uF	IC502	051-1014-00	TA7291P	R579	119-1051-15	1/10W 1M ohm
C563	042-0630-50	16V 100uF	IC552	051-3913-90	NJM2368E	R580	119-1041-15	1/10W 100k ohm
C564	042-0630-50	16V 100uF	IC576	051-3924-90	MD1424R	R581	119-1031-15	1/10W 10k ohm
C565	042-0643-50	35V 22uF	J502	074-2001-62	12P	R582	119-3301-15	1/10W 33 ohm
C566	042-0643-50	35V 22uF	J503	074-2001-64	14P	R583	119-1001-15	1/10W 10 ohm
C567	042-0643-50	35V 22uF	J551	074-0881-17	17P	R584	032-0140-53	1/10W 2.2k ohm F
C575	043-0510-51	25V 10uF	L553	010-3057-90	100uH	R585	032-0164-50	0.1ohm F
C576	042-0643-56	16V 470uF M	L554	010-3057-90	100uH	R586	032-0164-50	0.1ohm F
C577	178-1052-78	1uF	L555	010-3406-74	NLV25 100uH J	R587	119-1031-15	1/10W 10k ohm
C578	168-1042-78	16V 0.1uF	L556	010-3406-74	NLV25 100uH J	R588	032-0140-56	1/10W 12k ohm F
C579	168-1042-78	16V 0.1uF	L557	010-3406-74	NLV25 100uH J	R589	032-0164-50	0.1ohm F
C580	168-4732-78	0.047uF K	L558	010-3406-74	NLV25 100uH J	R590	032-0164-50	0.1ohm F
C581	166-1021-50	1000pF CH	L576	010-3404-53	33uH	R591	032-0164-50	0.1ohm F
C582	168-1042-78	16V 0.1uF	L579	010-3041-90	10uH	R592	032-0164-50	0.1ohm F
C583	168-1022-55	1000pF K	Q501	125-2032-92	RN1302	R598	119-0000-05	1/10W 0 ohm JW
C584	166-1511-50	150pF CH	Q552	192-2873-00	2SC2873	T551	007-1168-90	TR11-A-S
C585	168-1042-78	16V 0.1uF	Q575	125-2032-93	RN1303	VR551	012-6009-52	1k ohm B VR
C586	168-2232-55	0.022uF K	Q576	190-1586-00	2SA1586 O,Y,G	PWB	039-2862-00	PWB(WITHOUT COMPONENT)
C587	042-0643-52	6.3V 1000uF	Q577	125-2032-93	RN1303			

LCD PWB(B3) section


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C701	043-0561-90	0.1uF	C859	178-1055-79	1uF	CCT801	050-0140-58	1/32W 470 ohm x4J
C703	168-1042-78	16V 0.1uF	C860	166-1021-50	1000pF CH	CCT802	050-0140-52	1/32W 100 ohm x4J
C704	042-0416-57	10V 47uF M TAN	C901	168-1032-55	0.01uF K	CCT901	050-0140-58	1/32W 470 ohm x4J
C705	168-1042-78	16V 0.1uF	C902	042-0416-54	16V 10uF M TAN	CCT902	050-0140-52	1/32W 100 ohm x4J
C706	042-0416-57	10V 47uF M TAN	C903	168-1045-56	0.1uF Z	CCT903	050-0140-52	1/32W 100 ohm x4J
C707	168-4712-55	470pF K	C904	166-1007-50	10pF CH	D701	001-1305-90	DAN217U-T106
C708	168-1042-78	16V 0.1uF	C905	166-4711-50	470pF CH	D702	001-1305-90	DAN217U-T106
C709	168-1042-78	16V 0.1uF	C906	168-1045-56	0.1uF Z	D703	001-1305-90	DAN217U-T106
C710	168-1022-55	1000pF K	C907	168-1045-56	0.1uF Z	D704	001-1305-90	DAN217U-T106
C711	168-1022-55	1000pF K	C908	168-1045-56	0.1uF Z	D941	001-4301-29	HZU 5.1B2
C712	168-1022-55	1000pF K	C909	168-6832-78	0.068uF K	D943	001-0516-90	MA111
C713	168-1022-55	1000pF K	C910	168-1032-55	0.01uF K	D944	001-4301-29	HZU 5.1B2
C714	168-1045-56	0.1uF Z	C911	168-1032-55	0.01uF K	D945	001-3218-90	1SV231
C715	168-1042-78	16V 0.1uF	C912	168-1032-55	0.01uF K	D961	001-0529-29	MA8051-M
C716	042-0416-57	10V 47uF M TAN	C913	168-1032-55	0.01uF K	D964	001-1315-90	NSM123TL-E
C801	178-1055-79	1uF	C914	168-1032-55	0.01uF K	D965	001-1315-90	NSM123TL-E
C802	178-1055-79	1uF	C915	168-1045-56	0.1uF Z	F701	060-8058-90	ERBSEOR75U
C803	178-1055-79	1uF	C916	042-0416-57	10V 47uF M TAN	FIL901	060-3118-50	FK2125T25
C804	178-1055-79	1uF	C917	168-1032-55	0.01uF K	IC701	052-7066-01	M30102M2-561FP
C805	168-1045-56	0.1uF Z	C918	168-1032-55	0.01uF K	IC801	051-7256-08	SN74AHCT1G32DCKR
C806	168-1045-56	0.1uF Z	C919	168-1032-55	0.01uF K	IC802	051-5313-10	IR3Y29BM
C807	042-0636-50	6.3V 100uF	C920	166-1801-50	18pF CH	IC803	051-7269-08	SN74AHC2G53HDCTR
C808	178-1055-79	1uF	C921	168-1032-55	0.01uF K	IC804	051-1292-90	NJM4565M-D
C809	166-5601-50	56pF CH	C922	168-1032-55	0.01uF K	IC901	051-7243-48	SN74AHCT1G08DCKR
C810	168-2232-55	0.022uF K	C923	168-1045-56	0.1uF Z	IC902	051-1964-18	TC7S14FU
C811	178-1055-79	1uF	C924	168-1045-56	0.1uF Z	IC903	051-1964-18	TC7S14FU
C812	178-1055-79	1uF	C925	042-0416-57	10V 47uF M TAN	IC904	051-6443-00	TC200G02AF-0104Z
C813	042-0423-20	10V 10uF	C926	042-0416-57	10V 47uF M TAN	IC941	051-3025-90	NJM2107F
C814	042-0397-55	6.3V 3.3uF TAN	C927	168-2242-58	0.22uF B	IC942	125-9023-90	TPCF8402TE85L,F
C815	168-1032-55	0.01uF K	C928	168-2242-58	0.22uF B	IC943	125-9023-90	TPCF8402TE85L,F
C816	168-1032-55	0.01uF K	C929	168-1045-56	0.1uF Z	IC944	051-3925-90	OZ9910ISN-T2
C817	168-1032-55	0.01uF K	C930	168-1045-56	0.1uF Z	J701	074-1189-85	35P
C818	168-1032-55	0.01uF K	C931	042-0416-57	10V 47uF M TAN	J702	074-2001-70	20P
C819	168-1032-55	0.01uF K	C932	042-0416-57	10V 47uF M TAN	J703	074-2001-64	14P
C820	168-1032-55	0.01uF K	C933	178-2255-79	2.2uF	J801	074-2001-95	45P
C821	042-0416-57	10V 47uF M TAN	C934	168-1032-55	0.01uF K	J901	074-2001-95	45P
C822	043-0504-50	10V 4.7uF	C935	166-1811-50	180pF CH	J902	074-1138-54	4P
C823	166-1201-50	12pF CH	C936	168-4722-55	4700pF K	J903	074-2001-80	30P
C824	166-8211-50	820pF	C937	168-2232-55	0.022uF K	L701	010-2279-50	4.7uH
C825	166-2201-50	22pF CH	C938	178-2255-79	2.2uF	L801	010-3407-66	NLV32 22uH J
C826	166-6811-50	680pF	C939	168-2232-55	0.022uF K	L802	010-3407-71	NLV32 56uH J
C827	166-5601-50	56pF CH	C940	168-1052-78	1uF	L803	010-3200-90	R-12T621B
C828	168-1032-55	0.01uF K	C941	168-1045-56	0.1uF Z	L901	010-3407-68	NLV32 33uH J
C829	168-1045-56	0.1uF Z	C942	168-1045-56	0.1uF Z	L902	010-3407-62	NLV32 10uH J
C830	168-1032-55	0.01uF K	C943	168-1042-78	16V 0.1uF	L903	010-3407-62	NLV32 10uH J
C831	168-4732-78	0.047uF K	C944	166-6811-50	680pF	L904	010-3407-62	NLV32 10uH J
C832	168-1032-55	0.01uF K	C945	168-1045-56	0.1uF Z	L941	010-3406-59	NLV25 5.6uH J
C833	168-1032-55	0.01uF K	C946	168-1045-56	0.1uF Z	L961	010-3059-90	Choke
C834	168-1032-55	0.01uF K	C947	168-1022-55	1000pF K	P701	076-0478-52	2P
C835	166-8201-50	82pF CH	C948	166-1011-50	100pF CH	P961	076-0568-00	2P
C836	168-1032-55	0.01uF K	C949	166-4701-50	47pF CH	Q701	125-2026-94	UN521M
C837	168-1052-78	1uF	C950	166-2096-50	2pF CK	Q702	125-2026-94	UN521M
C838	168-1032-55	0.01uF K	C951	168-1045-56	0.1uF Z	Q703	125-0020-94	UN511M
C839	168-1032-55	0.01uF K	C952	043-0510-50	16V 22uF	Q704	125-0020-94	UN511M
C840	178-1055-79	1uF	C953	043-0549-50	3KV10PF	Q801	192-3326-00	2SC3326
C841	168-1052-78	1uF	C954	168-1032-55	0.01uF K	Q802	125-2026-91	UN5211
C842	168-1052-78	1uF	C958	168-1022-55	1000pF K	Q803	192-4116-00	2SC4116
C843	168-1032-55	0.01uF K	960	168-1032-55	0.01uF K	Q804	125-2026-91	UN5211
C844	042-0416-55	16V 15uF M TAN	C961	042-0636-51	16V 47uF	Q805	125-0020-91	UN5111
C845	168-1052-78	1uF	C962	168-1045-56	0.1uF Z	Q806	125-2026-91	UN5211
C846	042-0397-53	25V 0.47uF TAN	C963	042-0636-51	16V 47uF	Q807	190-1738-00	2SA1738
C847	168-1032-55	0.01uF K	C964	168-1045-56	0.1uF Z	Q808	192-3265-00	2SC3265 O,Y
C848	168-1045-56	0.1uF Z	C966	042-0416-57	10V 47uF M TAN	Q809	190-1298-00	2SA1298
C850	166-2096-50	2pF CK	C991	168-4712-55	470pF K	Q810	190-1298-00	2SA1298
C851	168-1045-56	0.1uF Z	C992	168-4712-55	470pF K	Q811	192-3265-00	2SC3265 O,Y
C852	042-0416-54	16V 10uF M TAN	C993	168-4712-55	470pF K	Q901	125-2026-90	UN521L
C853	168-1032-55	0.01uF K	C994	168-4712-55	470pF K	Q902	125-2026-90	UN521L
C854	042-0416-54	16V 10uF M TAN	CCT701	050-0140-58	1/32W 470 ohm x4J	Q903	125-2026-91	UN5211
C855	178-1055-79	1uF	CCT703	050-0140-57	1/32W 10k ohm x4J	Q941	192-4118-00	2SC4118
C856	178-1055-79	1uF	CCT704	050-0140-63	1/32W 47k ohm x4J	Q942	125-2032-92	RN1302
C857	168-1032-55	0.01uF K	CCT706	050-0140-54	1/32W 1k ohm x4J	Q961	125-0025-92	RN2302
C858	042-0416-54	16V 10uF M TAN	CCT707	050-0140-67	1/32W 220 ohm x4J	R701	119-2231-15	1/10W 22k ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R702	119-2231-15	1/10W 22k ohm	R836	119-1521-15	1/10W 1.5k ohm	R942	032-0140-55	1/10W 4.7k ohm F
R705	119-4711-15	1/10W 470 ohm	R837	032-0140-89	1/10W 47k ohm F	R943	032-0140-79	1/10W 2.7k ohm F
R706	119-4711-15	1/10W 470 ohm	R838	032-0140-99	1/10W 39k ohm F	R944	119-4731-15	1/10W 47k ohm
R707	119-6811-15	1/10W 680 ohm	R839	032-0140-89	1/10W 47k ohm F	R945	119-6831-15	1/10W 68k ohm
R709	119-1051-15	1/10W 1M ohm	R840	032-0140-52	1/10W 33k ohm F	R946	119-1531-15	1/10W 15k ohm
R710	119-3321-15	1/10W 3.3k ohm	R842	119-6811-15	1/10W 680 ohm	R947	119-1051-15	1/10W 1M ohm
R711	119-4731-15	1/10W 47k ohm	R843	119-1011-15	1/10W 100 ohm	R948	119-6831-15	1/10W 68k ohm
R712	119-2211-15	1/10W 220 ohm	R844	119-5621-15	1/10W 5.6k ohm	R949	119-3621-15	1/10W 3.6k ohm
R713	119-2211-15	1/10W 220 ohm	R845	119-2221-15	1/10W 2.2k ohm	R950	119-2031-15	1/10W 20k ohm
R801	119-4721-15	1/10W 4.7k ohm	R846	119-1011-15	1/10W 100 ohm	R951	119-1531-15	1/10W 15k ohm
R802	119-1021-15	1/10W 1k ohm	R847	119-1011-15	1/10W 100 ohm	R952	119-1821-15	1/10W 1.8k ohm
R803	119-4711-15	1/10W 470 ohm	R848	119-8221-15	1/10W 8.2k ohm	R953	119-3321-15	1/10W 3.3k ohm
R804	119-2211-15	1/10W 220 ohm	R849	032-0140-89	1/10W 47k ohm F	R954	119-1011-15	1/10W 100 ohm
R805	119-1021-15	1/10W 1k ohm	R850	119-1031-15	1/10W 10k ohm	R955	119-3311-15	1/10W 330 ohm
R806	032-0140-99	1/10W 39k ohm F	R853	032-0140-17	1/10W 270k ohm F	R956	119-3931-15	1/10W 39k ohm
R807	119-2221-15	1/10W 2.2k ohm	R854	119-0000-05	1/10W 0 ohm JW	R957	119-1031-15	1/10W 10k ohm
R808	032-0140-54	1/10W 22k ohm F	R855	119-0000-05	1/10W 0 ohm JW	R961	119-1021-15	1/10W 1k ohm
R809	032-0140-89	1/10W 47k ohm F	R856	032-0140-89	1/10W 47k ohm F	R964	119-1021-15	1/10W 1k ohm
R810	119-2231-15	1/10W 22k ohm	R859	119-6821-15	1/10W 6.8k ohm	R965	119-1021-15	1/10W 1k ohm
R811	119-3341-15	1/10W 330k ohm	R861	119-5621-15	1/10W 5.6k ohm	R966	119-1021-15	1/10W 1k ohm
R812	119-5621-15	1/10W 5.6k ohm	R862	119-5621-15	1/10W 5.6k ohm	R967	119-1021-15	1/10W 1k ohm
R813	119-2231-15	1/10W 22k ohm	R863	119-6821-15	1/10W 6.8k ohm	R982	116-6811-15	1/4W 680 ohm
R814	119-2231-15	1/10W 22k ohm	R864	119-1831-15	1/10W 18k ohm	R983	119-8231-15	1/10W 82k ohm
R815	119-2431-15	1/10W 24k ohm	R865	119-1011-15	1/10W 100 ohm	R984	119-1031-15	1/10W 10k ohm
R816	119-2731-15	1/10W 27k ohm	R866	119-1231-15	1/10W 12k ohm	R985	119-3351-15	1/10W 3.3M ohm
R817	032-0140-80	1/10W 18k ohm F	R867	119-4321-15	1/10W 4.3k ohm	R986	119-1041-15	1/10W 100k ohm
R818	119-3341-15	1/10W 330k ohm	R868	119-0000-05	1/10W 0 ohm JW	R987	119-1051-15	1/10W 1M ohm
R819	119-1521-15	1/10W 1.5k ohm	R869	119-0000-05	1/10W 0 ohm JW	R988	032-0140-90	1/10W 560 ohm F
R820	119-5611-15	1/10W 560 ohm	R901	119-1021-15	1/10W 1k ohm	R992	119-6841-15	1/10W 680k ohm
R821	119-5641-15	1/10W 560k ohm	R902	032-0140-75	1/10W 1.5k ohm F	T901	007-1165-00	CIUH7D45 TRANS
R822	119-1021-15	1/10W 1k ohm	R903	119-0000-05	1/10W 0 ohm JW	VR801	012-6009-58	33k ohm B VR
R823	119-3351-15	1/10W 3.3M ohm	R904	119-1011-15	1/10W 100 ohm	VR802	012-6009-58	33k ohm B VR
R824	119-3931-15	1/10W 39k ohm	R905	119-6811-15	1/10W 680 ohm	VR803	012-6009-58	33k ohm B VR
R825	119-2731-15	1/10W 27k ohm	R906	119-1011-15	1/10W 100 ohm	VR804	012-6009-57	22k ohm B VR
R826	119-3931-15	1/10W 39k ohm	R907	119-1011-15	1/10W 100 ohm	VR805	012-6009-58	33k ohm B VR
R827	119-2731-15	1/10W 27k ohm	R908	119-1021-15	1/10W 1k ohm	VR806	012-6009-57	22k ohm B VR
R828	119-3931-15	1/10W 39k ohm	R909	119-1021-15	1/10W 1k ohm	VR807	012-6009-53	2.2k ohm B VR
R829	119-2231-15	1/10W 22k ohm	R910	119-1021-15	1/10W 1k ohm	VR941	012-6009-56	10k ohm B VR
R830	119-1051-15	1/10W 1M ohm	R911	119-1031-15	1/10W 10k ohm	X701	060-1531-90	CSTCR4M91G53-RO
R831	119-6821-15	1/10W 6.8k ohm	R912	119-0000-05	1/10W 0 ohm JW	X801	061-3520-95	3.57945MHz
R832	119-3311-15	1/10W 330 ohm	R913	119-0000-05	1/10W 0 ohm JW	X802	061-3524-90	4.433618MHz
R833	119-4731-15	1/10W 47k ohm	R916	119-3301-15	1/10W 33 ohm	PWB	039-2863-00	PWB(WITHOUT COMPONENT)
R834	119-1831-15	1/10W 18k ohm	R917	119-4711-15	1/10W 470 ohm			
R835	119-5621-15	1/10W 5.6k ohm	R941	119-4721-15	1/10W 4.7k ohm			

Switch PWB(B4) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1101	178-1055-79	1uF	R1102	119-6811-15	1/10W 680 ohm	S1105	013-6312-50	SKRP-ABE-010
D1101	001-7097-90	CL194S-WM-D-T	R1103	119-4711-15	1/10W 470 ohm	S1106	013-6312-50	SKRP-ABE-010
D1102	001-7097-90	CL194S-WM-D-T	R1106	119-3311-15	1/10W 330 ohm	S1107	013-6312-50	SKRP-ABE-010
D1103	001-7097-90	CL194S-WM-D-T	R1107	119-8211-15	1/10W 820 ohm	S1108	013-6312-50	SKRP-ABE-010
D1106	001-7097-90	CL194S-WM-D-T	R1108	119-8211-15	1/10W 820 ohm	S1109	013-6312-50	SKRP-ABE-010
D1107	001-7097-90	CL194S-WM-D-T	R1109	119-4711-15	1/10W 470 ohm	S1110	013-6312-50	SKRP-ABE-010
D1108	001-7097-90	CL194S-WM-D-T	R1112	119-3311-15	1/10W 330 ohm	S1111	013-6312-50	SKRP-ABE-010
D1111	001-7097-90	CL194S-WM-D-T	R1113	119-3311-15	1/10W 330 ohm	S1112	013-6312-50	SKRP-ABE-010
IR1101	060-4017-90	IR RECEIVER	R1114	119-1021-15	1/10W 1k ohm	S1113	013-6312-50	SKRP-ABE-010
J1101	074-1289-70	20P	R1115	119-4701-15	1/10W 47 ohm	S1114	013-6312-50	SKRP-ABE-010
P1101	076-2010-03	3P	R1116	119-2221-15	1/10W 2.2k ohm	S1115	013-6312-50	SKRP-ABE-010
P1103	076-0708-02	2P	S1101	013-7411-51	SWITCH	S1116	013-6312-50	SKRP-ABE-010
Q1101	125-2017-97	RN1427	S1102	013-6513-50	LS9J2M-1UR	S1117	013-6312-50	SKRP-ABE-010
Q1102	125-2032-96	RN1306	S1103	013-6312-50	SKRP-ABE-010	PWB	039-2866-00	PWB(WITHOUT COMPONENT)
R1101	119-6811-15	1/10W 680 ohm	S1104	013-6312-50	SKRP-ABE-010			

EXPLODED VIEW / PARTS LIST

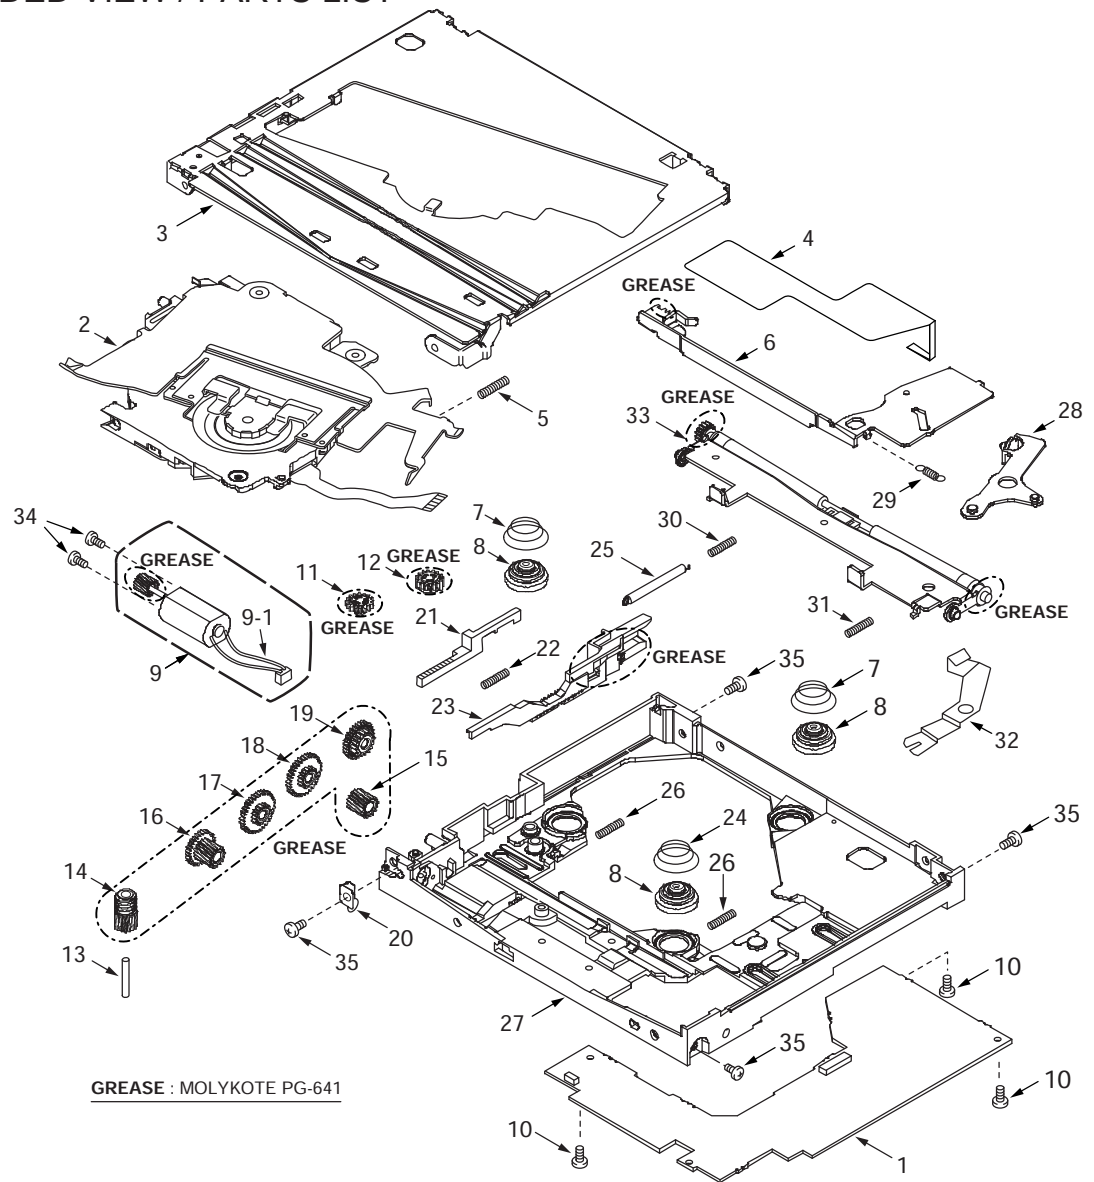

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	-----	Servo PWB	1	18	658-0238-02	Laoding Gear (5)	1
2	658-0244-15	Suspension Assy	1	19	658-0238-03	Laoding Gear (6)	1
3	658-0244-16	Upper Chassis	1	20	658-0238-04	Worm Gear Housing Spring	1
4	658-0244-17	Sensor FPC Assy	1	21	658-0238-05	Clamp Rack	1
5	658-0237-88	Earth Spring	1	22	658-0238-06	Clamp Rack Spring	1
6	658-0239-06	Suspension Lock Lever (L)	1	23	658-0244-18	Slide Lever	1
7	658-0237-90	Suspension Spring	2	24	658-0238-08	Suspension Spring (F)	1
8	658-0239-07	Damper	3	25	658-0238-09	Slide Lever Spring	1
9	658-0237-92	Loading Motor Assy	1	26	658-0238-10	Offset Spring	2
9-1	658-0237-93	Connector w/Lead Wire	1	27	658-0238-11	Main Chassis	1
10	658-0238-23	Screw	3	28	658-0238-12	Suspension Lock Lever (R)	1
11	658-0237-94	Lock Gear (1)	1	29	658-0238-13	Suspension Lock Lever L Spring	1
12	658-0237-95	Lock Gear (2)	1	30	658-0238-15	Feeder Spring (L)	1
13	658-0237-96	Loading Gear Shaft	1	31	658-0238-16	Feeder Spring (R)	1
14	658-0237-97	Laoding Gear (1)	1	32	658-0238-17	Upper Spring	1
15	658-0237-98	Laoding Gear (2)	1	33	658-0244-19	Feeder Arm Assy	1
16	658-0237-99	Laoding Gear (3)	1	34	658-0238-21	Screw	2
17	658-0238-01	Laoding Gear (4)	1	35	658-0244-20	Screw	4

ELECTRICAL PARTS LIST

Servo PWB(BM1) section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	658-0237-26	50V560pF	C249	658-0237-26	50V560pF	C529	658-0240-12	0.1uF 10WV
C102	658-0240-12	0.1uF 10WV	C250	658-0240-12	0.1uF 10WV	C530	658-0240-13	10uF 6.3WV
C103	658-0237-29	50V0.001uF	C251	658-0237-35	50V0.0022uF	C531	658-0240-13	10uF 6.3WV
C104	658-0237-29	50V0.001uF	C252	658-0237-36	50V470pF	C532	658-0240-12	0.1uF 10WV
C113	658-0240-12	0.1uF 10WV	C253	658-0240-12	0.1uF 10WV	C534	658-0240-12	0.1uF 10WV
C114	658-0240-13	10uF 6.3WV	C261	658-0240-12	0.1uF 10WV	C541	658-0240-13	10uF 6.3WV
C115	658-0240-13	10uF 6.3WV	C262	658-0240-12	0.1uF 10WV	C542	658-0240-13	10uF 6.3WV
C116	658-0237-29	50V0.001uF	C263	658-0240-12	0.1uF 10WV	C543	658-0240-12	0.1uF 10WV
C117	658-0240-13	10uF 6.3WV	C264	658-0240-12	0.1uF 10WV	C544	658-0240-12	0.1uF 10WV
C121	658-0237-30	50V6pF	C265	658-0240-12	0.1uF 10WV	C545	658-0240-12	0.1uF 10WV
C122	658-0240-13	10uF 6.3WV	C266	658-0240-12	0.1uF 10WV	C546	658-0240-12	0.1uF 10WV
C124	658-0240-12	0.1uF 10WV	C271	658-0240-12	0.1uF 10WV	C547	658-0240-12	0.1uF 10WV
C125	658-0240-12	0.1uF 10WV	C272	658-0240-12	0.1uF 10WV	C548	658-0240-12	0.1uF 10WV
C126	658-0237-28	25V0.027uF	C275	658-0240-12	0.1uF 10WV	C551	658-0240-12	0.1uF 10WV
C127	658-0237-27	16V0.047uF	C311	658-0240-12	0.1uF 10WV	C552	658-0240-12	0.1uF 10WV
C128	658-0240-12	0.1uF 10WV	C312	658-0244-07	Ceramic,50WV0.1uF	C553	658-0240-12	0.1uF 10WV
C129	658-0237-25	50V100pF	C313	658-0240-12	0.1uF 10WV	C554	658-0240-12	0.1uF 10WV
C131	658-0237-26	50V560pF	C314	658-0244-07	Ceramic,50WV0.1uF	C555	658-0240-12	0.1uF 10WV
C132	658-0237-26	50V560pF	C315	658-0240-12	0.1uF 10WV	C556	658-0240-12	0.1uF 10WV
C133	658-0240-12	0.1uF 10WV	C316	658-0240-12	0.1uF 10WV	C557	658-0237-25	50V100pF
C134	658-0240-12	0.1uF 10WV	C321	658-0240-12	0.1uF 10WV	C561	658-0240-12	0.1uF 10WV
C136	658-0240-12	0.1uF 10WV	C322	658-0244-07	Ceramic,50WV0.1uF	C601	658-0240-42	1uF 6.3WV
C137	658-0240-13	10uF 6.3WV	C323	658-0240-12	0.1uF 10WV	C602	658-0237-25	50V100pF
C141	658-0237-24	16V0.01uF	C324	658-0240-12	0.1uF 10WV	C603	658-0237-25	50V100pF
C142	658-0240-12	0.1uF 10WV	C325	658-0240-12	0.1uF 10WV	C604	658-0237-25	50V100pF
C143	658-0240-12	0.1uF 10WV	C401	658-0237-29	50V0.001uF	C605	658-0237-25	50V100pF
C144	658-0240-12	0.1uF 10WV	C402	658-0237-29	50V0.001uF	C606	658-0237-25	50V100pF
C145	658-0240-12	0.1uF 10WV	C403	658-0237-29	50V0.001uF	C607	658-0237-25	50V100pF
C151	658-0240-12	0.1uF 10WV	C404	658-0237-29	50V0.001uF	C608	658-0237-25	50V100pF
C152	658-0237-21	6.3V47uF Tan	C405	658-0240-12	0.1uF 10WV	C609	658-0237-25	50V100pF
C153	658-0240-12	0.1uF 10WV	C406	658-0240-14	47uF 6.3WV	C611	658-0240-42	1uF 6.3WV
C154	658-0237-21	6.3V47uF Tan	C411	658-0244-07	Ceramic,50WV0.1uF	C612	658-0237-25	50V100pF
C201	658-0240-12	0.1uF 10WV	C412	658-0240-43	10uF 16WV	C613	658-0237-25	50V100pF
C202	658-0240-12	0.1uF 10WV	C413	658-0240-42	1uF 6.3WV	C614	658-0237-25	50V100pF
C203	658-0240-12	0.1uF 10WV	C414	658-0240-14	47uF 6.3WV	C616	658-0237-25	50V100pF
C204	658-0240-12	0.1uF 10WV	C421	658-0244-07	Ceramic,50WV0.1uF	C621	658-0240-12	0.1uF 10WV
C205	658-0240-12	0.1uF 10WV	C422	658-0240-14	47uF 6.3WV	C622	658-0237-25	50V100pF
C206	658-0237-25	50V100pF	C423	658-0240-12	0.1uF 10WV	C623	658-0240-12	0.1uF 10WV
C207	658-0240-13	10uF 6.3WV	C431	658-0240-12	0.1uF 10WV	C631	658-0240-12	0.1uF 10WV
C208	658-0240-13	10uF 6.3WV	C432	658-0240-12	0.1uF 10WV	C641	658-0240-12	0.1uF 10WV
C211	658-0240-12	0.1uF 10WV	C433	658-0240-12	0.1uF 10WV	C651	658-0240-12	0.1uF 10WV
C213	658-0237-25	50V100pF	C441	658-0240-12	0.1uF 10WV	C652	658-0240-13	10uF 6.3WV
C214	658-0237-25	50V100pF	C501	658-0237-25	50V100pF	C653	658-0240-12	0.1uF 10WV
C215	658-0237-24	16V0.01uF	C502	658-0237-25	50V100pF	C701	658-0240-44	330PF 50WV
C216	658-0237-24	16V0.01uF	C503	658-0237-25	50V100pF	C702	658-0240-44	330PF 50WV
C221	658-0244-06	Ceramic,50WV22PF	C504	658-0237-25	50V100pF	C703	658-0244-08	Ceramic, 50WV120PF
C222	658-0244-06	Ceramic,50WV22PF	C505	658-0237-25	50V100pF	C722	658-0240-13	10uF 6.3WV
C223	658-0240-12	0.1uF 10WV	C506	658-0237-25	50V100pF	C723	658-0240-12	0.1uF 10WV
C224	658-0240-12	0.1uF 10WV	C507	658-0237-25	50V100pF	CN101	658-0237-47	Connector 30P
C225	658-0240-12	0.1uF 10WV	C508	658-0237-25	50V100pF	CN201	658-0237-46	Connector 40P
C226	658-0240-12	0.1uF 10WV	C509	658-0237-25	50V100pF	CN301	658-0237-50	Connector 4P
C231	658-0237-24	16V0.01uF	C511	658-0240-13	10uF 6.3WV	CN302	658-0237-49	Connector 2P
C232	658-0240-12	0.1uF 10WV	C512	658-0240-13	10uF 6.3WV	CN303	658-0237-48	Connector 20P
C234	658-0237-24	16V0.01uF	C513	658-0237-25	50V100pF	CN401	658-0244-12	Connector,12P
C235	658-0240-13	10uF 6.3WV	C514	658-0240-12	0.1uF 10WV	CN701	658-0237-47	Connector 30P
C236	658-0240-12	0.1uF 10WV	C515	658-0237-25	50V100pF	D311	658-0237-19	MA721TX
C237	658-0237-32	16V0.022uF	C516	658-0240-12	0.1uF 10WV	IC101	658-0237-01	AN8703FH-V
C239	658-0237-33	50V47pF	C517	658-0237-25	50V100pF	IC201	658-0240-01	MNZS26EDCUB
C240	658-0240-12	0.1uF 10WV	C518	658-0240-12	0.1uF 10WV	IC271	658-0237-04	YEAMT7ST08UL
C241	658-0240-12	0.1uF 10WV	C521	658-0240-12	0.1uF 10WV	IC275	658-0244-01	C0JBAA001014
C242	658-0237-29	50V0.001uF	C522	658-0240-13	10uF 6.3WV	IC311	658-0237-08	C0GBY0000012
C243	658-0240-12	0.1uF 10WV	C523	658-0240-13	10uF 6.3WV	IC321	658-0237-09	C0GBH0000006
C244	658-0237-34	50V0.0056uF	C524	658-0240-12	0.1uF 10WV	IC411	658-0240-41	YEAMC78L05E2
C245	658-0237-29	50V0.001uF	C525	658-0240-12	0.1uF 10WV	IC421	658-0244-02	YEAM17805FP
C246	658-0237-29	50V0.001uF	C526	658-0240-13	10uF 6.3WV	IC431	658-0240-02	C0JBAA000102
C247	658-0237-29	50V0.001uF	C527	658-0240-12	0.1uF 10WV	IC441	658-0237-03	MN13821JP
C248	658-0237-26	50V560pF	C528	658-0240-12	0.1uF 10WV			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC501	658-0245-01	C1AB00001622	R202	033-1031-15	1/16W 10k ohm	R313	033-6821-15	1/16W 6.8k ohm
IC561	658-0244-01	C0JBAZ001014	R203	033-1031-15	1/16W 10k ohm	R314	033-5621-15	1/16W 5.6k ohm
IC601	658-0244-03	C3ABPJ000072	R212	658-0240-18	150 ohm 1/16W	R315	033-5621-15	1/16W 5.6k ohm
IC621	658-0240-36	C3FBMG000017	R214	033-4721-15	1/16W 4.7k ohm	R316	033-1031-15	1/16W 10k ohm
IC631	658-0240-37	C0JBAH000082	R215	033-4721-15	1/16W 4.7k ohm	R317	033-5621-15	1/16W 5.6k ohm
IC641	658-0240-37	C0JBAH000082	R216	033-2731-15	1/16W 27k ohm	R321	033-4721-15	1/16W 4.7k ohm
IC651	658-0240-38	C3GBCC000001	R217	033-2731-15	1/16W 27k ohm	R322	033-4731-15	1/16W 47k ohm
IC652	658-0240-39	C0JBAB000255	R218	033-1031-15	1/16W 10k ohm	R323	658-0244-10	Chip,1/8W0.51 ohm
IC721	658-0245-02	C0FBBK000048	R219	033-3321-15	1/16W 3.3k ohm	R324	033-1011-15	1/16W 100 ohm
L101	658-0240-30	J0JCC0000152	R220	033-3321-15	1/16W 3.3k ohm	R325	033-1011-15	1/16W 100 ohm
L102	658-0240-30	J0JCC0000152	R221	033-1051-15	1/16W 1M ohm	R327	117-0000-10	0Ω
L201	658-0240-30	J0JCC0000152	R222	033-4711-15	1/16W 470 ohm	R431	658-0240-23	100k ohm 1/16W
L401	658-0240-32	YELTBMHS800T	R223	033-3931-15	1/16W 39k ohm	R441	033-4731-15	1/16W 47k ohm
L403	658-0240-32	YELTBMHS800T	R227	033-0000-05	1/16W 0 ohm	R501	033-1011-15	1/16W 100 ohm
L404	658-0240-32	YELTBMHS800T	R231	033-1021-15	1/16W 1k ohm	R511	658-0240-47	33 ohm 1/16W
L406	658-0240-32	YELTBMHS800T	R232	033-1531-15	1/16W 15k ohm	R512	033-1011-15	1/16W 100 ohm
L511	658-0240-52	J0JCC0000042	R234	033-1051-15	1/16W 1M ohm	R513	033-1011-15	1/16W 100 ohm
L512	658-0240-56	J0MAB0000134	R235	033-5621-15	1/16W 5.6k ohm	R514	658-0240-18	150 ohm 1/16W
L513	658-0240-30	J0JCC0000152	R236	033-5621-15	1/16W 5.6k ohm	R515	033-3931-15	1/16W 39k ohm
L514	658-0240-30	J0JCC0000152	R251	033-1031-15	1/16W 10k ohm	R516	033-4731-15	1/16W 47k ohm
L515	658-0240-30	J0JCC0000152	R252	033-4731-15	1/16W 47k ohm	R517	033-4731-15	1/16W 47k ohm
L516	658-0240-30	J0JCC0000152	R253	033-1531-15	1/16W 15k ohm	R518	033-2201-15	1/16W 22 ohm
L541	658-0240-30	J0JCC0000152	R254	033-1531-15	1/16W 15k ohm	R519	033-2201-15	1/16W 22 ohm
L701	658-0240-46	470PF 50WV	R255	033-1531-15	1/16W 15k ohm	R521	033-1011-15	1/16W 100 ohm
L702	658-0240-46	470PF 50WV	R261	658-0237-56	Resistor Network	R522	658-0240-47	33 ohm 1/16W
L703	658-0240-57	J0MAB0000015	R262	658-0244-14	NetworkResistor	R523	116-1001-10	1/8W 10 ohm
L704	658-0240-57	J0MAB0000015	R263	658-0244-09	Chip,1/16W27 ohm	R524	658-0240-47	33 ohm 1/16W
L705	658-0240-54	G1C2R2K00001	R264	033-2201-15	1/16W 22 ohm	R525	658-0240-47	33 ohm 1/16W
L721	658-0240-53	YELTBLM2A102	R265	033-2201-15	1/16W 22 ohm	R526	658-0240-18	150 ohm 1/16W
L722	658-0240-53	YELTBLM2A102	R266	033-0000-05	1/16W 0 ohm	R527	658-0244-11	Chip,1/16W1k ohm
L723	658-0240-53	YELTBLM2A102	R267	033-1031-15	1/16W 10k ohm	R528	658-0240-48	75 ohm 1/10W
L724	658-0240-53	YELTBLM2A102	R268	033-1021-15	1/16W 1k ohm	R541	033-3321-15	1/16W 3.3k ohm
Q151	658-0237-14	TR 2SB766ATX	R269	033-1031-15	1/16W 10k ohm	R543	033-4711-15	1/16W 470 ohm
Q152	658-0237-14	TR 2SB766ATX	R270	033-3931-15	1/16W 39k ohm	R552	033-1031-15	1/16W 10k ohm
Q153	658-0240-10	B1GDCFNN0007	R271	658-0237-56	Resistor Network	R553	033-1031-15	1/16W 10k ohm
Q154	658-0240-11	B1GBCFNN0009	R272	658-0237-58	Resistor Network	R554	033-2021-15	1/16W 2k ohm
Q251	658-0244-04	Transistor B3HB00000023	R273	658-0237-58	Resistor Network	R555	033-3931-15	1/16W 39k ohm
Q252	658-0244-04	Transistor B3HB00000023	R274	658-0244-14	NetworkResistor	R556	033-3931-15	1/16W 39k ohm
Q253	658-0244-04	Transistor B3HB00000023	R275	033-2201-15	1/16W 22 ohm	R557	033-3931-15	1/16W 39k ohm
Q301	658-0237-18	TR B1GBGEEA0001	R276	033-2201-15	1/16W 22 ohm	R570	033-4711-15	1/16W 470 ohm
Q321	658-0244-05	Transistor B1GBGFGG0001	R277	033-2201-15	1/16W 22 ohm	R571	033-4711-15	1/16W 470 ohm
R101	033-1231-15	1/16W 12k ohm	R278	033-2201-15	1/16W 22 ohm	R572	033-4711-15	1/16W 470 ohm
R102	033-1231-15	1/16W 12k ohm	R279	033-2201-15	1/16W 22 ohm	R573	033-4711-15	1/16W 470 ohm
R103	658-0237-41	1/16W 24k ohm	R280	033-2201-15	1/16W 22 ohm	R574	033-4711-15	1/16W 470 ohm
R104	658-0237-42	1/16W 3.9k ohm Metal	R281	033-2201-15	1/16W 22 ohm	R575	033-4711-15	1/16W 470 ohm
R106	658-0237-43	1/16W 18k ohm Metal	R282	033-2201-15	1/16W 22 ohm	R576	033-4711-15	1/16W 470 ohm
R107	033-4721-15	1/16W 4.7k ohm	R283	033-2201-15	1/16W 22 ohm	R577	033-4711-15	1/16W 470 ohm
R110	033-2021-15	1/16W 2k ohm	R284	033-2201-15	1/16W 22 ohm	R621	658-0240-18	150 ohm 1/16W
R121	033-1221-15	1/16W 1.2k ohm	R285	033-2201-15	1/16W 22 ohm	R623	033-1031-15	1/16W 10k ohm
R131	033-1051-15	1/16W 1M ohm	R286	033-2201-15	1/16W 22 ohm	R631	658-0240-50	75 ohm 1/16W
R132	033-1051-15	1/16W 1M ohm	R287	033-2201-15	1/16W 22 ohm	R651	033-2021-15	1/16W 2k ohm
R141	033-1031-15	1/16W 10k ohm	R288	033-2201-15	1/16W 22 ohm	R701	033-1011-15	1/16W 100 ohm
R142	033-1031-15	1/16W 10k ohm	R289	033-2201-15	1/16W 22 ohm	R702	033-1011-15	1/16W 100 ohm
R151	033-2291-15	1/16W 2.2 ohm	R290	033-2201-15	1/16W 22 ohm	R703	033-1011-15	1/16W 100 ohm
R152	658-0237-40	1/2W 20 ohm	R291	033-3931-15	1/16W 39k ohm	R704	033-0000-05	1/16W 0 ohm
R153	033-2291-15	1/16W 2.2 ohm	R292	033-3931-15	1/16W 39k ohm	R705	033-0000-05	1/16W 0 ohm
R154	658-0237-40	1/2W 20 ohm	R293	033-3931-15	1/16W 39k ohm	R706	033-0000-05	1/16W 0 ohm
R155	033-1021-15	1/16W 1k ohm	R294	033-3931-15	1/16W 39k ohm	R707	033-1011-15	1/16W 100 ohm
R156	033-3331-15	1/16W 33k ohm	R295	033-3931-15	1/16W 39k ohm	R708	033-1011-15	1/16W 100 ohm
R157	033-2231-15	1/16W 22k ohm	R296	033-3931-15	1/16W 39k ohm	R709	033-2211-15	1/16W 220 ohm
R201	033-4711-15	1/16W 470 ohm	R297	033-3931-15	1/16W 39k ohm	R711	118-0000-10	0Ω
			R298	033-3931-15	1/16W 39k ohm	R712	118-0000-10	0Ω
			R301	033-1811-15	1/16W 180 ohm	R713	033-2211-15	1/16W 220 ohm
			R302	033-1811-15	1/16W 180 ohm	R714	033-2211-15	1/16W 220 ohm
			R303	033-1811-15	1/16W 180 ohm	R715	033-2211-15	1/16W 220 ohm
			R311	033-4731-15	1/16W 47k ohm	R716	033-2211-15	1/16W 220 ohm
			R312	033-1811-15	1/16W 180 ohm	R717	033-1011-15	1/16W 100 ohm

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R718	033-1011-15	1/16W 100 ohm	R724	033-1011-15	1/16W 100 ohm	XL201	658-0237-52	H0J168500003
R721	033-1011-15	1/16W 100 ohm	R725	033-1011-15	1/16W 100 ohm	XL501	658-0239-02	Crystal Oscillator
R722	033-1011-15	1/16W 100 ohm	SW301	658-0244-13	Switch			
R723	033-1011-15	1/16W 100 ohm			K0L1BA000104			