

CD changer module section

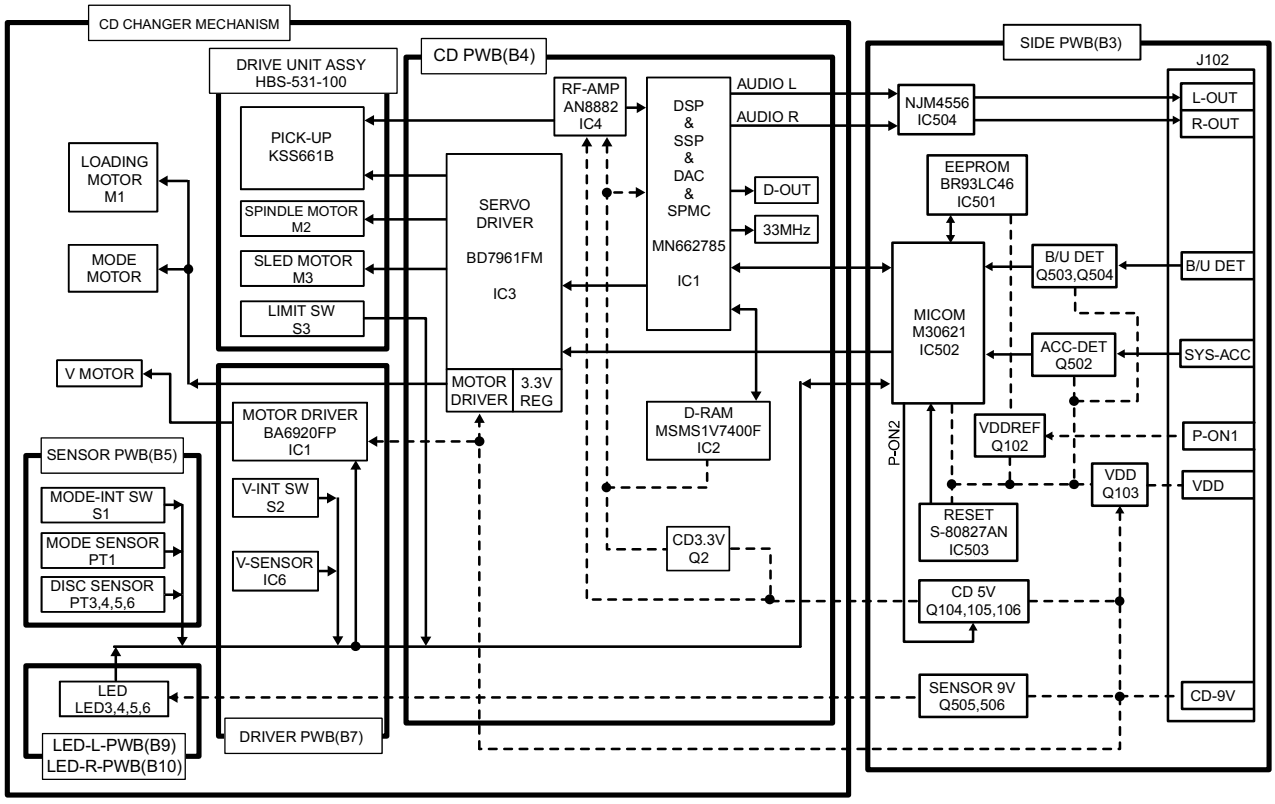

EXPLODED VIEW / PARTS LIST

Main section: PN-2532D-B/D-C

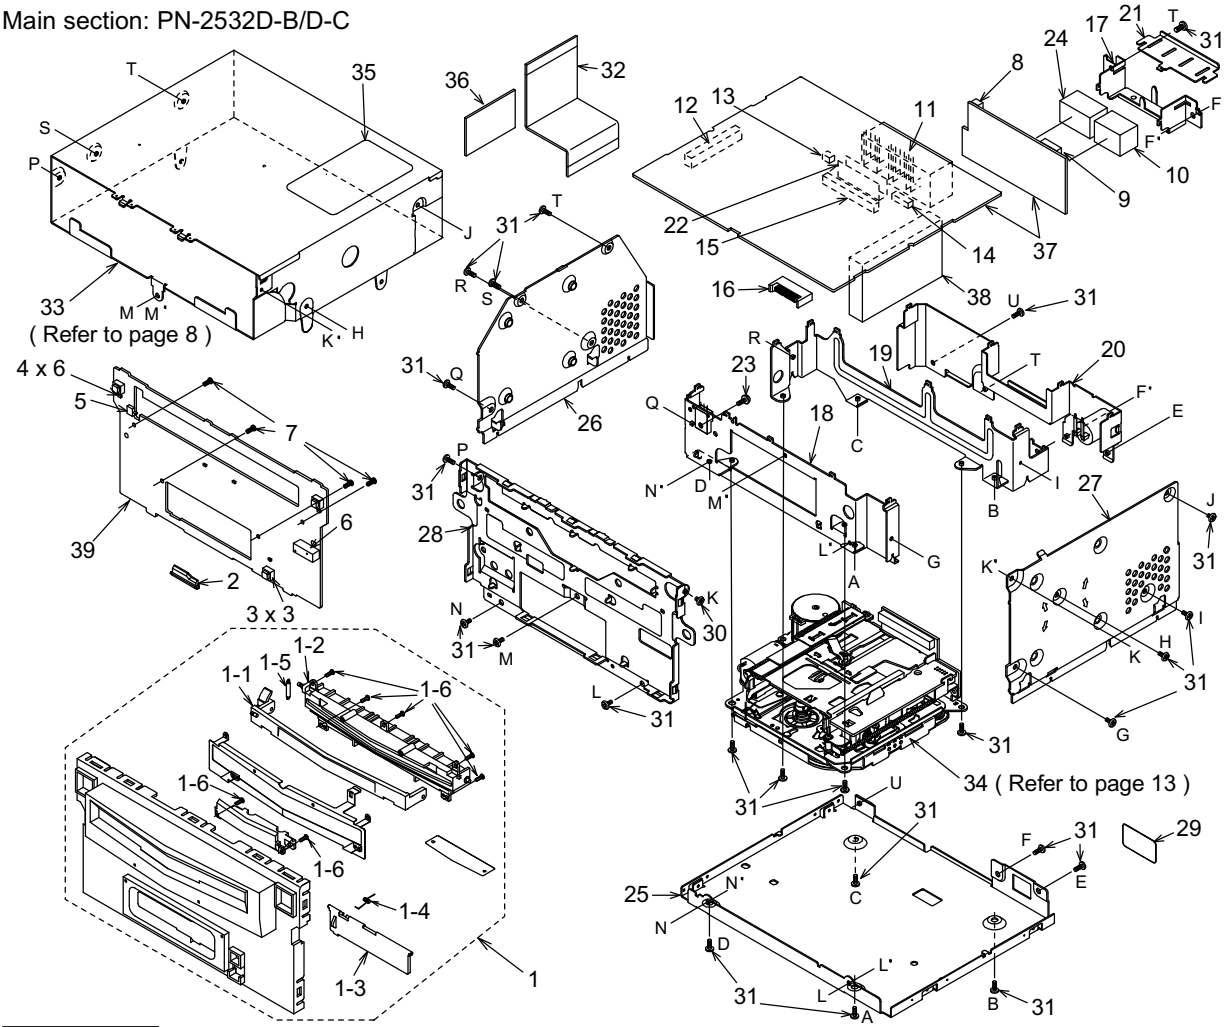


Note)Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-8018-63	ESCUTCHEON-ASSY	1
1-1	335-6828-01	DOOR	1
1-2	335-6829-03	DOOR BASE	1
1-3	320-0588-96	DUSTPROOF COVER	1
1-4	750-2626-00	SPRING	1
1-5	750-6708-01	SPRING	1
1-6	716-0872-00	PAD SCREW(M1.7x5 SILVER)	7
2	335-6826-01	GUIDE ILLUMI	1
3	013-6201-51	TACT SWITCH	3
4	001-7069-90	LED	6
5	013-7415-50	DETECTOR SWITCH	1
6	074-1151-10	OUTLET SOCKET	1
7	716-0778-10	WAVE SCREW	4
8	074-0898-06	OUTLET SOCKET(6P)	1
9	074-0898-18	OUTLET SOCKET(18P)	1
10	074-1087-12	OUTLET SOCKET(16P)	1
11	074-1141-00	OUTLET SOCKET(10P+6P)	1
12	074-1192-22	OUTLET SOCKET(22P)	1
13	076-0368-06	PLUG (6P)	1
14	076-0368-18	PLUG (18P)	1
15	076-0509-20	PLUG (20P)	1
16	076-0540-10	PLUG(10P)	1
17	331-2025-21	CONNECTOR HOLDER	1
18	331-3236-22	MECH BRACKET(FRONT)	1

NO.	PART NO.	DESCRIPTION	Q'TY
19	331-3237-21	MECH BRACKET(REAR)	1
20	331-3239-21	REAR PLATE	1
21	331-3257-20	CONNECTOR HOLDER	1
22	347-6595-01	INSULATOR	1
23	716-1494-00	IT SCREW(M2.6x6)	1
24	074-1013-30	OUTLET SOCKET	1
25	311-1834-23	LOWER CASE	1
26	331-3258-22	SIDE CASE(L)	1
27	331-3259-22	SIDE CASE(R)	1
28	331-3483-20	ES-PLATE	1
29	347-6623-01	SPACER	1
30	714-2004-81	MACHINE SCREW(M2x4)	1
31	714-2605-81	MACHINE SCREW(M2.6x5)	24
32	816-2563-00	FLAT WIRE	1
	816-2563-10	FLAT WIRE	
33	929-0196-81	CD-MECH-MODULE	1
34	930-0794-80	TAPE MECHANISM	1
35	286-6126-60	SETPLATE(PN-2532D-B)	1
	286-6126-67	SETPLATE(PN-2532D-C)	
36	335-6788-01	MOLDED PART	1
37	----------	MAIN PWB	1
38	880-1921U	TUNER	1
39	----------	ESCUTCHEON PWB	1

Main section: PN-2548N-D

*The parts list is the next page.

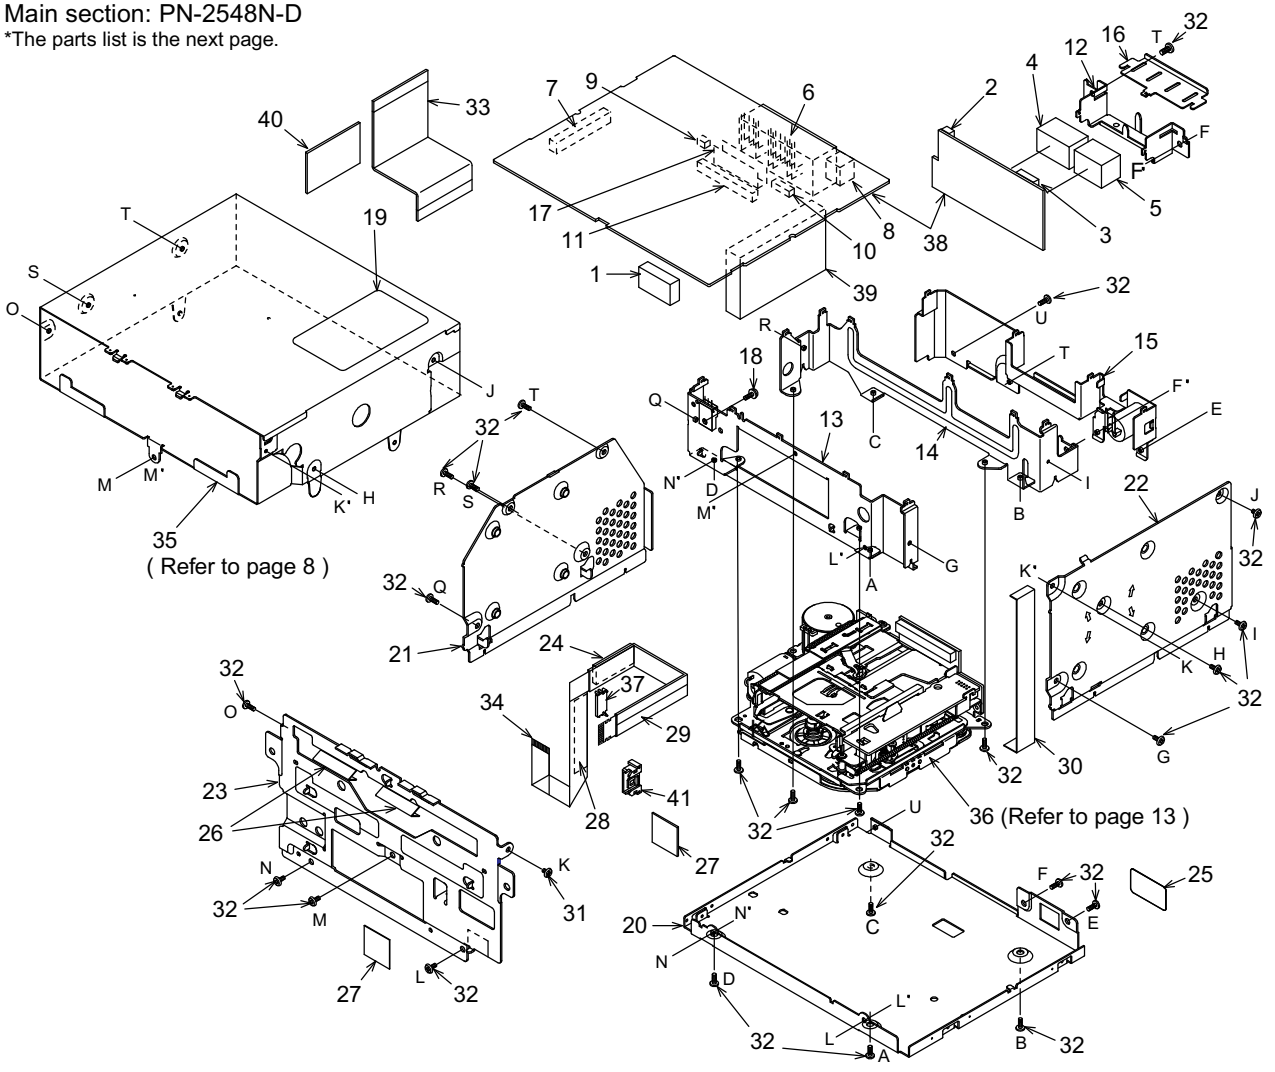


Note)Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

NO.	PART NO.	DESCRIPTION	Q'TY
1	074-0834-10	OUTLET SOCKET(10P)	1
2	074-0898-06	OUTLET SOCKET(6P)	1
3	074-0898-18	OUTLET SOCKET(18P)	1
4	074-1013-30	OUTLET SOCKET(12P)	1
5	074-1087-12	OUTLET SOCKET(16P)	1
6	074-1141-00	OUTLET SOCKET(10P+6P)	1
7	074-1192-22	OUTLET SOCKET(22P)	1
8	074-1236-10	OUTLET SOCKET(8P)	1
9	076-0368-06	PLUG(6P)	1
10	076-0368-18	PLUG(18P)	1
11	076-0509-20	PLUG(20P)	1
12	331-2025-21	CONNECTOR HOLDER	1
13	331-3236-22	MECH-BRKT(FRONT)	1
14	331-3237-21	MECH-BRKT(REAR)	1
15	331-3239-41	REAR PLATE	1
16	331-3257-20	CONNECTOR HOLDER	1
17	347-6965-01	INSULATOR	1
18	716-1494-00	IT SCREW(M2.6x6)	1
19	286-9526-60	SETPLATE	1
20	311-1834-23	LOWER CASE	1
21	331-3258-22	SIDE CASE(L)	1

NO.	PART NO.	DESCRIPTION	Q'TY
22	331-3259-22	SIDE CASE(R)	1
23	331-3519-01	ES-PLATE	1
24	345-5300-01	CUSHIN SPONGE	1
25	347-6623-01	SPACER	1
26	347-6910-01	PROTECTOR	2
27	347-6964-01	PROTECT SHEET	2
28	347-6965-01	DOUBLE FACE	1
29	347-6966-02	PROTECT SHEET	1
30	347-6967-01	PROTECT SHEET	1
31	714-2004-81	MACHINE SCREW (M2x4)	1
32	714-2605-81	MACHINE SCREW (M2.6x5)	24
33	816-2563-10	FLAT WIRE	1
	816-2563-00	FLAT WIRE	
34	816-2638-01	FLAT WIRE	1
35	929-0196-81	CD-MECH-MODULE	1
36	930-0794-80	TAPE MECHANISM	1
37	076-0716-10	PLUG	1
38	----------	MAIN PWB	1
39	880-1921U	TUNER	1
40	335-6788-01	MOLDED PART	1
41	076-0716-00	PLUG	1


CD changer module section


NO.	PART NO.	DESCRIPTION	Q'TY
1	----------	SIDE PWB	1
2	347-6657-01	LO-COVER SHEET	1
3	305-0315-21	SIDE COVER	1
4	310-1741-23	UPPER CASE	1
5	311-1837-25	LOWER CASE	1
6	331-3266-24	PWB-HOLDER	1
7	347-6619-00	INSULATOR	1
8	620-1086-20	DAMPER-H-PLT	4
9	629-0083-01	DAMPER	4
10	039-1957-01	FPC (WITHOUT COMPONENT)	1
11	716-1716-00	SCREW(M2 x 3)	14
12	716-3450-00	SCREW(M1.7 x 2)	4
13	750-3491-00	FL-SPRING	4
14	----------	CD CHANGER MECHANISM	1

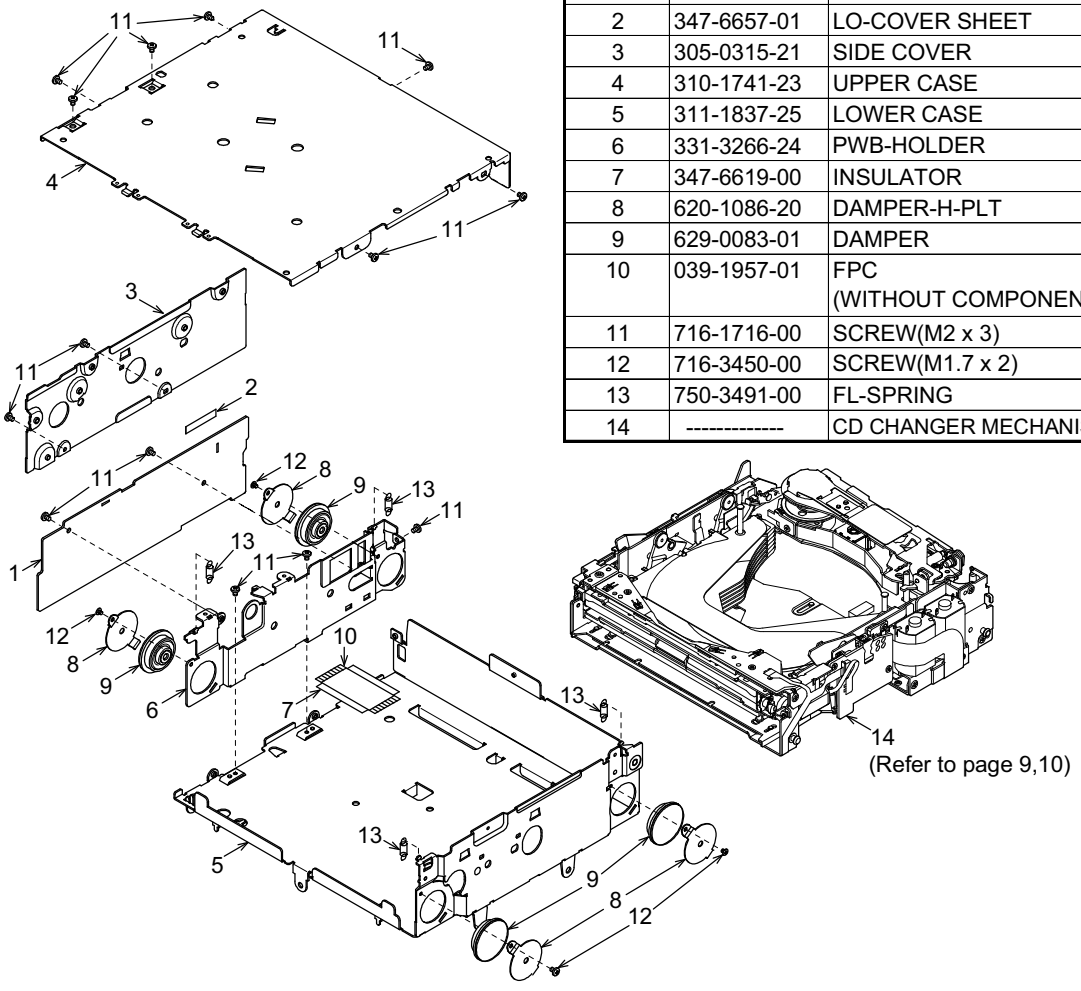

(Refer to page 9,10)

CD changer mechanism section: Main chassis

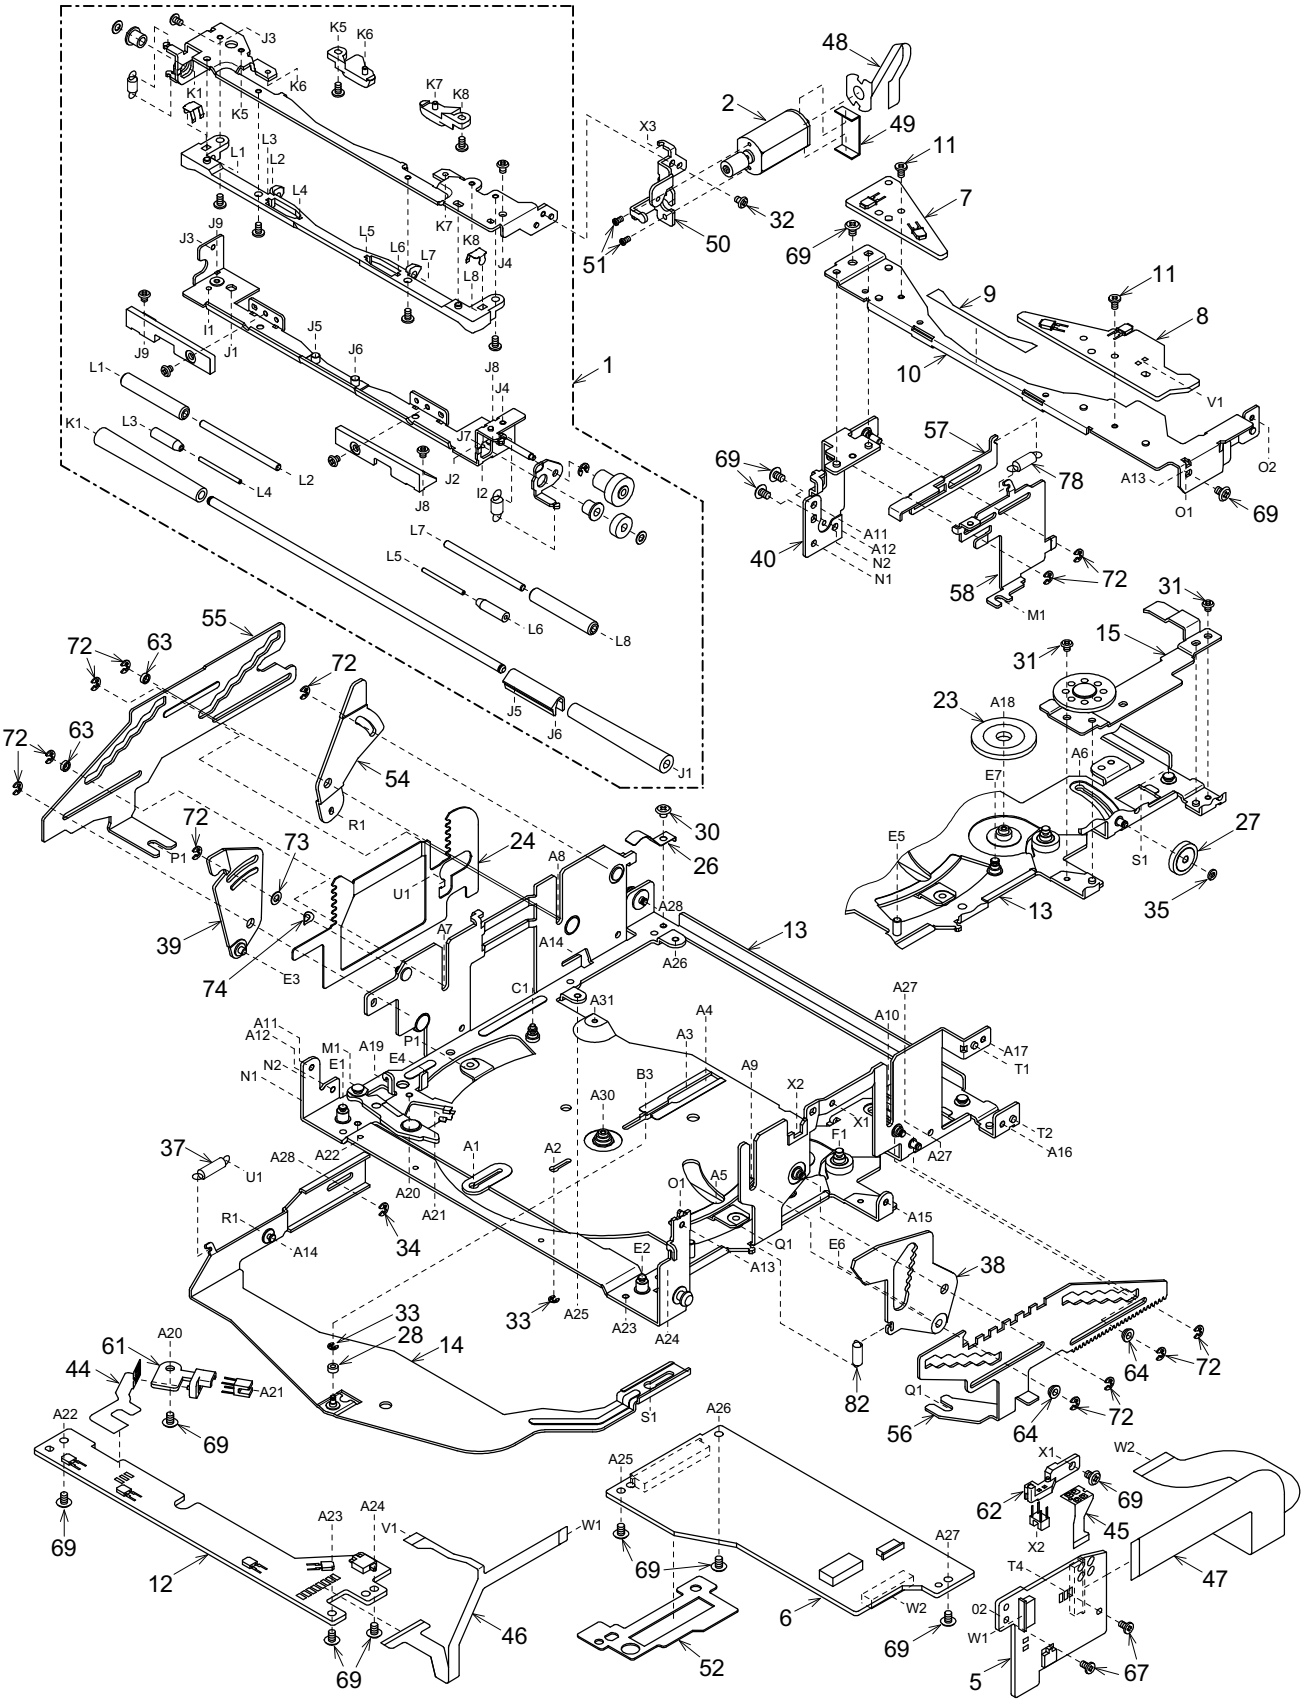

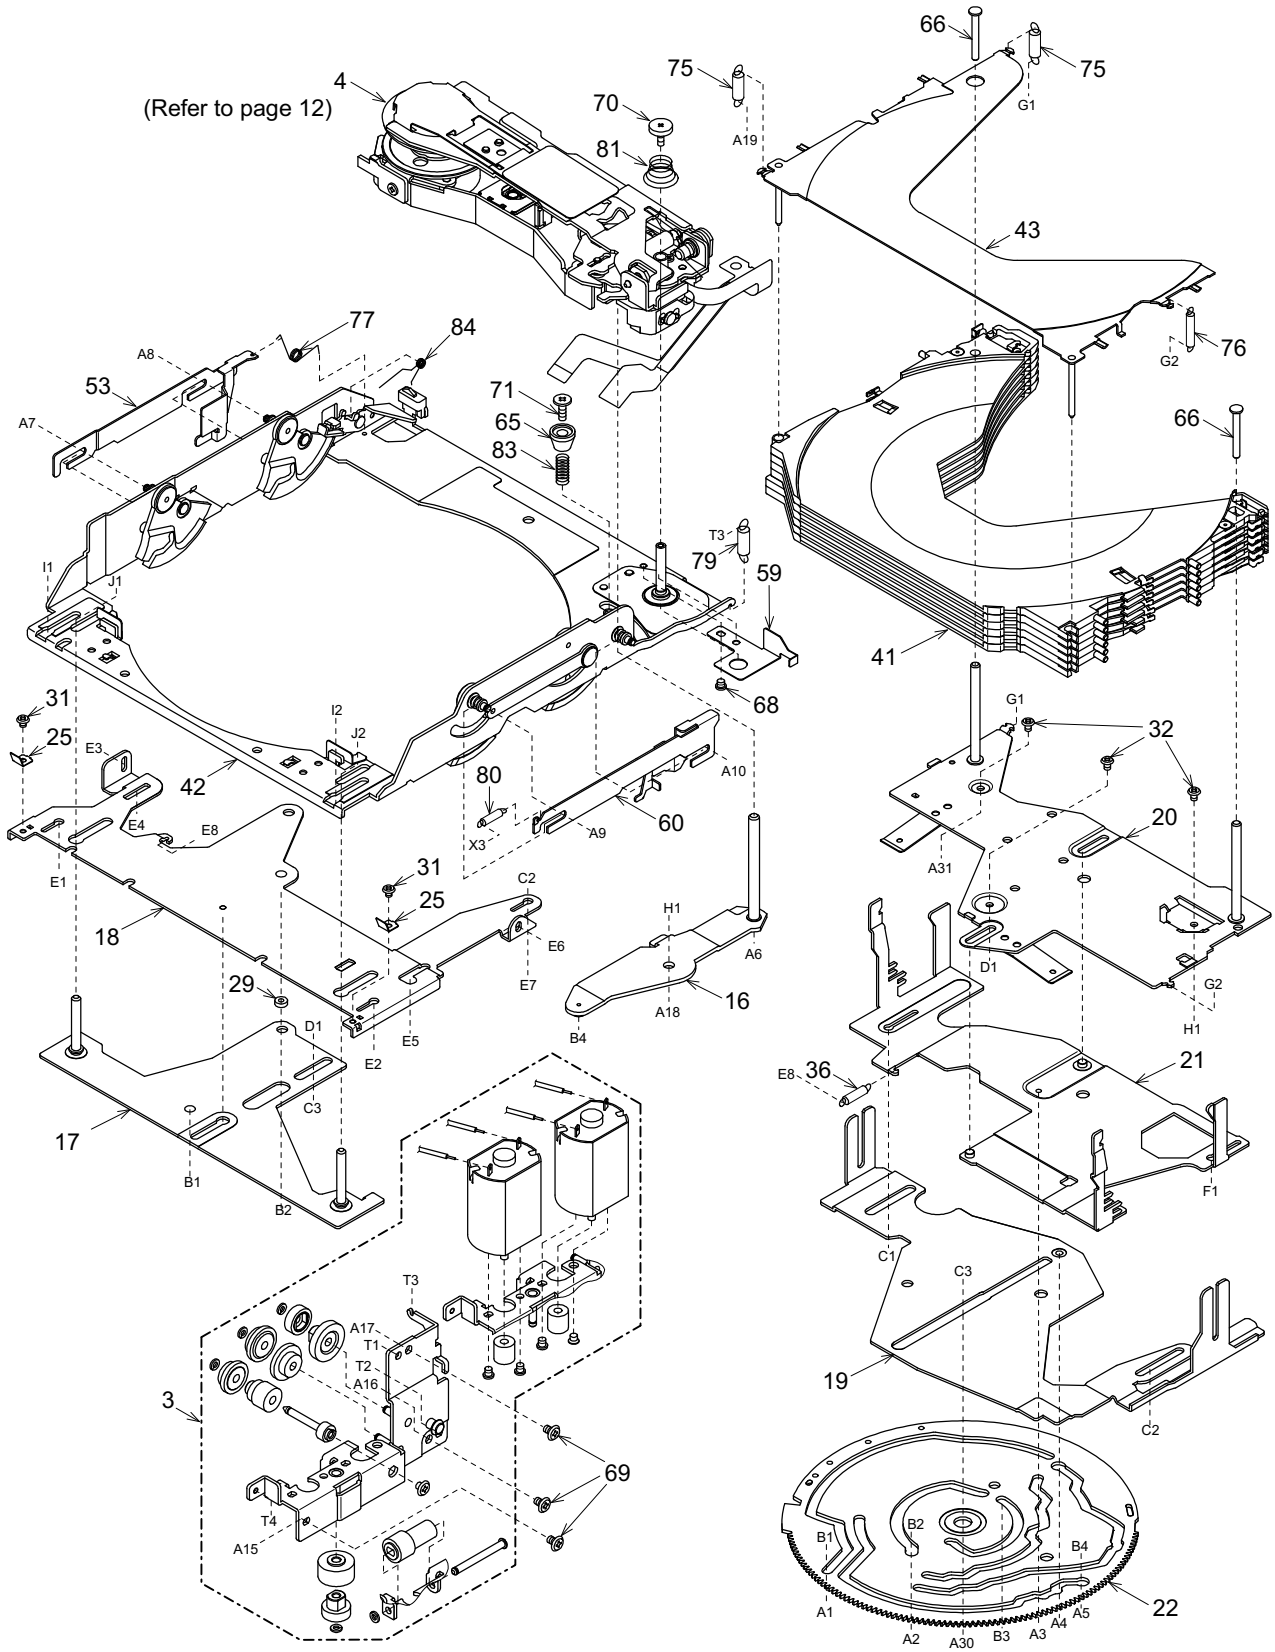
(Refer to page 12)
4
66
75
75
70
81
A19
G1
43
77
84
A8
53
A7
71
65
83
76
G2
66
T3
79
59
I1
J1
41
31
25
E3
I2
J2
68
G1
32
42
80
A10
60
X3
A9
20
A31
E4
E8
E1
31
C2
25
18
E6
E7
H1
A6
16
A18
B4
29
D1
E5
E2
D1
G2
H1
E8
36
21
17
C3
B1
B2
F1
C1
C3
T3
19
A17
T1
T2
A16
3
69
C2
T4
A15
B1
B2
B4
A1
A2
A30
B3
A3
A4
A5
22

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-521-100	LOADING UNIT	1
2	SMA-186-100	LOADING MOTOR-ASSY	1
3	HBS-530-100	MTR-P-SUB-ASSY	1
4	HBS-531-100	DRIVE UNIT	1
5	----------	DRIVER-PWB	1
6	----------	CD-PWB	1
7	----------	LED-L-PWB	1
8	----------	LED-R-PWB	1
9	039-2011-01	LED-FPC (WITHOUT COMPONENT)	1
10	620-1577-20	FRONT-PLATE	1
11	716-1866-00	SCREW(M1.7 x 3)	2
12	----------	SENSOR-PWB	1
13	966-0597-24	CHASSIS-ASSY	1
14	966-0600-23	LOCK-P-RE-ASSY	1
15	966-0601-21	M-GEAR-P-ASSY	1
16	966-0602-24	DR-LINK-ASSY	1
17	966-0603-21	MODE-P-ASSY	1
18	966-0604-24	LOCK-PF-ASSY	1
19	966-0605-20	SHIFT-P-ASSY	1
20	966-0607-26	COV-PLATE-ASSY	1
21	966-0606-23	HLC-PLATE-ASSY	1
22	620-1041-26	GEAR PLATE	1
23	620-1042-20	M-GEAR-H	1
24	620-1090-20	GAP PLATE	1
25	620-1568-20	RATTLE PLATE-F	2
26	620-1604-20	DR-PLATE-SPRING	1
27	621-0640-20	V-GEAR-G	1
28	622-1651-00	LOCK-RE-ROLLER	1
29	622-1652-00	LOCK-PF-ROLLER	1
30	716-1850-01	SCREW(M2 x 2)	1
31	716-3450-00	SCREW(M1.7 x 2)	4
32	716-3451-00	SCREW(M1.7 x 2.5)	4
33	743-1200-10	E-RING	2
34	743-1500-10	E-RING	1
35	746-0761-00	WASHER	1
36	750-3485-01	TENTION-SP-L	1
37	750-3497-00	GAP-P-SPRING L	1
38	966-0615-21	LOCK-L-RF-ASSY	1
39	966-0616-20	LOCK-L-LF-ASSY	1
40	966-0618-21	EJECT-B-ASSY	1
41	966-0624-27	DISC-HOL-ASSY	1
42	966-0652-22	DR-BASE-P-ASSY	1
43	HBS-535-100	TOP PLATE-ASSY	1
44	039-2009-00	PIM-FPC (WITHOUT COMPONENT)	1
45	039-2010-00	PIV-FPC (WITHOUT COMPONENT)	1
46	039-2012-00	SENSOR-FPC (WITHOUT COMPONENT)	1
47	039-2013-02	MOS-FPC (WITHOUT COMPONENT)	1
48	039-2014-01	L-MOTOR-FPC (WITHOUT COMPONENT)	1
49	347-6657-01	LO-COVER SHEET	1
50	620-1576-20	LO-MOTOR-PLT	1
51	738-1422-11	SCREW(M1.4 x 2.2)	2
52	347-6974-21	FPC COVER	1
53	620-1056-22	HLR-PLATE-L	1
54	620-1066-20	LOCK LINK-LR	1
55	620-1067-21	SLIDE PLATE L	1
56	620-1068-22	SLIDE PLATE-R	1
57	620-1071-21	EJECT ARM	1
58	620-1072-20	EJECT PLATE	1
59	620-1083-20	FPC-PLATE	1
60	620-1580-20	HLR-PLATE-R	1
61	621-0641-21	PI-HOLDER-M	1
62	621-0656-21	PI-HOLDER-V	1
63	622-1622-20	SL-G-ROLLER	2
64	622-1623-00	SL-G-ROLLER-R	2
65	622-1648-23	DU-STP-SLEEVE	1
66	622-1650-23	COV-PLATE PIN B	2
67	716-1866-00	SCREW(M1.7 x 3)	2
68	716-1873-00	SCREW(M2 x 1.6)	1
69	716-3449-00	SCREW(M2 x 3)	15
70	716-3459-00	SCREW(M1.7 x 5)	1
71	716-3466-02	SCREW(M2 x 6)	1
72	743-1500-10	E-RING	12
73	746-0624-00	WASHER	1
74	746-0712-23	WASHER	1
75	750-3478-01	TOP-P-SP-L	2
76	750-3479-01	TOP-P-SP-R	1
77	750-3480-01	DR-LOCK-SP	1
78	750-3483-00	EJECT-A-SPRING	1
79	750-3484-01	DR-BASE-SPRING	1
80	750-3486-01	LO-TENSION-SP	1
81	750-3489-01	DRIVE-P-SPRING	1
82	750-3496-00	GAP-P-SPRING R	1
83	750-6711-01	DU-STP-SPRING	1
84	750-6712-01	DR-LOCK-SP-B	1


CD changer mechanism section: Drive unit

* The exploded view is on page 12.

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-532-100	CLAMP SUB-ASSY	1
2	SMA-185-101	SPINDLE MOTOR-ASSY	1
3	SMA-191-100	SLED MOTOR-ASSY	1
4	HBS-515-101	LS-ASSY	1
5	966-0649-82	DRIVE PLT-ASSY	1
6	966-0650-20	SPRING-PLT-ASSY	1
7	969-0011-00	PICK UP-ASSY	1
8	039-2015-01	P/U-FPC (WITHOUT COMPONENT)	1
9	039-2016-02	M/S-FPC (WITHOUT COMPONENT)	1
10	347-6632-00	PU-SHEET	1
11	HBS-542-101	D-SHIFT-PLATE ASSY	1
12	620-1078-20	PUSH PLATE	1
13	620-1080-22	PU-GUIDE-PLATE	1
14	620-1081-20	SCREW PUSH-PLT	1
15	620-1587-83	SH-SPRING-PLT	1
16	620-1730-81	SCREW-HOL-PLT	1

NO.	PART NO.	DESCRIPTION	Q'TY
17	621-0670-20	LS-HOLDER-L	1
18	621-0673-20	D-GEAR-A	1
19	621-0674-20	D-GEAR-B	1
20	621-0675-20	D-GEAR-C	1
21	621-0683-21	DU-STOPPER	1
22	750-3504-00	CLAMP-A-SPRING	1
23	716-3511-00	SCREW(phi1.4 x 3)	2

NO.	PART NO.	DESCRIPTION	Q'TY
24	716-3470-00	SCREW(M1.7 x 3)	5
25	716-3474-00	SCREW(M1.7 x 3)	2
26	738-1720-17	PRECISION SCREW(M1.7 x 2)	2
27	738-2025-17	PRECISION SCREW(M2 x 2.5)	2
28	743-1500-10	E-RING	1
29	750-3487-00	SHIFT-P-SPRING	1

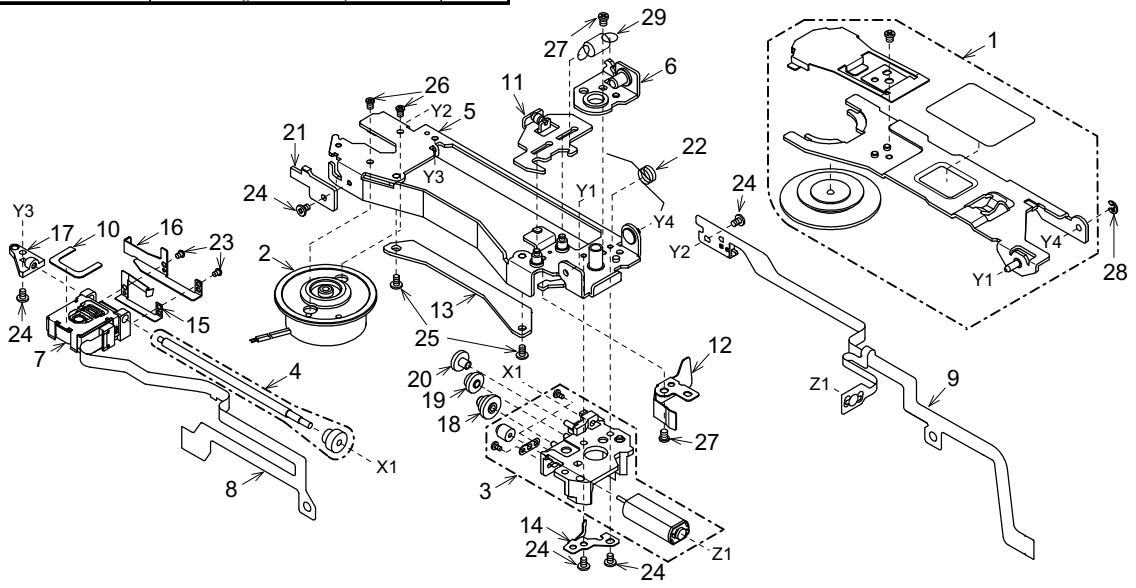


Tape mechanism section

* The exploded view is on page 13.

NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-22	DECK PLATE ASSY	1
2	960-4261-20	HEAD PLATE ASSY	1
3	960-4262-04	FF/REW-P ASSY	1
4	960-4263-03	IDLER-P-ASSY L	1
5	960-4264-03	IDLER-P-ASSY R	1
6	960-4266-20	MODE PLATE ASSY	1
7	960-4269-05	ROLLER ASSY F	1
8	960-4270-05	ROLLER ASSY R	1
9	960-4348-03	REEL ASSY F	1
10	960-4349-03	REEL ASSY R	1
11	960-4389-20	EJECT SUB ASSY	1
11-1	750-3020-01	SWITCH PLATE SPRING	1
12	960-4338-09	BOTTOM SUB ASSY	1
12-1	960-4295-02	BOTTOM P-ASSY	1
12-2	099-9926-01	BOTTOM PWB (WITHOUT COMPONENT)	1
12-3	013-3951-32	SWITCH(MODE)	1
12-4	013-3953-01	SWITCH(METAL)	1
12-5	051-1776-00	IC	1
12-6	746-0767-00	WASHER	2
13	960-4282-06	DETECT SUB ASSY	1
14	960-4301-02	PLAY LINK ASSY	1
15	----------	SIDE PWB	1
16	----------	REAR PWB	1
17	SMA-168-100	MAIN MOTOR ASSY	1
18	SMA-169-100	POWER MOTOR ASSY	1
19	011-0328-01	HEAD	1
20	602-0118-00	BELT	1
21	604-0046-00	TENSION PULLEY	1
22	606-0093-07	PACK GUIDE	1
23	610-0342-01	HEAD P-ROLLER	1
24	610-0343-00	GUIDE A-ROLLER	1

NO.	PART NO.	DESCRIPTION	Q'TY
25	611-0091-03	FLYWHEEL	2
26	613-0662-00	IDLER GEAR	2
27	613-0286-03	FF/REW GEAR	2
28	613-0288-01	HELICAL GEAR	1
29	613-0289-01	GEAR A	1
30	613-0337-20	POWER GEAR	1
31	630-2597-01	CHANGE LINK	1
32	630-2598-05	EJECT LINK	1
33	630-2600-01	ADJUST LINK	1
34	630-2601-02	MOTOR PLATE	1
35	630-2626-06	PWB FRAME	1
36	630-2642-01	GUIDE ARM	1
37	631-1992-02	PACK STOPPER	1
38	631-1993-01	SLIDE BUSH	2
39	716-0484-00	SCREW(M2x2.5)	13
40	716-1676-00	PWB SCREW(M2.6x6)	2
41	716-0833-10	SCREW(M2x5.6)	2
42	746-0624-00	WASHER	2
43	746-0724-00	WASHER	6
44	746-0761-00	WASHER	2
45	746-0762-00	WASHER	1
46	750-2946-02	PINCH SPRING	1
47	750-2947-04	EJECT P-SPRING	1
48	750-2949-00	SLIDE SPRING	2
49	750-3017-02	IDLER P-SPRING	1
50	074-0898-10	OUTLET SOCKET(10P)	1
51	802-4906-60	WIRE(RED)	1
52	806-4914-60	WIRE(BLUE)	1
53	816-2349-00	WIRE(WHITE)	1
54	013-3906-00	SWITCH(TAPE IN)	1
55	074-1012-20	OUTLET SOCKET(20P)	1
56	076-0368-10	PLUG(10P)	1

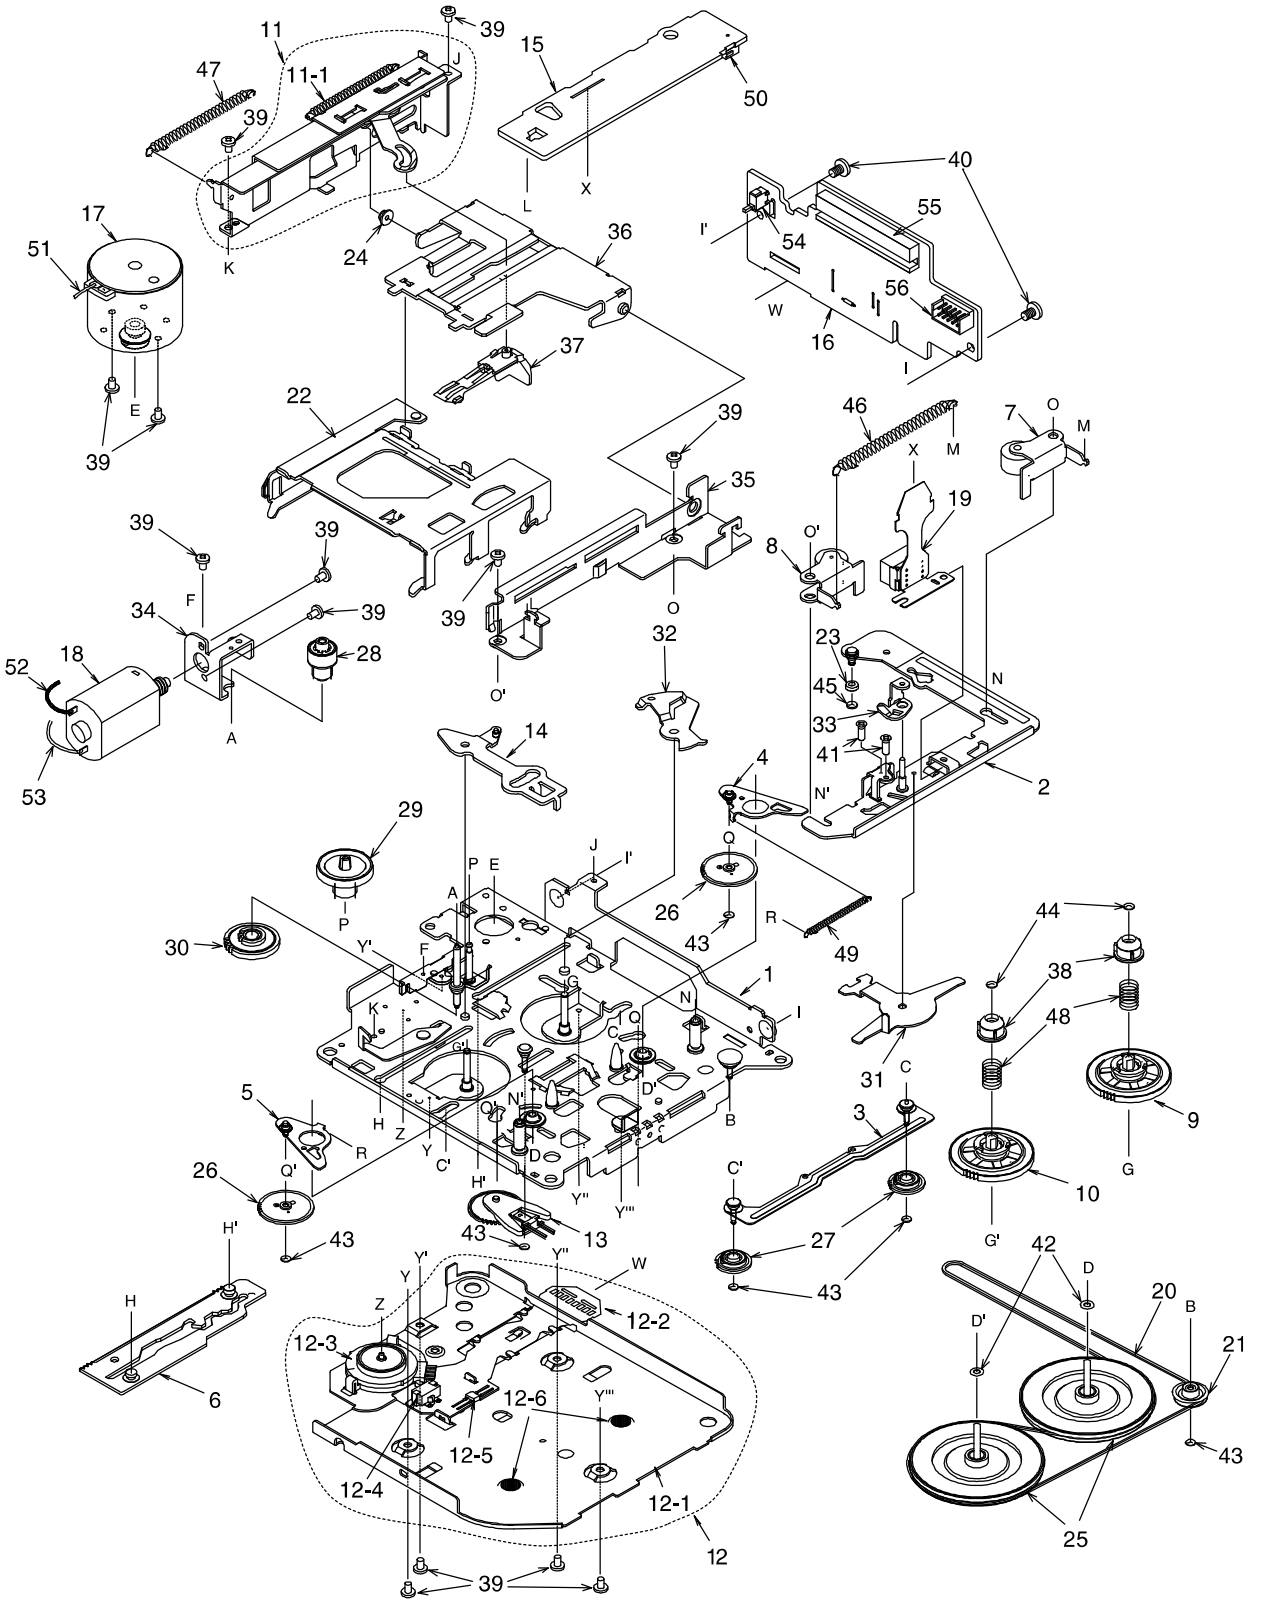

PN-2532D-B/
D-C/2548N-D

ELECTRICAL PARTS LIST

Main PWB(B1) section

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.
Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION
BL101	880-1921U	TUNER
C101	166-1511-50	150pF CH
C102	166-4701-50	47pF CH
C103	166-4701-50	47pF CH
C104	178-1542-78	0.15uF
C105	168-1032-55	0.01uF K
C106	168-1032-55	0.01uF K
C107	178-1052-78	1uF
C108	187-1063-37	16V 10uF
C109	168-3322-55	3300pF K
C110	168-1022-55	1000pF K
C111	168-4732-78	0.047uF K
C112	166-1501-50	15pF CH
C114	178-2242-78	0.22uF
C115	166-1007-50	10pF CH
C116	188-4763-18	6.3V 47uF
C117	168-5612-55	560pF Z
C118	178-1052-78	1uF
C119	166-4701-50	47pF CH
C120	188-2253-68	50V 2.2uF
C121	188-1073-28	10V 100uF
C122	043-0277-51	0.022uF
C123	166-5601-50	56pF CH
C124	168-1042-78	16V 0.1uF
C125	188-1073-28	10V 100uF
C126	168-3312-55	330pF K
C129	168-1042-78	16V 0.1uF
C130	188-1073-28	10V 100uF
C132	178-1052-78	1uF
C133	168-1232-55	0.012uF K
C134	186-1053-69	50V 1uF
C135	188-4763-38	16V 47uF
C136	043-0277-51	0.022uF
C138	168-1022-55	1000pF K
C140	188-4763-38	16V 47uF
C141	168-2232-55	0.022uF K
C142	166-1011-50	100pF CH
C143	166-1011-50	100pF CH
C144	166-1011-50	100pF CH
C145	166-1011-50	100pF CH
C146	166-1801-50	18pF CH
C147	168-3932-78	0.039uF K
C148	168-3932-78	0.039uF K
C149	168-3932-78	0.039uF K
C150	168-3932-78	0.039uF K
C151	166-1801-50	18pF CH
C152	168-4722-55	4700pF K
C153	166-1201-50	12pF CH
C154	168-1032-55	0.01uF K
C156	166-2201-50	22pF CH
C158	166-2201-50	22pF CH
C159	168-1022-55	1000pF K
C160	166-2201-50	22pF CH
C161	187-1073-37	16V 100uF
C162	168-1042-78	16V 0.1uF
C163	168-1022-55	1000pF K
C201	168-2222-55	2200pF K(2548N)
C204	042-0592-58	16V 10uF(2548N)
C205	042-0592-58	16V 10uF(2548N)
C206	042-0592-58	16V 10uF(2548N)
C207	042-0592-58	16V 10uF(2548N)
C208	166-5096-50	5pF CH(2548N)
C209	166-5096-50	5pF CH(2548N)
C210	166-2201-50	22pF CH(2548N)
C211	166-2201-50	22pF CH(2548N)
C212	166-5096-50	5pF CH(2548N)
C213	166-5096-50	5pF CH(2548N)
C305	163-2263-35	16V 22uF
C307	042-0592-73	50V 1uF
C308	188-1053-68	50V 1uF
C309	188-1053-68	50V 1uF(2548N)
C310	188-1053-68	50V 1uF(2548N)
C311	188-1053-68	50V 1uF
C312	042-0592-73	50V 1uF
C316	188-1053-68	50V 1uF
C317	188-1053-68	50V 1uF
C323	178-1842-78	0.18uF
C324	178-1842-78	0.18uF
C325	178-1842-78	0.18uF
C326	178-1842-78	0.18uF
C327	168-8212-55	820pF K
C328	168-8212-55	820pF K
C329	168-8212-55	820pF K
C330	168-8212-55	820pF K
C331	042-0592-58	16V 10uF
C332	042-0592-58	16V 10uF
C333	168-1832-55	0.018uF K
C334	168-1022-55	1000pF K
C401	168-1042-78	16V 0.1uF
C402	168-1042-78	16V 0.1uF
C403	168-1042-78	16V 0.1uF
C404	168-1042-78	16V 0.1uF
C405	042-1505-82	16V 10uF
C406	168-1042-78	16V 0.1uF
C408	178-1052-78	1uF
C409	168-2232-55	0.022uF K
C410	168-1042-78	16V 0.1uF
C412	166-1011-50	100pF CH
C414	166-1011-50	100pF CH
C416	166-1011-50	100pF CH
C417	166-1011-50	100pF CH
C418	168-1022-55	1000pF K
C420	188-4763-18	6.3V 47uF
C421	168-1042-78	16V 0.1uF
C422	168-1022-55	1000pF K
C423	168-1042-78	16V 0.1uF
C424	168-1032-55	0.01uF K
C434	168-2222-55	2200pF K(2548N)
C461	178-1052-78	1uF
C462	166-1011-50	100pF CH
C463	166-1011-50	100pF CH
C464	166-1011-50	100pF CH
C465	166-1011-50	100pF CH
C466	166-1011-50	100pF CH
C501	168-1042-78	16V 0.1uF
C502	188-1073-28	10V 100uF
C503	188-1063-38	16V 10uF
C504	187-1073-37	16V 100uF
C505	168-1042-78	16V 0.1uF
C506	163-1073-35	16V 100uF
C507	187-1073-37	16V 100uF
C508	187-1073-37	16V 100uF
C509	042-0423-94	10V 4.7uF TAN
C510	168-1042-78	16V 0.1uF
C511	188-1063-38	16V 10uF
C515	188-4763-38	16V 47uF
C601	168-2222-55	2200pF K
C602	168-2222-55	2200pF K
C603	168-2222-55	2200pF K
C604	168-2222-55	2200pF K
C605	168-2222-55	2200pF K
C606	168-2222-55	2200pF K
C607	168-2222-55	2200pF K
C608	168-2222-55	2200pF K
C609	168-2222-55	2200pF K
C610	168-2222-55	2200pF K
C611	172-1041-15	0.1uF
C612	042-1551-02	16V 1000uF
C613	188-1053-68	50V 1uF
C614	172-1041-15	0.1uF(2532D)
C615	188-1063-38	16V 10uF(2532D)
C620	168-2232-55	0.022uF K
C701	188-1053-68	50V 1uF
C702	188-1053-68	50V 1uF
C705	042-0592-58	16V 10uF
C706	042-0592-58	16V 10uF
C707	042-0592-58	16V 10uF
C708	042-0592-58	16V 10uF
C711	166-5601-50	56pF CH
C712	166-5601-50	56pF CH
C713	166-2201-50	22pF CH
C714	166-2201-50	22pF CH
C715	166-2201-50	22pF CH
C716	166-2201-50	22pF CH
C717	166-5601-50	56pF CH
C718	166-5601-50	56pF CH
C719	166-5601-50	56pF CH
C720	166-5601-50	56pF CH
C721	166-2201-50	22pF CH
C722	166-2201-50	22pF CH
C723	166-2201-50	22pF CH
C724	166-2201-50	22pF CH
C725	166-5601-50	56pF CH
C726	166-5601-50	56pF CH
C727	042-1548-52	10V 220uF
C728	042-1548-52	10V 220uF
C729	042-1548-52	10V 220uF
C730	042-1548-52	10V 220uF
C731	042-1548-52	10V 220uF
C732	042-1548-52	10V 220uF
C733	042-1548-52	10V 220uF
C734	042-1548-52	10V 220uF
C737	042-1548-52	10V 220uF
C740	187-4763-35	16V 47uF
C743	188-1063-38	16V 10uF
C744	042-1562-65	10V 220uF
C745	166-2201-50	22pF CH
C1001	042-1562-67	16V 10uF
C1002	042-1562-67	16V 10uF
C1003	042-1562-67	16V 10uF
C1004	042-1562-67	16V 10uF
C1006	168-1022-55	1000pF K
C1007	168-2232-55	0.022uF K

REF No.	PART No.	DESCRIPTION
C1010	168-1022-55	1000pF K
C1011	168-1022-55	1000pF K
C1012	188-1066-38	16V 10uF NP
C1013	188-1066-38	16V 10uF NP
C1017	168-1022-55	1000pF K
C1018	168-1022-55	1000pF K
CCT401	050-0122-50	1/10W 10k ohm x4J
CCT402	050-0140-54	1/32W 1k ohm x4J
CCT403	050-0140-54	1/32W 1k ohm x4J
CCT404	050-0140-54	1/32W 1k ohm x4J
CCT405	050-0140-54	1/32W 1k ohm x4J
CCT406	050-0140-54	1/32W 1k ohm x4J
CCT407	050-0140-54	1/32W 1k ohm x4J
CCT408	050-0140-54	1/32W 1k ohm x4J
CCT409	050-0140-54	1/32W 1k ohm x4J
CCT411	050-0140-54	1/32W 1k ohm x4J
CCT412	050-0140-54	1/32W 1k ohm x4J
CCT414	050-0140-54	1/32W 1k ohm x4J
CCT415	050-0140-54	1/32W 1k ohm x4J
CCT417	050-0140-54	1/32W 1k ohm x4J
D101	001-3205-90	1SV251
D102	001-3205-90	1SV251
D400	001-0516-90	MA111
D400	001-0517-90	1SS355
D401	001-0516-90	MA111
D401	001-0517-90	1SS355
D402	001-0529-44	MA8082M
D402	001-4301-44	HZU8.2B2
D409	001-0529-48	MA8091H(2548N)
D409	001-4301-48	HZU9.1B3(2548N)
D501	001-0504-49	HZS9C3L
D502	001-0504-48	HZS9C2L
D503	001-0466-90	S5688B
D504	001-0466-90	S5688B
D602	001-0529-34	MA8062L
D602	001-4301-34	HZU6.2B1
D603	001-0466-90	S5688B
D604	001-0516-90	MA111
D604	001-0517-90	1SS355
D605	001-0466-90	S5688B
D606	001-0516-90	MA111
D606	001-0517-90	1SS355
D607	001-2015-00	RL253
D608	001-0466-90	S5688B
D703	001-0354-91	MA151WK
D703	001-0356-91	1SS184
D1002	001-0422-38	MTZJ36
D1003	001-0529-44	MA8082M
D1003	001-4301-44	HZU8.2B2
D1006	001-0330-90	1SS119
D1007	001-0330-90	1SS119
D1009	001-0584-35	MA8240
D1009	001-4302-35	UDZTE-17
D1010	001-0516-90	MA111
D1010	001-0517-90	1SS355
IC101	051-4617-90	LA1061M-TE-L
IC102	051-4607-90	SAA6581
IC103	051-3020-90	NJM4565V
IC104	051-6212-08	LC72191JM
IC201	051-3020-90	NJM4565V(2548N)
IC302	051-5027-00	LC75412WS
IC401	051-1014-08	TA7291F
IC403	051-3034-90	NJM4558V

REF No.	PART No.	DESCRIPTION
IC404	052-3177-03	M30624MGA-550GP(2532D)
IC404	052-3177-12	M30624MGA-598GP(2548N)
IC405	051-5436-08	S-80933ANMP
IC501	051-1834-00	LM2936
IC601	051-5418-08	S80827AN
IC701	051-1407-00	NJM4556AL
IC702	051-1407-00	NJM4556AL
IC703	051-1407-00	NJM4556AL
IC704	051-1407-00	NJM4556AL
IC705	051-3020-90	NJM4565V
IC707	051-3020-90	NJM4565V
J201	074-1236-10	8P(2548N)
J402	074-1192-22	22P
J601	074-1141-00	NS10+6
J1001	074-1087-12	A-16 REMO
J1002	074-1013-30	A-12MW ND
L101	010-2198-65	0.1uH
L102	010-2198-53	5.6uH
L103	010-2312-52	0.27uH
L104	010-2003-04	NLV32 22uH J
L106	010-6009-76	22uH
L151	010-6009-76	22uH
L401	010-3407-66	22uH
L601	010-8028-00	COIL
P201	076-0368-18	18P
P202	076-0368-06	6P
P402	074-0834-10	10P(2548N)
P402	076-0540-10	10P(2532D)
P403	076-0509-20	20P
P1001	074-0898-18	18P
P1002	074-0898-06	6P
Q101	192-2712-00	2SC2712
Q101	193-0601-00	2SD601A
Q102	192-2712-00	2SC2712
Q102	193-0601-00	2SD601A
Q103	125-2004-92	RN1402(2548N)
Q103	125-2005-91	UN2211
Q104	125-2004-92	RN1402(2548N)
Q104	125-2005-91	UN2211
Q105	192-2412-50	2SC2412K-R.S (2548N)
Q105	192-2712-51	2SC2712 G,L
Q106	125-2004-92	RN1402(2548N)
Q106	125-2005-91	UN2211
Q107	192-2412-50	2SC2412K-R.S (2548N)
Q107	192-2712-51	2SC2712 G,L
Q109	190-1298-00	2SA1298
Q111	190-1298-00	2SA1298
Q113	192-2712-00	2SC2712
Q113	193-0601-00	2SD601A
Q201	125-2004-92	RN1402(2548N)
Q201	125-2005-91	UN2211(2548N)
Q202	125-9002-92	RN4602(2548N)
Q202	125-9003-92	IMD3(2548N)
Q401	125-2004-96	RN1406
Q401	125-2020-96	DTC143ZK(2548N)
Q402	190-1428-00	2SA1428
Q404	125-2004-92	RN1402(2548N)
Q404	125-2005-91	UN2211
Q405	190-1037-00	2SA1037

REF No.	PART No.	DESCRIPTION
Q405	191-0709-00	2SB709A Q,R,S
Q411	192-2712-00	2SC2712(2548N)
Q411	193-0601-00	2SD601A(2548N)
Q415	125-2004-92	RN1402(2548N)
Q415	125-2005-91	UN2211
Q416	192-2712-00	2SC2712
Q416	193-0601-00	2SD601A
Q417	192-2712-00	2SC2712
Q417	193-0601-00	2SD601A
Q418	125-0001-91	UN2111
Q418	125-0002-92	RN2402(2548N)
Q418	125-0014-92	DTA114EK(2548N)
Q501	103-2353-00	2SD2353
Q502	193-2118-00	2SD2118F5 Q,R,S
Q503	193-1858-00	2SD1858
Q504	125-9002-92	RN4602(2548N)
Q504	125-9003-92	IMD3
Q505	125-2004-92	RN1402(2548N)
Q505	125-2005-91	UN2211
Q506	190-1015-00	2SA1015
Q506	190-1048-00	2SA1048
Q507	191-1205-60	2SB1205R,S,T
Q508	125-9002-92	RN4602(2548N)
Q508	125-9003-92	IMD3
Q603	192-2712-00	2SC2712
Q603	193-0601-00	2SD601A
Q604	125-2004-92	RN1402(2548N)
Q604	125-2005-91	UN2211
Q605	190-1037-00	2SA1037
Q605	191-0709-00	2SB709A Q,R,S
Q606	100-1359-00	2SA1359
Q607	125-2004-92	RN1402(2548N)
Q607	125-2005-91	UN2211
Q608	190-1037-00	2SA1037
Q608	191-0709-00	2SB709A Q,R,S
Q609	100-1359-00	2SA1359
Q701	192-2712-00	2SC2712
Q701	193-0601-00	2SD601A
Q703	192-2712-00	2SC2712
Q703	193-0601-00	2SD601A
Q704	190-1037-00	2SA1037
Q704	191-0709-00	2SB709A Q,R,S
Q705	190-1037-00	2SA1037
Q705	191-0709-00	2SB709A Q,R,S
Q706	190-1037-00	2SA1037
Q706	191-0709-00	2SB709A Q,R,S
Q707	190-1037-00	2SA1037
Q707	191-0709-00	2SB709A Q,R,S
Q1001	125-0001-91	UN2111
Q1001	125-0002-92	RN2402(2548N)
Q1001	125-0014-92	DTA114EK(2548N)
Q1003	192-2712-00	2SC2712
Q1003	193-0601-00	2SD601A
Q1006	125-2004-92	RN1402(2548N)
Q1006	125-2005-91	UN2211
Q1007	125-9006-90	IMX1
Q1007	125-9007-90	HN1C01F(2548N)
Q1008	125-0001-91	UN2111
Q1008	125-0002-92	RN2402(2548N)
Q1008	125-0014-92	DTA114EK(2548N)
Q1009	192-2712-00	2SC2712
Q1009	193-0601-00	2SD601A
Q1010	125-2004-92	RN1402(2548N)

REF No.	PART No.	DESCRIPTION
Q1010	125-2005-91	UN2211
Q1011	192-2712-00	2SC2712
Q1011	193-0601-00	2SD601A
R101	119-1041-15	1/10W 100k ohm
R102	119-1041-15	1/10W 100k ohm
R103	119-2731-15	1/10W 27k ohm
R104	119-2731-15	1/10W 27k ohm
R105	119-1041-15	1/10W 100k ohm
R106	119-1041-15	1/10W 100k ohm
R107	119-1031-15	1/10W 10k ohm
R108	119-1031-15	1/10W 10k ohm
R109	119-5631-15	1/10W 56k ohm
R110	119-3911-15	1/10W 390 ohm
R111	119-4731-15	1/10W 47k ohm
R113	119-2221-15	1/10W 2.2k ohm
R114	119-1031-15	1/10W 10k ohm
R115	119-1021-15	1/10W 1k ohm
R116	119-1021-15	1/10W 1k ohm
R117	119-4721-15	1/10W 4.7k ohm
R118	119-1021-15	1/10W 1k ohm
R119	119-1021-15	1/10W 1k ohm
R120	119-2221-15	1/10W 2.2k ohm
R121	119-4721-15	1/10W 4.7k ohm
R122	119-8201-15	1/10W 82 ohm
R124	119-3321-15	1/10W 3.3k ohm
R125	119-1031-15	1/10W 10k ohm
R126	116-1501-15	1/4W 15 ohm
R127	116-1001-15	1/4W 10 ohm
R128	119-2221-15	1/10W 2.2k ohm
R129	119-2221-15	1/10W 2.2k ohm
R130	119-1031-15	1/10W 10k ohm
R131	119-1031-15	1/10W 10k ohm
R132	119-4721-15	1/10W 4.7k ohm
R133	119-1021-15	1/10W 1k ohm
R134	119-2221-15	1/10W 2.2k ohm
R135	119-1021-15	1/10W 1k ohm
R136	119-1021-15	1/10W 1k ohm
R137	116-2701-15	1/4W 27 ohm
R138	119-1021-15	1/10W 1k ohm
R140	119-4721-15	1/10W 4.7k ohm
R141	119-4731-15	1/10W 47k ohm
R142	119-1031-15	1/10W 10k ohm
R143	119-1031-15	1/10W 10k ohm
R144	119-1021-15	1/10W 1k ohm
R145	119-1011-15	1/10W 100 ohm
R146	119-4741-15	1/10W 470k ohm
R161	119-0000-05	1/10W 0 ohm JM
R162	119-0000-05	1/10W 0 ohm JM
R201	116-1211-15	1/4W 120 ohm (2548N)
R203	119-1831-15	1/10W 18k ohm (2548N)
R206	119-1031-15	1/10W 10k ohm (2548N)
R207	119-1031-15	1/10W 10k ohm (2548N)
R208	032-0106-65	1/8W 100k ohm D (2548N)
R209	032-0106-65	1/8W 100k ohm D (2548N)
R210	032-0106-65	1/8W 100k ohm D (2548N)
R211	032-0106-65	1/8W 100k ohm D (2548N)
R212	032-0106-69	1/8W 39k ohm D (2548N)
R213	032-0106-69	1/8W 39k ohm D (2548N)
R214	032-0106-69	1/8W 39k ohm D (2548N)
R215	032-0106-69	1/8W 39k ohm D (2548N)
R217	119-0000-05	1/10W 0 ohm JM (2548N)
R218	119-0000-05	1/10W 0 ohm JM
R310	119-2731-15	1/10W 27k ohm
R311	119-2731-15	1/10W 27k ohm
R312	119-2731-15	1/10W 27k ohm
R313	119-2731-15	1/10W 27k ohm
R320	119-2731-15	1/10W 27k ohm
R321	119-2731-15	1/10W 27k ohm
R351	119-4721-15	1/10W 4.7k ohm
R352	119-4721-15	1/10W 4.7k ohm
R355	119-4721-15	1/10W 4.7k ohm
R356	119-4721-15	1/10W 4.7k ohm
R401	119-1031-15	1/10W 10k ohm
R402	119-1031-15	1/10W 10k ohm
R403	116-1221-15	1/4W 1.2k ohm
R404	116-1221-15	1/4W 1.2k ohm
R405	119-1031-15	1/10W 10k ohm
R406	116-1001-15	1/4W 10 ohm
R407	116-1001-15	1/4W 10 ohm
R408	116-1001-15	1/4W 10 ohm
R409	116-1001-15	1/4W 10 ohm
R410	119-2221-15	1/10W 2.2k ohm
R411	119-1041-15	1/10W 100k ohm (2548N)
R412	119-1021-15	1/10W 1k ohm
R414	119-4731-15	1/10W 47k ohm
R415	119-4731-15	1/10W 47k ohm (2532D)
R416	119-4731-15	1/10W 47k ohm
R417	119-1021-15	1/10W 1k ohm
R418	119-1041-15	1/10W 100k ohm
R419	119-4731-15	1/10W 47k ohm
R421	119-4731-15	1/10W 47k ohm
R423	119-4731-15	1/10W 47k ohm
R425	119-4731-15	1/10W 47k ohm
R428	119-4731-15	1/10W 47k ohm
R429	119-1021-15	1/10W 1k ohm
R431	119-4731-15	1/10W 47k ohm
R433	119-4731-15	1/10W 47k ohm
R434	119-2231-15	1/10W 22k ohm
R436	119-2231-15	1/10W 22k ohm
R437	032-0140-52	1/10W 33k ohm F
R438	119-2231-15	1/10W 22k ohm
R440	119-4731-15	1/10W 47k ohm
R442	119-1021-15	1/10W 1k ohm
R444	119-4731-15	1/10W 47k ohm
R445	032-0140-52	1/10W 33k ohm F
R447	119-4731-15	1/10W 47k ohm
R448	032-0140-00	1/10W 56k ohm F
R449	032-0140-00	1/10W 56k ohm F
R452	119-1031-15	1/10W 10k ohm
R453	119-4731-15	1/10W 47k ohm
R458	119-4731-15	1/10W 47k ohm
R459	119-4731-15	1/10W 47k ohm
R460	119-1041-15	1/10W 100k ohm
R463	119-4731-15	1/10W 47k ohm
R469	119-4731-15	1/10W 47k ohm
R472	119-4741-15	1/10W 470k ohm (2548N)
R479	119-4741-15	1/10W 470k ohm (2548N)
R480	119-4731-15	1/10W 47k ohm
R481	119-4731-15	1/10W 47k ohm
R487	119-4731-15	1/10W 47k ohm
R488	119-4731-15	1/10W 47k ohm
R489	119-4731-15	1/10W 47k ohm
R492	119-4731-15	1/10W 47k ohm
R493	119-4731-15	1/10W 47k ohm
R494	119-4731-15	1/10W 47k ohm
R495	119-1031-15	1/10W 10k ohm
R496	119-5631-15	1/10W 56k ohm
R497	119-1021-15	1/10W 1k ohm
R501	111-2211-98	1/4W 220 ohm
R502	116-3911-15	1/4W 390 ohm
R503	119-1031-15	1/10W 10k ohm
R504	116-1011-15	1/4W 100 ohm
R505	119-4721-15	1/10W 4.7k ohm
R506	119-1021-15	1/10W 1k ohm
R507	119-1031-15	1/10W 10k ohm
R508	116-7501-15	1/4W 75 ohm
R509	116-2201-15	1/4W 22 ohm
R510	116-2201-15	1/4W 22 ohm
R511	119-1041-15	1/10W 100k ohm
R601	119-4741-15	1/10W 470k ohm
R602	119-2741-15	1/10W 270k ohm
R605	119-1031-15	1/10W 10k ohm
R606	119-5611-15	1/10W 560 ohm
R607	116-1221-15	1/4W 1.2k ohm
R608	119-4721-15	1/10W 4.7k ohm
R609	111-6891-98	1/4W 6.8 ohm
R610	111-6891-98	1/4W 6.8 ohm
R611	116-1221-15	1/4W 1.2k ohm
R612	119-4721-15	1/10W 4.7k ohm
R613	116-1221-15	1/4W 1.2k ohm
R614	111-5691-98	1/4W 5.6 ohm
R615	111-5691-98	1/4W 5.6 ohm
R616	116-1531-15	1/4W 15k ohm
R617	114-2291-18	1W2.2ohm(2532D)
R618	119-0000-05	1/10W 0 ohm (2532D)
R701	119-4731-15	1/10W 47k ohm
R702	119-1041-15	1/10W 100k ohm
R703	119-1031-15	1/10W 10k ohm
R704	119-4731-15	1/10W 47k ohm
R705	119-1041-15	1/10W 100k ohm
R706	119-1031-15	1/10W 10k ohm
R708	119-5621-15	1/10W 5.6k ohm
R709	119-5621-15	1/10W 5.6k ohm
R710	119-5621-15	1/10W 5.6k ohm
R711	119-5621-15	1/10W 5.6k ohm
R714	119-3321-15	1/10W 3.3k ohm
R715	119-1031-15	1/10W 10k ohm
R716	119-1031-15	1/10W 10k ohm
R717	119-3321-15	1/10W 3.3k ohm
R718	119-1031-15	1/10W 10k ohm
R719	119-1031-15	1/10W 10k ohm
R720	119-3321-15	1/10W 3.3k ohm
R721	119-3321-15	1/10W 3.3k ohm
R722	119-2231-15	1/10W 22k ohm

REF No.	PART No.	DESCRIPTION
R723	119-2231-15	1/10W 22k ohm
R733	119-1001-15	1/10W 10 ohm
R734	119-2231-15	1/10W 22k ohm
R735	119-1001-15	1/10W 10 ohm
R736	119-1541-15	1/10W 150k ohm
R737	119-1541-15	1/10W 150k ohm
R738	119-2231-15	1/10W 22k ohm
R739	119-2231-15	1/10W 22k ohm
R740	119-1001-15	1/10W 10 ohm
R741	119-2231-15	1/10W 22k ohm
R742	119-2031-15	1/10W 20k ohm
R743	119-1001-15	1/10W 10 ohm
R744	119-3931-15	1/10W 39k ohm
R745	119-3931-15	1/10W 39k ohm
R746	119-1031-15	1/10W 10k ohm
R747	119-1031-15	1/10W 10k ohm
R748	119-2231-15	1/10W 22k ohm
R749	119-1001-15	1/10W 10 ohm

REF No.	PART No.	DESCRIPTION
R750	119-2231-15	1/10W 22k ohm
R751	119-1001-15	1/10W 10 ohm
R756	119-1031-15	1/10W 10k ohm
R757	119-1031-15	1/10W 10k ohm
R758	119-4731-15	1/10W 47k ohm
R759	119-4731-15	1/10W 47k ohm
R1002	119-3011-15	1/10W 300 ohm
R1003	119-3011-15	1/10W 300 ohm
R1004	119-1031-15	1/10W 10k ohm
R1005	119-5631-15	1/10W 56k ohm
R1006	119-1021-15	1/10W 1k ohm
R1010	119-2231-15	1/10W 22k ohm
R1015	119-4731-15	1/10W 47k ohm
R1016	119-1031-15	1/10W 10k ohm
R1017	119-1031-15	1/10W 10k ohm
R1018	119-5631-15	1/10W 56k ohm
R1019	119-5631-15	1/10W 56k ohm
R1020	119-5621-15	1/10W 5.6k ohm

REF No.	PART No.	DESCRIPTION
R1021	119-5621-15	1/10W 5.6k ohm
R1022	119-3011-15	1/10W 300 ohm
R1026	119-4731-15	1/10W 47k ohm
R1040	119-1031-15	1/10W 10k ohm
R1041	119-5631-15	1/10W 56k ohm
R1042	119-1031-15	1/10W 10k ohm
R1043	119-4721-15	1/10W 4.7k ohm
R1044	119-1531-15	1/10W 15k ohm
R1045	119-3321-15	1/10W 3.3k ohm
SUP101	060-0122-91	DSP-141N-S00B
SUP102	060-0122-91	DSP-141N-S00B
VR101	012-5203-63	470k ohm
VR102	012-5203-56	10k ohm
X101	061-3013-00	4.33MHz
X102	061-1066-00	7.2MHz
X401	060-1505-50	10MHz
PWB	039-2548-20	PWB(WITHOUT COMPONENT)

Escutcheon PWB(B2) section: PN-2532D

REF No.	PART No.	DESCRIPTION
D901	001-7069-90	LED YELLOW
D902	001-7069-90	LED YELLOW
D903	001-7069-90	LED YELLOW
D904	001-7069-90	LED YELLOW
D905	001-7069-90	LED YELLOW
D906	001-7069-90	LED YELLOW
J901	074-1151-10	10P

REF No.	PART No.	DESCRIPTION
R901	116-2221-15	1/8W 2.2k ohm
R902	116-2221-15	1/8W 2.2k ohm
R903	116-3321-15	1/8W 3.3k ohm
R904	116-6821-15	1/8W 6.8k ohm
R905	116-8211-15	1/8W 820 ohm
R906	116-8211-15	1/8W 820 ohm
S901	013-7415-50	SPVG110400

REF No.	PART No.	DESCRIPTION
S902	013-6201-51	SKPMAA
S903	013-6201-51	SKPMAA
S904	013-6201-51	SKPMAA
PWB	039-2270-02	PWB(WITHOUT COMPONENT)

Side PWB(B3) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1uF Z
C102	168-1042-78	16V 0.1uF
C104	163-1073-15	6.3V 100uF
C106	163-1063-35	16V 10uF
C107	163-1073-15	6.3V 100uF
C108	168-1042-78	16V 0.1uF
C109	168-1042-78	16V 0.1uF
C110	168-1042-78	16V 0.1uF
C111	163-1073-35	16V 100uF
C112	168-2722-55	2700pF K
C113	163-2263-35	16V 22uF
C114	163-2263-35	16V 22uF
C115	166-3311-50	330pF CH
C116	166-3311-50	330pF CH
C117	166-1011-50	100pF CH
C118	166-1011-50	100pF CH
C119	168-2722-55	2700pF K
C120	168-1022-55	1000pF K
C121	163-2263-35	16V22uF
C122	168-1022-55	1000pF K
C123	163-2263-35	16V 22uF
C124	042-0403-55	16V 33uF
C125	042-0403-55	16V 33uF
C501	163-1063-35	16V 10uF
C502	168-1045-56	0.1uF Z
C503	168-4735-56	0.047uF Z
C504	168-1045-56	0.1uF Z
D100	001-0516-90	MA111
D103	001-0504-07	HZS4BLL
D104	001-0516-90	MA111
D105	001-0529-31	MA8056-L
IC501	051-9400-28	BR93LC46F-WE2
IC502	052-5047-24	M30621MCM-4U9GP

REF No.	PART No.	DESCRIPTION
IC503	051-5418-08	S-80827ANMP-EDQ
IC504	051-1407-90	NJM4556AM
J101	074-1189-95	45P
J102	074-1191-22	22P
L101	010-3071-65	18uH
L102	010-3407-68	NLV32 33uH J
Q101	125-2004-92	RN1402
Q102	131-1188-50	2SB1188PQR
Q103	193-1758-00	2SD1758TK P,Q,R
Q104	193-1758-00	2SD1758TK P,Q,R
Q105	125-0014-92	DTA114EK
Q106	125-2004-92	RN1402
Q502	190-1162-00	2SA1162
Q503	190-1162-00	2SA1162
Q504	192-2712-00	2SC2712
Q505	125-2004-92	RN1402
Q506	125-0014-92	DTA114EK
Q507	125-0002-92	RN2402
Q508	192-2712-00	2SC2712
R101	119-4711-15	1/10W 470 ohm
R102	119-2231-15	1/10W 22k ohm
R103	119-1821-15	1/10W 1.8k ohm
R104	119-1831-15	1/10W 18k ohm
R105	116-1211-15	1/4W 120 ohm
R106	119-1041-15	1/10W 100k ohm
R107	119-4731-15	1/10W 47k ohm
R108	119-1031-15	1/10W 10k ohm
R109	119-1031-15	1/10W 10k ohm
R110	119-4741-15	1/10W 470k ohm
R111	119-4741-15	1/10W 470k ohm
R112	119-2731-15	1/10W 27k ohm
R113	119-2731-15	1/10W 27k ohm
R114	119-2731-15	1/10W 27k ohm

REF No.	PART No.	DESCRIPTION
R115	119-2731-15	1/10W 27k ohm
R116	119-5611-15	1/10W 560 ohm
R117	119-5611-15	1/10W 560 ohm
R118	119-4731-15	1/10W 47k ohm
R119	119-4731-15	1/10W 47k ohm
R120	119-3941-15	1/10W 390k ohm
R121	119-1041-15	1/10W 100k ohm
R123	119-1041-15	1/10W 100k ohm
R124	119-1041-15	1/10W 100k ohm
R125	119-1041-15	1/10W 100k ohm
R126	119-2221-15	1/10W 2.2k ohm
R504	119-5621-15	1/10W 5.6k ohm
R505	119-1031-15	1/10W 10k ohm
R506	119-1041-15	1/10W 100k ohm
R507	119-0000-05	1/10W 0 ohm JW
R509	119-4731-15	1/10W 47k ohm
R510	119-1031-15	1/10W 10k ohm
R511	119-1031-15	1/10W 10k ohm
R512	050-0145-54	1/16W 47k ohm x4
R513	119-1041-15	1/10W 100k ohm
R514	119-2241-15	1/10W 220k ohm
R515	119-2241-15	1/10W 220k ohm
R516	119-2241-15	1/10W 220k ohm
R517	119-1041-15	1/10W 100k ohm
R518	119-2241-15	1/10W 220k ohm
R522	119-1041-15	1/10W 100k ohm
R524	119-1041-15	1/10W 100k ohm
R526	119-4731-15	1/10W 47k ohm
R529	119-1021-15	1/10W 1k ohm
R531	119-1021-15	1/10W 1k ohm
R532	119-1021-15	1/10W 1k ohm
R533	119-1021-15	1/10W 1k ohm
R535	119-2231-15	1/10W 22k ohm
R536	119-2231-15	1/10W 22k ohm

REF No.	PART No.	DESCRIPTION
R538	119-1031-15	1/10W 10k ohm
R539	119-5631-15	1/10W 56k ohm
R541	119-1021-15	1/10W 1k ohm
R542	119-4721-15	1/10W 4.7k ohm
R543	119-1041-15	1/10W 100k ohm

REF No.	PART No.	DESCRIPTION
R544	119-1041-15	1/10W 100k ohm
R545	119-1041-15	1/10W 100k ohm
R546	119-1021-15	1/10W 1k ohm
R547	119-1021-15	1/10W 1k ohm
R548	119-1021-15	1/10W 1k ohm

REF No.	PART No.	DESCRIPTION
R549	119-1021-15	1/10W 1k ohm
X501	060-1505-50	10MHz
PWB	039-2433-20	PWB(WITHOUT COMPONENT)

CD PWB(B4) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF
C3	168-1042-78	16V 0.1uF
C4	042-0636-54	4V 220uF
C5	168-1042-78	16V 0.1uF
C6	046-1032-78	0.01uF
C7	168-1042-78	16V 0.1uF
C8	178-4742-78	0.47uF
C9	178-2242-78	0.22uF
C10	168-1042-78	16V 0.1uF
C11	168-1042-78	16V 0.1uF
C12	168-1042-78	16V 0.1uF
C13	046-2232-78	0.022uF
C14	168-5612-55	560pF Z
C15	168-1042-78	16V 0.1uF
C16	046-2212-58	220pF
C17	046-2212-58	220pF
C18	168-1222-55	1200pF K
C19	046-3322-58	3300pF
C20	168-3932-78	0.039uF K
C21	168-3932-78	0.039uF K
C22	042-0416-52	10V 10uF M TAN
C25	178-1052-78	1uF
C26	042-0472-91	16V 47uF
C27	178-3342-78	0.33uF
C29	168-2732-55	16V 0.027uF K
C30	042-0416-58	4V 100uF M TAN
C31	042-0636-52	4V 47uF
C32	046-1022-58	1000pF
C33	046-3322-58	3300pF
C34	168-2732-55	16V 0.027uF K
C35	178-2742-78	0.27uF
C36	178-1052-78	1uF
C37	168-1042-78	16V 0.1uF
C38	042-0472-91	16V 47uF
C39	042-0636-50	6.3V 100uF
C40	045-1211-50	120pF

REF No.	PART No.	DESCRIPTION
C41	045-1011-50	100pF
C42	168-1042-78	16V 0.1uF
C43	042-0636-52	4V 47uF
C50	168-1042-78	16V 0.1uF
C51	168-1042-78	16V 0.1uF
C60	168-5612-55	560pF Z
D1	001-0367-91	1SS226
IC1	051-6365-00	MN662785TBUC
IC2	051-9318-00	MSM51V17400D-60TS-K
IC2	051-9318-51	K4E160412C-FC60
IC3	051-6060-08	BD7961FM-E2
IC4	051-5711-90	AN8882SB-E1
J1	074-1189-95	45P
J4	074-1138-56	6P
J5	074-1201-65	15P
J6	074-1059-76	26P
L2	010-2155-93	10uH
L2	010-3050-93	10uH
Q2	131-1188-00	2SB1188
Q3	131-1188-00	2SB1188
R2	033-1041-15	1/10W 100k ohm
R4	033-3311-15	1/10W 330 ohm
R5	033-1041-15	1/10W 100k ohm
R6	033-3931-15	1/10W 39k ohm
R7	033-1041-15	1/10W 100k ohm
R8	033-5611-15	1/10W 560 ohm
R9	033-5611-15	1/10W 560 ohm
R10	033-1011-15	1/10W 100 ohm
R11	033-3911-15	1/10W 390 ohm
R12	033-2221-15	1/10W 2.2k ohm
R13	033-6831-15	1/10W 68k ohm
R14	033-5621-15	1/10W 5.6k ohm
R15	033-1021-15	1/10W 1k ohm
R16	033-5631-15	1/10W 56k ohm
R17	033-1031-15	1/10W 10k ohm

REF No.	PART No.	DESCRIPTION
R18	033-1031-15	1/10W 10k ohm
R19	033-5621-15	1/10W 5.6k ohm
R20	033-6831-15	1/10W 68k ohm
R21	033-5621-15	1/10W 5.6k ohm
R22	033-1031-15	1/10W 10k ohm
R23	033-1031-15	1/10W 10k ohm
R24	033-4731-15	1/10W 47k ohm
R25	033-3931-15	1/10W 39k ohm
R26	033-6831-15	1/10W 68k ohm
R27	033-6831-15	1/10W 68k ohm
R28	033-1031-15	1/10W 10k ohm
R29	033-2201-15	1/10W 22 ohm
R31	033-8211-15	1/10W 820 ohm
R32	033-5631-15	1/10W 56k ohm
R33	033-6831-15	1/10W 68k ohm
R34	033-3331-15	1/10W 33k ohm
R35	033-6831-15	1/10W 68k ohm
R38	033-3931-15	1/10W 39k ohm
R39	033-1831-15	1/10W 18k ohm
R40	117-1001-15	1/8W 10 ohm
R41	033-6821-15	1/10W 6.8k ohm
R42	033-6821-15	1/10W 6.8k ohm
R43	033-3331-15	1/10W 33k ohm
R44	033-5631-15	1/10W 56k ohm
R45	116-4711-15	1/4W 470 ohm
R46	117-1811-15	1/8W 180 ohm
R47	116-4711-15	1/4W 470 ohm
R48	033-1031-15	1/10W 10k ohm
R49	033-1011-15	1/10W 100 ohm
R50	050-0140-74	1/32W 12k ohm x 4J
R60	033-2221-15	1/10W 2.2k ohm
TM1	073-0768-90	TERMINAL
X1	060-1527-90	33.8688MHz
PWB	039-2398-20	PWB(WITHOUT COMPONENT)

Sensor PWB(B5) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F
PT4	060-0252-01	PT4850F
PT5	060-0252-01	PT4850F
PT6	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
S1	013-7414-50	SPVG22
PWB	039-1956-00	PWB(WITHOUT COMPONENT)

PIM-FPC PWB(B6) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB(B7) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1uF Z
C2	163-1073-35	16V100uF
D1	001-0529-29	MA8051-M
IC1	051-6044-18	BA6920FP-Y

REF No.	PART No.	DESCRIPTION
J1	074-1239-76	26P
J2	074-1100-59	9P
R1	033-1021-15	1/10W 1k ohm
R2	032-0104-59	1/4W 2.2 ohm

REF No.	PART No.	DESCRIPTION
R3	032-0104-59	1/4W 2.2 ohm
S2	013-7412-50	SPVG21
PWB	039-2242-00	PWB(WITHOUT COMPONENT)

PIV-FPC PWB(B8) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB(B9) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800
LED4	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1954-20	PWB(WITHOUT COMPONENT)

LED-R-PWB(B10) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800
LED6	001-7042-00	GL4800

REF No.	PART No.	DESCRIPTION
PWB	039-1955-20	PWB(WITHOUT COMPONENT)

L-Motor-FPC(B11) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC(B12) section: CD changer mechanism

REF No.	PART No.	DESCRIPTION
M2	SMA-185-101	SPINDLE

REF No.	PART No.	DESCRIPTION
M3	SMA-191-100	SLED

REF No.	PART No.	DESCRIPTION
S3	013-7414-50	SPVG22

Side PWB(B13) section: Tape mechanism

REF No.	PART No.	DESCRIPTION
C1	168-5612-55	560pF
C2	168-5612-55	560pF
C3	168-5612-55	560pF
C4	168-5612-55	560pF
C5	178-1055-79	1uF
C6	168-1232-55	0.012uF
C7	168-1232-55	0.012uF
C8	168-4732-78	0.047uF
C9	168-4732-78	0.047uF
C10	168-5612-55	560pF
C11	168-5612-55	560pF
C12	168-1042-78	0.1uF
C13	168-1042-78	0.1uF
C14	168-1032-55	0.01uF
C15	163-4753-50	35V 4.7uF

REF No.	PART No.	DESCRIPTION
C16	168-1032-55	0.01uF
C17	178-4745-79	0.47uF
C18	168-1042-78	0.1uF
C19	163-2263-35	16V 22uF
IC1	051-5204-00	HA12216F
J1	074-0898-10	10P
L1	010-2198-76	0.047uH
L2	010-2198-76	0.047uH
R1	119-2731-15	1/10W 27k ohm
R2	119-2731-15	1/10W 27k ohm
R3	119-2731-15	1/10W 27k ohm
R4	119-2731-15	1/10W 27k ohm
R5	119-1811-15	1/10W 180 ohm
R6	119-1811-15	1/10W 180 ohm
R7	119-3341-15	1/10W 330k ohm

REF No.	PART No.	DESCRIPTION
R8	119-3341-15	1/10W 330k ohm
R9	119-1131-15	1/10W 11k ohm
R10	119-1131-15	1/10W 11k ohm
R11	119-1531-15	1/10W 15k ohm
R12	119-1531-15	1/10W 15k ohm
R13	032-0140-80	1/10W 18k ohm F
R14	119-1531-15	1/10W 15k ohm
R15	119-1031-15	1/10W 10k ohm
R16	119-3921-15	1/10W 3.9k ohm
R17	119-1241-15	1/10W 120k ohm
R18	119-2231-15	1/10W 22k ohm
VR1	012-6014-56	10k ohm
VR2	012-6014-56	10k ohm
PWB	039-1912-01	PWB(WITHOUT COMPONENT)

Bottom PWB(B14) section: Tape mechanism

REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5801K

REF No.	PART No.	DESCRIPTION
SW1	013-3953-01	SPPB32

REF No.	PART No.	DESCRIPTION
SW2	013-3951-32	MODE SWITCH

Rear PWB(B15) section: Tape mechanism

REF No.	PART No.	DESCRIPTION
P1	076-0368-10	10P
J2	074-1012-20	20P

REF No.	PART No.	DESCRIPTION
R19	111-5611-91	1/4WS 560 ohm
S1	013-3906-00	SPPB51

REF No.	PART No.	DESCRIPTION
PWB	039-1913-00	PWB(WITHOUT COMPONENT)

CIRCUIT DIAGRAM

Escutcheon PWB(B2) section: PN-2532D

