
9. EXPLODED VIEWS AND PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *Screws adjacent to ▼ mark on product are used for disassembly.*
● *For the applying amount of lubricants or glue, follow the instructions in this manual. (In the case of no amount instructions, apply as you think it appropriate.)*

9.1 PACKING SECTION

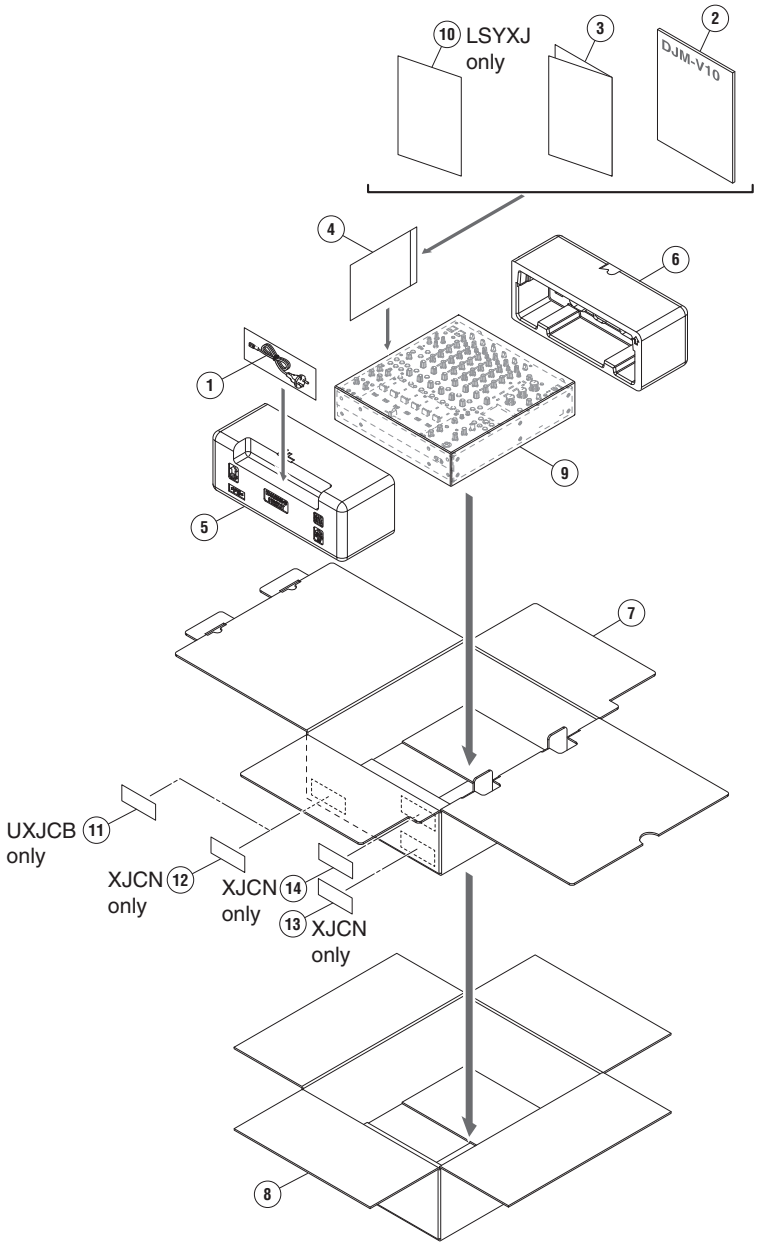

(1) PACKING SECTION PARTS LIST


Mark	No.	Description	Part No.
⚠	1	Power cord	See Contrast table (2)
	2	Quick Start Guide	See Contrast table (2)
	3	Precautions for Use	See Contrast table (2)
NSP	4	Polyethylene Bag	AHG7117
	5	Packing Pad	DHA2001
	6	Packing Pad	DHA2002
	7	Packing Case	DHG3755
	8	Master Carton	See Contrast table (2)
	9	Mirror Mat (1200*1000)	DHL1169
NSP	10	Warranty	See Contrast table (2)
	11	Label	See Contrast table (2)
	12	Label	See Contrast table (2)
NSP	13	Label	See Contrast table (2)
NSP	14	Label	See Contrast table (2)

(2) CONTRAST TABLE

DJM-V10/LSYXJ, UXJCB and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-V10/LSYXJ	DJM-V10/UXJCB	DJM-V10/XJCN
⚠	1	Power Cord	DDG1124	DDG1123	DDG1125
	2	Quick Start Guide	DRH1574	DRH1574	DRH1575
	3	Precautions for Use	DRH1579	DRH1579	DRH1580
	8	Master Carton	DHG3712	DHG3713	DHG3754
NSP	10	Warranty	DRY1274	Not used	Not used
	11	Label	Not used	DRW2803	Not used
	12	Label	Not used	Not used	DRW2805
NSP	13	Label	Not used	Not used	DRW2841
NSP	14	Label	Not used	Not used	DRW2842

9.2 EXTERIOR SECTION

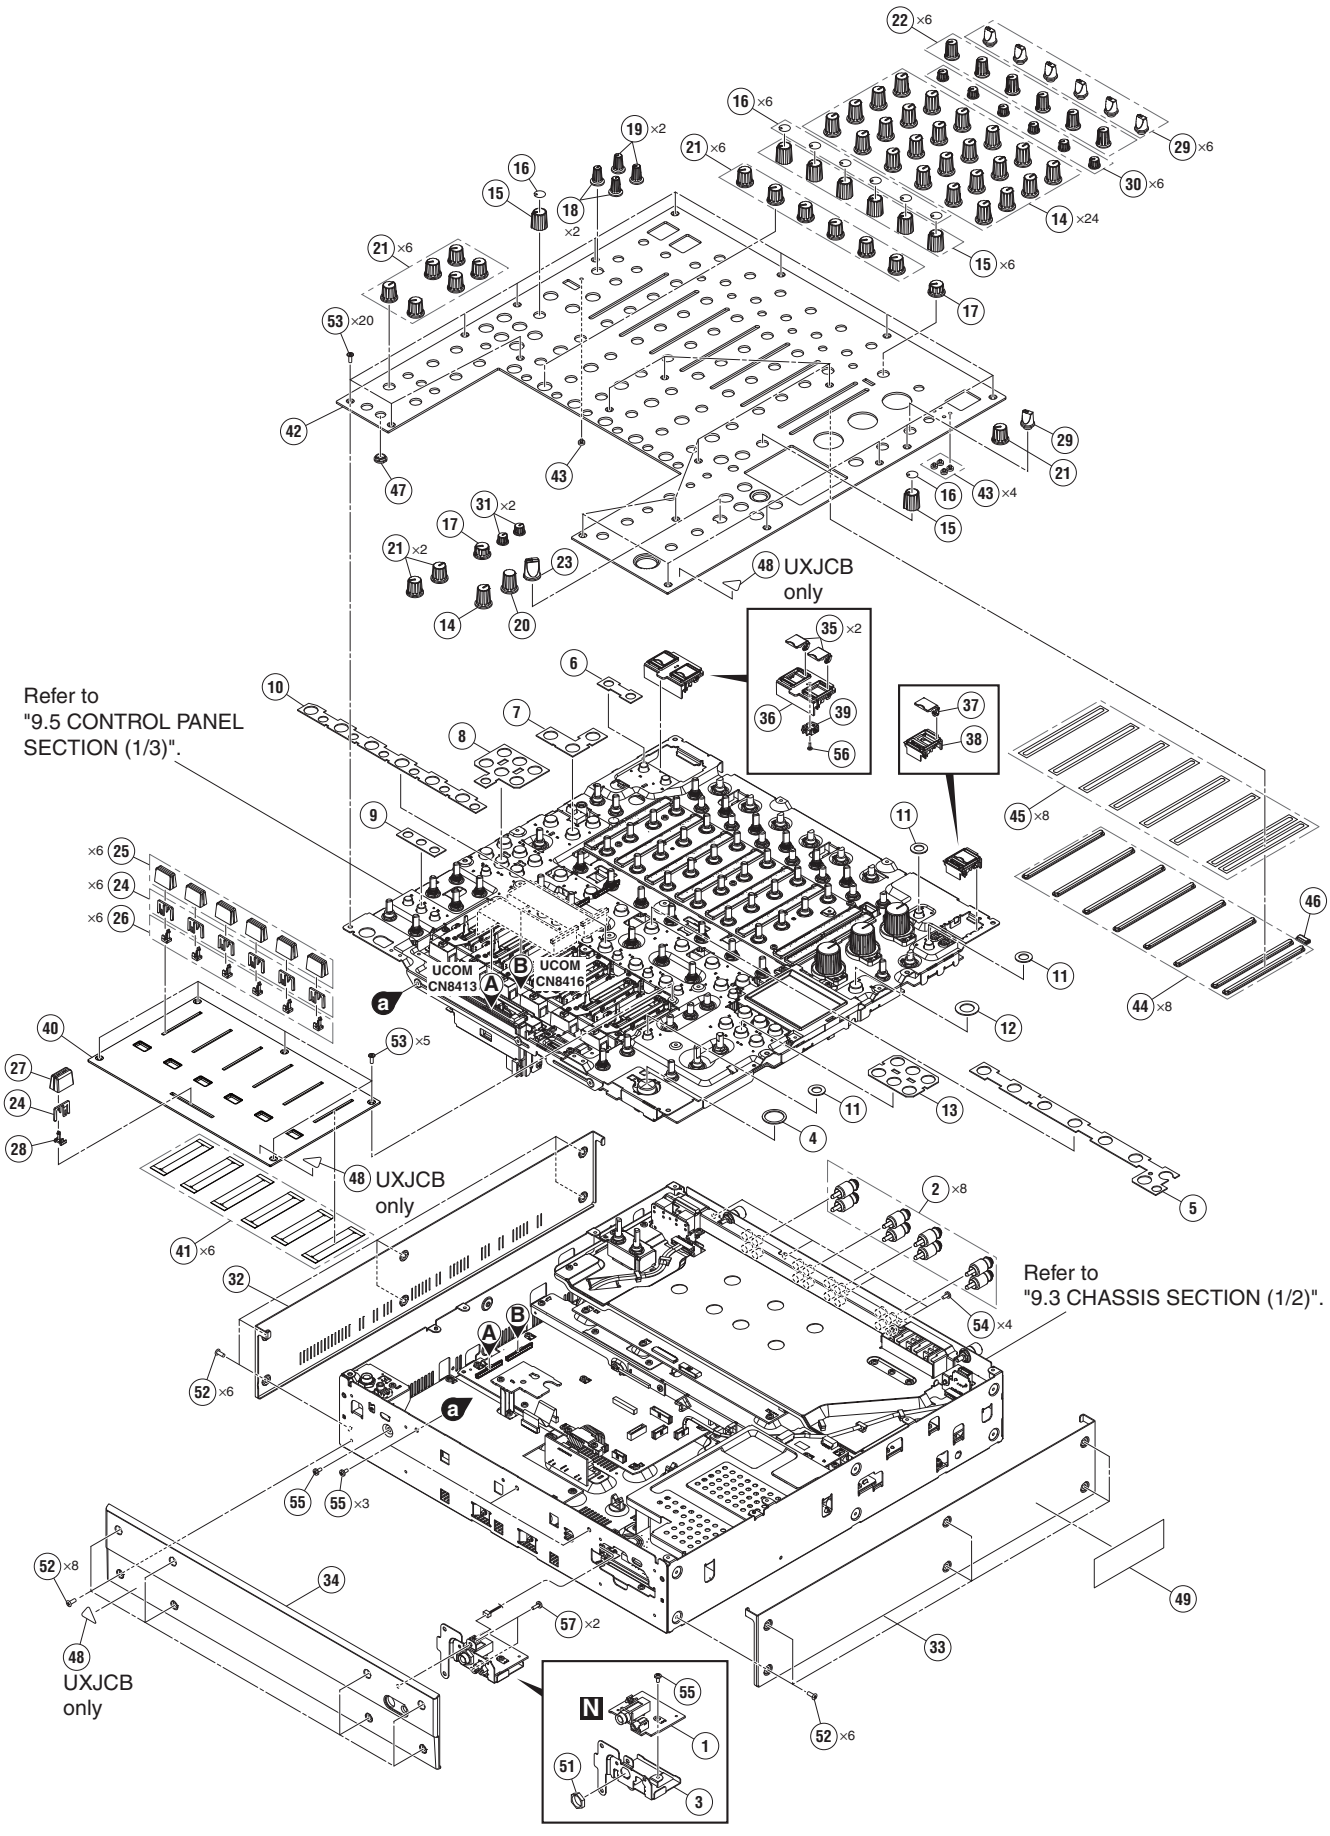

(1) EXTERIOR SECTION PARTS LIST


Mark	No.	Description	Part No.
	1	HPJC Assy	DWX4339
	2	RCA Plug	DKM1026
	3	Stay	DNG1123
	4	SW Packing (EF)	DEC2929
	5	Sheet	DEC3937
	6	Sheet	DEC3940
	7	Sheet	DEC3941
	8	Sheet	DEC3942
	9	Sheet	DEC3943
	10	Sheet	DEC3944
	11	Sheet	DEC3945
	12	Sheet	DEC3946
	13	Sheet	DEC3947
	14	Knob	DAA1434
	15	Knob	DAA1419
	16	Plate	DNG1133
	17	Rotary Knob Low (BN)	DAA1265
	18	Knob/RSW	DAA1307
	19	Knob	DAA1418
	20	Rotary SW Knob (C)	DAA1180
	21	Knob	DAA1435
	22	Knob	DAA1417
	23	Select Knob	DAA1205
	24	Slider Knob 2	DAC2685
	25	Knob	DAC3539
	26	Slider Knob Stopper	DNK5888
	27	Knob	DAC3238
	28	Stopper	DNK6440
	29	Knob	DAA1415
	30	Knob	DAA1416
	31	Knob	DAA1420
	32	Panel	DAH3281
	33	Panel	DAH3282
⚠	34	Panel	DNK6875
	35	Lid	DNK6550
	36	Panel	DNK6887
	37	Lid	DNK6652
	38	Panel	DNK6876
	39	Holder	DNK6549
	40	Panel	DAH3283
	41	Packing	DEC3642
	42	Control Panel	DNB1276
	43	Lens	DNK4532
	44	Lens	DNK6877
	45	DS Tape	DEH1110
	46	Lens	DNK6516
	47	Holder	DNK6552
NSP	48	Label	See Contrast table (2)
NSP	49	Name Label	See Contrast table (2)
	50	•••••	
	51	Nut M12	DBN1018
	52	Screw 3*8 (FE)	DBA1290
	53	Screw	DBA1451
	54	Screw	BBZ30P060FTB
	55	Screw	BBZ30P060FTC
	56	Screw	BPZ20P060FTC
	57	Screw	BPZ30P080FNI

(2) CONTRAST TABLE

DJM-V10/LSYXJ, UXJCB and XJCN are constructed the same except for the following:

Mark	No.	Symbol and Description	DJM-V10/LSYXJ	DJM-V10/UXJCB	DJM-V10/XJCN
NSP	48	Label	Not used	DRW1975	Not used
NSP	49	Name Label	DAL1359	DAL1360	DAL1362


9.3 CHASSIS SECTION (1/2)

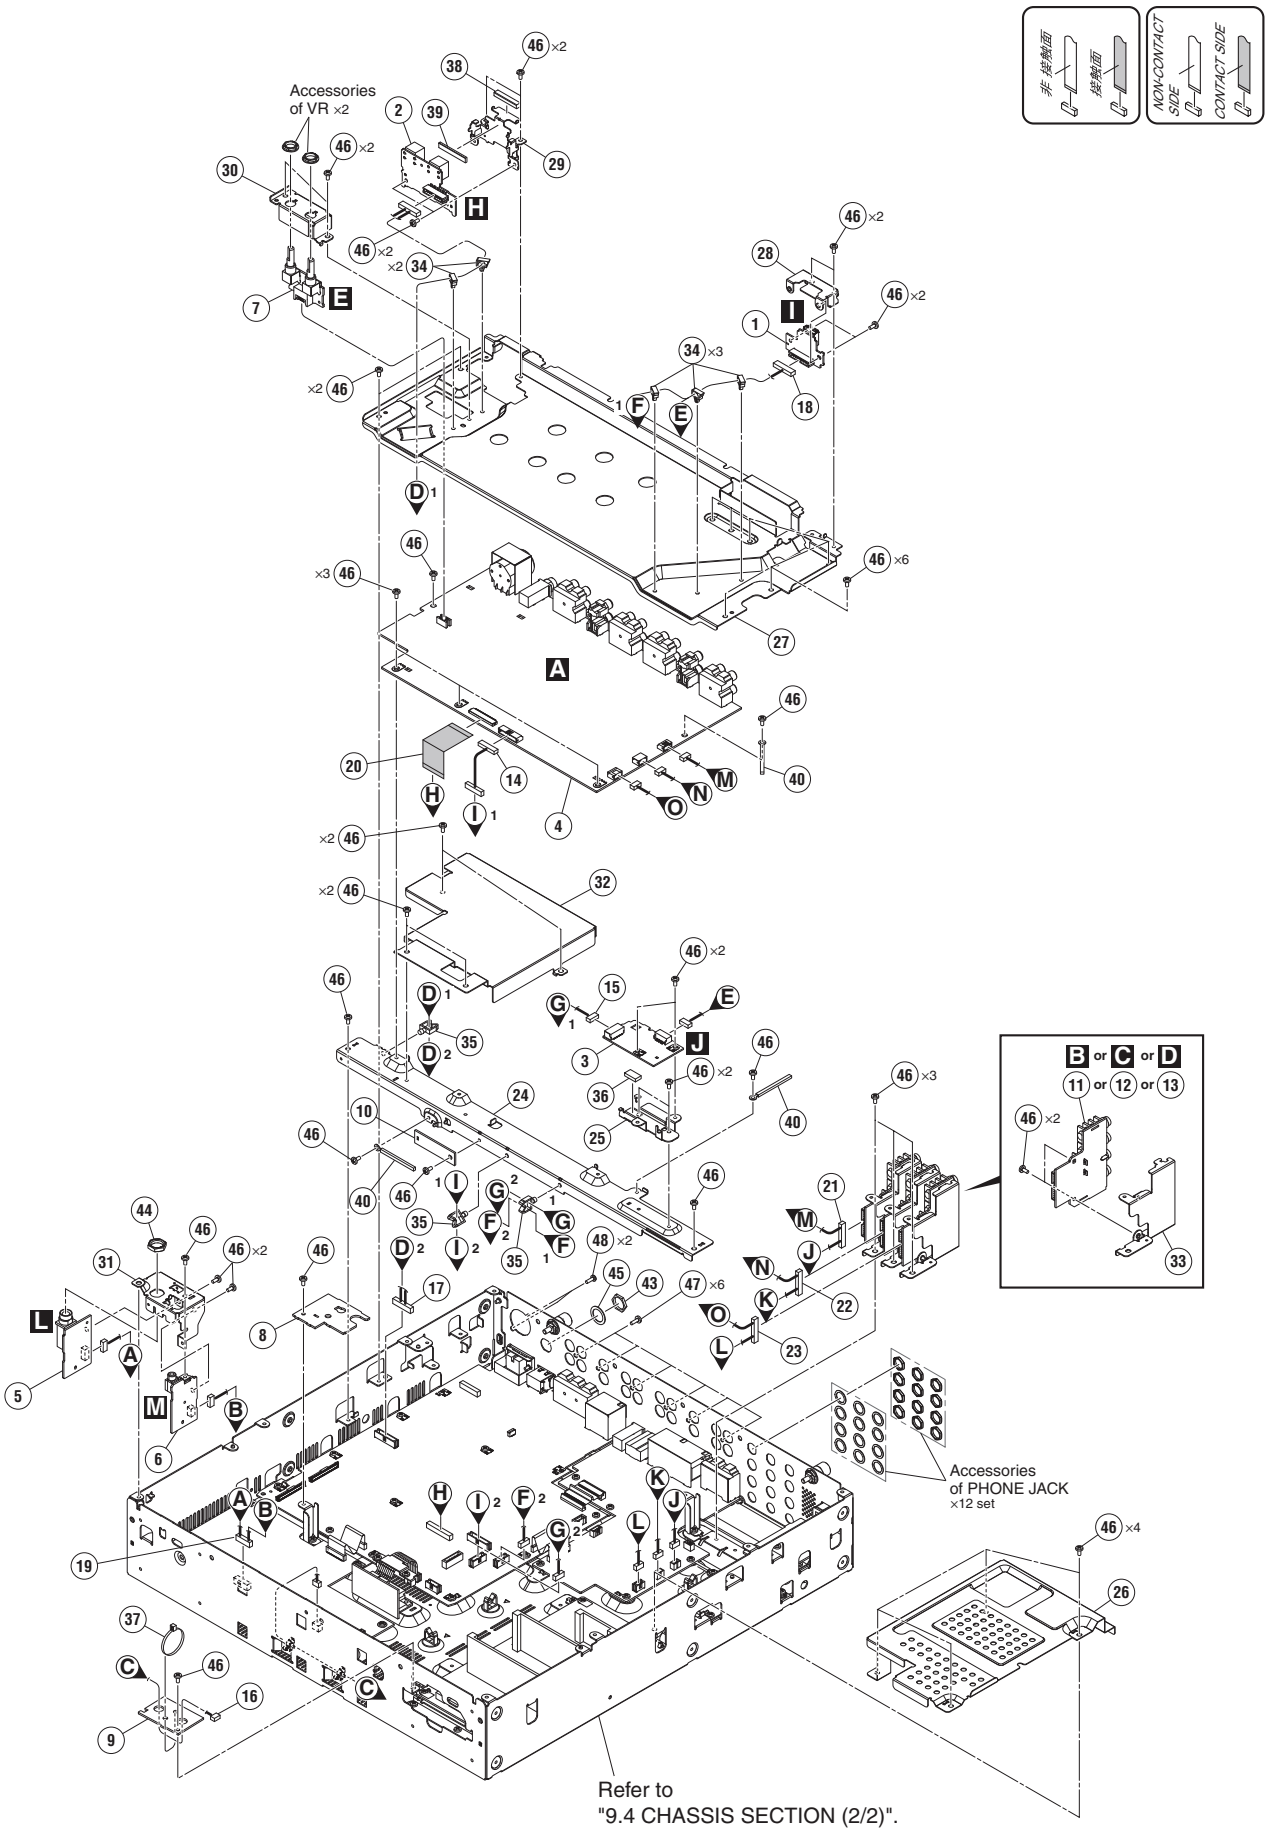

CHASSIS SECTION (1/2) PARTS LIST

Mark	No.	Description	Part No.
	1	USBA Assy	DWX4332
	2	USBB Assy	DWX4333
	3	USBP Assy	DWX4334
	4	AIN Assy	DWX4364
	5	HPJK Assy	DWX4337
	6	HPJM Assy	DWX4338
	7	MTRM Assy	DWX4348
	8	FGP2 Assy	DWX4349
	9	CCB1 Assy	DWX4410
	10	FGP1 Assy	DWX4395
	11	SNRT1 Assy	DWX4355
	12	SNRT2 Assy	DWX4356
	13	SNRT3 Assy	DWX4357
	14	Crimp Connector	PF10PP-D07
	15	Crimp Connector	PF06PP-S15
	16	Connector Assy	PF03PP-D30
	17	Shielded Conn-Cable	DDA1095
	18	Shielded Conn-Cable	DDA1096
	19	Shielded Conn-Cable	DDA1061
	20	FFC	DDD1956
	21	Shielded Conn-Cable	DDA1097
	22	Shielded Conn-Cable	DDA1098
	23	Shielded Conn-Cable	DDA1099
	24	Stay	DNG1120
	25	Stay	DNF1951
	26	Cover	DNF2066
	27	Shield Plate	DNG1119
	28	Stay	DNG1125
	29	Stay	DNF2069
	30	Stay	DNF1958
	31	Stay	DNG1122
	32	Shield Plate	DNG1140
	33	Shield Case	DNG1127
	34	Locking Mini Clamp	DEC2439
	35	Holder	VEC1355
	36	Sheet	DEC3621
	37	Cable Tie	ZCA-SKB90BK
	38	EMC Gasket	DEC3637
	39	EMC Gasket	DEC3638
	40	Cord Clamper (Steel)	RNH-184
	41	•••••	
	42	•••••	
	43	Nut (M12)	NKX2FNI
	44	Nut M12	DBN1018
	45	Washer	DEC2920
	46	Screw	BBZ30P060FTC
	47	Screw	BPZ30P080FTB
	48	Screw	PPZ30P080FTB

9.4 CHASSIS SECTION (2/2)

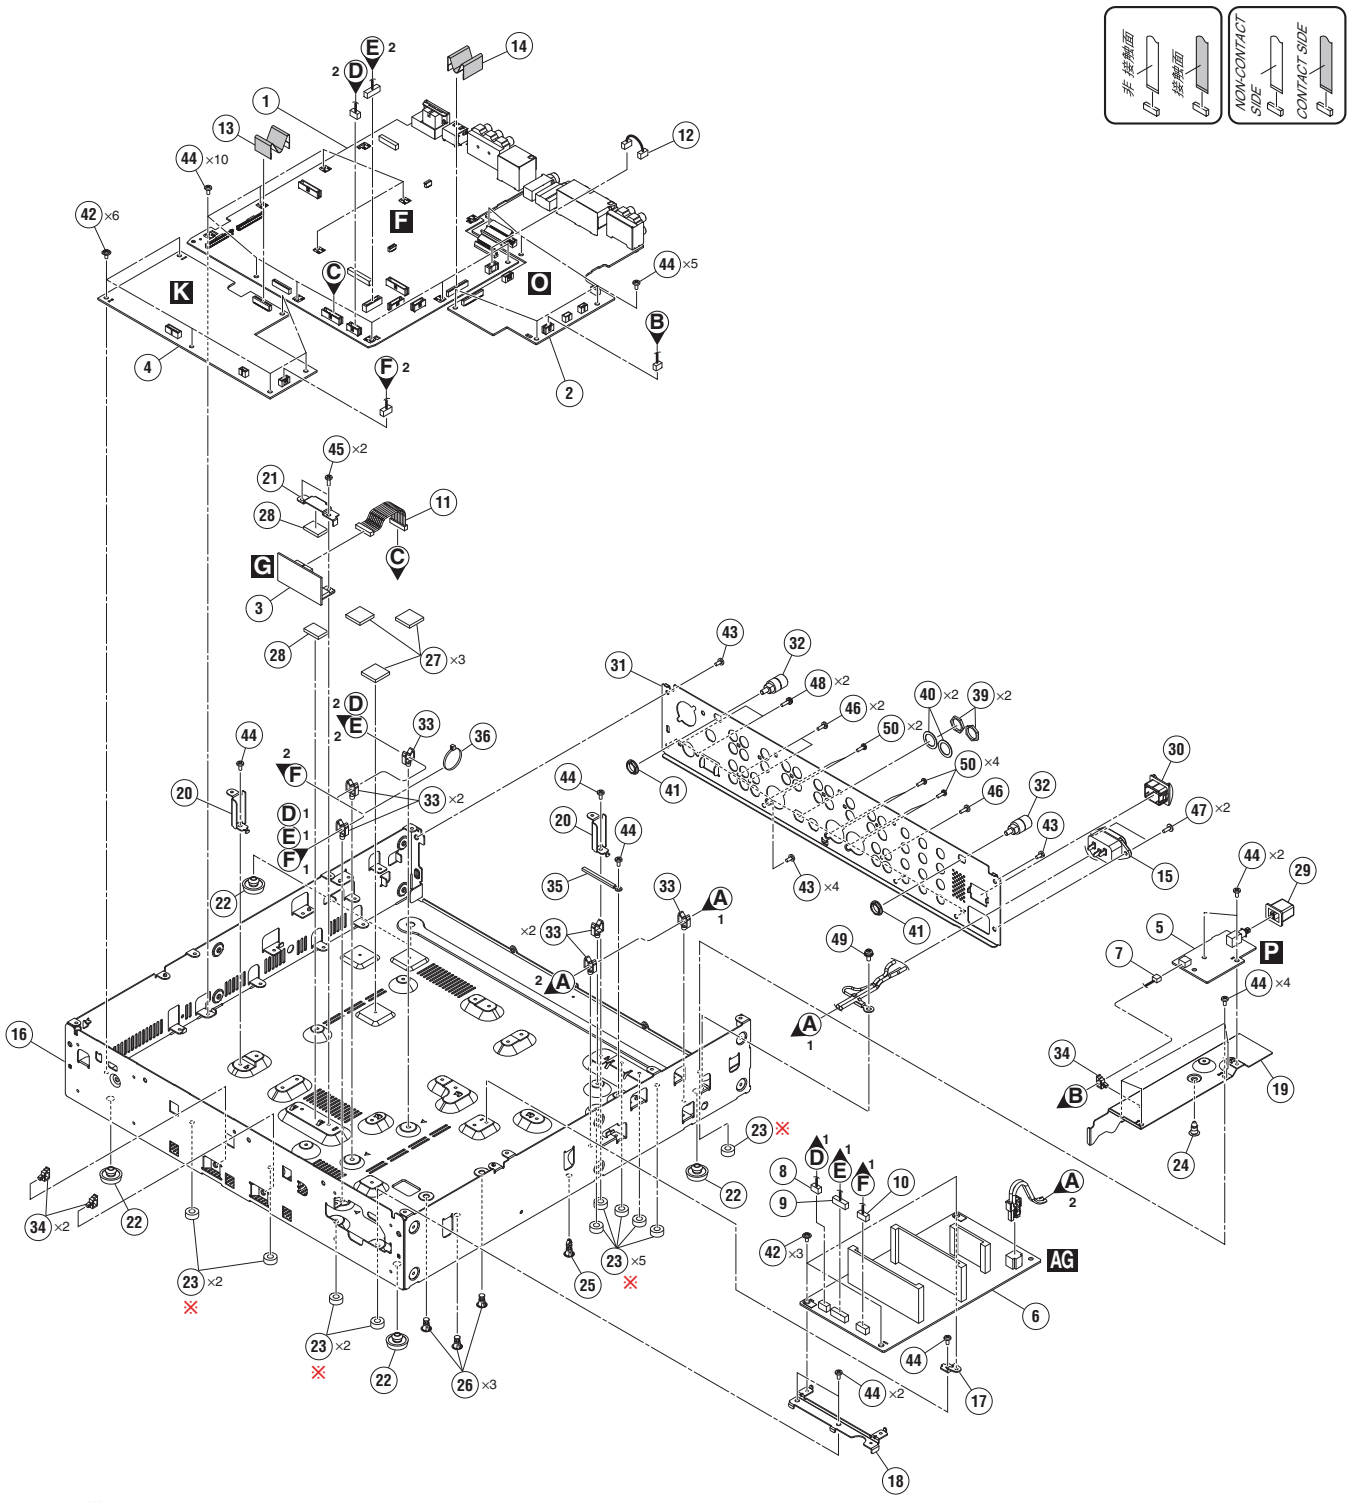


Note ※ :
AEB7092 is nonreusable
to fix it with DS tape.


注意 ※ :
AEB7092は両面テープで固定のため
再利用不可です。

CHASSIS SECTION (2/2) PARTS LIST

Mark	No.	Description	Part No.
	1	MAIN Assy	DWX4331
	2	AOUT Assy	DWX4336
	3	REGB Assy	DWX4366
	4	HPPW Assy	DWX4344
	5	PSWB Assy	DWX4350
⚠	6	SW POWER SUPPLY	DWR1581
	7	Connector Assy	PF03PP4B12
	8	Crimp Connector	PF05PP-S30
	9	Crimp Connector	PF08PP-S30
	10	Crimp Connector	PF04PP-S15
	11	Crimp Connector	PF09PP-S07
	12	Connector Assy	PF04PP-D05
	13	FFC	DDD1955
	14	FFC	DDD1957
⚠	15	AC Inlet	DKP3992
	16	Chassis	DNA1476
NSP	17	PCB Stay (FE)	VNE2489
	18	Stay	DNG1129
	19	Shield Case	DNG1121
	20	Stay	DNG1126
	21	Cover	DNG1138
	22	Foot (Rubber)	REC-434
NSP	23	Spacer	AEB7092
NSP	24	PCB Holder	PNW1706
	25	Spacer	DEC3850
	26	Spacer	DEC3878
	27	Sheet	DEC3618
	28	Sheet	DEC3901
	29	Power Knob	DAC2306
	30	Power Knob Guard	DNK4534
	31	Rear Panel	DNC2139
	32	Earth Terminal	DKE1019
	33	Holder	VEC1355
	34	Locking Mini Clamp	DEC2439
	35	Cord Clamper (Steel)	RNH-184
	36	Cable Tie	ZCA-SKB90BK
	37	•••••	
	38	•••••	
	39	Nut (M12)	NKX2FNI
	40	Washer	DEC2920
	41	Flange Nut M9	DBN1008
	42	Screw	ABZ30P060FTC
	43	Screw	BBZ30P060FTB
	44	Screw	BBZ30P060FTC
	45	Screw	BBZ30P080FTB
	46	Screw	BPZ30P080FTB
	47	Screw	IBZ30P080FTB
	48	Screw	PMH30P100FTB
	49	Screw	PMH40P080FTC
	50	Screw	PPZ30P080FTB

9.5 CONTROL PANEL SECTION (1/3)



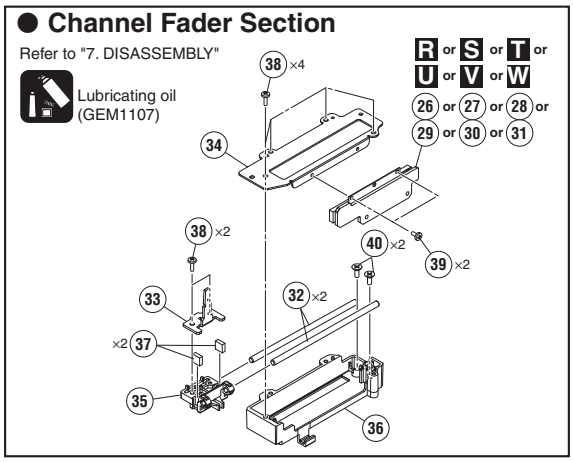


CONTROL PANEL SECTION (1/3) PARTS LIST

Mark	No.	Description	Part No.
	1	LEDB Assy	DWX4342
	2	CRFSW Assy	DWX4365
	3	CRFDG Assy	DWX4396
	4	SWBTM Assy	DWX4397
	5	SWTOP Assy	DWX4398
	6	Connector Assy	PF04PP-B12
	7	Crimp Connector	PF06PP-B10
	8	FFC	DDD1961
	9	FFC	DDD1968
	10	Holder	DNK6880
	11	Ring/TRQ	DNK6116
	12	Base/TRQ	DNK6068
	13	Spring/TRQ	DBH1792
	14	•••••	
	15	Knob/ELA	DAA1295
	16	Holder	DNK6878
	17	Sheet	DEC3885
	18	Stay	DND1312
	19	Slide SW Cap (W)	DAC2401
	20	Sheet	DEC3902
	21	Locking Mini Clamp	DEC2439
	22	Screw	BBZ30P060FTC
	23	Screw	BSZ20P040FTB
	24	Screw	DBA1451
	25	•••••	
		Channel Fader Section	
	26	CHF1 Assy	DWX4358
	27	CHF2 Assy	DWX4359
	28	CHF3 Assy	DWX4360
	29	CHF4 Assy	DWX4361
	30	CHF5 Assy	DWX4362
	31	CHF6 Assy	DWX4363
	32	Guide Shaft VK1	DLA1978
	33	Lever Plate	DNH2954
	34	Cover	DNG1131
	35	Slider	DNK6889
	36	Holder	DNK6884
	37	Cushion	DEC3640
	38	Screw	BPZ20P060FTC
	39	Screw	BSZ20P040FTB
	40	Screw	CPZ26P080FTC
	41	•••••	

Mark	No.	Description	Part No.
		Crossfader Section	
	42	1..Cross Fader Service Assy	DEA1096
NSP	43	2..CRFB Assy	DWX4340

9.6 CONTROL PANEL SECTION (2/3)

• Bottom view

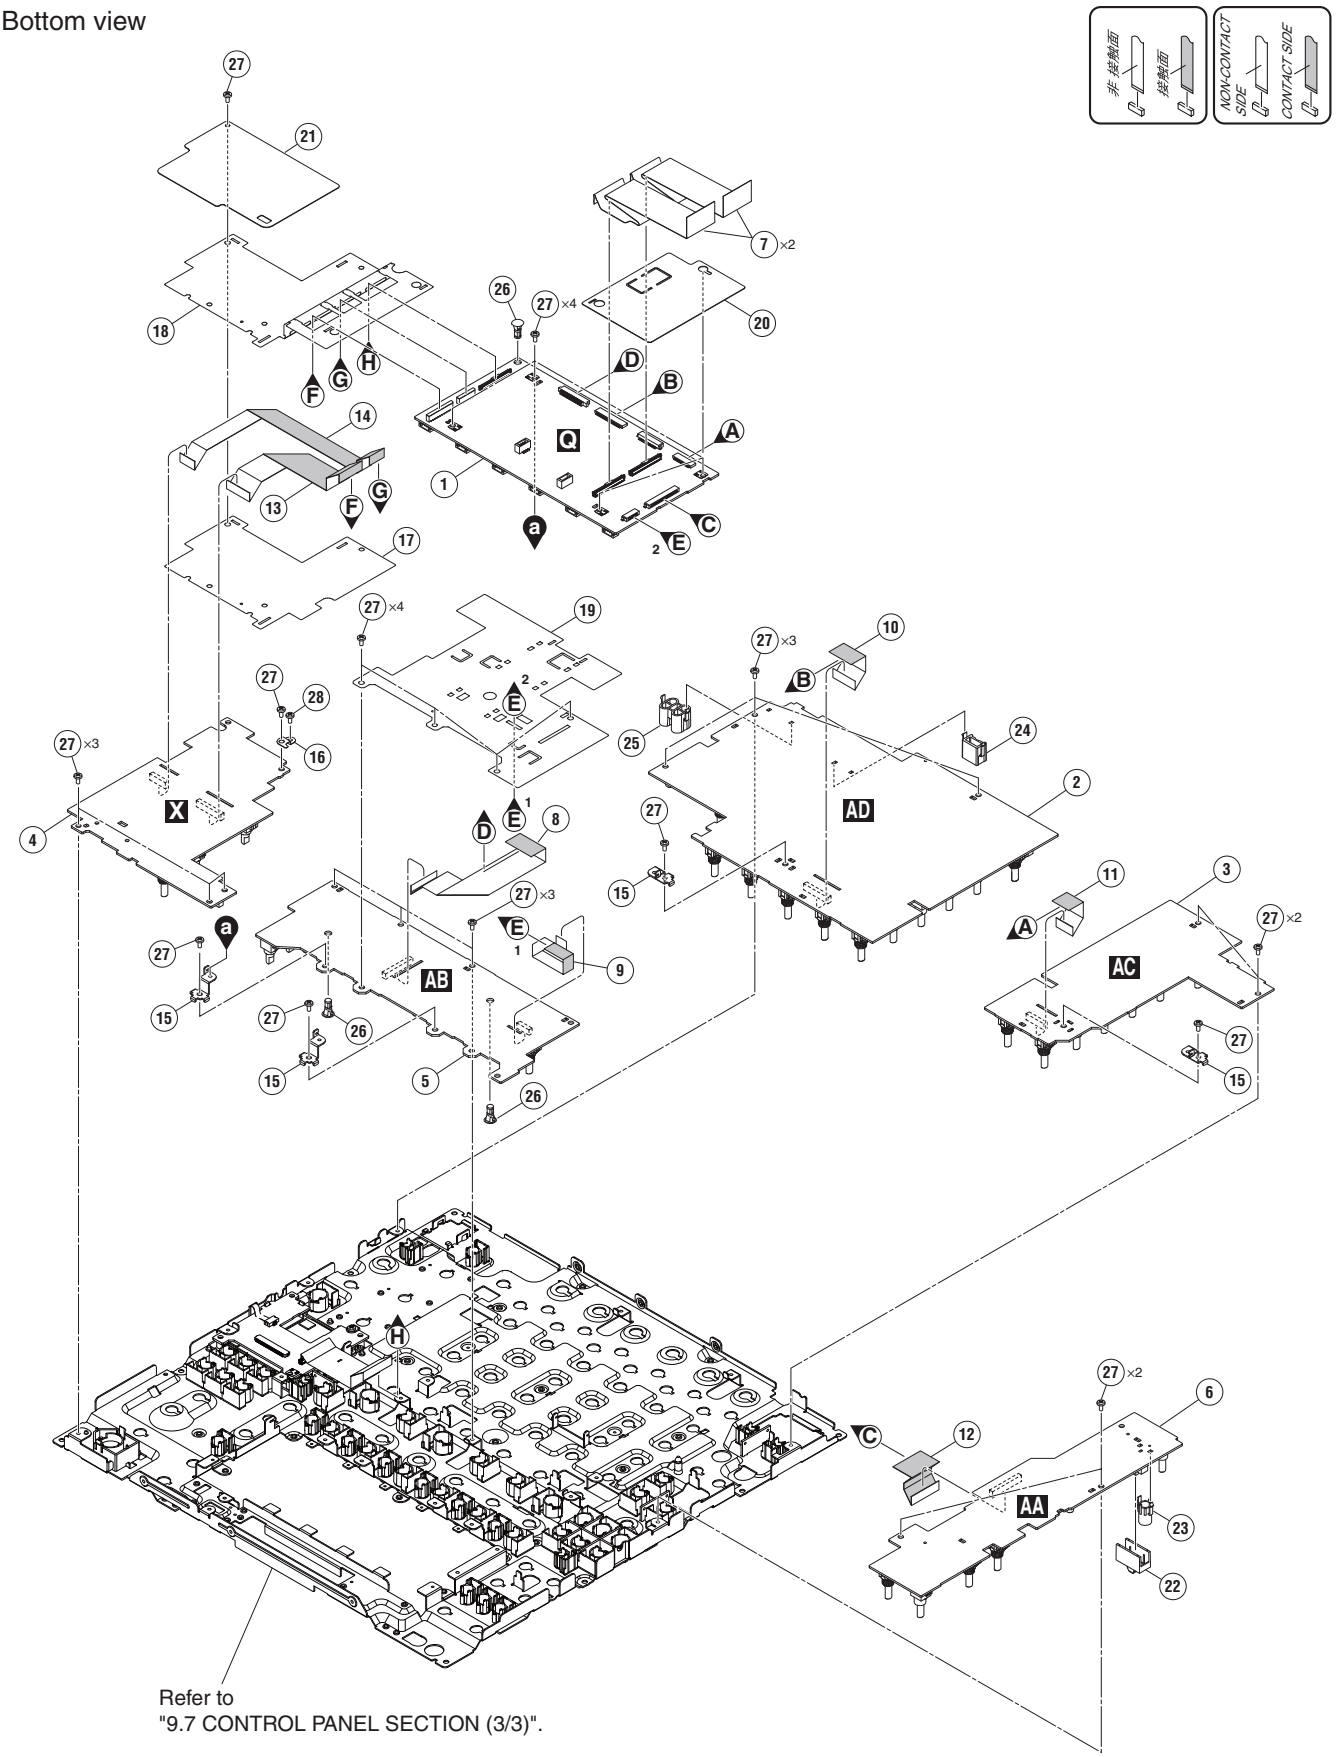


CONTROL PANEL SECTION (2/3) PARTS LIST


Mark	No.	Description	Part No.
	1	UCOM Assy	DWX4341
	2	PNLR Assy	DWX4345
	3	PNLL Assy	DWX4346
	4	BFXB Assy	DWX4352
	5	CUEVR Assy	DWX4347
	6	SFXB Assy	DWX4351
	7	FFC	DDD1958
	8	FFC	DDD1959
	9	FFC	DDD1960
	10	FFC	DDD1962
	11	FFC	DDD1963
	12	FFC	DDD1965
	13	FFC	DDD1966
	14	FFC	DDD1967
	15	Stay	DND1313
	16	Plate	DNG1137
	17	Barrier	DEC3860
	18	Barrier	DEC3861
	19	Barrier	DEC3862
	20	Barrier	DEC3890
⚠	21	Barrier	DEC3929
	22	Cap	DAC3136
	23	Holder	DNK6930
	24	Holder	DNK6511
	25	Holder	DNK6879
	26	Spacer	DEC3880
	27	Screw	BBZ30P060FTC
	28	Screw	BPZ30P100FTB

9.7 CONTROL PANEL SECTION (3/3)

• Bottom view

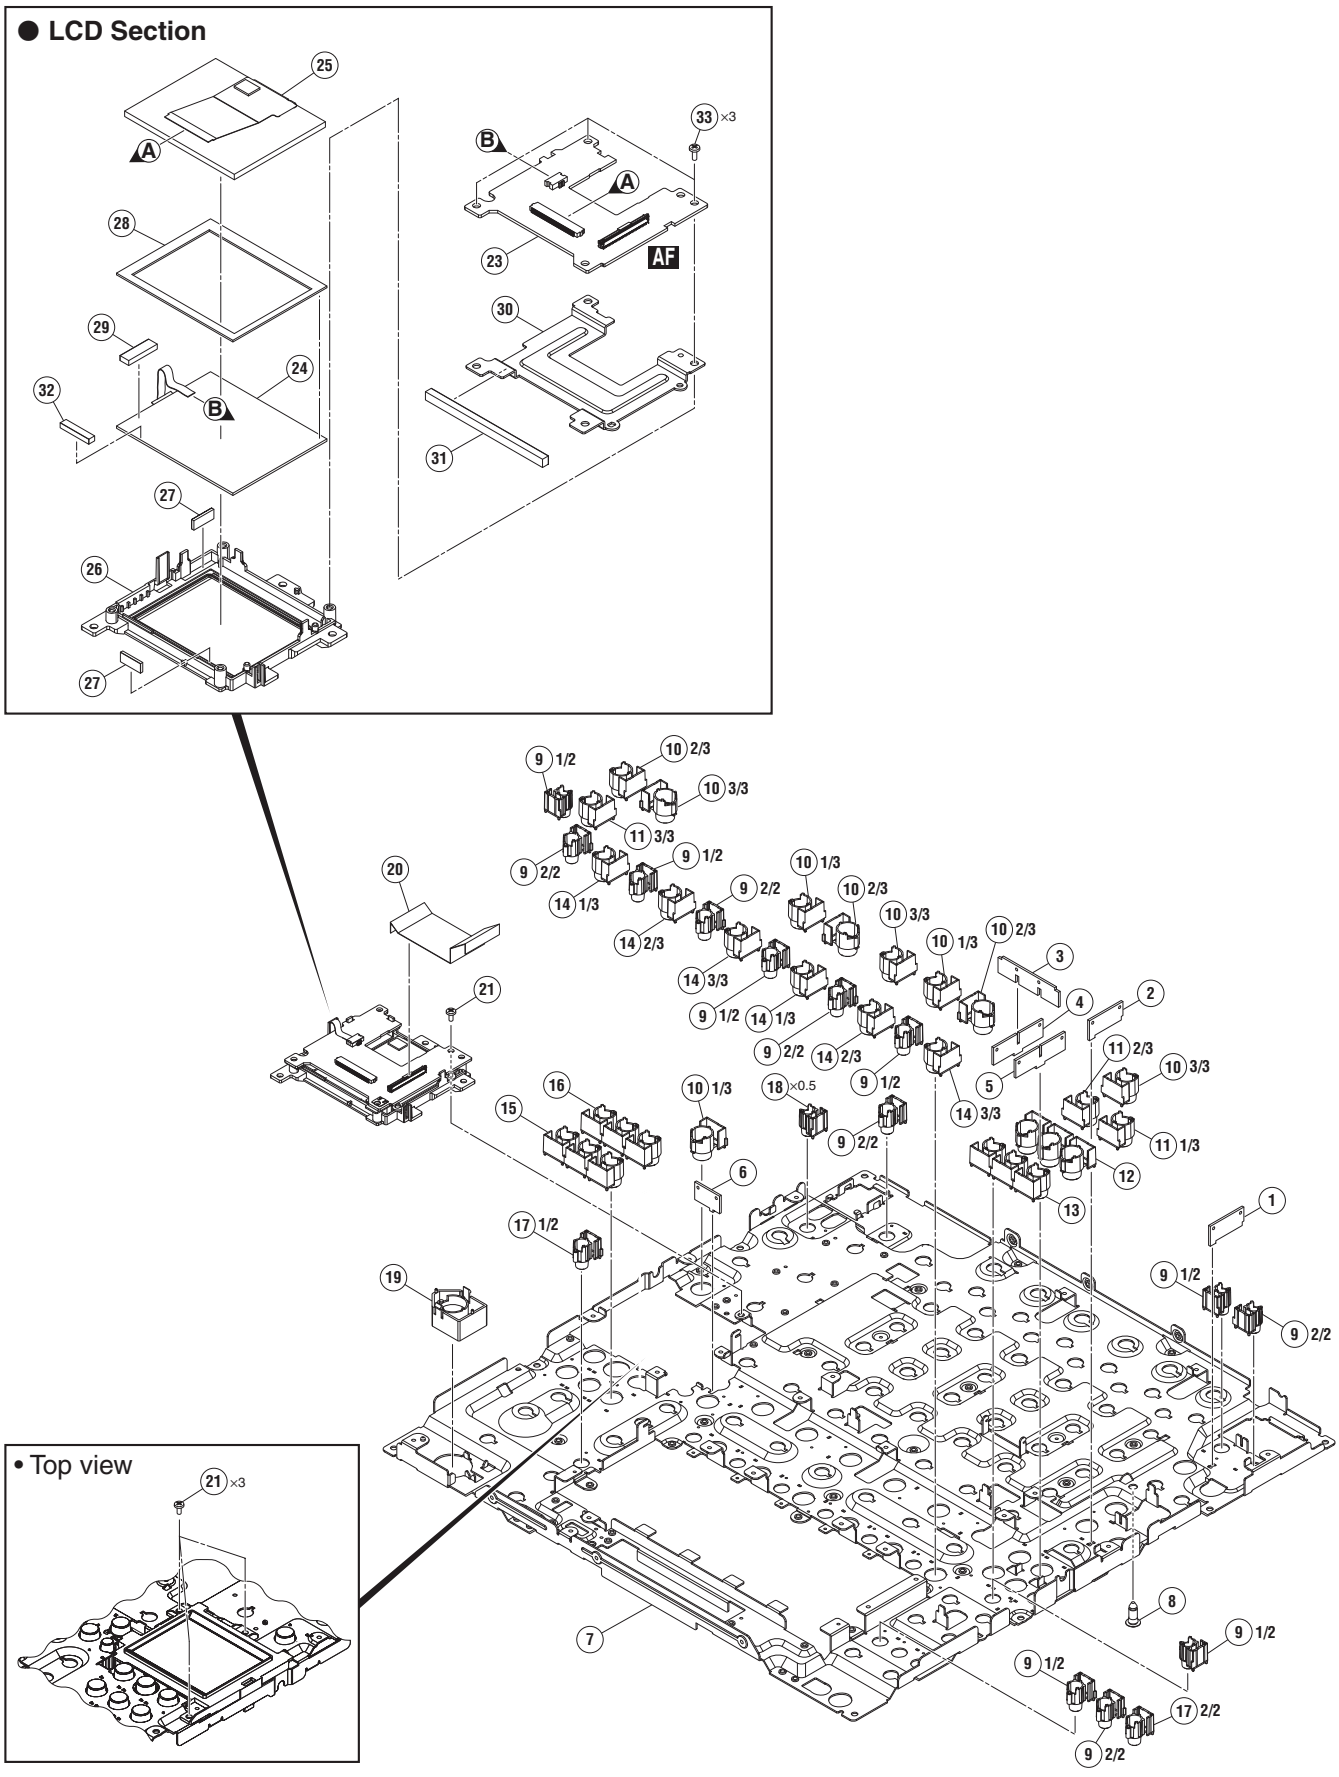

• **The position of the divided parts / 分割部品の取り付け位置**

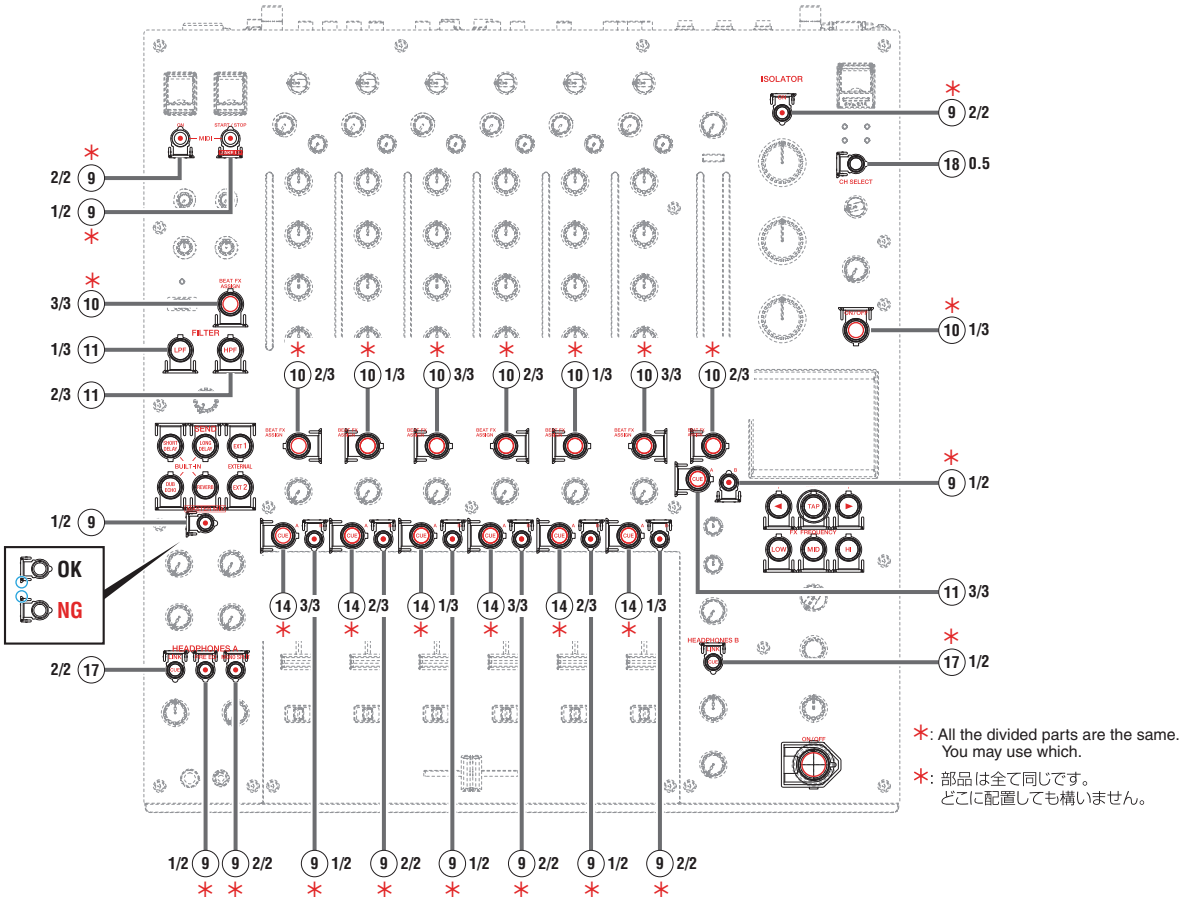

CONTROL PANEL SECTION (3/3) PARTS LIST

Mark No.	Description	Part No.
1	SHADE1 Assy	DWX4389
2	SHADE2 Assy	DWX4390
3	SHADE3 Assy	DWX4391
4	SHADE4 Assy	DWX4392
5	SHADE5 Assy	DWX4393
6	SHADE6 Assy	DWX4394
7	Stay	DND1311
8	Spacer	AEC1065
9	Button	DAC3491
10	Button	DAC3492
11	Button	DAC3493
12	Button	DAC3494
13	Button	DAC3495
14	Button	DAC3496
15	Button	DAC3497
16	Button	DAC3498
17	Button	DAC3499
18	Button	DAC3500
19	Button	DAC3501
20	FFC	DDD1964
21	Screw	BBZ30P060FTC
22	•••••	

LCD Section

23	LCDB Assy	DWX4343
24	Touch Panel	DSX1147
25	TFT LCD	DWX4228
26	Panel	DNK6882
27	Cushion	DEC3933
28	Cushion	DEC3854
29	Cushion	DEC3858
30	Stay	DND1314
31	Cushion	DEC3926
32	Cushion	DEC3934
33	Screw	BPZ30P100FTB

12. PCB PARTS LIST

NOTES: ● *Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.*
● *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
● *When ordering resistors, first convert resistance values into code form as shown in the following examples.*

Ex.1 When there are 2 effective digits (any digit apart from 0), such as 560 ohm and 47 k ohm (tolerance is shown by J = 5%, and K = 10%).

560 Ω	→	*56 × 10^1*	→	*561* ····· *RD1/4PU 5 6 1 J*
47 kΩ	→	*47 × 10^3*	→	*473* ····· *RD1/4PU 4 7 3 J*
0.5 Ω	→	*R50*		····· *RN2H R 5 0 K*
1 Ω	→	*1R0*		····· *RS1P 1 R 0 K*

Ex.2 When there are 3 effective digits (such as in high precision metal film resistors).

5.62 kΩ	→	*562 × 10^1*	→	*5621* ····· *RN1/4PC 5 6 2 1 F*

Mark	No.	Description	Part No.
LIST OF ASSEMBLIES			
NSP	1	..MOTHER ASSY	DWM2730
	2	..MAIN ASSY	DWX4331
	2	..USBA ASSY	DWX4332
	2	..USBB ASSY	DWX4333
	2	..USBP ASSY	DWX4334
NSP	1	..AINB ASSY	DWM2735
	2	..AIN ASSY	DWX4364
	2	..CRFSW ASSY	DWX4365
	2	..REGB ASSY	DWX4366
NSP	1	..AOUTB ASSY	DWM2731
	2	..AOUT ASSY	DWX4336
	2	..HPJK ASSY	DWX4337
	2	..HPJM ASSY	DWX4338
	2	..HPJC ASSY	DWX4339
	2	..HPPW ASSY	DWX4344
	2	..MTRM ASSY	DWX4348
	2	..FGP2 ASSY	DWX4349
NSP	1	..SUB ASSY	DWM2732
NSP	2	..CRFB ASSY	DWX4340
	2	..UCOM ASSY	DWX4341
	2	..LEDB ASSY	DWX4342
	2	..LCDB ASSY	DWX4343
	2	..CCB1 ASSY	DWX4410
	1	..PNLR ASSY	DWX4345
NSP	1	..PNL2 ASSY	DWM2733
	2	..PNLL ASSY	DWX4346
	2	..BFXB ASSY	DWX4352
	2	..PSWB ASSY	DWX4350
	2	..SNRT1 ASSY	DWX4355
	2	..SNRT2 ASSY	DWX4356
	2	..SNRT3 ASSY	DWX4357
	2	..SHADE1 ASSY	DWX4389
	2	..SHADE2 ASSY	DWX4390
	2	..SHADE3 ASSY	DWX4391
	2	..SHADE4 ASSY	DWX4392
	2	..SHADE5 ASSY	DWX4393
	2	..SHADE6 ASSY	DWX4394
NSP	1	..PNL3 ASSY	DWM2734
	2	..CUEVR ASSY	DWX4347
	2	..SFXB ASSY	DWX4351
	2	..CHF1 ASSY	DWX4358
	2	..CHF2 ASSY	DWX4359
	2	..CHF3 ASSY	DWX4360
	2	..CHF4 ASSY	DWX4361
	2	..CHF5 ASSY	DWX4362
	2	..CHF6 ASSY	DWX4363
	2	..FGP1 ASSY	DWX4395
	2	..CRFDG ASSY	DWX4396
	2	..SWBTM ASSY	DWX4397
	2	..SWTOP ASSY	DWX4398
⚠	1	..SW POWER SUPPLY	DWR1581

Mark	No.	Description	Part No.
AINB ASSY			
Consists of			
AIN ASSY			
REGB ASSY			
CRFSW ASSY			
AGZ			
AINB ASSY			
SEMICONDUCTORS			
	IC	4001,4003-4007	TC7SH08FUS2
	IC	4002	TC7SZ08FUS2
⚠	IC	4008	MM3571A33P
	IC	4101-4107,4201-4205	LME49723MA
	IC	4108,4206,4308,4408	NJM8080RB1S1
	IC	4301-4307,4401-4407	LME49723MA
	IC	4501-4505,4601-4607	LME49723MA
	IC	4506,4608	NJM8080RB1S1
	IC	4701	AK5578EN
	IC	4801	AK5574EN
	IC	4901,5001,5101	NJM2068MD
	IC	4902,5002,5102	PCM1803ADB
	IC	5201,5202	NJM4580MD
	IC	5203	AK5358AET
⚠	IC	5351	NJM7805FA
⚠	IC	5352	LM7915CT@V
⚠	IC	5353	NJM7815FA
	Q	4101,4102,4301,4302	HN1C01FUS1
	Q	4103,4104,4303,4304	2SK3320
	Q	4105,4305,4405,4605	LSCR523UB
	Q	4401,4402,4601,4602	HN1C01FUS1
	Q	4403,4404,4603,4604	2SK3320
	Q	5201-5204	2SK209
	D	4101-4104,4201,4202	DF2B18FU
	D	4105,4305,4405,4605	1SS355L@V

Mark	No.	Description	Part No.
	D	4106-4109,4203-4206	RB548W
	D	4301-4304,4401-4404	DF2B18FU
	D	4306-4309,4406-4409	RB548W
A	D	4501,4502,4601-4604	DF2B18FU
	D	4503-4506,4606-4609	RB548W
	D	4901,4902,5001,5002	RB548W
	D	5101,5102	RB548W
	D	5201-5204,5354-5356	RB501VM-40
	D	5301-5306	1SS355L@V

MISCELLANEOUS

	L	5201,5202	CHIP SOLID INDUCTOR XTL3010
	JA	4101,4301,4401,4601	RCA JACK/4P DKB1112
	JA	4201,4501	RCA JACK DKB1119
B	JA	5201	XLR SOCKET DKB1124
	JA	5202	6.5 DIA JACK DKN1653
	KN	4001-4003	EARTH TERMINAL AKF7002
	RY	4101,4301,4401,4601	RELAY DSR1023
	S	5301-5306	SLIDE SWITCH DSH1058
	CN	4001	FFC/FPC CONNECTOR CKS6645
	CN	4002	L-PLUG(10P) KM200NA10L
	CN	4003	L-PLUG(4P) KM200NA4L
	CN	4004	PLUG(4P) KM200NA4LR
	CN	4005	PLUG(4P) KM200NA4LE
	CN	5201	CONNECTOR CKS3561
C	CN	5301	9P CONNECTOR VKN1824
	CN	5351	PLUG(9P) KM200NA9
		1001	SHIELD CASE DNF1947
	VA	5201-5204	VARISTORS EZJZ1V270RM

RESISTORS

	R	4004,4005,4101,4102	RN1/16SE1000D
	R	4103,4104,4201,4202	RS1/10SR101J
	R	4106,4306,4406,4606	RS1/10SR202J
	R	4107,4175,4307,4375	RS1/10SR122J
	R	4108,4109,4112,4308	RN1/16SE4700D
D	R	4110,4111,4121,4122	RS1/10SR4702D
	R	4113,4114,4313,4314	RN1/16SE1201D
	R	4116,4118,4316,4318	RN1/16SE6800D
	R	4119,4120,4123,4124	RN1/16SE2201D
	R	4125,4126,4325,4326	RS1/10SR7502D
	R	4127,4128,4327,4328	RS1/10SR6801D
	R	4129,4130,4329,4330	RS1/10SR7500D
	R	4133,4134,4333,4334	RS1/10SR1201D
	R	4135,4136,4335,4336	RS1/10SR3901D
	R	4141,4142,4147,4149	RS1/10SR2201D
	R	4143,4144,4148,4150	RS1/10SR1500D
E	R	4145,4146,4151,4152	RS1/10SR4701D
	R	4153,4155,4219,4221	RS1/10SR1101D
	R	4154,4156,4220,4222	RS1/10SR75R0D
	R	4157-4160,4211,4212	RS1/10SR4701D
	R	4161-4164,4227-4230	RS1/10SR3001D
	R	4165-4168,4231-4234	RS1/10SR6800D
	R	4169-4172,4235-4238	RS1/10SR221J
	R	4173,4174,4239,4240	RS1/16SS1002D
	R	4203,4204,4310,4311	RS1/10SR4702D
	R	4207,4208,4213,4215	RS1/10SR2201D
	R	4209,4210,4214,4216	RS1/10SR1500D
F	R	4217,4218,4223-4226	RS1/10SR4701D
	R	4301,4302,4401,4402	RN1/16SE1000D
	R	4303,4304,4403,4404	RS1/10SR101J

Mark	No.	Description	Part No.
	R	4309,4312,4408,4409	RN1/16SE4700D
	R	4319,4320,4323,4324	RN1/16SE2201D
	R	4321,4322,4410,4411	RS1/10SR4702D
	R	4341,4342,4347,4349	RS1/10SR2201D
	R	4343,4344,4348,4350	RS1/10SR1500D
	R	4345,4346,4351,4352	RS1/10SR4701D
	R	4353,4355,4453,4455	RS1/10SR1101D
	R	4354,4356,4454,4456	RS1/10SR75R0D
	R	4357-4360,4445,4446	RS1/10SR4701D
	R	4361-4364,4461-4464	RS1/10SR3001D
	R	4365-4368,4465-4468	RS1/10SR6800D
	R	4369-4372,4469-4472	RS1/10SR221J
	R	4373,4374,4473,4474	RS1/16SS1002D
	R	4407,4475,4607,4675	RS1/10SR122J
	R	4412,4608,4609,4612	RN1/16SE4700D
	R	4413,4414,4613,4614	RN1/16SE1201D
	R	4416,4418,4616,4618	RN1/16SE6800D
	R	4419,4420,4423,4424	RN1/16SE2201D
	R	4421,4422,4503,4504	RS1/10SR4702D
	R	4425,4426,4625,4626	RS1/10SR7502D
	R	4427,4428,4627,4628	RS1/10SR6801D
	R	4429,4430,4629,4630	RS1/10SR7500D
	R	4433,4434,4633,4634	RS1/10SR1201D
	R	4435,4436,4635,4636	RS1/10SR3901D
	R	4441,4442,4447,4449	RS1/10SR2201D
	R	4443,4444,4448,4450	RS1/10SR1500D
	R	4451,4452,4457-4460	RS1/10SR4701D
	R	4501,4502,4603,4604	RS1/10SR101J
	R	4507,4508,4513,4515	RS1/10SR2201D
	R	4509,4510,4514,4516	RS1/10SR1500D
	R	4511,4512,4517,4518	RS1/10SR4701D
	R	4519,4521,4653,4655	RS1/10SR1101D
	R	4520,4522,4654,4656	RS1/10SR75R0D
	R	4523-4526,4645,4646	RS1/10SR4701D
	R	4527-4530,4661-4664	RS1/10SR3001D
	R	4531-4534,4665-4668	RS1/10SR6800D
	R	4535-4538,4669-4672	RS1/10SR221J
	R	4539,4540,4673,4674	RS1/16SS1002D
	R	4601,4602	RN1/16SE1000D
	R	4610,4611,4621,4622	RS1/10SR4702D
	R	4619,4620,4623,4624	RN1/16SE2201D
	R	4641,4642,4647,4649	RS1/10SR2201D
	R	4643,4644,4648,4650	RS1/10SR1500D
	R	4651,4652,4657-4660	RS1/10SR4701D
	R	4701,4801	RS1/10SR0R0J
	R	4705,4706,4710,4713	RS1/10SR220J
	R	4707	RAB4CQ470J
	R	4805,4810	RS1/10SR220J
	R	4901,4902,5001,5002	RS1/10SR4702D
	R	4903,4904,5003,5004	RS1/10SR3301D
	R	4905,4906,5005,5006	RS1/10SR1801D
	R	5101,5102	RS1/10SR4702D
	R	5103,5104,5209-5214	RS1/10SR3301D
	R	5105,5106,5231,5232	RS1/10SR1801D
	R	5201-5208	RS1/10SR101J
	R	5215,5217,5221,5222	RN1/16SE1501D
	R	5216,5218,5224,5226	RN1/16SE4701D
	R	5219,5220	RS1/10SR8200D
	R	5227,5228	RS1/10SR3301D
	R	5233,5234	RS1/10SR1602D

Mark	No.	Description	Part No.
	R	5235,5236	RS1/10SR2200D
	R	5238	RAB4CQ103J
		Other Resistors	RS1/16SS###J

CAPACITORS

	C	4002,4127,4128,4327 (0.1 uF)	DCE1031
	C	4003,4005-4009,4011	CKSSYB104K16
	C	4004,4015,4019,4024 (1 uF)	CCG1325
	C	4010,4103,4104	CCSSCH102J50
	C	4012,4153,4231,4353	CEAT220M50
	C	4013,4018,4909,4910	CKSSYB104K16
	C	4016,4021,4022,4123 (100 uF/25 V)	DCH1357
	C	4023,5352,5353 (2.2 uF)	DCG1065
	C	4101,4102,4105,4106	CCSSCH221J50
	C	4107,4108,4203,4204	CCSSCH101J50
	C	4109,4110,4129,4131 (220 uF/25 V)	DCH1358
	C	4111,4112,4311,4312	CKSRYB223K50
	C	4119,4120,4319,4320 (0.047 uF)	DCE1027
	C	4121,4122,4124,4125	CKSSYB103K50
	C	4126,4137-4142,4207 (100 uF/25 V)	DCH1357
	C	4130,4132-4136	CKSSYB103K50
	C	4143-4146,4201,4202	CCSSCH102J50
	C	4147-4151,4208,4209	CKSSYB103K50
	C	4152,4230,4352,4452	CKSSYB104K10
	C	4154,4155,4232,4233	CFHXSQ472J16
	C	4210,4215-4220,4323 (100 uF/25 V)	DCH1357
	C	4211-4214,4225-4229	CKSSYB103K50
	C	4221-4224,4303,4304	CCSSCH102J50
	C	4301,4302,4305,4306	CCSSCH221J50
	C	4307,4308,4407,4408	CCSSCH101J50
	C	4309,4310,4329,4331 (220 uF/25 V)	DCH1358
	C	4321,4322,4324,4325	CKSSYB103K50
	C	4326,4337-4342,4423 (100 uF/25 V)	DCH1357
	C	4328,4427,4428,4627 (0.1 uF)	DCE1031
	C	4330,4332-4336	CKSSYB103K50
	C	4343-4346,4403,4404	CCSSCH102J50
	C	4347-4351,4421,4422	CKSSYB103K50
	C	4354,4355,4454,4455	CFHXSQ472J16
	C	4401,4402,4405,4406	CCSSCH221J50
	C	4409,4410,4429,4431 (220 uF/25 V)	DCH1358
	C	4411,4412,4611,4612	CKSRYB223K50
	C	4419,4420,4619,4620 (0.047 uF)	DCE1027
	C	4424,4425,4430	CKSSYB103K50
	C	4426,4437-4442,4507 (100 uF/25 V)	DCH1357
	C	4432-4436,4447-4451	CKSSYB103K50
	C	4443-4446,4501,4502	CCSSCH102J50
	C	4453,4531,4653,4907	CEAT220M50
	C	4503,4504,4607,4608	CCSSCH101J50
	C	4508,4509,4511-4514	CKSSYB103K50
	C	4510,4515-4520,4623 (100 uF/25 V)	DCH1357
	C	4521-4524,4603,4604	CCSSCH102J50
	C	4525-4529,4621,4622	CKSSYB103K50
	C	4530,4652	CKSSYB104K10
	C	4532,4533,4654,4655	CFHXSQ472J16
	C	4601,4602,4605,4606	CCSSCH221J50
	C	4609,4610,4629,4631 (220 uF/25 V)	DCH1358
	C	4624,4625,4630	CKSSYB103K50
	C	4626,4637-4642,4703 (100 uF/25 V)	DCH1357
	C	4628 (0.1 uF)	DCE1031
	C	4632-4636,4647-4651	CKSSYB103K50

Mark	No.	Description	Part No.
	C	4643-4646,4705,4708	CCSSCH102J50
	C	4701,4801,4903,4904	CKSSYB103K50
	C	4702,4802 (4.7 uF)	ACG7114
	C	4704,4716,4804,4811	CFHXSQ103J16
	C	4706,4710,4711,4714	CKSRYB104K16
	C	4707,4709,4712,4715 (100 uF/25 V)	DCH1357
	C	4713,4805,4808	CCSSCH102J50
	C	4718,4803,4806,4810 (100 uF/25 V)	DCH1357
	C	4719,4721,4723,4725	CKSRYB103K50
	C	4720,4722,4724,4726	CCSRCH102J50
	C	4807,4809	CKSRYB104K16
	C	4813,4908,4914,4920 (100 uF/25 V)	DCH1357
	C	4814,4816,4818,4820	CKSRYB103K50
	C	4815,4817,4819,4821	CCSRCH102J50
	C	4905,4906,5005,5006	CEANP100M35
	C	4911,5007,5011,5107	CEAT220M50
	C	4912,4913,5009,5010	CKSSYB104K16
	C	4915,5003,5004,5015	CKSSYB103K50
	C	4916,4918,5016,5018	CKSRYB103K50
	C	4917,4919,5017,5019	CCSRCH102J50
	C	4921,5008,5014,5108 (100 uF/25 V)	DCH1357
	C	5012,5013,5109,5110	CKSSYB104K16
	C	5103,5104,5115,5221	CKSSYB103K50
	C	5105,5106	CEANP100M35
	C	5111	CEAT220M50
	C	5112,5113,5238,5240	CKSSYB104K16
	C	5114 (100 uF/25 V)	DCH1357
	C	5116,5118,5243,5245	CKSRYB103K50
	C	5117,5119,5244,5246	CCSRCH102J50
	C	5201-5204	CCSRCH222J50
	C	5209,5214,5235,5236	CEJQ100M35
	C	5210-5213	CCSSCH102J50
	C	5215,5216	CKSSYB471K50
	C	5217,5218,5227,5228	CCSSCH821J50
	C	5222,5225,5226,5233	CKSSYB103K50
	C	5229,5230	CEJQNP100M35
	C	5234,5242	CKSSYB103K50
	C	5237,5239	CEJQ470M16
	C	5241 (10 uF)	CCG1192
	C	5249,5250	CCSSCH101J50
	C	5251,5253,5255,5257	CCSRCH102J50
	C	5252,5254,5256,5258	CCSRCH101J50
	C	5259,5261,5263	CCSRCH102J50
	C	5260,5262,5264	CCSRCH101J50
	C	5351,5354-5356 (1 uF)	CCG1325

PNL2 ASSY
Consists of
SNRT1 ASSY
SNRT2 ASSY
SNRT3 ASSY
PSWB ASSY
BFXB ASSY
PNLL ASSY

BCDPXAC

PNL2 ASSY

SEMICONDUCTORS

	IC	7501,7502	TC74HC4051AF
⚠	IC	7601	NJM2831F05

Mark	No.	Description	Part No.
	Q	7501-7503,7601	2SC4154-11
	D	7501,7503,7504,7620	LTL17KSL5D-P
	D	7502,7613,7614	LTL17KRH5D-P
	D	7601-7612	1SS355L@V
	D	7616-7619	LTL17KRH5D-P
	D	7751-7754,7801-7804	DF2B18FU
	D	7851-7854	DF2B18FU

MISCELLANEOUS

	JA	7751-7754 6.5 DIA JACK	DKN1682
	JA	7801-7804 6.5 DIA JACK	DKN1682
	JA	7851-7854 6.5 DIA JACK	DKN1682
	KN	7601 EARTH TERMINAL	AKF7002
	S	7501,7502,7601-7608 TACT SWITCH	DSG1079
	S	7503,7504 ROTARY SWITCH	DSG1098
	S	7609 ROTARY ENCODER	DSX1068
	S	7610 ROTARY ENCODER	DSX1136
	S	7701 PUSH SW	ASG1102
	CN	7501 17P CONNECTOR	VKN1248
	CN	7601 24P CONNECTOR	VKN1255
	CN	7602 15P CONNECTOR	VKN1246
	CN	7603 9P CONNECTOR	VKN1824
	CN	7604 PLUG(6P)	KM200NA6
	CN	7701 B TO W CONNECTOR	KM200NA3LY
	CN	7751,7801,7851 L-PLUG(13P)	KM200NA13L
		1001-1003 SHIELD CASE	DNG1128

RESISTORS

	R	7751,7752,7801,7802	RS1/10SR1000D
	R	7851,7852	RS1/10SR1000D
	VR	7501,7507,7508,7514 ROTARY VR	DCS1125
	VR	7502,7509,7601 POTENTIOMETER	DCS1109
	VR	7503-7506 POTENTIONETER	DCS1065
	VR	7510-7513,7602 POTENTIONETER	DCS1065
	VR	7603 ROTARY VR	DCS1125
	VR	7604 POTENTIONETER	DCS1065
		Other Resistors	RS1/10SR###J

CAPACITORS

	C	7504-7507,7512-7516	CKSRYB104K16
	C	7508-7511,7517-7520	CCSRCH471J50
	C	7521-7524,7529-7533	CKSRYB104K16
	C	7525-7528,7534-7537	CCSRCH471J50
	C	7538-7541,7605-7608	CKSRYB104K16
	C	7603,7604,7701	CKSRYB103K50
	C	7609 (10 uF)	DCH1263
	C	7610,7612,7753,7754	CCSRCH102J50
	C	7611,7614	CKSRYB104K16
	C	7613 (2.2 uF) (2.2 uF)	CCG1218
	C	7615	CEJQ470M16
	C	7751,7752,7801,7802	CCSRCH101J50
	C	7755,7756,7805,7806	CCSRCH222J50
	C	7803,7804,7853,7854	CCSRCH102J50
	C	7851,7852	CCSRCH101J50
	C	7855,7856	CCSRCH222J50

Mark	No.	Description	Part No.

AOUTB ASSY
Consists of
MTRM ASSY
HPPW ASSY
HPJK ASSY
HPJM ASSY
HPJC ASSY
AOUT ASSY

E K L M N O

AOUTB ASSY

SEMICONDUCTORS

	IC	5501,5502	OP275GPZ
	IC	5601,5602,5801,5901	NJM2068MD
	IC	5701,5702,6351,6352	NJM2068D
	IC	6001	NJM2068MD
⚠	IC	6301	BD9851EFV
	Q	5501,6351,6353,6355	LSCR523UB
	Q	5502-5505,5601-5604	INC2002AC1
	Q	5701-5704,5801,5802	INC2002AC1
	Q	5901,5902,6001,6002	INC2002AC1
⚠	Q	6301,6302	RSQ030P03
	Q	6352,6354,6356,6358	LSAR523UB
	Q	6357,6367,6368	LSCR523UB
	Q	6359,6361,6363,6365	KTC3209
	Q	6360,6362,6364,6366	KTA1281
	Q	6369,6370	LTC124EUB
	Q	6371-6374	LSAR523UB
	D	5501,5502,5601,5602	1SS355L@V
	D	6101-6103,6151-6153	DF2B18FU
	D	6201-6203	DF2B18FU
	D	6301-6303	RB162MM-40TF
	D	6351-6360	1SS355VM
	D	6359,6360	1SS355L@V

MISCELLANEOUS

	L	6301,6302 POWER INDUCTOR	ATH7011
	JA	5501,5502 CANON CONNECTOR	DKB1093
	JA	5601 RCA JACK/4P	DKB1112
	JA	5701 6.5 DIA JACK	DKN1653
	JA	5702 6.5 DIA JACK	DKN1654
	JA	6101,6201 6.5 DIA JACK	DKN1669
	JA	6151,6202 STEREO MINI JACK	XKN3017
	KN	6101,6151,6152 SCREW PLATE	VNE1948
	KN	6201 EARTH TERMINAL	AKF7002
	RY	5501,5502,6351,6352 RELAY	DSR1023
	CN	5401,6301 PLUG(4P)	KM200NA4
	CN	5402 19P RECEPTACLE	AKP7199
	CN	5403 23P CONNECTOR	VKN1427
	CN	5404,6352 PLUG(3P)	KM200NA3
	CN	5405 PLUG(3P)	KM200NA3R
	CN	5406 PLUG(3P)	KM200NA3E
	CN	5407 PLUG(3P)	KM200NA3Y
	CN	6101 L-PLUG(4P)	KM200NA4L
	CN	6151,6201 L-PLUG(3P)	KM200NA3L
	CN	6251 PLUG	CKS3533
	CN	6351 19P CONNECTOR	VKN1423
	CN	6353 PLUG(7P)	KM200NA7
		1001 CANON SHIELD	DNF1789
		1002 SHIELD CASE	DNG1130
	VA	5501-5504,5601-5604 VARISTORS	EZJZ1V270RM

Mark	No.	Description	Part No.
	VA	5701-5704 VARISTORS	EZJZ1V270RM
RESISTORS			
	R	5501-5508,5701-5708	RS1/10SR2001D
	R	5509-5516,5709-5716	RS1/10SR3901D
	R	5517-5520,5717-5720 (330 ohm)	DCN1200
	R	5521	RS1/16SS102J
	R	5526,6313	RS1/16SS103J
	R	5603,5604,5607-5610	RS1/10SR3601D
	R	5605,5606	RS1/10SR1002D
	R	5611,5612	RS1/10SR2701D
	R	5613-5616	RS1/10SR4301D
	R	5617-5620,5809,5810	RS1/10SR6800D
	R	5625,5626	RS1/16SS473J
	R	5803,5804,5903,5904	RS1/10SR3001D
	R	5805,5806,5905,5906	RS1/10SR8201D
	R	5807,5808,5907,5908	RS1/10SR2201D
	R	5909,5910,6009,6010	RS1/10SR6800D
	R	6003,6004	RS1/10SR3001D
	R	6005,6006	RS1/10SR8201D
	R	6007,6008	RS1/10SR2201D
	R	6301	RS1/16SS1502D
	R	6302,6309,6319	RS1/16SS1002D
	R	6303,6314	RS1/16SS3002D
	R	6304,6318	RS1/16SS6802D
	R	6305	RS1/16SS4702D
	R	6306	RS1/16SS6201D
	R	6307	RS1/16SS0R0J
	R	6308	RS1/16SS2200D
	R	6311	RS1/16SS472J
	R	6317	RS1/16SS512J
	R	6320	RS1/16SS5602D
	R	6321	RS1/16SS1001D
	R	6322	RS1/16SS3901D
	R	6351	RS1/16SS101J
	R	6352-6359	RS1/10SR3301D
	R	6360,6362,6364,6366	RS1/4SA391J
	R	6361,6363,6365,6367	RS1/4SA271J
	R	6392-6399	RS1/10SR1001D
	R	6400-6407	RS1/10SR1201D
	R	6408-6431	RS1/8SQ240J
	R	6436-6440	RS1/16SS222J
	VR	6251,6252 ROTARY VR	DCS1123
		Other Resistors	RS1/10SR###J
CAPACITORS			
	C	5402,5405 (0.1 uF)	DCE1031
	C	5407,6311,6319,6320	CKSSYB104K16
	C	5501,5502,5719-5722 (220 uF/25 V)	DCH1358
	C	5507-5510,5515-5518	CCSSCH101J50
	C	5511-5514,5611-5614	CKSSYB103K50
	C	5519-5522 (470 uF/35 V)	DCH1359
	C	5523-5526	CFHXSQ471J50
	C	5601,5604,5617,5618 (100 uF/25 V)	DCH1357
	C	5602,5603,5801,5802	CEAT220M50
	C	5605,5606	CCSSCH821J50
	C	5607,5608	CCSSCH151J50
	C	5619,5620,5809,5810	CEAT101M16
	C	5621,5622 (1 000 pF)	ACE7120
	C	5623,5624	CCSRCH222J50
	C	5701,5702,5811,5812 (100 uF/25 V)	DCH1357
	C	5707-5710,5715-5718	CCSSCH101J50
	C	5711-5714,5807,5808	CKSSYB103K50
	C	5723-5726 (470 pF)	ACE7119
	C	5803,5804,5903,5904	CCSSCH102J50
	C	5805,5806,5905,5906	CCSSCH181J50
	C	5901,5902,6001,6002	CEAT220M50
	C	5907,5908,6007,6008	CKSSYB103K50
	C	5909,5910,6009,6010	CEAT101M16
	C	6003,6004	CCSSCH102J50
	C	6005,6006	CCSSCH181J50
	C	6101,6102,6151,6152	CFHXSQ103J16
	C	6103,6153,6203	CCSRCH102J50
	C	6104,6154,6204	CKSRYB103K50
	C	6201,6202	CFHXSQ103J16
	C	6205	CKSRYB104K25
	C	6301	CKSRYB474K10
	C	6302	CKSRYB334K10
	C	6303	CCSSCH221J50
	C	6304	CKSSYB223K16
	C	6306,6312,6313,6321 (10 uF)	CCG1236
	C	6308	CCSSCH561J50
	C	6310,6314	CKSRYB105K10
	C	6316	CKSSYB682K25
	C	6317 (4.7 uF)	CCG1201
	C	6322,6330,6333,6334 (10 uF)	CCG1236
	C	6323	CCSSCH471J50
	C	6331,6332	CEAT470M25
	C	6351,6352,6355,6356(100 uF/25 V)	DCH1357
	C	6353,6354,6357,6358(220 uF/25 V)	DCH1358
	C	6359-6363	CCSSCH101J50
	C	6365-6368,6372-6379	CKSSYB103K50
	C	6380-6383 (10 uF)	CCG1182
	C	6385-6388(100 uF/25 V)	DCH1357

MOTHER ASSY
Consists of
MAIN ASSY
USBB ASSY
USBA ASSY
USBP ASSY

F H I J

MOTHER ASSY

SEMICONDUCTORS

	IC	1,801-803,2001	TC7SZ08FUS2
⚠	IC	201-204	MM3542BF
⚠	IC	205,3151	MM3543BH
⚠	IC	206	BD9328EFJ
⚠	IC	207	MM3571A33P
⚠	IC	208	MM3479A25P
	IC	209	BD2226G
⚠	IC	211	NJM78M09DL1A
⚠	IC	212,213	UA78M33IKVUG3
⚠	IC	214	MM3571A12P
⚠	IC	215	NJM2831F05
	IC	216,901,902,1501	TC7SH08FUS2
⚠	IC	217	NJM2872BF33
NSP	IC	401	AM3352BZCZA100@V

Mark	No.	Description	Part No.
NSP⚠	IC	402	TPS65910A31A1RSL
	IC	701	K4B1G1646I-BYMA
	IC	806	DYW2189
		*Part number of the initial firmware equipped	
	IC	903	LAN8720A-CP
⚠	IC	1001	TPS65911AA2ZRC
	IC	1101	66AK2G12ABYA100
⚠	IC	1401	LP2996AMR
	IC	1402,1403	MT41K64M16TW107AIT
NSP	IC	1502	DYW2190
		*Part number of the initial firmware equipped	
	IC	1503,1505,1801,1802	TC7SH08FUS2
	IC	1504	H337S3959
	IC	1506,2012,2013	TC74VHC08FK
	IC	1901	D810K013DZKB456
	IC	1902	SN74AUC1G08DCK
	IC	2002	SI5351C-B03300GM
	IC	2003,2014,2903	TC7SZ08FUS2
	IC	2004,2005	74VHC163FT
	IC	2006,2503,2605	TC74LCX08FK
	IC	2007-2011,2601,2608	TC7SH08FUS2
	IC	2101	ES9016SD1
	IC	2102	NJM8080RB1S1
	IC	2103,2104,2301,2302	NJM8801E
	IC	2401	AK4359AVF
	IC	2501,2502	AK4382AVT
	IC	2504,2505	NJM4580MD
	IC	2606,2607,2703,2704	AK4113VF
	IC	2609,2612,2613	TC7SH08FUS2
	IC	2610,2611,2705,2706	CS8421-CZ
	IC	2803,2804	AK4113VF
	IC	2805,2806,2902	CS8421-CZ
	IC	2904	AK4104ET
	IC	2905	ADM3485ARZ
	IC	3152	TPS2557DRB
	Q	1	LTC014EEB
	Q	2	RTQ040P02
	Q	12,1801,2101-2103	LTC124EUB
	Q	13,2104	LSC4081UB
	Q	14,2105,2106	LSA1576UB
	Q	201	2SA1576A
	Q	202-205,207,211	LSAR523UB
	Q	206	LTC014YEB
	Q	208-210,212,3151	LSCR523UB
	Q	213	LSAR523UB
	Q	601,901,1301,1501	LTC024EEB
	Q	1001	CSD87330Q3D
	Q	1302,1303	IMX25
	Q	1304	ISA1602AM1
	Q	1306,1307	2SB1188
	Q	1701,1901,3001,3002	LTC024EEB
	Q	3003	LTA023JEB
	Q	3004	LTC023JEB
	Q	3007	HN1C01FUS1
	Q	3008	INC2002AC1
	Q	3009	LTC124EUB
	Q	3152	RN1903S1
	D	2,207-211,213	1SS355VM
	D	2,207-211,213	1SS355L@V
	D	217-227	1SS355L@V
	D	217-227,3001,3002	1SS355VM
	D	601,1501,1701,1901	SML-D12V8W
	D	2601,2602,2701,2702	DF2B18FU
	D	2801,2802	DF2B18FU
	D	3006,3007	1SS355VM
	D	3051-3053,3101-3106	EZAEG2N50A
	D	3151	UDZV5R1

MISCELLANEOUS

	L	201,203,204 CHOKE COIL (22 uH)	CTH1561
	L	202 COIL (47 uH)	CTH1475
	L	205,3151 SMD SPL INDUCTOR	CTH1524
	L	206 SMD SPL INDUCTOR	CTH1501
	L	401-403 SMD SPL INDUCTOR	CTH1531
	L	901,902 COIL	ATH7015
	L	903,904 CHOKE COIL	DTH1216
	L	1001 CHOKE COIL (3.6 uH)	CTH1479
	L	1002-1004 SMD SPL INDUCTOR	CTH1531
	L	1005,1006 CHIP BEADS	VTL1129
	L	1101-1110 INDUCTOR	CTF1793
	L	1301-1321 FERRITE BEAD	CTF1528
	L	1701 CHOKE COIL	DTH1219
	L	1901 CHIP SOLID INDUCTOR	QTL1013
	L	1902 SMD FERRITE BEADS	CTF1823
	F	902 EMI FILTER	DTL1106
	JA	901 RJ45 CONNECTOR	VKN2023
	JA	2601 RCA JACK	DKB1127
	JA	2901 CANON CONNECTOR	DKB1093
	JA	3001 CONNECTOR	DKN1188
	JA	3051 USB JACK	DKB1118
	JA	3101,3102 CONNECTOR	DKN1607
	KN	1 WRAPPING TERMINAL	CKF1089
	KN	3-11 WRAPPING TERMINAL	CKF1089
	KN	3051,3052 WRAPPING TERMINAL	CKF1089
	KN	3101,3102 WRAPPING TERMINAL	CKF1089
	KN	3151,3152 WRAPPING TERMINAL	CKF1089
	T	901,902 TRANSFORMER	DTX1010
	X	801,1501 CRYSTAL OSCILLATOR (24 MHz)	CWX4280
	X	901 CRYSTAL OSCILLATOR (50 MHz)	DSS1209
	X	1502 CRYSTAL OSCILLATOR (24 MHz)	CWX4280
	X	2001 CRYSTAL OSCILLATOR (24.576 MHz)	ASS7102
	CN	1,10,3051,3101 CONNECTOR	AKM1281
	CN	2 FFC/FPC CONNECTOR	DKP3953
NSP	CN	3 CONNECTOR	AKM1279
	CN	4 CONNECTOR	AKM1275
	CN	5 19P PLUG	AKM7077
	CN	6 23P CONNECTOR	VKN1427
	CN	7,9 FFC/FPC CONNECTOR	CKS6543
	CN	8,14 CONNECTOR	AKM1276
	CN	11 CONNECTOR	AKM1277
	CN	12 CONNECTOR	AKM1280
	CN	13 19P CONNECTOR	VKN1423
	CN	801 CONNECTOR	VKN1938
	CN	1301 CONNECTOR	VKN2039
	CN	1901 CONNECTOR	VKN2038
	CN	3151 CONNECTOR	AKM1292
	CN	3152 CONNECTOR	AKM1291
		1001 SHIELD CASE	DNK6576
		1002 SHIELD PLATE	DNH3369

Mark	No.	Description	Part No.
	VL 2901	TRANSFORMER	DTX1016
RESISTORS			
	R	10,67,259,262	RS1/10SR0R0J
	R	11,3014	RS1/4SA0R0J
	R	42,3156	RS1/8SQ0R0J
	R	214,215,244,2666	RS1/16SS2702D
	R	216,3152	RS1/16SS3302D
	R	217,218	RS1/16SS2202D
	R	219	RS1/16SS4701D
	R	220	RS1/16SS8201D
	R	221	RS1/16SS51R0D
	R	222,225,228,231	RS1/16SS2201D
	R	223,226	RS1/16SS1102D
	R	224,227	RS1/10SR5600D
	R	229,232	RS1/10SR6801D
	R	230,233	RS1/10SR75R0D
	R	234,1382,1384,2659	RS1/16SS2201D
	R	235,702,703	RS1/16SS1001D
	R	236	RS1/16SS3301D
	R	237,241,243,934	RS1/16SS1002D
	R	242,3153	RS1/16SS1202D
	R	256	RS1/16SS1502D
	R	310,933,2001,2401	RS1/10SR0R0J
	R	407,409,2024,2609	RS1/10SR680J
	R	701,936-939	RS1/16SS49R9F
	R	706,1406,1407,1414	RS1/16SS2400F
	R	935	RS1/16SS1501F
	R	1355,1366	RAB4CQ472J
	R	1368	RAB4CQ222J
	R	1369	RAB4CQ473J
	R	1370,1385,1386	RS1/10SR361J
	R	1371,1372	RS1/4SA101J
	R	1373	RS1/10SR104J
	R	1374	RS1/10SR332J
	R	1375	RS1/4SA391J
	R	1376	RS1/10SR1100D
	R	1377	RS1/10SR1000D
	R	1378	RS1/10SR6800D
	R	1379	RS1/10SR6200D
	R	1381,1383	RS1/16SS3601D
	R	1418	RS1/16SS2400F
	R	1420-1443	RS1/16SS39R0D
	R	1704,1705	RS1/16SS2000F
	R	1706	RS1/16SS3001F
	R	2025,2505,2506	RN1/16SE1000D
	R	2106,2107,2925	RS1/10SR102J
	R	2111,2112	RS1/10SR101J
	R	2113,2115	RS1/10SR5601D
	R	2114,2116	RS1/10SR3601D
	R	2120-2123,2301-2304	RS1/10SR3300D
	R	2124-2127,2305-2308	RN1/16SE1501D
	R	2410,2507,2508	RAB4CQ103J
	R	2522-2529	RS1/10SR3001D
	R	2530-2537	RS1/10SR5101D
	R	2538-2545	RS1/10SR1801D
	R	2601,2602,2701,2702	RS1/16SS75R0D
	R	2610,2618-2621	RS1/10SR680J
	R	2646,2647,2731,2732	RS1/10SR0R0J
	R	2654,2655,2739,2740	RS1/16SS1001F

Mark	No.	Description	Part No.
	R	2656,2657,2741,2742	RS1/16SS1003D
	R	2660,2663,2745,2748	RS1/16SS1802D
	R	2662,2744,2747,2844	RS1/16SS2201D
	R	2667,2751,2752,2851	RS1/16SS2702D
	R	2801,2802	RS1/16SS75R0D
	R	2831,2832,2932,3006	RS1/10SR0R0J
	R	2839,2840,2907	RS1/16SS1001F
	R	2841,2842	RS1/16SS1003D
	R	2845,2848,2910	RS1/16SS1802D
	R	2847,2909,3155	RS1/16SS2201D
	R	2852	RS1/16SS2702D
	R	2911	RS1/16SS1503D
	R	2912	RS1/16SS1103D
	R	2918	RS1/10SR560J
	R	2927,2929	RS1/10SR56R0D
	R	3004,3005	RS1/4SA221J
	R	3007,3105,3106	RS1/10SR0R0J
	R	3154	RS1/16SS1000D
	R	3157	RS1/10SR221J
	R	3160	RS1/16SS1201D
	R	3161	RS1/16SS4302D
	R	3163	RS1/10SR472J
	R	3164	RS1/10SR331J
		Other Resistors	RS1/16SS###J
CAPACITORS			
	C	1,907,908,911	CKSSYB102K50
	C	2,12,13,15	CKSSYB104K10
	C	3,302,312,317(1 uF)	CCG1325
	C	4,6,7,11	CCSSCH102J50
	C	5 (150 uF/16 V)	DCH1356
	C	8,41,207-212	CKSQYB104K50
	C	9	CEVW470M35
	C	10,16,26,42	CKSSYB104K16
	C	19,20,46,344	CKSSYB103K50
	C	21,22,27 (1 uF)	DCE1030
	C	23,24,1101,1103 (100 uF/25 V)	CCH2000
	C	25,34,38,43	CCSSCH102J50
	C	28 (270 uF/16 V)	DCH1355
	C	29,1004,1007,1011	CKSQYB105K25
	C	30,33,37,300	CKSRYB104K25
	C	31,35	CEHVAW101M25
	C	39	CEHVAW101M16
	C	44,213-218,256	CCSSCH102J50
	C	201-206 (10 uF)	CCG1236
	C	225-230,236-242	CKSSYB104K10
	C	231-235,3153	CKSRYB153K50
	C	243,245,3155	CCSSCH821J50
	C	244,916,1906,1907	CCSSCH471J50
	C	246,247	CKSSYB122K50
	C	248	CKSSYB332K50
	C	261-266,293,298	CCSSCH102J50
	C	267-272,286,296	CKSQYB104K50
	C	273-284,308,483	CKSQYB106K6R3
	C	285,295	CKSRYB474K10
	C	288,321,401,402	CKSSYB104K10
	C	290	CKSQYB334K50
	C	292,311,314 (2.2 uF)	DCG1065
	C	294,303,480,481	CC0603KRX5R5BB475
	C	294,303,480,481 (4.7 uF)	CCG1212

Mark	No.	Description	Part No.
	C	304	CKSQYB104K50
	C	307,350,2034,2165(0.1 uF)	DCE1031
	C	310,1010 (220 uF/16 V)	CCH2090
	C	316,347,1512,1523	CCSSCH102J50
	C	319,322-330	CKSSYB103K16
	C	320,346,477-479 (2.2 uF)	CCG1218
	C	345,348,703-707	CKSSYB104K16
	C	403-409,416,417 (10 uF)	CCG1192
	C	410,411,418,426	CKSSYB104K10
	C	412-415,419-425	CKSSYB103K16
	C	427-429,431,432	CKSSYB103K16
	C	430,436,442,444	CKSSYB104K10
	C	433,434,474,475 (10 uF)	CCG1192
	C	435,437-441,443	CKSSYB103K16
	C	445-447,449-451	CKSSYB103K16
	C	448,452,454-461	CKSSYB104K10
	C	453,466-473,476	CKSSYB103K16
	C	463-465,701,702 (1 uF)	DCH1266
	C	482,484,489,491 (2.2 uF)	CCG1218
	C	485,488,492,493	CKSQYB106K6R3
	C	486,490,494,920 (4.7 uF)	CCG1212
	C	487,801,804,807	CKSSYB104K10
	C	495 (2.2 uF)	CCG1218
	C	496,1034,1037,1039	CKSQYB106K6R3
	C	497,918	CEVW101M16
	C	498	CKSRYB105K10
	C	499-505,802,803	CKSSYB103K16
	C	708,919,923,1002 (10 uF)	CCG1192
	C	709-719,1126	CKSSYB224K6R3
	C	720,1014,1029,1033	CKSSYB104K16
	C	805,806,809,1023	CKSSYB103K16
	C	808,812,901,905	CKSSYB104K10
	C	811,902,904,915 (1 uF)	DCH1266
	C	903,914	CCSSCH7R0D50
	C	906,909,910,913	CKSSYB104K10
	C	912,1801,1802,1909	CKSSYB102K50
	C	921,922,1006,1008	CKSSYB104K10
	C	924,925	CKSSYB223K16
	C	926 (1 000 pF)	ACG1127
	C	1001 (10 uF)	DCH1263
	C	1003,1009,1025,1030 (4.7 uF)	CCG1212
	C	1012,1013,1015,1018	CKSSYB104K10
	C	1017,1020,1406,1410 (10 uF)	CCG1192
	C	1021,1022,1024,1026	CKSSYB104K10
	C	1027,1404 (4.7 uF)	CCG1201
	C	1028,2524-2531	CCSSCH331J50
	C	1031,1032,1035,1038	CKSSYB104K10
	C	1036,1402,1403,1405	CKSSYB104K16
	C	1040,1042,1113-1120	CKSSYB104K10
	C	1041,1044,1109,1177	CCG1379
	C	1047,1049-1054,1110	CKSSYB103K16
	C	1102,1104,1105	CEHVW101M6R3
	C	1106 (4.7 uF)	CCG1212
	C	1107,1108,1112,1121 (1 uF)	DCH1266
	C	1111,1153-1160,1181	CKSSYB103K16
	C	1122-1125,1127-1152	CKSSYB104K10
	C	1161-1176,1180	CKSSYB104K10
	C	1178,1179,1185,1940 (1 uF)	DCH1266
	C	1182-1184,1501,1502	CKSSYB104K10

Mark	No.	Description	Part No.
	C	1186,2101,2102,2143 (100 uF/25 V)	CCH2000
	C	1188,1325,1503,1507	CKSSYB103K16
	C	1301	CCSSCH100D50
	C	1401	CEHVW470M6R3
	C	1407-1409,1422-1424	CKSSYB104K16
	C	1411-1421,1426-1436	CKSSYB224K6R3
	C	1425,1462-1464,1515 (10 uF)	CCG1192
	C	1437-1461,2125,2403	CKSSYB104K16
	C	1506,1511,1522,1525	CKSSYB104K10
	C	1508,1516-1519,1532	CKSSYB103K16
	C	1524	CCSRCH222J50
	C	1528	CCSSCH470J50
	C	1530,1539,1702,1803	CKSSYB104K10
	C	1533,1537,1538,1908	CKSSYB103K16
	C	1703,2002,2009,2016	CCSSCH102J50
	C	1804,1904,1905,1941	CKSSYB104K10
	C	1901,1903,2615-2618 (10 uF)	CCG1192
	C	1902,2103,2120 (47 uF/16 V)	CCH1961
	C	1910,1912,1914,1916	CKSSYB103K16
	C	1911,1913,1915,1917	CKSSYB102K50
	C	1918,1920,1921,1923	CKSSYB103K16
	C	1919,1922,1924,1926	CKSSYB102K50
	C	1925,1927,1929,1931	CKSSYB103K16
	C	1928,1930,1932,1934	CKSSYB102K50
	C	1933,1935-1937,1939	CKSSYB103K16
	C	1938,2603,2604,2701	CCSSCH101J50
	C	1942,2001,2003,2004	CKSSYB104K10
	C	2005-2008,2121,2402	CKSSYB103K16
	C	2010,2013-2015	CKSSYB104K10
	C	2011,2012,2017-2021	CKSSYB102K50
	C	2022-2026,2030,2031	CKSSYB104K10
	C	2027	CCSSCH120J50
	C	2028,2029,2133,2134	CKSSYB102K50
	C	2104,2105,2122,2140	CFHXSQ103J16
	C	2106,2115-2119,2126	CCSSCH102J50
	C	2107,2109,2111,2113	CCSRCH102J50
	C	2108,2110,2112,2114	CKSRYB103K50
	C	2123,2124,2131,2132(1 uF)	CCG1325
	C	2127,2129,2130,2145	CCSSCH102J50
	C	2128 (10 uF/16 V)	CCH1998
	C	2135-2138,2163,2164	CKSSYB103K50
	C	2142,2147,2150,2169	CFHXSQ103J16
	C	2144,2311,2312 (100 uF/25 V)	CCH2000
	C	2148,2167,2170,2313	CCSSCH102J50
	C	2166,2329,2330(0.1 uF)	DCE1031
	C	2301,2302,2601,3054	CKSSYB102K50
	C	2303-2306,2532-2535	CKSSYB103K50
	C	2308,2310,2315,2319	CFHXSQ103J16
	C	2316,2317,2320,2503	CCSSCH102J50
	C	2401,2517,3161 (100 uF/16 V)	CCH1565
	C	2404,3164	CKSRYB104K16
	C	2405,2513,2514,3154	CKSSYB104K16
	C	2406	CEVW100M16
	C	2407,2409,2411,2413	CCSRCH102J50
	C	2408,2410,2412,2414	CKSRYB103K50
	C	2501,2502,2623,2624	CKSSYB103K16
	C	2504,2506,2508,2510	CCSRCH102J50
	C	2505,2507,2509,2511	CKSRYB103K50
	C	2512,2602,2613	CKSSYB104K10

Mark	No.	Description	Part No.
	C	2520-2523	CCSSCH561J50
	C	2605,2606,2703,2704	CKSRYB103K50
	C	2614,2629,2630,2643	CCSSCH102J50
	C	2619-2622,2627,2628	CKSSYB104K10
	C	2631,2632,2640,2641 (10 uF)	CCG1192
	C	2633,2634,2717,2718	CKSSYB103K16
	C	2635-2639,2642	CKSSYB104K10
	C	2644,2908,2915,2916	CCSSCH102J50
	C	2702,2801,2802	CCSSCH101J50
	C	2709-2712,2721,2722 (10 uF)	CCG1192
	C	2713-2716,2725-2728	CKSSYB104K10
	C	2723,2724,2817,2818	CKSSYB103K16
	C	2729,2730,2809-2812 (10 uF)	CCG1192
	C	2803,2804,2901,2921	CKSRYB103K50
	C	2813-2816,2825-2828	CKSSYB104K10
	C	2821,2822,2829,2830 (10 uF)	CCG1192
	C	2823,2824,2904,2910	CKSSYB103K16
	C	2902,2922	CCSRCH102J50
	C	2903,2907,2913,2918 (10 uF)	CCG1192
	C	2905,2906,2909,2912	CKSSYB104K10
	C	2917,3001,3005,3152	CKSSYB104K10
	C	2919,2920	CCSSCH221J50
	C	3003,3004	CCSSCH102J50
	C	3052,3101,3102,3159 (10 uF)	CCG1192
	C	3053,3103,3104	CKSSYB103K16
	C	3105,3106,3158	CKSSYB102K50
	C	3151	CKSQYX226M16
	C	3160,3163 (10 uF)	CCG1192
	C	3162	CEVW331M6R3

SUB ASSY
Consists of
UCOM ASSY
CRFB ASSY
LEDB ASSY
LCDB ASSY

QY AE AF

SUB ASSY

SEMICONDUCTORS

	IC	8301,8303,8304,8306	DRV5055A1QDBZ
	IC	8302,8305	NJM12904V
	IC	8403-8405	74VHC541FT
	IC	8406	DYW2191
		*Part number of the initial firmware equipped	
	IC	8407	PST8430N
	IC	8408	74LCX244FT
	IC	8409	DYW2192
		*Part number of the initial firmware equipped	
NSP	IC	8410	TC7SH126FUS1
	IC	8701,8702	74VHC595FT
	IC	8703	74VHC164FT
	Q	8401,8402	LTA023JEB
	Q	8403,8404,8408,8409	LTC024EEB
	Q	8405,8406	LTC023JEB
	Q	8407,8462	LTA024EEB
	Q	8410	LSAR523UB
	Q	8411	LTC043EEB
	Q	8412-8422,8424,8426	LTC024EEB
	Q	8423,8425,8428,8429	2SB1689
	Q	8427,8430,8431,8434	LTC024EEB
	Q	8432,8433,8435,8437	2SB1689
	Q	8436,8438,8440,8712	LTC024EEB
	Q	8439,8441,8713,8715	2SB1689
	Q	8442-8447,8449-8461	2SC4154-11
	Q	8701-8711,8728-8731	2SC4154-11
	Q	8714,8716,8718,8720	LTC024EEB
	Q	8717,8719,8721,8723	2SB1689
	Q	8722,8724,8726,8732	LTC024EEB
	Q	8725,8727,8733,8735	2SB1689
	Q	8734,8736,8738,8740	LTC024EEB
	Q	8737,8739,8741,8743	2SB1689
	Q	8742,8744,8746	LTC024EEB
	Q	8745,8747	2SB1689
	D	8701,8712,8723,8734	FC-1608SXK630D08
	D	8702-8711,8713-8722	FC-1608YXK585F08
	D	8724-8733,8735-8744	FC-1608YXK585F08
	D	8745,8756,8767,8768	FC-1608SXK630D08
	D	8746-8755,8757-8766	FC-1608YXK585F08
	D	8769-8777,8780-8788	FC-1608YXK585F08
	D	8778,8779	FC-1608SXK630D08
	D	8789,8791,8793,8795	NHSW146A-A21460
	D	8790,8792,8794,8796	1SS355L@V
	D	8797,8799,8801,8803	NHSW146A-A21460
	D	8798,8800,8802,8804	1SS355L@V
	D	8805,8807,8809,8811	NHSW146A-A21460
	D	8806,8808,8810,8812	1SS355L@V
	D	8813,8815,8817,8819	NHSW146A-A21460
	D	8814,8816,8818,8820	1SS355L@V
	D	8821,8823,8825,8827	NHSW146A-A21460
	D	8822,8824,8826,8828	1SS355L@V
	D	8829,8831,8833,8835	NHSW146A-A21460
	D	8830,8832,8834,8836	1SS355L@V
	D	8837,8839,8841,8843	NHSW146A-A21460
	D	8838,8840,8842,8844	1SS355L@V
	D	8845,8847,8849,8851	NHSW146A-A21460
	D	8846,8848,8850,8852	1SS355L@V
	D	8901-8908	1SS355VM

MISCELLANEOUS

	L	8404,8902 CHIP BEEDS FILTER	BTX1047
	KN	8402 WRAPPING TERMINAL	CKF1089
	KN	8901-8905 WRAPPING TERMINAL	CKF1089
	X	8401 CRYSTAL RESONATOR (16 MHz)	BSS1146
	CN	8301 CONNECTOR	AKM1292
NSP	CN	8401 CONNECTOR	CKS3856
NSP	CN	8402 CONNECTOR	CKS3865
	CN	8404,8405,8407-8409 CONNECTOR	AKM1290
	CN	8406 27P CONNECTOR	RKN1068
	CN	8410 19P CONNECTOR	VKN1311
	CN	8411 CONNECTOR	AKM1290
	CN	8412 17P CONNECTOR	RKN1058
	CN	8413,8415 FFC/FPC CONNECTOR	CKS6543
	CN	8414 29P CONNECTOR	VKN1321
	CN	8416,8903 FFC/FPC CONNECTOR	CKS6543
	CN	8417,8418 CONNECTOR	AKM1275
	CN	8419 10P CONNECTOR	VKN1302
	CN	8420 24P CONNECTOR	VKN1316
NSP	CN	8701 CONNECTOR	CKS3860
	CN	8901 FFC/FPC CONNECTOR	CKS6646

Mark	No.	Description	Part No.
	CN	8902 FFC/FPC CONNECTOR	CKS6625
	VA	8301-8305 VARISTORS	EZJZ1V270RM
		RESISTORS	
	R	8302,8310,8318,8326	RS1/10SR0R0J
	R	8303,8311,8319,8327	RS1/10SR5102D
	R	8306,8314,8322,8330	RS1/10SR1002D
	R	8307,8315,8323,8331	RS1/10SR2701D
	R	8759,8763,8767,8771	RS1/10SR121J
	R	8775,8779,8783,8787	RS1/10SR121J
	R	8791,8795	RS1/10SR121J
	R	8799-8802	RS1/10SR151J
	R	8806,8809,8812,8815	RS1/10SR152J
	R	8818,8821,8824,8827	RS1/10SR152J
	R	8837,8841,8845,8849	RS1/10SR471J
	R	8854,8857,8860,8863	RS1/10SR103J
	R	8866,8869,8872,8875	RS1/10SR103J
	R	8931-8935	RS1/10SR0R0J
		Other Resistors	RS1/16SS###J
		CAPACITORS	
	C	8301-8306,8308,8402	CKSSYB104K16
	C	8403,8439,8440 (1 uF)	DCH1266
	C	8404,8430,8431,8441	CCSSCH102J50
	C	8422,8423,8426,8427	CKSSYB104K16
	C	8424,8425,8428,8429	CEVW101M16
	C	8432,8435,8438,8445	CKSSYB104K16
	C	8433,8436,8443,8707 (10 uF)	CCG1192
	C	8442,8448-8461,8468	CCSSCH102J50
	C	8446,8506	CEVW101M16
	C	8447,8465,8470,8476	CKSSYB104K16
	C	8462,8467,8481-8485	CCSSCH471J50
	C	8463,8464,8466,8471	CKSSYB103K50
	C	8469,8472,8473,8475	CCSSCH102J50
	C	8474,8478,8499	CCSSCH100D50
	C	8477,8479,8505,8507	CKSSYB104K16
	C	8480	CKSSYB473K16
	C	8488-8494,8519,8701	CCSSCH471J50
	C	8495-8498,8501-8503	CCSSCH102J50
	C	8508-8518,8525,8901	CCSSCH102J50
	C	8520,8521,8523	CKSSYB104K16
	C	8526-8536,8544,8704	CKSSYB104K16
	C	8703 (10 uF)	DCH1263
	C	8705,8709,8716,8906	CKSSYB103K50
	C	8706,8710,8711,8713	CKSSYB104K16
	C	8708,8934	CCSSCH471J50
	C	8718,8723	RS1/16SS223J
	C	8719,8722,8914 (10 uF)	CCG1192
	C	8724-8740,8907,8908	CKSSYB104K16

Mark	No.	Description	Part No.
		PNL3 ASSY	
		Consists of	
		CHF1 ASSY	
		CHF2 ASSY	
		CHF3 ASSY	
		CHF4 ASSY	
		CHF5 ASSY	
		CHF6 ASSY	
		SFXB ASSY	
		CUEVR ASSY	

R S T U V W AA AB

PNL3 ASSY

SEMICONDUCTORS

	IC	8101,8201	TC74HC4051AF
	D	8101-8119,8127,8129	1SS355L@V
	D	8120,8123,8224,8227	LTL17KRH5D-P
	D	8121,8122,8124,8125	LTL17KSL5D-P
	D	8126,8128,8130,8132	SLR343WBD2PT
	D	8131,8133,8135,8137	1SS355L@V
	D	8134,8136,8138,8140	SLR343WBD2PT
	D	8139,8141,8201-8223	1SS355L@V
	D	8225,8226,8228,8229	LTL17KSL5D-P
	D	8230,8233,8236,8239	LTL17KRH5D-P
	D	8231,8232,8234,8235	LTL17KSL5D-P
	D	8237,8238,8240,8241	LTL17KSL5D-P
	D	8242	LTL17KRH5D-P
	D	8243,8244	LTL17KSL5D-P

MISCELLANEOUS

	S	8101-8113,8201-8221 TACT SWITCH	DSG1079
	S	8114 SLIDE SWITCH	DSH1058
	CN	8011,8021,8031,8041 PLUG(4P)	KM200NA4
	CN	8051,8061 PLUG(4P)	KM200NA4
	CN	8102 29P CONNECTOR	VKN1260
	CN	8201 27P CONNECTOR	VKN1258
	CN	8202 10P CONNECTOR	VKN1241
		9001-9006 SPACER	DEC3622

RESISTORS

	VR	8011,8021 VARIABLE RESISTOR	CCW1024
	VR	8031,8041 VARIABLE RESISTOR	CCW1024
	VR	8051,8061 VARIABLE RESISTOR	CCW1024
	VR	8101,8104-8106 POTENTIONETER	DCS1065
	VR	8102,8103,8107-8109 ROTARY VR	DCS1125
	VR	8201-8205,8207 ROTARY VR	DCS1125
	VR	8206,8208 POTENTIOMETER	DCS1108
		Other Resistors	RS1/10SR###J

CAPACITORS

	C	8011,8022,8032,8042	CCSRCH471J50
	C	8012,8021,8031,8041	CKSRYB104K16
	C	8051,8061,8106	CKSRYB104K16
	C	8052,8062,8102-8105	CCSRCH471J50
	C	8101,8201	CEJQ470M16
	C	8107-8110,8202-8205	CCSRCH471J50
	C	8111-8119,8206	CKSRYB104K16
	C	8207-8210	CCSRCH471J50
	C	8211-8218	CKSRYB104K16

Mark	No.	Description	Part No.

AD
PNLR ASSY

SEMICONDUCTORS

	IC	7301-7304,7306	TC74HC4051AF
	IC	7305	NJM2903M
	Q	7301	RT1P431M
	D	7301,7302,7306,7307	LTL17KSL5D-P
	D	7305,7308	LTL17KRH5D-P
	D	7309,7310	LTL17KSL5D-P

MISCELLANEOUS

	S	7301-7303 TACT SWITCH	DSG1079
	S	7304-7308 ROTARY SWITCH	DSG1098
	CN	7301 24P CONNECTOR	VKN1255

RESISTORS

	VR	7301,7307,7308,7314 ROTARY VR	DCS1125
	VR	7302,7309,7316 POTENTIOMETER	DCS1109
	VR	7303-7306 POTENTIONETER	DCS1065
	VR	7310-7313 POTENTIONETER	DCS1065
	VR	7315,7321,7322,7328 ROTARY VR	DCS1125
	VR	7317-7320 POTENTIONETER	DCS1065
	VR	7323,7329 POTENTIOMETER	DCS1109
	VR	7324-7327,7333 POTENTIONETER	DCS1065
	VR	7330-7332 ROTARY VR	DCS1146
	VR	7334 ROTARY VR	DCS1125
		Other Resistors	RS1/10SR###J

CAPACITORS

	C	7304-7307,7313-7316	CCSRCH471J50
	C	7308-7312,7317-7320	CKSRYB104K16
	C	7321-7324,7330-7333	CCSRCH471J50
	C	7325-7329,7334-7337	CKSRYB104K16
	C	7338-7341,7347-7350	CCSRCH471J50
	C	7342-7346,7351-7354	CKSRYB104K16
	C	7355-7358,7364-7367	CCSRCH471J50
	C	7359-7363,7368-7372	CKSRYB104K16
	C	7373,7375-7377	CCSRCH471J50
	C	7374,7378-7383	CKSRYB104K16
	C	7384-7386	CCSRCH471J50
	C	7387-7389	CKSRYB104K16

AG
SW POWER SUPPLY

There is no service parts.