


EXPLODED VIEW (UNIT)

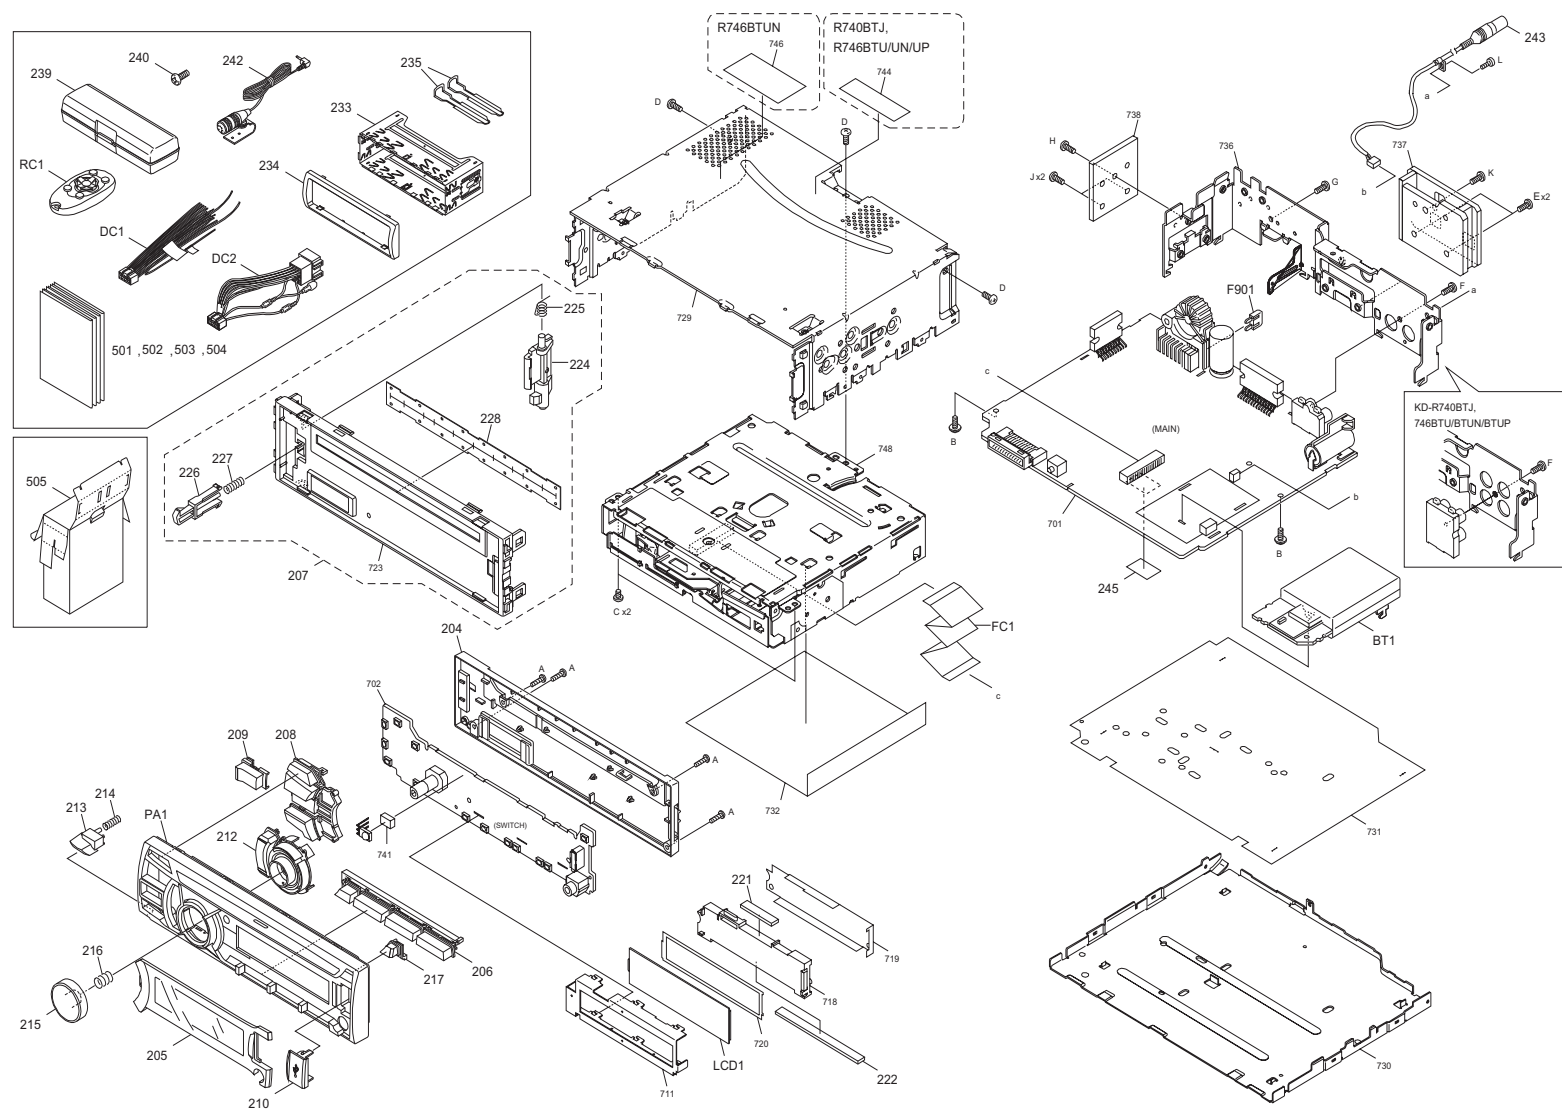

Block No.M1MM

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (UNIT) <M1MM>

△	BT1	QAU0552-001	RF MODULE		1	
	DC1	QAM1331-001	DC CORD		1	A
	DC1	QAM1332-001	DC CORD		1	F,G,H
	DC2	QAM1343-002	DC CORD		1	B,C,D,E
	F901	QMFZ064-100-J1	FUSE	10A	1	
	FC1	WJT0313-001A-E	E-CARD WIRE		1	
	LCD1	QLD0695-001	LCD MODULE		1	
	PA1	GE10347-003A	FRONT PANEL		1	A
	PA1	GE10347-002A	FRONT PANEL		1	B,C,D,E,F,G,H
	RC1	RM-RK52M	REMOTE CONTROL UNI		1	A,F,G,H
	A	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	B	GE40377-002A	SCREW		2	
	C	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	2	
	D	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	3	
	E	GE40377-005A	SPECIAL SCREW		2	
	F	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	G	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	H	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	1	
	J	GE40662-001A	SPECIAL SCREW		2	
	K	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	1	
	L	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	
	204	GE10348-001A	REAR COVER		1	
	205	GE20317-013A	FINDER(USB)		1	A
	205	GE20317-015A	FINDER(USB)		1	B,C,D,E
	205	GE20317-014A	FINDER(USB)		1	F,G,H
	206	GE20320-001A	PRESET BUTTON		1	
	207	GE35897-002A	F.CHASSIS (ASSY)		1	
	208	GE34858-001A	MENU BUTTON		1	A,F,G,H
	208	GE34858-002A	MENU BUTTON		1	B,C,D,E
	209	GE34859-001A	SOURCE BUTTON		1	
	210	GE34898-001A	USB DOOR		1	
	212	GE35006-001A	SEARCH BUTTON		1	
	213	GE35022-002A	DETACH BUTTON		1	
	214	GE30999-009A	COMP.SPRING		1	
	215	GE34917-002A	VOL KNOB		1	
	216	GE40127-006A	KNOB SPRING		1	
	217	GE35024-001A	EJECT BUTTON		1	
	221	QNZ1002-001	RUBBER CONNE		1	
	222	QNZ1003-001	RUBBER CONNE		1	
	224	GE34842-002A	LOCK LEVER		1	A,F,G,H
	224	GE34842-001A	LOCK LEVER		1	B,C,D,E
	225	GE40514-002A	TORSION SPRING		1	
	226	GE34843-001A	RELEASE LEVER		1	
	227	GE30999-008A	COMP.SPRING		1	
	228	GE40630-001A	BLIND		1	
	233	GE20316-001A	MOUNTING SLEEVE		1	
	234	GE20319-002A	TRIM PLATE		1	
	235	GE40643-001A	HOOK		2	
	239	GE32320-001A	HARD CASE ASSY		1	A,F,G,H
	240	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	1	A,B,C,D,E
	242	QAN0109-001	MICROPHONE		1	
	243	QAM1370-002	CAR CABLE		1	
	245	GE40466-017A	SPACER		1	
	501	GET0842-001A	INST BOOK	ENG SPA FRE	1	A
	501	GET0844-001A	INST BOOK	ENG FRE	1	B,C,D
	501	GET0844-003A	INST BOOK	GER	1	E
	501	GET0843-001A	INST BOOK	ENG	1	F
	501	GET0843-005A	INST BOOK	INA	1	G
	501	GET0843-004A	INST BOOK	KOR	1	H
	502	GET0844-002A	INST BOOK	DUT SPA ITA POR	1	B
	502	GET0844-005A	INST BOOK	POR GRE	1	E
	502	GET0843-002A	INST BOOK	RUS ARA PER THA	1	F
	503	GET0844-003A	INST BOOK	GER	1	B,C
	503	GET0844-008A	INST BOOK	SPA ARA PER TUR	1	D
	503	GET0844-006A	INST BOOK	HUN CZE BUL RUM	1	E
	503	GET0843-003A	INST BOOK	CHI(TAIWAN)	1	F
	504	GET0844-004A	INST BOOK	DAN FIN SWE	1	C
	504	GET0844-007A	INST BOOK	RUS UKR	1	E
	505	GE35171-001A	INNER CARTON		1	A
	505	GE35177-001A	INNER CARTON		1	B,C,D,E
	505	GE35174-001A	INNER CARTON		1	F,G,H

EXPLODED VIEW (CD MECHANISM: FLM-HC3-1D)

Block No.MBMM

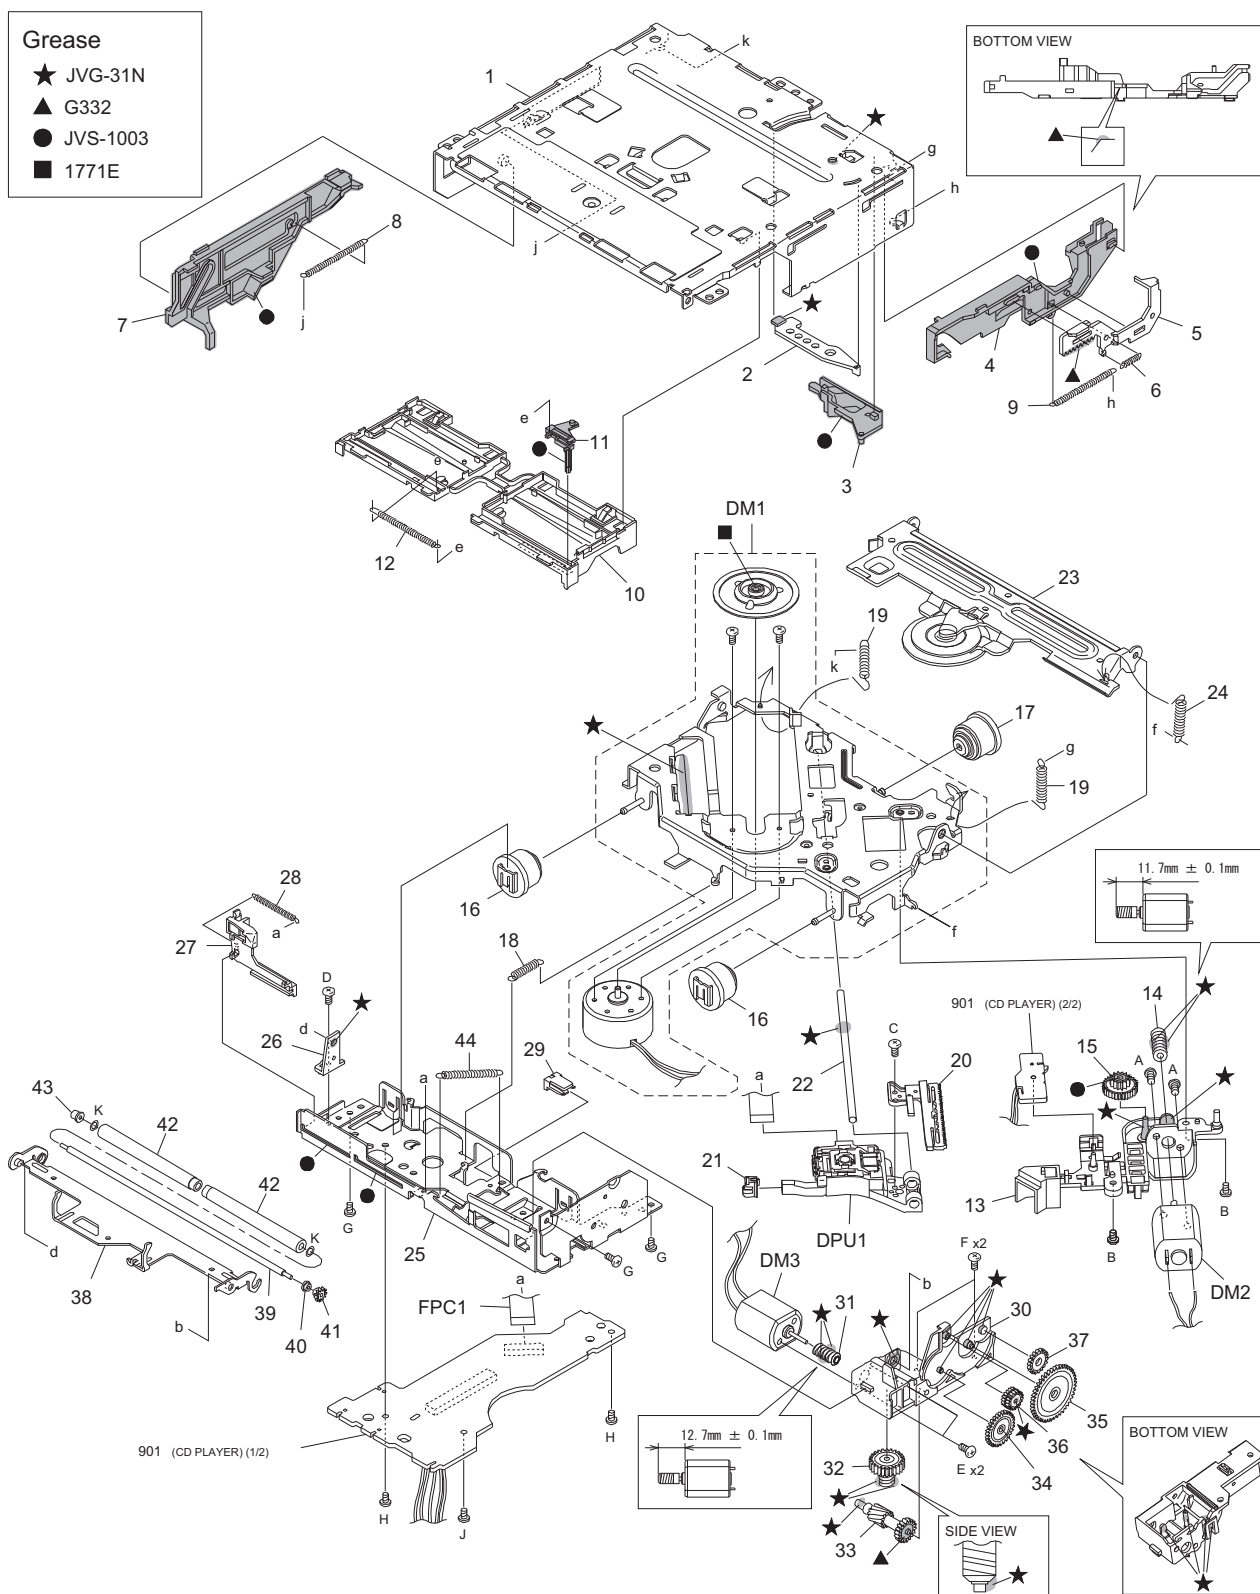

Parts with the exploded numbers larger than 900 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (CD MECHANISM:FLM-HC3-1D) <MBMM>

	DM1	CM-FLMHC1D	SPINDLE MOTOR ASSY		1	
	DM2	QAR0144-003	MOTOR	2.0V DC	1	
	DM3	QAR0144-003	MOTOR	2.0V DC	1	
△	DPU1	QAL1226-001	PICK UP		1	
	FPC1	QAL0817-003	FPC		1	
	A	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	B	VKZ4539-054	MINI SCREW		2	
	C	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	D	VKZ4539-054	MINI SCREW		1	
	E	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	F	VKZ4539-054	MINI SCREW		2	
	G	VKZ4539-054	MINI SCREW		3	
	H	VKZ4539-054	MINI SCREW		2	
	J	VKZ4539-054	MINI SCREW		1	
	K	LV45449-001A	WASHER		2	
	1	LV11685-004A	TOP FRAME		1	
	2	LV38953-002A	TRIGGER PLATE		1	
	3	LV38952-001A	FL SLIDER(B)		1	
	4	LV22826-003A	LOAD CAM		1	
	5	LV38951-001A	TRIGGER RACK		1	
	6	LV45415-001A	TRIGGER SPRING		1	
	7	LV22827-001A	FL SLIDER(L)		1	
	8	LV45416-001A	LOAD CAM SPRING		1	
	9	LV45417-001A	FL SLIDERSPRING		1	
	10	LV11689-001A	DISC GUIDE		1	
	11	LV38957-001A	SW SLIDER(R)		1	
	12	LV45505-001A	SW ACT SPRING		1	
	13	LV22828-001A	FEED BRACKET		1	
	14	LV36814-201A	F WORM GEAR		1	
	15	LV36815-002A	F WHEEL GEAR		1	
	16	LV36904-001A	DAMPER		2	
	17	LV37061-001A	DAMPER		1	
	18	LV45422-001A	SUS SPRING(F)		1	
	19	LV45423-001A	SUS SPRING(B)		2	
	20	LV38960-001A	FEED RACK		1	
	21	LV36813-201A	SUB GUIDE CAP		1	
	22	LV44555-001A	MAIN SHAFT		1	
	23	LV38950-002A	HC CL.BASE ASSY		1	
	24	LV45421-001A	HC CL.SPRING		1	
	25	LV11686-003A	BOTTOM FRAME		1	
	26	LV38954-003A	R.ARM GUIDE		1	
	27	LV39496-001A	SW ACTUATOR (2)		1	
	28	LV45505-001A	SW ACT SPRING		1	
	29	LV38962-001A	WIRE GUIDE		1	
	30	LV11688-001A	LOADING BASE		1	
	31	LV38963-001A	D.WORM GEAR		1	
	32	LV38964-001A	D.WHEEL GEAR		1	
	33	LV38965-002A	ACT GEAR(1)		1	
	34	LV38966-001A	ACT GEAR(2)		1	
	35	LV38967-001A	ACT GEAR(3)		1	
	36	LV38968-001A	ROLLER ACT GEAR		1	
	37	LV38969-001A	DRIVE GEAR		1	
	38	LV11690-001A	ROLLER ARM		1	
	39	LV45654-002A	ROLLER SHAFT 2		1	
	40	LV45412-001A	RA COLLAR(R)		1	
	41	LV38970-001A	HC ROLLER GEAR		1	
	42	LV45424-001A	HC ROLLER		2	
	43	LV45648-001A	RA COLLAR(L) 2		1	
	44	LV45418-001A	R.ARM SPRING		1	

EXPLODED VIEW (CD MECHANISM: FLM-HC5-1D)

Block No.MCMM

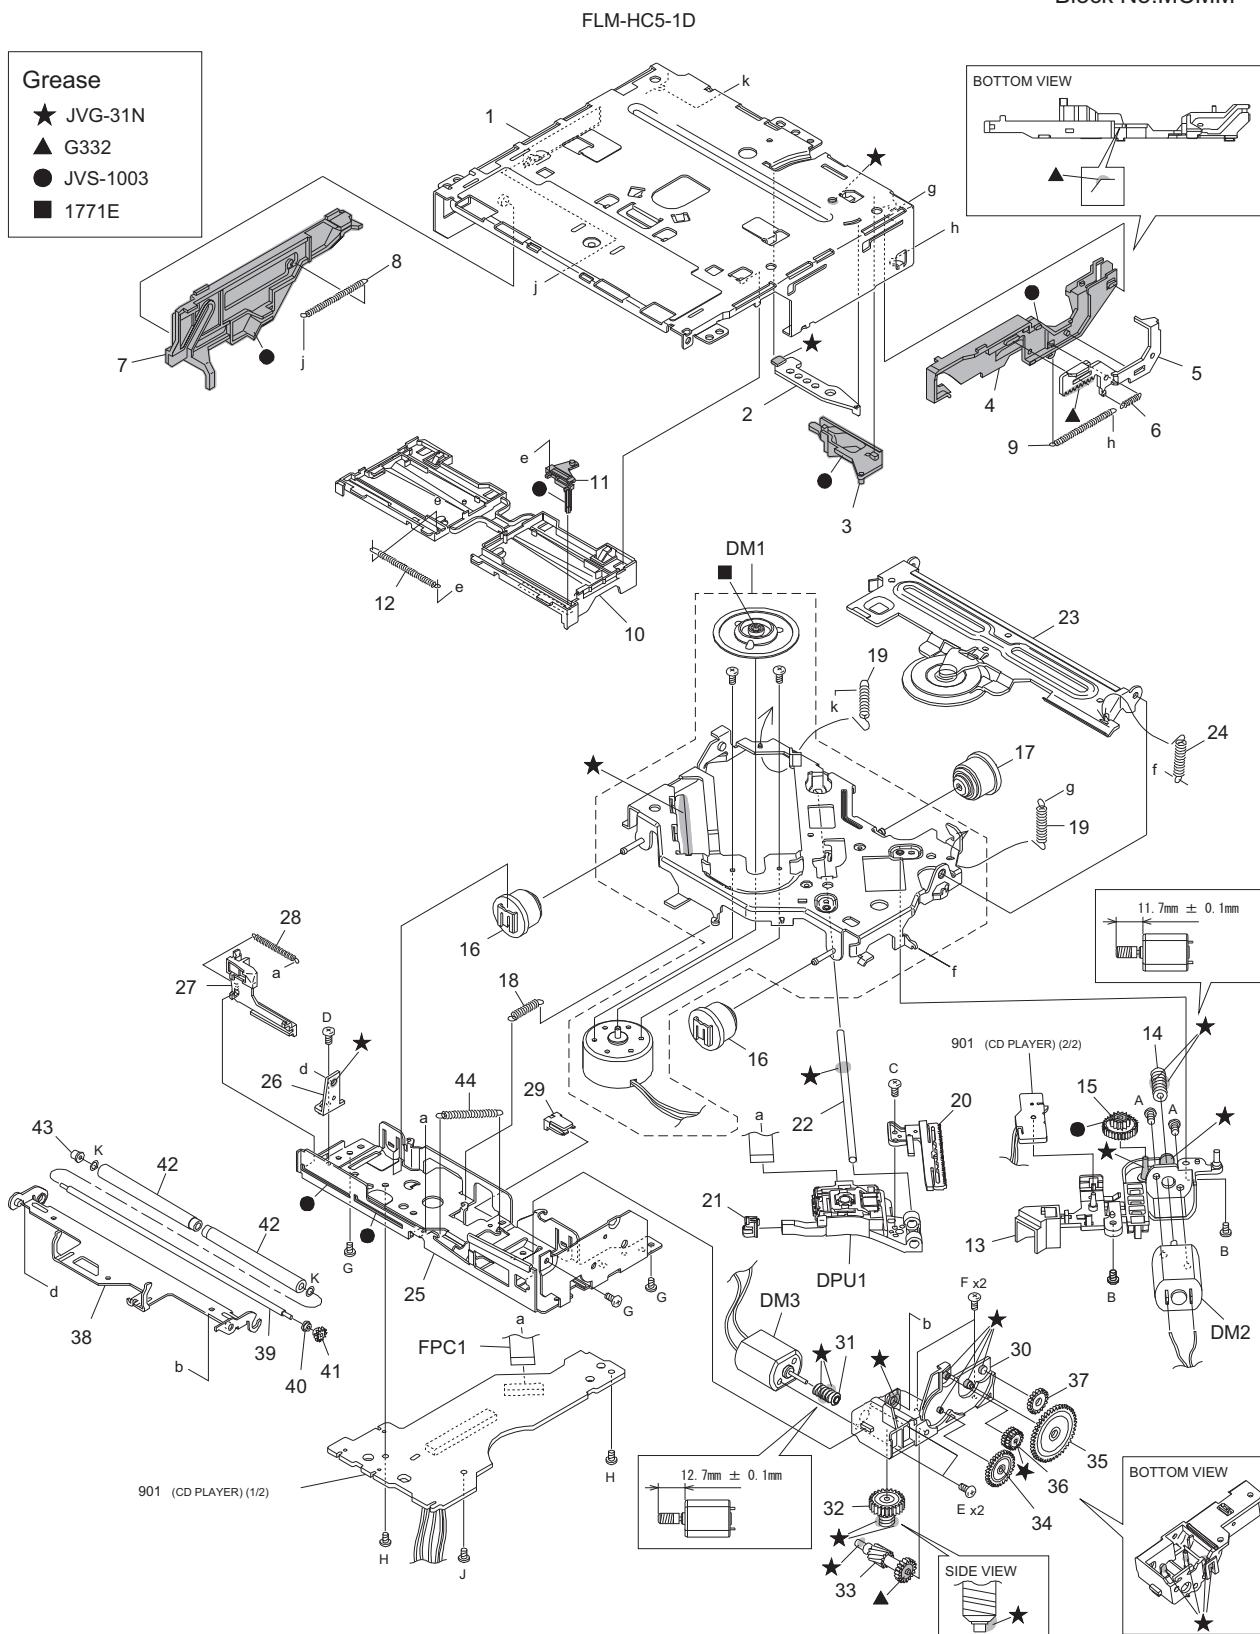

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
------	------------	-----------	------------	-------------	-----	-------

EXPLODED VIEW (CD MECHANISM:FLM-HC5-1D) <MCMM>

	DM1	CM-FLMHC1D	SPINDLE MOTOR ASSY		1	
	DM2	QAR0144-003	MOTOR	2.0V DC	1	
	DM3	QAR0144-003	MOTOR	2.0V DC	1	
△	DPU1	QAL1498-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	B	VKZ4539-054	MINI SCREW		2	
	C	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	D	VKZ4539-054	MINI SCREW		1	
	E	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	F	VKZ4539-054	MINI SCREW		2	
	G	VKZ4539-054	MINI SCREW		3	
	H	VKZ4539-054	MINI SCREW		2	
	J	VKZ4539-054	MINI SCREW		1	
	K	LV45449-001A	WASHER		2	
	1	LV11685-004A	TOP FRAME		1	
	2	LV38953-002A	TRIGGER PLATE		1	
	3	LV38952-001A	FL SLIDER(B)		1	
	4	LV22826-003A	LOAD CAM		1	
	5	LV38951-001A	TRIGGER RACK		1	
	6	LV45415-001A	TRIGGER SPRING		1	
	7	LV22827-001A	FL SLIDER(L)		1	
	8	LV45416-001A	LOAD CAM SPRING		1	
	9	LV45417-001A	FL SLIDERSPRING		1	
	10	LV11689-001A	DISC GUIDE		1	
	11	LV38957-001A	SW SLIDER(R)		1	
	12	LV45505-001A	SW ACT SPRING		1	
	13	LV22828-001A	FEED BRACKET		1	
	14	LV36814-201A	F WORM GEAR		1	
	15	LV36815-002A	F WHEEL GEAR		1	
	16	LV36904-001A	DAMPER		2	
	17	LV37061-001A	DAMPER		1	
	18	LV45422-001A	SUS SPRING(F)		1	
	19	LV45423-001A	SUS SPRING(B)		2	
	20	LV38960-001A	FEED RACK		1	
	21	LV36813-201A	SUB GUIDE CAP		1	
	22	LV44555-001A	MAIN SHAFT		1	
	23	LV38950-002A	HC CL.BASE ASSY		1	
	24	LV45421-001A	HC CL.SPRING		1	
	25	LV11686-003A	BOTTOM FRAME		1	
	26	LV38954-003A	R.ARM GUIDE		1	
	27	LV39496-001A	SW ACTUATOR (2)		1	
	28	LV45505-001A	SW ACT SPRING		1	
	29	LV38962-001A	WIRE GUIDE		1	
	30	LV11688-001A	LOADING BASE		1	
	31	LV38963-001A	D.WORM GEAR		1	
	32	LV38964-001A	D.WHEEL GEAR		1	
	33	LV38965-002A	ACT GEAR(1)		1	
	34	LV38966-001A	ACT GEAR(2)		1	
	35	LV38967-001A	ACT GEAR(3)		1	
	36	LV38968-001A	ROLLER ACT GEAR		1	
	37	LV38969-001A	DRIVE GEAR		1	
	38	LV11690-001A	ROLLER ARM		1	
	39	LV45654-002A	ROLLER SHAFT 2		1	
	40	LV45412-001A	RA COLLAR(R)		1	
	41	LV38970-001A	HC ROLLER GEAR		1	
	42	LV45424-001A	HC ROLLER		2	
	43	LV45648-001A	RA COLLAR(L) 2		1	
	44	LV45418-001A	R.ARM SPRING		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
ELECTORIC UNIT (GEA10350-xxA) <01>						
△	IC1	TEF6614TV1S4-X	IC		1	A,F,G
△	IC1	TEF6614TV1S3-X	IC		1	B,C,D,E,H
	IC80	MFI337S3959-X	IC		1	
	IC120	BA4560RFVM-W	IC		1	
	IC161	TDA7718B-X	IC		1	A,B,C,D,E
	IC161	TDA7720B-X	IC		1	F,G,H
	IC180	XC6223F331PG-X	IC		1	
△	IC301	JCV8031	IC		1	
△	IC501	LV8281VR-X	IC		1	
	IC530	BU33TD3WG-W	IC		1	
	IC531	BU15TD3WG-W	IC		1	
	IC532	BU15TD3WG-W	IC		1	
△	IC540	JCV8023	IC(DIGITAL)		1	
△	IC701	JES251C	IC(MICRO C ROM)		1	
	IC702	BU4828F-W	IC		1	
	IC771	BR24T02FJ-W-X	IC		1	
△	IC901	LV5680NPVC	IC		1	
	IC931	XC6213B332NG-X	IC		1	
	IC981	BD9673EFJ-X	IC		1	
	Q321	IMX9-W	PAIR TRANSISTOR		1	
	Q341	IMX9-W	PAIR TRANSISTOR		1	A,F,G,H
	Q540	2SA2188/FI-X	TRANSISTOR		1	
	Q780	LTA024EUB-X	DIGI TRANSISTOR		1	
	Q781	LTC024EUB-X	DIGI TRANSISTOR		1	
	Q782	LTA024EUB-X	DIGI TRANSISTOR		1	
	Q881	LTC014EUB-X	DIGI TRANSISTOR		1	
	Q951	2SA812/5-6I-X	TRANSISTOR		1	
	Q952	LTC044EUB-X	DIGI TRANSISTOR		1	
	Q970	LSCR523UB-X	TRANSISTOR		1	
	Q971	LSCR523UB-X	TRANSISTOR		1	
	D1	NAF0029-002X	ESD SUPPRESSOR		1	
	D100	RKZ6.2B2KG-X	Z DIODE		1	
	D101	RKZ6.2B2KG-X	Z DIODE		1	
	D110	RKZ6.2B2KG-X	Z DIODE		1	
	D111	RKZ6.2B2KG-X	Z DIODE		1	
	D184	RKZ5.1B2KG-X	Z DIODE		1	
	D321	BAW56-TP-X	SI DIODE		1	
	D341	BAW56-TP-X	SI DIODE		1	A,F,G,H
	D502	GS1J-LTP-X	SI DIODE		1	
	D540	RKS801KF-X	SI DIODE		1	
	D704	RKZ6.2B2KG-X	Z DIODE		1	
	D780	BAW56-TP-X	SI DIODE		1	
	D781	BAW56-TP-X	SI DIODE		1	
	D782	RKS801KF-X	SI DIODE		1	
	D783	BAW56-TP-X	SI DIODE		1	
	D851	MBRX130-TP-X	SB DIODE		1	F,G,H
	D852	MBRX130-TP-X	SB DIODE		1	F,G,H
△	D901	1N5401-BPC04	SI DIODE		1	
	D902	MBRX130-TP-X	SB DIODE		1	
	D941	MBRX130-TP-X	SB DIODE		1	
	D942	MBRX130-TP-X	SB DIODE		1	
	D970	RKZ6.8B2KG-X	Z DIODE		1	
	D971	RKZ6.8B2KG-X	Z DIODE		1	
	D981	DB22306-X	SB DIODE		1	
	C1	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C2	NDC31HJ-7R0X	C CAPACITOR	7pF 50V J	1	A,B,C,D,E
	C2	NDC31HJ-4R0X	C CAPACITOR	4pF 50V J	1	F,G,H
	C3	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	
	C4	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C5	NDC31HJ-150X	C CAPACITOR	15pF 50V J	1	
	C6	NDC31HJ-6R0X	C CAPACITOR	6pF 50V J	1	A,B,C,D,E
	C6	NDC31HJ-4R0X	C CAPACITOR	4pF 50V J	1	F,G,H
	C7	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C10	NCB21CK-105X	C CAPACITOR	1uF 16V K	1	
	C11	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C12	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C13	NCB21CK-105X	C CAPACITOR	1uF 16V K	1	
	C14	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C15	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C16	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C17	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C18	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C19	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C20	NDC31HJ-120X	C CAPACITOR	12pF 50V J	1	
	C21	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C22	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C23	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C24	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C26	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C27	NDC31HJ-2R0X	C CAPACITOR	2pF 50V J	1	A,B,C,D,E
	C28	NDC31HJ-100X	C CAPACITOR	10pF 50V J	1	A
	C80	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C100	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	H
	C101	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C102	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C110	NCB31HK-102X	C CAPACITOR	1000pF 50V K	1	H
	C111	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C112	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C120	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C121	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C122	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C123	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C124	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C125	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C126	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C127	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C128	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C129	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C130	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C150	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C151	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C152	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C155	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C156	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C160	QEKJ1EM-106Z-S	E CAPACITOR	10uF 25V M	1	
	C161	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C162	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	
	C166	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C168	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C169	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C170	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E
	C171	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	A,B,C,D,E
	C172	QEKJ1CM-107Z-S	E CAPACITOR	100uF 16V M	1	
	C173	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C174	QTE1V67-475Z	E CAPACITOR	4.7uF 35V	1	
	C175	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	F,G,H
	C177	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C180	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C182	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C184	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C185	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C186	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C187	QERF1EM-475Z-E	E CAPACITOR	4.7uF 25V M	1	
	C190	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C191	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C192	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C193	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C194	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C195	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C197	NDC31HJ-121X	C CAPACITOR	120pF 50V J	1	
	C305	NCZ1106-224X	C CAPACITOR	0.22uF	1	
	C306	NCZ1106-224X	C CAPACITOR	0.22uF	1	
	C307	NCZ1106-224X	C CAPACITOR	0.22uF	1	
	C308	NCZ1106-224X	C CAPACITOR	0.22uF	1	
	C309	QEKJ1CM-476Z-S	E CAPACITOR	47uF 16V M	1	
	C311	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C312	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	1	
	C313	NCB21AK-105X-A	C CAPACITOR	1uF 10V K	1	
	C314	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C315	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C320	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C321	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C330	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	
	C331	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C340	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	A,F,G,H
	C341	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	A,F,G,H
	C350	QEKJ1HM-106Z	E CAPACITOR	10uF 50V M	1	A,F,G,H
	C351	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	A,F,G,H
	C368	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C501	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C504	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C505	NCB31HK-473X	C CAPACITOR	0.047uF 50V K	1	
	C506	NCB31CK-224X	C CAPACITOR	0.22uF 16V K	1	
	C507	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C513	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C514	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1	
	C530	NCB31AK-105X	C CAPACITOR	1uF 10V K	1	
	C531	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C532	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C533	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C534	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C535	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C540	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C541	NCB31HK-222X	C CAPACITOR	2200pF 50V K	1	
	C542	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C543	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C544	NCB31HK-332X	C CAPACITOR	3300pF 50V K	1	
	C545	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C546	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C547	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C548	NDC31HJ-680X	C CAPACITOR	68pF 50V J	1	
	C549	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C550	NCB20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
	C551	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C552	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	
	C553	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C554	NDC31HJ-331X	C CAPACITOR	330pF 50V J	1	
	C555	NDC31HJ-681X	C CAPACITOR	680pF 50V J	1	
	C556	NCB31CK-683X	C CAPACITOR	0.068uF 16V K	1	
	C557	NCB31HK-333X	C CAPACITOR	0.033uF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C558	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C559	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C561	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C562	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	
	C564	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C565	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C566	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C567	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C568	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C569	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C570	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C571	NDC31HJ-470X	C CAPACITOR	47pF 50V J	1	
	C572	NCB31HK-153X	C CAPACITOR	0.015uF 50V K	1	
	C573	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C574	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C576	NCB31HK-152X	C CAPACITOR	1500pF 50V K	1	
	C582	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1	
	C583	NDC31HJ-102X	C CAPACITOR	1000pF 50V J	1	
	C592	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C593	NDC31HJ-101X	C CAPACITOR	100pF 50V J	1	
	C701	NDC31HJ-180X	C CAPACITOR	18pF 50V J	1	
	C702	NDC31HJ-180X	C CAPACITOR	18pF 50V J	1	
	C703	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C704	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C705	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C706	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C708	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C709	NCB31CK-474X	C CAPACITOR	0.47uF 16V K	1	
	C712	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C713	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C714	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C715	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C716	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C717	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C718	NCB31CK-474X	C CAPACITOR	0.47uF 16V K	1	
	C722	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C723	NCB31EK-473X	C CAPACITOR	0.047uF 25V K	1	
	C724	NDC31HJ-8R0X	C CAPACITOR	8pF 50V J	1	
	C725	NDC31HJ-8R0X	C CAPACITOR	8pF 50V J	1	
	C728	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C729	NCB20JK-106X-R	C CAPACITOR	10uF 6.3V K	1	
	C731	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C733	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C740	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C742	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C743	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C746	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C747	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C796	NDC31HJ-6R0X	C CAPACITOR	6pF 50V J	1	
	C881	QERF1EM-226Z	E CAPACITOR	22uF 25V M	1	
	C901	QE20937-278	E CAPACITOR	2700uF	1	
	C903	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C904	QEKJ1CM-476Z	E CAPACITOR	47uF 16V M	1	
	C905	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C906	QEKJ1CM-107Z	E CAPACITOR	100uF 16V M	1	
	C907	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C908	NCB20JK-106X	C CAPACITOR	10uF 6.3V K	1	F,G,H
	C909	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C910	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C912	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C913	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C916	QEKJ1EM-106Z	E CAPACITOR	10uF 25V M	1	
	C920	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C921	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C922	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C923	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C924	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C925	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C926	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C927	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C931	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C932	QERF0JM-337Z	E CAPACITOR	330uF 6.3V M	1	
	C933	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C941	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C954	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C963	QERF1AM-107Z	E CAPACITOR	100uF 10V M	1	
	C981	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C983	NCB31HK-682X	C CAPACITOR	6800pF 50V K	1	
	C984	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C985	QEKJ1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C987	NCB10JK-106X-A	C CAPACITOR	10uF 6.3V K	1	
	C989	QEKJ1EM-476Z	E CAPACITOR	47uF 25V M	1	
	C990	NCJ31EK-224X-R	C CAPACITOR	0.22uF 25V K	1	
	C991	NCJ31EK-224X-R	C CAPACITOR	0.22uF 25V K	1	
	R1	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	A,B,C,D,E
	R1	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	F,G,H
	R2	NRSA63J-684X	MG RESISTOR	680kΩ 1/16W J	1	A,B,C,D,E
	R2	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	1	F,G,H
	R3	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	F,G,H
	R4	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R6	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R7	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R8	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	
	R9	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E,F,G,H
	R10	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	F,G,H
	R100	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R101	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R102	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R111	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R112	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R120	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R121	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R122	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R123	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R124	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R125	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R126	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R127	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R128	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R129	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R130	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	1	
△	R161	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R162	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R163	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R165	NRS181J-101X	MG RESISTOR	100Ω 1/8W J	1	
	R167	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	A,B,C,D,E
	R168	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	A,B,C,D,E
	R169	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	F,G,H
	R177	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	F,G,H
	R178	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R181	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R182	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R183	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R187	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R188	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R189	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R190	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R192	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R195	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	
	R196	NRS181J-181X	MG RESISTOR	180Ω 1/8W J	1	
	R199	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R302	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R303	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R306	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R308	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R310	NRS181J-5R1X	MG RESISTOR	5.1Ω 1/8W J	1	
	R320	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R321	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R322	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R323	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R330	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R331	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R332	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	
	R333	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R335	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	B,C,D,E
	R340	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,F,G,H
	R341	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,F,G,H
	R342	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,F,G,H
	R347	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,F,G,H
	R349	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	A,F,G,H
	R350	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	A,F,G,H
	R351	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	A,F,G,H
	R352	NRSA63J-181X	MG RESISTOR	180Ω 1/16W J	1	A,F,G,H
	R357	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R358	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R400	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	R401	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	R402	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R403	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R405	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R407	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R408	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R409	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R410	NRZ0084-0R0X	MG RESISTOR	0Ω	1	
	R411	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R412	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R413	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R414	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R417	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R418	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R419	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R420	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R421	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R430	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R431	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R432	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R433	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R501	NRSA63J-114X	MG RESISTOR	110kΩ 1/16W J	1	
	R502	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R503	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R504	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R505	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R506	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J	1	
	R507	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	1	
	R508	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R509	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R510	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R511	NRSA63J-133X	MG RESISTOR	13kΩ 1/16W J	1	
	R512	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R513	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R516	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R518	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R519	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	1	
	R530	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R534	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R539	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R540	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	1	
	R545	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J	1	
	R547	NRSA63J-4R7X	MG RESISTOR	4.7Ω 1/16W J	1	
	R548	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R549	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R550	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R553	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R554	NRSA02J-4R7X	MG RESISTOR	4.7Ω 1/10W J	1	
	R555	NRSA02J-4R7X	MG RESISTOR	4.7Ω 1/10W J	1	
	R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R557	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	1	
	R558	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R559	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R560	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R561	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R562	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R563	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	1	
	R564	NRSA63J-391X	MG RESISTOR	390Ω 1/16W J	1	
	R565	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R566	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R567	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R568	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R569	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R570	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R571	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R572	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R573	NRSA63J-334X	MG RESISTOR	330kΩ 1/16W J	1	
	R574	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R575	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R576	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R577	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R595	NRSA63J-202X	MG RESISTOR	2kΩ 1/16W J	1	
	R596	NRSA63J-202X	MG RESISTOR	2kΩ 1/16W J	1	
	R701	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R702	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R703	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R705	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R706	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R712	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R718	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R720	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R721	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	1	
	R722	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R723	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R724	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R725	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R726	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R727	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R728	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R730	NRS181J-473X	MG RESISTOR	47kΩ 1/8W J	1	
	R731	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R732	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R733	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R735	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R736	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R737	NRSA63J-911X	MG RESISTOR	910Ω 1/16W J	1	
	R738	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	1	
	R739	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R740	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R741	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R742	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R743	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R745	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1	
	R746	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R747	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	1	
	R749	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R750	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R751	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	
	R753	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R754	NRSA63J-332X	MG RESISTOR	3.3kΩ 1/16W J	1	
	R755	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R757	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R758	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R759	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R760	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R761	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R762	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R763	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R764	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	B,C,D,E
	R764	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	F,G,H
	R765	NRSA63J-393X	MG RESISTOR	39kΩ 1/16W J	1	
	R766	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	A
	R766	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	1	B,C,D,E
	R766	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	F,G,H
	R767	NRSA63J-822X	MG RESISTOR	8.2kΩ 1/16W J	1	
	R768	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R769	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R770	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R771	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R772	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R773	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R774	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R775	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R776	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	1	
	R777	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R778	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R779	NRSA63J-271X	MG RESISTOR	270Ω 1/16W J	1	
	R780	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R781	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R782	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R783	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	1	
	R784	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R785	NRS181J-273X	MG RESISTOR	27kΩ 1/8W J	1	
	R786	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R789	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J	1	
	R790	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J	1	
	R792	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R795	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	R796	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	1	
	R851	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	F,G,H
	R881	NRS181J-273X	MG RESISTOR	27kΩ 1/8W J	1	
	R882	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R901	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	
	R902	NRS181J-682X	MG RESISTOR	6.8kΩ 1/8W J	1	
	R905	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1	
	R906	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	1	
	R907	NRSA63J-155X	MG RESISTOR	1.5MΩ 1/16W J	1	
	R908	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R909	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J	1	
	R910	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1	
	R941	NRS181J-472X	MG RESISTOR	4.7kΩ 1/8W J	1	
	R951	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R952	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	1	
	R970	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R971	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R972	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R973	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	1	
	R974	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	1	
	R975	NRSA02J-473X	MG RESISTOR	47kΩ 1/10W J	1	
	R976	NRSA02J-683X	MG RESISTOR	68kΩ 1/10W J	1	
	R981	NRSA63D-913X	MG RESISTOR	91kΩ 1/16W D	1	
	R982	NRSA63D-273X	MG RESISTOR	27kΩ 1/16W D	1	
	R983	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	1	
	R984	NRS181J-220X	MG RESISTOR	22Ω 1/8W J	1	
	R986	NRSA63D-114X	MG RESISTOR	110kΩ 1/16W D	1	
	R987	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	L1	NQL093K-R47X	P COIL	0.47uH K	1	A,B,C,D,E
	L1	NQL093K-1R0X	P COIL	1uH K	1	F,G,H
	L2	NQL093K-1R8X	P COIL	1.8uH K	1	A,B,C,D,E
	L2	NQL093K-3R3X	P COIL	3.3uH K	1	F,G,H
	L3	NQL093K-R27X	P COIL	0.27uH K	1	
	L4	QQR1872-001	RF COIL		1	
	L5	NQL114K-561X	P COIL	560uH K	1	
	L6	NQL114K-561X	P COIL	560uH K	1	
	L7	NQL79GM-4R7X	COIL	4.7uH M	1	
	L8	NQL093K-4R7X	P COIL	4.7uH K	1	A,B,C,D,E
	L9	NQL093K-R47X	P COIL	0.47uH K	1	
	L10	NQL103J-10NX	COIL	10nH J	1	A
	L11	NQR0251-002X	FERRITE BEADS		1	
	L12	NQR0251-002X	FERRITE BEADS		1	
	L181	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	L182	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1	
	L186	NQR0154-006X	FERRITE CORE		1	
	L187	NQR0154-006X	FERRITE CORE		1	
	L531	NQR0154-006X	FERRITE CORE		1	
	L561	NQR0154-006X	FERRITE CORE		1	
	L562	NQR0154-006X	FERRITE CORE		1	
	L701	NQL79GM-4R7X	COIL	4.7uH M	1	
	L763	NQR0154-006X	FERRITE CORE		1	
	L764	NQR0154-006X	FERRITE CORE		1	
	L765	NQR0154-006X	FERRITE CORE		1	
	L901	QQR1884-001	CHOKE COIL		1	
	L981	QQL92AK-220Z	COIL	22uH K	1	A,B,C,D,E
	L981	QQLA1AM-220	COIL	22uH M	1	F,G,H
	L982	NQLH25M-4R7X	COIL	4.7uH M	1	
	CN180	QGB0519L3-24X	CONNECTOR	B-B (1-24)	1	
	CN181	QGA2001F1-02	CONNECTOR	W-B (1-2)	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	CN502	QGF1040F1-26	CONNECTOR	FFC/FPC (1-26)	1	
	CN701	QGZ1102J1-20	CONNECTOR	(1-20)	1	
	CN901	QNZ0607-001	CAR CONNECTOR		1	
	J1	QNB0358-001	ANT TERMINAL		1	
	J321	QNN0868-001	PIN JACK		1	A,F,G,H
	J321	QNN0874-001	PIN JACK		1	B,C,D,E
	S701	QSW0648-001Z	TACT SWITCH		1	
	X1	QAX0952-001Z	CRYSTAL		1	
	X540	QAX0929-001Z	C RESONATOR		1	
	X701	NAX1121-001X	CRYSTAL		1	
	X702	QAX0401-001	CRYSTAL	32.768KHz	1	
SWITCH UNIT (GEA10344-xxA) <02>						
	IC603	TPS2065CDBV-X	IC		1	
	IC661	PT16580-LQ	IC		1	
	IC681	KSM-2003TN5B	IR DETECT UNIT		1	
	Q632	2SC6046-X	TRANSISTOR		1	
	Q633	LSCR523UB-X	TRANSISTOR		1	
	D639	QSMR-C13/BCMN-X	LED		1	
	D640	QSMR-C13/BCMN-X	LED		1	
	D641	QSMR-C13/BCMN-X	LED		1	
	D642	QSMR-C13/BCMN-X	LED		1	
	D643	QSMR-C13/BCMN-X	LED		1	
	D644	QSMR-C13/BCMN-X	LED		1	
	D645	QSMR-C13/BCMN-X	LED		1	
	D646	QSMR-C13/BCMN-X	LED		1	
	D647	QSMR-C13/BCMN-X	LED		1	
	D648	QSMR-C13/BCMN-X	LED		1	
	D649	QSMR-C13/BCMN-X	LED		1	
	D650	QSMR-C13/BCMN-X	LED		1	
	D651	QSMR-C13/BCMN-X	LED		1	
	D652	QSMR-C13/BCMN-X	LED		1	
	D653	QSMR-C13/BCMN-X	LED		1	
	D654	QSMR-C13/BCMN-X	LED		1	
	D655	QSMR-C13/BCMN-X	LED		1	
	D656	QSMR-C13/BCMN-X	LED		1	
	D659	LWY1SG/45/Z1-X	LED		1	
	D660	RKZ5.1B2KG-X	SB DIODE		1	
	D662	RKZ5.1B2KG-X	SB DIODE		1	
	D663	RKZ5.1B2KG-X	SB DIODE		1	
	D664	RKZ5.1B2KG-X	SB DIODE		1	
	D681	RKZ3.3B2KG-X	Z DIODE		1	
	D682	MBRX130-TP-X	SB DIODE		1	
	D691	RKZ5.1B2KG-X	SB DIODE		1	
	D692	RKZ5.1B2KG-X	SB DIODE		1	
	C605	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	C606	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C607	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C608	NDC31HJ-471X	C CAPACITOR	470pF 50V J	1	
	C661	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	1	
	C662	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C663	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C664	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C665	NCB31CK-105X	C CAPACITOR	1uF 16V K	1	
	C671	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C672	NCB31HK-472X	C CAPACITOR	4700pF 50V K	1	
	C679	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C680	NDC31HJ-270X	C CAPACITOR	27pF 50V J	1	
	C682	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C691	NCJ11EK-106X-R	C CAPACITOR	10uF 25V	1	
	R601	NRSA63J-162X	MG RESISTOR	1.6kΩ 1/16W J	1	
	R602	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R603	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R604	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J	1	
	R605	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R606	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R607	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R608	NRSA63J-392X	MG RESISTOR	3.9kΩ 1/16W J	1	
	R609	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R610	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R611	NRSA63J-821X	MG RESISTOR	820Ω 1/16W J	1	
	R612	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	1	
	R613	NRSA63J-182X	MG RESISTOR	1.8kΩ 1/16W J	1	
	R614	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R615	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	1	
	R638	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R639	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R640	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R641	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R642	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R643	NRS181J-202X	MG RESISTOR	2kΩ 1/8W J	1	
	R644	NRS181J-202X	MG RESISTOR	2kΩ 1/8W J	1	
	R645	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R646	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R647	NRS181J-681X	MG RESISTOR	680Ω 1/8W J	1	
	R648	NRS181J-202X	MG RESISTOR	2kΩ 1/8W J	1	
	R649	NRS181J-202X	MG RESISTOR	2kΩ 1/8W J	1	
	R650	NRS181J-911X	MG RESISTOR	910Ω 1/8W J	1	
	R651	NRS181J-911X	MG RESISTOR	910Ω 1/8W J	1	
	R652	NRSA63J-272X	MG RESISTOR	2.7kΩ 1/16W J	1	
	R653	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1	
	R660	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	
	R661	NRS181J-471X	MG RESISTOR	470Ω 1/8W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KD-R740BTJ	A	KD-R741BTE	B	KD-R741BTEN	C	KD-R741BTEU	D
KD-R741BTEY	E	KD-R746BTU	F	KD-R746BTUN	G	KD-R746BTUP	H

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
		R662	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1
		R663	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1
		R664	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	1
		R665	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1
		R666	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1
		R667	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	1
		R676	NRS181J-1R5X	MG RESISTOR	1.5Ω 1/8W J	1
		R678	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1
		R681	NRS181J-331X	MG RESISTOR	330Ω 1/8W J	1
		R682	NRSA63J-0R0X	MG RESISTOR	0Ω 1/10W J	1
		R691	NRS181J-103X	MG RESISTOR	10kΩ 1/8W J	1
		L670	NQR0007-002X	FERRITE BEADS		1 A,B,C,D,E
		L670	NRSA02J-4R7X	MG RESISTOR	4.7Ω 1/10W J	1 F,G,H
		L673	NQR0007-002X	FERRITE BEADS		1 A,B,C,D,E
		L673	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1 F,G,H
		L674	NQR0007-002X	FERRITE BEADS		1 A,B,C,D,E
		L674	NRSA02J-101X	MG RESISTOR	100Ω 1/10W J	1 F,G,H
		CN601	QGZ1102K3-20X	CONNECTOR	(1-20)	1
		CN603	QNZ1076-001	USB CONNECTOR		1
		J601	QNS0279-001	3.5 JACK		1
		JS601	QSW1299-001	ROTARY ENCODER		1
		LF691	NQR0536-001X	CHOKE COIL		1
		S601	NSW0246-001X	TACT SWITCH		1
		S602	NSW0246-001X	TACT SWITCH		1
		S603	NSW0246-001X	TACT SWITCH		1
		S604	NSW0246-001X	TACT SWITCH		1
		S605	NSW0246-001X	TACT SWITCH		1
		S606	NSW0246-001X	TACT SWITCH		1
		S607	NSW0246-001X	TACT SWITCH		1
		S608	NSW0246-001X	TACT SWITCH		1
		S609	NSW0246-001X	TACT SWITCH		1
		S610	NSW0246-001X	TACT SWITCH		1
		S611	NSW0246-001X	TACT SWITCH		1
		S612	NSW0246-001X	TACT SWITCH		1
		S613	NSW0246-001X	TACT SWITCH		1
		S614	NSW0246-001X	TACT SWITCH		1
		CD PLAYER UNIT (LVA11003-03A)(FLM-HC3-1D) IN CD MECHA <03>				
		R1	NRSA63J-131X	MG RESISTOR	130Ω 1/16W J	1
		B1	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1
		CN101	QGF1044F2-26X	CONNECTOR	FFC/FPC (1-26)	1
		CN102	QGF0522F3-15W	CONNECTOR	FFC/FPC (1-15)	1
		SW1	NSW0291-001X	DETECT SWITCH		1
		SW2	NSW0291-001X	DETECT SWITCH		1
		SW3	NSW0291-001X	DETECT SWITCH		1
		SW4	NSW0291-001X	DETECT SWITCH		1
		CD PLAYER UNIT (LVA11003-05A)(FLM-HC5-1D) IN CD MECHA <04>				
		R1	NRSA63J-131X	MG RESISTOR	130Ω 1/16W J	1
		B1	NRS181J-0R0X	MG RESISTOR	0Ω 1/8W J	1
		CN101	QGF1044F3-26X	CONNECTOR	FFC/FPC (1-26)	1
		CN102	QGF0522F5-15W	CONNECTOR	FFC/FPC (1-15)	1
		SW1	NSW0291-001X	DETECT SWITCH		1
		SW2	NSW0291-001X	DETECT SWITCH		1
		SW3	NSW0291-001X	DETECT SWITCH		1
		SW4	NSW0291-001X	DETECT SWITCH		1