


2. EXPLODED VIEWS AND PARTS LIST

NOTES : • Parts marked by " * " are generally unavailable because they are not in our Master Spare Parts List.
• The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
• Screw adjacent to  mark on the product are used for disassembly.
• For the applying amount of lubricants or glue, follow the instructions in this manual.
(In the case of no amount instructions, apply as you think it appropriate.)


2.1 PACKING

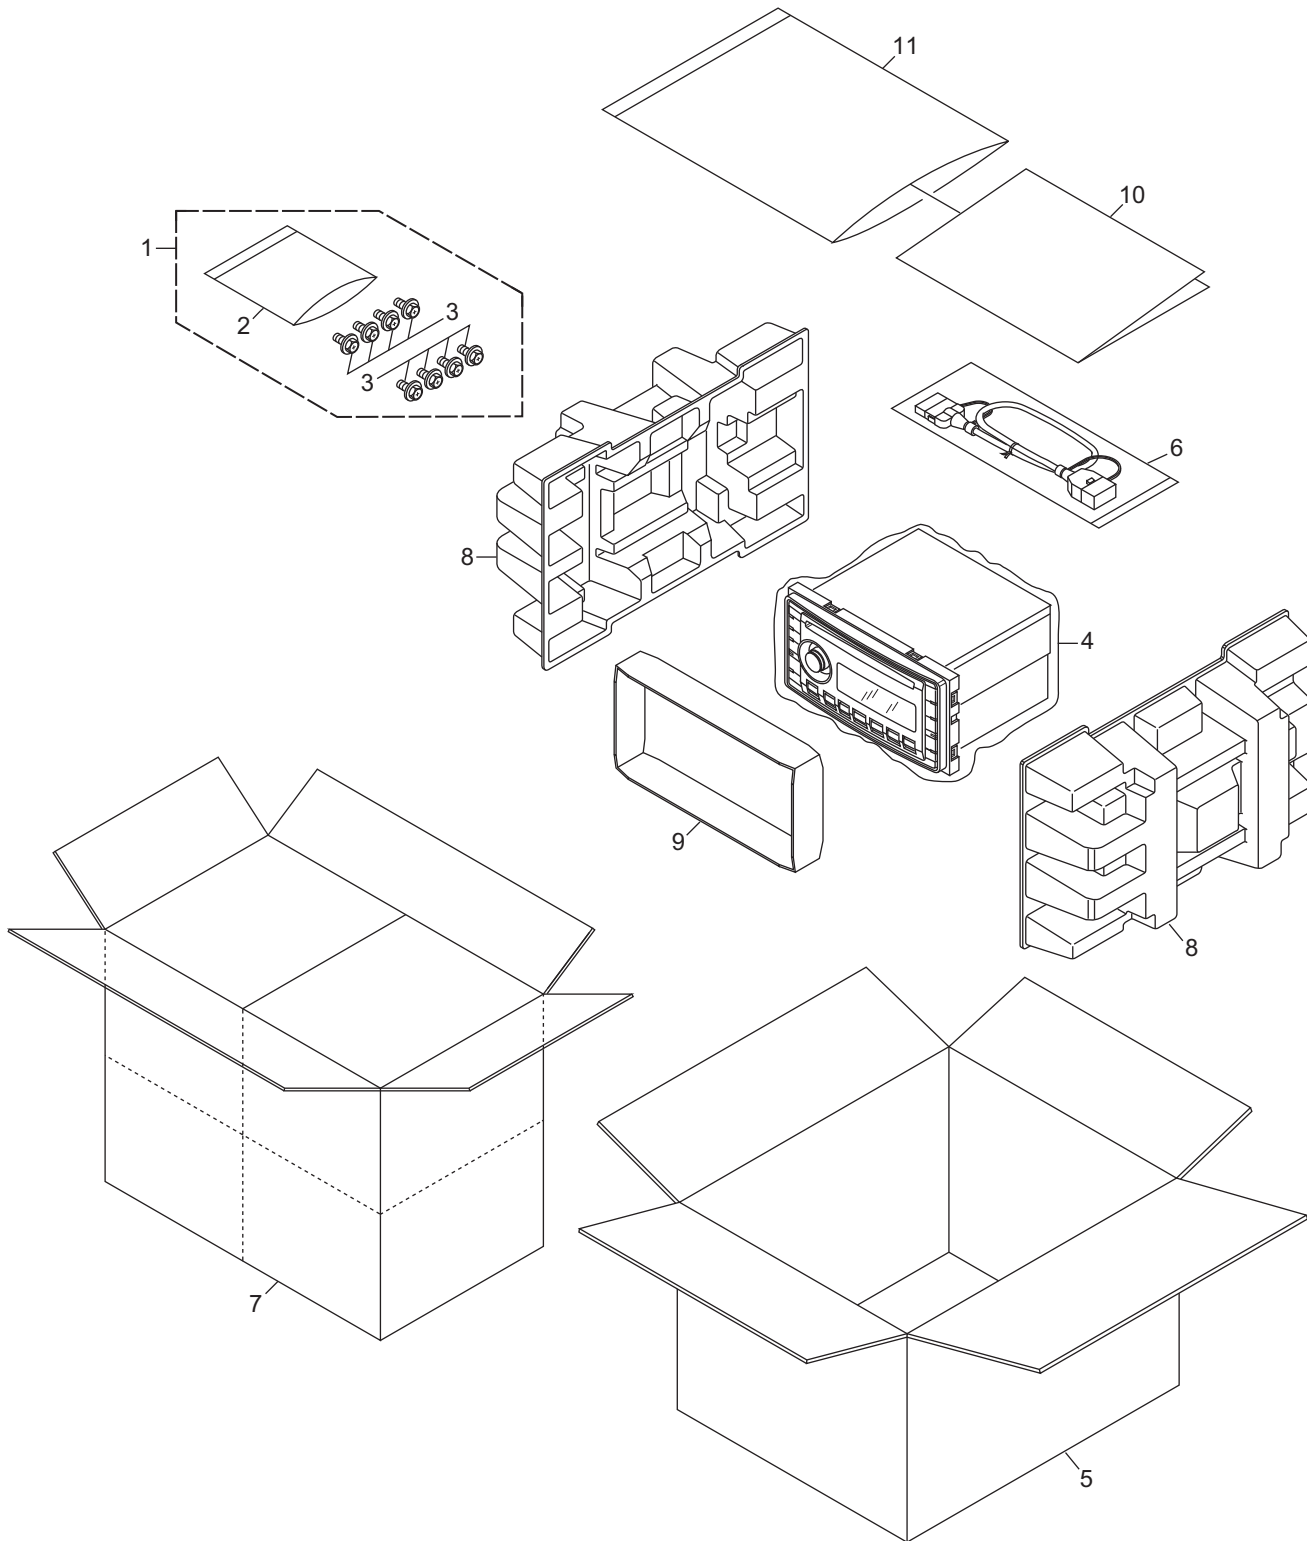

PACKING SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Screw Assy	CEA3954
* 2	Polyethylene Bag	CEG-127
3	Screw	HMF50P080FTC
* 4	Polyethylene Bag	CEG1322
5	Unit Box	CHA3312
* 6	Cord Assy	CXC5579
7	Contain Box(DEH-M8127ZT)	CHL6072
	Contain Box(DEH-M8127ZT91)	CHL6248
8	Protector	YHP5022
9	Protector	YHP5034
10	Owner's Manual (English)	CRB2341
11	Polyethylene Bag	CEG1116

2.2 EXTERIOR(1)

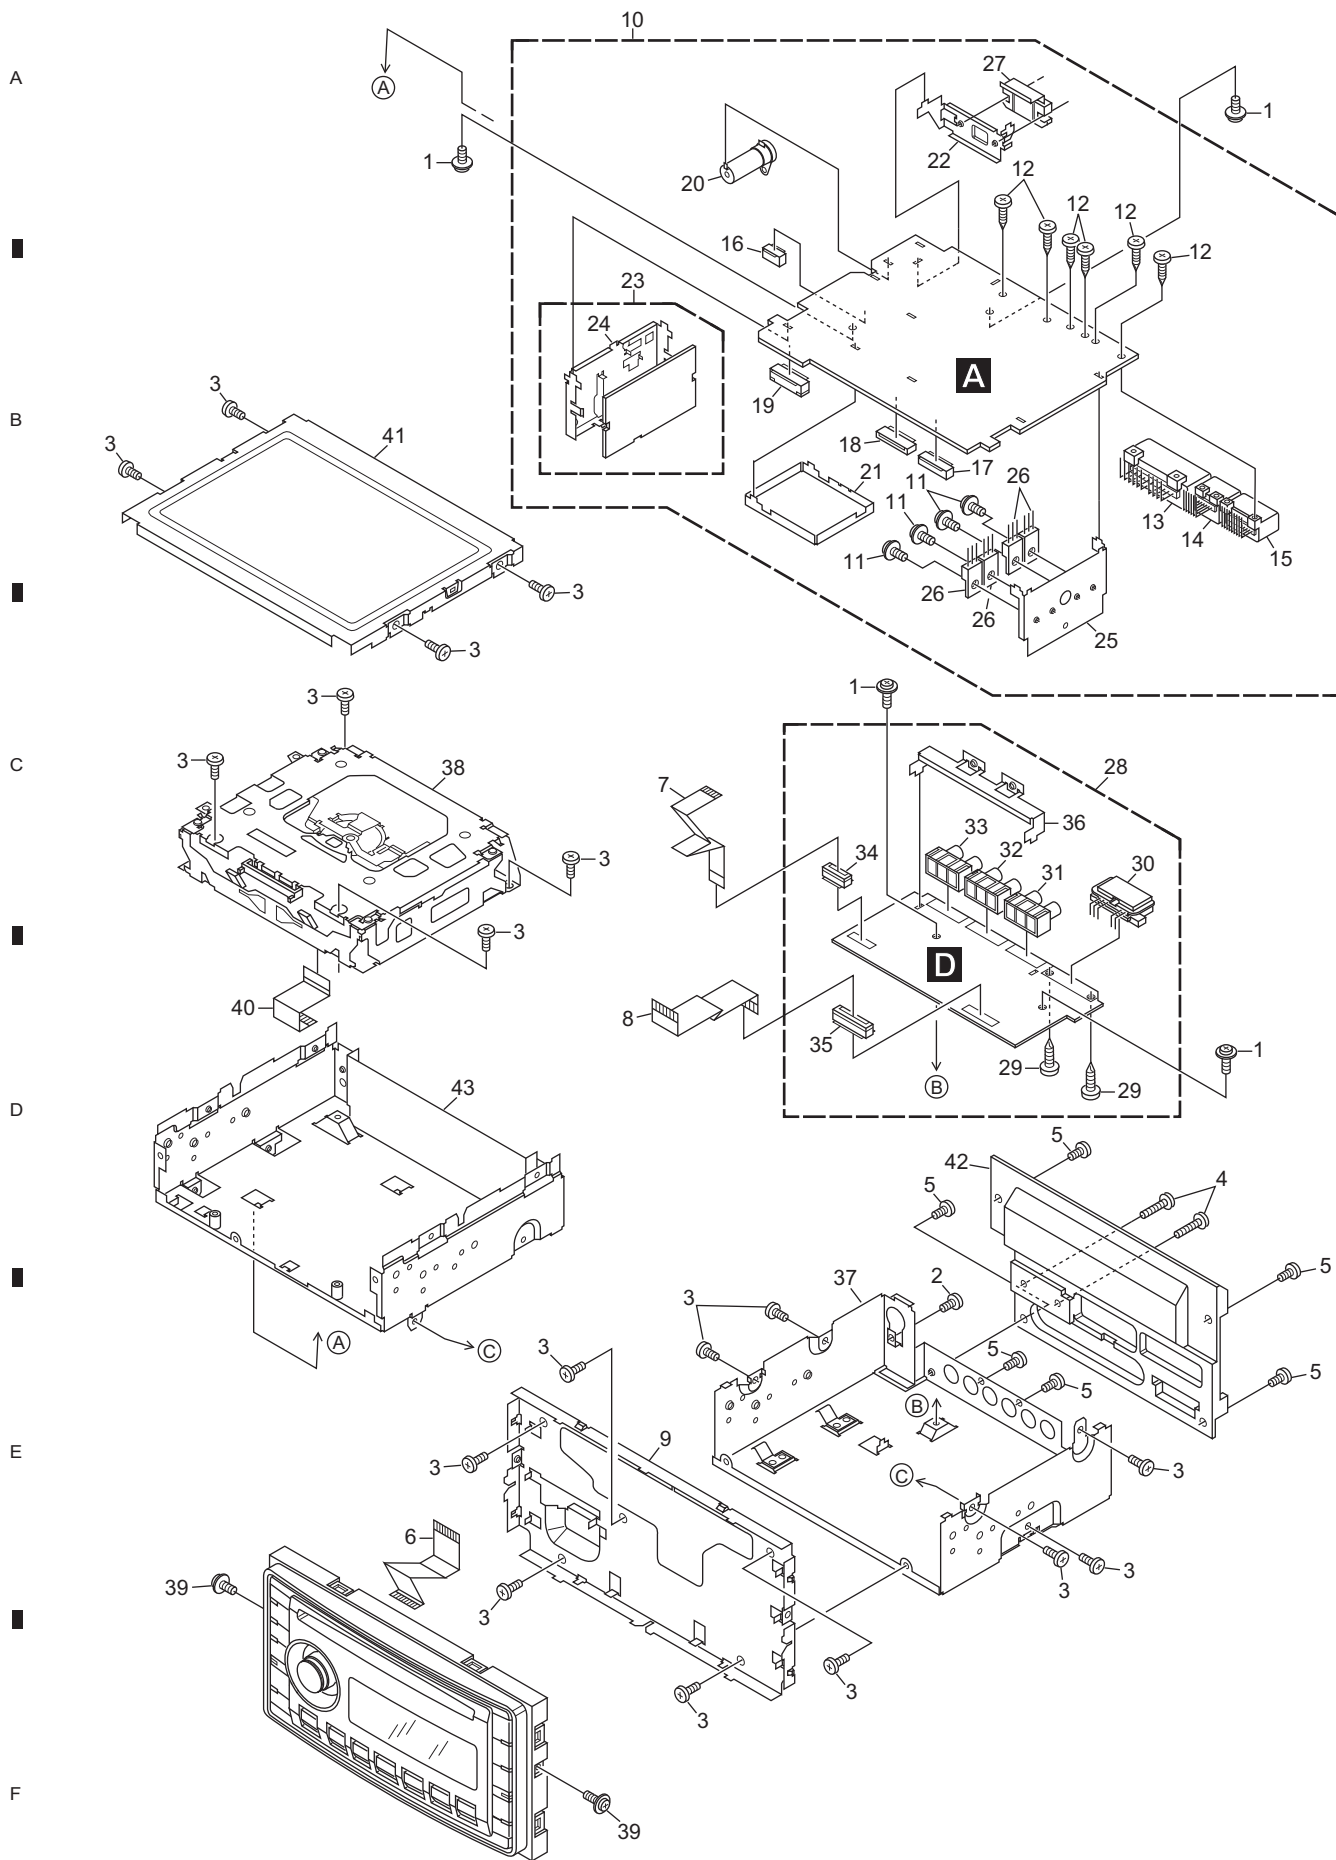

EXTERIOR(1) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Screw	ASZ26P060FTC
2	Screw	BMZ30P060FTB
3	Screw	BSZ26P040FTC
4	Screw	BSZ26P160FTC
5	Screw	BSZ30P060FTC
6	Connector	CDE8321
7	Connector	CDE8335
8	Connector	CDE8324
9	Frame	CND3708
10	Main Unit	CWN2094
11	Screw	ASZ26P060FTC
12	Screw(M3 x 6)	CBA1393
13	Connector(CN471)	CKM1458
14	Connector(CN473)	CKM1466
15	Connector(CN472)	CKM1467
16	Connector(CN609)	CKS3851
17	Connector(CN605)	CKS3859
18	Connector(CN602)	CKS3886
19	Connector(CN601)	CKS5005
20	86146-48030	CKX1057
21	Shield	CND3238
22	Holder	CND2492
23	FM/AM Tuner Unit	CWE1831
24	Holder	CND2144
25	Holder	YND5007
26	Transistor(Q431,441,851,881)	2SB1185
27	IC(IC801)	TDA7386
28	Sub Unit	CWN2095
29	Screw(M3 x 6)	CBA1393
30	Connector(CN2001)	CKM1468
31	Pin Jack(CN3011)	CKS3144
32	Pin Jack(CN3012)	CKS3144
33	Pin Jack(CN3013)	CKS3144
34	Connector(CN3001)	CKS4997
35	Connector(CN2003)	CKS5005
36	Holder	CND3808
37	Chassis Unit	CXC7029
38	CD Mechanism Module(S10.5)	CKX5780
39	Screw	ISS26P055FTC
40	Connector	YDE5023
41	Case	YNB5015
42	Heat Sink	YNR5034
43	Chassis Unit	YXC5039

1 2 3 4

2.3 EXTERIOR(2)

A


B

C

D

E


F

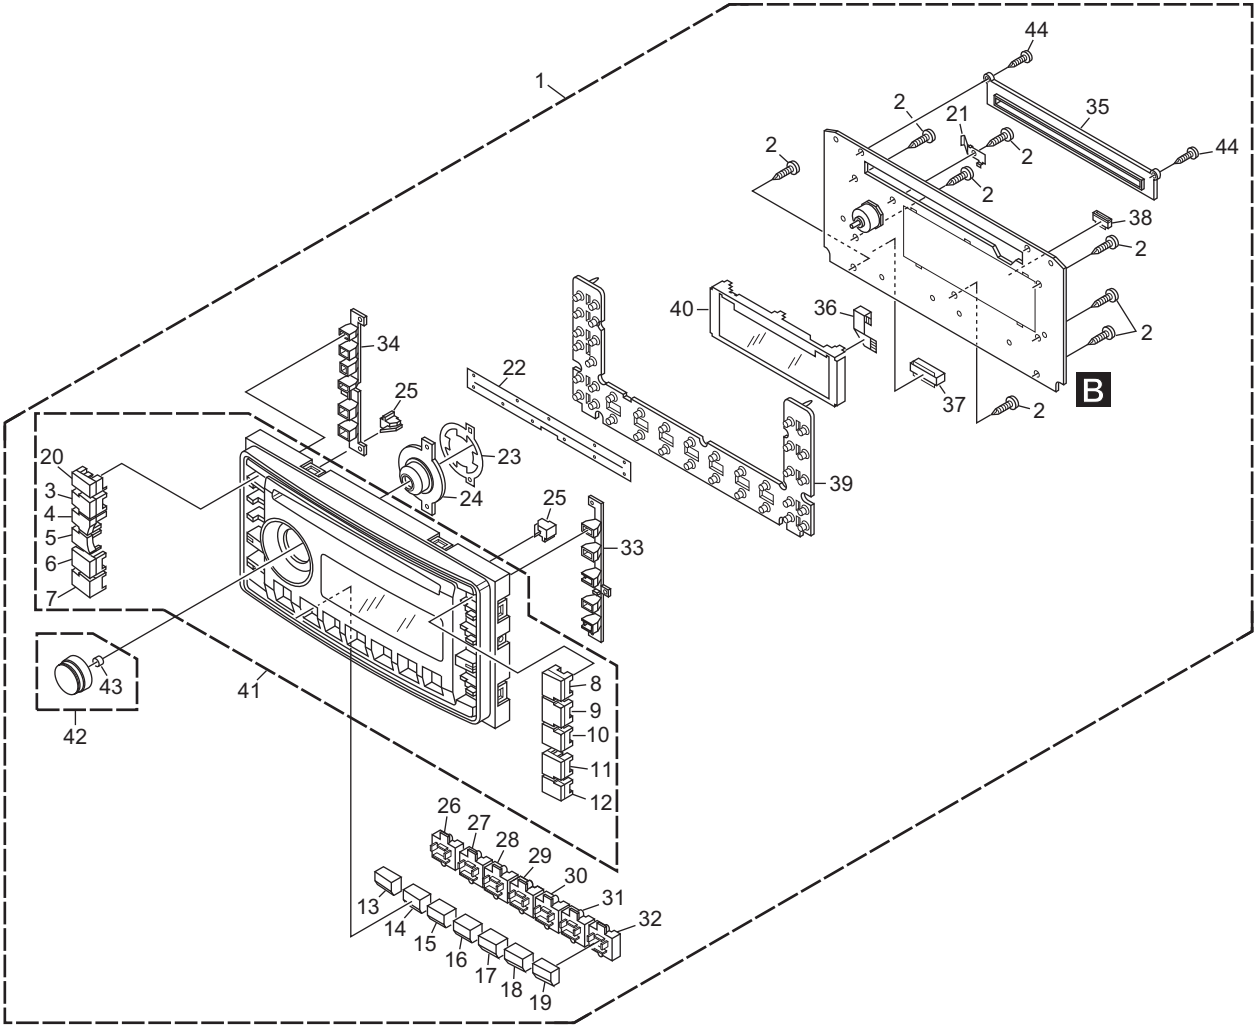

EXTERIOR(2) SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>
1	Grille Assy	CXC7024
2	Screw	BPZ20P080FTC
* 3	Button(FM1/2)	CAC9872
* 4	Button(AM SAT)	CAC9873
* 5	Button(DISC)	CAC9874
* 6	Button(AUX,iPod)	CAC9875
* 7	Button(MENU)	CAC9876
* 8	Button(PWR)	CAC9877
* 9	Button(SSP)	CAC9878
* 10	Button(SCAN)	CAC9879
* 11	Button(TEXT)	CAC9880
* 12	Button(MUTE)	CAC9881
13	Button(ESC)	CAC9882
14	Button(1)	CAC9883
15	Button(2)	CAC9884
16	Button(3)	CAC9885
17	Button(4)	CAC9886
18	Button(5)	CAC9887
19	Button(6)	CAC9888
* 20	Button(EJECT)	CAC9891
21	Earth Plate	CND3738
22	Cover	CNN1506
23	Sheet	CNN1676
24	Lighting Conductor	CNV9315
25	Lighting Conductor	CNV9316
26	Holder	CNV9319
27	Holder	CNV9320
28	Holder	CNV9321
29	Holder	CNV9322
30	Holder	CNV9323
31	Holder	CNV9324
32	Holder	CNV9325
33	Holder	CNV9328
34	Holder	CNV9329
35	Guide	CNV9332
36	Connector	CDE8322
37	Connector(CN901)	CKS3859
38	Connector(CN902)	CKS5251
39	Rubber	CNV9326
40	OLED Module	MXK8234
41	Grille Unit	CXC7095
42	Knob Unit	CXC7096
43	Spring	CBL1764
44	Screw	IPS20P100FTC

2.4 CD MECHANISM MODULE

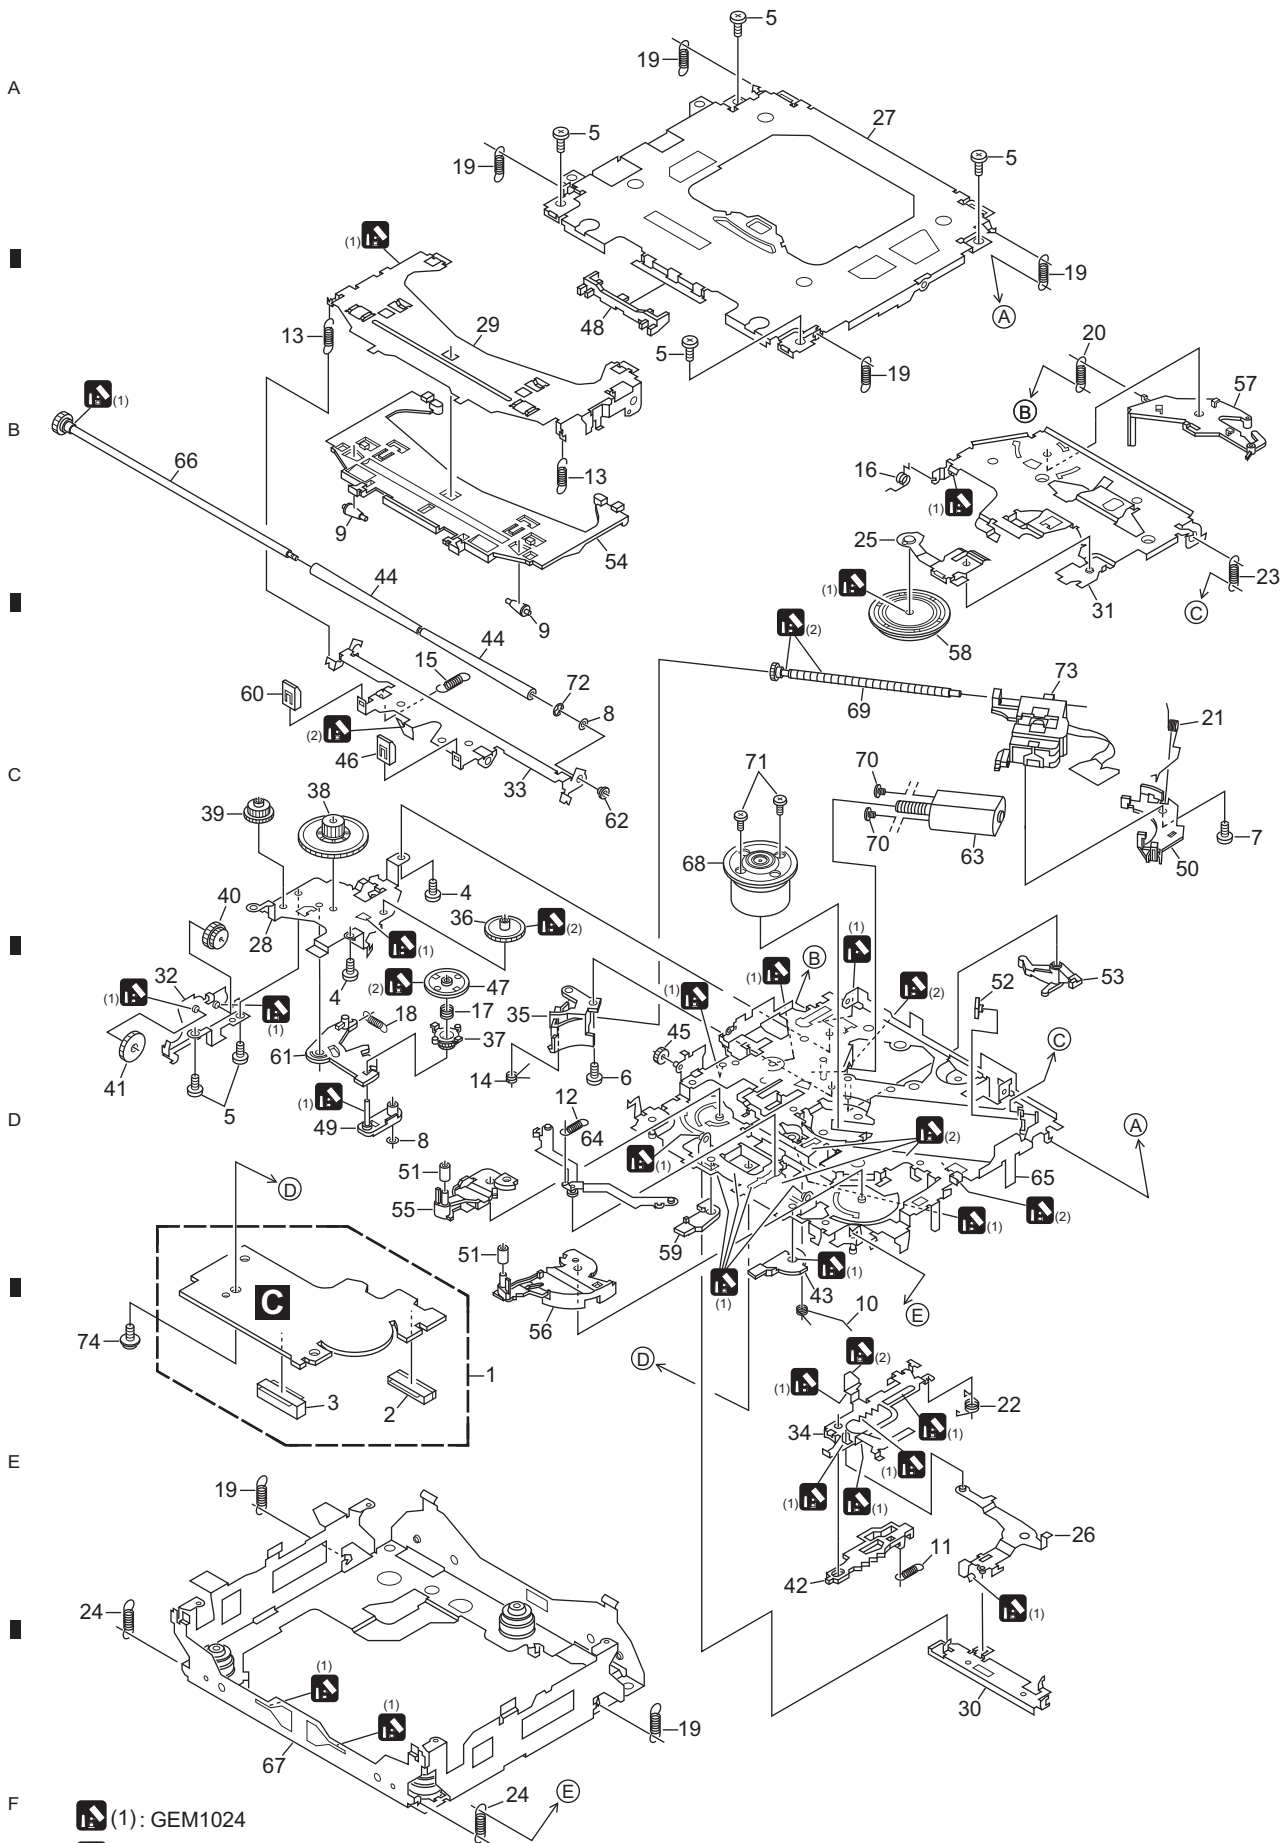

(1): GEM1024

(2): GEM1045

CD MECHANISM MODULE SECTION PARTS LIST

<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	<u>Mark No.</u>	<u>Description</u>	<u>Part No.</u>	
1	CD Core Unit(S10.5SCION)	CWX3418	50	Rack	CNV8342	
2	Connector(CN101)	CKS4808				A
3	Connector(CN701)	CKS5005	51	Roller	CNV8343	
4	Screw	BMZ20P025FTC	52	Holder	CNV8344	
5	Screw	BSZ20P040FTC	53	Arm	CNV8345	
			54	Guide	CNV9498	
6	Screw(M2 x 3)	CBA1511	55	Arm	CNV8348	
7	Screw(M2 x 4)	CBA1835				
8	Washer	CBF1038	56	Arm	CNV8349	
9	Roller	CNV9499	57	Arm	CNV8350	
			58	Clamper	CNV8365	
10	Spring	CBH2609	59	Arm	CNV8386	
11	Spring	CBH2612	60	Guide	CNV8396	B
12	Spring	CBH2614				
13	Spring	CBH2616	61	Arm	CNV9521	
14	Spring	CBH2617	62	Collar	CNV8447	
15	Spring	CBH2620	63	Motor Unit(M2)	CXC4026	
			64	Arm Unit	CXC4027	
16	Spring	CBH2855	65	Chassis Unit	CXC4028	
17	Spring	CBH2937				
18	Spring	CBH2735	66	Gear Unit	CXC4029	
19	Spring	CBH2854	67	Frame Unit	CXC4031	
20	Spring	CBH2642	68	Motor Unit(M1)	CXC7134	
			69	Screw Unit	CXC6359	C
21	Spring	CBH2856	70	Screw	JFZ20P025FTC	
22	Spring	CBH2857				
23	Spring	CBH2860	71	Screw	JGZ17P022FTC	
24	Spring	CBH2861	72	Washer	YE20FTC	
25	Spring	CBL1686	73	Pickup Unit(P10.5)(Service)	CXX1942	
			74	Screw	IMS26P030FTC	
26	Arm	CND1909				
27	Frame	CND2582				
28	Bracket	CND2583				
29	Arm	CND3831				
30	Lever	CND2585				D
31	Arm	CND2586				
32	Bracket	CND2587				
33	Arm	CND2588				
34	Lever	CND2589				
35	Holder	CNV9522				
36	Gear	CNV7207				
37	Gear	CNV9513				
38	Gear	CNV7209				
39	Gear	CNV9514				E
40	Gear	CNV9515				
41	Gear	CNV9516				
42	Rack	CNV9517				
43	Arm	CNV7216				
44	Roller	CNV8189				
45	Gear	CNV9518				
46	Guide	CNV9519				
47	Gear	CNV7595				F
48	Guide	CNV9520				
49	Arm	CNV7805				

5. ELECTRICAL PARTS LIST

NOTE:

- Parts whose parts numbers are omitted are subject to being not supplied.
- The part numbers shown below indicate chip components.

Chip Resistor

RS1/○○○○○J,RS1/○○○○○J

Chip Capacitor (except for CQS.....)

CKS....., CCS....., CSZS.....

- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- Meaning of the figures and others in the parentheses in the parts list.

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Circuit Symbol and No.

Part No.

Circuit Symbol and No.

Part No.

Unit Number: CWN2094

Unit Name : Main Unit

Unit Number:

Unit Name : Keyboard Unit

Unit Number: CWX3418

**Unit Name : CD Core Unit
(S10.5SCION)**

Unit Number: CWN2095

Unit Name : Sub Unit

A

Unit Number: CWN2094

Unit Name : Main Unit

MISCELLANEOUS

IC 202	(A,61,63) IC	NJM4558V
IC 203	(A,68,94) IC	NJM4558MD
IC 351	(A,102,55) IC	PM2013A
IC 421	(A,38,89) IC	S-812C56AUA-C3K
IC 501	(A,140,34) IC	BA3257HFP
IC 610	(A,25,26) IC	S-812C33AMC-C2N
IC 621	(A,89,21) IC	TC74VHCT125AFTS1
IC 701	(A,47,41) IC	PEG281A
IC 781	(A,48,68) IC	HA12241FP
IC 782	(A,49,62) IC	S-80835CNNB-B8U
IC 801	(A,120,130) IC	TDA7386
IC 1751	(A,82,51) IC	NJM4558V
Q 351	(A,107,89) Transistor	2SD1767
Q 401	(A,47,110) Transistor	2SC4081
Q 402	(B,53,110) Transistor	2SC4081
Q 403	(A,75,100) Transistor	2SC4081
Q 404	(A,50,105) Transistor	2SC4081
Q 421	(A,45,87) Transistor	2SD1760F5
Q 422	(B,43,81) Transistor	2SA1162
Q 424	(A,39,83) Transistor	2SB1260

Q 425	(A,35,84) Transistor	2SC4081
Q 426	(A,35,62) Transistor	IMD3A
Q 431	(A,7,56) Transistor	2SB1185
Q 432	(A,18,35) Transistor	IMX1
Q 441	(A,7,87) Transistor	2SB1185
Q 442	(B,11,75) Transistor	IMX1
Q 451	(A,59,103) Transistor	2SB1260
Q 452	(A,63,100) Transistor	DTC124EUA
Q 453	(A,85,94) Transistor	2SC4081
Q 454	(A,83,109) Transistor	2SB1260
Q 511	(B,157,72) Transistor	DTC114EUA
Q 512	(A,150,84) Transistor	2SB1132
Q 513	(A,143,84) Transistor	DTC114EUA
Q 671	(A,153,21) Transistor	2SA1576A
Q 672	(A,151,18) Transistor	2SA1576A
Q 682	(A,133,17) Transistor	IMH4A
Q 702	(B,40,108) Transistor	2SA1576A
Q 703	(B,17,103) Transistor	2SA1576A
Q 801	(A,104,99) Transistor	DTC143EUA
Q 802	(A,104,106) Transistor	2SD1781K
Q 803	(A,104,111) Transistor	2SC4081
Q 804	(A,108,104) Transistor	DTC143EUA
Q 805	(A,110,109) Transistor	2SA1576A
Q 806	(B,62,107) Transistor	2SA1576A
Q 807	(A,126,89) Transistor	2SC4081
Q 808	(A,121,92) Transistor	2SC4081
Q 851	(A,7,99) Transistor	2SB1185
Q 852	(B,11,90) Transistor	IMX1
Q 853	(A,25,38) Transistor	2SB1184F5
Q 855	(A,31,51) Transistor	IMX1
Q 871	(A,74,114) Transistor	2SA1576A
Q 881	(A,7,69) Transistor	2SB1185
Q 883	(B,12,67) Transistor	IMX1
D 351	(A,101,81) Diode	HZU3R9(B2)
D 402	(A,54,117) Diode	HZU8R2(B1)
D 403	(A,77,104) Diode	HZU8R2(B1)
D 411	(B,51,103) Diode	RD8R2SL(N1)
D 412	(A,47,115) Diode	1SS355
D 413	(A,53,105) Diode	1SS355
D 421	(A,34,89) Diode	UDZS16(B)
D 422	(A,48,94) Diode	RR264M-400

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
D 423	(A,40,95) Diode	RR264M-400	RESISTORS		
D 431	(B,10,52) Diode	HZU6R8(B3)			
D 432	(A,20,40) Diode	1SS355			
D 441	(B,11,86) Diode	HZU7R5(B3)			
D 442	(B,20,75) Diode	1SS355			
D 451	(A,78,98) Diode	DAN202K	R 206	(A,64,70)	RS1/16S103J
D 452	(A,83,100) Diode	1SS355	R 207	(A,65,67)	RS1/16S822J
D 455	(A,82,98) Diode	HZU4R7(B3)	R 208	(A,56,71)	RS1/16S103J
D 471	(A,150,105) Diode	P300JL-6059	R 210	(A,54,64)	RS1/16S822J
D 472	(A,80,115) Diode	RR264M-400	R 211	(A,63,69)	RS1/16S183J
D 473	(A,85,115) Diode	RR264M-400	R 212	(A,61,69)	RS1/16S183J
D 474	(B,21,113) Diode	1SS355	R 213	(A,60,93)	RS1/16S473J
D 475	(B,46,92) Diode	1SS355	R 214	(A,60,90)	RS1/16S473J
D 476	(B,18,113) Diode	1SS355	R 215	(A,60,95)	RS1/16S473J
D 702	(B,47,110) Diode	1SS355	R 216	(A,60,92)	RS1/16S473J
D 703	(A,33,106) Diode	1SS355	R 217	(A,67,99)	RS1/16S183J
D 781	(A,40,115) Diode	UDZS18(B)	R 218	(A,66,88)	RS1/16S183J
D 782	(A,42,115) Diode	UDZS18(B)	R 219	(A,72,96)	RS1/16S183J
D 802	(A,103,116) Diode	HZU8R2(B3)	R 220	(A,72,93)	RS1/16S183J
D 804	(B,60,111) Diode	1SS355	R 301	(A,130,61)	RS1/16S102J
D 811	(B,142,53) Diode	DAN202U	R 302	(A,130,65)	RS1/16S102J
D 851	(A,27,48) Diode	HZU8R2(B3)	R 309	(A,133,60)	RS1/16S102J
D 852	(A,25,48) Diode	1SS355	R 310	(A,133,65)	RS1/16S102J
D 876	(A,66,115) Diode	UDZS5R6(B)	R 315	(A,131,69)	RS1/16S102J
D 882	(B,16,71) Diode	1SS355	R 316	(A,131,76)	RS1/16S102J
D 883	(B,14,59) Diode	HZU7R5(B3)	R 323	(A,133,71)	RS1/16S102J
D 1751	(A,74,39) Diode Network	DA204U	R 324	(A,133,76)	RS1/16S102J
D 1752	(A,77,39) Diode Network	DA204U	R 328	(B,66,90)	RS1/16S472J
D 1755	(A,74,42) Diode Network	DA204U	R 329	(B,72,89)	RS1/16S472J
D 1756	(A,74,45) Diode Network	DA204U	R 335	(B,129,54)	RS1/16S0R0J
L 351	(B,105,38) Inductor	CTF1379	R 341	(A,145,61)	RS1/16S102J
L 352	(A,113,47) Inductor	CTF1379	R 342	(A,145,66)	RS1/16S102J
L 353	(B,104,51) Inductor	CTF1379	R 343	(A,148,61)	RS1/16S102J
L 354	(B,105,57) Inductor	CTF1379	R 344	(A,148,66)	RS1/16S102J
L 355	(B,106,63) Inductor	CTF1379	R 345	(A,145,68)	RS1/16S102J
L 356	(A,105,70) Inductor	CTF1379	R 346	(A,145,73)	RS1/16S102J
L 357	(A,119,36) Inductor	LCTAW2R2J2520	R 347	(A,148,68)	RS1/16S102J
L 358	(A,117,71) Inductor	LCTAW2R2J2520	R 348	(A,148,73)	RS1/16S102J
L 359	(A,100,69) Inductor	CTF1379	R 351	(A,81,35)	RS1/16SS221J
L 360	(B,94,49) Inductor	CTF1379	R 352	(A,84,44)	RS1/16SS221J
L 362	(A,125,47) Inductor	LCTAW2R2J2520	R 353	(A,81,41)	RS1/16SS221J
L 370	(A,91,43) Inductor	CTF1379	R 354	(A,81,40)	RS1/16SS221J
L 371	(A,88,37) Inductor	CTF1379	R 356	(A,81,37)	RS1/16SS221J
L 372	(A,84,37) Inductor	CTF1379	R 357	(A,81,38)	RS1/16SS221J
L 373	(A,88,39) Inductor	CTF1379	R 358	(A,81,36)	RS1/16SS221J
L 374	(A,84,39) Inductor	CTF1379	R 359	(B,92,40)	RS1/16S0R0J
L 376	(A,84,41) Inductor	CTF1379	R 360	(A,94,39)	RS1/16S0R0J
L 377	(A,88,41) Inductor	CTF1379	R 361	(A,113,44)	RS1/16S105J
L 378	(A,84,42) Inductor	CTF1379	R 362	(A,113,46)	RS1/16S331J
L 471	(A,141,121) Choke Coil 600 μ H	CTH1221	R 363	(B,94,40)	RS1/16S0R0J
L 504	(A,151,87) Inductor	CTF1295	R 364	(A,96,39)	RS1/16S0R0J
L 505	(A,155,94) Inductor	LAU330J	R 365	(B,96,40)	RS1/16S0R0J
L 507	(A,139,25) Chip Coil	LCTAW4R7J2520	R 366	(A,97,39)	RS1/16S0R0J
L 508	(A,149,31) Inductor	CTF1295	R 370	(A,103,90)	RS1/16S102J
L 601	(A,28,25) Inductor	CTF1295	R 371	(B,98,40)	RS1/16S0R0J
L 701	(A,41,61) Inductor	LCTAW150J2520	R 372	(A,99,39)	RS1/16S0R0J
X 351	(A,118,44) Radiator 33.8688 MHz	CSS1600	R 373	(A,91,39)	RS1/16S0R0J
X 701	(A,47,52) Radiator 10.0 MHz	CSS1577	R 374	(A,100,39)	RS1/16S0R0J
△FU471	(A,55,110) Fuse 8 A	CEK1263	R 381	(A,88,53)	RS1/16S474J
AR501	(A,158,100) Surge Protector	IMSA-6801-01Y901	R 382	(A,86,53)	RS1/16S474J
			R 403	(A,52,114)	RS1/16S153J
			R 404	(A,52,117)	RS1/16S473J

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

R 405 (B,101,116)
R 406 (A,58,120)
R 407 (A,78,101)

RS1/10S472J
RS1/4S182J
RS1/16S153J

R 653 (A,17,110)
R 655 (B,43,109)
R 656 (B,36,107)

RS1/16S473J
RS1/16S472J
RS1/16S473J

A

R 408 (A,73,103)
R 409 (B,107,129)
R 410 (A,78,111)
R 412 (A,51,108)
R 414 (A,52,108)

RS1/16S473J
RS1/10S472J
RS1/4S182J
RS1/16S104J
RS1/16S224J

R 657 (B,45,110)
R 660 (A,33,31)
R 671 (A,148,17)
R 672 (A,145,18)
R 673 (A,148,19)

RS1/16S103J
RS1/16S473J
RS1/16S272J
RS1/16S272J
RS1/16S472J

R 415 (A,49,115)
R 416 (A,47,112)
R 421 (A,35,82)
R 422 (B,44,78)
R 423 (B,43,76)

RS1/16S104J
RS1/16S104J
RS1/16S182J
RS1/16S182J
RS1/16S103J

R 674 (A,145,16)
R 675 (A,138,19)
R 676 (A,141,17)
R 703 (A,63,27)
R 704 (A,56,54)

RS1/16S472J
RS1/16S681J
RS1/16S681J
RS1/16SS102J
RS1/16SS102J

B

R 424 (A,33,86)
R 425 (A,30,90)
R 426 (A,34,65)
R 431 (A,17,32)
R 432 (A,19,32)

RS1/16S562J
RS1/16S471J
RS1/16S102J
RS1/16S121J
RS1/16S101J

R 705 (A,57,55)
R 708 (A,63,26)
R 709 (A,44,52)
R 712 (A,42,51)
R 713 (A,41,64)

RS1/16SS102J
RS1/16SS472J
RS1/16SS473J
RS1/16SS102J
RS1/16S102J

R 434 (A,15,39)
R 436 (A,15,36)
R 437 (A,18,38)
R 438 (B,12,52)
R 439 (A,9,55)

RS1/16S221J
RS1/16S471J
RS1/16S331J
RS1/16S101J
RS1/16S223J

R 714 (A,65,29)
R 715 (A,51,28)
R 716 (A,35,24)
R 718 (A,66,42)
R 719 (A,44,30)

RS1/16S102J
RS1/16S102J
RS1/16S102J
RS1/16S221J
RS1/16S221J

C

R 440 (A,20,32)
R 441 (B,15,75)
R 443 (B,11,79)
R 444 (B,11,84)
R 445 (B,13,82)

RS1/16S362J
RS1/16S331J
RS1/16S471J
RS1/16S221J
RS1/10S271J

R 720 (A,62,52)
R 721 (A,59,52)
R 722 (A,61,54)
R 723 (A,63,41)
R 726 (A,36,27)

RS1/16S101J
RS1/16S0R0J
RS1/16S101J
RS1/16S101J
RS1/16S102J

R 447 (B,9,79)
R 448 (B,15,77)
R 451 (A,63,103)
R 452 (A,59,106)
R 455 (A,81,94)

RS1/16S223J
RS1/16S472J
RS1/16S472J
RS1/16S223J
RS1/16S102J

R 727 (A,35,30)
R 728 (A,38,27)
R 732 (A,42,28)
R 735 (A,41,26)
R 736 (A,47,28)

RS1/16S102J
RS1/16S0R0J
RS1/16S102J
RS1/16S102J
RS1/16S102J

D

R 456 (A,83,106)
R 461 (A,84,90)
R 462 (A,83,103)
R 463 (A,82,102)
R 471 (A,58,110)

RS1/16S223J
RS1/10S331J
RS1/16S100J
RS1/16S913J
RS1/4S101J

R 737 (A,45,26)
R 738 (A,55,30)
R 739 (A,67,50)
R 740 (B,50,29)
R 741 (B,50,33)

RS1/16S473J
RS1/16S102J
RS1/16SS102J
RS1/16S473J
RS1/16S473J

R 472 (A,37,126)
R 484 (A,28,118)
R 515 (B,155,49)
R 516 (B,156,65)
R 517 (B,156,67)

RS1PMF680J
RS1/10S102J
RS1/16S681J
RS1/16S681J
RS1/16S681J

R 742 (B,50,31)
R 746 (A,63,34)
R 747 (A,63,35)
R 748 (A,65,36)
R 749 (A,63,37)

RS1/16S104J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J
RS1/16SS0R0J

E

R 518 (B,156,69)
R 519 (B,156,75)
R 520 (B,156,77)
R 526 (A,152,26)
R 529 (B,158,82)

RS1/16S681J
RS1/16S681J
RS1/16S681J
RS1/16S471J
RS1/10S0R0J

R 750 (A,65,38)
R 751 (A,61,38)
R 752 (A,65,39)
R 753 (A,63,40)
R 759 (A,62,45)

RS1/16SS471J
RS1/16SS473J
RS1/16SS102J
RS1/16SS332J
RS1/16SS102J

R 530 (A,146,84)
R 531 (A,145,86)
R 602 (B,162,17)
R 603 (B,160,17)
R 604 (B,158,17)

RS1/16S223J
RS1/16S222J
RS1/16S472J
RS1/16S472J
RS1/16S472J

R 760 (A,64,45)
R 762 (A,60,49)
R 763 (A,72,26)
R 764 (A,73,23)
R 765 (A,83,35)

RS1/16SS102J
RS1/16SS102J
RS1/16S472J
RS1/16S682J
RS1/16SS103J

F

R 605 (B,156,17)
R 620 (A,125,12)
R 621 (A,125,14)
R 622 (A,94,22)
R 623 (A,83,23)

RS1/16S472J
RS1/16S102J
RS1/16S102J
RS1/16S104J
RS1/16S104J

R 767 (A,66,35)
R 768 (A,67,37)
R 769 (A,67,38)
R 771 (A,67,45)
R 772 (A,70,46)

RS1/16SS472J
RS1/16SS472J
RS1/16SS472J
RS1/16SS152J
RS1/16SS152J

R 625 (A,91,18)
R 626 (A,84,21)

RS1/16S102J
RS1/16S102J

R 773 (B,44,84)
R 774 (B,15,109)

RS1/16S103J
RS1/16S432J

Circuit Symbol and No.

Part No.

Circuit Symbol and No.

Part No.

R 775	(B,15,107)	RS1/16S152J
R 779	(A,32,34)	RS1/16S102J
R 782	(A,38,58)	RS1/16S104J
R 783	(A,36,109)	RS1/4S101J
R 784	(A,39,109)	RS1/4S101J
R 785	(B,55,25)	RS1/16S102J
R 787	(B,59,25)	RS1/16S102J
R 788	(A,32,44)	RS1/16S101J
R 789	(A,34,44)	RS1/16S101J
R 791	(A,54,18)	RS1/16S473J
R 795	(A,63,43)	RS1/16S102J
R 796	(A,63,33)	RS1/16SS102J
R 797	(A,36,51)	RS1/16S102J
R 798	(A,38,51)	RS1/16S102J
R 799	(A,67,33)	RS1/16S273J
R 801	(A,148,130)	RS1/16S103J
R 802	(A,107,111)	RS1/16S103J
R 803	(A,107,108)	RS1/16S331J
R 804	(A,107,101)	RS1/16S103J
R 805	(A,105,113)	RS1/16S222J
R 806	(A,101,109)	RS1/16S103J
R 807	(A,130,63)	RS1/16S125J
R 808	(A,130,67)	RS1/16S125J
R 809	(A,102,114)	RS1/16S223J
R 810	(A,102,112)	RS1/16S104J
R 811	(A,110,104)	RS1/16S103J
R 812	(A,110,106)	RS1/16S223J
R 813	(B,59,109)	RS1/16S472J
R 814	(B,56,110)	RS1/16S103J
R 815	(A,130,90)	RS1/10S681J
R 816	(A,123,87)	RS1/16S473J
R 817	(B,65,109)	RS1/16S473J
R 818	(A,121,96)	RS1/16S473J
R 819	(A,122,96)	RS1/16S473J
R 820	(A,103,108)	RS1/16S472J
R 833	(A,109,96)	RS1/16S0R0J
R 834	(A,124,93)	RS1/16S0R0J
R 841	(A,145,126)	RS1/16S184J
R 850	(B,10,95)	RS1/16S122J
R 851	(B,16,88)	RS1/16S102J
R 852	(B,10,97)	RS1/16S222J
R 853	(B,16,91)	RS1/16S471J
R 854	(B,10,93)	RS1/16S122J
R 855	(A,25,45)	RS1/16S223J
R 856	(A,31,47)	RS1/16S101J
R 857	(A,25,52)	RS1/16S331J
R 858	(A,31,54)	RS1/10S271J
R 859	(A,31,56)	RS1/16S472J
R 860	(A,28,50)	RS1/16S221J
R 861	(A,30,47)	RS1/16S471J
R 870	(B,75,127)	RS1/10S472J
R 871	(A,73,116)	RS1/8S222J
R 872	(A,71,114)	RS1/16S103J
R 873	(A,75,111)	RS1/16S123J
R 874	(A,73,111)	RS1/16S103J
R 875	(A,67,110)	RS1/16S103J
R 876	(A,70,115)	RS1/16S103J
R 880	(B,9,70)	RS1/16S390J
R 881	(B,14,63)	RS1/16S362J
R 882	(A,12,69)	RS1/10S330J

R 883	(A,12,66)	RS1/10S330J
R 884	(A,13,65)	RS1/10S330J
R 885	(B,11,61)	RS1/16S471J
R 886	(B,12,58)	RS1/16S221J
R 887	(A,9,63)	RS1/16S223J
R 888	(B,16,66)	RS1/16S331J
R 889	(B,11,70)	RS1/16S390J
R 890	(B,22,64)	RS1/16S473J
R 891	(B,25,65)	RS1/16S223J
R 1201	(A,18,119)	RS1/16S821J
R 1202	(A,21,118)	RS1/16S821J
R 1203	(B,44,88)	RS1/16S104J
R 1204	(B,44,90)	RS1/16S104J
R 1213	(A,60,69)	RS1/16S183J
R 1214	(A,59,69)	RS1/16S183J
R 1220	(A,19,115)	RS1/16S473J
R 1231	(A,66,70)	RS1/16S103J
R 1232	(A,55,69)	RS1/16S103J
R 1586	(A,6,21)	RS1/16S822J
R 1701	(A,55,23)	RS1/16S473J
R 1703	(B,12,103)	RS1/16S473J
R 1704	(A,57,56)	RS1/16S0R0J
R 1705	(A,62,57)	RS1/16S0R0J
R 1706	(A,92,16)	RS1/16S472J
R 1707	(A,72,24)	RS1/16S682J
R 1708	(A,80,21)	RS1/16S473J
R 1709	(A,72,21)	RS1/16S472J
R 1710	(A,44,66)	RS1/16S472J
R 1711	(A,44,64)	RS1/16S472J
R 1755	(A,84,55)	RS1/16S123J
R 1756	(A,85,46)	RS1/16S123J
R 1757	(A,82,57)	RS1/16S473J
R 1758	(A,82,46)	RS1/16S473J
R 1759	(A,77,49)	RS1/16S474J
R 1760	(A,74,49)	RS1/16S474J

CAPACITORS

C 205	(A,65,74)	CSZS1R0M16
C 206	(A,56,74)	CSZS1R0M16
C 207	(A,64,67)	CCSRCH330J50
C 208	(A,55,64)	CCSRCH330J50
C 209	(A,59,61)	CKSRYB473K50
C 213	(A,56,95)	CSZS3R3M16
C 214	(A,56,90)	CSZS3R3M16
C 215	(A,56,97)	CSZS3R3M16
C 216	(A,56,93)	CSZS3R3M16
C 217	(A,67,101)	CCSRCH150J50
C 218	(A,66,86)	CCSRCH150J50
C 219	(A,64,96)	CKSRYB473K50
C 221	(A,58,73)	CSZS1R0M16
C 222	(A,62,73)	CSZS1R0M16
C 307	(A,132,62)	CKSRYB222K50
C 308	(A,132,67)	CKSRYB222K50
C 309	(A,133,62)	CKSRYB222K50
C 310	(A,133,67)	CKSRYB222K50
C 321	(A,132,69)	CKSRYB222K50
C 322	(A,132,74)	CKSRYB222K50
C 323	(A,133,69)	CKSRYB222K50
C 324	(A,134,74)	CKSRYB222K50

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

C 327 (A,120,66) CSZSR220M10
 C 328 (A,113,69) CSZSR220M10
 C 329 (B,73,89) CKSRYB104K50

C 421 (A,29,85) CEAL220M16
 C 422 (B,28,75) CKSRYB103K50
 C 423 (B,39,79) CKSRYB103K50

A

C 330 (A,118,53) CSZSR220M10
 C 331 (B,98,37) CKSRYB105K10
 C 332 (A,99,36) CKSRYB105K10
 C 333 (A,91,36) CKSRYB105K10
 C 334 (A,100,36) CKSRYB105K10

C 424 (A,40,76) CEJQ101M10
 C 425 (B,38,82) CKSRYB103K50
 C 428 (A,35,92) CKSRYB104K50
 C 432 (A,18,39) CKSRYB473K50
 C 433 (A,18,50) CEHAZL471M16

C 337 (A,75,88) CEVLW470M6R3
 C 339 (A,107,37) CSZSR220M10
 C 340 (A,109,70) CKSRYB104K50
 C 341 (A,145,62) CKSRYB222K50
 C 342 (A,145,64) CKSRYB222K50

C 434 (A,18,41) CKSRYB103K50
 C 442 (B,20,82) CKSRYB473K50
 C 443 (A,22,82) CEHAZA101M16
 C 444 (B,14,78) CKSRYB103K50
 C 461 (A,79,103) CKSRYB103K50

B

C 343 (A,148,62) CKSRYB222K50
 C 344 (A,148,64) CKSRYB222K50
 C 345 (A,145,69) CKSRYB222K50
 C 346 (A,145,71) CKSRYB222K50
 C 347 (A,148,69) CKSRYB222K50

C 462 (B,22,130) CKSQYB102K50
 C 463 (B,27,130) CKSQYB102K50
 C 464 (B,25,130) CKSQYB221K50
 C 469 (B,23,118) CKSQYB221K50
 C 470 (B,25,120) CKSQYB221K50

C 348 (A,148,71) CKSRYB222K50
 C 353 (B,94,37) CKSRYB105K10
 C 354 (A,95,36) CKSRYB105K10
 C 355 (B,96,37) CKSRYB105K10
 C 356 (A,97,36) CKSRYB105K10

C 471 (A,117,119) 3 300 μ F/16 V CCH1486(P45)
 C 472 (B,90,127) CKSQYB183K50
 C 473 (B,82,127) CKSQYB183K50
 C 474 (B,80,127) CKSQYB183K50
 C 475 (B,61,126) CKSQYB183K50

C

C 358 (B,105,42) CKSRYB102K50
 C 359 (B,102,49) CKSRYB222K50
 C 360 (A,103,38) CSZSR220M10
 C 361 (B,104,49) CKSRYB222K50
 C 363 (A,112,38) CSZSR220M10

C 476 (B,88,126) CKSQYB183K50
 C 477 (B,85,126) CKSQYB183K50
 C 478 (B,78,127) CKSQYB183K50
 C 479 (B,61,123) CKSQYB183K50
 C 480 (A,85,113) CKSQYB102K50

C 364 (A,113,43) CCSRCH100D50
 C 365 (A,121,45) CCSRCH100D50
 C 366 (B,110,46) CKSRYB103K50
 C 368 (A,121,48) CKSRYB104K50
 C 371 (B,110,52) CKSRYB104K50

C 481 (A,62,108) CKSQYB393K50
 C 484 (A,33,116) CKSQYB221K50
 C 485 (A,33,118) CKSQYB221K50
 C 486 (B,42,117) CKSQYB222K50
 C 487 (B,44,117) CKSQYB222K50

D

C 372 (A,124,51) CKSQYB475K6R3
 C 373 (B,107,52) CKSRYB104K50
 C 374 (A,124,55) CKSQYB475K6R3
 C 375 (B,109,56) CKSRYB104K50
 C 376 (A,119,59) CKSQYB475K6R3

C 488 (B,47,117) CKSQYB222K50
 C 489 (B,50,118) CKSQYB222K50
 C 490 (B,50,114) CKSQYB473K50
 C 491 (A,16,117) CKSQYB103K50
 C 496 (A,26,118) CKSQYB102K50

C 377 (A,121,62) CSZSC101M10
 C 380 (B,107,58) CKSRYB104K50
 C 381 (A,123,69) CKSQYB475K6R3
 C 384 (B,109,61) CKSRYB104K50
 C 385 (B,115,61) CKSQYB475K6R3

C 497 (B,71,132) CKSQYB473K50
 C 507 (A,149,77) CEJQ101M10
 C 509 (B,163,79) CKSRYB103K50
 C 519 (A,170,51) CEJQ470M10
 C 520 (B,161,53) CKSRYB103K50

E

C 386 (A,102,82) CKSRYB105K10
 C 387 (B,107,82) CKSRYB103K50
 C 388 (A,108,83) CEVLW470M6R3
 C 389 (A,107,69) CKSRYB103K50
 C 390 (A,102,70) CKSRYB104K50

C 521 (A,170,43) CEJQ470M10
 C 522 (B,163,41) CKSRYB103K50
 C 523 (A,144,23) CEJQ101M10
 C 524 (B,149,25) CKSRYB103K50
 C 525 (A,147,29) CKSRYB105K10

C 392 (A,97,69) CKSRYB103K50
 C 393 (B,99,50) CKSRYB105K6R3
 C 395 (B,97,50) CKSRYB222K50
 C 397 (A,90,45) CKSRYB104K50
 C 398 (A,92,45) CKSRYB222K50

C 526 (A,133,36) CKSYB335K10
 C 527 (A,147,87) CKSRYB103K50
 C 613 (A,22,27) CKSRYB105K10
 C 614 (A,25,22) CKSRYB105K10
 C 621 (B,70,11) CKSRYB105K10

F

C 399 (B,115,65) CKSRYB222K50
 C 401 (B,58,118) CKSRYB103K50
 C 402 (A,57,115) CEAL2R2M50
 C 403 (A,79,107) CKSRYB103K50
 C 408 (B,56,121) CKSQYB103K50

C 624 (A,92,14) CKSRYB473K50
 C 671 (A,153,23) CKSRYB332K50
 C 672 (A,155,18) CKSRYB332K50
 C 683 (A,141,19) CKSRYB105K10
 C 684 (A,143,17) CKSRYB105K10

C 409 (A,51,117) CKSRYB103K50
 C 420 (A,30,71) 470 μ F/16 V CCH1459(P35)

C 685 (A,130,19) CKSRYB103K50
 C 686 (A,138,16) CKSRYB103K50

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
C 687	(A,128,17)	CKSRYB563K16
C 688	(A,140,17)	CKSRYB563K16
C 689	(A,126,19)	CKSRYB474K10
C 690	(A,126,16)	CKSRYB474K10
C 707	(B,15,106)	CKSRYB224K16
C 713	(A,46,62)	CSZS100M16
C 714	(A,46,60)	CKSRYB103K50
C 730	(A,58,25)	CKSRYB102K50
C 731	(A,63,28)	CKSRYB102K50
C 732	(A,61,25)	CKSRYB102K50
C 778	(A,57,20)	CKSRYB102K50
C 781	(A,44,70)	CKSRYB104K50
C 782	(A,52,60)	CKSRYB223K50
C 783	(A,36,58)	CKSRYB105K10
C 801	(A,137,62)	CFTNA224J50
C 802	(A,137,66)	CFTNA224J50
C 803	(A,137,71)	CFTNA224J50
C 804	(A,137,75)	CFTNA224J50
C 805	(B,147,132)	CKSQYB104K50
C 806	(A,139,98)	CFTNA105J50
C 807	(A,130,93)	CEVLW100M16
C 808	(A,150,125)	CEHAT1R0M50
C 809	(A,130,99)	CEVLW330M10
C 812	(B,117,83)	CKSRYB473K50
C 851	(B,16,89)	CKSRYB103K50
C 852	(A,19,57)	CEHAZA101M16
C 853	(B,22,94)	CKSRYB103K50
C 854	(A,10,96)	CKSRYB102K50
C 855	(A,28,53)	CKSRYB103K50
C 857	(B,24,55)	CKSRYB103K50
C 870	(A,65,112)	CKSRYB105K10
C 871	(A,67,108)	CKSRYB105K10
C 877	(A,67,114)	CKSRYB102K50
C 882	(A,20,66)	CEHAZA101M16
C 883	(B,22,67)	CKSRYB473K50
C 884	(B,10,63)	CKSRYB103K50
C 1400	(B,145,72)	CKSRYB471K50
C 1748	(A,88,50)	CKSRYB105K10
C 1749	(A,86,48)	CKSRYB105K10
C 1751	(A,85,53)	CKSRYB104K50
C 1752	(A,85,49)	CKSRYB104K50
C 1753	(A,77,43)	CKSRYB104K50
C 1754	(A,79,43)	CKSRYB104K50
C 1755	(A,78,49)	CKSRYB474K16
C 1756	(A,76,49)	CKSRYB474K16
C 1757	(A,82,56)	CCSRCH101J50
C 1758	(A,82,44)	CCSRCH101J50
C 1759	(A,79,52)	CKSRYB473K50

B**Unit Number :****Unit Name : Keyboard Unit****MISCELLANEOUS**

IC 901	(B,92,52) IC	PEG280A
IC 902	(B,142,52) IC	PD8170A
IC 903	(B,142,32) IC	S99AL008DBT1
IC 904	(B,134,64) IC	TC7WH32FK
IC 906	(B,88,30) IC	S-1200B33-M5

<u>Circuit Symbol and No.</u>		<u>Part No.</u>
Q 901	(B,66,52) Transistor	UMD2N
Q 1901	(B,71,15) Transistor	2SA1577
Q 1902	(B,37,12) Transistor	DTC114EUA
Q 1951	(B,60,15) Transistor	2SA1577
Q 1952	(B,41,12) Transistor	UMD3N
D 1901	(A,31,82) LED	CL-197HB1-D(CD)
D 1902	(A,169,82) LED	CL-197HB1-D(CD)
D 1903	(A,39,67) LED	CL-197HB1-D(CD)
D 1904	(A,56,52) LED	CL-197HB1-D(CD)
D 1905	(A,25,50) LED	CL-197HB1-D(CD)
D 1906	(A,42,35) LED	CL-197HB1-D(CD)
D 1907	(A,14,72) LED	CL-197HB1-D(CD)
D 1908	(A,14,60) LED	CL-197HB1-D(CD)
D 1909	(A,14,48) LED	CL-197HB1-D(CD)
D 1910	(A,14,29) LED	CL-197HB1-D(CD)
D 1911	(A,14,85) LED	CL-197HB1-D(CD)
D 1912	(A,14,15) LED	CL-197HB1-D(CD)
D 1913	(A,188,82) LED	CL-197HB1-D(CD)
D 1914	(A,188,65) LED	CL-197HB1-D(CD)
D 1915	(A,188,49) LED	CL-197HB1-D(CD)
D 1916	(A,188,28) LED	CL-197HB1-D(CD)
D 1917	(A,40,18) LED	CL-197HB1-D(CD)
D 1918	(A,36,15) LED	CL-197HB1-D(CD)
D 1919	(A,63,18) LED	CL-197HB1-D(CD)
D 1920	(A,59,15) LED	CL-197HB1-D(CD)
D 1921	(A,84,18) LED	CL-197HB1-D(CD)
D 1922	(A,80,15) LED	CL-197HB1-D(CD)
D 1923	(A,104,18) LED	CL-197HB1-D(CD)
D 1924	(A,100,15) LED	CL-197HB1-D(CD)
D 1925	(A,124,18) LED	CL-197HB1-D(CD)
D 1926	(A,121,15) LED	CL-197HB1-D(CD)
D 1927	(A,145,18) LED	CL-197HB1-D(CD)
D 1928	(A,141,15) LED	CL-197HB1-D(CD)
D 1929	(A,165,18) LED	CL-197HB1-D(CD)
D 1930	(A,161,15) LED	CL-197HB1-D(CD)
D 1931	(A,188,15) LED	CL-197HB1-D(CD)
D 1951	(A,186,49) LED	SML-311DT(HJ)
D 1952	(A,186,28) LED	SML-311DT(HJ)
D 1953	(A,186,15) LED	SML-311DT(HJ)
D 1954	(A,59,18) LED	SML-311DT(HJ)
D 1955	(A,63,15) LED	SML-311DT(HJ)
D 1956	(A,84,15) LED	SML-311DT(HJ)
D 1957	(A,80,18) LED	SML-311DT(HJ)
D 1958	(A,100,18) LED	SML-311DT(HJ)
D 1959	(A,104,15) LED	SML-311DT(HJ)
D 1960	(A,121,18) LED	SML-311DT(HJ)
D 1961	(A,124,15) LED	SML-311DT(HJ)
D 1962	(A,141,18) LED	SML-311DT(HJ)
D 1963	(A,145,15) LED	SML-311DT(HJ)
D 1964	(A,161,18) LED	SML-311DT(HJ)
D 1965	(A,165,15) LED	SML-311DT(HJ)
D 1966	(A,31,84) LED	SML-311DT(HJ)
D 1967	(A,169,84) LED	SML-311DT(HJ)
D 1968	(A,42,67) LED	SML-311DT(HJ)
D 1969	(A,56,50) LED	SML-311DT(HJ)
D 1970	(A,25,52) LED	SML-311DT(HJ)
D 1971	(A,39,35) LED	SML-311DT(HJ)
D 1972	(A,36,18) LED	SML-311DT(HJ)
D 1973	(A,40,15) LED	SML-311DT(HJ)
D 1974	(A,13,72) LED	SML-311DT(HJ)

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

D 1975 (A,13,60) LED SML-311DT(HJ)
 D 1976 (A,13,48) LED SML-311DT(HJ)
 D 1977 (A,13,29) LED SML-311DT(HJ)
 A D 1978 (A,13,85) LED SML-311DT(HJ)
 D 1979 (A,13,15) LED SML-311DT(HJ)

R 947 (B,112,51)
 R 948 (B,108,51)
 R 949 (B,116,49)
 R 950 (B,112,49)
 R 951 (B,108,49)

RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J

D 1980 (A,186,82) LED SML-311DT(HJ)
 D 1981 (A,186,65) LED SML-311DT(HJ)
 L 901 (B,79,44) Inductor LCTAW150J2520
 L 902 (B,100,38) Inductor LCTAW150J2520
 L 903 (B,155,61) Chip Inductor ATH1167

R 952 (B,116,47)
 R 953 (B,112,47)
 R 954 (B,108,47)
 R 955 (B,116,45)
 R 956 (B,112,45)

RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J

L 904 (B,159,62) Chip Ferrite Bead CTF1399
 X 901 (B,79,52) Radiator 10.0 MHz CSS1577
 S 901 (A,509,40) Switch(MULTI SEL) CSX1123

R 957 (B,108,45)
 R 958 (B,116,43)
 R 959 (B,112,43)
 R 960 (B,108,43)
 R 961 (B,116,41)

RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J

B RESISTORS

R 901 (B,122,32) RS1/16S392J
 R 902 (B,74,47) RS1/16S473J
 R 903 (B,74,50) RS1/16S473J
 R 904 (B,74,51) RS1/16S102J
 R 905 (B,74,53) RS1/16S473J

R 962 (B,112,41)
 R 963 (B,108,41)
 R 964 (B,116,39)
 R 965 (B,112,39)
 R 966 (B,108,39)

RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J

R 906 (B,74,55) RS1/16S473J
 R 907 (B,74,56) RS1/16S101J
 R 908 (B,70,56) RS1/16S473J
 R 909 (B,74,58) RS1/16S101J
 R 910 (B,70,58) RS1/16S473J

R 967 (B,116,37)
 R 968 (B,112,37)
 R 969 (B,108,37)
 R 970 (B,95,38)
 R 971 (B,93,38)

RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J

R 911 (B,74,59) RS1/16S101J
 R 912 (B,70,59) RS1/16S473J
 R 913 (B,74,61) RS1/16S101J
 R 914 (B,70,61) RS1/16S473J
 R 915 (B,78,63) RS1/16S101J

R 972 (B,92,38)
 R 973 (B,90,38)
 R 974 (B,89,38)
 R 975 (B,87,38)
 R 991 (B,126,32)

RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S101J
 RS1/16S682J

R 916 (B,78,61) RS1/16S101J
 R 917 (B,78,60) RS1/16S101J
 R 918 (B,92,66) RS1/16S101J
 R 919 (B,84,66) RS1/16S102J
 R 920 (B,82,66) RS1/16S473J

R 992 (B,126,34)
 R 993 (B,156,27)
 R 996 (B,70,49)
 R 997 (B,62,49)
 R 1901 (B,25,82)

RS1/16S473J
 RS1/16S473J
 RS1/16S101J
 RS1/16S102J
 RS1/16S152J

D R 921 (B,87,66) RS1/16S473J
 R 922 (B,85,66) RS1/16S102J
 R 923 (B,88,66) RS1/16S101J
 R 924 (B,116,63) RS1/16S101J
 R 925 (B,90,66) RS1/16S101J

R 1902 (B,17,65)
 R 1903 (B,17,48)
 R 1904 (B,17,67)
 R 1905 (B,17,52)
 R 1906 (B,18,82)

RS1/16S202J
 RS1/16S202J
 RS1/16S102J
 RS1/16S102J
 RS1/16S102J

R 926 (B,112,63) RS1/16S101J
 R 927 (B,94,66) RS1/16S473J
 R 928 (B,95,66) RS1/16S473J
 R 929 (B,97,66) RS1/16S473J
 R 930 (B,108,63) RS1/16S101J

R 1907 (B,185,15)
 R 1908 (B,185,17)
 R 1909 (B,17,43)
 R 1910 (B,73,11)
 R 1911 (B,88,11)

RS1/16S102J
 RS1/16S102J
 RS1/16S162J
 RS1/16S162J
 RS1/16S162J

E R 931 (B,116,61) RS1/16S101J
 R 933 (B,108,61) RS1/16S101J
 R 934 (B,116,59) RS1/16S101J
 R 935 (B,112,59) RS1/16S101J
 R 936 (B,108,59) RS1/16S101J

R 1912 (B,115,6)
 R 1913 (B,122,6)
 R 1914 (B,152,6)
 R 1915 (B,162,6)
 R 1916 (B,185,20)

RS1/16S162J
 RS1/16S162J
 RS1/16S162J
 RS1/16S162J
 RS1/16S182J

R 937 (B,116,57) RS1/16S101J
 R 938 (B,112,57) RS1/16S101J
 R 939 (B,108,57) RS1/16S101J
 R 940 (B,116,55) RS1/16S101J
 R 941 (B,112,55) RS1/16S101J

R 1941 (B,64,15)
 R 1942 (B,68,15)
 R 1951 (B,190,59)
 R 1952 (B,190,57)
 R 1953 (B,65,11)

RS1/16S222J
 RS1/16S473J
 RS1/16S471J
 RS1/16S331J
 RS1/16S102J

F R 942 (B,108,55) RS1/16S101J
 R 943 (B,116,53) RS1/16S101J
 R 944 (B,112,53) RS1/16S101J
 R 945 (B,108,53) RS1/16S101J
 R 946 (B,116,51) RS1/16S101J

R 1954 (B,69,11)
 R 1955 (B,83,11)
 R 1956 (B,79,11)
 R 1957 (B,124,11)
 R 1958 (B,120,11)

RS1/16S821J
 RS1/16S102J
 RS1/16S821J
 RS1/16S102J
 RS1/16S821J

5			6			7			8		
<u>Circuit Symbol and No.</u>			<u>Part No.</u>			<u>Circuit Symbol and No.</u>			<u>Part No.</u>		
R 1959	(B,138,11)		RS1/16S102J			S 904	(B,40,83)	Switch(12EJ)	CSN1068		
R 1960	(B,142,11)		RS1/16S821J			S 905	(B,26,84)	Switch(8EJ)	CSN1068		
R 1961	(B,18,76)		RS1/16S561J			RESISTORS					
R 1962	(B,18,78)		RS1/16S561J			R 101	(B,61,89)		RS1/10SR2R4J		
R 1963	(B,18,80)		RS1/16S561J			R 102	(B,61,87)		RS1/10SR2R4J		
R 1964	(B,8,65)		RS1/16S821J			R 103	(B,62,87)		RS1/10SR2R7J		
R 1965	(B,12,65)		RS1/16S821J			R 104	(B,54,85)		RS1/16SS222J		
R 1966	(B,12,63)		RS1/16S821J			R 107	(B,45,76)		RS1/16SS105J		
R 1967	(B,8,60)		RS1/16S821J			R 108	(B,46,75)		RS1/16SS0R0J		
R 1968	(B,12,60)		RS1/16S821J			R 202	(B,32,81)		RS1/16SS473J		
R 1969	(B,16,60)		RS1/16S821J			R 203	(A,51,59)		RS1/16S473J		
R 1970	(B,8,58)		RS1/16S102J			R 204	(A,24,76)		RS1/16SS221J		
R 1971	(B,12,58)		RS1/16S821J			R 206	(B,28,66)		RS1/16SS104J		
R 1972	(B,16,58)		RS1/16S821J			R 210	(A,17,35)		RS1/16SS102J		
R 1973	(B,8,68)		RS1/16S471J			R 214	(B,50,65)		RS1/16SS472J		
R 1974	(B,12,68)		RS1/16S331J			R 216	(B,49,64)		RS1/16SS472J		
R 1975	(B,8,70)		RS1/16S331J			R 218	(A,25,71)		RS1/16SS0R0J		
R 1976	(B,8,55)		RS1/16S471J			R 220	(B,23,69)		RS1/16SS0R0J		
R 1977	(B,12,55)		RS1/16S331J			R 221	(A,51,64)		RS1/16SS103J		
R 1978	(B,16,55)		RS1/16S331J			R 222	(A,51,62)		RS1/16SS103J		
R 1979	(B,14,76)		RS1/16S471J			R 225	(A,51,65)		RS1/16SS103J		
R 1980	(B,14,78)		RS1/16S331J			R 226	(A,51,66)		RS1/16SS393J		
R 1981	(B,14,80)		RS1/16S331J			R 227	(B,48,67)		RS1/16SS562J		
R 1982	(B,190,62)		RS1/16S471J			R 228	(B,45,67)		RS1/16SS122J		
R 1983	(B,190,65)		RS1/16S331J			R 229	(B,47,69)		RS1/16SS472J		
R 1984	(B,190,67)		RS1/16S331J			R 232	(B,46,67)		RS1/16SS122J		
R 1991	(B,41,9)		RS1/16S222J			R 233	(B,26,70)		RS1/16SS103J		
R 1992	(B,57,15)		RS1/16S473J			R 234	(B,32,83)		RS1/16SS473J		
R 1999	(B,39,17)		RS1/16S101J			R 235	(A,25,80)		RS1/16SS473J		
CAPACITORS						R 238	(B,14,32)		RS1/16SS222J		
C 901	(B,78,48)		CKSRYB103K50			R 239	(B,21,64)		RS1/16SS473J		
C 902	(B,78,55)		CKSRYB474K10			R 240	(B,11,39)		RS1/16SS473J		
C 903	(B,104,53)		CKSRYB103K50			R 241	(B,10,39)		RS1/16SS103J		
C 904	(B,147,63)	10 µF	CCG1223			R 250	(A,28,80)		RS1/16SS104J		
C 991	(B,155,50)		CKSRYB474K10			R 252	(A,28,78)		RS1/16SS104J		
C 992	(B,156,31)		CKSRYB103K50			R 253	(A,28,76)		RS1/16SS104J		
C 993	(B,128,65)		CKSRYB103K50			R 261	(A,28,79)		RS1/16SS104J		
C 995	(B,92,28)		CKSRYB104K16			R 270	(A,35,46)		RS1/16SS121J		
C 996	(B,92,32)		CKSRYB105K6R3			R 307	(A,16,16)		RS1/16SS183J		
C						R 308	(A,14,16)		RS1/16SS183J		
Unit Number : CWX3418						R 309	(A,16,14)		RS1/16SS183J		
Unit Name : CD Core Unit						R 310	(A,14,12)		RS1/16SS183J		
(S10.5SCION)						R 601	(B,40,42)		RS1/16SS101J		
MISCELLANEOUS						R 602	(B,36,34)		RS1/16SS101J		
IC 201	(A,36,62)	IC	PE5583A			R 603	(B,40,40)		RS1/16SS223J		
IC 203	(B,22,35)	IC	NJM2886DL3-33			R 604	(B,33,34)		RS1/16SS223J		
IC 204	(B,36,66)	IC	MSM56V16160J8T3			R 606	(B,29,37)		RS1/16S0R0J		
IC 301	(A,26,14)	IC	BA5839FP			R 701	(B,19,64)		RS1/16SS221J		
Q 101	(B,58,88)	Transistor	2SA1577			R 702	(A,21,71)		RS1/16SS221J		
Q 201	(B,23,65)	Transistor	UN2111			R 704	(B,16,68)		RS1/16SS221J		
D 101	(A,51,86)	Diode	1SS355			R 705	(B,19,67)		RS1/16SS221J		
TH201	(A,54,60)	Thermistor	CCX1063			R 706	(A,18,67)		RS1/16SS221J		
X 201	(A,22,53)	Ceramic Resonator	16.934 MHz	CSS1603		R 710	(B,24,69)		RS1/16SS0R0J		
S 901	(A,54,53)	Switch(HOME)	CSN1067			R 712	(B,13,37)		RS1/16SS0R0J		
S 903	(B,21,74)	Switch(DSCSNS)	CSN1067			R 716	(B,12,58)		RS1/16S0R0J		
						CAPACITORS					
						C 106	(B,58,85)		CKSQYB475K6R3		

Circuit Symbol and No.**Part No.****Circuit Symbol and No.****Part No.**

A	C 202	(A,28,73)	CKSSYB104K10
	C 203	(A,53,60)	CKSSYB103K16
	C 204	(A,24,80)	CKSSYB103K16
	C 205	(B,23,58)	CKSQYB475K6R3

Q 2001	(A,46,131)	Transistor	DTC124TU
Q 2002	(A,40,132)	Transistor	2SC4081
Q 2011	(A,49,103)	Transistor	DTC124TU
Q 3001	(A,18,78)	Transistor	IMH23

	C 206	(A,22,56)	CKSSYB104K10
	C 207	(A,25,52)	CKSRYB104K16
	C 209	(B,35,49)	CEVW220M6R3
	C 210	(B,30,51)	CKSSYB104K10
	C 211	(A,28,50)	CKSSYB104K10

Q 3002	(A,18,48)	Transistor	IMH23
Q 3003	(A,18,20)	Transistor	IMH23
Q 3061	(A,38,12)	Transistor	IMD3A
D 2004	(A,22,108)	Diode	RR264M-400
D 2005	(A,44,134)	Diode	HZU3R9(B1)

	C 212	(A,27,45)	CKSRYB104K16
	C 213	(A,45,53)	CKSSYB104K10
	C 214	(A,29,48)	CKSSYB104K10
	C 216	(A,51,68)	CKSSYB332K50
	C 217	(A,48,67)	CKSSYB104K10

D 2006	(A,51,128)	Diode	1SS355
D 3061	(A,48,11)	Diode	1SS355
△FU3001	(A,15,8)	Fuse 4 A	CEK1288

RESISTORS

B	C 218	(A,50,68)	CKSSYB473K10
	C 219	(A,47,69)	CKSSYB104K10
	C 220	(A,48,69)	CKSSYB182K50
	C 221	(A,46,69)	CKSSYB104K10
	C 222	(B,46,69)	CCSSCH560J50

R 2001	(B,42,138)	RS1/16S103J
R 2003	(B,8,116)	RS1/10S102J
R 2004	(A,18,139)	RS1/10S102J
R 2005	(B,51,124)	RS1/16S102J
R 2006	(B,53,124)	RS1/16S102J

	C 223	(B,48,69)	CCSSCH4R0C50
	C 224	(A,45,71)	CKSSYB104K10
	C 226	(A,42,74)	CCSSCH680J50
	C 227	(A,42,76)	CCSSCH470J50
	C 228	(A,41,78)	CKSSYB103K16

R 2007	(A,17,142)	RS1/10S102J
R 2008	(B,45,138)	RS1/16S471J
R 2009	(A,24,119)	RS1/16S514J
R 2010	(A,22,121)	RS1/16S434J
R 2011	(A,22,118)	RS1/16S393J

C	C 229	(B,50,75)	CKSSYB104K10
	C 232	(B,17,40)	CKSRYB105K10
	C 236	(A,44,77)	CKSSYB104K10
	C 239	(B,47,67)	CCSSCH220J50
	C 240	(A,37,77)	CKSSYB104K10

R 2012	(B,28,118)	RS1/16S102J
R 2013	(B,27,113)	RS1/16S102J
R 2014	(B,30,119)	RS1/16S473J
R 2015	(B,30,114)	RS1/16S473J
R 2016	(A,53,117)	RS1/16S102J

	C 250	(A,52,64)	CKSSYB102K50
	C 251	(A,52,62)	CKSSYB102K50
	C 270	(B,33,53)	CKSSYB104K10
	C 271	(B,29,59)	CKSSYB104K10
	C 272	(B,29,64)	CKSSYB104K10

R 2017	(A,53,121)	RS1/16S102J
R 2018	(A,57,117)	RS1/16S473J
R 2019	(A,54,118)	RS1/16S473J
R 2020	(A,22,128)	RS1/10S102J
R 3003	(A,19,87)	RS1/16S391J

D	C 273	(B,33,78)	CKSSYB104K10
	C 274	(B,44,64)	CKSSYB104K10
	C 275	(B,44,60)	CKSSYB104K10
	C 303	(A,15,16)	CKSSYB472K25
	C 304	(A,14,13)	CKSSYB223K16

R 3005	(B,23,88)	RS1/16S223J
R 3007	(B,19,88)	RS1/10S471J
R 3011	(A,18,58)	RS1/16S821J
R 3012	(A,18,56)	RS1/16S821J
R 3013	(B,23,63)	RS1/16S223J

	C 307	(B,32,13)	CKSRYB104K16
	C 308	(B,11,34)	CKSRYB105K10
	C 601	(B,40,41)	CKSSYB102K50
	C 602	(B,34,34)	CKSSYB102K50
	C 603	(B,35,44)	CEVW4R7M25

R 3014	(B,23,53)	RS1/16S223J
R 3015	(B,20,58)	RS1/10S471J
R 3016	(B,20,55)	RS1/10S471J
R 3021	(A,18,28)	RS1/16S821J
R 3022	(A,18,26)	RS1/16S821J

E	C 604	(B,35,39)	CEVW4R7M25
	C 703	(B,11,45)	CCSSCH101J50
	C 704	(B,10,55)	CKSSYB102K50

R 3023	(B,16,35)	RS1/16S223J
R 3024	(B,23,21)	RS1/16S223J
R 3025	(B,20,28)	RS1/10S471J
R 3026	(B,20,25)	RS1/10S471J
R 3030	(A,16,87)	RS1/16S391J

R 3031	(A,34,54)	RS1/16S472J
R 3032	(A,34,59)	RS1/16S472J
R 3033	(A,34,52)	RS1/16S563J
R 3034	(A,34,60)	RS1/16S563J
R 3035	(A,34,51)	RS1/16S223J

R 3036	(A,34,62)	RS1/16S223J
R 3037	(A,30,51)	RS1/16S563J
R 3038	(A,30,62)	RS1/16S563J
R 3039	(A,30,21)	RS1/16S563J
R 3040	(A,30,32)	RS1/16S563J

F	IC 2001	(A,28,125) IC	TC7SET08FUS1
	IC 2002	(A,23,140) IC	TC7SH08FUS1
	IC 2003	(A,41,112) IC	BA3121F
	IC 3031	(A,30,57) IC	NJM2115V
	IC 3032	(A,30,27) IC	NJM2115V
	IC 3501	(A,36,82) IC	NJM2115V

D**Unit Number : CWN2095****Unit Name : Sub Unit****MISCELLANEOUS**

5		6		7		8	
<u>Circuit Symbol and No.</u>		<u>Part No.</u>		<u>Circuit Symbol and No.</u>		<u>Part No.</u>	
R 3041	(A,34,24)	RS1/16S472J		C 3047	(A,24,27)	CEVW4R7M25	
R 3042	(A,34,29)	RS1/16S472J		C 3048	(A,24,22)	CEVW4R7M25	
R 3043	(A,34,22)	RS1/16S563J		C 3051	(A,45,75)	CEVW220M16	A
R 3044	(A,34,30)	RS1/16S563J		C 3061	(A,44,11)	CEVW220M16	
R 3045	(A,34,21)	RS1/16S223J		C 3502	(A,41,83)	CKSRYB103K25	
R 3046	(A,34,32)	RS1/16S223J		C 3503	(A,32,85)	CKSRYB563K16	
R 3501	(A,42,80)	RS1/16S682J		C 3504	(A,29,82)	CKSRYB273K16	
R 3502	(A,43,83)	RS1/16S223J		C 3505	(A,57,65)	CEVW470M6R3	
R 3503	(A,36,85)	RS1/16S513J		C 3506	(A,57,69)	CKSRYB104K16	
R 3504	(A,29,85)	RS1/16S513J		C 3507	(A,35,79)	CKSRYB102K50	
R 3505	(A,52,65)	RS1/16S472J		C 3508	(A,34,56)	CKSRYB102K50	
R 3506	(A,57,71)	RS1/16S472J		C 3509	(A,34,26)	CKSRYB102K50	
R 3510	(A,31,83)	RS1/16S101J		C 3511	(A,57,59)	CEVW100M25	B
<u>CAPACITORS</u>				<u>MISCELLANEOUS</u>			
C 2001	(B,9,127)	CKSQYB102K50			Pickup Unit(P10.5)(Service)	CXX1942	
C 2002	(B,9,125)	CKSQYB102K50		M 1	Motor Unit(SPINDE)	CXC7134	
C 2003	(B,18,144)	CKSQYB102K50		M 2	Motor Unit(LOADING/CARRIAGE)	CXC4026	
C 2004	(B,18,108)	CKSQYB102K50					
C 2005	(B,27,123)	CKSRYB103K50					
C 2007	(A,20,141)	CKSRYB103K50					
C 2008	(B,46,140)	CKSRYB103K50					
C 2009	(A,32,118)	CEVW220M16					
C 2010	(A,33,104)	CEVW220M16					
C 2011	(B,30,117)	CKSRYB102K50					
C 2012	(B,30,115)	CKSRYB102K50					
C 2013	(A,33,110)	CEVW220M16					
C 2015	(A,48,108)	CEVW100M25					
C 2016	(A,40,104)	CEVW100M25					
C 2017	(A,46,104)	CKSRYB103K50					
C 2018	(A,44,104)	CKSRYB103K50					
C 2019	(A,48,116)	CEVW100M25					
C 2020	(A,48,122)	CEVW100M25					
C 2021	(B,8,119)	CKSQYB102K50					
C 2022	(B,16,144)	CKSQYB221K50					
C 2023	(B,9,121)	CKSQYB221K50					
C 2024	(B,9,123)	CKSQYB102K50					
C 2025	(B,22,108)	CKSQYB102K50					
C 2026	(A,59,101)	CKSQYB103K50					
C 2027	(B,44,140)	CKSRYB104K50					
C 2031	(B,22,145)	CKSQYB102K50					
C 2033	(B,9,130)	CKSQYB102K50					
C 2034	(B,12,115)	CKSQYB102K50					
C 2051	(A,42,139)	CEVW470M6R3					
C 3003	(B,19,86)	CKSQYB222K50					
C 3013	(B,20,61)	CKSQYB222K50					
C 3014	(B,20,53)	CKSQYB222K50					
C 3023	(B,20,31)	CKSQYB222K50					
C 3024	(B,20,23)	CKSQYB222K50					
C 3031	(A,40,54)	CEVW2R2M50					
C 3032	(A,40,59)	CEVW2R2M50					
C 3033	(A,40,24)	CEVW2R2M50					
C 3034	(A,40,29)	CEVW2R2M50					
C 3035	(A,30,49)	CCSRCH180J50					
C 3036	(A,30,64)	CCSRCH180J50					
C 3037	(A,30,19)	CCSRCH180J50					
C 3038	(A,30,34)	CCSRCH180J50					
C 3041	(A,24,84)	CEVW100M25					
C 3045	(A,24,59)	CEVW4R7M25					
C 3046	(A,24,54)	CEVW4R7M25					