


EXPLODED VIEW (UNIT)

Block No.M1MM

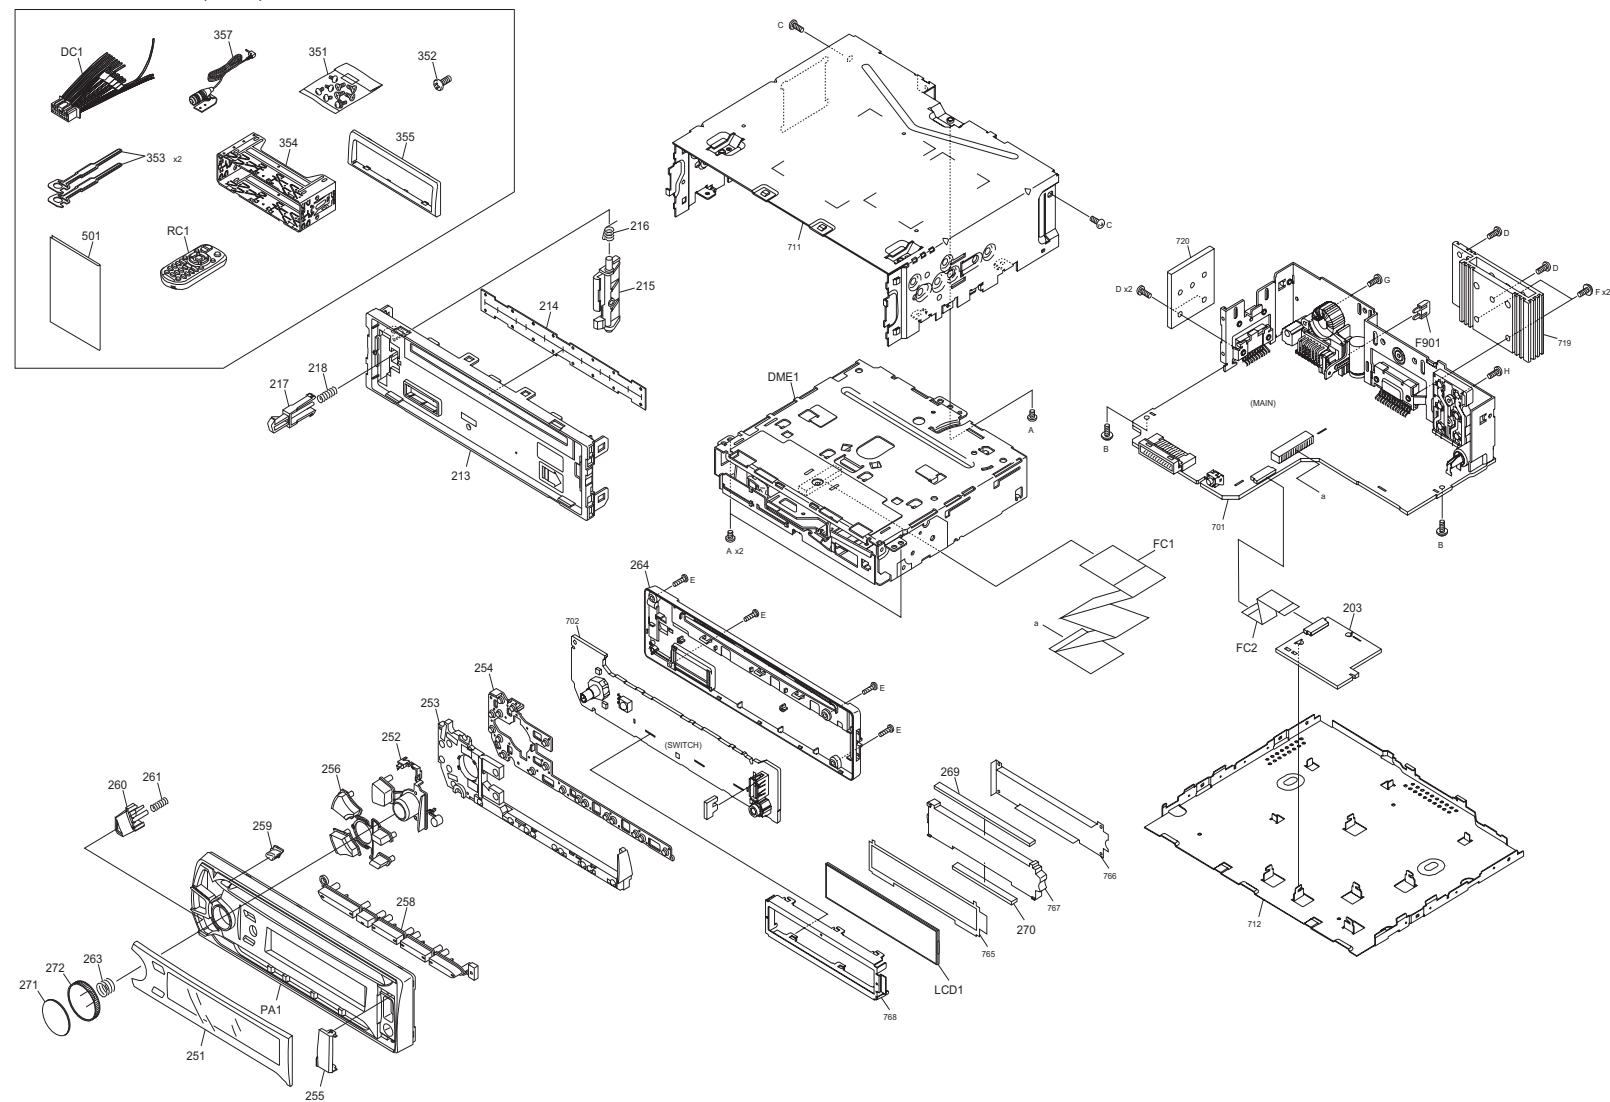

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT362U	K3	KDC-BT420U	K4	KDC-MP362BT	K2	KDC-X399	K0


Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
△	DC1	QAM1623-002	DC CORD		1	
	DME1	FC2-2A00NXN	CD MECHANISM		1	
	F901	FZB10BT-100	BLADE FUSE		1	
	FC1	E3F-0048-00	FLAT CABLE		1	
	FC2	E3F-0027-00	FLAT CABLE		1	
	LCD1	B3H-0007-00	LCD		1	
	PA1	A6D-0010-00	PANEL		1	K3,K4,K2
	PA1	A6D-0010-01	PANEL		1	K0
	RC1	QAL1303-004	REMOTE CONTROL UNIT		1	
	A	QYSDST2604ZA	TAP SCREW	M2.6 x 4mm	3	
	B	GE40377-002A	SCREW		2	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	D	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	4	
	E	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSDSG3006ZA	TAP SCREW	M3 x 6mm	1	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	203	W0C-0055-10	BT MODULE		1	
	213	A2C-0003-00	SUB PANEL		1	
	214	GE40630-003A	BLIND		1	
	215	GE35609-001A	LOCK LEVER		1	
	216	GE40514-004A	TORSION SPRING		1	
	217	GE35611-001A	RELEASE LEVER		1	
	218	GE30999-014A	COMP.SPRING		1	
	251	B1A-0009-02	FRONT GLASS		1	K3
	251	B1A-0010-08	FRONT GLASS		1	K4
	251	B1A-0009-08	FRONT GLASS		1	K2
	251	B1A-0009-01	FRONT GLASS		1	K0
	252	B1B-0008-03	LENS BUTTON		1	
	253	B1K-0010-00	LIGHTING BOARD		1	
	254	E2K-0009-00	CONDUCT RUBBER		1	
	255	F0G-0010-00	USB COVER		1	
	256	K2F-0009-00	SRC/SERCH BUTTON		1	
	258	K2F-0010-00	BUTTON		1	
	259	K2F-0011-00	EJECT BUTTON		1	
	260	K2K-0098-00	DETACH BUTTON		1	
	261	GE30999-013A	COMP.SPRING		1	
	263	GE40127-005A	KNOB SPRING		1	
	264	A4G-0007-00	REAR COVER		1	
	269	E2K-0015-00	CONDUCT RUBBER		1	
	270	E2K-0016-00	CONDUCT RUBBER		1	
	271	K28-0564-03	VOL KNOB TOP		1	
	272	K2K-0105-00	VOL KNOB BASE		1	
	351	GE40531-001A	SCREW SET		1	K2
	352	QYSPSF2008ZA	TAP SCREW	M2 x 8mm	1	
	353	GE40685-001A	HOOK		2	
	354	GE20362-002A	MOUNTING SLEEVE		1	
	355	B0H-0003-00	ESCUTCHEON		1	K3,K4,K2
	355	B0H-0001-00	ESCUTCHEON		1	K0
	357	QAN0126-001	MICROPHONE		1	
	501	B5A-0142-00	INST.MANUAL	ENG FRE SPA	1	K3,K2,K0
	501	B5A-0227-00	INST.MANUAL		1	K4

EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN)

Block No.MBMM

Grease

- ★W01-1738-08
- W01-2067-08

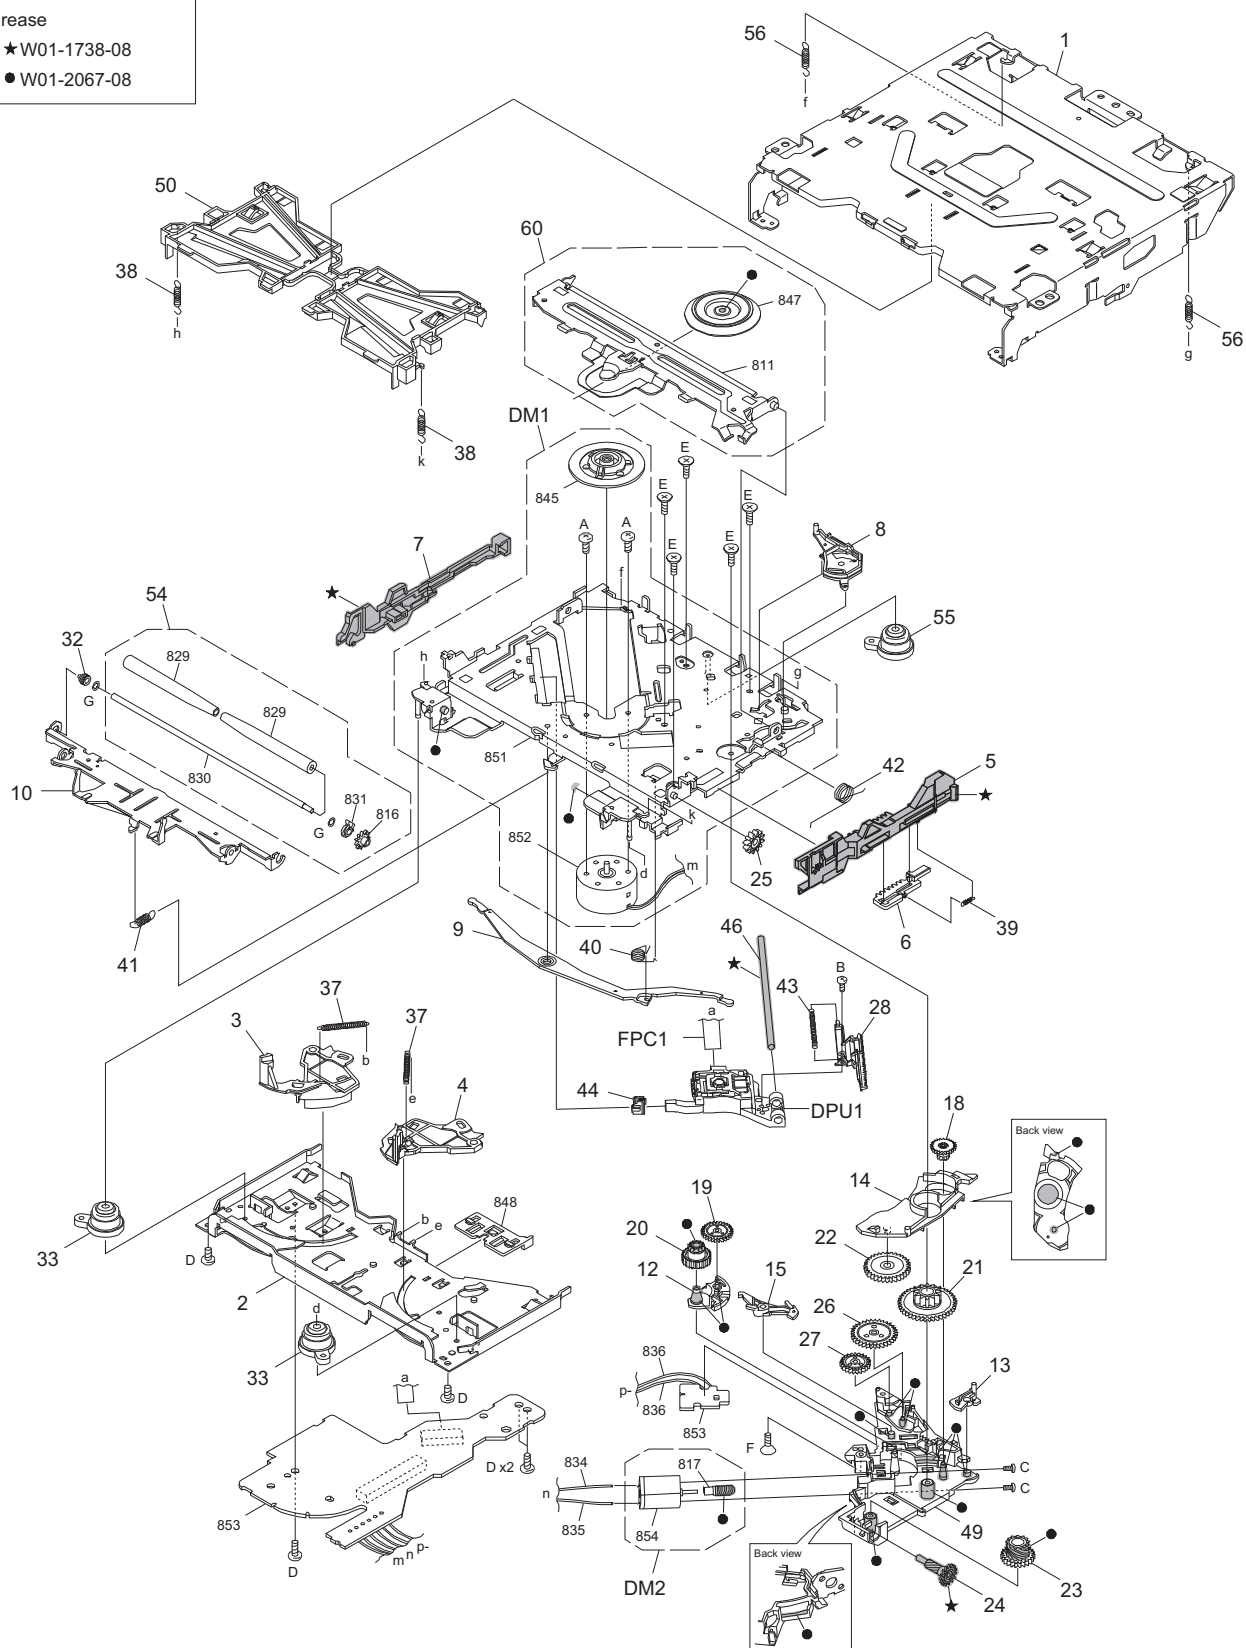

Parts with the exploded numbers larger than 800 are not supplied.

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT362U	K3	KDC-BT420U	K4	KDC-MP362BT	K2	KDC-X399	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM: FC2-2A00NXN) <MBMM>						
	DM1	CM-FC2-MD	MD CHASSIS ASSY		1	
	DM2	CM-FC2-M	LOADING MOTOR ASSY		1	
△	DPU1	QAL1521-001	PICK UP		1	
	FPC1	QAL1465-001	FPC		1	
	A	LV45568-001A	MINI SCREW		2	
	B	QYSPSGT1745ZA	TAP SCREW	M1.7 x 4.5mm	1	
	C	QYSPSPT2025MA	SCREW	M2 x 2.5mm	2	
	D	VKZ4539-054	MINI SCREW		5	
	E	LV45818-001A	G.HOLDER SCREW		5	
	F	LV45815-001A	M. SHAFT SCREW		1	
	G	LV45816-001A	ROLLER WASHER		2	
	1	LV11877-003A	OUTER CHASSIS		1	
	2	LV11878-002A	LOWER CHASSIS		1	
	3	LV3A174-001A	DISC ARM L		1	
	4	LV3A175-001A	DISC ARM R		1	
	5	LV23057-001A	SLIDER R		1	
	6	LV3A178-001A	TRIGGER SLIDER		1	
	7	LV23058-001A	SLIDER L		1	
	8	LV3A179-002A	TRIGGER ARM		1	
	9	LV3A173-001A	JOINT LEVER		1	
	10	LV23055-002A	ROLLER LEVER		1	
	12	LV3A181-001A	TRANSFER ARM		1	
	13	LV45797-002A	SL LOCK CAM		1	
	14	LV3A182-003A	SL LOCK ARM		1	
	15	LV3A183-001A	PICK LOCK ARM		1	
	18	LV3A187-002A	HELICAL GEAR 1		1	
	19	LV3A188-001A	TRANSFER GEAR		1	
	20	LV3A189-001A	LOAD GEAR H		1	
	21	LV3A190-001A	DRIVE GEAR		1	
	22	LV3A191-001A	JOINT GEAR		1	
	23	LV3A192-001A	WORM GEAR 2		1	
	24	LV3A193-001A	HELICAL GEAR 2		1	
	25	LV3A194-001A	LOAD GEAR V		1	
	26	LV3A195-001A	PICK GEAR 1		1	
	27	LV3A196-001A	PICK GEAR 2		1	
	28	LV3A197-001A	RACK GEAR		1	
	32	LV45796-001A	R.RETAINER L		1	
	33	D39-0403-05	DAMPER		2	
	37	LV45808-001A	DISC ARM SPRING		2	
	38	LV45809-001A	FLOAT SPRING(F)		2	
	39	LV45810-001A	TRIGGER SPRING		1	
	40	LV45811-001A	LOAD SPRING		1	
	41	LV45812-001A	ROLLER SPRING		1	
	42	LV45813-001A	CLAMP SPRING		1	
	43	LV45814-001A	PICK SPRING		1	
	44	LV36813-201A	SUB GUIDE CAP		1	
	46	LV44555-001A	MAIN SHAFT		1	
	49	LV11881-002A	GEAR HOLDER		1	
	50	LV11880-003A	DISC GUIDE		1	
	54	CM-FC2-R	ROLLER ASSY		1	
	55	D39-0404-05	DAMPER		1	
	56	LV45835-001A	FLOAT SPRING(R)		2	
	60	LV3A271-001A	CL BASE ASSY		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT362U	K3	KDC-BT420U	K4	KDC-MP362BT	K2	KDC-X399	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-0320-1x) <01>						
	IC161	TDA7720B-X	IC		1	K3,K4
	IC161	TDA7718C	ANALOG IC		1	K2
	IC161	TDA7721-X	IC		1	K0
△	IC301	JCV8034	IC		1	
	IC411	MF1337S3959-X	IC		1	
△	IC540	MN6627553APA	IC		1	
△	IC601	TEF6657HN-X	IC		1	
△	IC701	R5S726A0D216FP	IC		1	
△	IC821	W3F-0010-00	IC		1	
	IC831	BU4228F-W	IC		1	
	IC841	BR24T02FJ-W-X	IC		1	
	IC851	BU1CTD3WG-W	IC		1	
	IC860	MP9942GJ	ANALOG IC		1	
	IC890	NCP380HSNAJAA-X	IC		1	
△	IC901	LV5685PV-H	ANALOG IC		1	
	IC941	BU33TD3WG-W	IC		1	
	Q220	LSCR523UBFS8	TRANSISTOR		1	
	Q250	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q260	LTC043TEB-X	DIGI TRANSISTOR		1	K2
	Q270	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q271	LSAR523UBFS8	TRANSISTOR		1	
	Q272	LTC024EEB-X	DIGI TRANSISTOR		1	
	Q273	LTA024EEB-X	DIGI TRANSISTOR		1	
	Q320	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q330	LTC043TEB-X	DIGI TRANSISTOR		1	
	Q340	LTC043TEB-X	DIGI TRANSISTOR		1	K3,K4,K0
	Q350	LTC043TEB-X	DIGI TRANSISTOR		1	K3,K4,K0
	Q540	2SA2188/E/-X	TRANSISTOR		1	
	Q701	LTA014YEB-X	DIGI TRANSISTOR		1	
	Q1001	2SC4097P/R/	TRANSISTOR		1	K0
	D100	RSB6.8SM-X	BP Z DIODE		1	
	D101	RSB6.8SM-X	BP Z DIODE		1	
	D231	DZ2J056M	ZENER DIODE		1	
	D270	BAW56-TP-X	SI DIODE		1	
	D271	BAW56-TP-X	SI DIODE		1	
	D273	DA2J101	DIODE		1	
	D370	BAW56-TP-X	SI DIODE		1	
	D390	MBRX130	SCHOTTKY DIODE		1	
	D391	MBRX130	SCHOTTKY DIODE		1	
	D400	RB521SM-30-X	SB DIODE		1	K3,K2,K0
	D401	DZ2J051M	ZENER DIODE		1	K3,K2,K0
	D603	F0K-0014-00	SURGE ABSORBER		1	
	D861	DB22306	SCHOTTKY DIODE		1	
	D902	SK34A-L-X	SB DIODE		1	
	D903	SK34A-L-X	SB DIODE		1	
△	D990	1N5401-BPC04	SI DIODE		1	
	D1002	DZ2J062M	ZENER DIODE		1	
	D1003	DZ2J062M	ZENER DIODE		1	
	D1076	RSB6.8SM-X	BP Z DIODE		1	
	D1220	DZ2J062M	ZENER DIODE		1	
	D1221	DZ2J062M	ZENER DIODE		1	
	D1224	DZ2J075M	ZENER DIODE		1	K0
	D1225	DA2J101	DIODE		1	K0
	C100	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C101	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C102	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C103	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C104	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C105	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C161	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C162	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C163	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C164	CD04AV1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C167	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K2
	C168	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K2
	C169	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C170	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	K3,K4,K0
	C171	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C172	CD04AS1C220M	E CAPACITOR	22uF 16V M	1	
	C173	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C177	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C223	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C229	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C230	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C251	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C261	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	K2
	C304	CD04AV1C470M	E CAPACITOR	47uF 16V M	1	
	C311	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	
	C313	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C321	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C331	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	
	C341	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	K3,K4,K0
	C351	CD04AV1C100M	E CAPACITOR	10uF 16V M	1	K3,K4,K0
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C410	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT362U	K3	KDC-BT420U	K4	KDC-MP362BT	K2	KDC-X399	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C510	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C540	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C541	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C542	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C544	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C545	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C546	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C547	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C548	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C549	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C550	CK73GBB1C154K	C CAPACITOR	0.15uF 16V K	1	
	C552	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C553	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C555	CK73GBB1H223K	C CAPACITOR	0.022uF 50V K	1	
	C556	CK73GBB1H332K	C CAPACITOR	3300pF 50V K	1	
	C557	CK73GBB1C334K	C CAPACITOR	0.33uF 16V K	1	
	C558	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C559	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C560	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	
	C561	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C562	CK73GBB1H153K	C CAPACITOR	0.015uF 50V K	1	
	C563	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C564	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C565	CK73GBB1E823K	C CAPACITOR	0.082uF 25V K	1	
	C567	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C568	CK73GBB1C334K	C CAPACITOR	0.33uF 16V K	1	
	C570	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C571	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C572	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C573	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C576	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C577	CC73GCH1H100D	C CAPACITOR	10pF 50V D	1	
	C578	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	
	C579	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C583	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	
	C584	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	
	C588	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	
	C589	CK73GBB1H681K	C CAPACITOR	680pF 50V K	1	
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C603	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C604	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C606	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	
△	C607	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	
	C608	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C609	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C610	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	
△	C611	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	
	C612	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C614	CC73GCH1H220J	C CAPACITOR	22pF 50V J	1	
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	
	C616	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C617	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C619	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C700	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C701	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C702	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C703	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C704	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C705	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C706	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C707	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	
	C708	CC73GCH1H090D	C CAPACITOR	9pF 50V D	1	
	C709	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C710	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C711	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C712	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C713	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C716	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C717	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C718	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C724	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C821	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C830	CK73GBB1H682K	C CAPACITOR	6800pF 50V K	1	
	C831	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C832	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C840	CK73GBB1H473K	C CAPACITOR	0.047uF 50V K	1	
	C850	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C851	CK73GBB1C474K	C CAPACITOR	0.47uF 16V K	1	
	C852	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	
	C861	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C862	CK73EXR1E106K	C CAPACITOR	10uF 25V K	1	
	C863	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C864	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C865	CK73EBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C866	CK73EBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C867	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C868	QE0850-157Z	E CAPACITOR	150uF	1	
	C869	CC73GCH1H150J	C CAPACITOR	15pF 50V J	1	
	C870	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT362U	K3	KDC-BT420U	K4	KDC-MP362BT	K2	KDC-X399	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C890	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C891	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C904	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C905	CD04AR1C471M	E CAPACITOR	470uF 16V M	1	
	C907	CD04AS0J101M	E CAPACITOR	100uF 6.3V M	1	
	C908	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C909	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C914	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C915	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C940	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C941	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C942	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C990	CD04EU1C222M2	E CAPACITOR		1	
	C1000	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1001	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1003	CK73EBB0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1004	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1005	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1007	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1022	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1024	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1040	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1041	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1042	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1044	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1045	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C1047	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C1050	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	K3,K4,K2 K0
	C1050	CC73GCH1H070D	C CAPACITOR	7pF 50V D	1	
	C1051	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1066	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1067	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	
	C1078	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1079	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1091	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1092	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1093	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C1094	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C1096	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1103	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1104	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1106	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1110	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1901	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R103	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R104	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R158	RK73GB2A910J	MG RESISTOR	91Ω 1/10W J	1	
	R159	RK73GB2A910J	MG RESISTOR	91Ω 1/10W J	1	
	R164	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K4,K0 K2
	R167	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R168	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R169	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R170	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R171	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R220	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R221	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R223	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R224	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R225	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R226	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R227	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R239	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R240	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K3,K4,K2 K0
	R240	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	
	R250	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R251	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R252	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R253	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K4,K0 K2
	R260	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R261	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K2
	R262	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K2
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R271	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R302	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R303	RK73GB2A5R1J	MG RESISTOR	5.1Ω 1/10W J	1	
	R304	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R307	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R320	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R321	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R323	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R330	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	
	R331	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R333	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	
	R340	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	K3,K4,K0
	R341	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K3,K4,K0
	R342	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K3,K4,K0
	R343	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K3,K4,K0
	R350	RK73GB2A181J	MG RESISTOR	180Ω 1/10W J	1	K3,K4,K0
	R351	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K3,K4,K0
	R353	RK73GB2A331J	MG RESISTOR	330Ω 1/10W J	1	K3,K4,K0

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT362U	K3	KDC-BT420U	K4	KDC-MP362BT	K2	KDC-X399	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R370	RK73GB2A683J	MG RESISTOR	68kΩ 1/10W J	1	
	R371	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R372	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R400	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R401	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K4
	R402	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	
	R410	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R411	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R412	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R413	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R414	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R541	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R542	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R543	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R544	RK73GB2A183J	MG RESISTOR	18kΩ 1/10W J	1	
	R546	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R548	RK73GB2A123J	MG RESISTOR	12kΩ 1/10W J	1	
	R550	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R551	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R554	RK73GB2A225J	MG RESISTOR	2.2MΩ 1/10W J	1	
	R556	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R557	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R558	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R559	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R562	RK73EB2E823J	MG RESISTOR	82kΩ 1/4W J	1	
	R565	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1	
	R567	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R569	RK73EB2E102J	MG RESISTOR	1kΩ 1/4W J	1	
	R570	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R571	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R572	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R573	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R579	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R580	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R587	RK73GB2A150J	MG RESISTOR	15Ω 1/10W J	1	
	R589	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R590	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R600	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R601	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	
	R603	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R604	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R605	RK73GB2A4R7J	MG RESISTOR	4.7Ω 1/10W J	1	
	R611	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R701	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R702	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R703	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R704	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R705	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R707	RK73GB2A162J	MG RESISTOR	1.6kΩ 1/10W J	1	
	R709	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	
	R711	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R712	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R713	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R714	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R715	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R716	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R717	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R719	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	
	R720	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R721	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R722	RK73GB2A911J	MG RESISTOR	910Ω 1/10W J	1	
	R723	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R724	RK73GB2A105J	MG RESISTOR	1MΩ 1/10W J	1	
	R725	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R726	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	
	R727	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	
	R728	RK73GB2A220J	MG RESISTOR	22Ω 1/10W J	1	
	R729	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	
	R730	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R731	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R732	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	K3
	R732	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	K4
	R732	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K2
	R732	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	K0
	R733	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	K3
	R733	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	K4
	R733	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	K2
	R733	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K0
	R734	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K3,K4
	R735	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	K3,K4
	R735	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	K2,K0
	R739	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R740	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R741	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R742	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R743	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R744	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R745	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R746	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R747	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT362U	K3	KDC-BT420U	K4	KDC-MP362BT	K2	KDC-X399	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R748	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R749	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R750	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1	
	R751	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R752	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1	
	R753	RK73EB2E910J	MG RESISTOR	91Ω 1/4W J	1	
	R754	RK73GB2A121J	MG RESISTOR	120Ω 1/10W J	1	
	R755	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R756	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R757	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R758	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R759	RK73EB2E161J	MG RESISTOR	160Ω 1/4W J	1	
	R760	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R761	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R762	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R763	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R764	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R769	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R775	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R776	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R820	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R821	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R822	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R830	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R840	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	1	
	R841	RK73GB2A271J	MG RESISTOR	270Ω 1/10W J	1	
	R861	RK73GB2A200J	MG RESISTOR	20Ω 1/10W J	1	
	R862	RK73EB2E201J	MG RESISTOR	200Ω 1/4W J	1	
	R863	RK73GB2A393J	MG RESISTOR	39kΩ 1/10W J	1	
	R865	RK73GH2A683D	MG RESISTOR	68kΩ 1/10W D	1	
	R866	RK73GH2A183D	MG RESISTOR	18kΩ 1/10W D	1	
	R867	RK73GH2A393D	MG RESISTOR	39kΩ 1/10W D	1	
	R868	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R890	RK73GH2A203D	MG RESISTOR	20kΩ 1/10W D	1	
	R892	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R901	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R902	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R903	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R904	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R905	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R906	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R907	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R933	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R940	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1002	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1003	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R1023	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R1024	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1025	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R1035	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1036	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	K3,K4,K2
	R1036	RK73EB2E431J	MG RESISTOR	430Ω 1/4W J	1	K0
	R1037	RK73EB2E431J	MG RESISTOR	430Ω 1/4W J	1	K0
	R1038	RK73EB2E431J	MG RESISTOR	430Ω 1/4W J	1	K0
	R1039	RK73EB2E431J	MG RESISTOR	430Ω 1/4W J	1	K0
	R1040	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1041	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1043	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1044	RK73GB2A513J	MG RESISTOR	51kΩ 1/10W J	1	K0
	R1045	RK73EB2E361J	MG RESISTOR	360Ω 1/4W J	1	K0
	R1046	RK73EB2E361J	MG RESISTOR	360Ω 1/4W J	1	K0
	R1049	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1050	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	
	R1051	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	
	R1053	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1055	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1057	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1062	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1063	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1064	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1065	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1070	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R1071	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1073	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1075	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1076	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1080	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1081	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R1092	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R1860	RK73EB2E201J	MG RESISTOR	200Ω 1/4W J	1	
	R1862	RK73EB2E201J	MG RESISTOR	200Ω 1/4W J	1	
	R1863	RK73EB2E201J	MG RESISTOR	200Ω 1/4W J	1	
	RA540	RK74GB1J471J	NET RESISTOR	470Ω 1/16W J	1	
	L220	LR73Z0AD470M	CHIP INDUCTOR	47uH	1	
	L221	NQR0713-001X	FERRITE BEADS		1	
	L222	NQR0713-001X	FERRITE BEADS		1	
	L223	LR73Z0AD470M	CHIP INDUCTOR	47uH	1	
	L540	NQR0713-001X	FERRITE BEADS		1	
	L574	NQR0713-001X	FERRITE BEADS		1	
	L601	NQLM93K-4R7X	COIL	4.7uH K	1	
	L602	NQLM93K-R47X	COIL	0.47uH K	1	
	L603	NQLM93K-R10X	COIL	0.1uH K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT362U	K3	KDC-BT420U	K4	KDC-MP362BT	K2	KDC-X399	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	L604	NQLM93K-1R0X	COIL	1uH K	1	
	L605	NQLM93K-R22X	COIL	0.22uH K	1	
	L606	NQLM93K-R12X	COIL	0.12uH K	1	
	L607	NQLM93K-R15X	COIL	0.15uH K	1	
	L611	LR73Z0AD220M	CHIP INDUCTOR	22uH	1	
	L700	NQR0713-001X	FERRITE BEADS		1	
	L701	NQR0714-001X	FERRITE BEADS		1	
	L709	NQR0713-001X	FERRITE BEADS		1	
	L710	NQR0713-001X	FERRITE BEADS		1	
	L777	NQR0713-001X	FERRITE BEADS		1	
	L778	NQR0713-001X	FERRITE BEADS		1	
	L820	NQR0713-001X	FERRITE BEADS		1	
	L821	NQR0713-001X	FERRITE BEADS		1	
	L822	NQR0713-001X	FERRITE BEADS		1	
	L823	NQR0713-001X	FERRITE BEADS		1	
	L824	NQR0713-001X	FERRITE BEADS		1	
	L825	LB73G0CA-002	CHIP FERRITE		1	
	L826	LB73G0CK-001	CHIP FERRITE		1	
	L827	NQR0714-001X	FERRITE BEADS		1	
	L850	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L860	NQLL6EM-100X	COIL	10uH M	1	
	L861	NQLH65M-4R7X	COIL	4.7uH M	1	
	L990	QQR1927-001	CHOKE COIL		1	
	L1000	NQR0713-001X	FERRITE BEADS		1	
	L1701	NQR0713-001X	FERRITE BEADS		1	
	CN221	QGF1040F1-11	CONNECTOR	FFC/FPC (1-11)	1	
	CN502	QGF1040F1-24	CONNECTOR	FFC/FPC (1-24)	1	
	CN701	QGZ2006J1-20	CONNECTOR	(1-20)	1	
	CN990	QNZ0607-001	CAR CONNECTOR		1	
	J220	QNS0307-001	3.5 JACK		1	
	J321	QNN0866-001	PIN JACK		1	K3,K4,K0
	J321	QNN0868-001	PIN JACK		1	K2
	J600	QNB0356-001	ANT TERMINAL		1	
	S830	QSW0648-001Z	TACT SWITCH		1	
	X540	NAX1224-001X	CRYSTAL		1	
	X600	QAX0969-001Z	CRYSTAL		1	
	X701	NAX1243-001X	CRYSTAL		1	
SWITCH PWB ASSY (XJ6-0230-1x) <02>						
	IC1	BU97530KV-M-X	IC		1	
	IC90	SIR8630B6T	IR DETECT UNIT		1	
	Q1	LSCR523UBFS8	TRANSISTOR		1	
	Q50	LSCR523EBFS8	TRANSISTOR		1	K2
	Q51	LSCR523EBFS8	TRANSISTOR		1	
	Q52	LSCR523EBFS8	TRANSISTOR		1	
	Q53	LSCR523EBFS8	TRANSISTOR		1	
	D1	DZ2J056M	ZENER DIODE		1	
	D2	MBRX130	SCHOTTKY DIODE		1	
	D20	SML-D12V8WT	LED		1	
	D21	NESM026DT-W	LED		1	
	D22	NESM026DT-W	LED		1	
	D23	NESM026DT-W	LED		1	
	D24	NESM026DT-W	LED		1	
	D40	NESM026DT-W	LED		1	
	D80	DZ2J051M	ZENER DIODE		1	
	D81	DZ2J051M	ZENER DIODE		1	
	C1	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C5	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C9	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C85	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C86	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	C90	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	R1	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	
	R3	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R5	RK73FB2B331J	MG RESISTOR	330Ω 1/8W J	1	
	R6	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R20	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	K2
	R22	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R23	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R24	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R26	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R27	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R28	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R30	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R31	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R32	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R34	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R35	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R36	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R44	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R45	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R46	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R47	RK73GB2A122J	MG RESISTOR	1.2kΩ 1/10W J	1	
	R48	RK73GB2A821J	MG RESISTOR	820Ω 1/10W J	1	
	R50	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K2
	R51	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KDC-BT362U	K3	KDC-BT420U	K4	KDC-MP362BT	K2	KDC-X399	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R52	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R53	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R70	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	K3,K4,K0
	R80	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R1007	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	CN1	QGZ2006K1-20X	CONNECTOR	(1-20)	1	
	FL80	NQR0704-001X	CHOKE COIL		1	
	J60	QNS0320-001	3.5 JACK		1	
	J80	QNZ1076-001	USB CONNECTOR		1	
	S20	T9K-0007-00	ROTARY ENCODER		1	
CD MECHA PWB ASSY (LVA20106-01A) <03>						
	IC1	BD8266EFV-M-X	IC		1	
	C26	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C54	NCB31HK-104X	C CAPACITOR	0.1uF 50V K	1	
	C55	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	R18	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R21	RK73GB2A822J	MG RESISTOR	8.2kΩ 1/10W J	1	
	R24	RK73GB2A272J	MG RESISTOR	2.7kΩ 1/10W J	1	
	R27	RK73GB2A562J	MG RESISTOR	5.6kΩ 1/10W J	1	
	R28	RK73GB2A114J	MG RESISTOR	110kΩ 1/10W J	1	
	R29	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R30	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R36	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R37	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R38	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R40	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R42	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R47	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R48	RK73EB2E000J	MG RESISTOR	0Ω 1/4W J	1	
	R50	RK73GB2A131J	MG RESISTOR	130Ω 1/10W J	1	
	CN1	QGF1044F2-24X	CONNECTOR	FFC/FPC (1-24)	1	
	CN2	QGF0522F6-15W	CONNECTOR	FFC/FPC (1-15)	1	
	SW1	NSW0291-001X	DETECT SWITCH		1	
	SW2	NSW0291-001X	DETECT SWITCH		1	
	SW3	NSW0313-001X	DETECT SWITCH		1	