
EXPLODED VIEW (UNIT)

Block No.M1MM

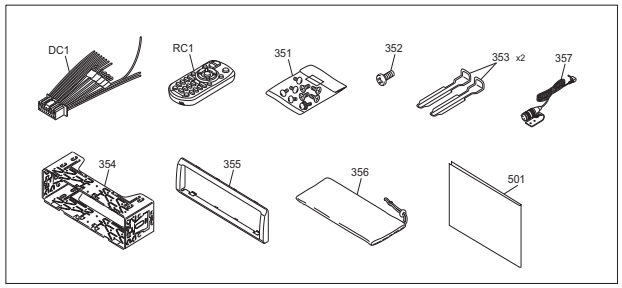

Parts with the exploded numbers larger than 700 are not supplied.

No.WA248

created date:2016-12-07

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT303	A1	KMM-BT303	M1	KMM-BT318	K2	KMM-BT318U	K1
KMR-M318BT	K0						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <M1MM>						
⚠	DC1	E3A-0324-00	DC CORD		1	
	MAB1	CB-XJ1193M01N	MAIN PWB ASSY		1	A1,M1
	MAB1	CB-XJ1193K02N	MAIN PWB ASSY		1	K2
	MAB1	CB-XJ1193K01N	MAIN PWB ASSY		1	K1
	MAB1	CB-XJ1193K00N	MAIN PWB ASSY		1	K0
⚠	F901	FZB10BT-100	BLADE FUSE		1	
	LCD1	B3H-0033-00	LCD		1	
	PA1	A6D-0056-00	PANEL		1	A1,M1,K1
	PA1	A6D-0056-04	PANEL		1	K2
	PA1	A6D-0056-03	PANEL		1	K0
	RC1	A7A-0019-00	REMOTE CTL(IR)		1	A1,M1,K2
	A	QYSDSF2008ZA	TAP SCREW	M2 x 8mm	4	
	B	LV41200-004A	SPECIAL SCREW		3	
	C	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	2	
	D	QYSDST2610ZA	TAP SCREW	M2.6 x 10mm	1	
	E	QYSDST2608ZA	TAP SCREW	M2.6 x 8mm	2	
	F	GE40377-005A	SPECIAL SCREW		2	
	G	QYSPSG3008ZA	TAP SCREW	M3 x 8mm	1	
	H	QYSDSF2608ZA	TAP SCREW	M2.6 x 8mm	1	
	J	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	K1,K0
	K	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	K1,K0
	L	QYSDST2606ZA	TAP SCREW	M2.6 x 6mm	1	K0
	213	A2C-0049-02	SUB PANEL		1	
	215	D1A-0023-00	LEVER		1	
	216	G0A-0027-00	EXTEN.SPRING		1	
	217	D1A-0022-00	LEVER		1	
	220	E3A-0385-00	CORD W.CON.		1	K1,K0
	221	E3A-0316-00	CORD W.CON.		1	K0
	223	LV46006-001A	COOLING RUBBER		1	A1,M1
	251	B1A-0038-0X	FRONT GLASS		1	A1,M1
	251	B1A-0038-0P	FRONT GLASS		1	K2
	251	B1A-0038-0L	FRONT GLASS		1	K1
	251	B1A-0038-0N	FRONT GLASS		1	K0
	252	F0G-0096-00	COVER		1	
	254	K2F-0030-00	PUSH KNOB		1	
	255	K2F-0029-00	PUSH KNOB		1	
	256	B1B-0041-03	LENS		1	
	257	B1K-0035-00	LIGHTING BOARD		1	
	258	E2K-0024-00	CONDUCT RUBBER		1	
	260	K2K-0162-00	KNOB		1	
	261	GE30999-013A	COMP.SPRING		1	
	262	A4G-0031-00	REAR COVER		1	A1,M1,K2,K0
	262	A4G-0031-02	REAR COVER		1	K1
	263	K2K-0165-00	KNOB BASE		1	A1,M1,K2,K0
	264	GE40127-005A	KNOB SPRING		1	
	268	E2K-0029-00	CONDUCT RUBBER		1	
	271	K2K-0174-01	KEY TOP		1	K1
	272	K2K-0105-00	KNOB		1	K1
	273	W0C-0170-00	RF TAG		1	K1
	351	GE40531-001A	SCREW SET		1	A1,M1,K2
	352	QYSPSF2008ZA	TAP SCREW	M2 x 8mm	1	
	353	GE40646-001A	HOOK		2	
	354	GE20342-001A	MOUNTING SLEEVE		1	
	355	B0H-0013-00	ESCUTCHEON		1	A1,M1,K2,K1
	355	B0H-0013-01	ESCUTCHEON		1	K0
	356	GE40521-001A	CARRYING CASE		1	A1,M1
	357	QAN0126-001	MICROPHONE		1	
	501	B5A-1345-01	INST.MANUAL	INDO	1	A1
	501	B5A-1345-00	INST.MANUAL	ENG ARA	1	M1
	501	B5A-1343-10	INST.MANUAL	ENG FRE SPA	1	K2,K1,K0
	702	----------	SWITCH PWB ASSY	NO SERVICE PART	1	A1,M1,K2,K1
	702	----------	SWITCH PWB ASSY	NO SERVICE PART	1	K0
	711	----------	TOP PLATE	NO SERVICE PART	1	
	712	----------	BOTTOM PLATE	NO SERVICE PART	1	
	719	----------	HEAT SINK	NO SERVICE PART	1	
	759	----------	LIGHTING BOARD	NO SERVICE PART	1	
	765	----------	LCD CASE	NO SERVICE PART	1	
	766	----------	OPTI.DIFFUSER	NO SERVICE PART	1	
	767	----------	LIGHTING BOARD	NO SERVICE PART	1	
	769	----------	REF.SHEET	NO SERVICE PART	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT303	A1	KMM-BT303	M1	KMM-BT318	K2	KMM-BT318U	K1
KMR-M318BT	K0						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
MAIN PWB ASSY (XJ1-193x-0x) <XJ1>						
	IC161	BD37069FV-M	ANALOG IC		1	
	IC200	NJM11100F1	ANALOG IC		1	A1,M1,K0
	IC220	NJM4565V-X	IC		1	
⚠	IC301	JCV8034	IC		1	
	IC411	MFI337S395901	MCU IC		1	
	IC470	TC7SH08FU-X	IC(DIGITAL)		1	K1,K0
	IC481	SN65HVD3082ED	MOS IC		1	K0
	IC482	TC7SH08FU-X	IC(DIGITAL)		1	K0
	IC540	MP9943AGQ	ANALOG IC		1	
⚠	IC601	TEF6657HN-X	IC		1	
⚠	IC701	STA1080	MPU IC	BGA	1	
	IC702	TC7SH08FU-X	IC(DIGITAL)		1	
⚠	IC821	W3F-0265-00	ROM IC		1	
⚠	IC822	W25Q16DVSSIG	ROM IC		1	
	IC831	IC-PST8428U	MOS IC		1	
	IC880	BD00IA5WEFJ	ANALOG IC		1	
	IC890	BD2242G-G	MOS IC		1	
⚠	IC901	LV5685PV-H	ANALOG IC		1	
	IC930	BD33IC0WEFJ	ANALOG IC		1	
⚠	IC1909	M12L128168A6TG	SV-DRAM IC		1	
	Q220	2SC1623/5-6/-X	TRANSISTOR		1	
	Q250	KRC410E-P	DIGI TRANSISTOR		1	
	Q260	KRC410E-P	DIGI TRANSISTOR		1	A1,M1
	Q270	KRA303E-P	DIGI TRANSISTOR		1	
	Q271	LSAR523UBFS8	TRANSISTOR		1	
	Q272	KRC403E-P	DIGI TRANSISTOR		1	
	Q273	KRA303E-P	DIGI TRANSISTOR		1	
	Q274	KRC403E-P	DIGI TRANSISTOR		1	
	Q320	KRC410E-P	DIGI TRANSISTOR		1	
	Q330	KRC410E-P	DIGI TRANSISTOR		1	
	Q340	KRC410E-P	DIGI TRANSISTOR		1	K2,K1,K0
	Q350	KRC410E-P	DIGI TRANSISTOR		1	K2,K1,K0
	Q470	KRC402E-P	DIGI TRANSISTOR		1	K1,K0
	Q471	KRC410E-P	DIGI TRANSISTOR		1	K1,K0
	Q480	LSCR523UBFS8	TRANSISTOR		1	K0
	Q481	LSCR523UBFS8	TRANSISTOR		1	K0
	Q482	LSCR523UBFS8	TRANSISTOR		1	K0
	Q483	LSAR523UBFS8	TRANSISTOR		1	K0
	Q484	RSR015P06	FET		1	K0
	Q485	LTC043ZUB-X	DIGI TRANSISTOR		1	K0
	Q486	LTC043ZUB-X	DIGI TRANSISTOR		1	K0
	Q880	LTC043EUBFS8	DIGI TRANSISTOR		1	
	Q920	LTA044EEBFS8	DIGI TRANSISTOR		1	
	D100	DZ2J075M	ZENER DIODE		1	
	D101	DZ2J075M	ZENER DIODE		1	
	D220	DZ2J068M	ZENER DIODE		1	
	D222	DZ2J056M	ZENER DIODE		1	
	D271	BAW56-TP-X	SI DIODE		1	
	D273	1SS355VM	DIODE		1	
	D370	BAW56-TP-X	SI DIODE		1	
	D390	SM5818PL	SCHOTTKY DIODE		1	
	D391	MBR0530-X	SB DIODE		1	
	D400	RB521SM-30	DIODE		1	
	D401	DZ2J051M	ZENER DIODE		1	
	D471	RSB6.8SM-X	BP Z DIODE		1	K1,K0
	D472	RSB6.8SM-X	BP Z DIODE		1	K1,K0
	D473	RSB6.8SM-X	BP Z DIODE		1	K1,K0
	D474	RSB6.8SM-X	BP Z DIODE		1	K1,K0
	D475	DZ2J068M	ZENER DIODE		1	K1,K0
	D476	DZ2J068M	ZENER DIODE		1	K1,K0
	D480	DZ2J062M	ZENER DIODE		1	K0
	D481	DZ2J062M	ZENER DIODE		1	K0
	D482	DZ2J051M	ZENER DIODE		1	K0
	D701	DZ2J051M	ZENER DIODE		1	
	D702	DZ2J051M	ZENER DIODE		1	
	D704	DZ2J051M	ZENER DIODE		1	
	D706	DZ2J051M	ZENER DIODE		1	
	D707	DZ2J051M	ZENER DIODE		1	
	D709	DZ2J051M	ZENER DIODE		1	
	D710	DZ2J051M	ZENER DIODE		1	
	D711	DZ2J051M	ZENER DIODE		1	
	D902	SK34A-L	SCHOTTKY DIODE		1	
	D903	SK34A-L	SCHOTTKY DIODE		1	
	D930	GN1J	DIODE		1	
⚠	D990	GN3XB	DIODE		1	
	C101	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C102	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C103	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C104	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C105	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C106	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C161	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C162	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C163	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C164	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C165	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C166	CE32BJ1V4R7M	E CAPACITOR	4.7uF 35V M	1	
	C167	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C168	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C169	CE32BY1C470M	E CAPACITOR	47uF 16V M	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT303	A1	KMM-BT303	M1	KMM-BT318	K2	KMM-BT318U	K1
KMR-M318BT	K0						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C170	CE32CL1C100M	E CAPACITOR	10uF 16V M	1	
	C171	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	A1,M1,K0
	C195	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1	
	C196	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1	
	C197	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1	
	C198	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1	
	C199	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1	
	C200	CC73HCH1H470J	C CAPACITOR	47pF 50V J	1	
	C201	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	A1,M1,K0
	C202	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A1,M1,K0
	C203	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	A1,M1,K0
	C204	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	A1,M1,K0
	C222	CK73HBB1C333K	C CAPACITOR	0.033uF 16V K	1	
	C223	CK73HBB1C333K	C CAPACITOR	0.033uF 16V K	1	
	C224	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C225	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C226	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	
	C227	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	
	C228	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C229	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C230	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C231	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	
	C234	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C235	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C236	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C237	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C252	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	
	C262	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	A1,M1
	C273	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C303	CC73GCH1H680J	C CAPACITOR	68pF 50V J	1	
	C304	CE32CL1E330M	E CAPACITOR	33uF 25V M	1	
	C305	CC73GCH1H680J	C CAPACITOR	68pF 50V J	1	
	C306	CC73GCH1H680J	C CAPACITOR	68pF 50V J	1	
	C311	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C312	CK730AV1C105K	C CAPACITOR	1uF 16V K	1	
	C316	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C317	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C318	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C319	CK730AV1C224K	C CAPACITOR	0.22uF 16V K	1	
	C322	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	
	C332	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	
	C342	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	K2,K1,K0
	C352	CK73EBB1C475K	C CAPACITOR	4.7uF 16V K	1	K2,K1,K0
	C370	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C390	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C391	CK73FBB1H224K	C CAPACITOR	0.22uF 50V K	1	
	C410	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C411	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C472	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	K1,K0
	C473	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	K1,K0
	C474	CK73GXR1C225K	C CAPACITOR	2.2uF 16V K	1	K1,K0
	C475	CK73GXR1A225K	C CAPACITOR	2.2uF 10V K	1	K1,K0
	C480	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	K0
	C481	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0
	C482	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	K0
	C483	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	K0
	C484	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	K0
	C485	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	K0
	C486	CK73HBB1E682K	C CAPACITOR	6800pF 25V K	1	K0
	C540	CE32CC1A151M	E CAPACITOR	150uF 10V M	1	
	C541	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	
	C543	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C545	CK73EBB1A106K	C CAPACITOR	10uF 10V K	1	
	C547	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C548	CK73HBB0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C549	CK73HBB0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C550	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	
	C601	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C603	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C604	CK73HBB1H152K	C CAPACITOR	1500pF 50V K	1	
	C605	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C606	CC73HCH1H090D	C CAPACITOR	9pF 50V D	1	
⚠	C607	CC73GCH1H010C	C CAPACITOR	1pF 50V C	1	
	C608	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C609	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C610	CC73GCH1H120J	C CAPACITOR	12pF 50V J	1	
	C611	CC73HCH1H010C	C CAPACITOR	1pF 50V C	1	
	C612	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C614	CC73HCH1H220J	C CAPACITOR	22pF 50V J	1	
	C615	CC73GCH1H330J	C CAPACITOR	33pF 50V J	1	
	C616	CK73HBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C617	CK73HBB0J224K	C CAPACITOR	0.22uF 6.3V K	1	
	C618	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C619	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C620	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C621	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C624	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C702	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C703	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT303	A1	KMM-BT303	M1	KMM-BT318	K2	KMM-BT318U	K1
KMR-M318BT	K0						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C704	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	
	C705	CC73HCH1H150J	C CAPACITOR	15pF 50V J	1	
	C706	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C707	CK73HBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C709	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C710	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C711	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C713	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C714	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C716	CC73GCH1H101J	C CAPACITOR	100pF 50V J	1	
	C719	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C720	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C722	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C724	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C725	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C726	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C727	CK73FXR1C106K	C CAPACITOR	10uF 16V K	1	
	C728	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C729	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	
	C730	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C731	CK73FXR1A475K	C CAPACITOR	4.7uF 10V K	1	
	C733	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C735	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C736	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1	
	C737	CC73HCH1H070D	C CAPACITOR	7pF 50V D	1	
	C738	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C740	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C741	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C742	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C750	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C756	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C820	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C821	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C824	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C830	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	
	C831	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C832	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C880	CK73FXR1C475K	C CAPACITOR	4.7uF 16V K	1	
	C890	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C891	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C892	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C903	CE32BZ1C220M	E CAPACITOR		1	
	C904	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C906	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C907	CE32BZ0J101M	E CAPACITOR		1	
	C908	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C909	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C910	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C911	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C912	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C914	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C916	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C918	CE32BZ1C221M	E CAPACITOR	220uF 16V M	1	
	C919	CE32BZ1C221M	E CAPACITOR	220uF 16V M	1	
	C930	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C931	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C990	CD04EU1C222M1	E CAPACITOR		1	
	C1001	CK73GBB1H221K	C CAPACITOR	220pF 50V K	1	
	C1002	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1005	CK73HBB1H222K	C CAPACITOR	2200pF 50V K	1	
	C1006	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C1009	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1010	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A1,M1
	C1011	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A1,M1
	C1012	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A1,M1
	C1013	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A1,M1
	C1014	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A1,M1
	C1015	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A1,M1
	C1016	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A1,M1
	C1017	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	A1,M1
	C1020	CK73GBB1C104K	C CAPACITOR	0.1uF 16V K	1	
	C1021	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1022	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C1023	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1024	CK73GBB1H221K	C CAPACITOR	220pF 50V K	1	
	C1025	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1026	CK73GBB1H221K	C CAPACITOR	220pF 50V K	1	
	C1027	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1028	CK73GBB1H221K	C CAPACITOR	220pF 50V K	1	
	C1029	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C1030	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1031	CK73HBB1H471K	C CAPACITOR	470pF 50V K	1	
	C1032	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1050	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C1300	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1301	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	
	C1600	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1601	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1602	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1603	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1604	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C1909	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT303	A1	KMM-BT303	M1	KMM-BT318	K2	KMM-BT318U	K1
KMR-M318BT	K0						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	C1910	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1911	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1912	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C1913	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1914	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C1915	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C1916	CK73HBB1A104K	C CAPACITOR	0.1uF 10V K	1	
	C2002	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C2005	CK73GBB1H821K	C CAPACITOR	820pF 50V K	1	
	C2006	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2007	CC73HCH1H820J	C CAPACITOR	82pF 50V J	1	
	C2008	CC73GCH1H271J	C CAPACITOR	270pF 50V J	1	
	C2009	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2010	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C2011	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C2012	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2013	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C2014	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C2015	CK73GBB1H152K	C CAPACITOR	1500pF 50V K	1	
	C2016	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	
	C2017	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C2018	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C2019	CK73GXR1H104K	C CAPACITOR	0.1uF 50V K	1	
	C2020	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2021	CK73GBB1C224K	C CAPACITOR	0.22uF 16V K	1	
	C2022	CC73GCH1H680J	C CAPACITOR	68pF 50V J	1	
	C2023	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2024	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C2025	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2026	CK73FXR0J106K	C CAPACITOR	10uF 6.3V K	1	
	C2028	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	K1,K0
	C2029	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C2030	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C2031	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2032	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2034	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2035	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2037	CK73GXR0J475K	C CAPACITOR	4.7uF 6.3V K	1	A1,M1,K2
	C2038	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2039	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2040	CC73HCH1H100D	C CAPACITOR	10pF 50V D	1	
	C2041	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2042	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2044	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2060	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C2066	CK73HXR1A105K	C CAPACITOR	1uF 10V K	1	
	C2067	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2072	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C2073	CC73HCH1H101J	C CAPACITOR	100pF 50V J	1	
	C2080	CC73GCH1H050C	C CAPACITOR	5pF 50V C	1	
	C2083	CK73GBB1H103K	C CAPACITOR	0.01uF 50V K	1	
	C2085	CK73HBB1C103K	C CAPACITOR	0.01uF 16V K	1	K0
	C2114	CK73HBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C2118	CE32BZ0J101M	E CAPACITOR		1	
	R100	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R101	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R102	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R103	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R104	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R160	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1,K0
	R161	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	A1,M1,K0
	R162	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R173	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R175	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K2,K1
	R188	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R189	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R190	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R191	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R192	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R193	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R194	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R195	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R196	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R197	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R198	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R199	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R200	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R201	RK73HH1J132D	MG RESISTOR	1.3kΩ 1/16W D	1	A1,M1,K0
	R202	RK73HH1J752D	MG RESISTOR	7.5kΩ 1/16W D	1	A1,M1,K0
	R220	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R221	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R222	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R223	RK73HB1J822J	MG RESISTOR	8.2kΩ 1/16W J	1	
	R224	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R225	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	
	R226	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	R227	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	
	R229	RK73HB1J122J	MG RESISTOR	1.2kΩ 1/16W J	1	
	R230	RK73HB1J124J	MG RESISTOR	120kΩ 1/16W J	1	
	R232	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT303	A1	KMM-BT303	M1	KMM-BT318	K2	KMM-BT318U	K1
KMR-M318BT	K0						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R233	RK73GB2A681J	MG RESISTOR	680Ω 1/10W J	1	
	R234	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R237	RK73HB1J471J	MG RESISTOR	470Ω 1/16W J	1	
	R238	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R250	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R251	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R252	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R253	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	K2,K1,K0
	R260	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	A1,M1
	R261	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	A1,M1
	R262	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	A1,M1
	R270	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	
	R271	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R272	RK73HB1J303J	MG RESISTOR	30kΩ 1/16W J	1	
	R273	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	
	R302	RK73GB2A432J	MG RESISTOR	4.3kΩ 1/10W J	1	
	R303	RK73EB2E160J	MG RESISTOR	16Ω 1/4W J	1	
	R304	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R305	RK73EB2E1R0J	MG RESISTOR	1Ω 1/4W J	1	
	R316	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R317	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R318	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R319	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R320	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R321	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R323	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R330	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	
	R331	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	
	R333	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	
	R340	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K2,K1,K0
	R341	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K2,K1,K0
	R343	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K2,K1,K0
	R350	RK73HB1J181J	MG RESISTOR	180Ω 1/16W J	1	K2,K1,K0
	R351	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K2,K1,K0
	R353	RK73HB1J331J	MG RESISTOR	330Ω 1/16W J	1	K2,K1,K0
	R370	RK73HB1J683J	MG RESISTOR	68kΩ 1/16W J	1	
	R371	RK73HB1J123J	MG RESISTOR	12kΩ 1/16W J	1	
	R372	RK73GB2A103J	MG RESISTOR	10kΩ 1/10W J	1	
	R390	RK73EB2E472J	MG RESISTOR	4.7kΩ 1/4W J	1	
	R400	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R410	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R411	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R412	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R413	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R414	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R471	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K1,K0
	R472	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	K1,K0
	R473	RK73GB2A472J	MG RESISTOR	4.7kΩ 1/10W J	1	K1,K0
	R474	RK73FB2B221J	MG RESISTOR	220Ω 1/8W J	1	K1,K0
	R475	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K1,K0
	R476	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K1,K0
	R477	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K1,K0
	R480	RK73HB1J334J	MG RESISTOR	330kΩ 1/16W J	1	K0
	R481	RK73EB2E3R3J	MG RESISTOR	3.3Ω 1/4W J	1	K0
	R482	RK73EB2E3R3J	MG RESISTOR	3.3Ω 1/4W J	1	K0
	R483	RK73HB1J104J	MG RESISTOR	100kΩ 1/16W J	1	K0
	R484	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0
	R485	RK73HB1J153J	MG RESISTOR	15kΩ 1/16W J	1	K0
	R486	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0
	R487	RK73HB1J223J	MG RESISTOR	22kΩ 1/16W J	1	K0
	R488	RK73GB2A104J	MG RESISTOR	100kΩ 1/10W J	1	K0
	R489	RK73HB1J333J	MG RESISTOR	33kΩ 1/16W J	1	K0
	R490	RK73HB1J183J	MG RESISTOR	18kΩ 1/16W J	1	K0
	R491	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	K0
	R492	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	K0
	R493	RK73EB2E101J	MG RESISTOR	100Ω 1/4W J	1	K0
	R494	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	K0
	R495	RK73EB2E100J	MG RESISTOR	10Ω 1/4W J	1	K0
	R496	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	K0
	R497	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	K0
	R541	RK73HB1J512J	MG RESISTOR	5.1kΩ 1/16W J	1	
	R542	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R543	RK73HB1J200J	MG RESISTOR	20Ω 1/16W J	1	
	R544	RK73HB1J393J	MG RESISTOR	39kΩ 1/16W J	1	
	R545	RK73HH1J183D	MG RESISTOR	18kΩ 1/16W D	1	
	R546	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R548	RK73HH1J683D	MG RESISTOR	68kΩ 1/16W D	1	
	R601	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R602	RK73GB2A820J	MG RESISTOR	82Ω 1/10W J	1	
	R603	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R604	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R605	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	
	R611	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R682	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R683	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R684	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R685	RK73HB1J392J	MG RESISTOR	3.9kΩ 1/16W J	1	
	R688	RK73GB2A332J	MG RESISTOR	3.3kΩ 1/10W J	1	
	R690	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R691	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R702	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R703	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT303	A1	KMM-BT303	M1	KMM-BT318	K2	KMM-BT318U	K1
KMR-M318BT	K0						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R704	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R705	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R709	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R710	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R711	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R712	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	
	R713	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R714	RK73HB1J274J	MG RESISTOR	270kΩ 1/16W J	1	
	R718	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R720	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	K0
	R726	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R730	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R739	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R740	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R742	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R743	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R746	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R755	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R756	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R768	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	A1,M1
	R769	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	A1,M1
	R769	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	K2,K1,K0
	R770	RK73GB2A273J	MG RESISTOR	27kΩ 1/10W J	1	K2
	R770	RK73GB2A333J	MG RESISTOR	33kΩ 1/10W J	1	K0
	R771	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	A1,M1,K1
	R771	RK73GB2A223J	MG RESISTOR	22kΩ 1/10W J	1	K2
	R771	RK73GB2A153J	MG RESISTOR	15kΩ 1/10W J	1	K0
	R772	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R777	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R778	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R781	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R782	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R783	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R785	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R788	RK73HH1J823D	MG RESISTOR	82kΩ 1/16W D	1	
	R789	RK73HH1J393D	MG RESISTOR	39kΩ 1/16W D	1	
	R790	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R792	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	
	R796	RK73HH1J302D	MG RESISTOR	3kΩ 1/16W D	1	
	R797	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R798	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R799	RK73HB1J105J	MG RESISTOR	1MΩ 1/16W J	1	
	R800	RK73HB1J152J	MG RESISTOR	1.5kΩ 1/16W J	1	
	R801	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R802	RK73GB2A473J	MG RESISTOR	47kΩ 1/10W J	1	K0
	R803	RK73HB1J225J	MG RESISTOR	2.2MΩ 1/16W J	1	A1,M1,K2,K1
	R805	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R806	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R808	RK73HB1J680J	MG RESISTOR	68Ω 1/16W J	1	
	R809	RK73GB2A102J	MG RESISTOR	1kΩ 1/10W J	1	
	R820	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R823	RK73HB1J470J	MG RESISTOR	47Ω 1/16W J	1	
	R824	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R827	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R828	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R829	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R830	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R831	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R878	RK73HB1J103J	MG RESISTOR	10kΩ 1/16W J	1	
	R880	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R881	RK73HH1J243D	MG RESISTOR	24kΩ 1/16W D	1	
	R882	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	
	R889	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R890	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R891	RK73HH1J123D	MG RESISTOR	12kΩ 1/16W D	1	
	R893	RK73GB2A222J	MG RESISTOR	2.2kΩ 1/10W J	1	
	R905	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R980	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R981	RK73EB2E682J	MG RESISTOR	6.8kΩ 1/4W J	1	
	R982	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R984	RK73EB2E473J	MG RESISTOR	47kΩ 1/4W J	1	
	R1050	RK73GB2A100J	MG RESISTOR	10Ω 1/10W J	1	
	R1070	RK73HB1J102J	MG RESISTOR	1kΩ 1/16W J	1	
	R1073	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R1300	RK73HB1J562J	MG RESISTOR	5.6kΩ 1/16W J	1	
	R1302	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A1,M1,K2
	R1303	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	A1,M1,K2
	R1909	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1910	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1911	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1912	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1913	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1914	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1915	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1916	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1917	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1918	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1919	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1920	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1921	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT303	A1	KMM-BT303	M1	KMM-BT318	K2	KMM-BT318U	K1
KMR-M318BT	K0						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R1922	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1923	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1924	RK73HB1J330J	MG RESISTOR	33Ω 1/16W J	1	
	R1925	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R2000	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2001	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2002	RK73HB1J151J	MG RESISTOR	150Ω 1/16W J	1	K1,K0
	R2003	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2004	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2005	RK73EB2E2R2J	MG RESISTOR	2.2Ω 1/4W J	1	
	R2006	RK73HB1J473J	MG RESISTOR	47kΩ 1/16W J	1	
	R2008	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2009	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	A1,M1,K2,K0
	R2010	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R2011	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2012	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2013	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R2016	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2017	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2018	RK73HB1J101J	MG RESISTOR	100Ω 1/16W J	1	
	R2019	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2020	RK73GB2A000J	MG RESISTOR	0Ω 1/10W J	1	
	R2021	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2023	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	R2024	RK73GH2A100D	MG RESISTOR	10Ω 1/10W D	1	
	R2025	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K1,K0
	R2026	RK73HB1J4R7J	MG RESISTOR	4.7Ω 1/16W J	1	K1,K0
	R2027	RK73HB1J100J	MG RESISTOR	10Ω 1/16W J	1	K1,K0
	R2028	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	R2033	RK73HB1J472J	MG RESISTOR	4.7kΩ 1/16W J	1	
	R2034	RK73HB1J222J	MG RESISTOR	2.2kΩ 1/16W J	1	
	R2052	RK73HB1J182J	MG RESISTOR	1.8kΩ 1/16W J	1	A1,M1,K0
	R2052	RK73HB1J112J	MG RESISTOR	1.1kΩ 1/16W J	1	K2,K1
	R2070	RK73HB1J332J	MG RESISTOR	3.3kΩ 1/16W J	1	
	R2157	RK73HB1J820J	MG RESISTOR	82Ω 1/16W J	1	
	L411	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L540	NQLH65M-4R7X	INDUCTOR	4.7uH M	1	
	L541	NQLL6EM-100X	INDUCTOR	10uH M	1	
	L600	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L601	LK73G0BE4R7K	M.CHIP INDUCTOR		1	
	L602	LK73G0BER47K	M.CHIP INDUCTOR		1	
	L603	NQLM93K-R10X	INDUCTOR	0.1uH K	1	
	L604	LK73G0BE1R0K	M.CHIP INDUCTOR		1	
	L605	LK73G0BER22K	M.CHIP INDUCTOR		1	
	L606	LK73G0BER12K	M.CHIP INDUCTOR		1	
	L607	LK73G0BER15K	M.CHIP INDUCTOR		1	
	L701	LR73Z0AD4R7M	CHIP INDUCTOR	4.7uH	1	
	L706	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	L707	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	L811	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	L821	LB73G0BK-006	CHIP FERRITE		1	
	L822	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	L824	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	L825	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	L826	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	L827	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	L828	RK73HB1J220J	MG RESISTOR	22Ω 1/16W J	1	
	L829	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	
	L830	LB73G0BK-006	CHIP FERRITE		1	
	L831	LB73H0AY-004	CHIP FERRITE		1	
	L990	L3D-0043-00	CHOKE COIL		1	
	L2002	LK73G0AF27NJ	M.CHIP INDUCTOR	27nH	1	
	L2003	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0
	L2004	RK73HB1J000J	MG RESISTOR	0Ω 1/16W J	1	K0
	L2005	LR73Z0AD100M	CHIP INDUCTOR	10uH	1	
	L2006	RK73HH1J470D	MG RESISTOR	47Ω 1/16W D	1	
	L2007	L7K-0056-00	LC FILTER		1	
	A1302	W0C-0167-00	CIRCUIT MODULE		1	A1,M1,K2
	A1302	W0C-0168-10	CIRCUIT MODULE		1	K1,K0
	CN220	QGA2001C1-02	W TO B CONNE	W-B (1-2)	1	K1,K0
	CN481	QGA2001C1-06	W TO B CONNE	W-B (1-6)	1	K0
	CN701	QGZ2006J1-20	DETACHABLE CONN	(1-20)	1	
	CN990	E5J-0139-00	R.RECEPTACLE		1	
⚠	F1	F53-0513-08	PATTERN FUSE	4A	1	
⚠	F540	FZA10BH-2R5	FUSE (CC)		1	
	J220	E1B-0013-00	3.5D PHONE JACK		1	A1,M1,K2
	J321	QNN0868-001	PIN JACK		1	A1,M1
	J321	QNN0866-001	PIN JACK		1	K2,K1,K0
	J470	QNZ0907-001	CIR CONNECTOR		1	K1,K0
	J600	QNB0356-001	ANT TERMINAL		1	
	S830	S7A-0025-00	TACTILE PUSH SW		1	
	VA480	NAF0029-002X	ESD SUPPRESSOR		1	K0
	VA600	NAF0024-001X	ESD SUPPRESSOR		1	
	VA703	F0K-0010-00	SURGE ABSORBER		1	
	VA705	F0K-0010-00	SURGE ABSORBER		1	
	VA2001	F0K-0010-00	SURGE ABSORBER		1	
	VA2005	F0K-0010-00	SURGE ABSORBER		1	
	VA2006	F0K-0010-00	SURGE ABSORBER		1	
	VA2007	F0K-0010-00	SURGE ABSORBER		1	
	X600	L7J-0014-00	QUARTZ CRYSTAL		1	
	X701	L7J-0092-00	QUARTZ CRYSTAL		1	
	X702	L7J-0123-00	QUARTZ CRYSTAL		1	

MODEL	MARK	MODEL	MARK	MODEL	MARK	MODEL	MARK
KMM-BT303	A1	KMM-BT303	M1	KMM-BT318	K2	KMM-BT318U	K1
KMR-M318BT	K0						

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
SWITCH PWB ASSY (XJ6-051K-0x) <XJ6>						
	IC1	BU97550KV-M	MOS IC		1	
	IC3	NJM431SF	ANALOG IC		1	
	IC90	SIRD630B6T	IR DETECT UNIT		1	A1,M1,K2,K1
	Q50	LSCR523EBFS8	TRANSISTOR		1	
	Q51	LSCR523EBFS8	TRANSISTOR		1	
	Q52	LSCR523EBFS8	TRANSISTOR		1	
	Q53	LSCR523EBFS8	TRANSISTOR		1	
	Q54	LSCR523EBFS8	TRANSISTOR		1	
	Q55	LSCR523EBFS8	TRANSISTOR		1	
	Q57	LSCR523EBFS8	TRANSISTOR		1	
	Q58	LSCR523EBFS8	TRANSISTOR		1	
	Q90	KRA302E-P	DIGI TRANSISTOR		1	A1,M1,K2,K1
	Q91	KRC402E-P	DIGI TRANSISTOR		1	A1,M1,K2,K1
	D2	SM5818PL	SCHOTTKY DIODE		1	
	D3	SM5818PL	SCHOTTKY DIODE		1	
	D12	SML-D12V8WT	LED		1	
	D13	SML-D12V8WT	LED		1	
	D20	SML-D12V8WT	LED		1	
	D21	NESM026DT-W	LED		1	
	D22	NESM026DT-W	LED		1	
	D23	NESM026DT-W	LED		1	
	D25	NESM026DT-W	LED		1	
	D49	LRTBGFTG/Z1Z1X	LED		1	
	D80	DZ2J051M	ZENER DIODE		1	
	D81	DZ2J051M	ZENER DIODE		1	
	C1	CK73GXR1C105K	C CAPACITOR	1uF 16V K	1	
	C5	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	
	C6	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C7	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C60	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C61	CK73GBB1H102K	C CAPACITOR	1000pF 50V K	1	
	C80	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C81	CC73GCH1H270J	C CAPACITOR	27pF 50V J	1	
	C82	CK73EXR1C106K	C CAPACITOR	10uF 16V K	1	
	C83	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C84	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C85	CK73GBB1H471K	C CAPACITOR	470pF 50V K	1	
	C86	CK73GBB1H472K	C CAPACITOR	4700pF 50V K	1	
	C91	CK73GXR1A105K	C CAPACITOR	1uF 10V K	1	A1,M1,K2,K1
	R1	RK73GH2A473D	MG RESISTOR	47kΩ 1/10W D	1	
	R2	RK73GH2A433D	MG RESISTOR	43kΩ 1/10W D	1	
	R3	RK73GB2A471J	MG RESISTOR	470Ω 1/10W J	1	
	R4	RK73GB2A101J	MG RESISTOR	100Ω 1/10W J	1	
	R6	RK73EB2E910J	MG RESISTOR	91Ω 1/4W J	1	
	R7	RK73FB2B000J	MG RESISTOR	0Ω 1/8W J	1	
	R10	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	
	R12	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	
	R13	RK73GB2A152J	MG RESISTOR	1.5kΩ 1/10W J	1	
	R14	RK73GB2A124J	MG RESISTOR	120kΩ 1/10W J	1	
	R21	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R22	RK73FB2B681J	MG RESISTOR	680Ω 1/8W J	1	
	R23	RK73FB2B681J	MG RESISTOR	680Ω 1/8W J	1	
	R25	RK73FB2B102J	MG RESISTOR	1kΩ 1/8W J	1	
	R26	RK73FB2B681J	MG RESISTOR	680Ω 1/8W J	1	
	R27	RK73FB2B681J	MG RESISTOR	680Ω 1/8W J	1	
	R29	RK73FB2B132J	MG RESISTOR	1.3kΩ 1/8W J	1	
	R30	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R31	RK73FB2B911J	MG RESISTOR	910Ω 1/8W J	1	
	R33	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	
	R34	RK73EB2E391J	MG RESISTOR	390Ω 1/4W J	1	
	R35	RK73EB2E471J	MG RESISTOR	470Ω 1/4W J	1	
	R37	RK73FB2B821J	MG RESISTOR	820Ω 1/8W J	1	
	R38	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	
	R39	RK73FB2B561J	MG RESISTOR	560Ω 1/8W J	1	
	R57	RK73GB2A682J	MG RESISTOR	6.8kΩ 1/10W J	1	
	R60	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R61	RK73FB2B101J	MG RESISTOR	100Ω 1/8W J	1	
	R62	RK73FB2B4R7J	MG RESISTOR	4.7Ω 1/8W J	1	
	R80	RK73EB2E221J	MG RESISTOR	220Ω 1/4W J	1	
	RA1	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA2	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA3	RK74GB1J101J	NET RESISTOR	100Ω 1/16W J	1	
	RA50	RK74GB1J682J	NET RESISTOR	6.8kΩ 1/16W J	1	
	RA53	RK74GB1J682J	NET RESISTOR	6.8kΩ 1/16W J	1	
	CN1	QGZ2006K1-20X	DETACHABLE CONN	(1-20)	1	
	FL80	L7K-0030-00	FILTER		1	
	J60	QNS0320-001	3.5 JACK		1	
	J80	E5J-0069-00	USB TERMINAL		1	
	S20	T9K-0007-00	ROTARY ENCODER		1	