

KENWOOD

PARTS LIST



CD RECEIVER

KDC-BT952HD

KDC-X996

EXPLODED VIEW (UNIT)

Block No.200

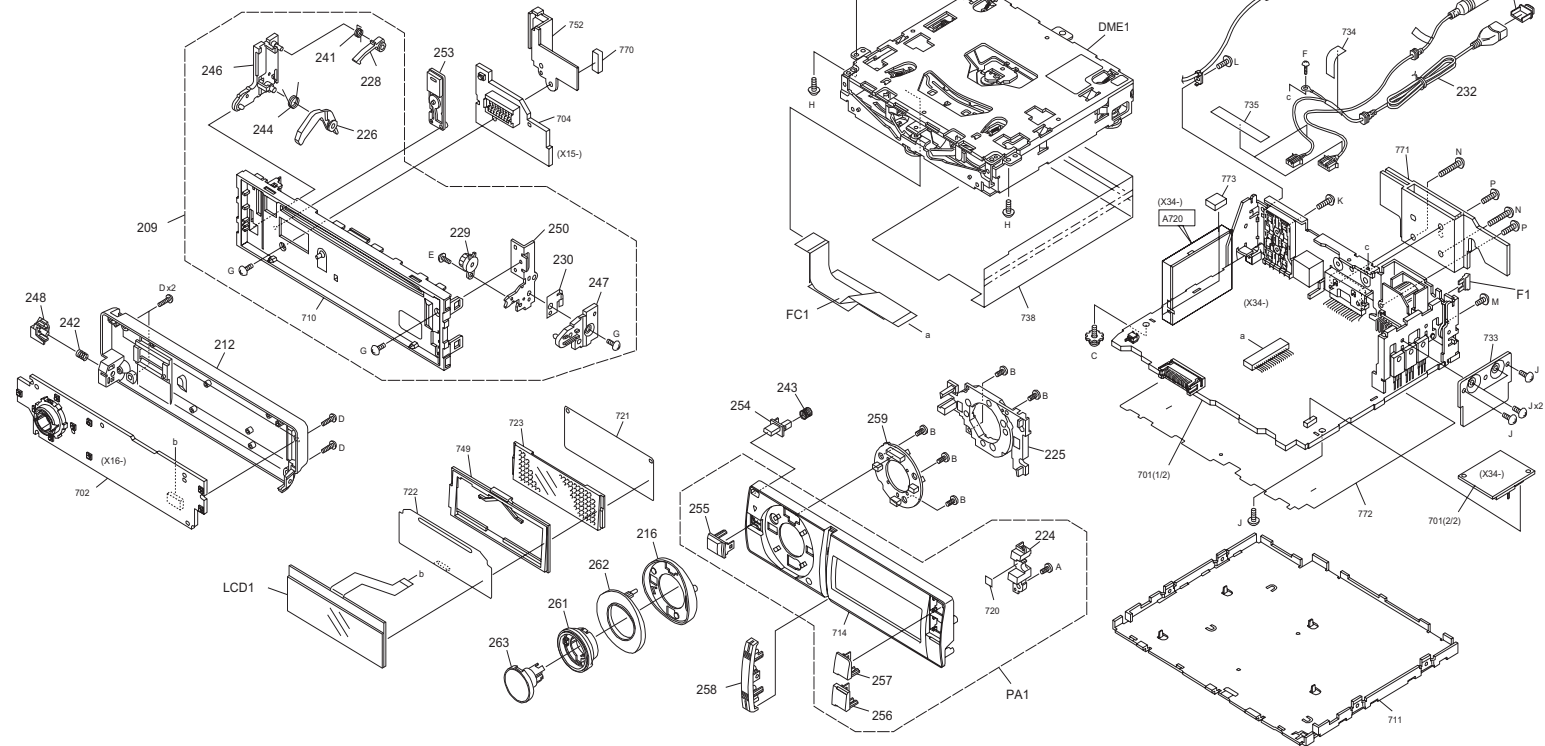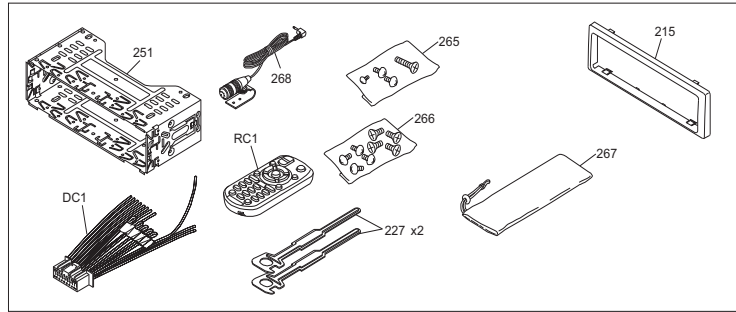

Parts with the exploded numbers larger than 700 are not supplied.


MODEL	MARK	MODEL	MARK
KDC-BT952HD	K1	KDC-X996	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (UNIT) <200>						
△	DC1	E30-6939-05	DC CORD		1	
	DME1	X92-6370-04	MECHANISM ASSY	DXM-9B24W	1	
△	F1	F52-0023-05	FUSE	32V 10A	1	
	FC1	E39-1260-05	FLAT CABLE		1	
	LCD1	B38-1224-05	LCD		1	
	PA1	A64-5362-01	PANEL ASSY		1	K1
	PA1	A64-5361-01	PANEL ASSY		1	K0
	RC1	A70-2104-05	REMOTE CONTROLLER RC-405 ASSY		1	
	A	N80-2005-48	PAN HEAD TAPTITE SCREW	2x5	1	
	B	N09-6492-05	TAPTITE SCREW		5	
	C	N09-6758-05	TAPTITE SCREW		1	
	D	N80-2008-43	PAN HEAD TAPTITE SCREW	2x8	4	
	E	N84-2005-43	PAN HEAD TAPTITE SCREW	REAR COVER 2x5	1	
	F	N84-2005-48	PAN HEAD TAPTITE SCREW	USB CABLE 2x5	1	
	G	N84-2606-43	PAN HEAD TAPTITE SCREW	2.6x6	3	
	H	N86-2604-43	BINDING HEAD TAPTITE SCREW	2.6x4	2	
	J	N86-2606-48	BINDING HEAD TAPTITE SCREW	2.6x6	8	
	K	N80-3008-48	PAN HEAD TAPTITE SCREW	3x8	1	
	L	N83-3005-48	PAN HEAD TAPTITE SCREW	3x5 B	1	
	M	N86-2604-43	BINDING HEAD TAPTITE SCREW	2.6x4	1	
	N	N83-3016-48	PAN HEAD TAPTITE SCREW	3x16 B	2	
	P	N83-3008-48	PAN HEAD TAPTITE SCREW		2	
	209	A22-3322-12	SUB PANEL ASSY		1	
	212	A46-1905-01	REAR COVER		1	
	215	B07-3304-03	ESCUTCHEON		1	K1
	215	B07-3235-03	ESCUTCHEON (POLISH)		1	K0
	216	B07-3338-03	ESCUTCHEON (NEMU)		1	
	224	B19-2562-03	LIGHTING BOARD (R)		1	
	225	B19-2563-02	LIGHTING BOARD (L)		1	
	226	D10-4731-13	LEVER (PUSH)		1	
	227	D10-7106-04	LEVER		2	
	228	D10-7144-13	LEVER (LOCK)		1	
	229	D39-0255-05	DAMPER		1	
	230	E29-2136-04	LEAD PLATE		1	
	231	E30-6907-05	CORD WITH CONNECTOR	MIC CORD	1	
	232	E30-8267-05	CORD WITH CONNECTOR	USB	1	
	236	F09-2929-04	CAP (USB)		1	
	241	G01-3171-04	TORSION COIL SPRING		1	
	242	G01-3173-04	COMPRESSION SPRING (REAR COVER)		1	
	243	G01-3203-04	COMPRESSION SPRING		1	
	244	G01-4807-04	TORSION COIL SPRING		1	
	246	J19-5203-13	HOLDER (LEFT)		1	
	247	J19-5204-13	HOLDER (RIGHT)		1	
	248	J19-5205-03	HOLDER (REAR COVER)		1	
	250	J21-9977-03	MOUNTING HARDWARE (DUMPER BASE)		1	
	251	J22-0789-03	MOUNTING HARDWARE ASSY		1	
	253	K24-4995-03	PUSH KNOB (EJECT)		1	
	254	K24-5062-04	PUSH KNOB (RELEASE)		1	
	255	K24-5068-03	PUSH KNOB (SRC)		1	
	256	K24-5124-03	PUSH KNOB (FAV)		1	K1
	256	K24-5123-03	PUSH KNOB (FAV)		1	K0
	257	K24-5180-03	PUSH KNOB (SEARCH MODE)		1	K1
	257	K24-5179-03	PUSH KNOB (SEARCH MODE)		1	K0
	258	K25-1988-03	PUSH KNOB (SPEED SEARCH)		1	
	259	K28-0403-13	KNOB BASE (MENU)		1	
	261	K28-0407-14	KNOB ASSY (VOL)		1	
	262	K28-0418-03	KEY TOP (MENU)		1	
	263	K28-0422-14	KNOB ASSY (KENWOOD)		1	
	265	N99-1730-35	SCREW SET (DISPLAY)		1	
	266	N99-1757-15	SCREW SET		1	
	267	W01-1710-05	CARRYING CASE		1	K1
	267	W01-1664-05	CARRYING CASE (EXCELON)		1	K0
	268	W01-1768-15	MICROPHONE	SENSITIVITY 42dB	1	
-	-	B59-2088-00	SUB-INSTRUCTION MANUAL	ENG FRE SPA	1	
-	-	H54-5154-03	ITEM CARTON CASE		1	K1
-	-	H54-5153-03	ITEM CARTON CASE		1	K0

EXPLODED VIEW (CD MECHANISM:DXM-9B24W)

Block No.130

DXM-9B24W

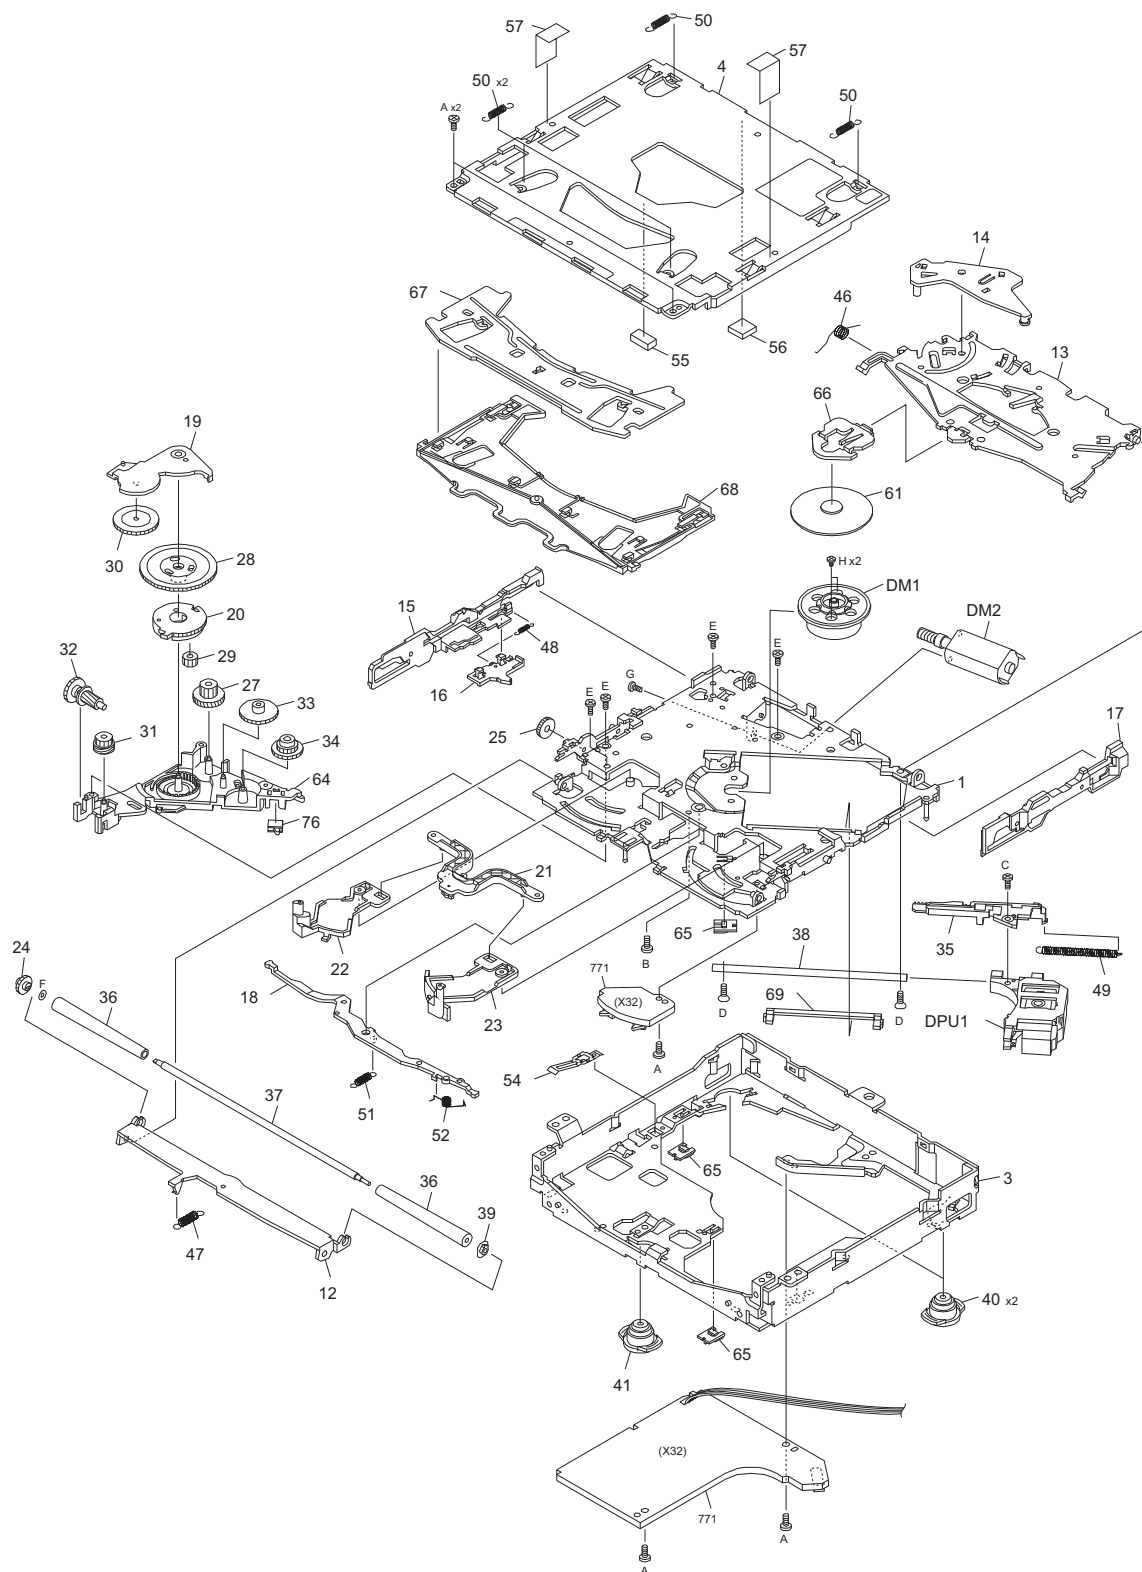

Parts with the exploded numbers larger than 700 are not supplied.

No.WA021

created date:2012-03-29

MODEL	MARK	MODEL	MARK
KDC-BT952HD	K1	KDC-X996	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
EXPLODED VIEW (CD MECHANISM:DXM-9B24W) <130>						
	DM1	X94-2090-00	SPINDLE MOTOR ASSY		1	
	DM2	X94-2100-00	FEED MOTOR ASSY	LOAD/SLED	1	
	DPU1	X93-2280-00	OPTICAL PICKUP ASSY		1	
	A	N09-6108-15	TAPTITE SCREW	M2x3.5 TYPE3	5	
	B	N09-6426-15	LOAD ARM SCREW		1	
	C	N09-6735-05	PICK SCREW		1	
	D	N09-6737-15	SHAFT SCREW		2	
	E	N09-6738-15	GEAR SCREW		4	
	F	N19-2335-14	ROLLER WASHER		1	
	G	N35-2003-48	BINDING HEAD	M2x3	1	
			MACHINE SCREW			
	H	N39-1720-48	PAN HEAD MACHINE SCREW	M1.7x2.0	2	
	1	A10-5450-73	MD CHASSIS ASSY		1	
	3	A10-5574-01	OUTER CHASSIS T2		1	
	4	A10-5453-32	TOP CHASSIS		1	
	12	D10-4993-62	ROLLER LEVER		1	
	13	D10-4991-22	CLAMP ARM		1	
	14	D10-4992-23	TRIGGER ARM		1	
	15	D10-4994-02	SLIDER L		1	
	16	D10-4995-03	TRIGGER SLIDER		1	
	17	D10-4996-02	SLIDER R		1	
	18	D10-4997-03	JOINT LEVER		1	
	19	D10-4998-03	LOADING ARM		1	
	20	D10-4999-03	CARRIER ARM		1	
	21	D10-7001-03	JOINT ARM		1	
	22	D10-7002-03	DISC ARM L		1	
	23	D10-7003-03	DISC ARM R		1	
	24	D13-2445-04	ROLLER GEAR		1	
	25	D13-2446-04	LOAD GEAR 2		1	
	27	D13-2448-04	HELICAL GEAR 1		1	
	28	D13-2449-04	SUN GEAR		1	
	29	D13-2450-04	PLANET GEAR		1	
	30	D13-2451-04	LOAD GEAR 1		1	
	31	D13-2452-04	WORM 2		1	
	32	D13-2453-04	HELICAL GEAR 2		1	
	33	D13-2454-04	PICK GEAR 1		1	
	34	D13-2455-04	PICK GEAR 2		1	
	35	D13-2456-03	RACK GEAR		1	
	36	D14-1028-04	ROLLER		2	
	37	D21-2507-04	ROLLER SHAFT		1	
	38	D21-2508-04	PICK UP SHAFT		1	
	39	D23-0963-04	ROLLER RETAINER		1	
	40	D39-0277-15	REAR DAMPER		2	
	41	D39-0278-15	FRONT DAMPER		1	
	46	G01-4682-34	CLAMP SPRING		1	
	47	G01-4756-04	ROLLER SPRING		1	
	48	G01-4684-04	TRIGGER SPRING		1	
	49	G01-4685-04	PICK UP SPRING		1	
	50	G01-4686-14	FLOATING SP F		4	
	51	G01-4688-14	JOINT ARM SPRING		1	
	52	G01-4692-24	LOAD SPRING		1	
	54	G02-1588-04	HOLE SPRING V		1	
	55	G13-1297-04	CLAMPER CUSSION		1	
	56	G13-1299-14	STROKE CUSHION		1	
	57	G16-1715-04	OUTER SHEET		2	
	61	J11-0675-03	CLAMPER		1	
	64	J19-7210-21	GEAR HOLDER		1	
	65	J19-7225-04	WIRE HOLDER		3	
	66	J22-0706-03	CLAMPER HOLDER		1	
	67	J22-0707-12	GUIDE BKT		1	
	68	J90-1166-11	DISC GUIDE		1	
	69	J90-1168-03	SUB RAIL HOLDER		1	
	76	S68-0921-05	PUSH SWITCH		1	
ELECTRIC UNIT (X34-7200-1x) <X34>						
	IC40	R1114N331B-TR	ANALOGUE IC		1	
	IC70	MP2560DN-C413	ANALOGUE IC		1	
	IC90	BD33KA5WFP-E2	ANALOGUE IC		1	
	IC95	BH18MA3WHFV	ANALOGUE IC		1	
	IC105	BU33TD3WG	ANALOGUE IC		1	
	IC165	BD2065AFJ	MOS-IC		1	
	IC220	TC7SET125FU-F	MOS-IC		1	
	IC250	E-TDA7850A	ANALOGUE IC		1	
	IC251	74HCT2G08DP	MOS-IC		1	
	IC270	E-TDA7716N	ANALOGUE IC		1	
	IC300	XC6209B502P1	ANALOGUE IC		1	
	IC310	AK7601VQ	MOS-IC		1	
	IC350	BA4560RFV	ANALOGUE IC		1	
	IC400	W10-0739-08	INTEGRATED CIRCUIT(MCU)		1	
	IC402	BR24T256FVT-W	ROM IC		1	
	IC403	TC7WH02FU-X	INTEGRATED CIRCUIT(MOS-IC)		1	
	IC404	XC6119N28AN-G	MOS-IC		1	
	IC600	TC7SET08FU-F	MOS-IC		1	
	IC601	TC7SH17FU-F	MOS-IC		1	
	IC700	W10-0742-08	MOS-IC		1	
	IC750	BU33TD3WG	ANALOGUE IC		1	
	IC755	BD12KA5WFP	ANALOGUE IC		1	
	IC760	NJM2886DL305B	ANALOGUE IC		1	

MODEL	MARK	MODEL	MARK
KDC-BT952HD	K1	KDC-X996	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	IC771	BD33KA5WFP-E2	ANALOGUE IC		1	
	IC780	MFI341S2162	MICROPROCESSOR IC		1	
	Q20	LSAR523UBFS8	TRANSISTOR		1	
	Q21	LSAR523UBFS8	TRANSISTOR		1	
	Q22	LSAR523UBFS8	TRANSISTOR		1	
	Q23	LSCR523UBFS8	TRANSISTOR		1	
	Q24	KTA1046-P	TRANSISTOR		1	
	Q25	LTC043ZUBFS8	TRANSISTOR		1	
	Q31	LTC043ZUBFS8	TRANSISTOR		1	
	Q32	LSCR523UBFS8	TRANSISTOR		1	
	Q33	KTA1046-P	TRANSISTOR		1	
	Q40	LTA014YUBFS8	TRANSISTOR		1	
	Q50	LSCR523UBFS8	TRANSISTOR		1	
	Q51	LSCR523UBFS8	TRANSISTOR		1	
	Q52	KTA1046-P	TRANSISTOR		1	
	Q53	LTA024EUBFS8	TRANSISTOR		1	
	Q54	LSCR523UBFS8	TRANSISTOR		1	
	Q55	LSCR523UBFS8	TRANSISTOR		1	
	Q56	LTC014EUBFS8	TRANSISTOR		1	
	Q60	LSCR523UBFS8	TRANSISTOR		1	
	Q61	2SAR533D	TRANSISTOR		1	
	Q62	LTA024EUBFS8	TRANSISTOR		1	
	Q63	LTC043ZUBFS8	TRANSISTOR		1	
	Q70	LTC043ZUBFS8	TRANSISTOR		1	
	Q71	LTC043ZUBFS8	TRANSISTOR		1	
	Q110	LSAR523UBFS8	TRANSISTOR		1	
	Q111	LSAR523UBFS8	TRANSISTOR		1	
	Q112	LSAR523UBFS8	TRANSISTOR		1	
	Q113	LSCR523UBFS8	TRANSISTOR		1	
	Q114	2SB1198K	TRANSISTOR		1	
	Q115	LTC043ZUBFS8	TRANSISTOR		1	
	Q120	LSCR523UBFS8	TRANSISTOR		1	
	Q121	LSCR523UBFS8	TRANSISTOR		1	
	Q122	LSCR523UBFS8	TRANSISTOR		1	
	Q140	LTC014YUBFS8	TRANSISTOR		1	
	Q141	LTA014EUBFS8	TRANSISTOR		1	
	Q142	LSAR523UBFS8	TRANSISTOR		1	
	Q143	2SB1188(Q.R)	TRANSISTOR		1	
	Q144	2SB1188(Q.R)	TRANSISTOR		1	
	Q145	LTC014YUBFS8	TRANSISTOR		1	
	Q160	LTC044EUBFS8	TRANSISTOR		1	
	Q350	LSCR523UBFS8	TRANSISTOR		1	
	Q351	LSCR523UBFS8	TRANSISTOR		1	
	Q650	LTC043TUBFS8	TRANSISTOR		1	
	Q651	LTA014YUBFS8	TRANSISTOR		1	
	Q652	LTC043TUBFS8	TRANSISTOR		1	
	Q660	LTC043TUBFS8	TRANSISTOR		1	
	Q661	LTC043TUBFS8	TRANSISTOR		1	
	Q670	LTC043TUBFS8	TRANSISTOR		1	
	Q671	LTA014YUBFS8	TRANSISTOR		1	
	Q672	LTC043TUBFS8	TRANSISTOR		1	
	Q800	LTA014YUBFS8	TRANSISTOR		1	
	Q801	LTC043ZUBFS8	TRANSISTOR		1	
	D3	S2V60-5009F46	DIODE		1	
	D20	RKS801KF	DIODE		1	
	D21	RKZ5.1KG(B2)	Z DIODE		1	
	D30	RKZ5.6KG(B2)	Z DIODE		1	
	D31	GS1J-LTP-X	DIODE		1	
	D50	RKZ8.2KG(B2)	Z DIODE		1	
	D60	RKS801KF	DIODE		1	
	D61	RKZ10KG(B2)	Z DIODE		1	
	D70	RB050L-60	DIODE		1	
	D110	1SS355	DIODE		1	
	D111	1SS355	DIODE		1	
	D112	RKZ5.1KG(B2)	Z DIODE		1	
	D120	UDZW6.8(B)	Z DIODE		1	
	D121	UDZW6.8(B)	Z DIODE		1	
	D122	UDZW6.2(B)	Z DIODE		1	
	D140	1SS355	DIODE		1	
	D141	GS1J-LTP-X	DIODE		1	
	D142	GS1J-LTP-X	DIODE		1	
	D143	GS1J-LTP-X	DIODE		1	
	D144	GS1J-LTP-X	DIODE		1	
	D160	MC2846-T111	DIODE		1	
	D165	VR105C3R3BAA	VARISTOR		1	
	D166	VR105C3R3BAA	VARISTOR		1	
	D250	MC2846-T111	DIODE		1	
	D251	RKS801KF	DIODE		1	
	D270	MC2846-T111	DIODE		1	
	D271	MC2846-T111	DIODE		1	
	D272	MC2846-T111	DIODE		1	
	D400	RB521S-30	DIODE		1	
	D600	UDZW6.2(B)	Z DIODE		1	
	D601	UDZW6.2(B)	Z DIODE		1	
	D602	UDZW6.2(B)	Z DIODE		1	
	D603	RKZ6.8KG(B2)	Z DIODE		1	
	D604	RKZ6.2KG(B2)	Z DIODE		1	
	D605	RKZ6.8KG(B2)	Z DIODE		1	
	D620	RKZ6.8KG(B2)	Z DIODE		1	
	D621	RKZ6.2KG(B2)	Z DIODE		1	
	D622	RKZ6.8KG(B2)	Z DIODE		1	
	D650	MC2846-T111	DIODE		1	
	D670	MC2846-T111	DIODE		1	

MODEL	MARK	MODEL	MARK
KDC-BT952HD	K1	KDC-X996	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	D720	IMSA-6802-E	SURGE ABSORBER		1	
	D800	RKZ5.6KG(B2)	Z DIODE		1	
	D801	RKZ5.6KG(B2)	Z DIODE		1	
	D802	RKZ5.6KG(B2)	Z DIODE		1	
	D804	RKZ6.2KG(B2)	Z DIODE		1	
	D805	RKZ5.6KG(B2)	Z DIODE		1	
	D806	RKZ5.6KG(B2)	Z DIODE		1	
	C1	C90-6784-05	ELECTRO	3900uF 16WV	1	
	C2	CC73GCH1H102J	CHIP C	1000pF J	1	
	C3	CC73GCH1H102J	CHIP C	1000pF J	1	
	C4	CC73GCH1H102J	CHIP C	1000pF J	1	
	C5	CC73GCH1H102J	CHIP C	1000pF J	1	
	C6	CC73GCH1H102J	CHIP C	1000pF J	1	
	C7	CC73GCH1H102J	CHIP C	1000pF J	1	
	C8	CC73GCH1H102J	CHIP C	1000pF J	1	
	C9	CC73GCH1H102J	CHIP C	1000pF J	1	
	C20	CD04BR1C221M	ELECTRO	220uF 16WV	1	
	C21	CC73HCH1H221J	CHIP C	50V 220pF J	1	
	C22	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C23	CK73GB1H102K	CHIP C	50V 1000pF K	1	
	C30	CD04AJ1C101M	ELECTRO	100uF 16WV	1	
	C31	CK73FB0J106K	CHIP C	6.3V 10uF K	1	
	C32	C90-6851-05	ELECTRO	220uF 25WV	1	
	C40	CK73GB1H103K	CHIP C	50V 0.010uF K	1	
	C41	CD04BM0J470M	ELECTRO	47uF 6.3WV	1	
	C42	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C43	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C44	CC73GCH1H020C	CHIP C	50V 2.0pF C	1	
	C50	CD04BM1A220M	ELECTRO	22uF 10WV	1	
	C51	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C52	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C60	CD04BM1C220M	ELECTRO	22uF 16WV	1	
	C61	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C73	CK73FB0J226M	CHIP C	22uF M	1	
	C74	CK73HB1A104K	CHIP C	10V 0.10uF K	1	
	C75	CC73GCH1H681J	CHIP C	50V 680pF J	1	
	C76	CC73HCH1H151J	CHIP C	50V 150pF J	1	
	C78	CK73EB1H475K	CHIP C	50V 4.7uF K	1	
	C79	CK73EB1H475K	CHIP C	50V 4.7uF K	1	
	C90	CK73GB0J225K	CHIP C	6.3V 2.2uF K	1	
	C91	CK73HB0J105K	CHIP C	6.3V 1.0uF K	1	
	C93	CC73HCH1H020C	CHIP C	50V 2.0pF C	1	
	C95	CK73GB0J225K	CHIP C	6.3V 2.2uF K	1	
	C96	CK73HB1E103K	CHIP C	25V 0.010uF K	1	
	C97	CK73HB0J105K	CHIP C	6.3V 1.0uF K	1	
	C105	CK73GB1A474K	CHIP C	10V 0.47uF K	1	
	C106	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C110	CD04BM1C220M	ELECTRO	22uF 16WV	1	
	C111	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C112	CC73HCH1H220J	CHIP C	50V 22pF J	1	
	C113	CC73HCH1H471J	CHIP C	50V 470pF J	1	
	C121	CK73GB1H472K	CHIP C	50V 4700pF K	1	
	C122	CK73GB1H103K	CHIP C	50V 0.010uF K	1	
	C140	CK73GB1H104K	CHIP C	50V 0.10uF K	1	
	C141	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C142	CK73FB1A335K	CHIP C	10V 3.3uF K	1	
	C161	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C162	CK73GB1H223K	CHIP C	50V 0.022uF K	1	
	C163	CK73GB1H104K	CHIP C	50V 0.10uF K	1	
	C166	CD04BR1C221M	ELECTRO	220uF 16WV	1	
	C167	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C190	CD04AS1V100M	ELECTRO	10uF 35WV	1	
	C191	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C192	CK73GB1H102K	CHIP C	50V 1000pF K	1	
	C193	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C194	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C195	C90-6989-05	ELECTRO	330uF 6.3WV	1	
	C220	CC73HCH1H020C	CHIP C	50V 2.0pF C	1	
	C250	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C252	CE32CL1E330M	CHIP EL	33uF 25WV	1	
	C253	C90-6768-05	ELECTRO	0.22uF 16WV	1	
	C254	CK73EB1H225K	CHIP C	50V 2.2uF K	1	
	C256	C90-6768-05	ELECTRO	0.22uF 16WV	1	
	C259	C90-6768-05	ELECTRO	0.22uF 16WV	1	
	C261	CK73EB1H225K	CHIP C	50V 2.2uF K	1	
	C262	C90-6768-05	ELECTRO	0.22uF 16WV	1	
	C265	C90-6765-05	ELECTRO	1uF 16WV	1	
	C266	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C270	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C271	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C272	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C273	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C274	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C275	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C276	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C277	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C282	CK73HB1E103K	CHIP C	25V 0.010uF K	1	
	C283	CK73GB1H103K	CHIP C	50V 0.010uF K	1	
	C284	CD04BM1H2R2M	ELECTRO	2.2uF 50WV	1	
	C286	CK73GB1A474K	CHIP C	10V 0.47uF K	1	
	C287	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C288	CK73GB1A474K	CHIP C	10V 0.47uF K	1	

MODEL		MARK		MODEL		MARK	
KDC-BT952HD		K1		KDC-X996		K0	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local	
	C289	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C292	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C293	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C294	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C295	CD04BR1V470M	ELECTRO	47uF 35WV	1		
	C296	CD04BM1H2R2M	ELECTRO	2.2uF 50WV	1		
	C297	CD04BM1H2R2M	ELECTRO	2.2uF 50WV	1		
	C298	CK73GB1H103K	CHIP C	50V 0.010uF K	1		
	C300	CD04BM0J470M	ELECTRO	47uF 6.3WV	1		
	C301	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C302	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C303	CC73HCH1H020C	CHIP C	50V 2.0pF C	1		
	C310	CC73HCH1H100D	CHIP C	50V 10pF D	1		
	C311	CC73HCH1H100D	CHIP C	50V 10pF D	1		
	C312	CD04BM0J470M	ELECTRO	47uF 6.3WV	1		
	C313	CK73HB1E103K	CHIP C	25V 0.010uF K	1		
	C314	CK73GB0J225K	CHIP C	6.3V 2.2uF K	1		
	C315	CK73HB1E103K	CHIP C	25V 0.010uF K	1		
	C316	CK73HB1E103K	CHIP C	25V 0.010uF K	1		
	C318	CK73GB0J225K	CHIP C	6.3V 2.2uF K	1		
	C319	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C320	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C321	CK73GB1H103K	CHIP C	50V 0.010uF K	1		
	C322	CK73GB1H103K	CHIP C	50V 0.010uF K	1		
	C323	CK73GB1H103K	CHIP C	50V 0.010uF K	1		
	C324	CK73GB1H103K	CHIP C	50V 0.010uF K	1		
	C325	CK73GB1H103K	CHIP C	50V 0.010uF K	1		
	C326	CK73GB1H103K	CHIP C	50V 0.010uF K	1		
	C350	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C351	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C353	CC73HCH1H470J	CHIP C	50V 47pF J	1		
	C354	CC73HCH1H470J	CHIP C	50V 47pF J	1		
	C355	CK73HB1A104K	CHIP C	10V 0.10uF K	1		
	C356	CC73HCH1H470J	CHIP C	50V 47pF J	1		
	C357	CC73HCH1H470J	CHIP C	50V 47pF J	1		
	C359	CD04AS0J101M	ELECTRO	100uF 6.3WV	1		
	C360	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C361	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C362	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C400	CC73HCH1H080D	CHIP C	50V 8.0pF D	1		
	C401	CC73HCH1H080D	CHIP C	50V 8.0pF D	1		
	C405	CC73HCH1H220J	CHIP C	50V 22pF J	1		
	C406	CC73HCH1H180J	CHIP C	50V 18pF J	1		
	C407	CK73HB0J105K	CHIP C	6.3V 1.0uF K	1		
	C408	CK73GB1C104K	CHIP C	16V 0.10uF K	1		
	C409	CK73HB1A104K	CHIP C	10V 0.10uF K	1		
	C410	CK73HB1A104K	CHIP C	10V 0.10uF K	1		
	C411	CK73HB1A104K	CHIP C	10V 0.10uF K	1		
	C412	CK73HB0J105K	CHIP C	6.3V 1.0uF K	1		
	C413	CK73HB1A104K	CHIP C	10V 0.10uF K	1		
	C414	CK73HB1A104K	CHIP C	10V 0.10uF K	1		
	C415	CK73HB1E103K	CHIP C	25V 0.010uF K	1		
	C416	CK73HB1A104K	CHIP C	10V 0.10uF K	1		
	C418	CK73HB1E103K	CHIP C	25V 0.010uF K	1		
	C419	CK73HB1E103K	CHIP C	25V 0.010uF K	1		
	C422	CK73HB1H102K	CHIP C	50V 1000pF K	1		
	C601	CK73HB1E103K	CHIP C	25V 0.010uF K	1		
	C602	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C603	CD04AS0J470M	ELECTRO	47uF 6.3WV	1		
	C604	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C605	CK73HB1E103K	CHIP C	25V 0.010uF K	1		
	C620	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C621	CD04AS0J470M	ELECTRO	47uF 6.3WV	1		
	C622	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C650	CD04AS1V100M	ELECTRO	10uF 35WV	1		
	C653	CD04AS1V100M	ELECTRO	10uF 35WV	1		
	C660	CD04AS1V100M	ELECTRO	10uF 35WV	1		
	C663	CD04AS1V100M	ELECTRO	10uF 35WV	1		
	C670	CD04AS1V100M	ELECTRO	10uF 35WV	1		
	C673	CD04AS1V100M	ELECTRO	10uF 35WV	1		
	C701	CK73HB0J105K	CHIP C	6.3V 1.0uF K	1		
	C702	CK73HB1E103K	CHIP C	25V 0.010uF K	1		
	C703	CC73HCH1H470J	CHIP C	50V 47pF J	1		
	C704	CC73HCH1H470J	CHIP C	50V 47pF J	1		
	C720	CK73GB1C104K	CHIP C	16V 0.10uF K	1		
	C721	CK73GB1C104K	CHIP C	16V 0.10uF K	1		
	C722	CK73GB1C104K	CHIP C	16V 0.10uF K	1		
	C724	CK73GB1C104K	CHIP C	16V 0.10uF K	1		
	C750	CK73GB0J225K	CHIP C	6.3V 2.2uF K	1		
	C751	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C752	CD04BR1C221M	ELECTRO	220uF 16WV	1		
	C754	CC73HCH1H020C	CHIP C	50V 2.0pF C	1		
	C755	CK73GB0J225K	CHIP C	6.3V 2.2uF K	1		
	C756	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C760	CK73GB0J475K	CHIP C	6.3V 4.7uF K	1		
	C761	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C776	CD04BR1C221M	ELECTRO	220uF 16WV	1		
	C777	CK73GB0J225K	CHIP C	6.3V 2.2uF K	1		
	C778	CK73GB1A105K	CHIP C	10V 1.0uF K	1		
	C780	CK73HB1A104K	CHIP C	10V 0.10uF K	1		
	C802	CC73GCH1H020C	CHIP C	50V 2.0pF C	1		
	R1	RK73EB2E471J	CHIP R	470Ω J 1/4W	1		

MODEL	MARK	MODEL	MARK
KDC-BT952HD	K1	KDC-X996	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R2	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1	
	R3	RK73EB2E103J	CHIP R	10kΩ J 1/4W	1	
	R21	RK73GH2A362D	CHIP R	3.6kΩ D 1/10W	1	
	R22	RK73GH2A562D	CHIP R	5.6kΩ D 1/10W	1	
	R23	RK73GB2A561J	CHIP R	560Ω J 1/10W	1	
	R24	RK73GB2A4R7J	CHIP R	4.7Ω J 1/10W	1	
	R25	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R26	RK73GB2A152J	CHIP R	1.5kΩ J 1/10W	1	
	R27	RK73GB2A432J	CHIP R	4.3kΩ J 1/10W	1	
	R28	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
	R30	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R31	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R32	RK73FB2B123J	CHIP R	12kΩ J 1/8W	1	
	R40	RK73GB2A300J	CHIP R	30Ω J 1/10W	1	
	R50	RS14KB3DR22J	FL-PROOF RS	0.22Ω J 2W	1	
	R51	RK73GB2A471J	CHIP R	470Ω J 1/10W	1	
	R52	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R53	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R54	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R55	RK73FB2B152J	CHIP R	1.5kΩ J 1/8W	1	
	R56	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R57	RK73GB2A333J	CHIP R	33Ω J 1/10W	1	
	R58	RK73GB2A683J	CHIP R	68kΩ J 1/10W	1	
	R60	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R61	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R62	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R63	RK73GB2A222J	CHIP R	2.2kΩ J 1/10W	1	
	R73	RK73GB2A150J	CHIP R	15Ω J 1/10W	1	
	R74	RK73GB2A100J	CHIP R	10Ω J 1/10W	1	
	R76	RK73GH2A913D	CHIP R	91kΩ D 1/10W	1	
	R77	RK73GH2A154D	CHIP R	150kΩ D 1/10W	1	
	R78	RK73GH2A334D	CHIP R	330kΩ D 1/10W	1	
	R79	RK73GB2A104J	CHIP R	100kΩ J 1/10W	1	
	R80	RK73GH2A220D	CHIP R	22Ω D 1/10W	1	
	R81	RK73GH2A243D	CHIP R	24kΩ D 1/10W	1	
	R82	RK73GH2A121D	CHIP R	120Ω D 1/10W	1	
	R83	RK73GH2A432D	CHIP R	4.3kΩ D 1/10W	1	
	R90	RK73HB1J300J	CHIP R	30Ω J 1/16W	1	
	R111	RK73GH2A332D	CHIP R	3.3kΩ D 1/10W	1	
	R112	RK73GH2A272D	CHIP R	2.7kΩ D 1/10W	1	
	R113	RK73GB2A561J	CHIP R	560Ω J 1/10W	1	
	R114	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R115	RK73GB2A471J	CHIP R	470Ω J 1/10W	1	
	R116	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
	R117	RK73GB2A432J	CHIP R	4.3kΩ J 1/10W	1	
	R118	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
	R120	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
	R121	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
	R122	RK73GB2A104J	CHIP R	100kΩ J 1/10W	1	
	R123	RK73FB2B203J	CHIP R	20kΩ J 1/8W	1	
	R124	RK73FB2B683J	CHIP R	68kΩ J 1/8W	1	
	R125	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R126	RK73GB2A183J	CHIP R	18kΩ J 1/10W	1	
	R127	RK73EB2E473J	CHIP R	47kΩ J 1/4W	1	
	R128	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1	
	R129	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1	
	R130	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1	
	R140	RK73PB2H561J	CHIP R	560Ω J 1/2W	1	
	R141	RK73PB2H561J	CHIP R	560Ω J 1/2W	1	
	R142	RK73GB2A223J	CHIP R	22kΩ J 1/10W	1	
	R143	RK73PB2H561J	CHIP R	560Ω J 1/2W	1	
	R144	RK73PB2H561J	CHIP R	560Ω J 1/2W	1	
	R145	RK73FB2B472J	CHIP R	4.7kΩ J 1/8W	1	
	R146	RK73GB2A471J	CHIP R	470Ω J 1/10W	1	
	R148	RK73PB2H221J	CHIP R	220Ω J 1/2W	1	
	R149	RK73PB2H221J	CHIP R	220Ω J 1/2W	1	
	R150	RK73FB2B472J	CHIP R	4.7kΩ J 1/8W	1	
	R160	RK73GB2A104J	CHIP R	100kΩ J 1/10W	1	
	R161	RK73GB2A123J	CHIP R	12kΩ J 1/10W	1	
	R162	RK73GB2A683J	CHIP R	68kΩ J 1/10W	1	
	R163	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
	R165	RK73GB2A220J	CHIP R	22Ω J 1/10W	1	
	R166	RK73GB2A220J	CHIP R	22Ω J 1/10W	1	
	R167	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
	R190	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
	R191	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R193	RK73GB2A471J	CHIP R	470Ω J 1/10W	1	
	R194	RK73GB2A222J	CHIP R	2.2kΩ J 1/10W	1	
	R195	RK73GB2A222J	CHIP R	2.2kΩ J 1/10W	1	
	R196	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
	R197	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
	R198	RK73EB2E101J	CHIP R	100Ω J 1/4W	1	
	R199	RK73EB2E101J	CHIP R	100Ω J 1/4W	1	
	R220	RK73HB1J300J	CHIP R	30Ω J 1/16W	1	
	R221	RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
	R250	RK73GB2A333J	CHIP R	33Ω J 1/10W	1	
	R253	RK73GB2A000J	CHIP R	0.0Ω J 1/10W	1	
	R260	RK73GB2A100JH	CHIP R	10Ω J 1/10W	1	
	R262	RK73GB2A272J	CHIP R	2.7kΩ J 1/10W	1	
	R263	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R264	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	
	R266	RK73HB1J363J	CHIP R	36kΩ J 1/16W	1	
	R272	RK73HB1J820J	CHIP R	82Ω J 1/16W	1	

MODEL	MARK	MODEL	MARK
KDC-BT952HD	K1	KDC-X996	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R273	RK73HB1J820J	CHIP R	82Ω J 1/16W	1	
	R274	RK73HB1J103J	CHIP R	10kΩ J 1/16W	1	
	R275	RK73HB1J472J	CHIP R	4.7kΩ J 1/16W	1	
	R300	RK73GB2A6R8J	CHIP R	6.8Ω J 1/10W	1	
	R302	RK73GB2A332J	CHIP R	3.3kΩ J 1/10W	1	
	R303	RK73HB1J300J	CHIP R	30Ω J 1/16W	1	
	R310	RK73GB2A150J	CHIP R	15Ω J 1/10W	1	
	R311	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R312	RK73GB2A101JH	CHIP R	100Ω J 1/10W	1	
	R313	RK73GB2A101JH	CHIP R	100Ω J 1/10W	1	
	R314	RK73GB2A101JH	CHIP R	100Ω J 1/10W	1	
	R315	RK73GB2A101JH	CHIP R	100Ω J 1/10W	1	
	R316	RK73GB2A101JH	CHIP R	100Ω J 1/10W	1	
	R317	RK73GB2A101JH	CHIP R	100Ω J 1/10W	1	
	R350	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R351	RK73HH1J223D	CHIP R	22kΩ D 1/16W	1	
	R352	RK73HH1J223D	CHIP R	22kΩ D 1/16W	1	
	R353	RK73HH1J223D	CHIP R	22kΩ D 1/16W	1	
	R354	RK73HH1J223D	CHIP R	22kΩ D 1/16W	1	
	R357	RK73GB2A2R2J	CHIP R	2.2Ω J 1/10W	1	
	R360	RK73HH1J223D	CHIP R	22kΩ D 1/16W	1	
	R361	RK73HH1J223D	CHIP R	22kΩ D 1/16W	1	
	R362	RK73HH1J223D	CHIP R	22kΩ D 1/16W	1	
	R363	RK73HH1J223D	CHIP R	22kΩ D 1/16W	1	
	R364	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R365	RK73GB2A222J	CHIP R	2.2kΩ J 1/10W	1	
	R366	RK73GB2A222J	CHIP R	2.2kΩ J 1/10W	1	
	R367	RK73HB1J332J	CHIP R	3.3kΩ J 1/16W	1	
	R368	RK73HB1J332J	CHIP R	3.3kΩ J 1/16W	1	
	R401	RK73GB2A153J	CHIP R	15kΩ J 1/10W	1	
	R402	RK73GB2A153J	CHIP R	15kΩ J 1/10W	1	
	R403	RK73HB1J104J	CHIP R	100kΩ J 1/16W	1	
	R404	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R405	RK73HB1J105J	CHIP R	1.0MΩ J 1/16W	1	
	R406	RK73GB2A220J	CHIP R	22Ω J 1/10W	1	
	R407	RK73GB2A220J	CHIP R	22Ω J 1/10W	1	
	R408	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R409	RK73HB1J104J	CHIP R	100kΩ J 1/16W	1	
	R410	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R411	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	K0
	R412	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	K1
	R412	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	K0
	R414	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	
	R419	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R420	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R421	RK73HB1J222J	CHIP R	2.2kΩ J 1/16W	1	
	R423	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R424	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R425	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R426	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R427	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	
	R428	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R429	RK73HB1J332J	CHIP R	3.3kΩ J 1/16W	1	
	R430	RK73HB1J332J	CHIP R	3.3kΩ J 1/16W	1	
	R431	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R432	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R433	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R434	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	
	R435	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R436	RK73HB1J104J	CHIP R	100kΩ J 1/16W	1	
	R437	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R438	RK73HB1J222J	CHIP R	2.2kΩ J 1/16W	1	
	R439	RK73HB1J222J	CHIP R	2.2kΩ J 1/16W	1	
	R440	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R441	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R442	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	
	R443	RK73HB1J222J	CHIP R	2.2kΩ J 1/16W	1	
	R444	RK73HB1J222J	CHIP R	2.2kΩ J 1/16W	1	
	R445	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R446	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R447	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R448	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R449	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R450	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R451	RK73HB1J222J	CHIP R	2.2kΩ J 1/16W	1	
	R452	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R453	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R454	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R455	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R456	RK73HB1J222J	CHIP R	2.2kΩ J 1/16W	1	
	R457	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R458	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R459	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	
	R460	RK73HB1J222J	CHIP R	2.2kΩ J 1/16W	1	
	R461	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	
	R462	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R463	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R464	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R465	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R466	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R467	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R470	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	

MODEL			MARK	MODEL	MARK	
KDC-BT952HD			K1	KDC-X996	K0	
Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R472	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R601	RK73EB2E101J	CHIP R	100Ω J 1/4W	1	
	R603	RK73EB2E470J	CHIP R	47Ω J 1/4W	1	
	R604	RK73EB2E101J	CHIP R	100Ω J 1/4W	1	
	R605	RK73HB1J473J	CHIP R	47kΩ J 1/16W	1	
	R606	RK73EB2E221J	CHIP R	220Ω J 1/4W	1	
	R607	RK73EB2E221J	CHIP R	220Ω J 1/4W	1	
	R608	RK73EB2E221J	CHIP R	220Ω J 1/4W	1	
	R609	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
	R610	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
	R620	RK73EB2E101J	CHIP R	100Ω J 1/4W	1	
	R621	RK73GB2A123J	CHIP R	12kΩ J 1/10W	1	
	R622	RK73EB2E470J	CHIP R	47Ω J 1/4W	1	
	R623	RK73GB2A123J	CHIP R	12kΩ J 1/10W	1	
	R624	RK73EB2E101J	CHIP R	100Ω J 1/4W	1	
	R625	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
	R650	RK73FB2B181J	CHIP R	180Ω J 1/8W	1	
	R651	RK73GB2A331J	CHIP R	330Ω J 1/10W	1	
	R652	RK73GB2A223J	CHIP R	22kΩ J 1/10W	1	
	R653	RK73GB2A223J	CHIP R	22kΩ J 1/10W	1	
	R654	RK73FB2B181J	CHIP R	180Ω J 1/8W	1	
	R655	RK73GB2A331J	CHIP R	330Ω J 1/10W	1	
	R660	RK73FB2B181J	CHIP R	180Ω J 1/8W	1	
	R661	RK73GB2A331J	CHIP R	330Ω J 1/10W	1	
	R662	RK73GB2A223J	CHIP R	22kΩ J 1/10W	1	
	R663	RK73GB2A223J	CHIP R	22kΩ J 1/10W	1	
	R664	RK73FB2B181J	CHIP R	180Ω J 1/8W	1	
	R665	RK73GB2A331J	CHIP R	330Ω J 1/10W	1	
	R670	RK73FB2B181J	CHIP R	180Ω J 1/8W	1	
	R671	RK73GB2A331J	CHIP R	330Ω J 1/10W	1	
	R672	RK73GB2A223J	CHIP R	22kΩ J 1/10W	1	
	R673	RK73GB2A223J	CHIP R	22kΩ J 1/10W	1	
	R674	RK73FB2B181J	CHIP R	180Ω J 1/8W	1	
	R675	RK73GB2A331J	CHIP R	330Ω J 1/10W	1	
	R700	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R701	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R702	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
	R705	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R707	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R708	RK73HB1J103J	CHIP R	10kΩ J 1/16W	1	
	R710	RK73HB1J222J	CHIP R	2.2kΩ J 1/16W	1	
	R712	RK73HB1J102J	CHIP R	1.0kΩ J 1/16W	1	
	R713	RK73HB1J221J	CHIP R	220Ω J 1/16W	1	
	R714	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R715	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R716	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R717	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R718	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R720	RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
	R721	RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
	R725	RK73GB2A332J	CHIP R	3.3kΩ J 1/10W	1	
	R726	RK73GB2A332J	CHIP R	3.3kΩ J 1/10W	1	
	R727	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R742	RK73GB2A000J	CHIP R	0.0Ω J 1/10W	1	
	R743	RK73GB2A000J	CHIP R	0.0Ω J 1/10W	1	
	R750	RK73HB1J300J	CHIP R	30Ω J 1/16W	1	
	R780	RK73HB1J332J	CHIP R	3.3kΩ J 1/16W	1	
	R781	RK73HB1J333J	CHIP R	33kΩ J 1/16W	1	
	R782	RK73HB1J332J	CHIP R	3.3kΩ J 1/16W	1	
	R783	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	
	R784	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R785	RK73HB1J101J	CHIP R	100Ω J 1/16W	1	
	R786	RK73HB1J223J	CHIP R	22kΩ J 1/16W	1	
	R800	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1	
	R801	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1	
	R802	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1	
	R803	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1	
	R804	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	R805	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
	R807	RK73GB2A300J	CHIP R	30Ω J 1/10W	1	
△	L1	L33-2365-05	CHOKE COIL ASSY		1	
	L40	L41-4792-34	SMALL FIXED INDUCTOR	4.7uH	1	
	L71	L33-2678-05	CHOKE COIL	22uH 12.0x12.0	1	
	L72	L92-0662-05	CHIP FERRITE		1	
	L73	L92-0655-05	CHIP FERRITE		1	
	L165	NQR0682-001X	CHOKE COIL		1	
	L720	L92-0609-05	CHIP FERRITE		1	
	L750	L41-1001-28	SMALL FIXED INDUCTOR	10uH	1	
	L773	L41-1001-28	SMALL FIXED INDUCTOR	10uH	1	
	A190	W02-5523-15	ELECTRIC CIRCUIT MODULE		1	
	A720	X86-4280-12	TUNER UNIT		1	
	CN165	E41-1701-05	PIN ASSY	04P SIDE PH	1	
	CN190	E41-3325-05	PIN ASSY	24R-JMCS-G-B-TF(NSA)	1	
	CN191	E41-1699-05	PIN ASSY	02P SIDE PH	1	
	CN220	E41-2186-05	FLAT CABLE CONNECTOR	30P	1	
	CN800	E40-9747-05	PIN ASSY		1	
	CP400	RK74HB1J101J	CHIP-COM	100Ω J 1/16W	1	
	CP401	RK74HB1J101J	CHIP-COM	100Ω J 1/16W	1	

MODEL	MARK	MODEL	MARK
KDC-BT952HD	K1	KDC-X996	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	CP402	RK74HB1J101J	CHIP-COM	100Ω J 1/16W	1	
	F20	F53-0280-05	FUSE	0.63A	1	
	F30	F53-0298-05	FUSE	0.25A	1	
	F60	F53-0298-05	FUSE	0.25A	1	
	F110	F53-0298-05	FUSE	0.25A	1	
△	J1	E58-0991-05	RECTANGULAR RECEPTACLE		1	
	J600	QNZ0907-001	CIR CONNECTOR		1	
	J620	E11-0625-05	PHONE JACK		1	
	J640	E63-0972-05	PIN JACK		1	
	S800	S74-0809-05	MICRO SWITCH		1	
	TH250	PRF18BE471QS2	POSITIVE RESISTOR		1	
	W720	E30-6438-05	CORD WITH PLUG		1	
	X310	L77-3874-05	CRYSTAL RESONATOR	22.5792MHz	1	
	X400	L77-3846-05	CRYSTAL RESONATOR	12MHz	1	
	X401	L77-2921-15	CRYSTAL RESONATOR	32.768KHz 12.5pF	1	

DISPLAY UNIT (X15-1220-10) <X15>

D1	B30-1779-05	LED		1
R1	RK73EB2E432J	CHIP R	1/4W 4.3kΩ J	1
R2	RK73EB2E000J	CHIP R	0.0Ω J 1/4W	1
R3	RK73EB2E432J	CHIP R	1/4W 4.3kΩ J	1
R4	RK73EB2E432J	CHIP R	1/4W 4.3kΩ J	1
R5	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1
R6	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1
R7	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1
R8	RK73EB2E102J	CHIP R	1/4W 1.0kΩ J	1
R9	RK73EB2E432J	CHIP R	1/4W 4.3kΩ J	1
R10	RK73EB2E432J	CHIP R	1/4W 4.3kΩ J	1
R11	RK73FB2B331J	CHIP R	1/8W 330Ω J	1
CN1	E41-2984-05	PIN ASSY		1
J1	E58-1008-05	RECTANGULAR RECEPTACLE		1
S1	S70-0901-05	TACT SWITCH		1
S2	S70-0948-05	TACT SWITCH		1

SWITCH UNIT (X16-7170-11) <X16>

IC1	W10-0747-08	MICROCONTROLLER IC		1
IC3	PIC95603	ANALOGUE IC		1
IC6	BU32TD3WG	ANALOGUE IC	3.2V 0.2A	1
Q1	LTC023JUBFS8	TRANSISTOR		1
Q3	LSCR523UBFS8	TRANSISTOR		1
Q4	LSCR523UBFS8	TRANSISTOR		1
Q5	LTC023JUBFS8	TRANSISTOR		1
Q6	LTC023JUBFS8	TRANSISTOR		1
Q7	LTC023JUBFS8	TRANSISTOR		1
Q8	LTC043ZUBFS8	TRANSISTOR		1
Q21	LTC023JUBFS8	TRANSISTOR		1
Q22	LTC023JUBFS8	TRANSISTOR		1
Q23	LTC023JUBFS8	TRANSISTOR		1
D1	B30-1566-05	LED	1608 RED	1
D3	NSSM065T-X	LED		1
D4	NSSM065T-X	LED		1
D5	NSSM065T-X	LED		1
D6	NSSM065T-X	LED		1
D21	B30-1784-05	LED	RGB SIDE	1
D22	B30-1784-05	LED	RGB SIDE	1
D23	RB521S-30	DIODE		1
C31	CK73GB1A105K	CHIP C	10V 1.0uF K	1
C59	CK73GB1H103K	CHIP C	50V 0.010uF K	1
C60	CK73GB1H104K	CHIP C	50V 0.10uF K	1
C61	CK73GB0J475K	CHIP C	6.3V 4.7uF K	1
C63	CK73GB0J475K	CHIP C	6.3V 4.7uF K	1
C65	CK73GB1A105K	CHIP C	10V 1.0uF K	1
C66	CK73GB1A105K	CHIP C	10V 1.0uF K	1
C110	CK73GB1H103K	CHIP C	50V 0.010uF K	1
C114	CK73GB1H103K	CHIP C	50V 0.010uF K	1
C160	CK73GB1H103K	CHIP C	50V 0.010uF K	1
C197	CK73GB1H103K	CHIP C	50V 0.010uF K	1
R1	RK73GB2A151J	CHIP R	150Ω J 1/10W	1
R2	RK73EB2E391J	CHIP R	390Ω J 1/4W	1
R3	RK73EB2E201J	CHIP R	200Ω J 1/4W	1
R4	RK73EB2E431J	CHIP R	430Ω J 1/4W	1
R5	RK73EB2E561J	CHIP R	560Ω J 1/4W	1
R6	RK73EB2E361J	CHIP R	360Ω J 1/4W	1
R7	RK73EB2E751J	CHIP R	750Ω J 1/4W	1
R8	RK73EB2E561J	CHIP R	560Ω J 1/4W	1
R9	RK73EB2E361J	CHIP R	360Ω J 1/4W	1
R10	RK73EB2E751J	CHIP R	750Ω J 1/4W	1
R11	RK73GB2A222J	CHIP R	2.2kΩ J 1/10W	1
R12	RK73GB2A222J	CHIP R	2.2kΩ J 1/10W	1
R13	RK73GB2A000J	CHIP R	0.0Ω J 1/10W	1
R14	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1
R15	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1
R21	RK73EB2E181J	CHIP R	180Ω J 1/4W	1
R22	RK73EB2E361J	CHIP R	360Ω J 1/4W	1
R23	RK73EB2E561J	CHIP R	560Ω J 1/4W	1
R31	RK73GB2A101J	CHIP R	100Ω J 1/10W	1
R32	RK73GB2A101J	CHIP R	100Ω J 1/10W	1
R56	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1
R60	RK73GB2A106J	CHIP R	10MΩ J 1/10W	1
R107	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1
R109	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1
R110	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1
R111	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1

MODEL	MARK	MODEL	MARK
KDC-BT952HD	K1	KDC-X996	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
	R113	RK73GB2A105J	CHIP R	1.0MΩ J 1/10W	1	
	R174	RK73GB2A473J	CHIP R	47kΩ J 1/10W	1	
	CN1	E41-3094-05	FLAT CABLE CONNECTOR	15PIN	1	
	CP51	RK74HB1J102J	CHIP-COM	1.0kΩ J 1/16W	1	
	CP101	RK74HB1J101J	CHIP-COM	100Ω J 1/16W	1	
	CP102	RK74HB1J473J	CHIP-COM	47kΩ J 1/16W	1	
	CP103	RK74HB1J332J	CHIP-COM	3.3kΩ J 1/16W	1	
	CP104	RK74HB1J331J	CHIP-COM	330Ω J 1/16W	1	
	CP105	RK74HB1J331J	CHIP-COM	330Ω J 1/16W	1	
	CP106	RK74HB1J332J	CHIP-COM	3.3kΩ J 1/16W	1	
	J1	E59-0850-05	RECTANGULAR PLUG	16P PLUG REFLOW-TYPE	1	
	S1	T99-0488-05	ROTARY ENCODER		1	
	S2	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	S3	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	S4	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	S5	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	S6	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	S7	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	S8	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	S9	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	S10	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	S11	S70-0960-05	TACT SWITCH	2.5MM/1.76N	1	
	X1	L78-1409-05	RESONATOR	8MHz	1	
CD PLAYER UNIT (X32-6250-02) IN CD MECHA <X32>						
	IC3	BD8222EFV	ANALOGUE IC		1	
	IC4	JCV8023	IC		1	
	IC5	XC6415S001P1	MOS-IC		1	
	Q1	2SA2188-T1(E)	TRANSISTOR		1	
	Q14	RUE003N02	FET		1	
	D2	DAP202U	DIODE		1	
	D3	DA204U	DIODE		1	
	D4	DA204U	DIODE		1	
	C1	CK73FB0J106K	CHIP C	6.3V 10uF K	1	
	C3	CC73GCH1H680J	CHIP C	50V 68pF J	1	
	C4	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C6	CK73FB1C105K	CHIP C	16V 1.0uF K	1	
	C8	CK73GB1H222K	CHIP C	50V 2200pF K	1	
	C9	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C10	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C11	CK73GB1H153K	CHIP C	50V 0.015uF K	1	
	C12	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C13	CK73GB1H332K	CHIP C	50V 3300pF K	1	
	C14	CK73GB1H103K	CHIP C	50V 0.010uF K	1	
	C15	CK73GB1C333K	CHIP C	16V 0.033uF K	1	
	C16	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C18	CK73GB1H153K	CHIP C	50V 0.015uF K	1	
	C19	CK73GB1H103K	CHIP C	50V 0.010uF K	1	
	C20	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C22	CK73GB1H103K	CHIP C	50V 0.010uF K	1	
	C23	CK73GB1H153K	CHIP C	50V 0.015uF K	1	
	C24	CC73GCH1H470J	CHIP C	50V 47pF J	1	
	C25	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C26	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C27	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C29	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C30	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C31	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C36	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C41	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C42	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C43	CK73GB1H102K	CHIP C	50V 1000pF K	1	
	C44	CK73GB1H102K	CHIP C	50V 1000pF K	1	
	C45	CK73GB1H103K	CHIP C	50V 0.010uF K	1	
	C46	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C47	CC73GCH1H560J	CHIP C	50V 56pF J	1	
	C48	CC73GCH1H101J	CHIP C	50V 100pF J	1	
	C49	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C50	CK73FB1A225K	CHIP C	10V 2.2uF K	1	
	C51	CK73FB0J106K	CHIP C	6.3V 10uF K	1	
	C54	CK73FB0J106K	CHIP C	6.3V 10uF K	1	
	C57	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C59	CK73GB1H472K	CHIP C	50V 4700pF K	1	
	C61	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	C101	CK73GB1A105K	CHIP C	10V 1.0uF K	1	
	C103	CK73GB1C104K	CHIP C	16V 0.10uF K	1	
	R1	RK73GB2A560J	CHIP R	56Ω J 1/10W	1	
	R2	RK73GB2A472J	CHIP R	4.7kΩ J 1/10W	1	
	R3	RK73GB2A4R7J	CHIP R	4.7Ω J 1/10W	1	
	R4	RK73GB2A104J	CHIP R	100kΩ J 1/10W	1	
	R5	RK73GB2A225J	CHIP R	2.2MΩ J 1/10W	1	
	R6	RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
	R7	RK73GB2A221J	CHIP R	220Ω J 1/10W	1	
	R8	RK73GB2A622J	CHIP R	6.2kΩ J 1/10W	1	
	R9	RK73GB2A913J	CHIP R	91kΩ J 1/10W	1	
	R10	RK73GB2A334J	CHIP R	330kΩ J 1/10W	1	
	R11	RK73GB2A153J	CHIP R	15kΩ J 1/10W	1	
	R13	RK73GB2A104J	CHIP R	100kΩ J 1/10W	1	
	R14	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
	R15	RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
	R17	RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	

MODEL	MARK	MODEL	MARK
KDC-BT952HD	K1	KDC-X996	K0

Safe	Symbol No.	Parts No.	Parts Name	Description	QTY	Local
R18		RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
R25		RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
R27		RK73EB2E4R7J	CHIP R	4.7Ω J 1/4W	1	
R39		RK73GB2A105J	CHIP R	1.0MΩ J 1/10W	1	
R40		RK73GB2A681J	CHIP R	680Ω J 1/10W	1	
R43		RK73GB2A4R7J	CHIP R	4.7Ω J 1/10W	1	
R44		RK73GB2A4R7J	CHIP R	4.7Ω J 1/10W	1	
R49		RK73GB2A393J	CHIP R	39kΩ J 1/10W	1	
R50		RK73GB2A363J	CHIP R	36kΩ J 1/10W	1	
R51		RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
R52		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R53		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R54		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R55		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R56		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R57		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R58		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R59		RK73GB2A204J	CHIP R	200kΩ J 1/10W	1	
R64		RK73GB2A223J	CHIP R	22kΩ J 1/10W	1	
R65		RK73GB2A333J	CHIP R	33Ω J 1/10W	1	
R69		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R70		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R71		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R72		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R73		RK73GB2A101J	CHIP R	100Ω J 1/10W	1	
R74		RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
R75		RK73GB2A103J	CHIP R	10kΩ J 1/10W	1	
R76		RK73GB2A202J	CHIP R	2.0kΩ J 1/10W	1	
R102		RK73GB2A102J	CHIP R	1.0kΩ J 1/10W	1	
CN1		E41-2954-05	FLAT CABLE CONNECTOR	15P/0.5MM/UP/LF/AU	1	
CN2		E41-2630-05	FLAT CABLE CONNECTOR	30P/1.00MM/UP/LF	1	
CP7		RK74GB1J103J	CHIP-COM	10kΩ J 1/16W	1	
S1		S68-0863-05	PUSH SWITCH		1	
S2		S68-0863-05	PUSH SWITCH		1	
X1		L78-1221-05	RESONATOR	16.93MHz	1	