


EXPLODED VIEW • PARTS LIST

Escutcheon section : PN-2432D/PN-2451D

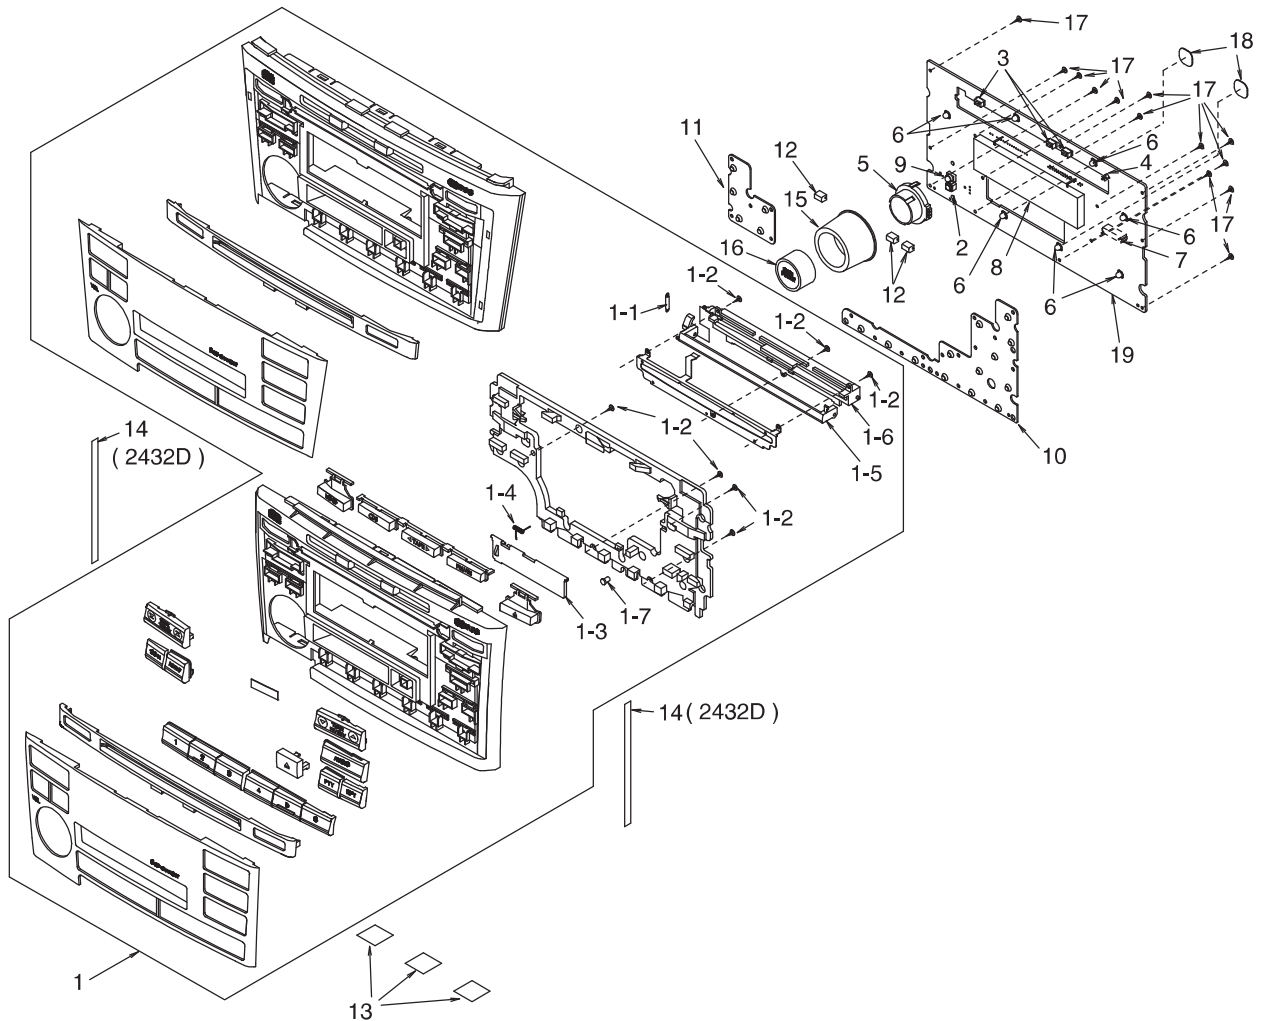


Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7953-05 940-7982-03 940-7982-13 940-7982-23	ESCUTCHEON ASSY(2432D-A) ESCUTCHEON ASSY(2451D-A) ESCUTCHEON ASSY(2451D-B) ESCUTCHEON ASSY(2451D-C)	1	6	017-0458-00	PILOT LAMP(14V40mA)	7
1-1	750-6708-00	SPRING	1	7	074-1279-16	OUTLET SOCKET	1
1-2	716-0872-00	PAD SCREW(M1.7×5 SILVER)	7	8	379-4038-24	INDICATOR	1
1-3	320-0588-17 320-0588-29 320-0588-30 320-0588-31	DUSTPROOF COVER(2432D-A) DUSTPROOF COVER(2451D-A) DUSTPROOF COVER(2451D-B) DUSTPROOF COVER(2451D-C)	1	9	017-0433-52	PILOT LAMP(14V40mA)	1
1-4	750-2626-00	SPRING	1	10	345-8660-00	RUBBER SWITCH(RH)	1
1-5	335-6768-00	DOOR	1	11	345-8661-00	RUBBER SWITCH(LH)	1
1-6	335-6769-00	DOOR BASE	1	12	345-8662-00	RUBBER SPACER	3
1-7	335-6598-00	PIN(2)	1	13	347-5961-02 347-5961-00	SILENCER(2432D) SILENCER(2451D)	3
2	013-6201-50	SWITCH	1	14	347-6396-00	INSULATOR(2432D)	2
3	013-6305-50	SWITCH	3	15	380-5528-00	KNOB	1
4	013-7411-50	DETECTOR SWITCH	1	16	382-6273-00	BUTTON(POWER)	1
5	013-8003-00	ROTALY SWITCH	1	17	716-0872-00	PAD SCREW(M1.7×5 SILVER)	13
				18	353-0359-00	SHADE	2
				19	039-2005-03	DISPLAY PWB (WITHOUT COMPONENT)	1


Main section : PN-2432D/PN-2451D

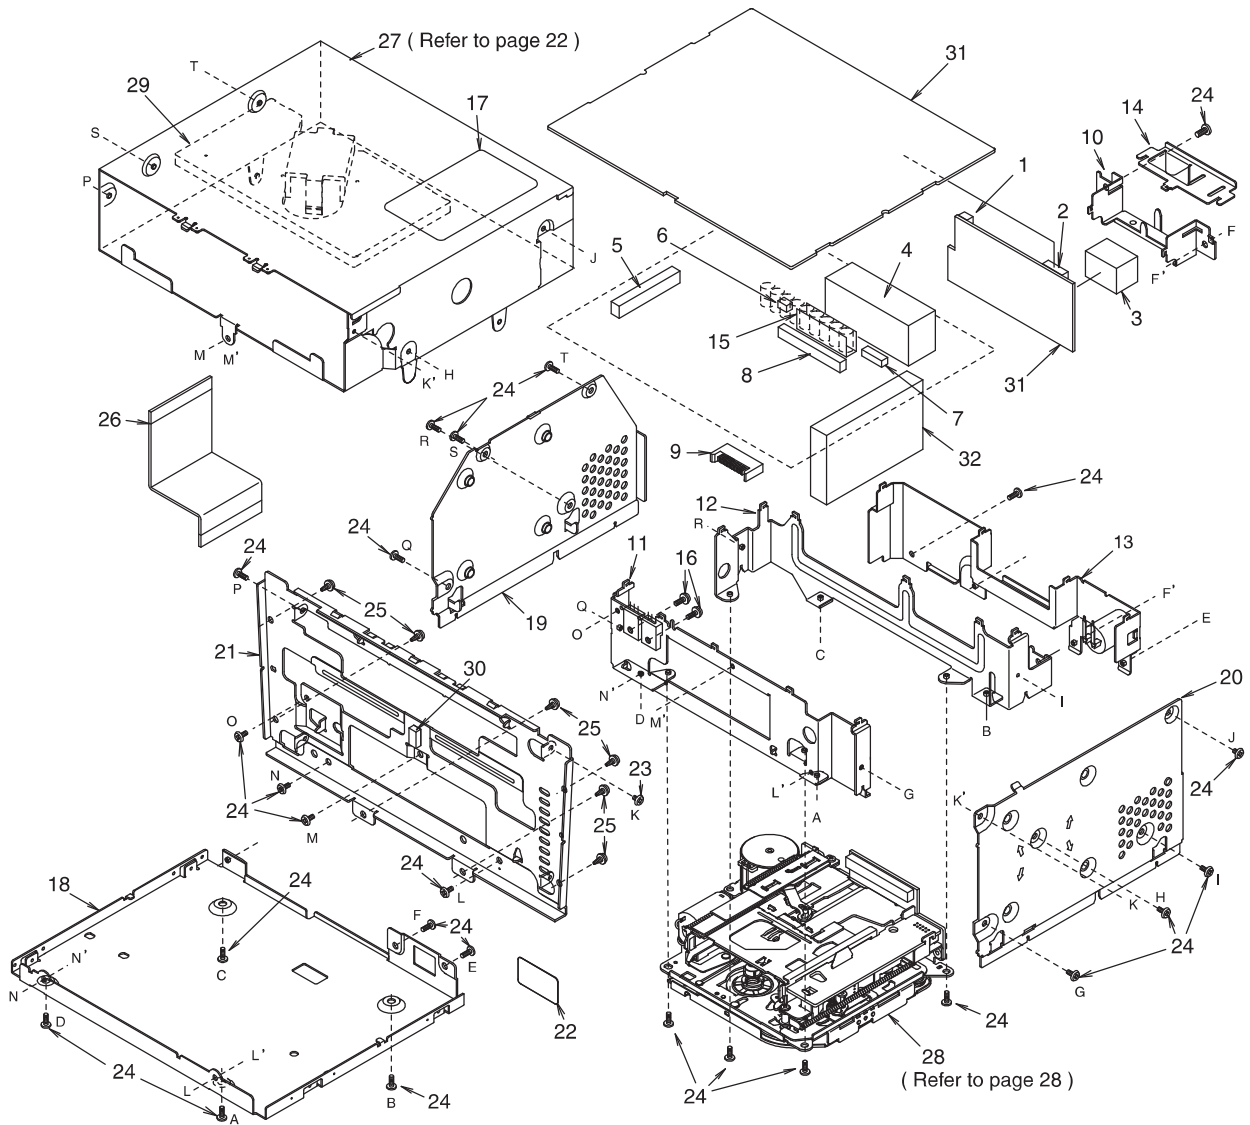

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.
Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	074-0898-06	OUTLET SOCKET	1	18	311-1834-00	LOWER CASE	1
2	074-0898-18	OUTLET SOCKET	1	19	331-3258-00	SIDE CASE(LH)	1
3	074-1087-12	OUTLET SOCKET	1	20	331-3259-00	SIDE CASE(RH)	1
4	074-1141-00	OUTLET SOCKET	1	21	331-3264-02	ESCUTCHEON PLATE	1
5	074-1192-22	OUTLET SOCKET	1	22	347-6623-00	SPACER	1
6	076-0368-06	PLUG	1	23	714-2004-81	MACHINE SCREW(M2×4)	1
7	076-0368-18	PLUG	1	24	714-2605-81	MACHINE SCREW(M2.6×5)	25
8	076-0509-20	PLUG	1	25	716-1553-00	P-TIGHT SCREW(φ3×8)	6
9	076-0648-16	PLUG	1	26	816-2563-00	FLAT WIRE	1
10	331-2025-10	CONNECTOR HOLDER	1	27	-----	CD CHANGER MODULE 019001-929	1
11	331-3236-00	MECH BRACKET(FRONT)	1	28	930-0794-80	TAPE MECHANISM	1
12	331-3237-00	MECH BRACKET(REAR)	1	29	335-6703-00	LOCK PIN	1
13	331-3239-20	REAR PLATE	1	30	345-4220-10	RUBBER PARTS	1
14	331-3257-10	CONNECTOR HOLDER	1	31	039-2003-02	MAIN PWB (WITHOUT COMPONENT)	1
15	347-6595-00	INSULATOR	1	32	880-1917F	TUNER PACK(FM/AM)	1
16	716-1494-00	IT SCREW (M2.6×6)	2				
17	286-8153-47 286-8153-51	SETPLATE(2432D) SETPLATE(2451D)	1				

Escutcheon / Main section : PN-2439N

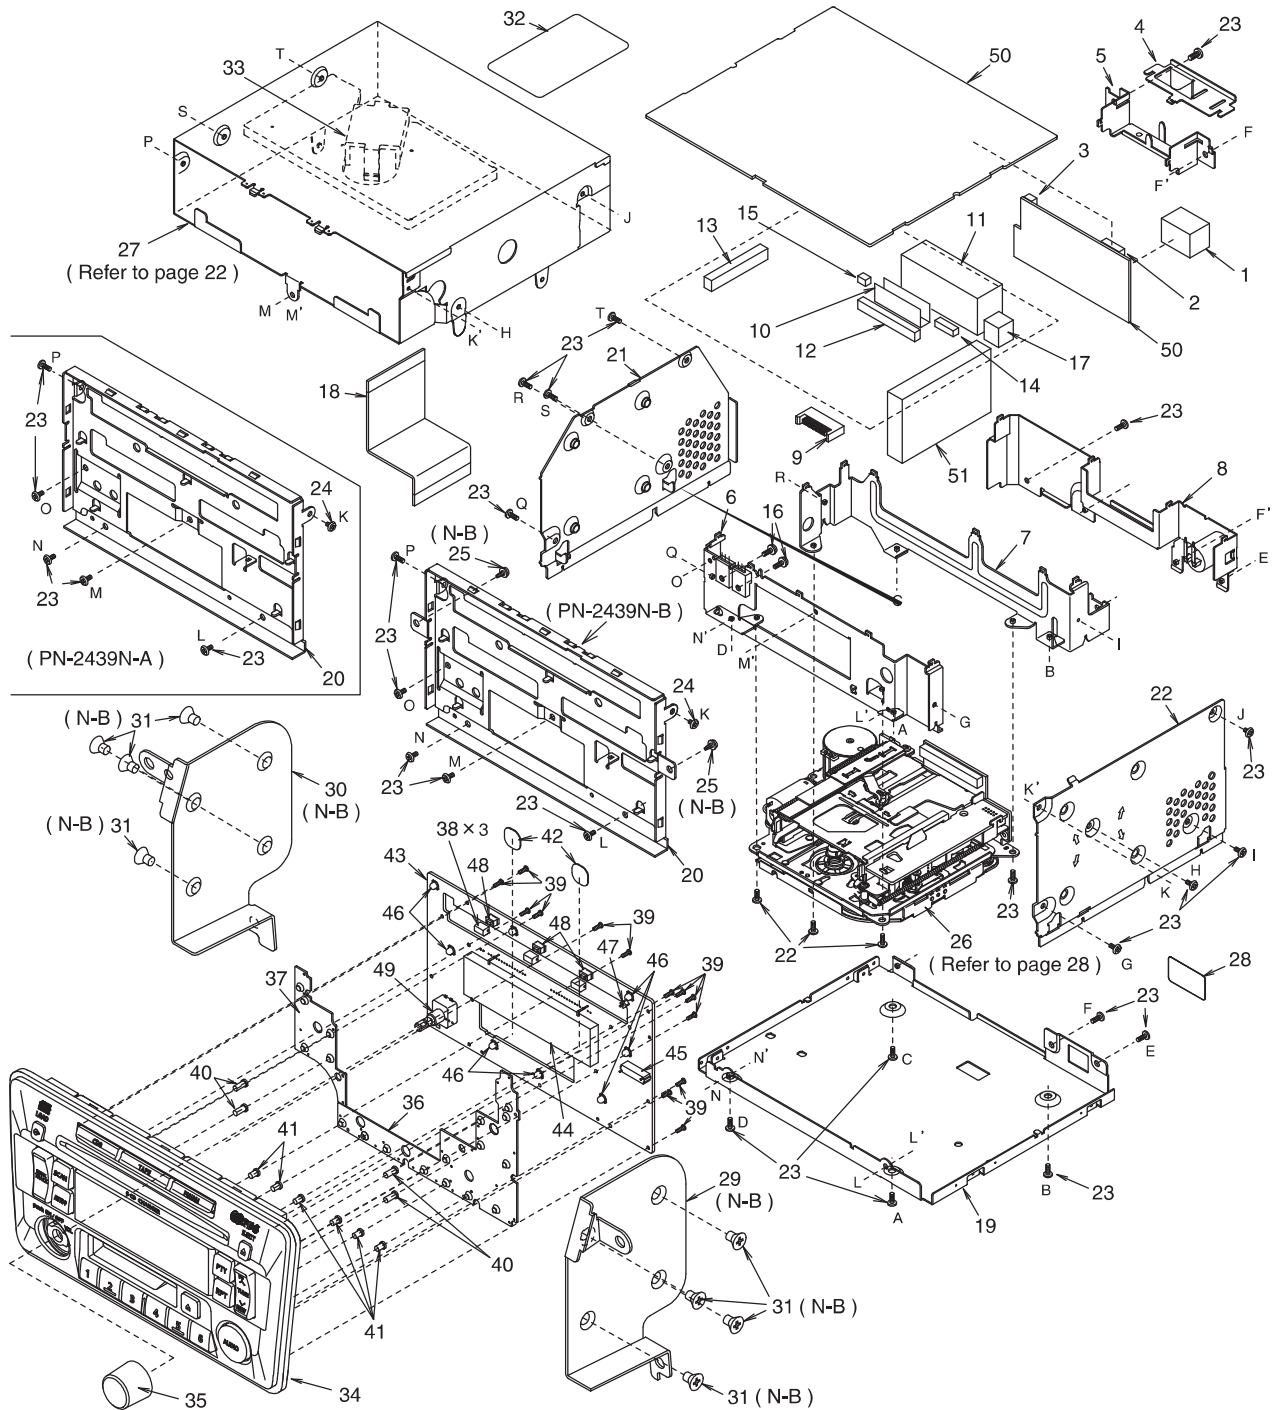

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.
Some parts depend on each model. The model name is specified in the description.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	074-1087-12	OUTLET SOCKET	1	8	331-3239-00	REAR PLATE	1
2	074-0898-18	OUTLET SOCKET	1	9	076-0648-16	PLUG	1
3	074-0898-06	OUTLET SOCKET	1	10	347-6595-00	INSULATOR	1
4	331-3257-10	CONNECTOR HOLDER	1	11	074-1141-00	OUTLET SOCKET	1
5	331-2025-10	CONNECTOR HOLDER	1	12	076-0509-20	PLUG	1
6	331-3236-00	MECH BRACKET(FRONT)	1	13	074-1192-22	OUTLET SOCKET	1
7	331-3237-00	MECH BRACKET(REAR)	1	14	076-0368-18	PLUG	1

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
15	076-0368-06	PLUG	1	33	335-6703-00	LOCK PIN	1
16	716-1494-00	IT SCREW (M2.6×6)	2	34	940-7951-03 940-7964-03	ESCUTCHEON ASSY(2439N-A) ESCUTCHEON ASSY(2439N-B)	1
17	076-0850-08	PLUG	1	35	380-5527-00	KNOB	1
18	816-2563-00	FLAT WIRE	1	36	345-8664-00	RUBBER SWITCH(RH)	1
19	311-1834-00	LOWER CASE	1	37	345-8665-00	RUBBER SWITCH(LH)	1
20	331-3265-00 331-3265-10	ES-PLATE(2439N-A) ES-PLATE(2439N-B)	1	38	345-8662-00	RUBBER SPACER	3
21	331-3258-00	SIDE CASE(LH)	1	39	716-0872-00	PAD SCREW(M1.7×5 SILVER)	13
22	331-3259-00	SIDE CASE(RH)	1	40	335-6597-00	PIN(1)(BLK)	4
23	714-2605-81	MACHINE SCREW(M2.6×5)	25	41	335-6598-00	PIN(2)(WHT)	6
24	714-2004-81	MACHINE SCREW(M2×4)	1	42	353-0359-00	SHADE	2
25	716-1553-00	P-TIGHT SCREW($\phi 3 \times 8$) (2439N-B)	2	43	039-2006-02	DISPLAY PWB (WITHOUT COMPONENT)	1
26	930-0794-80	TAPE MECHANISM	1	44	379-4038-24	INDICATOR	1
27	-----	CD CHANGER MODULE 019001-929	1	45	074-1279-16	OUTLET SOCKET	1
28	347-6623-00	SPACER	1	46	017-0458-00	PILOT LAMP(14V40mA)	8
29	300-7889-00	MTG-BRACKET(RH) (2439N-B)	1	47	013-7411-50	DETECTOR SWITCH	1
30	300-7890-00	MTG-BRACKET(LH) (2439N-B)	1	48	013-3812-01	SWITCH	3
31	714-5008-40	MACHINE SCREW(M5×8) (2439N-B)	8	49	016-0013-05	VR W/SHAFT	1
32	286-8153-49 286-8153-50	SETPLATE(2439N-A) SETPLATE(2439N-B)	1	50	039-2003-02	MAIN PWB (WITHOUT COMPONENT)	1
				51	880-1917D	TUNER PACK(FM/AM)	1

ELECTRICAL PARTS LIST

Note) Several different parts of the same reference number are alternative parts.

One of those parts is used in the set.

Main PWB section(B1)

Some parts depend on each model. The model name is specified in the description.

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
BL101	880-1917F	FM/AM TUNER (2432D/2451D)	C135	183-4763-39	16V47 μ F	C319	042-0592-58	16V10 μ F
BL101	880-1917D	FM/AM TUNER (2439N)	C136	043-0277-51	0.022 μ F	C320	042-0592-58	16V10 μ F
C101	166-1511-50	150pF CH (2432D/2451D)	C138	168-1022-55	1000pF	C321	042-0592-58	16V10 μ F
C101	119-0000-05	1/16W 0 Ω JW (2439N)	C140	183-4763-39	16V47 μ F	C322	042-0592-58	16V10 μ F
C102	166-2211-50	220pF CH	C141	168-2232-55	0.022 μ F	C323	178-1842-78	0.18 μ F
C103	166-2211-50	220pF CH	C142	166-1011-50	100pF CH	C324	178-1842-78	0.18 μ F
C104	168-1032-55	0.01 μ F	C143	166-1011-50	100pF CH	C325	178-1842-78	0.18 μ F
C105	168-6812-55	680pF	C144	166-1011-50	100pF CH	C326	178-1842-78	0.18 μ F
C106	168-4732-78	0.047 μ F	C145	166-1011-50	100pF CH	C327	168-8212-55	820pF
C107	168-3332-78	0.033 μ F	C146	166-1801-50	18pF CH	C328	168-8212-55	820pF
C108	183-1053-69	50V1 μ F	C147	168-3932-78	0.039 μ F	C329	168-8212-55	820pF
C109	168-3922-55	3900pF	C148	168-3932-78	0.039 μ F	C330	168-8212-55	820pF
C110	168-1032-55	0.01 μ F	C149	178-1242-78	0.12 μ F	C331	042-0592-58	16V10 μ F
C111	168-1022-55	1000pF (2432D/2451D)	C150	178-1242-78	0.12 μ F	C332	042-0592-58	16V10 μ F
C112	168-1032-55	0.01 μ F	C151	166-1801-50	18pF CH	C333	168-3332-78	0.033 μ F
C113	166-2201-50	22pF CH (2432D/2451D)	C152	168-4722-55	4700pF	C351	178-4742-78	0.47 μ F
C114	178-2242-78	0.22 μ F	C153	166-1201-50	12pF CH	C352	178-4742-78	0.47 μ F
C115	166-1007-50	10pF CH	C154	168-1032-55	0.01 μ F	C353	178-4742-78	0.47 μ F
C116	183-4763-19	6.3V47 μ F	C155	166-2201-50	22pF CH	C354	178-4742-78	0.47 μ F
C117	168-5612-55	560pF	C156	166-2201-50	22pF CH	C401	168-1042-78	16V0.1 μ F
C119	166-4701-50	47pF CH	C158	168-1042-78	16V0.1 μ F	C402	168-1042-78	16V0.1 μ F
C120	183-2253-69	50V2.2 μ F	C201	168-2222-55	2200pF (2439N)	C403	168-1042-78	16V0.1 μ F
C121	183-1073-29	10V100 μ F	C203	168-2222-55	2200pF (2439N)	C404	168-1042-78	16V0.1 μ F
C122	043-0277-51	0.022 μ F	C204	042-0592-58	16V10 μ F (2439N)	C405	042-0505-82	16V10 μ F
C123	166-8201-50	82pF CH	C205	042-0592-58	16V10 μ F (2439N)	C406	168-1042-78	16V0.1 μ F
C124	168-1042-78	16V 0.1 μ F	C206	042-0592-58	16V10 μ F (2439N)	C407	168-1042-78	16V0.1 μ F
C125	183-1073-29	10V100 μ F	C207	042-0592-58	16V10 μ F (2439N)	C409	168-2232-55	0.022 μ F
C126	168-3312-55	330pF	C301	178-4742-78	0.47 μ F	C411	168-6822-55	6800pF
C129	168-1042-78	16V 0.1 μ F	C302	178-4742-78	0.47 μ F	C413	166-1011-50	100pF CH
C130	183-1073-29	10V100 μ F	C303	178-4742-78	0.47 μ F	C415	166-1011-50	100pF CH
C132	178-1052-78	1 μ F	C304	042-0592-58	16V10 μ F	C416	166-1011-50	100pF CH
C133	168-1232-55	0.012 μ F	C305	163-1073-15	6.3V100 μ F	C417	166-1011-50	100pF CH
C134	042-0458-90	50V1 μ F	C306	042-0592-58	16V10 μ F	C420	163-4763-15	6.3V47 μ F
			C307	042-0592-73	50V1 μ F	C421	168-1042-78	16V0.1 μ F
			C308	042-0592-73	50V1 μ F	C422	168-1022-55	1000pF
			C311	042-0592-73	50V1 μ F	C423	168-1042-78	16V 0.1 μ F
			C312	042-0592-73	50V1 μ F	C424	168-1032-55	0.01 μ F
			C316	042-0592-73	50V1 μ F	C425	163-4753-55	35V4.7 μ F
			C317	042-0592-73	50V1 μ F	C426	163-4753-55	35V4.7 μ F

PN-2432D /
2451D / 2439N

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C427	168-1042-78	16V 0.1 μ F	C743	042-0592-58	16V10 μ F	L103	010-2198-53	5.6 μ H (2432D/2451D)
C428	166-1011-50	100pF CH	C744	163-2273-25	10V 220 μ F	L103	117-0000-05	1/10W 0 Ω JW (2439N)
C429	168-1042-78	16V 0.1 μ F	C745	166-2201-50	22pF CH	L104	010-2003-04	COIL
C430	168-1032-55	0.01 μ F	C1014	183-1063-39	16V10 μ F	L106	010-2230-76	22 μ H
C432	168-4712-55	470pF	C1015	183-1063-39	16V10 μ F	L151	010-2230-76	22 μ H
C501	168-1042-78	16V 0.1 μ F	CCT401	050-0122-50	1/16W10k Ω $\times$ 4 J	L401	010-2199-78	22 μ H J
C502	183-1073-29	10V100 μ F	CCT402	050-0140-54	1/32W 1k Ω $\times$ 4J	L601	010-8028-00	520 μ H
C503	183-1063-39	16V10 μ F	CCT403	050-0140-54	1/32W 1k Ω $\times$ 4J	P201	076-0368-18	18P
C504	163-1073-35	16V100 μ F	CCT404	050-0140-54	1/32W 1k Ω $\times$ 4J	P202	076-0368-06	PLUG(6P)
C505	168-1042-78	16V 0.1 μ F	CCT405	050-0140-54	1/32W 1k Ω $\times$ 4J	P401	076-0478-55	PLUG(5P)
C506	163-1073-35	16V100 μ F	CCT406	050-0140-54	1/32W 1k Ω $\times$ 4J	P1001	074-0898-18	18P
C507	163-1073-35	16V100 μ F	CCT407	050-0140-54	1/32W 1k Ω $\times$ 4J	P1002	074-0898-06	OUTLET SOCKET(6P)
C508	163-1073-35	16V100 μ F	CCT408	050-0140-54	1/32W 1k Ω $\times$ 4J	Q101	193-0601-00	2SD601A
C509	042-0423-94	10V 4.7 μ F	CCT409	050-0140-54	1/32W 1k Ω $\times$ 4J	Q102	193-0601-00	2SD601A
C510	168-1042-78	16V 0.1 μ F	CCT411	050-0140-54	1/32W 1k Ω $\times$ 4J	Q103	125-2005-91	UN2211
C511	183-1063-39	16V10 μ F	CCT412	050-0140-54	1/32W 1k Ω $\times$ 4J	Q104	125-2005-91	UN2211
C512	163-1073-35	16V100 μ F	CCT413	050-0140-54	1/32W 1k Ω $\times$ 4J	Q105	192-2712-51	2SC2712G,L
C515	183-4763-39	16V47 μ F	CCT414	050-0140-54	1/32W 1k Ω $\times$ 4J	Q106	125-2005-91	UN2211
C521	168-1042-78	16V 0.1 μ F	CCT415	050-0140-54	1/32W 1k Ω $\times$ 4J	Q107	192-2712-51	2SC2712G,L
C522	184-2273-39	16V220 μ F	CCT416	050-0140-54	1/32W 1k Ω $\times$ 4J	Q108	125-2005-91	UN2211
C523	178-2242-78	0.22 μ F	CCT417	050-0140-54	1/32W 1k Ω $\times$ 4J	Q109	190-1298-00	2SA1298
C601	168-2222-55	2200pF	D101	001-0368-90	1SV121	Q110	125-2005-91	UN2211
C602	168-2222-55	2200pF	D102	001-0368-90	1SV121	Q111	190-1298-00	2SA1298
C603	168-2222-55	2200pF	D151	001-0356-91	1SS184 (2439N)	Q201	125-2005-91	UN2211 (2439N)
C604	168-2222-55	2200pF	D402	001-0529-44	MA8082-M	Q202	125-9003-92	IMD3 (2439N)
C605	168-2222-55	2200pF	D403	001-0516-90	MA111	Q203	125-9003-92	IMD3 (2439N)
C606	168-2222-55	2200pF	D406	001-0535-90	MA729	Q301	125-2005-91	UN2211
C607	168-2222-55	2200pF	D407	001-0516-90	MA111	Q302	125-2005-91	UN2211
C608	168-2222-55	2200pF	D501	001-0504-49	HZS9 C3L	Q401	125-2004-96	RN1406
C609	168-2222-55	2200pF	D502	001-0504-48	HZS9C2L	Q402	190-1428-00	2SA1428
C610	168-2222-55	2200pF	D503	001-0626-91	1A2	Q406	125-2005-91	UN2211
C611	172-1041-15	0.1 μ F	D504	001-0626-91	1A2	Q407	125-2005-91	UN2211
C612	042-0551-02	16V1000 μ F	D521	001-0347-16	MA4036LTA	Q408	125-0006-90	UN2110
C613	183-1053-69	50V1 μ F	D522	001-0347-56	MA4120M	Q410	125-2005-91	UN2211
C614	172-1041-15	0.1 μ F	D602	001-0529-34	MA8062-L	Q412	125-2005-91	UN2211
C615	183-1063-39	16V10 μ F	D603	001-0626-91	1A2	Q415	125-2005-91	UN2211
C620	168-2232-55	0.022 μ F	D604	001-0516-90	MA111	Q416	193-0601-00	2SD601A
C702	163-1053-65	50V1 μ F	D605	001-0626-91	1A2	Q417	193-0601-00	2SD601A
C703	168-6822-55	6800pF	D606	001-0516-90	MA111	Q418	125-0001-91	UN2111
C704	168-2232-55	0.022 μ F	D607	001-2015-00	RL253	Q501	103-2353-00	2SD2353
C705	042-0592-58	16V10 μ F	D608	001-0626-91	1A2	Q502	193-2118-00	2SD2118
C706	042-0592-58	16V10 μ F	D702	001-0356-91	1SS184	Q503	193-1858-00	2SD1858
C707	042-0592-58	16V10 μ F	D703	001-0356-91	1SS184	Q504	125-9003-92	IMD3
C708	042-0592-58	16V10 μ F	D1050	001-0626-91	1A2 (2432D/2451D)	Q505	125-2005-91	UN2211
C709	168-5612-55	560pF	IC101	051-4603-90	TA2083FN	Q506	190-1048-00	2SA1048
C710	168-5612-55	560pF	IC102	051-1819-90	SAA6579T	Q507	191-1205-60	2SB1205RST
C711	166-5601-50	56pF CH	IC103	051-3034-90	NJM4558V	Q508	125-9003-92	IMD3
C712	166-5601-50	56pF CH	IC104	051-6212-08	LC72191JM-TLM	Q521	103-2012-00	2SD2012
C713	166-2201-50	22pF CH	IC301	051-0267-08	TC4066BF	Q522	125-9003-92	IMD3
C714	166-2201-50	22pF CH	IC302	051-5026-00	LC75410WS	Q523	193-1858-00	2SD1858
C715	166-2201-50	22pF CH	IC401	051-1014-08	TA7291F	Q603	193-0601-00	2SD601A
C716	166-2201-50	22pF CH	IC402	051-9400-48	S93C46AFJ	Q604	125-2005-91	UN2211
C717	166-5601-50	56pF CH	IC403	051-3034-90	NJM4558V	Q605	191-0709-00	2SB709A-Q.R.S
C718	166-5601-50	56pF CH	IC404	052-3162-00	M30624MGA-351GP	Q606	100-1359-00	2SA1359
C719	166-5601-50	56pF CH	IC405	051-5436-08	S-80933ANMP-DDX	Q607	125-2005-91	UN2211
C720	166-5601-50	56pF CH	IC501	051-1834-00	LM2936	Q608	191-0709-00	2SB709A-Q.R.S
C721	166-2201-50	22pF CH	IC601	051-5418-08	S-80827ANMP-EDQ	Q609	100-1359-00	2SA1359
C722	166-2201-50	22pF CH	IC701	051-1407-00	NJM4556AL	Q703	193-0601-00	2SD601A
C723	166-2201-50	22pF CH	IC702	051-1407-00	NJM4556AL	Q704	191-0709-00	2SB709A-Q.R.S
C724	166-2201-50	22pF CH	IC703	051-1407-00	NJM4556AL	Q705	191-0709-00	2SB709A-Q.R.S
C725	166-5601-50	56pF CH	IC704	051-1407-00	NJM4556AL	Q706	191-0709-00	2SB709A-Q.R.S
C726	166-5601-50	56pF CH	IC705	051-3020-90	NJM4565V	Q707	191-0709-00	2SB709A-Q.R.S
C727	042-0548-52	10V220 μ F	IC707	051-3020-90	NJM4565V	Q1050	125-2005-91	UN2211 (2432D/2451D)
C728	042-0548-52	10V220 μ F	J201	074-0850-08	AUX-DIN 8P (2439N)	R101	119-4741-15	1/16W 470k Ω
C729	042-0548-52	10V220 μ F	J401	076-0509-20	20P	R102	119-1031-15	1/16W 10k Ω
C730	042-0548-52	10V220 μ F	J402	074-1192-22	22P	R103	119-4741-15	1/16W 470k Ω
C731	042-0548-52	10V220 μ F	J403	076-0648-16	16P	R104	119-1021-15	1/16W 1k Ω
C732	042-0548-52	10V220 μ F	J601	074-1141-00	NS10+6	R105	119-1021-15	1/16W 1k Ω
C733	042-0548-52	10V220 μ F	J1001	074-1087-12	OUTLET SOCKET	R106	119-8201-15	1/16W 82 Ω
C734	042-0548-52	10V220 μ F	L101	010-2046-41	560 μ F	R107	119-4741-15	1/16W 470k Ω
C737	042-0548-52	10V220 μ F	L102	010-2198-65	0.1 μ H (2432D/2451D)			
C740	163-4763-35	16V47 μ F						
C741	042-0592-61	16V47 μ F						
C742	168-1042-78	16V 0.1 μ F	L102	117-0000-05	1/10W 0 Ω JW (2439N)			

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R108	119-1021-15	1/16W 1kΩ	R423	119-4731-15	1/16W 47kΩ	R616	116-1531-15	1/8W 15kΩ
R109	119-1031-15	1/16W 10kΩ	R424	119-0000-05	1/16W 0Ω JW	R617	114-2291-18	1W 2.2Ω
R110	119-2231-15	1/16W 22kΩ	R426	119-1531-15	1/16W 15kΩ	R618	119-0000-05	1/16W 0Ω JW
R111	119-1021-15	1/16W 1kΩ	R427	119-3311-15	1/16W 330Ω	R619	119-0000-05	1/16W 0Ω JW (2439N)
R112	119-2221-15	1/16W 2.2kΩ (2432D/2451D)	R428	119-1021-15	1/16W 1kΩ	R620	119-0000-05	1/16W 0Ω JW (2432D/2451D)
R112	010-2312-52	0.27 μH(2439N)	R430	119-3311-15	1/16W 330Ω	R704	119-4731-15	1/16W 47kΩ
R113	119-2221-15	1/16W 2.2kΩ	R431	119-4731-15	1/16W 47kΩ	R705	119-4731-15	1/16W 47kΩ
R114	119-2221-15	1/16W 2.2kΩ	R432	119-4731-15	1/16W 47kΩ	R706	119-1031-15	1/16W 10kΩ
R115	119-1021-15	1/16W 1kΩ	R433	119-4731-15	1/16W 47kΩ	R707	119-5621-15	1/16W 5.6kΩ
R116	119-1021-15	1/16W 1kΩ	R436	119-2231-15	1/16W 22kΩ	R708	119-5621-15	1/16W 5.6kΩ
R117	119-4721-15	1/16W 4.7kΩ	R437	117-0000-05	1/10W 0Ω JW	R709	119-5621-15	1/16W 5.6kΩ
R118	116-8211-15	1/8W 820Ω	R438	119-2231-15	1/16W 22kΩ	R710	119-5621-15	1/16W 5.6kΩ
R119	119-1021-15	1/16W 1kΩ	R439	032-0092-99	1/10W 47kΩ 1%	R711	119-5621-15	1/16W 5.6kΩ
R120	119-2221-15	1/16W 2.2kΩ	R440	119-4731-15	1/16W 47kΩ	R712	119-1051-15	1/16W 1MΩ
R121	119-4721-15	1/16W 4.7kΩ	R441	119-1021-15	1/16W 1kΩ	R713	119-1051-15	1/16W 1MΩ
R122	117-8201-15	1/10W 82Ω	R443	119-1031-15	1/16W 10kΩ	R714	119-3331-15	1/16W 33kΩ
R124	119-3321-15	1/16W 3.3kΩ	R444	119-4731-15	1/16W 47kΩ	R715	119-1021-15	1/16W 1kΩ
R126	116-1001-15	1/8W 10Ω	R446	032-0092-99	1/10W 47kΩ 1%	R716	119-1021-15	1/16W 1kΩ
R127	116-1001-15	1/8W 10Ω	R447	119-4731-15	1/16W 47kΩ	R717	119-3331-15	1/16W 33kΩ
R128	119-2221-15	1/16W 2.2kΩ	R450	032-0140-57	1/16W 5.6kΩ 1%	R718	119-1021-15	1/16W 1kΩ
R129	119-2221-15	1/16W 2.2kΩ	R451	032-0140-57	1/16W 5.6kΩ 1%	R719	119-1021-15	1/16W 1kΩ
R130	119-1031-15	1/16W 10kΩ	R452	119-1031-15	1/16W 10kΩ	R720	119-3331-15	1/16W 33kΩ
R131	119-1031-15	1/16W 10kΩ	R453	119-4731-15	1/16W 47kΩ	R721	119-3331-15	1/16W 33kΩ
R132	119-4721-15	1/16W 4.7kΩ	R458	119-4731-15	1/16W 47kΩ	R722	119-2231-15	1/16W 22kΩ
R133	119-1021-15	1/16W 1kΩ	R459	119-4731-15	1/16W 47kΩ	R723	119-2231-15	1/16W 22kΩ
R134	119-2221-15	1/16W 2.2kΩ	R460	119-1041-15	1/16W 100kΩ	R724	119-1001-15	1/16W 10Ω
R135	119-1021-15	1/16W 1kΩ	R461	119-1031-15	1/16W 10kΩ	R725	119-2231-15	1/16W 22kΩ
R136	119-1021-15	1/16W 1kΩ	R462	119-1031-15	1/16W 10kΩ	R726	119-2231-15	1/16W 22kΩ
R137	116-1001-15	1/8W 10Ω	R463	119-4731-15	1/16W 47kΩ	R727	119-1001-15	1/16W 10Ω
R138	119-1031-15	1/16W 10kΩ	R464	119-1041-15	1/16W 100kΩ	R728	119-1831-15	1/16W 18kΩ
R139	119-1031-15	1/16W 10kΩ	R465	119-4721-15	1/16W 4.7kΩ	R729	119-1831-15	1/16W 18kΩ
R140	119-4721-15	1/16W 4.7kΩ	R466	119-6821-15	1/16W 6.8kΩ	R730	119-1041-15	1/16W 100kΩ
R141	119-4731-15	1/16W 47kΩ	R467	119-4721-15	1/16W 4.7kΩ	R731	119-1041-15	1/16W 100kΩ
R151	119-1021-15	1/16W 1kΩ	R468	119-4721-15	1/16W 4.7kΩ	R732	119-2231-15	1/16W 22kΩ
R152	119-1021-15	1/16W 1kΩ(2439N)	R469	119-4731-15	1/16W 47kΩ	R733	119-1001-15	1/16W 10Ω
R201	116-8211-15	1/8W 820Ω(2439N)	R470	119-1031-15	1/16W 10kΩ	R734	119-2231-15	1/16W 22kΩ
R202	116-8211-15	1/8W 820Ω(2439N)	R471	119-4731-15	1/16W 47kΩ	R735	119-1001-15	1/16W 10Ω
R203	119-4731-15	1/16W 47kΩ(2439N)	R473	119-4731-15	1/16W 47kΩ	R738	119-2231-15	1/16W 22kΩ
R204	116-8211-15	1/8W 820Ω(2439N)	R476	119-1021-15	1/16W 1kΩ	R739	119-2231-15	1/16W 22kΩ
R205	116-8211-15	1/8W 820Ω(2439N)	R477	119-1031-15	1/16W 10kΩ	R740	119-1001-15	1/16W 10Ω
R206	119-3011-15	1/16W 300Ω(2439N)	R478	119-1031-15	1/16W 10kΩ	R741	119-2231-15	1/16W 22kΩ
R207	119-3011-15	1/16W 300Ω(2439N)	R479	119-1021-15	1/16W 1kΩ	R742	119-2231-15	1/16W 22kΩ
R301	119-1541-15	1/16W 150kΩ	R488	119-1021-15	1/16W 1kΩ	R743	119-1001-15	1/16W 10Ω
R302	119-1541-15	1/16W 150kΩ	R492	119-4731-15	1/16W 47kΩ	R744	119-1831-15	1/16W 18kΩ
R305	119-1541-15	1/16W 150kΩ	R493	119-4731-15	1/16W 47kΩ	R745	119-1831-15	1/16W 18kΩ
R306	119-1541-15	1/16W 150kΩ	R494	119-4731-15	1/16W 47kΩ	R746	119-1041-15	1/16W 100kΩ
R307	119-1541-15	1/16W 150kΩ	R495	119-1031-15	1/16W 10kΩ	R747	119-1041-15	1/16W 100kΩ
R308	119-4731-15	1/16W 47kΩ	R496	119-5631-15	1/16W 56kΩ	R748	119-2231-15	1/16W 22kΩ
R309	119-4721-15	1/16W 4.7kΩ	R501	111-2211-98	1/4WS 220Ω	R749	119-1001-15	1/16W 10Ω
R310	119-3031-15	1/16W 30kΩ(2439N)	R502	116-3911-15	1/8W 390Ω	R750	119-2231-15	1/16W 22kΩ
R311	119-3031-15	1/16W 30kΩ(2439N)	R503	119-1031-15	1/16W 10kΩ	R751	119-1001-15	1/16W 10Ω
R312	119-3031-15	1/16W 30kΩ(2439N)	R504	116-1011-15	1/8W 100Ω	R756	119-1031-15	1/16W 10kΩ
R313	119-3031-15	1/16W 30kΩ(2439N)	R505	119-4721-15	1/16W 4.7kΩ	R757	119-1031-15	1/16W 10kΩ
R320	119-2731-15	1/16W 27kΩ	R506	119-1021-15	1/16W 1kΩ	R758	119-4731-15	1/16W 47kΩ
R321	119-2731-15	1/16W 27kΩ	R507	119-1031-15	1/16W 10kΩ	R759	119-4731-15	1/16W 47kΩ
R353	119-2721-15	1/16W 2.7kΩ	R508	116-7501-15	1/8W 75Ω	R1023	119-3011-15	1/16W 300Ω
R354	119-2721-15	1/16W 2.7kΩ	R509	116-2201-15	1/8W 22Ω	R1026	119-4731-15	1/16W 47kΩ
R401	119-1031-15	1/16W 10kΩ	R510	116-2201-15	1/8W 22Ω	R1027	119-4731-15	1/16W 47kΩ
R402	119-1031-15	1/16W 10kΩ	R511	119-1041-15	1/16W 100kΩ	R1050	119-1031-15	1/16W 10kΩ
R403	116-1221-15	1/8W 1.2kΩ	R521	111-8211-98	1/4WS 820Ω	R1051	119-2231-15	1/16W 22kΩ (2432D/2451D)
R404	116-1221-15	1/8W 1.2kΩ	R522	119-4711-15	1/16W 470Ω	R1052	119-3321-15	1/16W 3.3kΩ (2432D/2451D)
R405	119-1031-15	1/16W 10kΩ	R601	119-4741-15	1/16W 470kΩ	SUP101	060-0122-91	DSP-141N-S00B
R406	116-1001-15	1/8W 10Ω	R602	119-2741-15	1/16W 270kΩ	SUP102	060-0122-91	DSP-141N-S00B
R407	116-1001-15	1/8W 10Ω	R605	119-1031-15	1/16W 10kΩ	VR101	012-5203-63	470kΩ
R408	116-1001-15	1/8W 10Ω	R606	119-5611-15	1/16W 560Ω	VR102	012-5203-56	10kΩ
R409	116-1001-15	1/8W 10Ω	R607	116-1221-15	1/8W 1.2kΩ	X101	061-3013-90	4.332MHz
R410	119-2221-15	1/16W 2.2kΩ	R608	119-4721-15	1/16W 4.7kΩ	X102	061-1066-80	7.2MHz
R416	119-4731-15	1/16W 47kΩ	R609	111-6891-98	1/4WS 6.8Ω	X401	060-1505-50	10MHz
R417	119-1021-15	1/16W 1kΩ	R610	111-6891-98	1/4WS 6.8Ω			
R418	119-1021-15	1/16W 1kΩ	R611	116-1221-15	1/8W 1.2kΩ			
R419	119-4731-15	1/16W 47kΩ	R612	119-4721-15	1/16W 4.7kΩ			
R420	119-4721-15	1/16W 4.7kΩ	R613	116-1221-15	1/8W 1.2kΩ			
R421	119-4731-15	1/16W 47kΩ	R614	111-5691-98	1/4WS 5.6Ω			
			R615	111-5691-98	1/4WS 5.6Ω			

Display PWB section(B2) : PN-2432D / PN-2451D

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C251	166-2701-50	27pF CH	C272	166-1011-50	100pF CH	R254	119-1031-15	1/16W 10kΩ
C252	166-1011-50	100pF CH	IC201	051-6061-00	MSM9223GS-BK	R255	119-6221-15	1/16W 6.2kΩ
C253	166-2201-50	22pF CH	IC202	051-6054-00	MSM9210	R256	119-4731-15	1/16W 47kΩ
C256	168-1042-78	16V 0.1 μF	J251	074-1279-16	16P	R258	119-4731-15	1/16W 47kΩ
C257	168-2222-55	2200pF	PL251	017-0433-52	14V40mA	R260	119-1031-15	1/16W 10kΩ
C258	168-2222-55	2200pF	PL252	017-0458-00	14V40mA	R261	119-1021-15	1/16W 1kΩ
C259	166-2201-50	22pF CH	PL253	017-0458-00	14V40mA	R262	119-1021-15	1/16W 1kΩ
C260	166-2201-50	22pF CH	PL254	017-0458-00	14V40mA	R265	119-1021-15	1/16W 1kΩ
C261	168-2222-55	2200pF	PL255	017-0458-00	14V40mA	R266	119-1021-15	1/16W 1kΩ
C262	168-2222-55	2200pF	PL256	017-0458-00	14V40mA	R267	119-1021-15	1/16W 1kΩ
C263	166-1011-50	100pF CH	PL257	017-0458-00	14V40mA	R268	119-1021-15	1/16W 1kΩ
C264	166-1011-50	100pF CH	PL258	017-0458-00	14V40mA	R269	119-1021-15	1/16W 1kΩ
C265	166-1011-50	100pF CH	Q251	125-0002-91	RN2401	S254	013-6305-50	SKQMAH
C266	166-1011-50	100pF CH	Q252	125-0002-91	RN2401	S258	013-6305-50	SKQMAH
C267	166-1011-50	100pF CH	Q253	125-0002-91	RN2401	S262	013-6305-50	SKQMAH
C268	166-1011-50	100pF CH	Q254	125-2004-92	RN1402	S268	013-7411-50	ESE2131BTXN
C269	166-1011-50	100pF CH	R251	119-1031-15	1/16W 10kΩ	S273	013-8003-00	ROTARY SW
C270	166-1011-50	100pF CH	R252	119-1031-15	1/16W 10kΩ	S274	013-6201-50	SKPMAA
C271	166-1011-50	100pF CH	R253	119-1031-15	1/16W 10kΩ			

Display PWB section(B2) : PN-2439N

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C251	166-2701-50	27pF CH	C272	166-1011-50	100pF CH	R254	119-1031-15	1/16W 10kΩ
C252	166-1011-50	100pF CH	IC201	051-6061-00	MSM9223GS-BK	R255	119-6221-15	1/16W 6.2kΩ
C253	166-2201-50	22pF CH	IC202	051-6054-00	MSM9210	R256	119-1031-15	1/16W 10kΩ
C254	168-2222-55	2200pF	J251	074-1279-16	16P	R257	119-4731-15	1/16W 47kΩ
C255	168-2222-55	2200pF	PL251	017-0458-00	14V40mA	R258	119-4731-15	1/16W 47kΩ
C256	168-1042-78	16V 0.1 μF	PL252	017-0458-00	14V40mA	R259	119-1021-15	1/16W 1kΩ
C257	166-2201-50	22pF CH	PL253	017-0458-00	14V40mA	R260	119-1021-15	1/16W 1kΩ
C258	166-2201-50	22pF CH	PL254	017-0458-00	14V40mA	R265	119-1021-15	1/16W 1kΩ
C261	168-2222-55	2200pF	PL255	017-0458-00	14V40mA	R266	119-1021-15	1/16W 1kΩ
C262	168-2222-55	2200pF	PL256	017-0458-00	14V40mA	R267	119-1021-15	1/16W 1kΩ
C263	166-1011-50	100pF CH	PL257	017-0458-00	14V40mA	R268	119-1021-15	1/16W 1kΩ
C264	166-1011-50	100pF CH	PL258	017-0458-00	14V40mA	R269	119-1021-15	1/16W 1kΩ
C265	166-1011-50	100pF CH	Q251	125-0002-91	RN2401	S254	013-3812-01	SKQCAC(3.5×6)
C266	166-1011-50	100pF CH	Q252	125-0002-91	RN2401	S258	013-3812-01	SKQCAC(3.5×6)
C267	166-1011-50	100pF CH	Q253	125-0002-91	RN2401	S262	013-3812-01	SKQCAC(3.5×6)
C268	166-1011-50	100pF CH	Q254	125-2004-92	RN1402	S268	013-7411-50	ESE2131BTXN
C269	166-1011-50	100pF CH	R251	119-1031-15	1/16W 10kΩ	VR251	016-0013-05	VR W/SHAFT
C270	166-1011-50	100pF CH	R252	119-1031-15	1/16W 10kΩ			
C271	166-1011-50	100pF CH	R253	119-1031-15	1/16W 10kΩ			

CD PWB section(B3) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C2	046-1022-58	1000pF	C32	046-1022-58	1000pF	Q3	131-1188-00	2SB1188
C3	168-1042-78	16V 0.1 μF	C33	046-3322-58	3300pF	R2	033-1041-15	1/16W 100kΩ
C4	042-0636-54	4V220 μF	C34	168-2732-55	16V 0.027 μF	R4	033-3311-15	1/16W 330Ω
C5	168-1042-78	16V 0.1 μF	C35	178-2742-78	0.27 μF	R5	033-1041-15	1/16W 100kΩ
C6	046-1032-78	0.01 μF	C36	178-1052-78	1 μF	R6	033-3931-15	1/16W 39kΩ
C7	168-1042-78	16V 0.1 μF	C37	168-1042-78	16V 0.1 μF	R7	033-1041-15	1/16W 100kΩ
C8	178-4742-78	0.47 μF	C38	042-0472-91	16V47 μF	R8	033-5611-15	1/16W 560Ω
C9	178-2242-78	0.22 μF	C39	042-0636-50	6.3V100 μF	R9	033-5611-15	1/16W 560Ω
C10	168-1042-78	16V 0.1 μF	C40	045-1211-50	120pF	R10	033-1011-15	1/16W 100Ω
C11	168-1042-78	16V 0.1 μF	C41	045-5601-50	56pF	R11	033-3911-15	1/16W 390Ω
C12	168-1042-78	16V 0.1 μF	C42	168-1042-78	16V 0.1 μF	R12	033-2221-15	1/16W 2.2kΩ
C13	046-2232-78	0.022 μF	C43	042-0636-52	4V47 μF	R13	033-6831-15	1/16W 68kΩ
C14	168-5612-55	560pF	C50	168-1042-78	16V 0.1 μF	R14	033-5621-15	1/16W 5.6kΩ
C15	168-1042-78	16V 0.1 μF	C51	168-1042-78	16V 0.1 μF	R15	033-1021-15	1/16W 1kΩ
C16	046-2212-58	220pF	C60	168-5612-55	560pF	R16	033-5631-15	1/16W 56kΩ
C17	046-2212-58	220pF	D1	001-0516-90	MA111	R17	033-1031-15	1/16W 10kΩ
C18	168-1222-55	1200pF	IC1	051-6365-00	MN662785TBUC	R18	033-1031-15	1/16W 10kΩ
C19	046-3322-58	3300pF	IC2	051-9318-00	MSM51V17400D-60TS-K	R19	033-5621-15	1/16W 5.6kΩ
C20	168-3932-78	0.039 μF				R20	033-6831-15	1/16W 68kΩ
C21	168-3932-78	0.039 μF	IC3	051-6060-08	BD7961FM-E2	R21	033-5621-15	1/16W 5.6kΩ
C22	042-0416-52	10V10 μF TAN	IC4	051-5711-90	AN8882SB-E1	R22	033-1031-15	1/16W 10kΩ
C25	178-1052-78	1 μF	J1	074-1189-95	45P	R23	033-1031-15	1/16W 10kΩ
C26	042-0472-91	16V47 μF	J4	074-1138-56	6P	R24	033-4731-15	1/16W 47kΩ
C27	178-3342-78	0.33 μF	J5	074-1201-65	15P	R25	033-3931-15	1/16W 39kΩ
C29	168-2732-55	16V 0.027 μF	J6	074-1059-76	26P	R26	033-6831-15	1/16W 68kΩ
C30	042-0416-58	4V100 μF	L2	010-3050-93	10 μH	R27	033-6831-15	1/16W 68kΩ
C31	042-0636-52	4V47 μF	Q2	131-1188-00	2SB1188	R28	033-1031-15	1/16W 10kΩ

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
R29	033-2201-15	1/16W 22Ω	R39	033-1831-15	1/16W 18kΩ	R46	117-1811-15	1/10W 180Ω
R31	033-8211-15	1/16W 820Ω	R40	117-1001-15	1/10W 10Ω	R47	116-4711-15	1/8W 470Ω
R32	033-5631-15	1/16W 56kΩ	R41	033-6821-15	1/16W 6.8kΩ	R48	033-1031-15	1/16W 10kΩ
R33	033-6831-15	1/16W 68kΩ	R42	033-6821-15	1/16W 6.8kΩ	R49	033-1011-15	1/16W 100Ω
R34	033-3331-15	1/16W 33kΩ	R43	033-1241-15	1/16W 120kΩ	R60	033-1031-15	1/16W 10kΩ
R35	033-6831-15	1/16W 68kΩ	R44	033-6831-15	1/16W 68kΩ	TM1	073-0768-90	TERMINAL
R38	033-3931-15	1/16W 39kΩ	R45	116-4711-15	1/8W 470Ω	X1	060-1527-90	33.8688MHz

Side PWB section(B4) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C101	168-1045-56	0.1 μF	J102	074-1191-22	22P	R120	119-3941-15	1/16W 390kΩ
C102	168-1032-55	0.01 μF	L101	010-3071-65	18 μH	R121	119-1041-15	1/16W 100kΩ
C104	163-1073-15	6.3V100 μF	L102	010-2199-80	33 μH J	R123	119-1041-15	1/16W 100kΩ
C106	163-1063-35	16V10 μF	P101	076-0478-55	PLUG	R124	119-1041-15	1/16W 100kΩ
C107	163-1073-15	6.3V100 μF	Q101	125-2004-92	RN1402	R125	119-1041-15	1/16W 100kΩ
C108	168-1042-78	16V 0.1 μF	Q102	131-1188-50	2SB1188PQR	R504	119-5621-15	1/16W 5.6kΩ
C109	168-1042-78	16V 0.1 μF	Q103	193-1758-00	2SD1758TK-P,Q,R	R505	119-1031-15	1/16W 10kΩ
C110	168-1042-78	16V 0.1 μF	Q104	193-1758-00	2SD1758TK-P,Q,R	R506	119-1041-15	1/16W 100kΩ
C111	163-1073-35	16V100 μF	Q105	125-0014-92	DTA114EK	R507	119-0000-05	1/16W 0Ω JW
C112	168-2722-55	2700pF	Q106	125-2004-92	RN1402	R509	119-4731-15	1/16W 47kΩ
C113	163-2263-35	16V22 μF	Q502	190-1162-00	2SA1162	R510	119-1031-15	1/16W 10kΩ
C114	163-2263-35	16V22 μF	Q503	190-1162-00	2SA1162	R511	119-1031-15	1/16W 10kΩ
C115	166-3311-50	330pF CH	Q504	192-2712-00	2SC2712	R512	050-0145-54	1/16W 47kΩ X 4
C116	166-3311-50	330pF CH	Q505	125-2004-92	RN1402	R513	119-1041-15	1/16W 100kΩ
C117	166-1011-50	100pF CH	Q506	125-0014-92	DTA114EK	R514	119-2241-15	1/16W 220kΩ
C118	166-1011-50	100pF CH	Q507	125-0002-92	RN2402	R515	119-2241-15	1/16W 220kΩ
C119	168-2722-55	2700pF	Q508	192-2712-00	2SC2712	R516	119-2241-15	1/16W 220kΩ
C120	168-1022-55	1000pF	R101	119-4711-15	1/16W 470Ω	R517	119-1041-15	1/16W 100kΩ
C121	163-2263-35	16V22 μF	R102	119-2231-15	1/16W 22kΩ	R518	119-2241-15	1/16W 220kΩ
C122	168-1022-55	1000pF	R103	119-1821-15	1/16W 1.8kΩ	R522	119-1041-15	1/16W 100kΩ
C123	163-2263-35	16V22 μF	R104	119-1831-15	1/16W 18kΩ	R524	119-1041-15	1/16W 100kΩ
C124	042-0403-55	16V33 μF	R105	116-1211-15	1/8W 120Ω	R526	119-4731-15	1/16W 47kΩ
C125	042-0403-55	16V33 μF	R106	119-1041-15	1/16W 100kΩ	R529	119-1021-15	1/16W 1kΩ
C501	163-1063-35	16V10 μF	R107	119-4731-15	1/16W 47kΩ	R531	119-1021-15	1/16W 1kΩ
C502	168-1045-56	0.1 μF	R108	119-1031-15	1/16W 10kΩ	R532	119-1021-15	1/16W 1kΩ
C503	168-4735-56	0.047 μF	R109	119-1031-15	1/16W 10kΩ	R533	119-1021-15	1/16W 1kΩ
C504	168-1045-56	0.1 μF	R110	119-4741-15	1/16W 470kΩ	R535	119-2231-15	1/16W 22kΩ
D100	001-0516-90	MA111	R111	119-4741-15	1/16W 470kΩ	R536	119-2231-15	1/16W 22kΩ
D103	001-0504-07	HZS4BLL	R112	119-2731-15	1/16W 27kΩ	R538	119-1031-15	1/16W 10kΩ
D104	001-0516-90	MA111	R113	119-2731-15	1/16W 27kΩ	R539	119-5631-15	1/16W 56kΩ
D105	001-0529-31	MA8056-L	R114	119-2731-15	1/16W 27kΩ	R541	119-1021-15	1/16W 1kΩ
IC501	051-9400-28	BR93LC46F-WE2	R115	119-2731-15	1/16W 27kΩ	R542	119-4721-15	1/16W 4.7kΩ
IC502	052-5047-01	M30621MCM-F46GP	R116	119-5611-15	1/16W 560Ω	R543	119-1041-15	1/16W 100kΩ
IC503	051-5418-08	S-80827ANMP-EDQ	R117	119-5611-15	1/16W 560Ω	R544	119-1041-15	1/16W 100kΩ
IC504	051-1407-90	NJM4556AM	R118	119-4731-15	1/16W 47kΩ	R545	119-1041-15	1/16W 100kΩ
J101	074-1189-95	45P	R119	119-4731-15	1/16W 47kΩ	X501	060-1505-50	10MHz

Sensor PWB section(B5) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
PT3	060-0252-01	PT4850F	PT5	060-0252-01	PT4850F	S1	013-7414-50	SPVG22
PT4	060-0252-01	PT4850F	PT6	060-0252-01	PT4850F			

PIM-FPC section(B6) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC5	051-5806-02	GPIS95

Driver PWB section(B7) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-1045-56	0.1 μF	J1	074-1239-76	26P	R3	032-0104-59	1/4W 2.2Ω
C2	163-1073-35	16V100 μF	J2	074-1100-59	9P	S1	013-7412-50	SPVG21
D1	001-0529-32	MA8056-M	R1	033-1021-15	1/16W 1kΩ			
IC1	051-6044-18	BA6920FP-Y	R2	032-0104-59	1/4W 2.2Ω			

PIV-FPC section(B8) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
IC6	051-5806-01	GPIS93

LED-L-PWB section(B9) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED3	001-7042-00	GL4800	LED4	001-7042-00	GL4800

LED-R-PWB section(B10) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
LED5	001-7042-00	GL4800	LED6	001-7042-00	GL4800

L-Motor-FPC section(B11) : CD changer mechanism

REF No.	PART No.	DESCRIPTION
M1	SMA-186-100	LOADING

M/S-FPC section(B12) : CD changer mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
M2	SMA-185-100	SPINDLE	M3	SMA-184-100	SLED	S2	013-7414-50	SPVG22

Side PWB section(B13) : Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C1	168-5612-05	560pF	C16	168-1032-05	0.01 μ F	R8	119-3341-10	1/16W 330k Ω
C2	168-5612-05	560pF	C17	178-4745-79	0.47 μ F	R9	119-1131-15	1/16W 11k Ω
C3	168-5612-05	560pF	C18	168-1042-78	0.1 μ F	R10	119-1131-15	1/16W 11k Ω
C4	168-5612-05	560pF	C19	163-2263-30	16V22 μ F	R11	119-1531-10	1/16W 15k Ω
C5	178-1055-79	1 μ F	IC1	051-5204-00	HA12216F	R12	119-1531-10	1/16W 15k Ω
C6	168-1232-05	0.012 μ F	J1	074-0898-10	10P	R13	032-0140-80	1/16W 18k Ω $\pm$ 1%
C7	168-1232-05	0.012 μ F	L1	010-2198-26	0.047 μ H	R14	119-2231-10	1/16W 22k Ω
C8	168-4732-78	0.047 μ F	L2	010-2198-26	0.047 μ H	R15	119-1031-10	1/16W 10k Ω
C9	168-4732-78	0.047 μ F	R1	119-2731-10	1/16W 27k Ω	R16	119-3921-10	1/16W 3.9k Ω
C10	168-5612-05	560pF	R2	119-2731-10	1/16W 27k Ω	R17	119-1241-10	1/16W 120k Ω
C11	168-5612-05	560pF	R3	119-2731-10	1/16W 27k Ω	R18	119-2231-10	1/16W 22k Ω
C12	168-1042-78	0.1 μ F	R4	119-2731-10	1/16W 27k Ω	VR1	012-6014-56	10k Ω
C13	168-1042-78	0.1 μ F	R5	119-1811-10	1/16W 180 Ω	VR2	012-6014-56	10k Ω
C14	168-1032-05	0.01 μ F	R6	119-1811-10	1/16W 180 Ω			
C15	163-4753-50	35V4.7 μ F	R7	119-3341-10	1/16W 330k Ω			

Bottom PWB section(B14) : Tape mechanism


REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
IC2	051-1776-00	NJL5801K	SW1	013-3953-01	SPPB32	SW2	013-3951-32	MODE SWITCH

Rear PWB section(B15) : Tape mechanism

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
P1	076-0368-10	10P	R19	111-5611-91	1/4WS 560 Ω	S1	013-3906-00	SPPB51
J2	074-1012-20	20P						

EXPLODED VIEW • PARTS LIST

CD changer module section

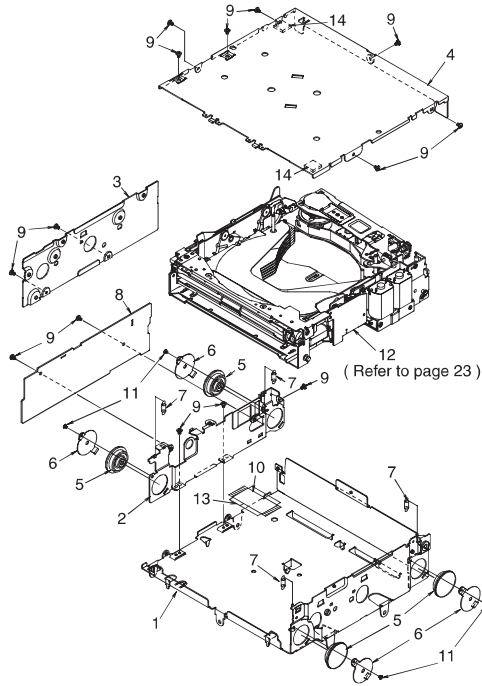

NO.	PART NO.	DESCRIPTION	Q'TY
1	311-1837-02	LOWER CASE	1
2	331-3266-11	PWB HOLDER	1
3	305-0315-01	SIDE CASE	1
4	310-1741-03	UPPER CASE	1
5	629-0083-01	DAMPER	4
6	620-1086-20	DAMPER-H-PLT	4
7	750-3491-00	FL-SPRING	4
8	039-2020-00	SIDE PWB (WITHOUT COMPONENT)	1
9	716-1716-00	SCREW(M2×3)	14
10	039-1957-01	FPC	1
11	716-3450-00	SCREW(M1.7×2)	4
12	-----	CD CHANGER MECHANISM	1
13	347-6619-00	INSULATOR	1
14	345-8329-00	CUSHION RUBBER	2


NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
34	051-5806-02	IC (GPIS95)	1	60	716-1866-00	SCREW(M1.7×3)	4
35	060-0252-01	PHOTO-TR	4	61	716-1873-00	SCREW(M2×1.6)	1
36	347-6657-00	LO-COVER SHEET	1	62	716-3449-00	SCREW(M2×3)	15
37	620-1041-02	GEAR PLATE	1	63	716-3450-00	SCREW(M1.7×2)	4
38	620-1042-00	M-GEAR-H	1	64	716-3451-00	SCREW(M1.7×2.5)	4
39	620-1056-22	HLR-PLATE-L	1	65	716-3459-00	SCREW(M1.7×5)	1
40	620-1057-21	HLR-PLATE-R	1	66	716-3466-02	SCREW	1
41	620-1063-00	LO-MOTOR-PLT	1	67	738-1420-17	PRECISION SCREW	2
42	620-1066-10	LOCK LINK-LR	1	68	743-1200-20	E-RING	2
43	620-1067-01	SLIDE PLATE-L	1	69	743-1500-20	E-RING	13
44	620-1068-22	SLIDE PLATE-R	1	70	746-0624-00	WASHER	1
45	620-1071-11	EJECT ARM	1	71	746-0712-03	WASHER	1
46	620-1072-10	EJECT PLATE	1	72	746-0761-00	WASHER	1
47	620-1073-00	FRONT PLATE	1	73	750-3478-01	TOP-P-SP-L	2
48	620-1083-10	FPC-PLATE	1	74	750-3479-01	TOP-P-SP-R	1
49	620-1090-00	GAP PLATE	1	75	750-3480-01	DR-LOCK-SP	1
50	620-1568-00	RATTLE PLATE-F	2	76	750-3483-00	EJECT-A-SPRING	1
51	621-0640-00	V-GEAR-G	1	77	750-3484-01	DR-BASE-SPRING	1
52	621-0641-01	PI-HOLDER-M	1	78	750-3485-01	TENSION-SP-L	1
53	621-0656-21	PI-HOLDER-V	1	79	750-3486-01	LO-TENSION-SP	1
54	622-1622-00	SL-G-ROLLER	2	80	750-3489-01	DRIVE-P-SPRING	1
55	622-1623-00	SL-G-ROLLER-R	2	81	750-3496-00	GAP-P-SPRING R	1
56	622-1648-01	DU-STP-SLEEVE	1	82	750-3497-00	GAP-P-SPRING L	1
57	622-1650-02	COV-PLATE PIN-B	2	83	750-6711-01	DU-STP-SPRING	1
58	622-1651-00	LOCK-RE-ROLLER	1	84	750-6712-01	DR-LOCK-SP-B	1
59	622-1652-00	LOCK-PF-ROLLER	1				

CD changer mechanism section : Main chassis


※ The exploded view is on page 23.

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-511-100	LOADING UNIT (WITHOUT MOTOR)	1	18	966-0615-01	LOCK-L-RF-ASSY	1
2	SMA-186-100	LOADING MOTOR ASSY	1	19	966-0616-20	LOCK-L-LF-ASSY	1
3	HBS-512-100	MOTOR PLATE SUB ASSY	1	20	966-0618-21	EJECT-B-ASSY	1
4	HBS-513-100	DRIVE UNIT	1	21	966-0624-26	DISC-HOL-ASSY	1
5	039-1951-00	CD PWB (WITHOUT COMPONENT)	1	22	001-7042-00	DIODE (GL4800)	4
6	039-1953-00	DRIVER PWB (WITHOUT COMPONENT)	1	23	013-7414-50	DETECTOR SWITCH	1
7	966-0597-02	CHASSIS ASSY	1	24	039-1954-00	LED-L-PWB (WITHOUT COMPONENT)	1
8	966-0600-01	LOCK-P-RE-ASSY	1	25	039-1955-00	LED-R-PWB (WITHOUT COMPONENT)	1
9	966-0601-00	M-GEAR-P-ASSY	1	26	039-1956-00	SENSOR PWB (WITHOUT COMPONENT)	1
10	966-0602-02	DR-LINK-ASSY	1	27	039-2009-00	PIM-FPC	1
11	966-0603-00	MODE-P-ASSY	1	28	039-2010-00	PIV-FPC	1
12	966-0604-02	LOCK-PF-ASSY	1	29	039-2011-00	LED-FPC	1
13	966-0605-00	SHIFT-P-ASSY	1	30	039-2012-00	SENSOR-FPC	1
14	966-0606-02	HLC-PLATE-ASSY	1	31	039-2013-01	MOS-FPC	1
15	966-0607-03	COV-OLATE-ASSY	1	32	039-2014-00	L-MOTOR-FPC (WITHOUT COMPONENT)	1
16	966-0610-05	TOP-PLATE-ASSY	1	33	051-5806-01	IC (GPIS93)	1
17	966-0652-22	DR-BASE-P-ASSY	1				

CD changer mechanism section

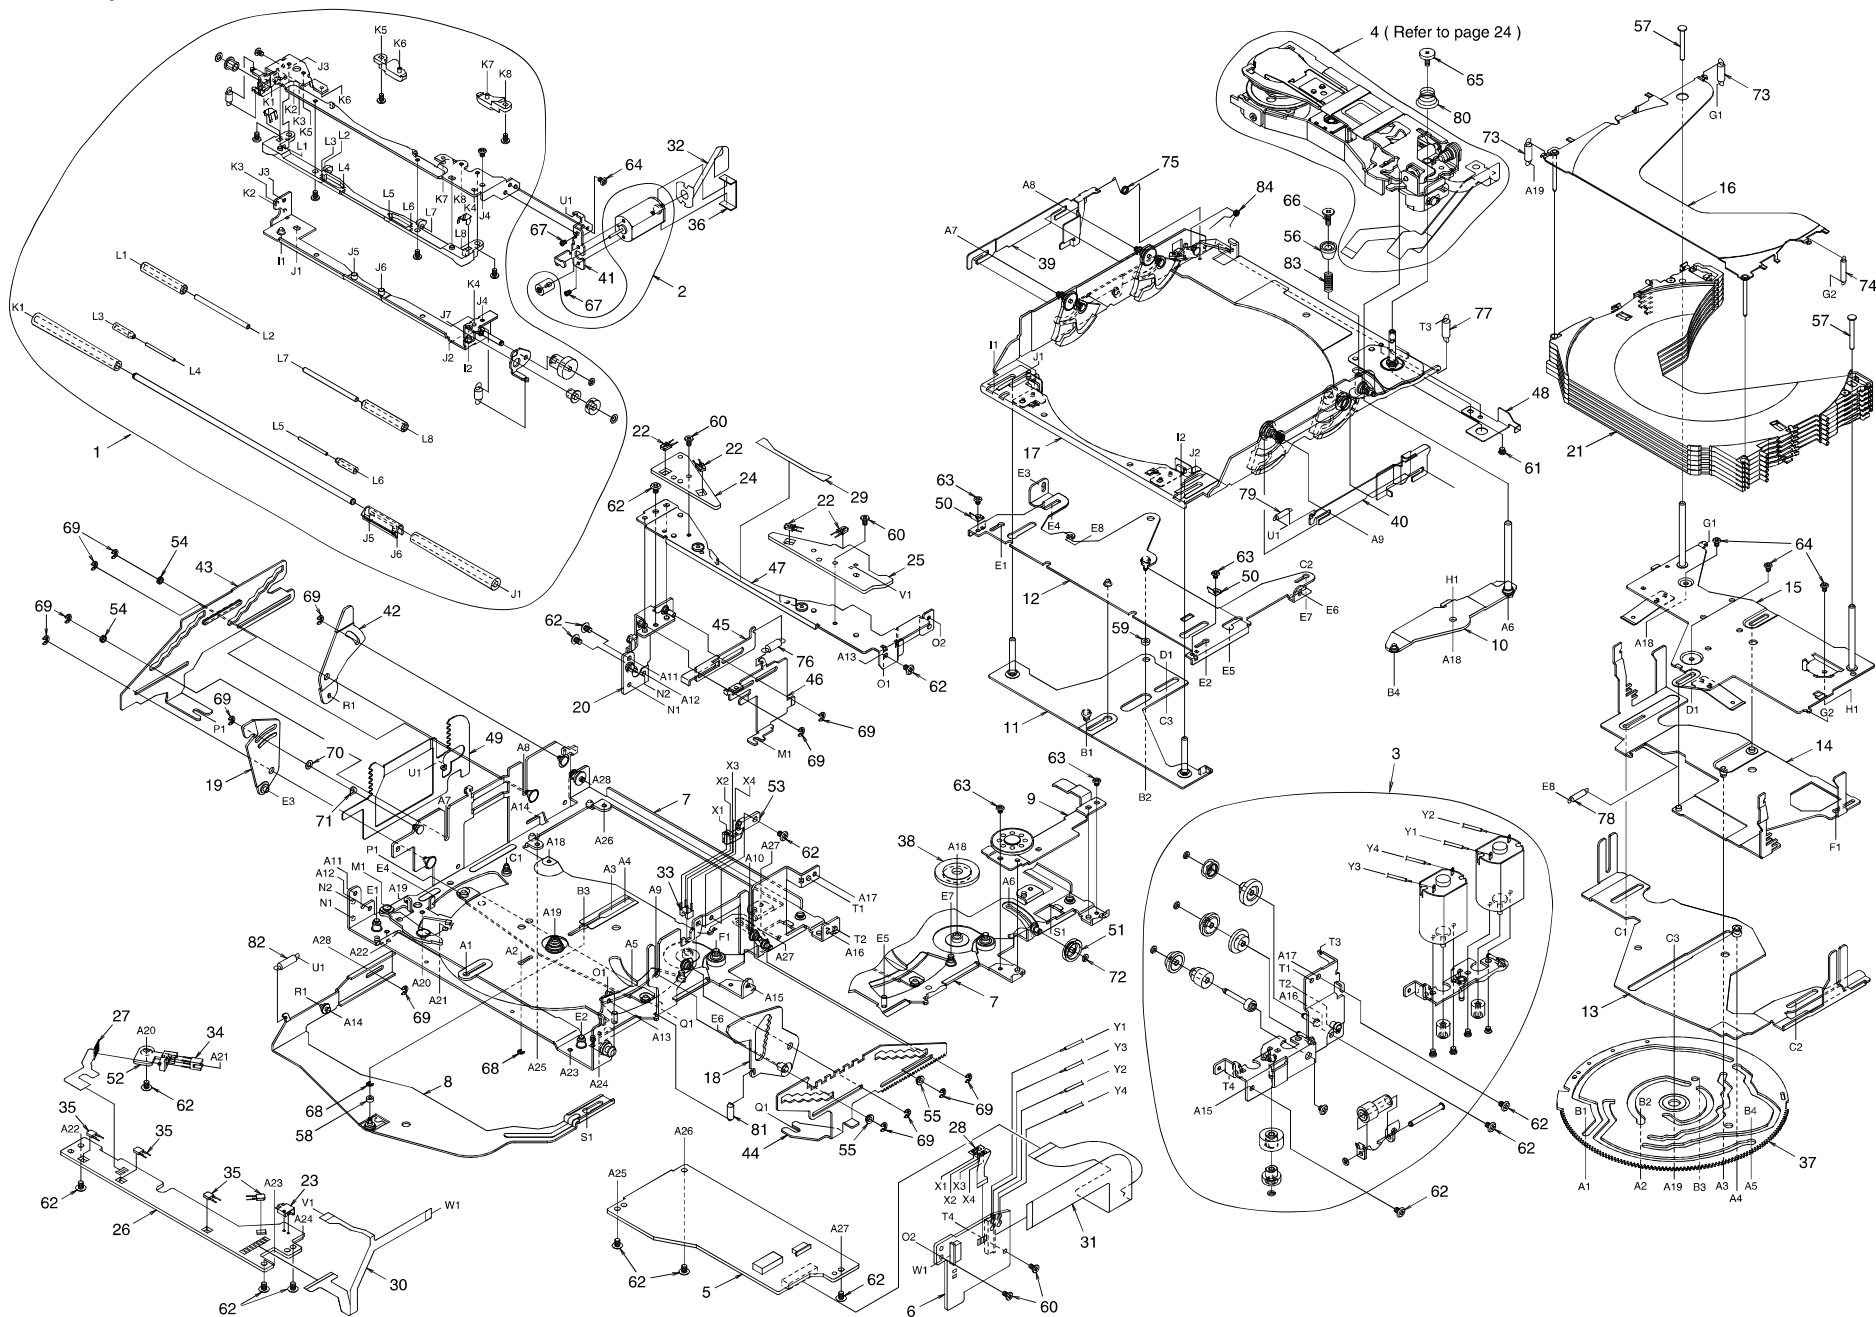

CD changer mechanism section : Drive unit

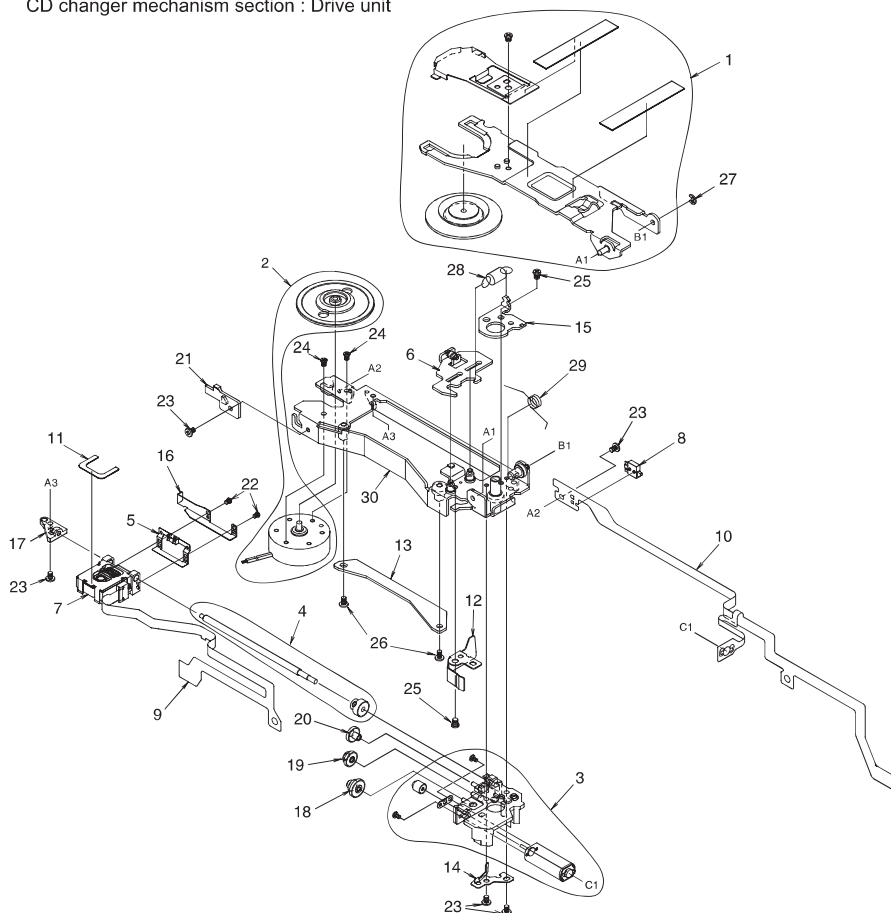


NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-514-100	CLAMPER SUB ASSY	1	16	620-1084-00	SCREW-HOL-PLT	1
2	SMA-185-100	SPINDLE MOTOR ASSY	1	17	621-0670-00	LS-HOLDER-L	1
3	SMA-184-100	SLED MOTOR ASSY	1	18	621-0673-00	D-GEAR A	1
4	HBS-515-101	LS-ASSY	1	19	621-0674-00	D-GEAR B	1
5	966-0621-04	SH-SP-PLT-ASSY	1	20	621-0675-00	D-GEAR C	1
6	966-0622-02	D-SHIFT-P-ASSY	1	21	621-0683-01	DU-STOPPER	1
7	969-0009-00	PICK UP-ASSY	1	22	716-3460-00	SCREW(M1.4×1.8)	2
8	013-7414-50	DETECT SWITCH	1	23	716-3470-00	SCREW(M1.7×3)	5
9	039-2015-00	P/U-FPC	1	24	738-1722-17	PRECISION SCREW	2
10	039-2016-01	M/S-FPC	1	25	738-2025-17	PRECISION SCREW	2
11	347-6632-00	PU-SHEET	1	26	716-3474-00	SCREW(M1.7×3)	2
12	620-1078-00	PUSH PLATE	1	27	743-1500-20	E-RING	1
13	620-1080-01	PU-GUIDE PLATE	1	28	750-3487-00	SHIFT-P-SPRING	1
14	620-1081-00	SCREW PUSH-PLT	1	29	750-3488-00	CLAMP-A-SPRING	1
15	620-1082-01	SPRING PLATE	1	30	966-0619-03	DRIVE PLT-ASSY	1

EXPLODED VIEW ■ PARTS LIST

Tape mechanism section

※ The parts list is on page 29.

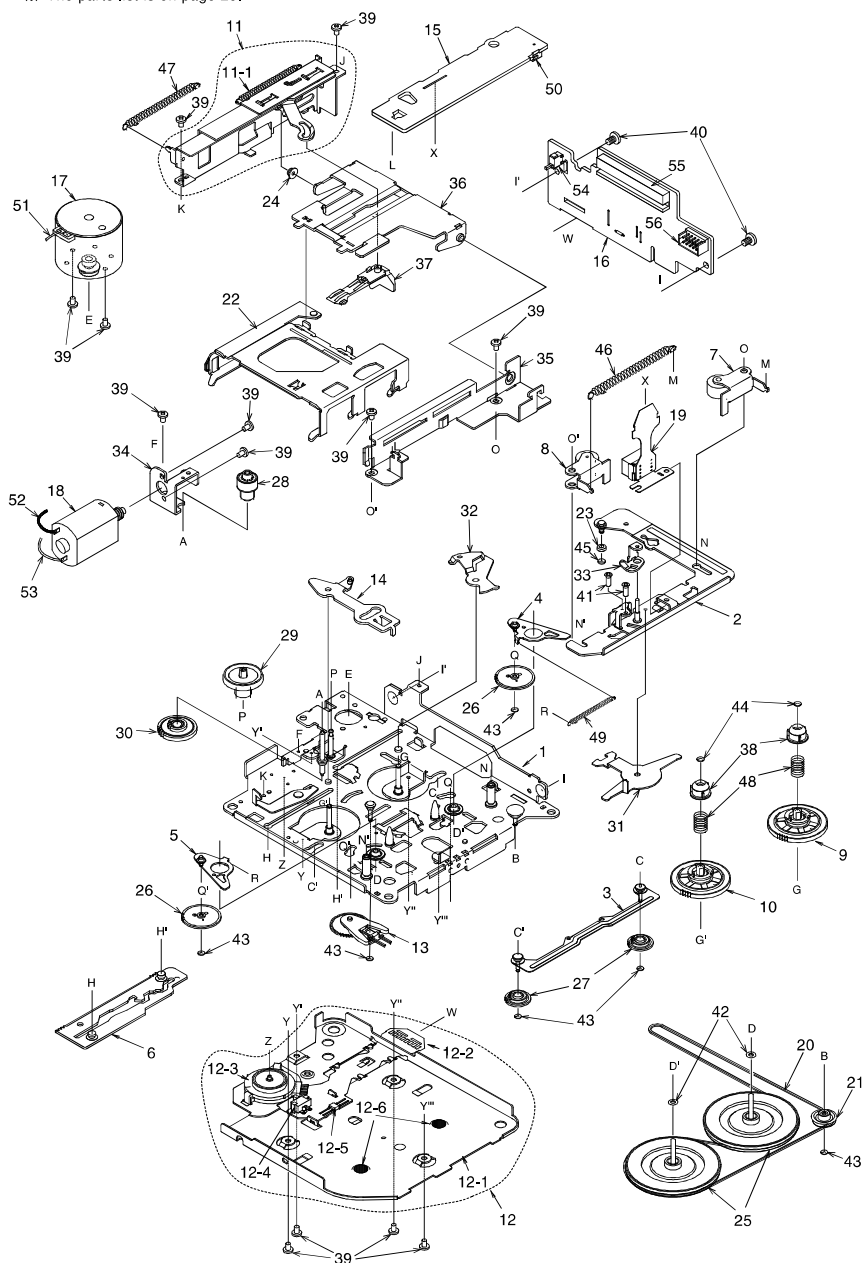

NO.	PART NO.	DESCRIPTION	Q'TY
1	960-4294-22	DECK PLATE ASSY	1
2	960-4261-20	HEAD PLATE ASSY	1
3	960-4262-04	FF/REW-P-ASSY	1
4	960-4263-03	IDLER-P-ASSY L	1
5	960-4264-03	IDLER-P-ASSY R	1
6	960-4266-20	MODE PLATE ASSY	1
7	960-4269-05	ROLLER ASSY F	1
8	960-4270-05	ROLLER ASSY R	1
9	960-4348-03	REEL ASSY F	1
10	960-4349-03	REEL ASSY R	1
11	960-4389-20	EJECT SUB ASSY	1
11-1	750-3020-01	SWITCH PLATE SPRING	1
12	960-4338-09	BOTTOM SUB ASSY	1
12-1	960-4295-02	BOTTOM-P-ASSY	1
12-2	099-9926-01	BOTTOM PWB (WITHOUT COMPONENT)	1
12-3	013-3951-32	SWITCH(MODE)	1
12-4	013-3953-01	SWITCH(METAL)	1
12-5	051-1776-00	IC	1
12-6	746-0767-00	WASHER	2
13	960-4282-06	DETECT SUB ASSY	1
14	960-4301-02	PLAY LINK ASSY	1
15	039-1912-00	SIDE PWB (WITHOUT COMPONENT)	1
16	039-1913-00	REAR PWB (WITHOUT COMPONENT)	1
17	SMA-168-100	MAIN MOTOR ASSY	1
18	SMA-169-100	POWER MOTOR ASSY	1
19	011-0328-01	HEAD	1
20	602-0118-00	BELT	1
21	604-0046-00	TENSION PULLEY	1
22	606-0093-06	PACK GUIDE	1
23	610-0342-01	HEAD-P-ROLLER	1
24	610-0343-00	GUIDE-A-ROLLER	1

NO.	PART NO.	DESCRIPTION	Q'TY
25	611-0091-03	FLYWHEEL	1
26	613-0662-00	IDLER GEAR	2
27	613-0286-03	FF/REW GEAR	2
28	613-0288-01	HELICAL GEAR	1
29	613-0289-01	GEAR A	1
30	613-0337-00	POWER GEAR	1
31	630-2597-01	CHANGE LINK	1
32	630-2598-05	EJECT LINK	1
33	630-2600-01	ADJUST LINK	1
34	630-2601-02	MOTOR PLATE	1
35	630-2626-06	PWB FRAME	1
36	630-2642-01	GUIDE ARM	1
37	631-1992-02	PACK STOPPER	1
38	631-1993-01	SLIDE BUSH	2
39	716-0484-00	SCREW(M2×2.5)	13
40	716-1676-00	PWB SCREW(M2.6×6)	2
41	716-0833-10	SCREW(M2×5.6)	2
42	746-0624-00	WASHER	2
43	746-0724-00	WASHER	6
44	746-0761-00	WASHER	2
45	746-0762-00	WASHER	1
46	750-2946-02	PINCH SPRING	1
47	750-2947-04	EJECT-P-SPRING	1
48	750-2949-00	SLIDE SPRING	2
49	750-3017-02	IDLER-P-SPRING	1
50	074-0898-10	OUTLET SOCKET(10P)	1
51	802-4909-60	WIRE(RED)	1
52	806-4914-60	WIRE(BLU)	1
53	816-2349-00	WIRE(WHT)	1
54	013-3906-00	SWITCH(TAPE IN)	1
55	074-1012-20	OUTLET SOCKET(20P)	1
56	076-0368-10	PLUG(10P)	1