
■EXPLODED VIEW • PARTS LIST


DCP section

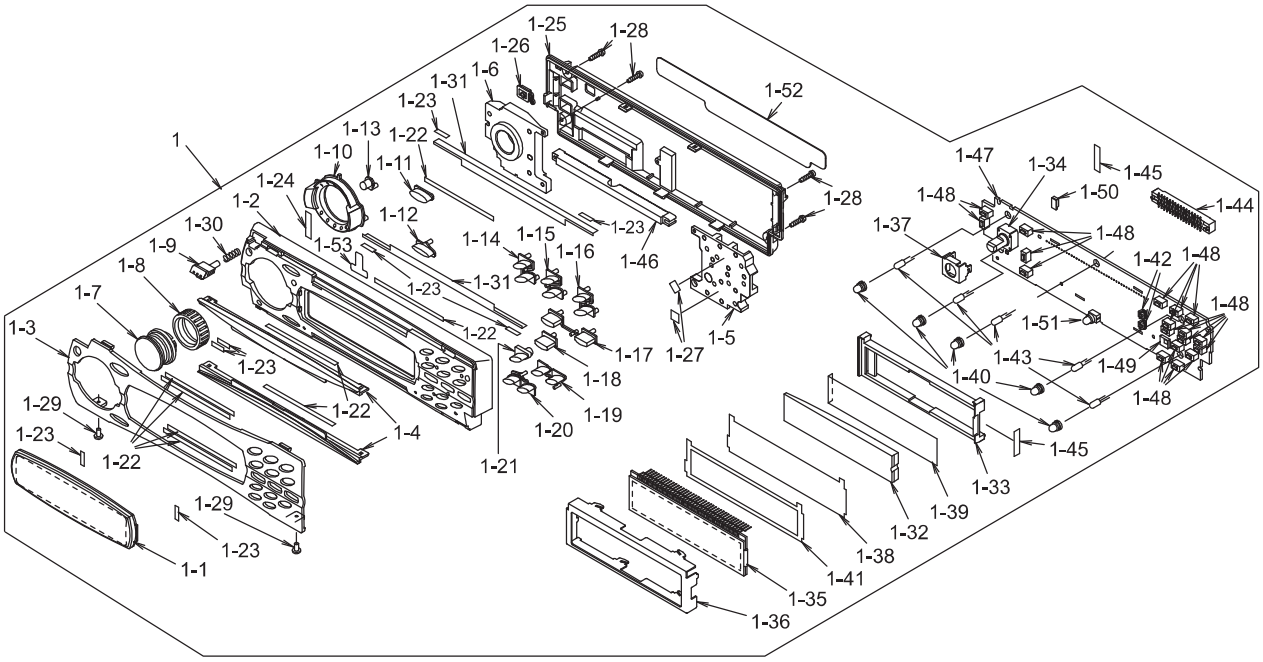

NO.	PART NO.	DESCRIPTION	Q'TY
1	DCP-392-600 DCP-411-800	DCP ASSY(2509B) DCP ASSY(2509K)	1
1-1	373-0985-01 373-0985-00	DIAL COVER(2509B) DIAL COVER(2509K)	1
1-2	370-5993-03 370-5993-02	ESCUTCHEON(2509B) ESCUTCHEON(2509K)	1
1-3	371-5711-02 371-5711-03	FACE PANEL(2509B) FACE PANEL(2509K)	1
1-4	335-6686-00	ILLUMI PLATE	2
1-5	335-6687-00	ILLUMI PLATE	1
1-6	335-6688-02	ILLUMI PLATE	1
1-7	380-5536-01 380-5536-00	KNOB(2509B) KNOB(2509K)	1
1-8	345-8670-00	RUBBER(KNOB)	1
1-9	382-6403-01 382-6403-00	BUTTON(OPEN)(2509B) BUTTON(OPEN)(2509K)	1
1-10	382-6404-01 382-6404-00	BUTTON(SRCH)(2509B) BUTTON(SRCH)(2509K)	1
1-11	382-6405-00	BUTTON(FUNC)	1
1-12	382-6406-00	BUTTON(A/M)	1
1-13	382-6407-00	BUTTON(P/P)	1
1-14	382-6408-00	BUTTON(1/4)	1
1-15	382-6409-00	BUTTON(2/5)	1
1-16	382-6410-01	BUTTON(3/6)	1
1-17	382-6411-01	BUTTON(SCN/RDM)	1
1-18	382-6412-03	BUTTON(RPT)	1
1-19	382-6435-01	BUTTON(BAND)	1
1-20	382-6436-00	BUTTON(DISP)	1
1-21	335-6689-00	IR-FILTER	1
1-22	347-6745-00	DOUBLE FACE	8
1-23	347-6695-00	DOUBLE FACE	8
1-24	347-6697-00	SHADE	1
1-25	335-6493-02	REAR COVER	1

NO.	PART NO.	DESCRIPTION	Q'TY
1-26	382-6109-00	BUTTON(EJECT)	1
1-27	347-6696-00	FILM	2
1-28	716-0872-12	PAD SCREW	4
1-29	714-2003-87	MACHINE SCREW(M2×3)	2
1-30	750-6721-00	SPRING	1
1-31	347-6744-00	FILM	2
1-32	335-6673-00	ILLUMI PLATE	1
1-33	335-6789-00	LCD HOLDER	1
1-34	016-9900-84	ROTARY ENCODER	1
1-35	379-1241-41	INDICATOR	1
1-36	331-3309-00	LCD COVER	1
1-37	331-3337-00	VR HOLDER	1
1-38	347-6692-00	FILM	1
1-39	347-6693-00	REFLECTOR	1
1-40	345-8681-00	LAMP CAP	5
1-41	347-6694-00	FILM	1
1-42	001-7055-90	LED(NSCWS405)	1
1-43	017-0444-00	PILOTLAMP(14V50mA)	5
1-44	076-0647-00	PLUG(16P)	1
1-45	347-6698-00	SHADE	2
1-46	335-6778-00	ILLUMI PLATE	1
1-47	039-2160-00	SWITCH PWB (WITHOUT COMPONENT)	1
1-48	013-6305-50	TACT SWITCH	18
1-49	060-4008-00	IR RECEIVER	1
1-50	013-6504-51	LUMI SWITCH	1
1-51	017-0433-62	PILOTLAMP(14V40mA)	1
1-52	347-6773-00	HEAT PROTECT	1
1-53	347-6704-00	SURGE FILM	1

Main section

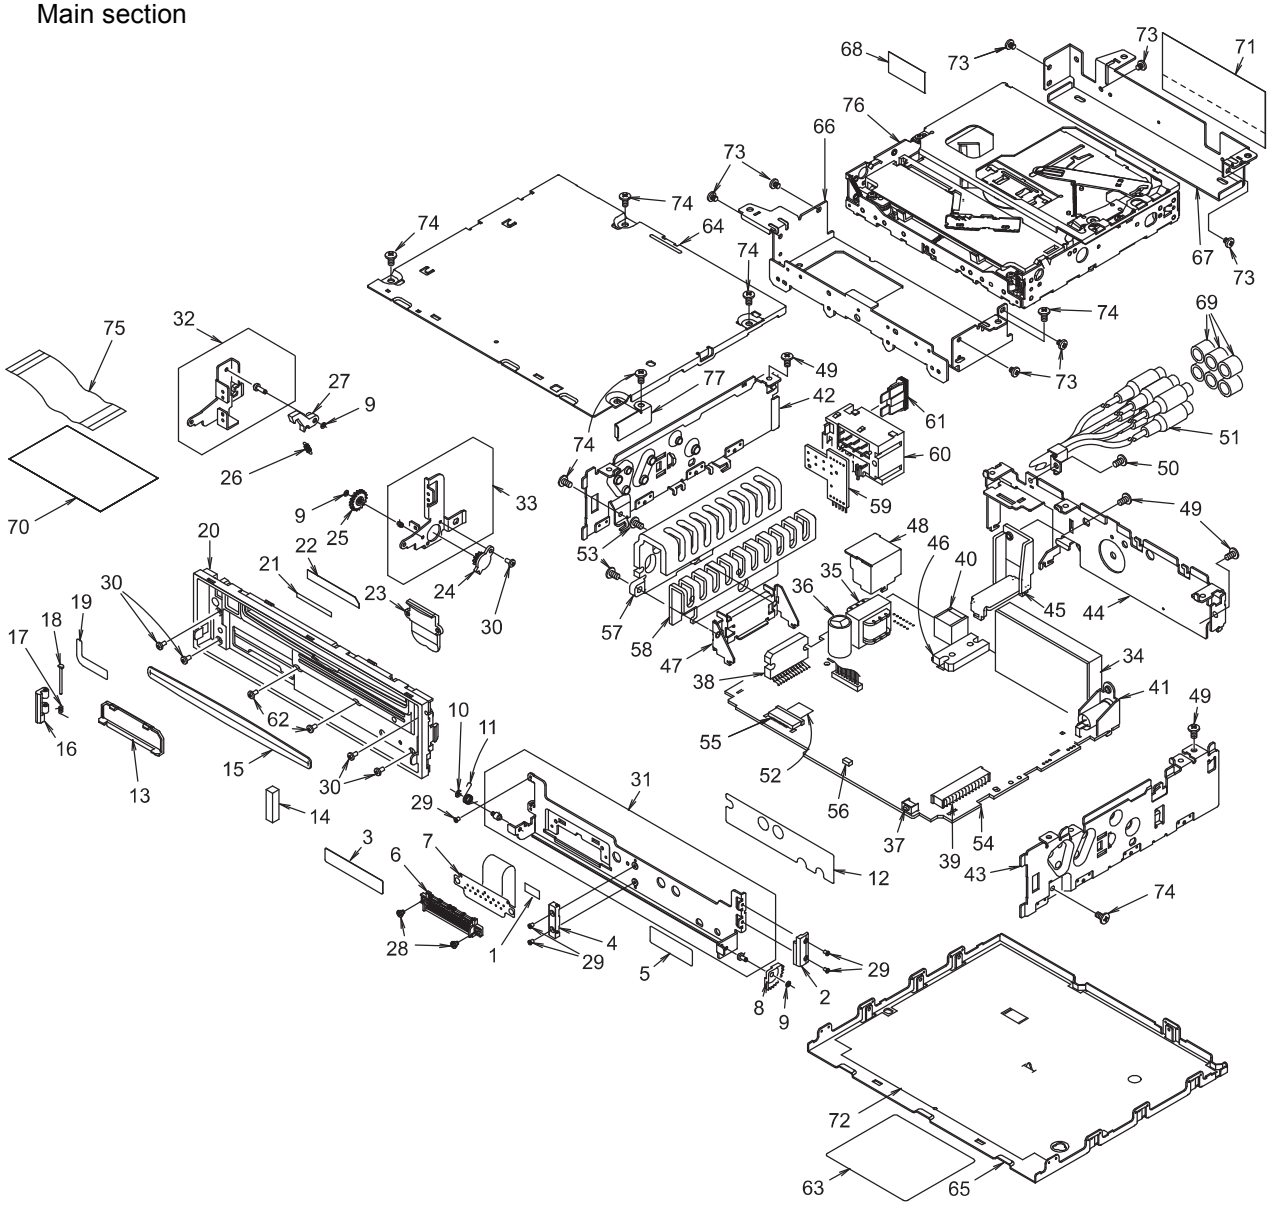

NO.	PART NO.	DESCRIPTION	Q'TY
1	347-6356-00	DOUBLE FACE	1
2	335-6500-01	HOOK	1
3	347-6523-00	FPC SUPPORT	1
4	335-6502-00	SLIDER	1
5	291-0092-00	STICKER	1
6	074-1278-00	OUTLET SOCKET(16P)	1
7	039-1862-00	FLEXIBLE PWB	1
8	613-0684-00	FAN GEAR	1
9	746-0761-00	WASHER	3
10	743-1500-10	E-RING	1
11	750-3342-21	SPRING	1
12	290-7995-00	LABEL	1
13	335-6499-00	CONNECTOR COVER	1
14	345-8607-00	CUSHION	1
15	346-0114-01	LEATHER SHEET	1
16	335-6501-01	HOOK DCP	1
17	750-3454-00	SPRING	1
18	341-1764-00	SHAFT	1

NO.	PART NO.	DESCRIPTION	Q'TY
19	347-6483-00	HEAT PROTECT	1
20	370-5766-07	INNER ESCUTCHEON	1
21	347-5923-00	DOUBLE FACE	1
22	347-5920-00	COVER FILM	1
23	335-5817-00	ILLUMI PLATE	1
24	613-0687-00	GEAR DAMPER	1
25	613-0683-00	GEAR	1
26	750-3341-00	SPRING	1
27	335-6498-00	HOOK LOCK	1
28	716-3444-00	SCREW	2
29	738-1722-17	PRECISION SCREW	5
30	780-2004-01	SCREW	5
31	946-0078-02	HOLDER ASSY	1
32	946-0071-01	ARM L ASSY	1
33	946-0072-01	ARM R ASSY	1
34	880-2089B	TUNER(FM/AM)	1
35	009-9006-60	CHOKE	1
36	042-0447-00	ELE-C(16V2200uF)	1

NO.	PART NO.	DESCRIPTION	Q'TY
37	013-6100-00	SWITCH	1
38	051-2041-00	IC(LA47503)	1
39	074-1138-76	OUTLET SOCKET(26P)	1
40	074-1194-00	OUTLET SOCKET(13P)	1
41	092-4000-51	ANT RECEPTACLE	1
42	305-0274-31	SIDE COVER(L)	1
43	305-0275-30	SIDE COVER(R)	1
44	307-0628-01	REAR COVER	1
45	313-1846-00	HEAT SINK	1
46	051-3297-10	IC(BA4916)	1
47	331-2255-20	IC HOLDER	1
48	331-2820-00	SHIELD CASE	1
49	714-3006-81	MACHINE SCREW(M3×6)	4
50	731-3005-89	TAPTIGHT(M3×5)	1
51	855-5474-50	RCA PIN CORD	1
52	347-6215-00	SPACER FILM	1
53	731-3008-89	TAPTIGHT	2
54	039-2073-02	MAIN PWB (WITHOUT COMPONENT)	1
55	074-1198-68	OUTLET SOCKET(18P)	1
56	001-7062-90	LED	1
57	313-1817-00	HEAT SINK	1

NO.	PART NO.	DESCRIPTION	Q'TY
58	313-1818-00	HEAT SINK	1
59	039-1400-30	ISO PWB (WITHOUT COMPONENT)	1
60	074-1285-00	OUTLET SOCKET(ISO)	1
61	060-0057-57	AUTO FUSE(15A)	1
62	780-2004-01	SCREW	2
63	286-9969-00 286-9987-00 286-9988-00	SETPLATE(2509B) SETPLATE(2509K-A) SETPLATE(2509K-B)	1
64	303-0472-04	UPPER COVER	1
65	304-0460-01	LOWER COVER	1
66	331-3323-00	CD-SUB-BRKT(F)	1
67	331-3324-00	CD-SUB-BRKT(R)	1
68	347-6766-00	INSULATOR	1
69	345-3799-20	RUBBER CAP	6
70	347-6729-00	INSULATOR	1
71	347-6705-00	INSULATOR	1
72	347-5918-00	INSULATOR	1
73	714-2603-80	MACHINE SCREW(M2.6×3)	7
74	731-3006-80	TAPTIGHT(M3×6)	7
75	816-2569-50	FLAT WIRE(26P)	1
76	929-0220-83	CD MECHANISM	1
77	331-2744-00	STOPPER	1


CD mechanism section

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0595-25	DRIVE PLATE ASSY	1
2	969-0060-30	PICK UP UNIT	1
3	039-1944-21	LED PWB (WITHOUT COMPONENT)	1
4	039-1945-20	CD PWB (WITHOUT COMPONENT)	1
5	SMA-182-100	MOTOR ASSY(SPINDLE)	1
6	SMA-183-100	MOTOR ASSY(SLED)	1
7	620-1024-22	CLAMPER LINK	1
8	803-4906-60	VINYL COAT WIRE(ORG)	1
9	816-2591-00	LEAD WIRE(YEL)	1
10	620-1025-22	ID-LOCK PLATE	1
11	620-1026-21	SPRING PLATE	1
12	620-1027-25	LOWER CHASSIS	1
13	620-1028-22	UPPER CHASSIS	1
14	966-0638-20	SH-RACK ASSY	1
15	621-0598-26	UPPER GUIDE	1
16	621-0599-25	ROLLER GUIDE	1
17	621-0600-25	SHIFT LEVER	1
18	621-0601-21	RACK	1
19	621-0602-22	LOCK ARM L	1
20	621-0603-25	LOCK ARM R	1
21	621-0604-22	GEAR BASE	1
22	621-0605-22	GEAR COVER	1
23	621-0606-21	IDLE CASE	1
24	816-2590-00	VINYL COAT WIRE(GRN)	1
25	621-0608-21	SECOND GEAR	1
26	621-0609-20	BASE GEAR	1

NO.	PART NO.	DESCRIPTION	Q'TY
27	621-0610-20	IDLE GEAR A	1
28	621-0611-20	IDLE GEAR B	1
29	621-0612-21	ROLLER GEAR A	1
30	621-0613-20	ROLLER GEAR B	1
31	621-0614-20	ROLLER GEAR C	1
32	621-0615-21	ROLLER GEAR D	1
33	621-0616-20	POWER GEAR A	1
34	621-0617-20	POWER GEAR B	1
35	621-0618-20	POWER GEAR C	1
36	621-0619-20	POWER GEAR D	1
37	621-0620-20	THREAD GEAR A	1
38	621-0621-20	THREAD GEAR B	1
39	621-0622-21	ROLLER SLEEVE	2
40	621-0623-22	LS-HOLDER	1
41	621-0624-22	GUIDE RAIL	1
42	816-2593-00	LEAD WIRE(PUR)	1
43	816-2542-01	FLAT WIRE(10P)	1
44	716-3473-00	SCREW	2
45	621-0709-20	SH-BASE	1
46	621-0629-20	LOADING ROLLER	2
47	345-8704-20	CUSHION RUBBER	1
48	622-1571-21	ROLLER SHAFT	1
49	624-0018-01	LEAD SCREW	1
50	629-0081-20	DAMPER F	2
51	629-0082-20	DAMPER R	1
52	714-2003-81	MACHINE SCREW	2
53	716-1507-00	SCREW	9

NO.	PART NO.	DESCRIPTION	Q'TY
54	716-1733-00	SCREW	2
55	716-3469-00	SPECIAL SCREW	2
56	716-3446-00	SCREW	2
57	750-3465-21	ROLLER SPRING L	1
58	750-3466-20	ROLLER SPRING R	1
59	750-3467-21	SHIFT SPRING	1
60	750-3468-20	RACK SPRING	1
61	750-3469-20	CLAMPER SPRING	1
62	750-3470-20	ID-LOCK SPRING	1
63	816-2592-00	LEAD WIRE(BLU)	1

NO.	PART NO.	DESCRIPTION	Q'TY
64	750-3472-21	DR-SPRING F	2
65	750-3473-20	DR-SPRING RA	1
66	750-3474-20	DR-SPRING RB	1
67	750-3475-21	DR-SPRING C	1
68	620-1023-23	CLAMPER PLATE	1
69	620-1024-23	SENSOR APM	1
70	621-0708-20	CLAMPER RING	1
71	621-0626-21	STOPPER LINK	1
72	621-0627-21	DISC STOPPER	1
73	750-3471-20	SENSOR SPRING	1

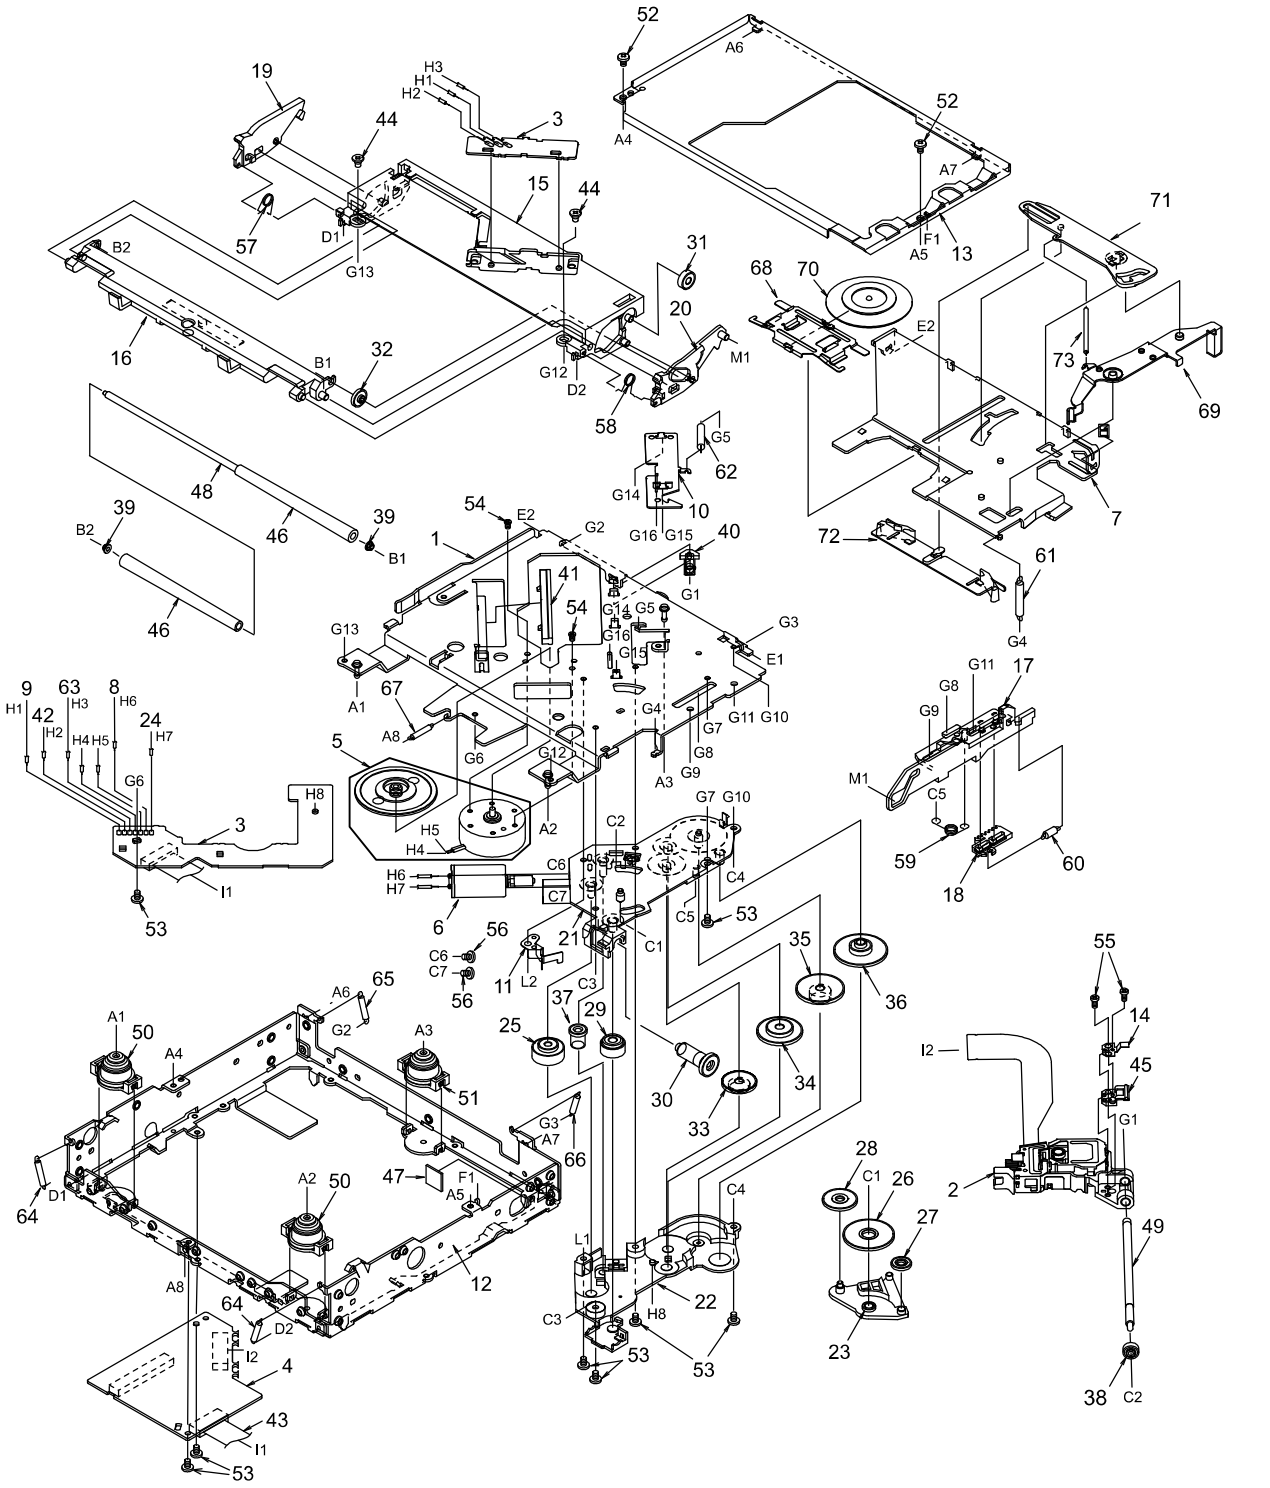

■ELECTRICAL PARTS LIST

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

Main PWB(B1) section

REF No.	PART No.	DESCRIPTION
ANT1	092-4000-51	ANT-RECEPT
BL1	880-2089B	FM/AM TUNER
C1	166-2096-50	2pF CK
C2	166-2201-50	22pF CH
C3	166-2201-50	22pF CH
C4	168-1032-55	0.01 μF
C5	168-1032-55	0.01 μF
C6	168-2232-55	0.022 μF
C7	168-2232-55	0.022 μF
C9	168-1032-55	0.01 μF
C10	168-1022-55	1000pF
C11	182-1053-67	50V1 μF
C12	168-1032-55	0.01 μF
C13	168-2732-55	16V 0.027 μF
C14	168-2732-55	16V 0.027 μF
C17	182-4763-39	16V47 μF
C18	168-2232-55	0.022 μF
C19	168-2232-55	0.022 μF
C20	168-6822-55	6800pF
C21	182-1073-25	10V100 μF
C22	182-4763-39	16V47 μF
C24	168-1045-56	0.1 μF
C25	182-1053-67	50V1 μF
C27	182-4763-19	6.3V47 μF
C28	168-1032-55	0.01 μF
C29	166-1011-50	100pF CH
C30	166-1011-50	100pF CH
C31	168-3312-55	330pF
C32	166-1501-50	15pF CH
C33	166-1501-50	15pF CH
C102	178-2242-78	0.22 μF
C103	178-2242-78	0.22 μF
C104	178-2242-78	0.22 μF
C105	178-2242-78	0.22 μF
C106	182-4763-39	16V47 μF
C107	182-2263-37	16V22 μF
C108	172-2231-15	0.022 μF
C109	182-2253-67	50V2.2 μF
C110	172-3331-15	0.033 μF
C111	172-3331-15	0.033 μF
C112	172-3331-15	0.033 μF
C113	172-3331-15	0.033 μF
C114	183-4743-67	50V0.47 μF
C115	183-4743-67	50V0.47 μF
C210	182-2263-17	6.3V22 μF
C214	042-0447-00	16V2200 μF
C222	182-4763-39	16V47 μF
C223	172-2231-15	0.022 μF
C224	182-2263-37	16V22 μF
C225	182-1073-39	16V100 μF
C227	182-1063-37	16V10 μF
C228	182-4763-39	16V47 μF
C229	182-1063-37	16V10 μF
C230	173-1021-19	1000pF J
C243	182-1073-25	10V100 μF
C244	182-1073-17	6.3V100 μF
C458	182-2263-17	6.3V22 μF
C459	182-2263-17	6.3V22 μF
C460	182-2263-17	6.3V22 μF
C461	182-2263-17	6.3V22 μF
C500	182-1053-67	50V1 μF
C501	182-1053-67	50V1 μF
C502	182-1053-67	50V1 μF
C503	182-1053-67	50V1 μF
C504	182-1063-37	16V10 μF
C505	182-1063-37	16V10 μF
C506	182-1063-37	16V10 μF
C507	182-1063-37	16V10 μF
C512	182-4763-19	6.3V47 μF
C514	182-1063-37	16V10 μF
C515	182-4763-39	16V47 μF
C516	168-1045-56	0.1 μF
C517	168-4722-55	4700pF
C518	168-4722-55	4700pF
C519	182-1053-67	50V1 μF
C520	182-1053-67	50V1 μF
C527	182-1063-37	16V10 μF
C528	182-1063-37	16V10 μF
C529	182-1063-37	16V10 μF
C530	182-1063-37	16V10 μF
C531	168-4732-78	0.047 μF
C532	182-1053-67	50V1 μF
C533	182-1053-67	50V1 μF
C534	166-1011-50	100pF CH
C535	166-1011-50	100pF CH
C536	166-1011-50	100pF CH
C537	166-1011-50	100pF CH
C612	168-4732-78	0.047 μF
C614	168-1032-55	0.01 μF
C615	182-1073-17	6.3V100 μF
C616	182-1063-37	16V10 μF
C617	182-2263-37	16V22 μF
C618	166-1011-50	100pF CH
C619	166-1011-50	100pF CH
C620	166-1011-50	100pF CH
C621	166-1011-50	100pF CH
C622	166-1011-50	100pF CH
C624	166-1011-50	100pF CH
C625	166-1011-50	100pF CH
C626	168-1022-55	1000pF
C627	168-1022-55	1000pF
C628	166-1011-50	100pF CH
C629	166-1011-50	100pF CH
C630	166-1011-50	100pF CH
C631	166-1011-50	100pF CH
C632	168-1022-55	1000pF
C633	166-1011-50	100pF CH
C634	168-2232-55	0.022 μF
C635	166-1011-50	100pF CH
C636	166-1011-50	100pF CH
D102	001-0466-90	S5688B
D103	001-0466-90	S5688B
D104	001-0466-90	S5688B
D105	001-0466-90	S5688B
D106	001-0466-90	S5688B
D107	001-0466-90	S5688B
D108	001-0466-90	S5688B
D109	001-0466-90	S5688B
D110	001-0347-41	MA4075M
D202	001-0516-90	MA111
D203	001-0592-00	RM4Z
D204	001-0466-90	S5688B
D205	001-0466-90	S5688B
D221	001-0516-90	MA111
D225	001-0466-91	S5688G
D501	001-0516-90	MA111
D502	001-0516-90	MA111
D503	001-0347-23	MA4043M
D601	001-7062-90	RBR111C
D603	001-0516-90	MA111
D610	001-0516-90	MA111
D611	001-0516-90	MA111
IC1	051-6201-90	LC72146M
IC101	051-2041-00	LA47503
IC102	051-3297-10	BA4916-V2
IC501	051-5028-90	TDA7409DTR
IC502	051-0350-93	NJM4558M
IC503	051-0556-93	NJM2058M
IC505	051-5437-08	S-80821ANMP-EDJ-E2
IC506	051-0350-93	NJM4558M
IC601	052-3378-00	M30622MCA-F53FP
IC602	051-6600-38	CA0008AM
J601	074-1194-00	13P CE-NET
J602	074-1198-68	18P
J603	074-1138-76	26P
L1	010-2003-04	COIL
L2	010-2230-38	220 μH
L601	010-3100-66	2.2uH
L602	010-3100-66	2.2uH
L603	010-3100-66	2.2uH
L604	010-3100-66	2.2uH
L605	010-3100-66	2.2uH
Q3	125-2004-93	RN1403
Q4	190-1162-00	2SA1162
Q5	190-1162-00	2SA1162
Q210	125-0013-97	RN2427
Q211	125-2004-96	RN1406
Q227	193-1802-61	2SD1802FA
Q228	193-1858-50	2SD1858Q.R
Q452	193-1306-00	2SD1306
Q453	193-1306-00	2SD1306
Q454	193-1306-00	2SD1306
Q455	193-1306-00	2SD1306
Q501	125-2004-96	RN1406
Q502	125-0002-96	RN2406
Q503	192-2712-00	2SC2712
Q505	191-1237-00	2SB1237
Q506	125-2004-96	RN1406
Q507	125-2004-93	RN1403
Q508	125-0002-96	RN2406
Q509	125-2030-90	RN1410
Q602	125-2004-93	RN1403
Q603	190-1162-00	2SA1162
Q604	190-1162-00	2SA1162
Q606	125-2004-93	RN1403
Q607	190-1298-00	2SA1298
Q608	125-2004-93	RN1403
Q609	190-1298-00	2SA1298
Q610	125-2004-93	RN1403
Q611	190-1162-00	2SA1162
Q612	192-2712-00	2SC2712
R3	119-2221-15	1/16W 2.2kΩ
R4	119-1021-15	1/16W 1kΩ
R7	119-1231-15	1/16W 12kΩ
R9	119-1031-15	1/16W 10kΩ
R12	119-2221-15	1/16W 2.2kΩ
R14	119-1031-15	1/16W 10kΩ
R15	119-1031-15	1/16W 10kΩ
R17	119-5631-15	1/16W 56kΩ
R18	119-1521-15	1/16W 1.5kΩ
R19	119-1521-15	1/16W 1.5kΩ
R20	119-1021-15	1/16W 1kΩ
R22	119-1041-15	1/16W 100kΩ
R23	119-1031-15	1/16W 10kΩ
R24	119-1021-15	1/16W 1kΩ
R25	119-1021-15	1/16W 1kΩ
R26	119-8211-15	1/16W 820Ω
R27	119-4741-15	1/16W 470kΩ
R28	119-0000-05	1/16W 0Ω JW
R29	119-1031-15	1/16W 10kΩ
R30	119-2221-15	1/16W 2.2kΩ
R101	119-1231-15	1/16W 12kΩ
R102	119-1031-15	1/16W 10kΩ
R105	119-1021-15	1/16W 1kΩ
R106	119-2291-15	1/16W 2.2Ω
R107	119-2291-15	1/16W 2.2Ω
R108	119-2291-15	1/16W 2.2Ω
R109	119-2291-15	1/16W 2.2Ω
R204	119-3321-15	1/16W 3.3kΩ
R205	119-1831-15	1/16W 18kΩ
R207	119-1231-15	1/16W 12kΩ
R208	119-1011-15	1/16W 100Ω
R209	119-3311-15	1/16W 330Ω
R210	119-1031-15	1/16W 10kΩ
R211	119-1541-15	1/16W 150kΩ
R252	116-1521-15	1/8W 1.5kΩ
R470	119-4721-15	1/16W 4.7kΩ
R471	119-4721-15	1/16W 4.7kΩ
R472	119-4721-15	1/16W 4.7kΩ
R473	119-4721-15	1/16W 4.7kΩ
R476	119-3311-15	1/16W 330Ω
R477	119-3311-15	1/16W 330Ω
R478	119-3311-15	1/16W 330Ω
R479	119-3311-15	1/16W 330Ω

REF No.	PART No.	DESCRIPTION
R481	119-1021-15	1/16W 1kΩ
R482	119-1021-15	1/16W 1kΩ
R501	032-0140-58	1/16W 51kΩ 1%
R502	032-0140-58	1/16W 51kΩ 1%
R503	032-0140-58	1/16W 51kΩ 1%
R504	032-0140-58	1/16W 51kΩ 1%
R505	032-0140-51	1/16W 15kΩ 1%
R506	032-0140-51	1/16W 15kΩ 1%
R507	032-0140-51	1/16W 15kΩ 1%
R508	032-0140-51	1/16W 15kΩ 1%
R509	119-3311-15	1/16W 330Ω
R537	119-8221-15	1/16W 8.2kΩ
R538	119-3321-15	1/16W 3.3kΩ
R540	119-2231-15	1/16W 22kΩ
R541	119-1021-15	1/16W 1kΩ
R542	119-3311-15	1/16W 330Ω
R551	119-4721-15	1/16W 4.7kΩ
R553	119-4721-15	1/16W 4.7kΩ
R554	119-1031-15	1/16W 10kΩ
R557	119-1031-15	1/16W 10kΩ
R558	119-1031-15	1/16W 10kΩ
R559	119-1031-15	1/16W 10kΩ
R560	119-1031-15	1/16W 10kΩ
R561	119-1031-15	1/16W 10kΩ
R562	119-1031-15	1/16W 10kΩ
R565	119-1031-15	1/16W 10kΩ
R566	032-0140-89	1/4W 47kΩ 1%
R567	032-0140-89	1/4W 47kΩ 1%

REF No.	PART No.	DESCRIPTION
R568	032-0140-89	1/4W 47kΩ 1%
R569	032-0140-89	1/4W 47kΩ 1%
R570	032-0140-89	1/4W 47kΩ 1%
R571	032-0140-89	1/4W 47kΩ 1%
R572	032-0140-89	1/4W 47kΩ 1%
R573	032-0140-89	1/4W 47kΩ 1%
R574	119-1041-15	1/16W 100kΩ
R575	119-1041-15	1/16W 100kΩ
R576	119-1021-15	1/16W 1kΩ
R601	119-2221-15	1/16W 2.2kΩ
R602	119-2221-15	1/16W 2.2kΩ
R603	116-6801-15	1/8W 68Ω
R604	119-3321-15	1/16W 3.3kΩ
R607	119-2231-15	1/16W 22kΩ
R608	119-1031-15	1/16W 10kΩ
R609	119-4731-15	1/16W 47kΩ
R610	119-4721-15	1/16W 4.7kΩ
R611	119-1041-15	1/16W 100kΩ
R612	119-1041-15	1/16W 100kΩ
R613	119-4731-15	1/16W 47kΩ
R614	119-4731-15	1/16W 47kΩ
R615	119-1031-15	1/16W 10kΩ
R616	119-4711-15	1/16W 470Ω
R620	119-1031-15	1/16W 10kΩ
R621	116-1221-15	1/8W 1.2kΩ
R627	119-1031-15	1/16W 10kΩ
R628	116-1521-15	1/8W 1.5kΩ
R630	119-0000-05	1/16W 0Ω JW

REF No.	PART No.	DESCRIPTION
R632	119-0000-05	1/16W 0Ω JW
R633	119-0000-05	1/16W 0Ω JW
R634	119-1031-15	1/16W 10kΩ
R635	119-3321-15	1/16W 3.3kΩ
R637	119-0000-05	1/16W 0Ω JW
R638	119-0000-05	1/16W 0Ω JW
R639	119-0000-05	1/16W 0Ω JW
R641	119-0000-05	1/16W 0Ω JW
R642	119-1031-15	1/16W 10kΩ
R643	119-5621-15	1/16W 5.6kΩ
R652	119-1811-15	1/16W 180Ω
R653	119-1811-15	1/16W 180Ω
R654	119-1811-15	1/16W 180Ω
R655	119-1041-15	1/16W 100kΩ
R657	119-1811-15	1/16W 180Ω
R658	119-1521-15	1/16W 1.5kΩ
R659	119-4731-15	1/16W 47kΩ
R660	119-1531-15	1/16W 15kΩ
R661	119-4731-15	1/16W 47kΩ
R662	119-2221-15	1/16W 2.2kΩ
R663	119-1031-15	1/16W 10kΩ
R664	119-2221-15	1/16W 2.2kΩ
R690	119-4721-15	1/16W 4.7kΩ
R691	119-4721-15	1/16W 4.7kΩ
S601	013-6100-00	SKHLLB
T101	009-9006-60	0.23mH
X1	061-1066-00	7.2MHz
X601	060-1505-50	10MHz

Switch PWB(B2) section

REF No.	PART No.	DESCRIPTION
C701	168-1022-55	1000pF
C702	168-4732-78	0.047μF
C703	168-4732-78	0.047μF
C704	042-0416-52	10V10μF TAN
C705	042-0416-52	10V10μF TAN
D703	001-0529-14	MA8030-L
D704	001-0529-29	MA8051-M
D705	001-7055-90	NSCWS405T
D706	001-0529-41	MA8075-M
D707	001-0529-41	MA8075-M
D708	001-0529-41	MA8075-M
D709	001-0529-41	MA8075-M
D710	001-7055-90	NSCWS405T
IC701	051-6013-00	LC75854W
IR701	060-4008-00	RS171
P701	076-0647-00	16P
PL701	017-0444-00	14V50mA
PL702	017-0444-00	14V50mA
PL703	017-0444-00	14V50mA
PL704	017-0444-00	14V50mA
PL705	017-0444-00	14V50mA

REF No.	PART No.	DESCRIPTION
PL706	017-0433-62	14V40mA
Q701	190-1162-00	2SA1162
Q702	125-2004-93	RN1403
Q703	125-2004-93	RN1403
R701	119-4731-15	1/16W 47kΩ
R702	119-1031-15	1/16W 10kΩ
R703	119-1011-15	1/16W 100Ω
R704	119-1021-15	1/16W 1kΩ
R705	119-1011-15	1/16W 100Ω
R706	119-2711-15	1/16W 270Ω
R707	119-1211-15	1/16W 120Ω
R708	119-4711-15	1/16W 470Ω
R709	119-1041-15	1/16W 100kΩ
R710	119-3921-15	1/16W 3.9kΩ
R711	119-1211-15	1/16W 120Ω
R712	119-2221-15	1/16W 2.2kΩ
R714	119-2221-15	1/16W 2.2kΩ
R715	119-3311-15	1/16W 330Ω
R716	119-1011-15	1/16W 100Ω
R717	119-2711-15	1/16W 270Ω
S701	013-6305-50	SKQMAH

REF No.	PART No.	DESCRIPTION
S702	013-6305-50	SKQMAH
S703	013-6305-50	SKQMAH
S704	013-6305-50	SKQMAH
S705	013-6305-50	SKQMAH
S706	013-6305-50	SKQMAH
S707	013-6305-50	SKQMAH
S708	013-6305-50	SKQMAH
S709	013-6305-50	SKQMAH
S710	013-6305-50	SKQMAH
S711	013-6305-50	SKQMAH
S712	013-6305-50	SKQMAH
S713	013-6305-50	SKQMAH
S714	013-6305-50	SKQMAH
S715	013-6305-50	SKQMAH
S716	013-6305-50	SKQMAH
S717	013-6305-50	SKQMAH
S718	013-6305-50	SKQMAH
S721	013-6504-51	LS9J2M-1YG-TX
VR720	016-9900-84	VR W/SHAFT

ISO PWB(B3) section

REF No.	PART No.	DESCRIPTION
J950	074-1285-00	ISO

REF No.	PART No.	DESCRIPTION
FUSE	060-0057-57	15A

CD PWB section(B4):CD mechanism

REF No.	PART No.	DESCRIPTION
C101	168-1042-78	0.1μF
C102	045-4701-50	47pF
C103	046-4722-58	4700pF
C104	168-1042-78	0.1μF
C105	046-1532-78	0.015μF
C106	046-1032-78	0.01μF
C107	046-1032-78	0.01μF
C108	046-4722-58	4700pF
C109	046-1522-58	1500pF
C110	046-3332-78	0.033μF
C111	168-1042-78	0.1μF
C112	046-3332-78	0.033μF
C113	168-1042-78	0.1μF
C114	168-1042-78	0.1μF
C115	046-4712-58	470pF
C116	046-4712-58	470pF
C117	043-0533-50	0.047μF
C118	043-0533-50	0.047μF
C119	045-2701-50	27pF
C120	045-1801-50	18pF
C121	163-1063-35	16V10μF
C122	178-1052-78	1μF
C123	046-1032-78	0.01μF
C124	163-1073-05	4V100μF
C125	168-1042-78	0.1μF
C126	168-1042-78	0.1μF
C129	178-1052-78	1μF
C201	163-3363-05	4V33μF
C202	168-1042-78	0.1μF
C203	178-1052-78	1μF
C204	163-1073-05	4V100μF
C205	163-3363-05	4V33μF
C206	168-1042-78	0.1μF
C207	043-0533-50	0.047μF
C208	046-6822-58	6800pF
C209	168-1042-78	0.1μF
C210	043-0533-50	0.047μF
C211	168-1042-78	0.1μF
C212	168-1042-78	0.1μF
C213	045-5096-50	5pF
C214	045-5601-50	56pF
C215	043-0533-50	0.047μF
C216	178-1052-78	1μF
C217	045-1011-50	100pF
C301	163-1073-35	16V100μF
C302	168-1042-78	0.1μF
C303	043-0533-50	0.047μF
D201	001-0516-90	MA111
IC101	051-6376-00	TC94A14FA
IC102	051-3279-90	BA033LBSG
IC201	051-5710-90	TA2157F
IC301	051-6049-08	BA5983FP-E2
J101	074-1228-76	26P
J201	074-1138-65	15P
J301	074-1138-60	10P
L101	010-2285-57	BLM21B102SPT
L102	010-2285-57	BLM21B102SPT
L103	010-2285-57	BLM21B102SPT
L104	010-2285-57	BLM21B102SPT
L105	010-2285-57	BLM21B102SPT
L401	010-3050-93	10μH
Q201	131-1188-50	2SB1188
R102	033-5621-15	1/16W 5.6kΩ
R104	033-4731-15	1/16W 47kΩ
R105	033-1041-15	1/16W 100kΩ
R108	033-1531-15	1/16W 15kΩ
R109	033-1031-15	1/16W 10kΩ
R110	033-1051-15	1/16W 1MΩ
R111	033-3321-15	1/16W 3.3kΩ
R114	033-2211-15	1/16W 220Ω
R115	033-2211-15	1/16W 220Ω
R116	033-1031-15	1/16W 10kΩ
R117	033-1021-15	1/16W 1kΩ
R131	033-4711-15	1/16W 470Ω
R132	033-2211-15	1/16W 220Ω
R201	117-2201-15	1/10W 22Ω
R202	117-2201-15	1/10W 22Ω
R203	033-1041-15	1/16W 100kΩ
R204	033-1041-15	1/16W 100kΩ
R205	033-1041-15	1/16W 100kΩ
R206	033-1041-15	1/16W 100kΩ
R207	033-1041-15	1/16W 100kΩ
R208	033-8231-15	1/16W 82kΩ
R209	033-6811-15	1/16W 680Ω
R210	033-6831-15	1/16W 68kΩ
R211	033-1831-15	1/16W 18kΩ
R212	033-2721-15	1/16W 2.7kΩ
R213	033-1011-15	1/16W 100Ω
R214	033-1021-15	1/16W 1kΩ
R215	033-1031-15	1/16W 10kΩ
R217	033-1041-15	1/16W 100kΩ
R218	033-2211-15	1/16W 220Ω
R301	117-6811-15	1/16W 680Ω
R304	033-3921-15	1/16W 3.9kΩ
R305	033-3921-15	1/16W 3.9kΩ
R306	033-1041-15	1/16W 100kΩ
R307	033-2211-15	1/16W 220Ω
X102	060-1528-90	16.934M

LED PWB section(B5):CD mechanism

REF No.	PART No.	DESCRIPTION
D1	001-7058-90	AN1105W-RR
D2	001-7058-90	AN1105W-RR
J1	074-1138-60	10P
Q1	060-4015-90	PS1192H
Q2	060-4015-90	PS1192H
S1	013-7414-50	CHUCKING
S2	013-7413-50	LIMIT