

1. Set label position

2. QC label position

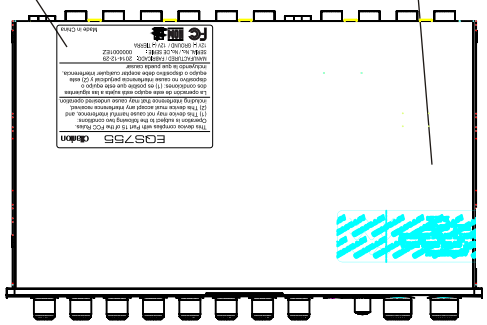


3. Put EQ into PE bag

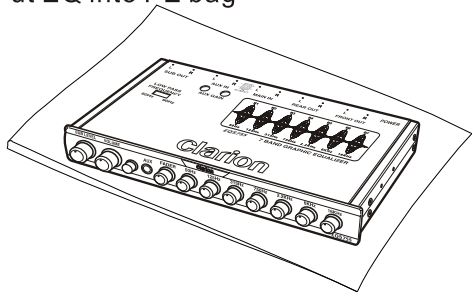


9. Gift box

10. Mounting bracket. Put them in the open side of the inner box.

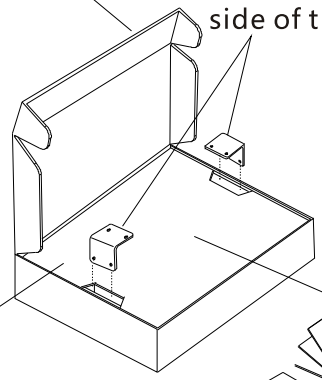

11. Owner's manual

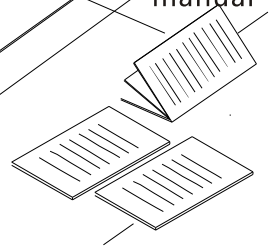


Put the packed inner box into gift box


12. Warranty card

Bottom of giftbox

13. Serial no. Label (CCA) under UPC barcode

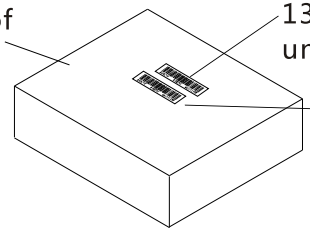


14. Serial no. Label (Mexico) under UPC bar code

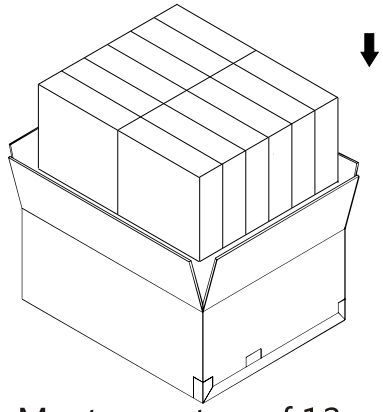


Put into inner box after sealed PE bag

4. Inner box

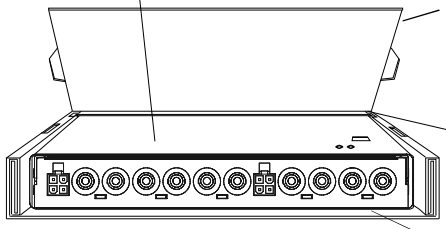

8. Cardboard to protect the both ends of EQ






5. Accessory: power cable




6. Accessory: high level input cable



7. Screw bag.

Put item 5, 6 and 7 accessory into inner box

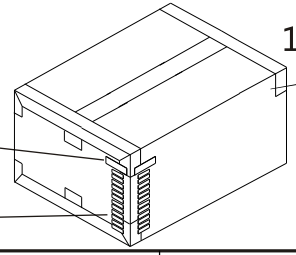

MASTER CARTON UPC

Bar code

15. Master carton of 12pcs EQ


Seal the top and bottom of master carton by tape.
Tape width is about 50mm.

ITEM #	PART #	DESCRIPTION	UNIT	Q'TY
1	LABA-0036	PRODUCT SET LABEL 66*48*0.05mm	PCS	1
2	LABA-0045	QC LABEL 90*21mm	PCS	1
3	PE-2622-06PE	PE BAG 260*220*0.06mm	PCS	1
4	PAD-IND0062	INNER BOX 206*150*34mm	PCS	1
5	COW-DPW0017	POWER CABLE with 1A FUSE	PCS	1
6	COW-DPW0018	HIGH LEVEL INPUT CABLE	PCS	1
7	LS-FBC0-0603	SCREW BLACK M3*6MM P=0.5MM	PCS	4
7	LS-FBGG-1604	SCREW BLACK TAPPING Φ4*16	PCS	4
7	PE-7350-03GG-01	ZIPPER BAG 73*50*0.03mm	PCS	1
7	ST-FB10-0100	WASHERΦ10*1MM BLACK	PCS	4
8	PAD-IND0063	INNER CARDBOARD 180*27mm	PCS	2
9	GB-EQS755	EQS755 GIFT BOX 208*157*40mm	PCS	1
10	JJ-FB30-3001	BRACKET 30*30.2*1.0MM	PCS	2
11	SPB-EQS755	OWNER'S MANUAL	PCS	1
12	SPB-EQS755-1	WARRANTY CARD (ENGLISH & FRENCH)	PCS	1
12	SPB-EQS755-2	WARRANTY CARD (MEXICO VERSION)	PCS	1
12	A7-000025-1A-A	WARRANTY CARD LABEL 40*15mm	KIT	1
13	LABA-0034	BAR CODE LABEL 60*15*0.05mm (USA)	KIT	1
14	LABA-0044	BAR CODE LABEL 60*15*0.05mm (MEXICO)	PCS	1

UBUY INAUSTRIAL CORP. 天杰企业有限公司			ARAWN BY: Jack	
	FINISH:		CHECKEA BY:	
TITLE: 包裝示意圖 / PART NO:	ISSUE: A / SCALE: 1:1 / PAGE: 1/1		APPROVEA BY:	
	REV: 1.00 / UNIT: MM / SIZE: A4			QTY:
MOAEL: EQS755				

■EXPLODED VIEW / PARTS LIST

ITEM #	PART #	DESCRIPTION	UNIT	Q'TY
1	TOPP-0008	TOP COVER 165*103*0.8MMPC	PCS	1
2	LS-FBC0-0205	SCREW M2.5*5MM P=0.45mm TAPPING BLACK	PCS	10
3	TOPS-0008	TOP COVER 178*103mm*12mm BLACK	PCS	1
4	BZBB-0006	NON CLOTH 60.5*14*0.2MM	PCS	1
4A	BZBB-0005	NON CLOTH 89.5*14*0.2MM	PCS	1
5	29-1609-0300-ED	EVA16*9*3.0MM BLACK	PCS	1
6	EQS755-01	EQS755 PCB ASSEMBLE	PCS	1
7	BRKS-0023	BRACKET 176.4*21.2*16.4mm	PCS	1
8	VR ASSY	WASHER FOR VR1-10	PCS	10
9	VR ASSY	HEX NUT FOR VR1-10	PCS	10
13	M2-000006-4K-A	ALUMI PLATE L=183MM BLACK	PCS	1
14	NP-EQS746	CLARION DIAMOND CUT BADGE	PCS	1
15	04-1000-0000	VR CAP Φ10.4MM D-AXLE	PCS	2
16	04-0700-0000	VR CAP Φ7.9MM D-AXLE	PCS	8
17	31-1000-0000	RUBBER COVER Φ10.2*5.5MM BLACK	PCS	2
18	04-1806-00GG	AUX KNOB Φ6*18.5MM CHROME	PCS	1
19	31-0700-0000	RUBBER COVER Φ7.7*5.5MM BLACK	PCS	8
20	29-1793-0200-PD	ISOLATED FIBER SHEET 173*93*0.25MM RED	PCS	1
21	BOPS-0025	BOTTOM COVER 178*103mm BLACK	PCS	1
22	LS-FBCG-0205-01	SCREW Φ2.5*5MM PHILLIPS BLACK	PCS	2
23	P3-000009-76-A	PC LIGHT GUIDE PLATE	PCS	1
24	29-1500-1015-EB	EVA BAR SSV4057-06-002150*5*1.0t BLACK EVA SORT - 4	PCS	1

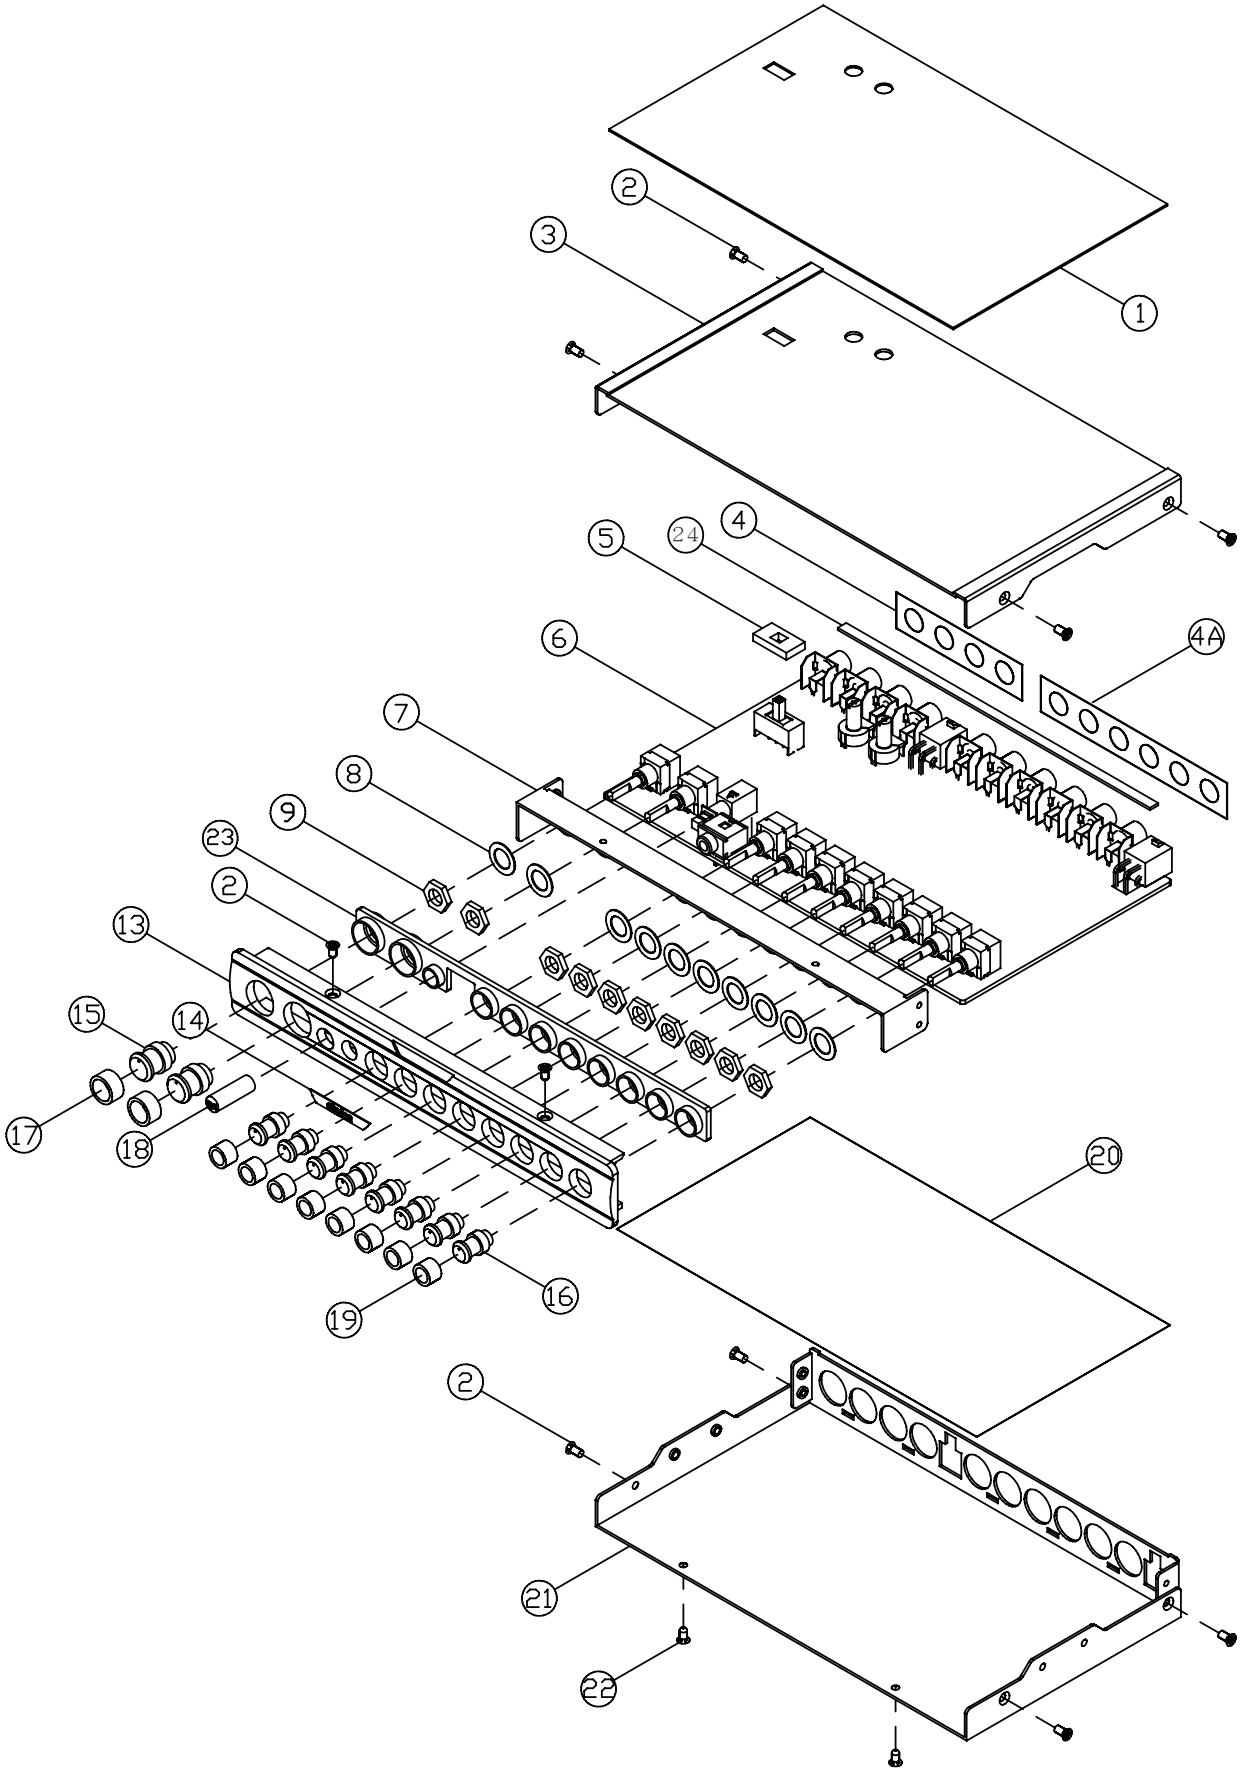

EQS755

■ELECTRICAL PART LIST

PART #	DESCRIPTION	UNIT	Q'TY	LOCATION #
CEP106J1HHR5P-02	E/CAPACITOR 10uF/50V 105℃ BLACK	PCS	7	C1 C8 C15 C16 C17 C18 C73
CML-682J2AOAP-04	MPF/CAPACITOR 682J 100V	PCS	2	C2 C10
CML-103J2AOAP-04	MPF/CAPACITOR 103J/100V	PCS	5	C3 C11 C53 C76 C77
CML-473J2AOAP-04	MPF/CAPACITOR 473J/100V	PCS	2	C4 C12
C5-11H101-E6JZ	CAP NPO 0603 CER 100P 50V +-5%	PCS	2	C5 C9
C5-31H104-E6KZ	CAP 0603 X7R CER 0.1U 50V +-10%	PCS	16	C6 C7 C13 C14 C21 C22 C28 C29 C41 C42 C43 C44 C54 C55 C71 C72
CEP226J1EHR5P-01	E/CAPACITOR 22uF/25V 105℃ BLACK	PCS	2	C19-20
C5-11H330-E6JZ	CAP NPO 0603 CER 33P 50V +-5%	PCS	6	C23 C24 C26 C27 C30 C31
CEP475J1HYR5P-01	E/CAPACITOR 4.7UF/50V	PCS	2	C25 C32
CML-104J2AOAP-02	MPF/CAPACITOR 104J/100V	PCS	4	C33 C34 C58 C59
CEP225J1HYR5P-01	E/CAPACITOR 2.2uF/50V 105℃ BLACK	PCS	2	C35 C37
CML-333J2AOAP-01	MPF/CAPACITOR 333/100V	PCS	4	C36 C40 C68 C69
CEP227J1EHRAP-02	E/CAPACITOR 220uF/25V 105℃ BLACK	PCS	2	C38 C39
CEP105J1HHR5P-02	E/CAPACITOR 1uF/50V 105℃ BLACK	PCS	2	C45 C48
CML-123J2AOAP-02	MPF/CAPACITOR 123J 100V	PCS	2	C46 C47
CEP224J1HYR5P-01	E/CAPACITOR 0.22UF/50V	PCS	2	C49 C52
CML-153J2AOAP-03	MPF/CAPACITOR 153J 100V	PCS	2	C50 C51
CML-472J2AOAP-01	MPF/CAPACITOR 472J/100V	PCS	4	C56 C57 C60 C61
C6-31H104-E6KZ	CAP 0805 X7R CER 0.1U 50V +-10%	PCS	3	C62 C70 C78
CML-392J2AOAP-01	MPF/CAPACITOR 392J 100V	PCS	1	C63
CEP227J1CHRAP-01	E/CAPACITOR 220uF/16V 105℃ BLACK	PCS	2	C64 C66
CML-222J2AOAP-01	MPF/CAPACITOR 222J/100V	PCS	2	C65 C67
CML-152J2AOAP-02	MPF/CAPACITOR 152J/100V	PCS	2	C74 C75
DS-D0IN4148-T	DIODE 1N4148 DO-35 100V 150MA	PCS	4	D1 D2 D3 D4
DIOS-1N4001	1N4001-MELF-DIODE SMT 1A 50V MELF	PCS	2	D5 D6
40-LH15-0060	JUMMPER WIRE Φ0.6*15mm	PCS	1	GND1
COT-RCA0008	RCA JACK GOLD PLATE /WHITE HOLE	PCS	5	J1 J3 J7 J9 J11
COT-RCA0009	RCA JACK GOLD PLATE / RED HOLE	PCS	5	J2 J4 J8 J10 J12
COT-PHO0001	3.5MM HEADPHONE JACK W/ SWITCH	PCS	1	J5
COT-OUT0026	POWER TERMINAL	PCS	2	J6 J13
LED-08B-0001	LED BLUE 0805 SMT-BIS170TS-JPH	PCS	13	LED1-13
PCB-FR40088	PCB173*100.7*1.6/mm	PCS	1	PCB
R2-PRB223-76-A	VR 22K BLACK	PCS	2	P2 P3
ST1-MPSA27H	TRIODO MPSA27	PCS	2	Q1 Q2
TRSS-MMBTA06LT1	NPN MMBTA06 SOT-23 80V 500MA	PCS	2	Q3 Q5
ST1-2N6726H	TRIODO 2N6726 central MPS751G/ONT	PCS	1	Q4
CRE-SD06J104	RESISTOR SMT 0603 5% 100K	PCS	4	R1 R4 R18 R20
CRE-SD06J103	RESISTOR SMT 0603 5% 10K	PCS	4	R2 R3 R5 R6
CRE-SD08J222	RESISTOR SMT 0805 5% 2.2K	PCS	1	R12
CRE-SD06J222	RESISTOR SMD 0603 5% 2.2K	PCS	2	R13 R14
CRE-SD12J101	RESISTOR SMT 1206 5% 100	PCS	4	R15 R16 R19 R21
CRE-SD12J111	RESISTOR SMT 1206 5% 110	PCS	2	R17 R22
CRE-SD06J203	RESISTOR SMT 0603 5% 20K	PCS	8	R27 R28 R29 R30 R33 R34 R35 R36
CRE-SD06J393	RESISTOR SMT 0603 5% 39K	PCS	6	R38 R39 R46 R47 R48 R49
CRE-SD06J511	RESISTOR SMT 0603 5% 510	PCS	14	R42 R43 R44 R45 R50 R51 R52 R53 R62 R63 R67 R68 R76 R77
CRE-SD06J273	RESISTOR SMT 0603 5% 27K	PCS	4	R55 R56 R59 R60

■ELECTRICAL PART LIST

PART #	DESCRIPTION	UNIT	Q'TY	LOCATION #
CRE-SD12J102	RESISTOR SMT 1206 5% 1K	PCS	2	R61 R66
CRE-SD08J103	RESISTOR SMT 0805 5% 10K	PCS	3	R64 R65 R72
CRE-SD08J102	RESISTOR SMT 0805 5% 1K	PCS	11	R7 R23 R24 R25 R26 R37 R40 R41 R54 R69 R78
CRE-SD06J183	RESISTOR SMT 0603 5% 18K	PCS	2	R70 R71
CRE-SD08J221	RESISTOR SMT 0805 5% 220	PCS	1	R73
CRE-SD06J153	RESISTOR SMT 0603 5% 15K	PCS	2	R74 R75
CRE-SD06J302	RESISTOR SMT 0603 5% 3K	PCS	6	R8 R9 R10 R11 R31 R32
SW-PH22X-01	SLIDE SWITCH SS2P2T-7*16.5	PCS	1	SW1
SW-PL22X-08	PUSH SWITCH PS2P2T	PCS	1	SW2