Exploded View (Cabinet)

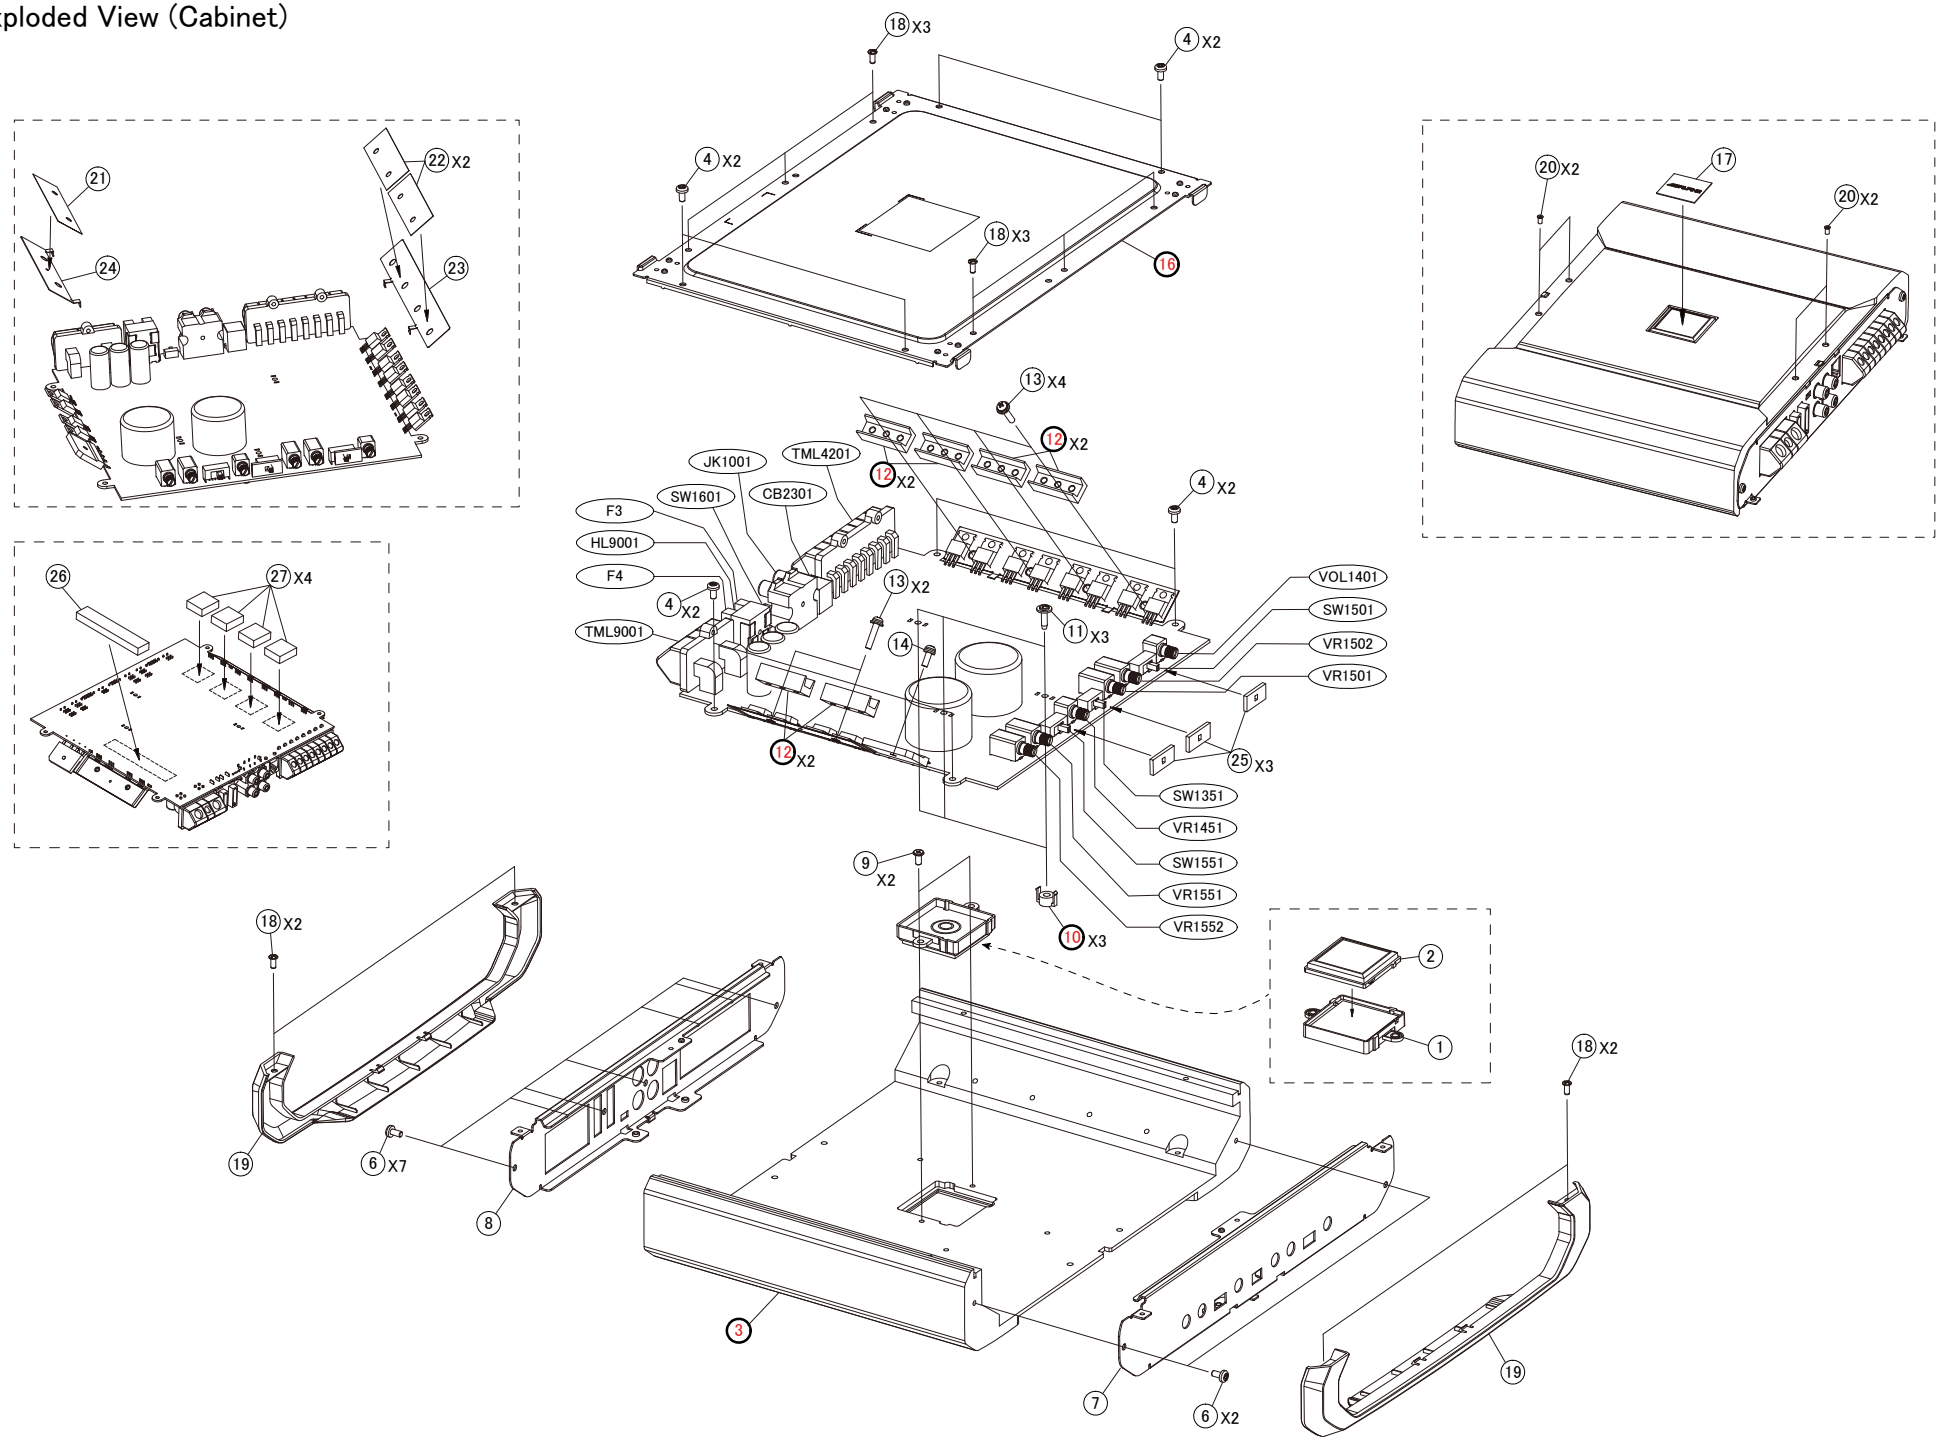

MODEL	Symbol No.	Parts No.	Description
	1	15E45308S01	LENS, HOLDER
	2	61E45288S01	LENS,INDICATOR
	3	- - - - - - - - -	HEAT SINK, MAIN
	4	03E38671S01	SCR,M3X6(B)(WHT)
	6	03E38698S01	SCR,M3X8(P)(BLK)
	7	27E45319S01	CHAS, SIDE FR
	8	27E45320S01	CHAS, SIDE RR
	9	03E43904S01	SCR,M3X6(B)(WHT)
	10	- - - - - - - - -	SUPPORT;PWB
	11	03E39165S01	SCR,M3X11(WP)(WHT)
	12	- - - - - - - - -	HEAT SINK, BAR
	13	03E38094S01	SCR,M3X15.5(WHT)
	14	03E40789S01	SCR,M3X9 (WS)(WHT)
	16	- - - - - - - - -	COVER, BOTTOM
	17	33E45287S01	PLATE,LOGO
	18	03E43645S01	SCR,M2.6X6(B)(WHT)
	19	15E45285S01	COVER,TERMINAL
	20	03E45291S01	SCR,M2.6X4(F)MCH(BLK)
	21	14E45283S01	INSULATOR,73X19.7
	22	14E45284S01	INSULATOR,66X19.7
	23	07E45300S01	BKT,SHIELD-B
	24	07E45299S01	BKT,SHIELD-A
	25	15E45286S01	COVER,SLIDE SW
	26	75E45289S01	GAPPAD_85x15x6T
	27	75E45290S01	GAPPAD_20x20x6T
	CB2301	09E42970S01	CONN,JACK 6P

MODEL	Symbol No.	Parts No.	Description
	F3	65E43983S01	FUSE,30A
	F4	65E43983S01	FUSE,30A
	HL9001	09E42149S01	HOLDER,FUSE
	JK1001	09E42147S01	CONN,RCA 4P
	SW1351	40E41432S01	SW,SLIDE SK-22D15-G6
	SW1501	40E45321S01	SW,SLIDE CSS-SK24D3G
	SW1551	40E45321S01	SW,SLIDE CSS-SK24D3G
	SW1601	40E45118S01	SW,SLIDE CSE-SK12D2G
	TML4201	09E45306S01	CONN,JSZ 8P
	TML9001	09E45307S01	CONN,JSZ 3P
	VOL1401	18E41507S01	VOL,ROTARY 50KX2
	VR1451	18E41507S01	VOL,ROTARY 50KX2
	VR1501	18E42155S01	VOL,ROTARY 20KX4
	VR1502	18E45310S01	VOL,ROTARY 50KX4
	VR1551	18E42155S01	VOL,ROTARY 20KX4
	VR1552	18E45309S01	VOL,ROTARY 20KX4

Packing Method View

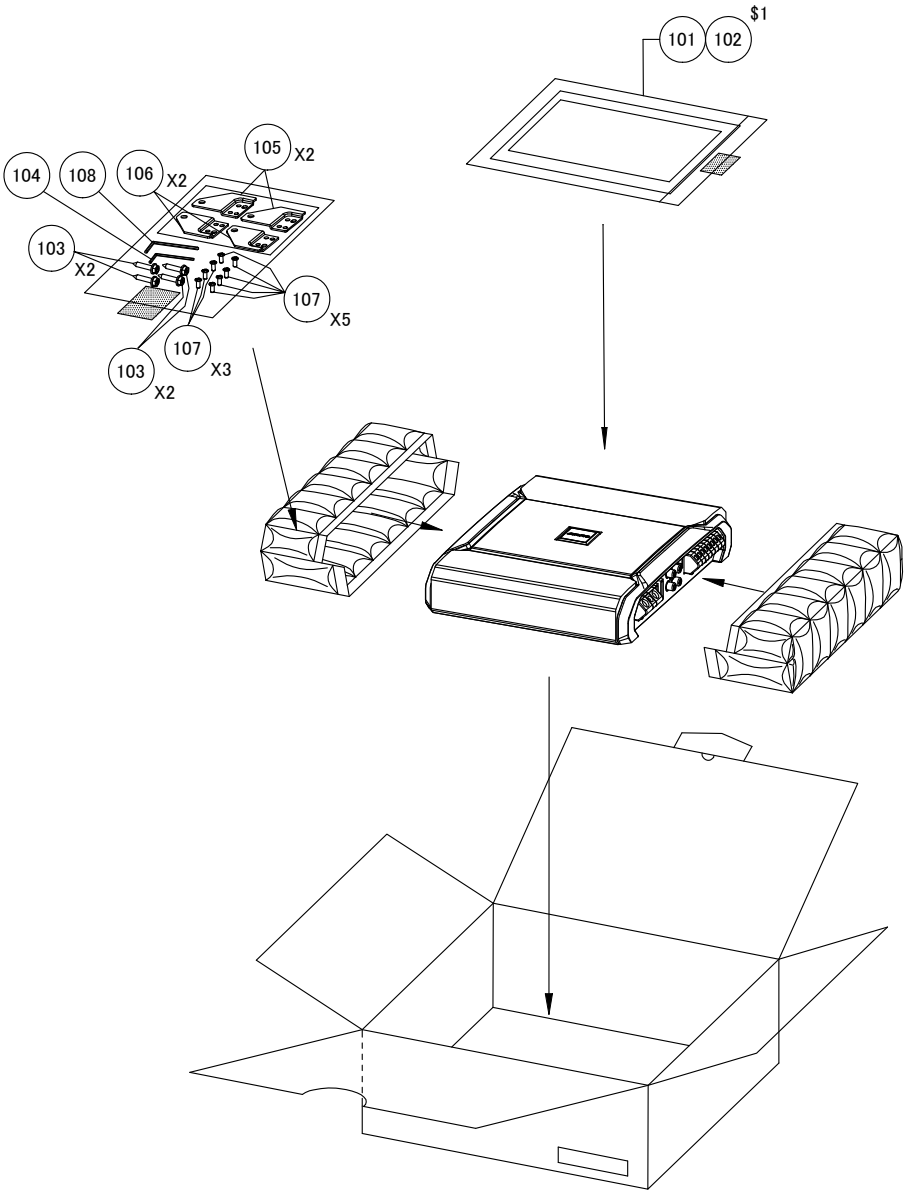

MODEL	Symbol No.	Parts No.	Description
	101	68-35792Z61	MANUAL OWNER'S
$1	102	68-35792Z62	MANUAL OWNER'S (EU)
	103	03E40419S01	SCR,M4X20(BLK)
	104	03E36691S01	WRENCH,HEX. 2X2.3
	105	07E45301S01	Mounting Bracket,A
	106	07E45302S01	Mounting Bracket,B
	107	03E43645S01	SCR,M2.6X6(B)(WHT)
	108	47E35196S01	WRENCH(3X3.5)

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1001	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1002	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1003	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1004	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1005	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1006	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1007	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1008	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1101	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1102	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1103	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1104	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1105	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1106	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1107	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1108	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1151	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1152	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1153	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1154	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1155	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1156	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1157	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1158	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1201	08E45228S01	CAP,CER.33pF/50V CP 1608
MAIN-P.W.Board			C1202	08E45228S01	CAP,CER.33pF/50V CP 1608

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1203	08E45228S01	CAP,CER.33pF/50V CP 1608
MAIN-P.W.Board			C1204	08E45228S01	CAP,CER.33pF/50V CP 1608
MAIN-P.W.Board			C1205	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1206	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1251	08E45228S01	CAP,CER.33pF/50V CP 1608
MAIN-P.W.Board			C1252	08E45228S01	CAP,CER.33pF/50V CP 1608
MAIN-P.W.Board			C1253	08E45228S01	CAP,CER.33pF/50V CP 1608
MAIN-P.W.Board			C1254	08E45228S01	CAP,CER.33pF/50V CP 1608
MAIN-P.W.Board			C1255	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1256	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1401	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1402	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1403	08E45223S01	CAP,CER.10pF/50V CP 1608
MAIN-P.W.Board			C1404	08E45223S01	CAP,CER.10pF/50V CP 1608
MAIN-P.W.Board			C1451	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1452	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1453	08E45223S01	CAP,CER.10pF/50V CP 1608
MAIN-P.W.Board			C1454	08E45223S01	CAP,CER.10pF/50V CP 1608
MAIN-P.W.Board			C1501	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1502	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1503	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1504	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1505	08E43011S01	CAP,FILM 120nF/63V
MAIN-P.W.Board			C1506	08E43011S01	CAP,FILM 120nF/63V
MAIN-P.W.Board			C1507	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1508	08E43373S01	CAP,CER. 0.22uF/50V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1509	08E42119S01	CAP,FILM 180nF/63V
MAIN-P.W.Board			C1510	08E42119S01	CAP,FILM 180nF/63V
MAIN-P.W.Board			C1511	08E45304S01	CAP,MYL. 27uF/63V
MAIN-P.W.Board			C1512	08E45304S01	CAP,MYL. 27uF/63V
MAIN-P.W.Board			C1513	08E45303S01	CAP,MYL. 15uF/63V
MAIN-P.W.Board			C1514	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1515	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1516	08E45303S01	CAP,MYL. 15uF/63V
MAIN-P.W.Board			C1551	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1552	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1553	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1554	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1555	08E43011S01	CAP,FILM 120nF/63V
MAIN-P.W.Board			C1556	08E43011S01	CAP,FILM 120nF/63V
MAIN-P.W.Board			C1557	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1558	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1559	08E42119S01	CAP,FILM 180nF/63V
MAIN-P.W.Board			C1560	08E42119S01	CAP,FILM 180nF/63V
MAIN-P.W.Board			C1561	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1562	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1563	08E43938S01	CAP,FILM 0.01uF/63V
MAIN-P.W.Board			C1564	08E43938S01	CAP,FILM 0.01uF/63V
MAIN-P.W.Board			C1565	08E45273S01	CAP,CER.22pF/50V CP 1608
MAIN-P.W.Board			C1566	08E45273S01	CAP,CER.22pF/50V CP 1608
MAIN-P.W.Board			C1567	08E43938S01	CAP,FILM 0.01uF/63V
MAIN-P.W.Board			C1568	08E43938S01	CAP,FILM 0.01uF/63V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1601	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1602	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1603	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1604	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1605	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1606	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1607	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1608	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1861	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1862	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1863	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1864	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1869	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1870	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1871	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1872	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2001	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2002	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2005	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2006	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2007	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2061	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2062	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C2063	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2064	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2065	08E42325S01	CAP,CER. 0.01uF/50V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C2107	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2161	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C3001	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3002	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3004	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3005	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3021	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3022	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3024	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3025	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3041	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3042	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3044	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3045	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3061	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3062	08E38105S01	CAP,CER. 270pF/50V
MAIN-P.W.Board			C3064	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3065	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3201	08E43487S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3221	08E43487S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3241	08E43487S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3261	08E43487S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3281	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3282	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3283	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3602	08E43373S01	CAP,CER. 0.22uF/50V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3603	08E45305S01	CAP,CER. 220nF/50V
MAIN-P.W.Board			C3604	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3606	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3607	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3608	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3609	08E43487S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3621	08E45305S01	CAP,CER. 220nF/50V
MAIN-P.W.Board			C3622	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3623	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3625	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3626	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3627	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3628	08E43487S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3641	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3642	08E45305S01	CAP,CER. 220nF/50V
MAIN-P.W.Board			C3643	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3645	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3646	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3647	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3648	08E43487S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3661	08E45305S01	CAP,CER. 220nF/50V
MAIN-P.W.Board			C3662	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3663	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3665	08E36566S01	CAP,CER. CP 4.7nF
MAIN-P.W.Board			C3666	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C3667	08E43373S01	CAP,CER. 0.22uF/50V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3668	08E43487S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3701	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C3702	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3703	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3704	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3705	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3721	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C3722	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3723	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3724	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3725	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3741	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C3742	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3743	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3744	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3745	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3761	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C3762	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3763	08E40758S01	CAP,CER.330pF/100V
MAIN-P.W.Board			C3764	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C3765	08E42141S01	CAP,CER. 2.2uF/50V
MAIN-P.W.Board			C4001	08E45153S01	CAP,MYL. 1.5uF/160V
MAIN-P.W.Board			C4002	08E45221S01	CAP,CER.1nF/100V CP 2012
MAIN-P.W.Board			C4021	08E45153S01	CAP,MYL. 1.5uF/160V
MAIN-P.W.Board			C4022	08E45221S01	CAP,CER.1nF/100V CP 2012
MAIN-P.W.Board			C4041	08E45153S01	CAP,MYL. 1.5uF/160V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C4042	08E45221S01	CAP,CER.1nF/100V CP 2012
MAIN-P.W.Board			C4061	08E45153S01	CAP,MYL. 1.5uF/160V
MAIN-P.W.Board			C4062	08E45221S01	CAP,CER.1nF/100V CP 2012
MAIN-P.W.Board			C4081	08E45221S01	CAP,CER.1nF/100V CP 2012
MAIN-P.W.Board			C4082	08E43994S01	CAP,CER. 470pF/100V
MAIN-P.W.Board			C4201	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4202	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4203	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4204	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4205	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4206	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4207	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4208	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4261	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C4262	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C4701	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4702	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4703	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4704	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4705	08E42417S01	CAP,CER. 1500pF/50V
MAIN-P.W.Board			C4901	08E45305S01	CAP,CER. 220nF/50V
MAIN-P.W.Board			C4902	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C4903	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C5001	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5002	08E43993S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C5003	08E43373S01	CAP,CER. 0.22uF/50V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5004	08E42324S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C5005	08E42965S01	CAP,CER. 22nF/16V
MAIN-P.W.Board			C5007	08E42325S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5008	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5009	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5010	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5011	08E41391S01	CAP,CER. 0.47uF/25V
MAIN-P.W.Board			C5012	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C5013	08E43496S01	CAP,CER. 4.7uF/16V
MAIN-P.W.Board			C5014	08E43496S01	CAP,CER. 4.7uF/16V
MAIN-P.W.Board			C5017	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5019	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5023	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5025	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5028	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C5501	08E37151S01	CAP,CER.CP 470pF/50V
MAIN-P.W.Board			C5502	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C5505	08E37151S01	CAP,CER.CP 470pF/50V
MAIN-P.W.Board			C5506	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C5509	08E37151S01	CAP,CER.CP 470pF/50V
MAIN-P.W.Board			C5510	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C5513	08E37151S01	CAP,CER.CP 470pF/50V
MAIN-P.W.Board			C5514	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C5515	08E37151S01	CAP,CER.CP 470pF/50V
MAIN-P.W.Board			C5516	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C5519	08E37151S01	CAP,CER.CP 470pF/50V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5520	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C5523	08E22081S01	CAP.CER-102-J-CP
MAIN-P.W.Board			C5524	08E22081S01	CAP.CER-102-J-CP
MAIN-P.W.Board			C5525	08E22081S01	CAP.CER-102-J-CP
MAIN-P.W.Board			C5526	08E22081S01	CAP.CER-102-J-CP
MAIN-P.W.Board			C5527	08E22081S01	CAP.CER-102-J-CP
MAIN-P.W.Board			C5528	08E22081S01	CAP.CER-102-J-CP
MAIN-P.W.Board			C6501	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6502	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6561	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C6562	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7002	08E45238S01	CAP,CER.180pF/50V CP 1608
MAIN-P.W.Board			C7004	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7005	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7006	08E45238S01	CAP,CER.180pF/50V CP 1608
MAIN-P.W.Board			C7007	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7008	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7009	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7010	08E45236S01	CAP,CER.150pF/50V CP 1608
MAIN-P.W.Board			C7011	08E45236S01	CAP,CER.150pF/50V CP 1608
MAIN-P.W.Board			C7021	08E45238S01	CAP,CER.180pF/50V CP 1608
MAIN-P.W.Board			C7024	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7025	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7026	08E45238S01	CAP,CER.180pF/50V CP 1608
MAIN-P.W.Board			C7027	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7028	08E43373S01	CAP,CER. 0.22uF/50V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C7029	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7030	08E45236S01	CAP,CER.150pF/50V CP 1608
MAIN-P.W.Board			C7031	08E45236S01	CAP,CER.150pF/50V CP 1608
MAIN-P.W.Board			C7042	08E45238S01	CAP,CER.180pF/50V CP 1608
MAIN-P.W.Board			C7044	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7045	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7046	08E45238S01	CAP,CER.180pF/50V CP 1608
MAIN-P.W.Board			C7047	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7048	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7049	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7050	08E45236S01	CAP,CER.150pF/50V CP 1608
MAIN-P.W.Board			C7051	08E45236S01	CAP,CER.150pF/50V CP 1608
MAIN-P.W.Board			C7061	08E45238S01	CAP,CER.180pF/50V CP 1608
MAIN-P.W.Board			C7064	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7065	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7066	08E45238S01	CAP,CER.180pF/50V CP 1608
MAIN-P.W.Board			C7067	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7068	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C7069	08E41395S01	CAP,CER.1500pF/50V
MAIN-P.W.Board			C7070	08E45236S01	CAP,CER.150pF/50V CP 1608
MAIN-P.W.Board			C7071	08E45236S01	CAP,CER.150pF/50V CP 1608
MAIN-P.W.Board			C8001	08E45086S01	CAP,CER. 200pF/50V
MAIN-P.W.Board			C8002	08E37118S01	CAP,CER.CP 220pF/50V
MAIN-P.W.Board			C8003	08E45086S01	CAP,CER. 200pF/50V
MAIN-P.W.Board			C8004	08E45086S01	CAP,CER. 200pF/50V
MAIN-P.W.Board			C8005	08E45086S01	CAP,CER. 200pF/50V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C8006	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C8901	08E45305S01	CAP,CER. 220nF/50V
MAIN-P.W.Board			C8902	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9001	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9002	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9003	08E45227S01	CAP,CER.10nF/630V CP 3216
MAIN-P.W.Board			C9101	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C9301	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9302	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9303	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9304	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9305	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9306	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9307	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9308	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9309	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C9310	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C9601	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9701	08E41391S01	CAP,CER. 0.47uF/25V
MAIN-P.W.Board			C9702	08E40362S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C9703	08E45216S01	CAP,CER.10nF/50V CP 1608
MAIN-P.W.Board			C9704	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9705	08E43373S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C9706	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9707	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9708	08E42138S01	CAP,CER. 0.1uF/16V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C9709	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9710	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9711	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9712	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9713	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9714	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9715	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9716	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9717	08E42138S01	CAP,CER. 0.1uF/16V
MAIN-P.W.Board			C9901	08E45227S01	CAP,CER.10nF/630V CP 3216
MAIN-P.W.Board			C9902	08E45227S01	CAP,CER.10nF/630V CP 3216
MAIN-P.W.Board			C9903	08E45219S01	CAP,CER.220nF/50V CP 2012
MAIN-P.W.Board			C9904	08E45219S01	CAP,CER.220nF/50V CP 2012
MAIN-P.W.Board			C9905	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9906	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9907	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9908	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C9909	08E45227S01	CAP,CER.10nF/630V CP 3216
MAIN-P.W.Board			C9910	08E45227S01	CAP,CER.10nF/630V CP 3216
MAIN-P.W.Board			CB2301	09E42970S01	CONN,JACK 6P
MAIN-P.W.Board			D1001	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D1101	48E45102S01	DIO,ARRAY DAP202UM
MAIN-P.W.Board			D1102	48E45102S01	DIO,ARRAY DAP202UM
MAIN-P.W.Board			D1103	48E45103S01	DIO,ARRAY DAN202UM
MAIN-P.W.Board			D1104	48E45103S01	DIO,ARRAY DAN202UM
MAIN-P.W.Board			D1151	48E45102S01	DIO,ARRAY DAP202UM

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D1152	48E45102S01	DIO,ARRAY DAP202UM
MAIN-P.W.Board			D1153	48E45103S01	DIO,ARRAY DAN202UM
MAIN-P.W.Board			D1154	48E45103S01	DIO,ARRAY DAN202UM
MAIN-P.W.Board			D1702	48E45102S01	DIO,ARRAY DAP202UM
MAIN-P.W.Board			D1761	48E45102S01	DIO,ARRAY DAP202UM
MAIN-P.W.Board			D1972	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D1973	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2001	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2002	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2005	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2006	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2061	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2062	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D2101	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D2161	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D2201	48E45103S01	DIO,ARRAY DAN202UM
MAIN-P.W.Board			D2202	48E45103S01	DIO,ARRAY DAN202UM
MAIN-P.W.Board			D2203	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3001	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3002	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D3021	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3022	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D3041	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3042	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D3061	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3062	48E45101S01	DIO,ARRAY DAN217UM

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D3601	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3602	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3621	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3622	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3641	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3642	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3661	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3662	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4001	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4021	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4041	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D4061	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D5001	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			D5003	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D7001	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D7021	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D7041	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D7061	48E45101S01	DIO,ARRAY DAN217UM
MAIN-P.W.Board			D9501	48E45103S01	DIO,ARRAY DAN202UM
MAIN-P.W.Board			D9502	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9661	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9662	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9663	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9664	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9665	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9666	48E45104S01	DIO,SHT RB510VM-30FH

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D9667	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9668	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9669	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9670	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9671	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9672	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9673	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9674	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9675	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9676	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9677	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9678	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9679	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9680	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9681	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9682	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9683	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9684	48E45104S01	DIO,SHT RB510VM-30FH
MAIN-P.W.Board			D9801	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9802	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9901	48E41410S01	DIODE,D30XBN20
MAIN-P.W.Board			E1001	23E45241S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1002	23E45241S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1003	23E45241S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1004	23E45241S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1005	23E45241S01	CAP,ELY.10uF/35V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E1006	23E45241S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1007	23E45241S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1008	23E45241S01	CAP,ELY.10uF/35V
MAIN-P.W.Board			E1703	23E45315S01	CAP,ELY.4.7uF/35V
MAIN-P.W.Board			E1704	23E45315S01	CAP,ELY.4.7uF/35V
MAIN-P.W.Board			E1761	23E45315S01	CAP,ELY.4.7uF/35V
MAIN-P.W.Board			E1762	23E45315S01	CAP,ELY.4.7uF/35V
MAIN-P.W.Board			E2201	23E45311S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E3281	23E45326S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E3282	23E45326S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E3601	23E45246S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3621	23E45246S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3641	23E45246S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3661	23E45246S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E3701	23E45314S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3702	23E45314S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3721	23E45314S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3722	23E45314S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3741	23E45314S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3742	23E45314S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3761	23E45314S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E3762	23E45314S01	CAP,ELY.47uF/50V
MAIN-P.W.Board			E4261	23E45093S01	CAP,ELY. 33uF/10V
MAIN-P.W.Board			E4262	23E45093S01	CAP,ELY. 33uF/10V
MAIN-P.W.Board			E4901	23E45316S01	CAP,ELY.220uF/25V
MAIN-P.W.Board			E4902	23E45239S01	CAP,ELY.100uF/16V

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E5001	23E44468S01	CAP,ELY. 680uF/16V
MAIN-P.W.Board			E5002	23E45246S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E6501	23E45243S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E6502	23E45243S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E6561	23E45243S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E6562	23E45243S01	CAP,ELY.22uF/25V
MAIN-P.W.Board			E8901	23E45242S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E8902	23E45239S01	CAP,ELY.100uF/16V
MAIN-P.W.Board			E9001	23E45328S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9101	23E45313S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E9301	23E45242S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E9302	23E45242S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E9303	23E45311S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E9304	23E45311S01	CAP,ELY. 10uF/25V
MAIN-P.W.Board			E9305	23E45242S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E9306	23E45242S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E9701	23E45246S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9702	23E45239S01	CAP,ELY.100uF/16V
MAIN-P.W.Board			E9703	23E45246S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9901	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9902	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9903	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9904	23E45091S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			E9905	23E45091S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			F3	65E43983S01	FUSE,30A
MAIN-P.W.Board			F4	65E43983S01	FUSE,30A

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			F9801	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9802	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9803	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9804	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9805	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9806	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9807	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9808	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			HL9001	09E42149S01	HOLDER,FUSE
MAIN-P.W.Board			IC1101	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1102	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1151	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1152	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1201	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1251	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1401	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1451	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1501	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1502	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1503	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1504	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1551	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1552	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1553	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1554	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC1861	51E45325S01	IC,NJM8080RB1

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC1862	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC2001	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC2061	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC3281	51E43360S01	IC,MC74VHC
MAIN-P.W.Board			IC3601	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC3621	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC3641	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC3661	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC4701	51E39596S01	IC,BA2901FV
MAIN-P.W.Board			IC4901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC5001	51E44073S01	IC,AS78L05RTR
MAIN-P.W.Board			IC5002	51E45259S01	IC,KIC7642T5
MAIN-P.W.Board			IC5003	51E45259S01	IC,KIC7642T5
MAIN-P.W.Board			IC5004	51E43972S01	IC,UPD78F0515AGAA2
MAIN-P.W.Board			IC7001	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC7021	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC7041	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC7061	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9701	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board			IC9702	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC9703	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC9704	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC9705	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC9706	51E45325S01	IC,NJM8080RB1
MAIN-P.W.Board			IC9707	51E45325S01	IC,NJM8080RB1

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			JK1001	09E42147S01	CONN,RCA 4P
MAIN-P.W.Board			L4001	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4021	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4041	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L4061	24E42986S01	COIL,IND. 10uH
MAIN-P.W.Board			L5001	24E40217S01	COIL,IND. 10uH
MAIN-P.W.Board			L5002	24E40217S01	COIL,IND. 10uH
MAIN-P.W.Board			L9001	24E41435S01	COIL,IND. 47uH
MAIN-P.W.Board			L9002	24E45317S01	COIL CHOKE. 3.3uH
MAIN-P.W.Board			L9101	24E40217S01	COIL,IND. 10uH
MAIN-P.W.Board			LD8001	48E45250S01	LED,RED VCKB1111CS
MAIN-P.W.Board			LD8002	48E45095S01	LED,RED VFHR1111C
MAIN-P.W.Board			LD8003	48E45250S01	LED,RED VCKB1111CS
MAIN-P.W.Board			LD8004	48E45250S01	LED,RED VCKB1111CS
MAIN-P.W.Board			LD8005	48E45250S01	LED,RED VCKB1111CS
MAIN-P.W.Board			Q1601	48E45162S01	TR,DTC143XUAFRAT106
MAIN-P.W.Board			Q1602	48E45161S01	TR,DTA123YUAFRAT106
MAIN-P.W.Board			Q1603	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q1604	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q1605	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q1606	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q1701	48E45164S01	TR,UMD3NFHATR
MAIN-P.W.Board			Q1702	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q1704	48E45276S01	TR ,KRC404E
MAIN-P.W.Board			Q1761	48E45276S01	TR ,KRC404E
MAIN-P.W.Board			Q1762	48E45117S01	TR,UMX1NFHATN

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q1763	48E45164S01	TR,UMD3NFHATR
MAIN-P.W.Board			Q2101	48E45322S01	TR ,KRC402E
MAIN-P.W.Board			Q2161	48E45322S01	TR ,KRC402E
MAIN-P.W.Board			Q2201	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q2202	48E45324S01	TR,KRA102S
MAIN-P.W.Board			Q3001	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3002	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q3003	48E45106S01	TR,UMT1NFHATN
MAIN-P.W.Board			Q3021	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3022	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q3023	48E45106S01	TR,UMT1NFHATN
MAIN-P.W.Board			Q3041	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3042	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q3043	48E45106S01	TR,UMT1NFHATN
MAIN-P.W.Board			Q3061	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3062	48E45117S01	TR,UMX1NFHATN
MAIN-P.W.Board			Q3063	48E45106S01	TR,UMT1NFHATN
MAIN-P.W.Board			Q3201	48E45164S01	TR,UMD3NFHATR
MAIN-P.W.Board			Q3202	48E45257S01	TR ,KRA304E
MAIN-P.W.Board			Q3221	48E45322S01	TR ,KRC402E
MAIN-P.W.Board			Q3222	48E45257S01	TR ,KRA304E
MAIN-P.W.Board			Q3241	48E45322S01	TR ,KRC402E
MAIN-P.W.Board			Q3242	48E45257S01	TR ,KRA304E
MAIN-P.W.Board			Q3261	48E45322S01	TR ,KRC402E
MAIN-P.W.Board			Q3262	48E45257S01	TR ,KRA304E
MAIN-P.W.Board			Q3701	48E41500S01	FET,FDP3682

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q3702	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3721	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3722	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3741	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3742	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3761	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3762	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q4261	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q4262	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q4263	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q4264	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q4265	48E45253S01	TR,KTA2014
MAIN-P.W.Board			Q4266	48E45253S01	TR,KTA2014
MAIN-P.W.Board			Q4701	48E45163S01	TR,UMB2NFHATN
MAIN-P.W.Board			Q5001	48E45276S01	TR ,KRC404E
MAIN-P.W.Board			Q5002	48E45276S01	TR ,KRC404E
MAIN-P.W.Board			Q5004	48E45323S01	TR,UMZ1NFHATR
MAIN-P.W.Board			Q5005	48E45323S01	TR,UMZ1NFHATR
MAIN-P.W.Board			Q7001	48E45323S01	TR,UMZ1NFHATR
MAIN-P.W.Board			Q7021	48E45323S01	TR,UMZ1NFHATR
MAIN-P.W.Board			Q7041	48E45323S01	TR,UMZ1NFHATR
MAIN-P.W.Board			Q7061	48E45323S01	TR,UMZ1NFHATR
MAIN-P.W.Board			Q8001	48E45256S01	TR,KRC119S
MAIN-P.W.Board			Q8002	48E45256S01	TR,KRC119S
MAIN-P.W.Board			Q9101	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q9102	48E42998S01	TR,KTB1260

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q9301	48E45114S01	TR,2SCR573DFHGTL
MAIN-P.W.Board			Q9302	48E45113S01	TR,2SAR573DFHGTL
MAIN-P.W.Board			Q9501	48E45255S01	TR ,KRC104S
MAIN-P.W.Board			Q9502	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q9503	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q9504	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q9505	48E45252S01	TR,KTC3875S
MAIN-P.W.Board			Q9701	48E45254S01	TR ,KRA303E
MAIN-P.W.Board			Q9801	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q9802	48E45116S01	TR,KTA1552T
MAIN-P.W.Board			Q9803	48E37986S01	FET,INF94-4344PBF
MAIN-P.W.Board			Q9804	48E37986S01	FET,INF94-4344PBF
MAIN-P.W.Board			Q9805	48E37986S01	FET,INF94-4344PBF
MAIN-P.W.Board			Q9806	48E37986S01	FET,INF94-4344PBF
MAIN-P.W.Board			R1001	06E38032S01	RES,CF. 330-1/8W
MAIN-P.W.Board			R1002	06E38032S01	RES,CF. 330-1/8W
MAIN-P.W.Board			R1003	06E38032S01	RES,CF. 330-1/8W
MAIN-P.W.Board			R1004	06E38032S01	RES,CF. 330-1/8W
MAIN-P.W.Board			R1005	06E43985S01	RES,CF. 12K-1/8W
MAIN-P.W.Board			R1006	06E43985S01	RES,CF. 12K-1/8W
MAIN-P.W.Board			R1007	06E43985S01	RES,CF. 12K-1/8W
MAIN-P.W.Board			R1008	06E43985S01	RES,CF. 12K-1/8W
MAIN-P.W.Board			R1009	06E43985S01	RES,CF. 12K-1/8W
MAIN-P.W.Board			R1010	06E43985S01	RES,CF. 12K-1/8W
MAIN-P.W.Board			R1011	06E43985S01	RES,CF. 12K-1/8W
MAIN-P.W.Board			R1012	06E43985S01	RES,CF. 12K-1/8W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1013	06E35348S01	RES,CF 102-F-1/8-CP
MAIN-P.W.Board			R1014	06E35348S01	RES,CF 102-F-1/8-CP
MAIN-P.W.Board			R1015	06E35348S01	RES,CF 102-F-1/8-CP
MAIN-P.W.Board			R1016	06E35348S01	RES,CF 102-F-1/8-CP
MAIN-P.W.Board			R1017	06E35348S01	RES,CF 102-F-1/8-CP
MAIN-P.W.Board			R1018	06E35348S01	RES,CF 102-F-1/8-CP
MAIN-P.W.Board			R1019	06E35348S01	RES,CF 102-F-1/8-CP
MAIN-P.W.Board			R1020	06E35348S01	RES,CF 102-F-1/8-CP
MAIN-P.W.Board			R1101	06E43923S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1102	06E43923S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1103	06E43923S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1104	06E43923S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1105	06E41000S01	RES,CF 1.2K-1/16-CP
MAIN-P.W.Board			R1106	06E37276S01	RES,CARBON 3.9K-1/16
MAIN-P.W.Board			R1107	06E41000S01	RES,CF 1.2K-1/16-CP
MAIN-P.W.Board			R1108	06E37276S01	RES,CARBON 3.9K-1/16
MAIN-P.W.Board			R1109	06E37276S01	RES,CARBON 3.9K-1/16
MAIN-P.W.Board			R1110	06E41000S01	RES,CF 1.2K-1/16-CP
MAIN-P.W.Board			R1111	06E37276S01	RES,CARBON 3.9K-1/16
MAIN-P.W.Board			R1112	06E41000S01	RES,CF 1.2K-1/16-CP
MAIN-P.W.Board			R1113	06E43988S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R1114	06E43988S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R1115	06E43988S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R1116	06E43988S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R1151	06E43923S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1152	06E43923S01	RES,CF. 750K-1/16W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1153	06E43923S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1154	06E43923S01	RES,CF. 750K-1/16W
MAIN-P.W.Board			R1155	06E41000S01	RES,CF 1.2K-1/16-CP
MAIN-P.W.Board			R1156	06E37276S01	RES,CARBON 3.9K-1/16
MAIN-P.W.Board			R1157	06E41000S01	RES,CF 1.2K-1/16-CP
MAIN-P.W.Board			R1158	06E37276S01	RES,CARBON 3.9K-1/16
MAIN-P.W.Board			R1159	06E37276S01	RES,CARBON 3.9K-1/16
MAIN-P.W.Board			R1160	06E41000S01	RES,CF 1.2K-1/16-CP
MAIN-P.W.Board			R1161	06E37276S01	RES,CARBON 3.9K-1/16
MAIN-P.W.Board			R1162	06E41000S01	RES,CF 1.2K-1/16-CP
MAIN-P.W.Board			R1163	06E43988S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R1164	06E43988S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R1165	06E43988S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R1166	06E43988S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R1201	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1202	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1203	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1204	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1205	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1206	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1207	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1208	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1251	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1252	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1253	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1254	06E42961S01	RES,CF. 18K-1/16W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1255	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1256	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1257	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1258	06E42961S01	RES,CF. 18K-1/16W
MAIN-P.W.Board			R1359	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1360	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1401	06E36467S01	RES CARBON 2.2K-1/16
MAIN-P.W.Board			R1402	06E36467S01	RES CARBON 2.2K-1/16
MAIN-P.W.Board			R1403	06E34170S01	RES,CF 431-F-1/16-CP
MAIN-P.W.Board			R1404	06E34170S01	RES,CF 431-F-1/16-CP
MAIN-P.W.Board			R1405	06E42280S01	RES,CF. 1.8K-1/16W
MAIN-P.W.Board			R1406	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1407	06E42280S01	RES,CF. 1.8K-1/16W
MAIN-P.W.Board			R1408	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1451	06E36467S01	RES CARBON 2.2K-1/16
MAIN-P.W.Board			R1452	06E36467S01	RES CARBON 2.2K-1/16
MAIN-P.W.Board			R1453	06E34170S01	RES,CF 431-F-1/16-CP
MAIN-P.W.Board			R1454	06E34170S01	RES,CF 431-F-1/16-CP
MAIN-P.W.Board			R1455	06E42280S01	RES,CF. 1.8K-1/16W
MAIN-P.W.Board			R1456	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1457	06E42280S01	RES,CF. 1.8K-1/16W
MAIN-P.W.Board			R1458	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1501	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1502	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1503	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1504	06E42301S01	RES,CF. 4.7K-1/16W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1505	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1506	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1507	06E43991S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R1508	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1509	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1510	06E43991S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R1511	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1512	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1513	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1514	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1515	06E43991S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R1516	06E43991S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R1517	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R1518	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R1519	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1520	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1521	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1522	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1523	06E45294S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1524	06E45294S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1525	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1526	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1527	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1528	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1550	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1551	06E42301S01	RES,CF. 4.7K-1/16W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1552	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1553	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1554	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1555	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1556	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1557	06E43991S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R1558	06E43991S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R1559	06E40551S01	RES,CF. 1.3K-1/16
MAIN-P.W.Board			R1560	06E40551S01	RES,CF. 1.3K-1/16
MAIN-P.W.Board			R1561	06E43991S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R1562	06E43991S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R1563	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1564	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1565	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1566	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1567	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1568	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1569	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1570	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1571	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1572	06E40551S01	RES,CF. 1.3K-1/16
MAIN-P.W.Board			R1573	06E40551S01	RES,CF. 1.3K-1/16
MAIN-P.W.Board			R1574	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1575	06E43990S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R1601	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R1602	06E42301S01	RES,CF. 4.7K-1/16W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1603	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1604	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1605	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1606	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1607	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1608	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1609	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R1610	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R1611	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R1612	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R1613	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R1614	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R1615	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R1616	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R1617	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R1618	06E40186S01	RES,CF. 7.5K-1/4W
MAIN-P.W.Board			R1619	06E40186S01	RES,CF. 7.5K-1/4W
MAIN-P.W.Board			R1620	06E40186S01	RES,CF. 7.5K-1/4W
MAIN-P.W.Board			R1621	06E40186S01	RES,CF. 7.5K-1/4W
MAIN-P.W.Board			R1622	06E40186S01	RES,CF. 7.5K-1/4W
MAIN-P.W.Board			R1623	06E40186S01	RES,CF. 7.5K-1/4W
MAIN-P.W.Board			R1624	06E40186S01	RES,CF. 7.5K-1/4W
MAIN-P.W.Board			R1625	06E40186S01	RES,CF. 7.5K-1/4W
MAIN-P.W.Board			R1626	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1627	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1628	06E37144S01	RES,CARBON 220K-1/16

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1629	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1630	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1631	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1632	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1633	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1701	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R1702	06E39736S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1703	06E39736S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1704	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R1709	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1717	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R1718	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R1721	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R1761	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R1762	06E39736S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1763	06E39736S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1764	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R1765	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1766	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R1767	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R1768	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R1861	06E45298S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R1862	06E45298S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R1863	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1864	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1865	06E41016S01	RES,CF 0-1/16-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1866	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R1867	06E45298S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R1868	06E45298S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R2001	06E37109S01	RES,CARBON 4.7K-1/16
MAIN-P.W.Board			R2002	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2010	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2061	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2062	06E37109S01	RES,CARBON 4.7K-1/16
MAIN-P.W.Board			R2064	06E42287S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2101	06E33657S01	RES,CF,153-F-1/16-CP
MAIN-P.W.Board			R2102	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R2116	06E39736S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R2117	06E43707S01	RES,CF. 390-1/16-CP
MAIN-P.W.Board			R2124	06E45327S01	RES,CF. 16K-1/10W
MAIN-P.W.Board			R2161	06E43707S01	RES,CF. 390-1/16-CP
MAIN-P.W.Board			R2162	06E39736S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R2163	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R2164	06E33657S01	RES,CF,153-F-1/16-CP
MAIN-P.W.Board			R2165	06E45327S01	RES,CF. 16K-1/10W
MAIN-P.W.Board			R2201	06E41010S01	RES,CF 56K-1/16-CP
MAIN-P.W.Board			R2202	06E40323S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R2301	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R2302	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R2305	06E42186S01	RES,CF. 75-1/16W
MAIN-P.W.Board			R2306	06E42186S01	RES,CF. 75-1/16W
MAIN-P.W.Board			R2307	06E41015S01	RES,CF 1M-1/16-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R2308	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R3001	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3002	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3003	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3004	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3005	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R3006	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R3007	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3008	06E35132S01	RES,CF,82K-1/16
MAIN-P.W.Board			R3009	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3010	06E37225S01	RES,CARBON 1.5K-1/16
MAIN-P.W.Board			R3012	06E32037S01	RES,CF,124-J-1/16-CP
MAIN-P.W.Board			R3014	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R3021	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3022	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3023	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3024	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3025	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R3026	06E40736S01	RES,CF. 680-1/10W
MAIN-P.W.Board			R3027	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3028	06E35132S01	RES,CF,82K-1/16
MAIN-P.W.Board			R3029	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3030	06E37225S01	RES,CARBON 1.5K-1/16
MAIN-P.W.Board			R3033	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R3034	06E32037S01	RES,CF,124-J-1/16-CP
MAIN-P.W.Board			R3041	06E40314S01	RES,CF. 1.1K-1/16W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3042	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3043	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3044	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3045	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R3046	06E41377S01	RES,CF. 270-1/16W
MAIN-P.W.Board			R3047	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3048	06E35132S01	RES,CF,82K-1/16
MAIN-P.W.Board			R3049	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3050	06E37225S01	RES,CARBON 1.5K-1/16
MAIN-P.W.Board			R3052	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R3054	06E32037S01	RES,CF,124-J-1/16-CP
MAIN-P.W.Board			R3061	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3062	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R3063	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3064	06E38536S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R3065	06E43707S01	RES,CF. 390-1/16-CP
MAIN-P.W.Board			R3066	06E43707S01	RES,CF. 390-1/16-CP
MAIN-P.W.Board			R3067	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3068	06E35132S01	RES,CF,82K-1/16
MAIN-P.W.Board			R3069	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3070	06E37225S01	RES,CARBON 1.5K-1/16
MAIN-P.W.Board			R3073	06E40743S01	RES,CF. 9.1K-1/16W
MAIN-P.W.Board			R3074	06E32037S01	RES,CF,124-J-1/16-CP
MAIN-P.W.Board			R3201	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3202	06E40992S01	RES,CF 100-1/16-CP
MAIN-P.W.Board			R3221	06E42132S01	RES,CF. 10K-1/16W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3222	06E40992S01	RES,CF 100-1/16-CP
MAIN-P.W.Board			R3241	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3242	06E40992S01	RES,CF 100-1/16-CP
MAIN-P.W.Board			R3261	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3262	06E40992S01	RES,CF 100-1/16-CP
MAIN-P.W.Board			R3281	06E36469S01	RES CARBON 5.6K-1/16
MAIN-P.W.Board			R3282	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3283	06E36469S01	RES CARBON 5.6K-1/16
MAIN-P.W.Board			R3284	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R3302	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R3602	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3603	06E37105S01	RES,CARBON 3.3K-1/16
MAIN-P.W.Board			R3604	06E43371S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R3606	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R3607	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3608	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3609	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3610	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3611	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3612	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R3613	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3621	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R3622	06E37105S01	RES,CARBON 3.3K-1/16
MAIN-P.W.Board			R3623	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3625	06E43371S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R3626	06E41016S01	RES,CF 0-1/16-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3627	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3628	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3629	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3630	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3631	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3632	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3633	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R3641	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R3642	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3643	06E37105S01	RES,CARBON 3.3K-1/16
MAIN-P.W.Board			R3644	06E43371S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R3646	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R3647	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3648	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3649	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3650	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3651	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3652	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R3653	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3661	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R3662	06E37105S01	RES,CARBON 3.3K-1/16
MAIN-P.W.Board			R3663	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3664	06E43371S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R3666	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R3667	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3668	06E22929S01	RES,CF. 3.3K-1/4W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3669	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3670	06E42136S01	RES,CF. 3.9-1/4W
MAIN-P.W.Board			R3671	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R3672	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3673	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R3701	06E29271S01	RES.CF.4R7-1/4-CP
MAIN-P.W.Board			R3702	06E29271S01	RES.CF.4R7-1/4-CP
MAIN-P.W.Board			R3703	06E41017S01	RES,CF 220K-1/16-CP
MAIN-P.W.Board			R3704	06E41017S01	RES,CF 220K-1/16-CP
MAIN-P.W.Board			R3705	06E45293S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3706	06E45293S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3721	06E29271S01	RES.CF.4R7-1/4-CP
MAIN-P.W.Board			R3722	06E29271S01	RES.CF.4R7-1/4-CP
MAIN-P.W.Board			R3723	06E41017S01	RES,CF 220K-1/16-CP
MAIN-P.W.Board			R3724	06E41017S01	RES,CF 220K-1/16-CP
MAIN-P.W.Board			R3725	06E45293S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3726	06E45293S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3741	06E29271S01	RES.CF.4R7-1/4-CP
MAIN-P.W.Board			R3742	06E29271S01	RES.CF.4R7-1/4-CP
MAIN-P.W.Board			R3743	06E41017S01	RES,CF 220K-1/16-CP
MAIN-P.W.Board			R3744	06E41017S01	RES,CF 220K-1/16-CP
MAIN-P.W.Board			R3745	06E45293S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3746	06E45293S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3761	06E29271S01	RES.CF.4R7-1/4-CP
MAIN-P.W.Board			R3762	06E29271S01	RES.CF.4R7-1/4-CP
MAIN-P.W.Board			R3763	06E41017S01	RES,CF 220K-1/16-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3764	06E41017S01	RES,CF 220K-1/16-CP
MAIN-P.W.Board			R3765	06E45293S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3766	06E45293S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R4001	06E45212S01	RES CARBON 6.2K-1/4W
MAIN-P.W.Board			R4021	06E45212S01	RES CARBON 6.2K-1/4W
MAIN-P.W.Board			R4041	06E45212S01	RES CARBON 6.2K-1/4W
MAIN-P.W.Board			R4061	06E45212S01	RES CARBON 6.2K-1/4W
MAIN-P.W.Board			R4081	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R4082	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R4083	06E32213S01	RES,CF,624-J-1/16-CP
MAIN-P.W.Board			R4084	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R4085	06E32213S01	RES,CF,624-J-1/16-CP
MAIN-P.W.Board			R4086	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R4087	06E32213S01	RES,CF,624-J-1/16-CP
MAIN-P.W.Board			R4088	06E41015S01	RES,CF 1M-1/16-CP
MAIN-P.W.Board			R4089	06E32213S01	RES,CF,624-J-1/16-CP
MAIN-P.W.Board			R4201	06E40977S01	RES,CF 10-1/16-CP
MAIN-P.W.Board			R4202	06E40977S01	RES,CF 10-1/16-CP
MAIN-P.W.Board			R4203	06E40977S01	RES,CF 10-1/16-CP
MAIN-P.W.Board			R4204	06E40977S01	RES,CF 10-1/16-CP
MAIN-P.W.Board			R4205	06E40977S01	RES,CF 10-1/16-CP
MAIN-P.W.Board			R4206	06E40977S01	RES,CF 10-1/16-CP
MAIN-P.W.Board			R4207	06E40977S01	RES,CF 10-1/16-CP
MAIN-P.W.Board			R4208	06E40977S01	RES,CF 10-1/16-CP
MAIN-P.W.Board			R4261	06E36624S01	RES,CARBON 56K-1/16
MAIN-P.W.Board			R4262	06E36624S01	RES,CARBON 56K-1/16

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4263	06E36624S01	RES,CARBON 56K-1/16
MAIN-P.W.Board			R4264	06E36624S01	RES,CARBON 56K-1/16
MAIN-P.W.Board			R4265	06E42473S01	RES,CF. 12K-1/16W
MAIN-P.W.Board			R4266	06E42473S01	RES,CF. 12K-1/16W
MAIN-P.W.Board			R4267	06E42473S01	RES,CF. 12K-1/16W
MAIN-P.W.Board			R4268	06E42473S01	RES,CF. 12K-1/16W
MAIN-P.W.Board			R4269	06E36624S01	RES,CARBON 56K-1/16
MAIN-P.W.Board			R4270	06E36624S01	RES,CARBON 56K-1/16
MAIN-P.W.Board			R4701	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4702	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4705	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4706	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4707	06E41011S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R4708	06E40356S01	RES,CF. 910-1/16W
MAIN-P.W.Board			R4709	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4710	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4711	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4712	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R4713	06E43987S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4714	06E43987S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4715	06E43987S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4716	06E43987S01	RES,CF. 0.005-1W
MAIN-P.W.Board			R4901	06E36469S01	RES CARBON 5.6K-1/16
MAIN-P.W.Board			R4902	06E42289S01	RES,CF. 62K-1/16W
MAIN-P.W.Board			R5001	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5002	06E45292S01	RES,CARBON 2.8K-1/16

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5003	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5004	06E35243S01	RES,CF 752-F-1/16-CP
MAIN-P.W.Board			R5005	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R5006	06E31683S01	RES,CF 154-J-1/16-CP
MAIN-P.W.Board			R5007	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5009	06E33657S01	RES,CF,153-F-1/16-CP
MAIN-P.W.Board			R5010	06E33657S01	RES,CF,153-F-1/16-CP
MAIN-P.W.Board			R5011	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5012	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5014	06E45213S01	RES CARBON 1.1K-1/16 CP 1005
MAIN-P.W.Board			R5015	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R5016	06E39736S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R5017	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5018	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5019	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5020	06E37110S01	RES,CARBON 10K-1/16W
MAIN-P.W.Board			R5021	06E34536S01	RES,CF 242-F-1/16-CP
MAIN-P.W.Board			R5022	06E37110S01	RES,CARBON 10K-1/16W
MAIN-P.W.Board			R5023	06E34536S01	RES,CF 242-F-1/16-CP
MAIN-P.W.Board			R5024	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5025	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5026	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5027	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5028	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5029	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5030	06E37225S01	RES,CARBON 1.5K-1/16

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5031	06E37225S01	RES,CARBON 1.5K-1/16
MAIN-P.W.Board			R5032	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5033	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5034	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5035	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5036	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5037	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5038	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5039	06E42952S01	RES,CF. 510-1/16W
MAIN-P.W.Board			R5040	06E42952S01	RES,CF. 510-1/16W
MAIN-P.W.Board			R5041	06E37225S01	RES,CARBON 1.5K-1/16
MAIN-P.W.Board			R5042	06E35243S01	RES,CF 752-F-1/16-CP
MAIN-P.W.Board			R5043	06E37225S01	RES,CARBON 1.5K-1/16
MAIN-P.W.Board			R5045	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5501	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5502	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5503	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5504	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5505	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5506	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5507	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5508	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5509	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5510	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5511	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5512	06E41016S01	RES,CF 0-1/16-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5513	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5514	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5515	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5516	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5517	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5518	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5519	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5520	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5521	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5522	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5523	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R5524	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R6501	06E42289S01	RES,CF. 62K-1/16W
MAIN-P.W.Board			R6502	06E43367S01	RES,CF. 300K-1/16W
MAIN-P.W.Board			R6503	06E42289S01	RES,CF. 62K-1/16W
MAIN-P.W.Board			R6504	06E43367S01	RES,CF. 300K-1/16W
MAIN-P.W.Board			R6561	06E45387S01	RES CARBON 5.6K-1/16
MAIN-P.W.Board			R6562	06E45388S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R6563	06E45387S01	RES CARBON 5.6K-1/16
MAIN-P.W.Board			R6564	06E45388S01	RES,CF 100K-1/16-CP
MAIN-P.W.Board			R7001	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7002	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7003	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7004	06E32227S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R7005	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7007	06E43715S01	RES,CF. 270K-1/16W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7008	06E35164S01	RES,CF 202-F-1/16-CP
MAIN-P.W.Board			R7009	06E31804S01	RES,CF.683-J-1/16-CP
MAIN-P.W.Board			R7010	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7011	06E32227S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R7012	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7013	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R7014	06E45296S01	RES.CF.15K-1/10-CP
MAIN-P.W.Board			R7015	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R7016	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7017	06E33657S01	RES,CF,153-F-1/16-CP
MAIN-P.W.Board			R7021	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7022	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7023	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7024	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7025	06E32227S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R7027	06E43715S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R7028	06E35164S01	RES,CF 202-F-1/16-CP
MAIN-P.W.Board			R7029	06E31804S01	RES,CF.683-J-1/16-CP
MAIN-P.W.Board			R7030	06E32227S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R7031	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7032	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7033	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R7034	06E45296S01	RES.CF.15K-1/10-CP
MAIN-P.W.Board			R7035	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R7036	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7037	06E33657S01	RES,CF,153-F-1/16-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7041	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7042	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7043	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7044	06E32227S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R7045	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7047	06E43715S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R7048	06E35164S01	RES,CF 202-F-1/16-CP
MAIN-P.W.Board			R7049	06E31804S01	RES,CF.683-J-1/16-CP
MAIN-P.W.Board			R7050	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7051	06E32227S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R7052	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7053	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R7054	06E45296S01	RES.CF.15K-1/10-CP
MAIN-P.W.Board			R7055	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R7056	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7057	06E33657S01	RES,CF,153-F-1/16-CP
MAIN-P.W.Board			R7061	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7062	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R7063	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R7064	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7065	06E32227S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R7067	06E43715S01	RES,CF. 270K-1/16W
MAIN-P.W.Board			R7068	06E35164S01	RES,CF 202-F-1/16-CP
MAIN-P.W.Board			R7069	06E31804S01	RES,CF.683-J-1/16-CP
MAIN-P.W.Board			R7070	06E32227S01	RES,CF 682-F-1/16-CP
MAIN-P.W.Board			R7071	06E41016S01	RES,CF 0-1/16-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R7072	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7073	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R7074	06E45296S01	RES.CF.15K-1/10-CP
MAIN-P.W.Board			R7075	06E41005S01	RES,CF 10K-1/16-CP
MAIN-P.W.Board			R7076	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R7077	06E33657S01	RES,CF,153-F-1/16-CP
MAIN-P.W.Board			R8001	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R8003	06E45083S01	RES,CF. 1.3k-1/4W
MAIN-P.W.Board			R8005	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R8007	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R8009	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R8901	06E36469S01	RES CARBON 5.6K-1/16
MAIN-P.W.Board			R8902	06E35132S01	RES,CF,82K-1/16
MAIN-P.W.Board			R9101	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R9102	06E35388S01	RES,CF 243-J-1/16-CP
MAIN-P.W.Board			R9103	06E45212S01	RES CARBON 6.2K-1/4W
MAIN-P.W.Board			R9104	06E45212S01	RES CARBON 6.2K-1/4W
MAIN-P.W.Board			R9105	06E36102S01	RES,CF 303-J-1/16-CP
MAIN-P.W.Board			R9106	06E45212S01	RES CARBON 6.2K-1/4W
MAIN-P.W.Board			R9107	06E45297S01	RES,CF 56K-1/4-CP
MAIN-P.W.Board			R9305	06E40999S01	RES,CF 1K-1/16-CP
MAIN-P.W.Board			R9306	06E40999S01	RES,CF 1K-1/16-CP
MAIN-P.W.Board			R9307	06E43359S01	RES,CF. 5.1K-1/4W
MAIN-P.W.Board			R9308	06E43359S01	RES,CF. 5.1K-1/4W
MAIN-P.W.Board			R9309	06E32037S01	RES,CF,124-J-1/16-CP
MAIN-P.W.Board			R9310	06E32037S01	RES,CF,124-J-1/16-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9501	06E42301S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9502	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9503	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9504	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9505	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9506	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9507	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9508	06E42296S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9513	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9514	06E42402S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9601	06E37110S01	RES,CARBON 10K-1/16W
MAIN-P.W.Board			R9606	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R9701	06E37105S01	RES,CARBON 3.3K-1/16
MAIN-P.W.Board			R9702	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R9703	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9704	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R9705	06E41016S01	RES,CF 0-1/16-CP
MAIN-P.W.Board			R9706	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9707	06E40314S01	RES,CF. 1.1K-1/16W
MAIN-P.W.Board			R9708	06E40733S01	RES,CF. 200-1/16W
MAIN-P.W.Board			R9709	06E41385S01	RES,CF. 360K-1/10W
MAIN-P.W.Board			R9710	06E37110S01	RES,CARBON 10K-1/16W
MAIN-P.W.Board			R9711	06E37224S01	RES,CARBON 2K-1/16W
MAIN-P.W.Board			R9712	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R9713	06E37225S01	RES,CARBON 1.5K-1/16
MAIN-P.W.Board			R9714	06E41003S01	RES,CF 4.7K-1/16-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9715	06E40988S01	RES,CF 1K-1/4-CP
MAIN-P.W.Board			R9716	06E40988S01	RES,CF 1K-1/4-CP
MAIN-P.W.Board			R9717	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9718	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9719	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9720	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9721	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9723	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9724	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9725	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9726	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9727	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9729	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9730	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9731	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9732	06E45295S01	RES,CF. 13K-1/10W
MAIN-P.W.Board			R9733	06E42132S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9801	06E28546S01	RES,CF. 18-1/4W
MAIN-P.W.Board			R9802	06E28546S01	RES,CF. 18-1/4W
MAIN-P.W.Board			R9803	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R9804	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R9805	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R9806	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R9807	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R9808	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R9809	06E42221S01	RES,CF. 200K-1/16W

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9810	06E42221S01	RES,CF. 200K-1/16W
MAIN-P.W.Board			R9901	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9902	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9903	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9904	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9905	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9907	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9909	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9910	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9911	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9912	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9918	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			R9919	06E37280S01	RES,CARBON 10-1/4W
MAIN-P.W.Board			SD4901	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD4902	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD8901	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD9101	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			SD9301	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD9302	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD9303	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SD9304	48E45105S01	DIO,SHT SMAB210
MAIN-P.W.Board			SW1351	40E41432S01	SW,SLIDE SK-22D15-G6
MAIN-P.W.Board			SW1501	40E45321S01	SW,SLIDE CSS-SK24D3G
MAIN-P.W.Board			SW1551	40E45321S01	SW,SLIDE CSS-SK24D3G
MAIN-P.W.Board			SW1601	40E45118S01	SW,SLIDE CSE-SK12D2G
MAIN-P.W.Board			T9903	24E45318S01	TRANS,POWER 19MY-R

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			T9904	24E45318S01	TRANS,POWER 19MY-R
MAIN-P.W.Board			TH5001	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9601	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9661	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9662	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9663	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9664	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9665	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9666	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9667	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9668	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9669	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9670	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9671	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH9672	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TML4201	09E45306S01	CONN,JSZ 8P
MAIN-P.W.Board			TML9001	09E45307S01	CONN,JSZ 3P
MAIN-P.W.Board			VOL1401	18E41507S01	VOL,ROTARY 50KX2
MAIN-P.W.Board			VR1451	18E41507S01	VOL,ROTARY 50KX2
MAIN-P.W.Board			VR1501	18E42155S01	VOL,ROTARY 20KX4
MAIN-P.W.Board			VR1502	18E45310S01	VOL,ROTARY 50KX4
MAIN-P.W.Board			VR1551	18E42155S01	VOL,ROTARY 20KX4
MAIN-P.W.Board			VR1552	18E45309S01	VOL,ROTARY 20KX4
MAIN-P.W.Board			ZD2101	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD2161	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD3001	48E45098S01	DIO,ZEN UDZVFH-4.7B

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			ZD3021	48E45098S01	DIO,ZEN UDZVFH-4.7B
MAIN-P.W.Board			ZD3041	48E45098S01	DIO,ZEN UDZVFH-4.7B
MAIN-P.W.Board			ZD3061	48E45098S01	DIO,ZEN UDZVFH-4.7B
MAIN-P.W.Board			ZD4001	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD4021	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD4041	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD4061	48E42997S01	DIODE,ZENER UDZS13B
MAIN-P.W.Board			ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD9001	48E41047S01	DIO,ZENER Z5W27V
MAIN-P.W.Board			ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9301	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board			ZD9302	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board			ZD9501	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9502	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9503	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board			ZD9504	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board			ZD9505	48E42996S01	DIODE,ZENER HZK30-1L
MAIN-P.W.Board			ZD9506	48E42996S01	DIODE,ZENER HZK30-1L