
■ EXPLODED VIEW • PARTS LIST


Escutcheon section

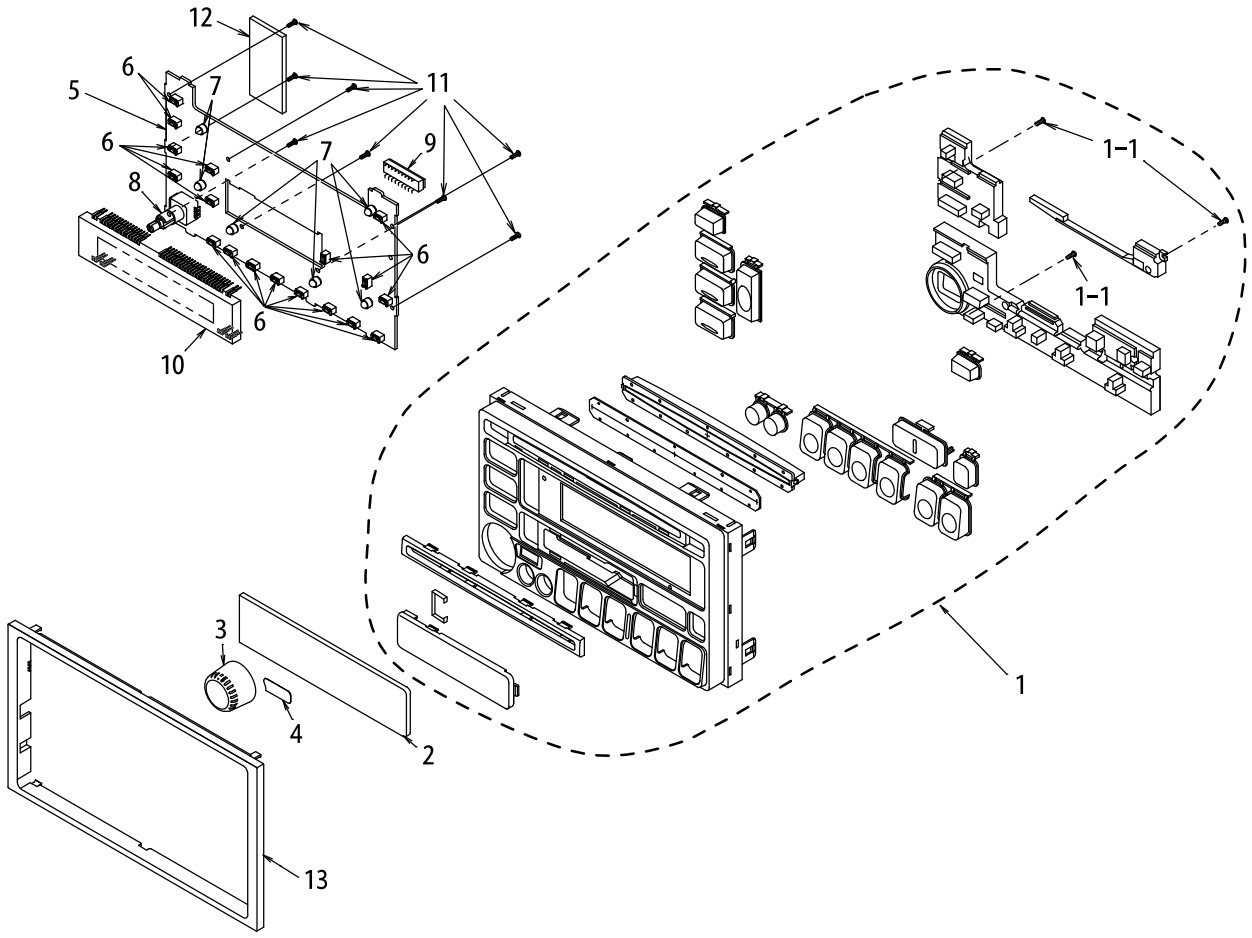

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7928-22	ESCUTCHEON ASSY	1
1-1	716-0778-00	WAVE SCREW(φ2×6)	3
2	373-0939-20	DIAL COVER	1
3	380-5494-00	KNOB	1
4	371-3938-00	TRIM PLATE	1
5	039-1731-01	SWITCH PWB (WITHOUT COMPONENT)	1
6	013-6302-01	SWITCH	18

NO.	PART NO.	DESCRIPTION	Q'TY
7	017-0420-09	PILOT LAMP(14V 40mA)	6
8	016-0010-05	VR W/SHAFT	1
9	074-1151-18	OUTLET SOCKET(18P)	1
10	379-4018-24	INDICATOR	1
11	716-0778-00	WAVE SCREW(φ2×6)	8
12	345-8090-00	INSULATOR	1
13	383-0616-21	FACE PANEL	1

Main section

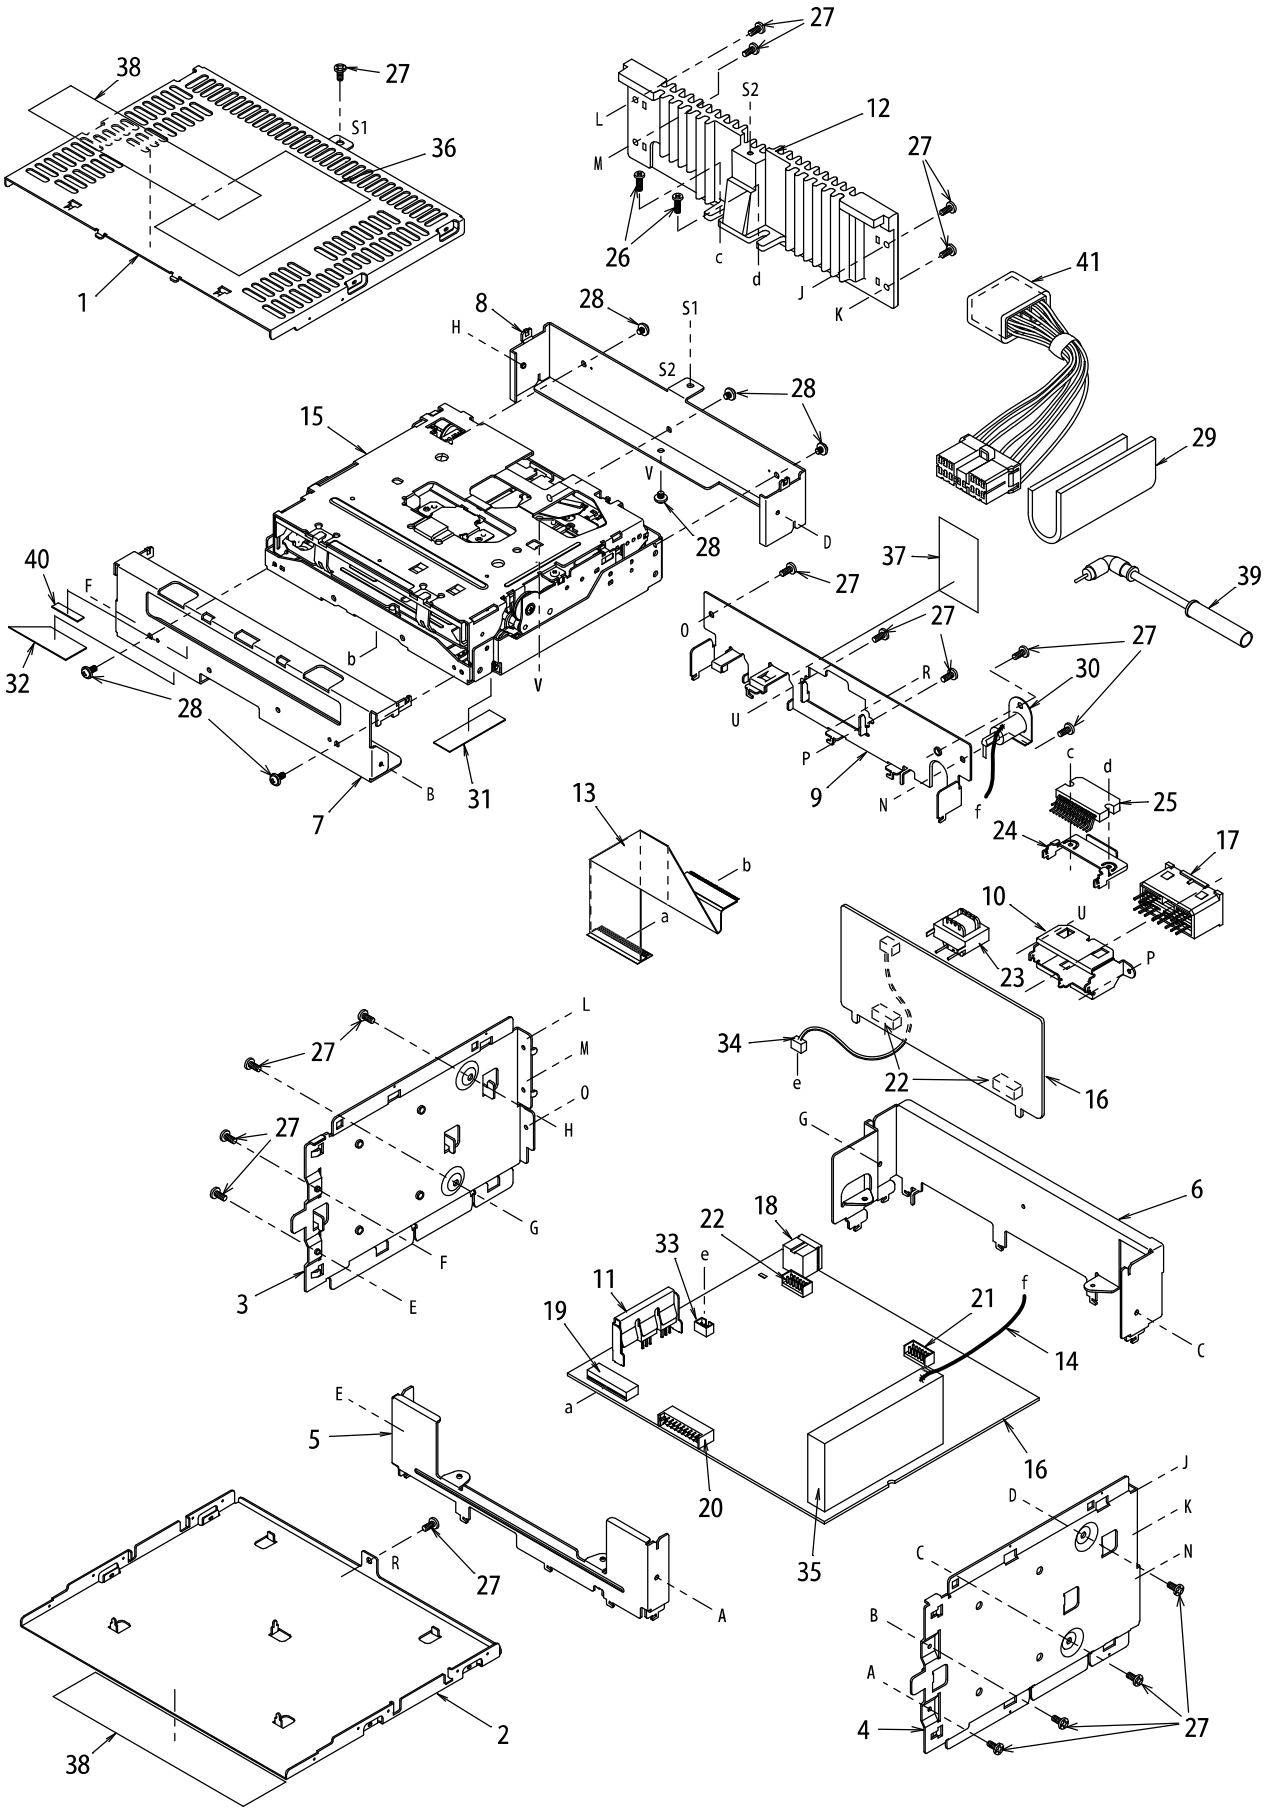



NO.	PART NO.	DESCRIPTION	Q'TY
1	310-1639-00	UPPER CASE	1
2	311-1727-02	LOWER CASE	1
3	305-0266-00	SIDE PLATE(LEFT)	1
4	305-0265-00	SIDE PLATE(RIGHT)	1
5	309-0698-00	FRONT PLATE	1
6	331-2275-01	MECHANISM BRACKET	1
7	331-2281-01	MECHANISM BRACKET (FRONT)	1
8	331-2282-00	MECHANISM BRACKET(REAR)	1
9	307-0597-20	REAR PLATE	1
10	331-2276-00	OUTLET HOLDER	1
11	331-0567-00	TRANSISTOR HOLDER	1
12	313-1709-00	HEAT SINK	1
13	816-2451-00	FLAT CABLE	1
14	060-0108-00	JUMPER WIRE	1
15	929-0069-04	CD MECHANISM	1
16	039-1730-01	MAIN PWB (WITHOUT COMPONENT)	1
17	074-1010-00	OUTLET SOCKET	1
18	074-1194-00	OUTLET SOCKET	1
19	074-1186-26	OUTLET SOCKET	1
20	076-0540-18	PLUG(18P)	1
21	076-0368-12	PLUG(12P)	2
22	074-0898-12	OUTLET SOCKET	2

NO.	PART NO.	DESCRIPTION	Q'TY
23	009-0666-62	CHOKE	1
24	331-2277-00	IC HOLDER	1
25	051-2013-00	IC(TDA7385)	1
26	714-2612-81	MACHINE SCREW(M2.6×12)	2
27	714-2606-81	MACHINE SCREW(M2.6×6)	19
28	714-2303-81	MACHINE SCREW(M2.3×3)	6
29	345-8455-01	CUSHION RUBBER	1
30	092-0702-00	ANTENNA RECEPT	1
31	347-2022-02	PAPER PART	1
32	347-5679-02	DOUBLE FACE	1
33	076-0312-03	PLUG(3P)	1
34	854-4376-00	EXTENSION LEAD	1
35	880-2079G	TUNER PACK (AM/FM)	1
36	286-9431-00 286-9431-10 286-9431-20 286-9431-30 286-9431-40 286-9431-50	SETPLATE(PS-2375D) SETPLATE(PS-2375I) SETPLATE(PS-2376D) SETPLATE(PS-2376I) SETPLATE(PS-2377D) SETPLATE(PS-2377I)	1
37	347-5206-00	SHADE	1
38	353-0531-00	SHADE	2
39	093-0778-01	ANTENNA JUMPER (USE PS-2375I/2376I/2377I)	1
40	347-6036-00	DOUBLE FACE	1
41	854-8213-00	EXTENSION LEAD	1

CD mechanism section

※ The parts list is on page 10.

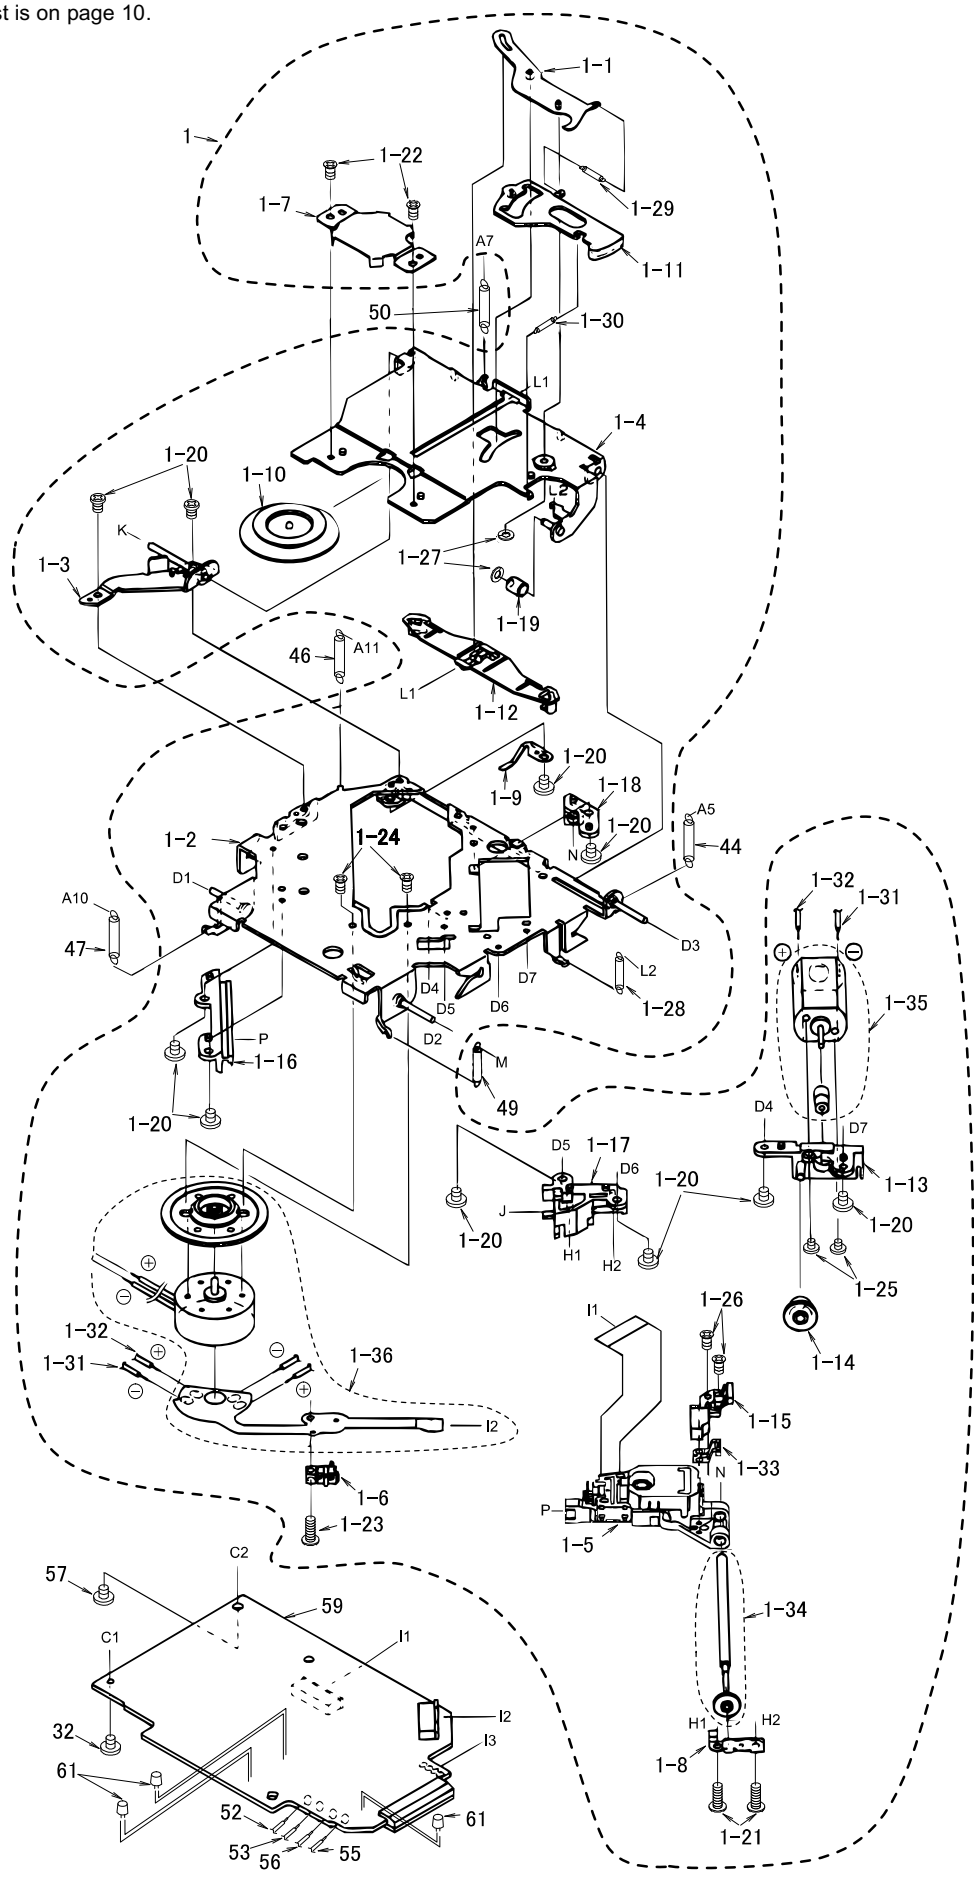

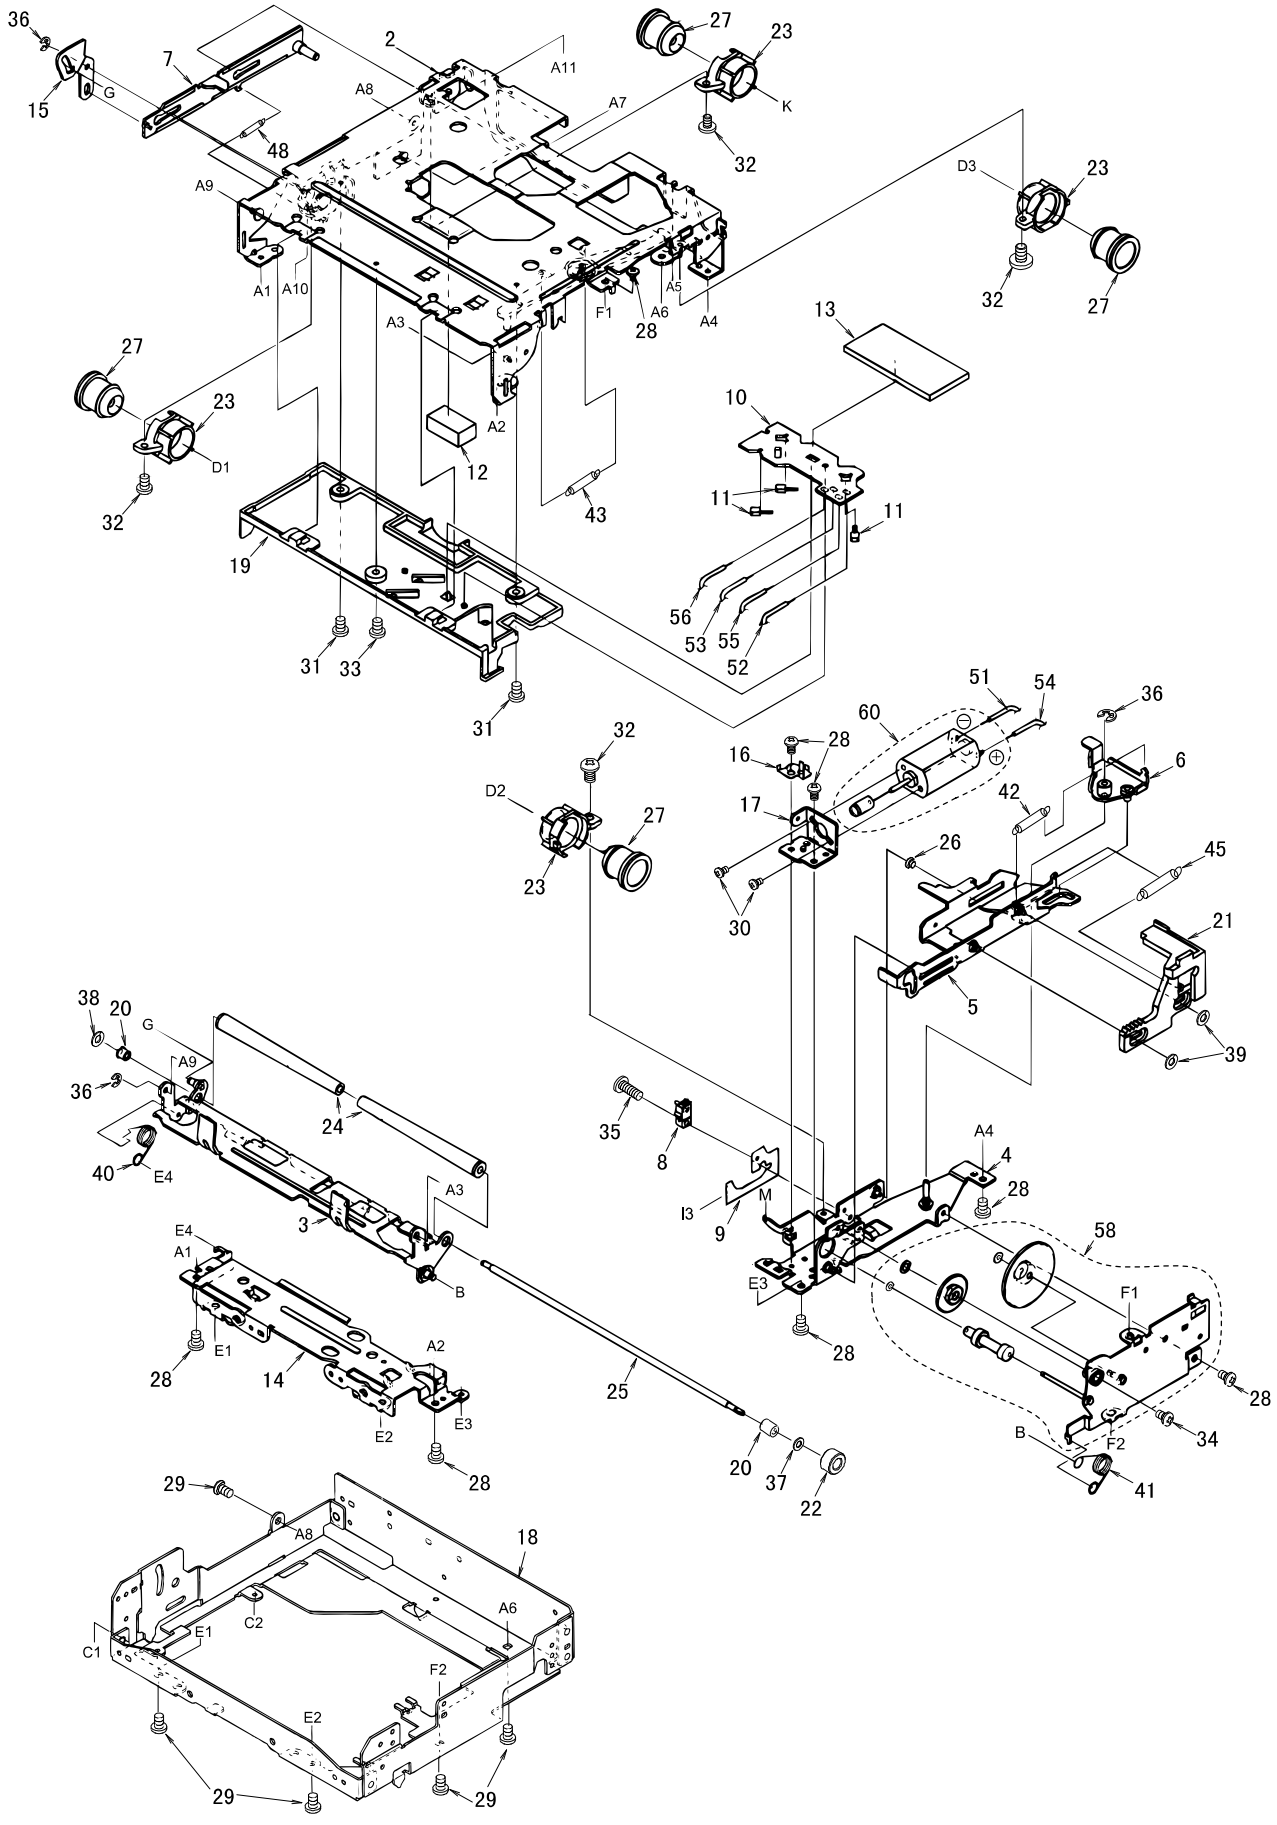

PS-2375D,I
PS-2376D,I
PS-2377D,I

CD mechanism section

NO.	PART NO.	DESCRIPTION	Q'TY
1	HBS-463-100	DRIVE UNIT	1
1-1	966-0314-21	STOP LINK ASSY	1
1-2	966-0447-23	DR-PLATE ASSY	1
1-3	966-0448-21	SIDE PLATE ASSY	1
1-4	966-0449-23	CLAMP LINK ASSY	1
1-5	969-0050-04	PICK UP UNIT	1
1-6	013-7100-00	LIMIT SWITCH	1
1-7	620-0198-03	CLAMPER PLATE	1
1-8	620-0491-03	SPRING PLATE	1
1-9	620-0690-01	RATTLE PLATE	1
1-10	621-0205-02	CLAMPER RING	1
1-11	621-0251-03	LOCK LINK	1
1-12	621-0252-03	DISC STOPPER	1
1-13	621-0253-02	MOTOR HOLDER	1
1-14	621-0255-02	SECOUND GEAR	1
1-15	621-0375-00	SH-BASE	1
1-16	621-0357-03	PICK UP GUIDE	1
1-17	621-0358-02	LS-HOLDER-F	1
1-18	621-0359-02	LS-HOLDER-R	1
1-19	622-1073-02	CLAMPER ROLLER	1
1-20	714-2003-81	MACHINE SCREW(M2X3)	10
1-21	716-0675-00	SCREW	2
1-22	716-1468-00	SCREW	2
1-23	716-1555-00	WAVE SCREW	1
1-24	716-1733-00	SCREW	2
1-25	732-2004-11	SEMS SCREW	2
1-26	739-1735-17	PRECISION SCREW	2
1-27	746-0761-00	SCREW	2
1-28	750-3097-03	CLAMPER SPRING	1
1-29	750-3098-00	L-LINK SPRING	1
1-30	750-3099-00	ES-SPRING	1
1-31	816-2372-00	VINYL COAT WIRE(BLU)	1
1-32	816-2373-00	VINYL COAT WIRE(WHT)	1
1-33	966-0454-00	SH-RACK ASSY	1
1-34	HBS-432-100	LS-GEAR ASSY	1
1-35	SMA-146-100	SLED MOTOR ASSY	1
1-36	SMA-151-100	SPINDLE MOTOR ASSY	1
2	966-0308-24	CHASSIS ASSY	1
3	966-0309-22	L-DISC-G-ASSY	1
4	966-0310-21	SFT-P-CH-ASSY	1
5	966-0312-21	SHIFT-P-ASSY	1
6	966-0358-21	DRIVE-L-PL-ASSY	1
7	966-0359-21	SIDE-L-PL-ASSY	1
8	013-3879-01	CHUCKING SWITCH	1
9	039-0586-01	CHUCKING SWTICH PWB (WITHOUT COMPONENT)	1
10	039-0588-01	SENSOR PWB (WITHOUT COMPONENT)	1
11	060-0252-01	PHOTO TR (PT4850F)	3
12	345-7513-01	CLAMPER SHEET	1

NO.	PART NO.	DESCRIPTION	Q'TY
13	345-7514-00	S-PWB-SHEET	1
14	620-0485-20	FRONT PLATE	1
15	620-0488-20	S-L-LINK PLATE	1
16	620-0489-02	MOTOR PLATE	1
17	620-0492-20	MOTOR BRACKET	1
18	620-0773-01	MECHANISM BRACKET	1
19	621-0402-02	U-DISC GUIDE-F	1
20	621-0243-02	ROLLER SLEEVE	2
21	621-0248-07	RACK GEAR	1
22	621-0249-02	ROLLER GEAR	1
23	621-0250-01	DAMPER HOLDER	4
24	621-0258-03	LOADING ROLLER	2
25	622-1072-05	ROLLER SHAFT	1
26	622-1219-01	SHIFT ROLLER	1
27	629-0058-00	DAMPER-VA	4
28	714-2003-81	MACHINE SCREW(M2×3)	8
29	714-2603-81	MACHINE SCREW(M2.6×3)	5
30	716-1468-00	SCREW(M2×2.5)	2
31	716-1507-00	SCREW(M2×3)	2
32	716-1670-00	SCREW(M2×4)	5
33	716-1677-00	SCREW(M2×5)	1
34	716-1704-00	SCREW(M2×7)	1
35	716-1742-00	SCREW((M2×5)	1
36	743-1500-20	E-RING	3
37	746-0712-03	WASHER	1
38	746-0762-00	WASHER	1
39	746-0877-02	WASHER	2
40	750-3090-02	RO-SPRING-L	1
41	750-3091-03	RO-SPRING-R	1
42	750-3092-03	SHIFT SPRING	1
43	750-3094-00	S-ARM SPRING	1
44	750-3096-01	DR-SPRING-R	1
45	750-3098-00	L-LINK SPRING	1
46	750-3164-00	DR-SPRING-LR	1
47	750-3188-00	DR-SPRING-F-B	1
48	750-3189-00	SIDE-L-SPRING	1
49	750-3201-00	DR-SPRING-F-R	1
50	750-3202-00	CENTER SPRING-B	1
51	800-4904-60	VINYL COAT WIRE(BLK)	1
52	800-4910-60	VINYL COAT WIRE(BLK)	1
53	801-4910-60	VINYL COAT WIRE(BRN)	1
54	802-4904-60	VINYL COAT WIRE(RED)	1
55	802-4910-60	VINYL COAT WIRE(RED)	1
56	804-4910-60	VINYL COAT WIRE(YEL)	1
57	716-1819-00	MECHANISM PWB SCREW	1
58	HBS-430-100	GEAR-PLATE ASSY	1
59	HBS-482-100	MECHANISM PWB ASSY	1
60	SMA-147-100	LOADING MOTOR ASSY	1
61	001-0563-00	DIODE	3

■ELECTRICAL PARTS LIST

Note) Several different parts of the same reference number are alternative parts. One of those parts is used in the set.

Main PWB section(B1)

REF No.	PART No.	DESCRIPTION
ANT1	092-0702-00	ANT RECEPT
BL101	880-2079G	AM/FM TUNER
C101	176-1801-00	18pF CH
C104	178-1032-78	0.01 μF
C105	178-1032-78	0.01 μF
C109	183-1063-31	16V10 μF
C110	183-1073-21	10V100 μF
C112	178-3322-78	3300pF
C115	178-1042-78	0.1 μF
C118	178-2232-78	0.022 μF
C119	178-1032-78	0.01 μF
C120	117-0000-00	1/10W 0Ω JW
C121	042-0458-05	35V4.7 μF
C122	178-1042-78	0.1 μF
C123	176-1011-00	100pF CH
C124	176-1011-00	100pF CH
C125	176-1011-00	100pF CH
C126	178-2212-78	220pF
C127	176-1801-00	18pF CH
C128	176-2201-00	22pF CH
C130	183-1073-21	10V100 μF
C133	178-2232-78	0.022 μF
C147	178-1032-78	0.01 μF
C152	184-4773-22	10V470 μF
C158	178-2232-78	0.022 μF
C159	178-2232-78	0.022 μF
C160	178-1832-78	0.018 μF
C161	183-1046-67	50V0.1 μF NP
C162	183-1046-67	50V0.1 μF NP
C163	172-1831-11	0.018 μF
C164	183-2263-31	16V22 μF
C165	183-2253-62	50V2.2 μF
C166	183-2253-62	50V2.2 μF
C168	183-2253-62	50V2.2 μF
C170	178-1042-78	0.1 μF
C171	183-4763-31	16V47 μF
C174	183-2253-62	50V2.2 μF
C176	183-2253-62	50V2.2 μF
C177	183-2253-62	50V2.2 μF
C181	183-1053-61	50V1 μF
C182	183-1053-61	50V1 μF
C184	178-1542-78	0.15 μF
C185	178-1542-78	0.15 μF
C186	183-1063-31	16V10 μF
C187	183-1063-31	16V10 μF
C188	183-1063-31	16V10 μF
C189	183-1063-31	16V10 μF
C190	043-0309-90	10V 1 μF
C191	043-0309-90	10V 1 μF
C192	178-6832-78	0.068 μF
C193	178-6832-78	0.068 μF
C194	178-1042-78	0.1 μF
C195	178-1042-78	0.1 μF
C196	178-4722-78	4700pF
C197	178-4722-78	4700pF
C198	178-1032-78	0.01 μF
C199	178-1032-78	0.01 μF
C200	178-1032-78	0.01 μF
C201	178-4712-78	470pF
C202	178-4712-78	470pF
C205	176-1201-00	12pF CH
C206	176-1201-00	12pF CH
C209	183-1063-31	16V10 μF
C210	176-1011-00	100pF CH
C211	172-1041-11	0.1 μF
C212	178-2212-78	220pF
C213	178-2212-78	220pF
C214	183-4763-31	16V47 μF
C215	178-4732-78	0.047 μF
C216	184-4773-22	10V470 μF
C217	183-1063-31	16V10 μF
C221	178-3332-78	0.033 μF
C222	043-0309-90	10V 1 μF
C223	183-4763-31	16V47 μF
C227	178-1042-78	0.1 μF
C228	043-0309-90	10V 1 μF
C229	178-4732-78	0.047 μF
C230	183-1063-31	16V10 μF
C232	178-1032-78	0.01 μF
C237	042-0563-15	10V220 μF
C239	183-4763-31	16V47 μF
C243	042-0565-00	16V22 μF
C246	184-4773-22	10V470 μF
C247	183-1053-61	50V1 μF
C248	184-4773-22	10V470 μF
C249	183-2263-31	16V22 μF
C250	178-2232-78	0.022 μF
C251	178-4742-78	0.47 μF
C254	178-1032-78	0.01 μF
C255	176-2201-00	22pF CH
C256	176-1511-00	150pF CH
C259	184-1073-52	35V100 μF
C267	178-2212-78	220pF
C268	178-2212-78	220pF
C269	042-0565-00	16V22 μF
C278	178-2232-78	0.022 μF
C279	183-1063-31	16V10 μF
C281	176-1011-00	100pF CH
C282	178-1022-78	1000pF
C290	176-2201-00	22pF CH
C291	176-1801-00	18pF CH
C304	176-2201-00	22pF CH
C305	176-2201-00	22pF CH
C306	117-0000-00	1/10W 0Ω JW
C307	117-0000-00	1/10W 0Ω JW
C309	117-0000-00	1/10W 0Ω JW
C310	117-0000-00	1/10W 0Ω JW
C311	176-2201-00	22pF CH
C312	176-2201-00	22pF CH
C330	117-0000-00	1/10W 0Ω JW
C331	117-0000-00	1/10W 0Ω JW
C332	117-0000-00	1/10W 0Ω JW
C333	117-0000-00	1/10W 0Ω JW
C338	163-1063-30	16V10 μF
C339	163-1063-30	16V10 μF
C340	183-6853-59	35V6.8 μF
C341	163-1063-30	16V10 μF
C342	163-1063-30	16V10 μF
C344	043-0499-51	0.1 μF
C345	043-0499-51	0.1 μF
C346	043-0499-51	0.1 μF
C348	043-0499-51	0.1 μF
C349	178-4712-78	470pF
C350	178-4712-78	470pF
C351	178-4712-78	470pF
C352	178-4712-78	470pF
C353	172-1041-11	0.1 μF
C354	183-2263-31	16V22 μF
C355	042-0447-00	16V2200 μF
C356	042-0280-01	16V1000 μF
C357	183-1063-32	16V10 μF
C358	183-1053-62	50V1 μF
C360	183-1063-31	16V10 μF
C361	183-4763-32	16V47 μF
C362	172-1041-11	0.1 μF
C363	183-4753-52	35V4.7 μF
C369	178-2232-78	0.022 μF
C370	178-2232-78	0.022 μF
C500	178-2732-78	0.027 μF
C501	178-2732-78	0.027 μF
C502	042-0563-71	16V100 μF
C503	042-0563-71	16V100 μF
C504	184-1073-52	35V100 μF
C505	183-1063-51	35V10 μF
C506	042-0563-71	16V100 μF
C507	183-2263-31	16V22 μF
D108	001-0377-21	MA4039H
D109	001-0377-32	MA4056M
D110	001-0377-45	MA4082H
D111	001-0377-68	MA4180L
D114	001-0377-68	MA4180L
D115	001-0377-68	MA4180L
D116	001-0377-40	MA4075L
D117	001-0503-47	HZS9B3L
D118	001-0503-32	HZS6A3L
D120	001-0516-00	MA111
D122	001-0516-00	MA111
D301	001-0376-34	MTZJ6.2A
D302	001-2015-00	RL253
D304	001-2015-00	RL253
D305	001-0466-00	S5688B
D306	001-0516-00	MA111
D500	001-0330-00	1SS119
D501	001-0330-00	1SS119
D502	001-0330-00	1SS119
D503	001-0330-00	1SS119
D504	001-0377-68	MA4180L
D505	001-0516-00	MA111
IC103	051-6212-08	LC72191JM-TLM
IC105	051-5013-00	LC75384E
IC106	051-6600-38	CA0008AM
IC107	052-3143-20	M30622MAA-D86FP
IC109	051-0869-05	MB3771PF(-G)
IC113	051-3019-90	NJM2060V
IC114	051-1700-00	TA7806S
IC305	051-2013-00	TDA7385
IC500	051-0172-05	TC4011BF
IC501	051-3237-00	NJM78L18A
J101	074-1186-26	26P
J102	074-1194-00	13P CE-NET
J104	074-0898-12	12P
J105	074-0898-12	12P
J303	074-1010-00	OUTLET SOCKET
JW101	117-0000-00	1/10W 0Ω JW
JW102	117-0000-00	1/10W 0Ω JW
JW103	117-0000-00	1/10W 0Ω JW
JW104	117-0000-00	1/10W 0Ω JW
L101	010-2330-12	2.2 μH J
L102	010-2230-88	220 μH
L103	010-2330-17	5.6 μH J
L107	010-2230-84	100 μH
L108	010-2230-84	100 μH
P103	076-0540-18	18P
P106	076-0368-12	12P
P107	076-0368-12	12P
P108	076-0312-03	3P
Q105	102-2712-51	2SC2712G,L
Q107	102-2712-51	2SC2712G,L
Q112	101-1240-00	2SB1240
Q113	101-1240-00	2SB1240
Q115	125-0002-02	RN2402
Q116	125-2004-03	RN1403
Q118	102-2712-00	2SC2712
Q119	103-1858-00	2SD1858
Q120	103-1858-00	2SD1858
Q121	125-0002-03	RN2403
Q123	125-0002-02	RN2402

REF No.	PART No.	DESCRIPTION
Q124	125-2004-02	RN1402
Q125	103-2012-00	2SD2012
Q128	125-0002-02	RN2402
Q129	125-2004-03	RN1403
Q130	102-2712-00	2SC2712
Q132	100-1431-00	2SA1431
Q133	103-1858-00	2SD1858
Q134	103-1858-00	2SD1858
Q135	102-2712-51	2SC2712G,L
Q137	100-1162-00	2SA1162
Q138	125-2004-06	RN1406
Q140	108-0161-50	2SK161Y.G
Q142	101-1240-00	2SB1240
Q143	125-2004-03	RN1403
Q144	103-1858-00	2SD1858
Q145	102-2458-51	2SC2458Y.GR.BL
Q300	125-4001-00	XN1504
Q301	125-4001-00	XN1504
Q302	125-2003-03	RN1203
Q303	125-2004-02	RN1402
Q304	100-1431-00	2SA1431
Q305	125-2003-01	RN1201
Q306	125-0002-03	RN2403
Q500	100-1048-50	2SA1048Y,GR
Q501	102-2458-49	2SC2458Y,GR
Q502	100-1048-50	2SA1048Y,GR
Q503	102-2458-49	2SC2458Y,GR
Q504	103-1858-00	2SD1858
R103	117-2221-10	1/10W 2.2kΩ
R105	117-2221-10	1/10W 2.2kΩ
R110	117-4721-10	1/10W 4.7kΩ
R116	117-4721-10	1/10W 4.7kΩ
R117	117-2221-10	1/10W 2.2kΩ
R121	117-1021-10	1/10W 1kΩ
R128	117-4721-10	1/10W 4.7kΩ
R129	117-2221-10	1/10W 2.2kΩ
R130	117-2221-10	1/10W 2.2kΩ
R131	117-2221-10	1/10W 2.2kΩ
R132	117-1031-10	1/10W 10kΩ
R134	117-1221-10	1/10W 1.2kΩ
R135	117-1221-10	1/10W 1.2kΩ
R136	117-1031-10	1/10W 10kΩ
R137	117-1031-10	1/10W 10kΩ
R138	117-1031-10	1/10W 10kΩ
R140	117-2231-10	1/10W 22kΩ
R141	117-1021-10	1/10W 1kΩ
R143	117-1031-10	1/10W 10kΩ
R144	117-1021-10	1/10W 1kΩ
R147	117-1021-10	1/10W 1kΩ
R148	117-2241-10	1/10W 220kΩ
R149	117-2241-10	1/10W 220kΩ
R150	117-3341-10	1/10W 330kΩ
R151	117-1031-10	1/10W 10kΩ
R156	117-3341-10	1/10W 330kΩ
R157	111-2291-91	1/4WS 2.2Ω
R158	117-4721-10	1/10W 4.7kΩ
R161	117-2231-10	1/10W 22kΩ
R164	117-2231-10	1/10W 22kΩ
R166	117-1241-10	1/10W 120kΩ
R167	117-1241-10	1/10W 120kΩ
R168	117-1241-10	1/10W 120kΩ
R169	117-1241-10	1/10W 120kΩ
R170	117-2231-10	1/10W 22kΩ
R171	117-4721-10	1/10W 4.7kΩ
R172	117-4721-10	1/10W 4.7kΩ
R173	117-4731-10	1/10W 47kΩ
R176	117-4731-10	1/10W 47kΩ

REF No.	PART No.	DESCRIPTION
R177	117-4721-10	1/10W 4.7kΩ
R178	117-4721-10	1/10W 4.7kΩ
R182	117-4731-10	1/10W 47kΩ
R185	117-6811-10	1/10W 680Ω
R187	117-2221-10	1/10W 2.2kΩ
R188	117-2221-10	1/10W 2.2kΩ
R189	117-2221-10	1/10W 2.2kΩ
R190	111-3311-91	1/4WS 330Ω
R191	117-6821-10	1/10W 6.8kΩ
R193	117-2231-10	1/10W 22kΩ
R194	117-3621-10	1/10W 3.6kΩ
R195	117-3621-10	1/10W 3.6kΩ
R196	117-3321-10	1/10W 3.3kΩ
R197	117-3331-10	1/10W 33kΩ
R198	117-2231-10	1/10W 22kΩ
R200	117-1041-10	1/10W 100kΩ
R201	117-2231-10	1/10W 22kΩ
R205	117-2231-10	1/10W 22kΩ
R207	117-2231-10	1/10W 22kΩ
R209	111-2291-91	1/4WS 2.2Ω
R210	111-2291-91	1/4WS 2.2Ω
R214	117-1041-10	1/10W 100kΩ
R215	117-5611-10	1/10W 560Ω
R224	117-1031-10	1/10W 10kΩ
R225	117-5631-10	1/10W 56kΩ
R227	111-4711-91	1/4WS 470Ω
R229	117-1241-10	1/10W 120kΩ
R230	117-1041-10	1/10W 100kΩ
R241	117-5621-10	1/10W 5.6kΩ
R243	117-1021-10	1/10W 1kΩ
R244	111-2291-91	1/4WS 2.2Ω
R245	111-2291-91	1/4WS 2.2Ω
R246	117-4721-10	1/10W 4.7kΩ
R247	111-6801-91	1/4WS 68Ω
R248	117-1031-10	1/10W 10kΩ
R249	111-1211-91	1/4WS 120Ω
R250	111-2221-91	1/4WS 2.2kΩ
R251	117-1031-10	1/10W 10kΩ
R252	111-2221-91	1/4WS 2.2kΩ
R253	117-1011-10	1/10W 100Ω
R258	111-2221-91	1/4WS 2.2kΩ
R261	114-8291-11	1W 8.2Ω
R262	117-1031-10	1/10W 10kΩ
R263	111-2221-91	1/4WS 2.2kΩ
R266	117-4721-10	1/10W 4.7kΩ
R267	117-1031-10	1/10W 10kΩ
R269	111-4791-91	1/4WS 4.7Ω
R270	111-4791-91	1/4WS 4.7Ω
R272	117-6821-10	1/10W 6.8kΩ
R273	114-3391-11	1W 3.3Ω
R274	117-1041-10	1/10W 100kΩ
R275	117-1041-10	1/10W 100kΩ
R276	117-1041-10	1/10W 100kΩ
R277	117-4731-10	1/10W 47kΩ
R278	117-1031-10	1/10W 10kΩ
R287	117-4741-10	1/10W 470kΩ
R288	117-4731-10	1/10W 47kΩ
R292	117-1041-10	1/10W 100kΩ
R296	117-1021-10	1/10W 1kΩ
R297	117-1021-10	1/10W 1kΩ
R298	111-4711-91	1/4WS 470Ω
R300	117-1031-10	1/10W 10kΩ
R301	117-1031-10	1/10W 10kΩ
R302	117-1031-10	1/10W 10kΩ
R303	117-1031-10	1/10W 10kΩ
R304	117-6821-10	1/10W 6.8kΩ
R305	117-1031-10	1/10W 10kΩ

REF No.	PART No.	DESCRIPTION
R306	117-1031-10	1/10W 10kΩ
R307	117-6821-10	1/10W 6.8kΩ
R308	117-2241-10	1/10W 220kΩ
R309	117-2241-10	1/10W 220kΩ
R310	117-2241-10	1/10W 220kΩ
R311	117-2241-10	1/10W 220kΩ
R312	117-6821-10	1/10W 6.8kΩ
R313	117-1031-10	1/10W 10kΩ
R314	117-1031-10	1/10W 10kΩ
R315	117-6821-10	1/10W 6.8kΩ
R321	117-0000-00	1/10W 0Ω JW
R322	117-0000-00	1/10W 0Ω JW
R326	117-0000-00	1/10W 0Ω JW
R330	117-0000-00	1/10W 0Ω JW
R358	117-0000-00	1/10W 0Ω JW
R359	117-0000-00	1/10W 0Ω JW
R360	117-0000-00	1/10W 0Ω JW
R361	117-0000-00	1/10W 0Ω JW
R362	117-2221-10	1/10W 2.2kΩ
R363	117-2221-10	1/10W 2.2kΩ
R365	117-2221-10	1/10W 2.2kΩ
R366	117-2221-10	1/10W 2.2kΩ
R369	117-4731-10	1/10W 47kΩ
R370	117-2221-10	1/10W 2.2kΩ
R373	117-4731-10	1/10W 47kΩ
R374	117-4731-10	1/10W 47kΩ
R375	117-4731-10	1/10W 47kΩ
R376	117-4721-10	1/10W 4.7kΩ
R377	117-4721-10	1/10W 4.7kΩ
R378	117-4721-10	1/10W 4.7kΩ
R380	117-4721-10	1/10W 4.7kΩ
R381	111-1021-91	1/4WS 1kΩ
R383	117-1031-10	1/10W 10kΩ
R384	117-2231-10	1/10W 22kΩ
R385	111-4721-91	1/4WS 4.7kΩ
R386	111-2701-91	1/4WS 27Ω
R387	111-2221-91	1/4WS 2.2kΩ
R388	111-8201-91	1/4WS 82Ω
R389	111-8221-91	1/4WS 8.2kΩ
R390	117-2221-10	1/10W 2.2kΩ
R391	117-2221-10	1/10W 2.2kΩ
R393	111-2701-91	1/4WS 27Ω
R406	111-2701-91	1/4WS 27Ω
R407	111-8201-91	1/4WS 82Ω
R408	117-1031-10	1/10W 10kΩ
R409	111-1521-91	1/4WS 1.5kΩ
R410	111-1031-91	1/4WS 10kΩ
R500	117-4731-10	1/10W 47kΩ
R501	117-4731-10	1/10W 47kΩ
R502	117-1531-10	1/10W 15kΩ
R503	117-1531-10	1/10W 15kΩ
R504	117-1531-10	1/10W 15kΩ
R505	117-1531-10	1/10W 15kΩ
R506	117-3331-10	1/10W 33kΩ
R507	111-1001-91	1/4WS 10Ω
R508	111-1021-91	1/4WS 1kΩ
R900	117-1011-10	1/10W 100Ω
R902	117-4721-10	1/10W 4.7kΩ
SUP1	060-0122-10	DSP-201M-S00B
T301	009-0666-62	0.4mH
TC101	004-1580-10	30pF GRN
VR101	012-5203-57	22kΩ
VR103	012-5203-57	22kΩ
VR105	012-5203-63	470kΩ
X101	061-1066-00	7.2MHz
X103	061-3504-90	CX-5F 10MHz
X104	061-3506-90	10MHz

Switch PWB section(B2)

REF No.	PART No.	DESCRIPTION
C401	178-1032-78	0.01 μF
C402	178-1032-78	0.01 μF
C403	178-1042-78	0.1 μF
C404	176-3301-00	33pF CH
C405	178-1042-78	0.1 μF
D401	001-2403-90	M1F60
D402	001-2403-90	M1F60
IC401	051-6028-10	LC75757W
J401	074-1151-18	18P
PL401	017-0420-09	14V40mA
PL402	017-0420-09	14V40mA
PL403	017-0420-09	14V40mA
PL404	017-0420-09	14V40mA

REF No.	PART No.	DESCRIPTION
PL405	017-0420-09	14V40mA
PL406	017-0420-09	14V40mA
R401	117-1231-10	1/10W 12kΩ
R402	117-1021-10	1/10W 1kΩ
R403	117-1021-10	1/10W 1kΩ
R404	117-1021-10	1/10W 1kΩ
R405	117-1021-10	1/10W 1kΩ
S401	013-6302-01	SKQMAL
S402	013-6302-01	SKQMAL
S403	013-6302-01	SKQMAL
S404	013-6302-01	SKQMAL
S405	013-6302-01	SKQMAL
S406	013-6302-01	SKQMAL

REF No.	PART No.	DESCRIPTION
S407	013-6302-01	SKQMAL
S408	013-6302-01	SKQMAL
S409	013-6302-01	SKQMAL
S410	013-6302-01	SKQMAL
S411	013-6302-01	SKQMAL
S412	013-6302-01	SKQMAL
S413	013-6302-01	SKQMAL
S414	013-6302-01	SKQMAL
S415	013-6302-01	SKQMAL
S416	013-6302-01	SKQMAL
S417	013-6302-01	SKQMAL
S418	013-6302-01	SKQMAL
VR401	016-0010-05	

Mechanism PWB section(B3) : CD mechanism

REF No.	PART No.	DESCRIPTION
C1	183-1073-12	6.3V100 μF
C2	183-4763-11	6.3V47 μF
C3	178-1042-78	0.1 μF
C4	176-2201-00	22pF CH
C5	176-1801-00	18pF CH
C6	176-1801-00	18pF CH
C7	176-8201-00	82pF CH
C8	178-1042-78	0.1 μF
C9	178-2242-78	0.22 μF
C10	178-2242-78	0.22 μF
C11	176-4701-00	47pF CH
C12	178-1532-78	0.015 μF
C13	178-1032-78	0.01 μF
C14	178-2722-78	2700pF
C15	178-4722-78	4700pF
C16	176-1201-00	12pF CH
C17	178-4712-78	470pF
C18	178-4712-78	470pF
C19	178-4732-78	0.047 μF
C20	178-4732-78	0.047 μF
C21	178-4732-78	0.047 μF
C22	178-4732-78	0.047 μF
C23	178-1032-78	0.01 μF
C25	183-1073-21	10V100 μF
C26	178-1042-78	0.1 μF
C27	178-1042-78	0.1 μF
C29	178-1042-78	0.1 μF
C30	178-1042-78	0.1 μF
C31	178-1032-78	0.01 μF
C32	178-1032-78	0.01 μF
C33	178-1042-78	0.1 μF

REF No.	PART No.	DESCRIPTION
C34	176-1501-00	15pF CH
C35	176-1501-00	15pF CH
C39	178-1042-78	0.1 μF
C40	178-1042-78	0.1 μF
C41	183-1073-12	6.3V100 μF
C43	183-1073-12	6.3V100 μF
C44	183-4763-11	6.3V47 μF
C45	183-1073-12	6.3V100 μF
C46	178-1032-78	0.01 μF
C47	178-1042-78	0.1 μF
C48	178-1032-78	0.01 μF
C49	176-6801-00	68pF CH
C51	178-1032-78	0.01 μF
C52	178-1032-78	0.01 μF
C54	183-4763-11	6.3V47 μF
C55	178-1042-78	0.1 μF
C56	178-1042-78	0.1 μF
C58	178-1042-78	0.1 μF
C59	178-2222-78	2200pF
D1	001-0563-00	GL380
D2	001-0563-00	GL380
D3	001-0563-00	GL380
D4	001-0330-00	1SS119
IC1	051-5704-00	TA2096FN
IC2	051-6330-00	TC9432AF
IC3	051-6026-08	TA2058F
IC4	051-6027-00	BA6283N
J1	074-1138-17	17P
J2	074-1143-06	6P
L1	010-2155-03	10 μH
L3	010-2199-24	10 μH J

REF No.	PART No.	DESCRIPTION
Q1	101-1237-50	2SB1237QR
Q2	102-2712-00	2SC2712
R1	117-1011-10	1/10W 100Ω
R2	117-1841-10	1/10W 180kΩ
R3	117-1841-10	1/10W 180kΩ
R4	117-2201-10	1/10W 22Ω
R5	117-8231-10	1/10W 82kΩ
R6	117-1041-10	1/10W 100kΩ
R7	117-1041-10	1/10W 100kΩ
R8	117-1031-10	1/10W 10kΩ
R9	117-2221-10	1/10W 2.2kΩ
R10	117-1031-10	1/10W 10kΩ
R12	117-1031-10	1/10W 10kΩ
R13	117-4731-10	1/10W 47kΩ
R15	117-4741-10	1/10W 470kΩ
R17	117-3331-10	1/10W 33kΩ
R18	117-3311-10	1/10W 330Ω
R19	117-3321-10	1/10W 3.3kΩ
R20	117-1031-10	1/10W 10kΩ
R21	117-3321-10	1/10W 3.3kΩ
R22	117-3321-10	1/10W 3.3kΩ
R23	117-3321-10	1/10W 3.3kΩ
R24	117-3321-10	1/10W 3.3kΩ
R26	117-1041-10	1/10W 100kΩ
R27	117-4711-10	1/10W 470Ω
R28	117-2211-10	1/10W 220Ω
R29	117-2211-10	1/10W 220Ω
R30	117-4721-10	1/10W 4.7kΩ
R34	111-2711-91	1/4WS 270Ω
R40	117-3321-10	1/10W 3.3kΩ
X1	061-3051-00	HC49/US 16.92MHz

Sensor PWB section(B4) : CD mechanism

REF No.	PART No.	DESCRIPTION
Q101	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
Q102	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
Q103	060-0252-01	PT4850F

Chucking switch PWB section(B5) : CD mechanism

REF No.	PART No.	DESCRIPTION
S2	013-3879-01	CHUCKING SWITCH

REF No.	PART No.	DESCRIPTION
M3	SMA-147-100	LOADING MOTOR

Limit switch PWB section(B6) : CD mechanism

REF No.	PART No.	DESCRIPTION
S1	013-7100-00	LIMIT SWITCH

REF No.	PART No.	DESCRIPTION
M1	SMA-151-100	SPINDLE MOTOR

REF No.	PART No.	DESCRIPTION
M2	SMA-146-100	SLED MOTOR