Packing Method View

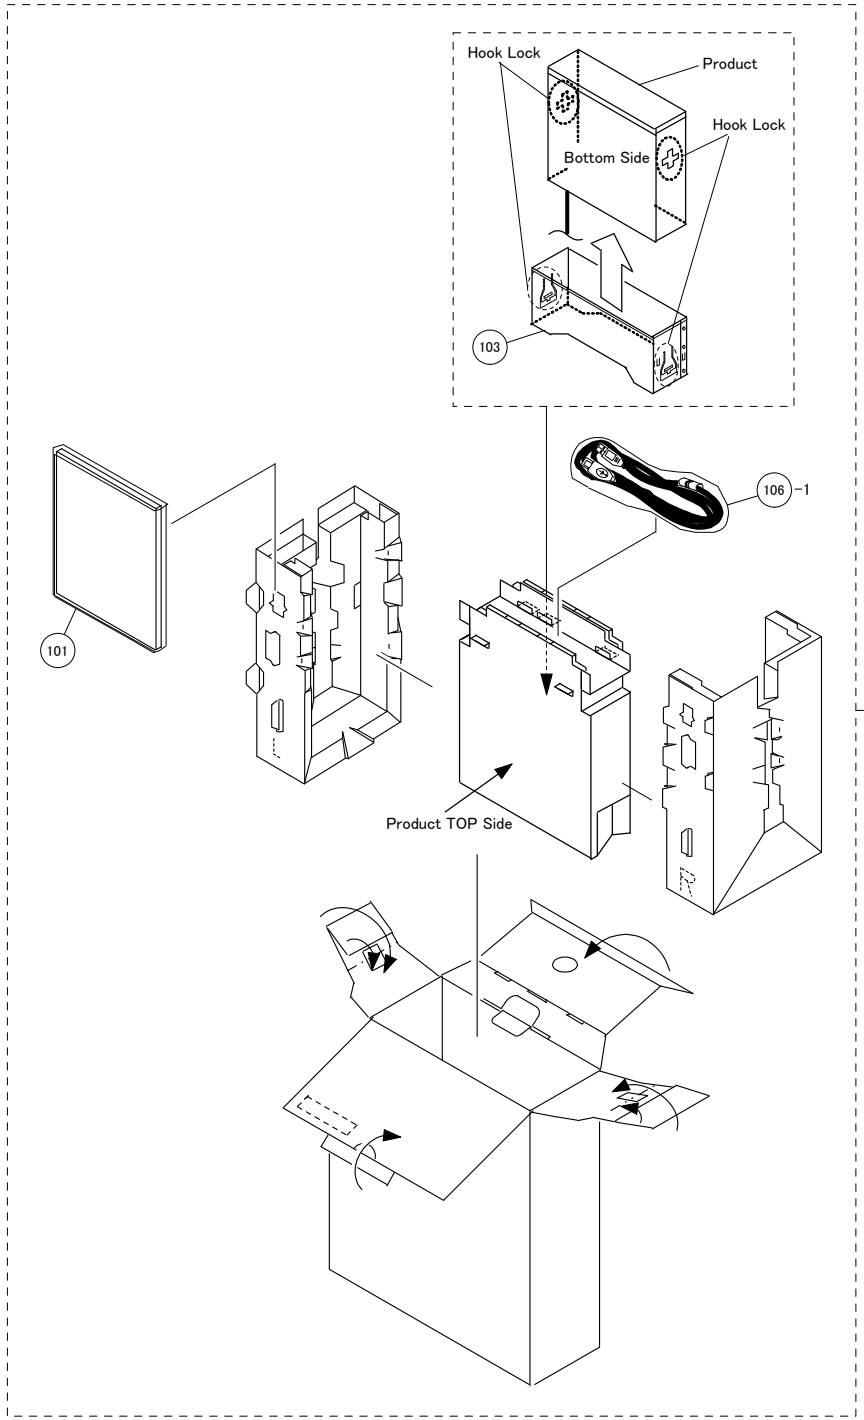

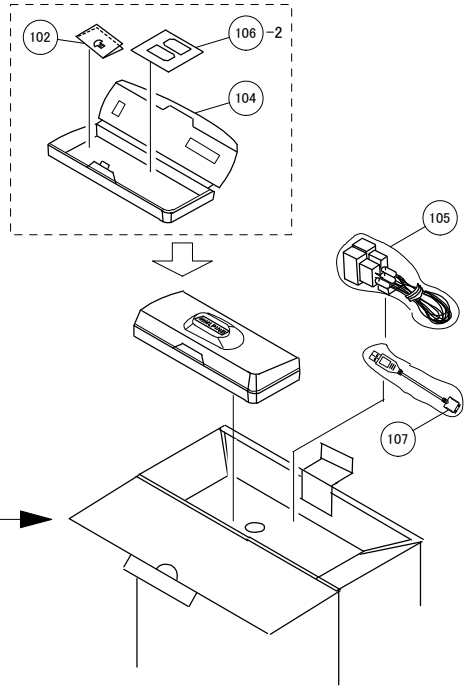

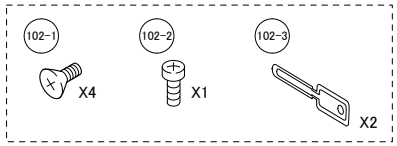

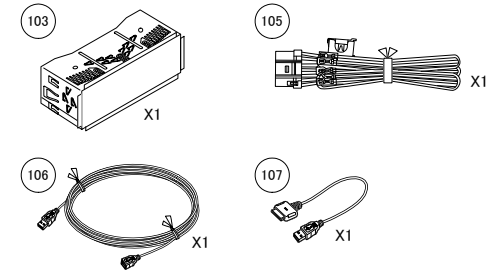

101

iDA-X200 (North American) Only

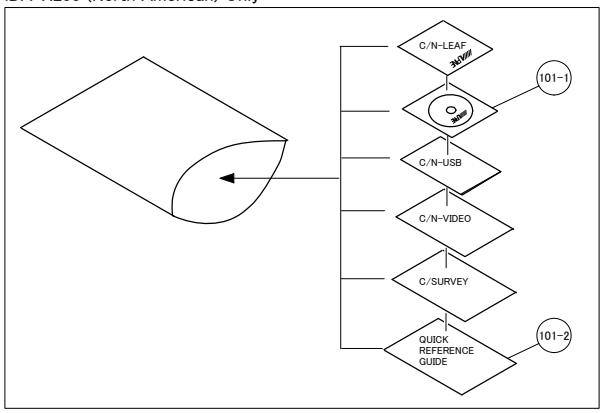

iDA-X200 (General Foreign) Only

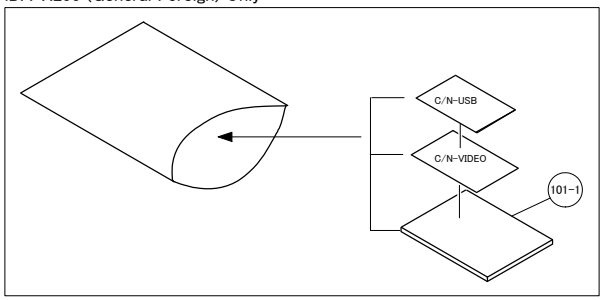

iDA-X200 (Chinese) Only

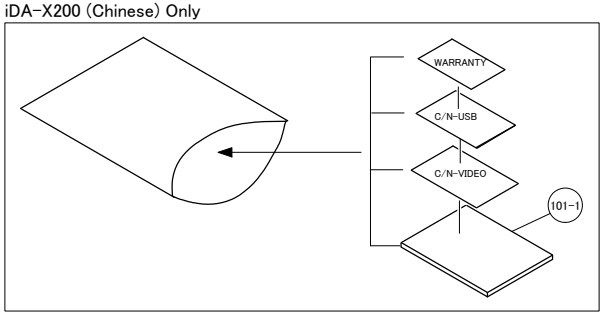

MODEL	Symbol No.	Parts No.	Description
#1	101-1	68-10334Z05	O/M-CDROM X-POD
$1	101-1	68-09359Z65	O/M AAO AOTH
%1	101-1	68-09359Z66	O/M AOCH AOTH
#1	101-2	68-09359Z61	C/N-QRG AOAM AOTH
	102-1	03S60820Y16	SCR,MCH 5X8 ZN A
	102-2	03S60824Y01	SCR,WEV 1.7X4 ZN A
	102-3	07-12021Z01	BKT,RELEASE
	103	15-12022Z01	CASE,INNER
	104	15-11587Z01	CARRING,CASE
	105	09-09395Z01	ASSY,ANIC-0032-01A
	106	09-11953Z03	ASSY,YAF11-1253N
	107	09-09244Z01	ASSY,Z0617R

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

System Connection

Connections

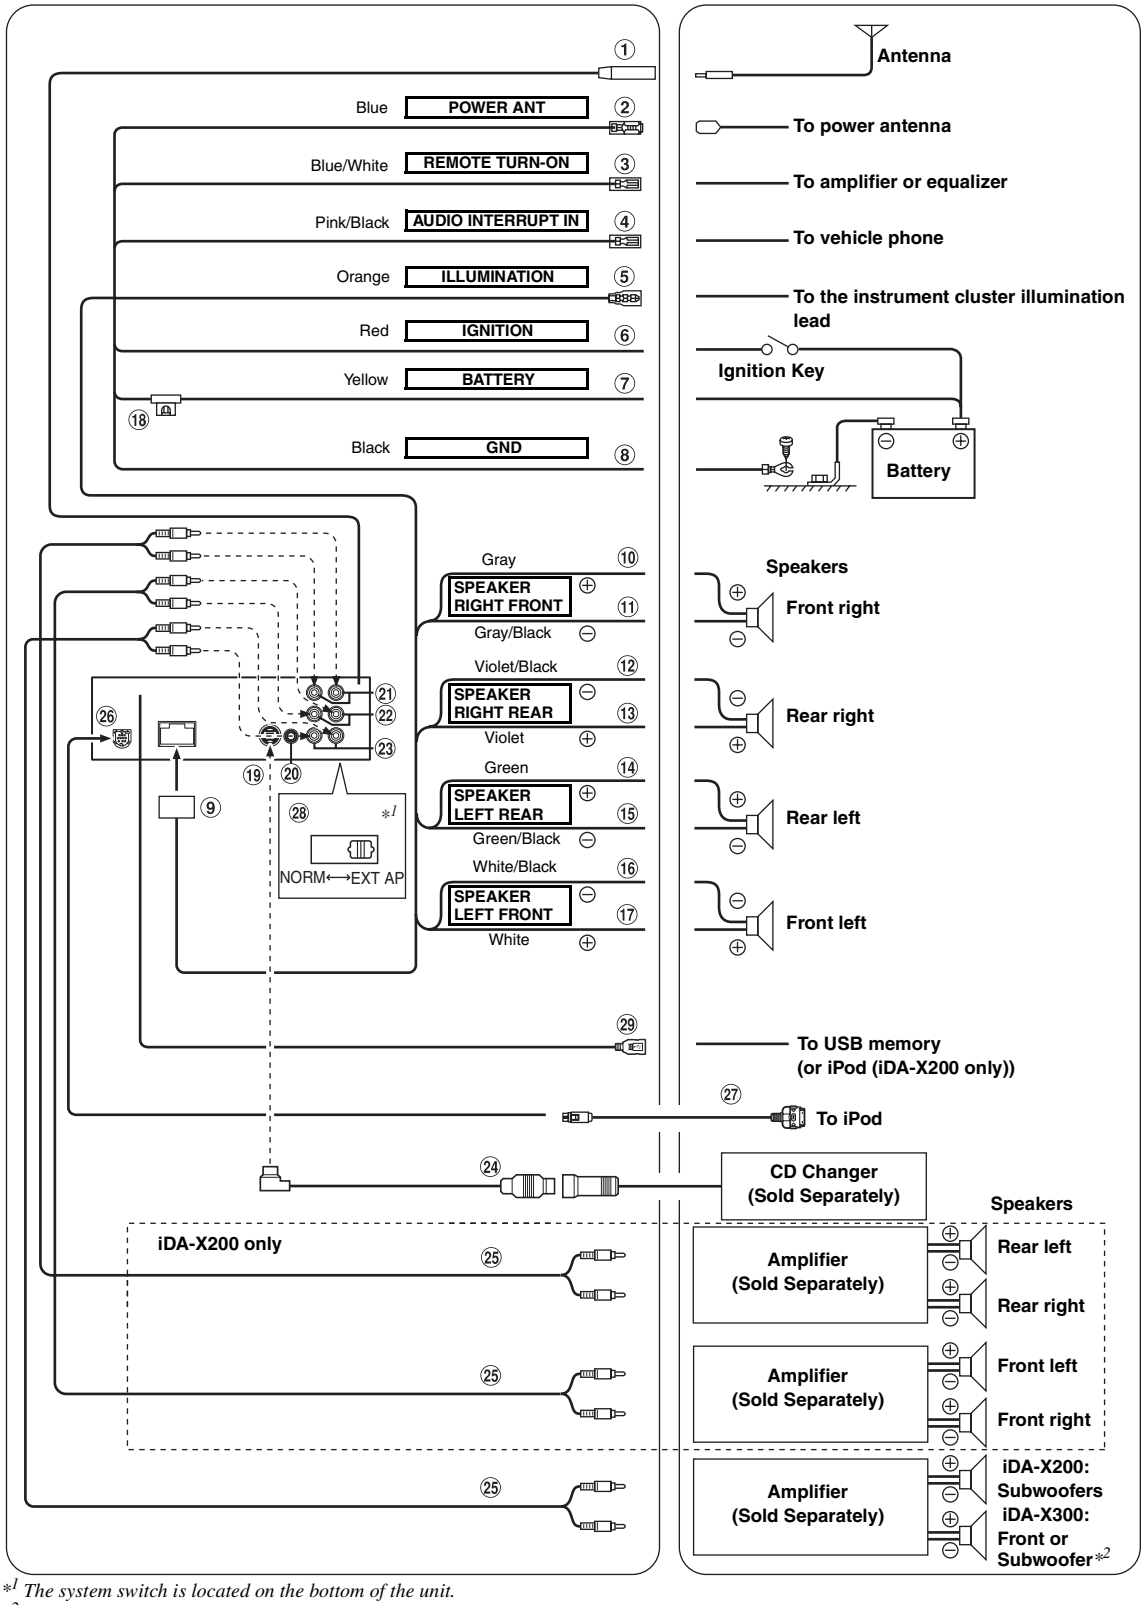

*1 *The system switch is located on the bottom of the unit.*

*2 *When Subwoofer is OFF: Output is for Front speakers. When Subwoofer is ON: Output is for Subwoofer.*

① **Antenna Receptacle**

② **Power Antenna Lead (Blue)**
Connect this lead to the +B terminal of your power antenna, if applicable.

- *This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier, or a signal processor, etc.*

③ **Remote Turn-On Lead (Blue/White)**
Connect this lead to the remote turn-on lead of your amplifier or signal processor.

④ **Audio Interrupt In Lead (Pink/Black)**

⑤ **Illumination Lead (Orange)**
This lead may be connected to the vehicle's instrument cluster illumination lead. This will allow the backlighting of the iDA-X200/iDA-X300 to dim whenever the vehicle's lights are turned on.

⑥ **Switched Power Lead (Ignition) (Red)**
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+)12V only when the ignition is turned on or in the accessory position.

⑦ **Battery Lead (Yellow)**
Connect this lead to the positive (+) post of the vehicle's battery.

⑧ **Ground Lead (Black)**
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

⑨ **Power Supply Connector**

⑩ **Right Front (+) Speaker Output Lead (Gray)**

⑪ **Right Front (–) Speaker Output Lead (Gray/Black)**

⑫ **Right Rear (–) Speaker Output Lead (Violet/Black)**

⑬ **Right Rear (+) Speaker Output Lead (Violet)**

⑭ **Left Rear (+) Speaker Output Lead (Green)**

⑮ **Left Rear (–) Speaker Output Lead (Green/Black)**

⑯ **Left Front (–) Speaker Output Lead (White/Black)**

⑰ **Left Front (+) Speaker Output Lead (White)**

⑱ **Fuse Holder (10A)**

⑲ **Ai-NET Connector**
Connect this to the output or input connector of another device (CD Changer, Equalizer, HD Radio TUNER MODULE, etc.) equipped with Ai-NET.

- *Interface adapter for iPod (KCA-420i) is not recommended for use with this product.*

⑳ **Steering Remote Control Interface Connector (iDA-X200 North American Model only)**
To steering remote control interface box.

㉑ **Rear Output/Input RCA Connectors (iDA-X200 only)**
It can be used as Rear Output or Input RCA Connectors. RED is right and WHITE is left.

㉒ **Front Output/Input RCA Connectors (iDA-X200 only)**
It can be used as Front Output or Input RCA Connectors. RED is right and WHITE is left.

㉓ **Subwoofer Output RCA Connectors (iDA-X200 only)**

㉓ **Front/Subwoofer Output RCA Connectors (iDA-X300 only)**
RED is right and WHITE is left.

㉔ **Ai-NET Cable (Included with CD Changer)**

㉕ **RCA Extension Cable (sold separately)**

㉖ **iPod Direct Connector**
Control iPod signals.
Connect this to an iPod or to an optional Bluetooth Box. To use a hands-free mobile phone, an optional Bluetooth Box connection is required. For details on connection, refer to the Owner's Manual of the Bluetooth Box.
You can also connect this to an external device (such as a portable player) by using iPod Direct/RCA Interface cable (sold separately).

AUX+ ON : When the external device is connected.
AUX+ OFF : When an iPod is connected.

㉗ **FULL SPEED™ Connection Cable (KCE-422i) (iDA-X200 sold separately/iDA-X300 supplied)**

㉘ **System Switch**
When connecting a processor or divider using Ai-NET, place this switch in the EXT AP position. When no device is connected, leave the switch in the NORM position.
iDA-X200 only:
When switched to NORM, the RCA Connectors ㉑ and ㉒ can be used as Output RCA Connectors.
When switched to EXT AP, the RCA Connectors ㉑ and ㉒ can be used as Input RCA Connectors.

- *Be sure to turn the power off to the unit before changing the switch position.*

㉙ **USB Connector**
Connect this to an USB memory (or to an iPod (iDA-X200 only)). To use an iPod, iPod Dock interface cable connection is required (iDA-X200 only).

- *Use the supplied USB cable. If a USB cable other than the supplied is used, correct performance cannot be guaranteed.*
- *Route the USB cable away from other cables.*

To prevent external noise from entering the audio system.
- Locate the unit and route the leads at least 10 cm away from the car harness.
- Keep the battery power leads as far away from other leads as possible.
- Connect the ground lead securely to a bare metal spot (remove any paint, dirt or grease if necessary) of the car chassis.
- If you add an optional noise suppressor, connect it as far away from the unit as possible. Your Alpine dealer carries various noise suppressors, contact them for further information.
- Your Alpine dealer knows best about noise prevention measures so consult your dealer for further information.

Extension Cable

*Always connect the Extension Cable when making checks of voltage and repair.

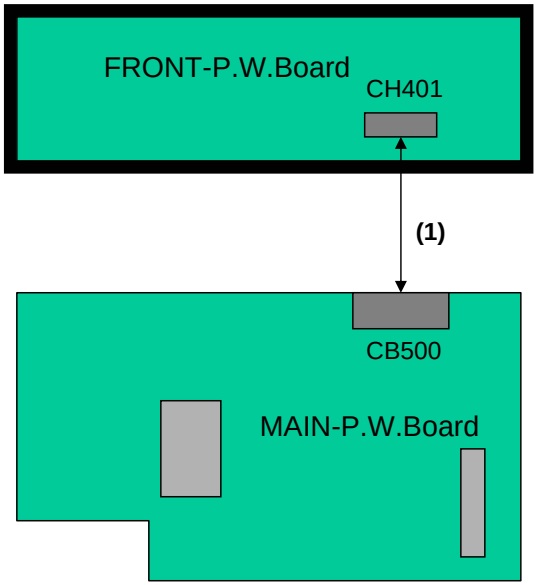

(1) 01V40487S01

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			ANT100	09-06103Z02	ASSY,ANID-0035-02A
MAIN-P.W.Board			BZ800	50T04252K01	BUZZER,XY13-5H
MAIN-P.W.Board			C101	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C102	08S45677W42	CAP,CER.181J-CH1H-CP
MAIN-P.W.Board			C103	08S45677W42	CAP,CER.181J-CH1H-CP
MAIN-P.W.Board			C104	08S45677W36	CAP,CER.101J-CH1H-CP
MAIN-P.W.Board			C105	08S45677W54	CAP,CER 561J-CH1H-CP
MAIN-P.W.Board			C106	08S45676W93	CAP,CER 224K-B1A -CP
MAIN-P.W.Board			C107	08S65128F88	CAP,CER 104K-B1H -CP
MAIN-P.W.Board			C109	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C300	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C301	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C302	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C303	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C305	08S65669Y01	CAP,CER 334KX7R1E-CP
MAIN-P.W.Board			C306	08S65669Y01	CAP,CER 334KX7R1E-CP
MAIN-P.W.Board			C308	08S45539Y02	CAP,CER 222KX7R2J-CP
MAIN-P.W.Board			C309	08S45539Y02	CAP,CER 222KX7R2J-CP
MAIN-P.W.Board			C310	08S45539Y02	CAP,CER 222KX7R2J-CP
MAIN-P.W.Board			C312	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C314	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C315	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C316	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C317	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C318	08S60102F44	CAP,CER 474K-B1E -CP
MAIN-P.W.Board			C319	08S45676W77	CAP,CER.333Z-F1H -CP
MAIN-P.W.Board			C320	08S65676Y03	CAP,CER 225KX7R1C-CP
MAIN-P.W.Board			C509	08S45677W16	CAP,CER.15RJ-CH1H-CP
MAIN-P.W.Board			C510	08S45677W14	CAP,CER.12RJ-CH1H-CP
MAIN-P.W.Board			C511	08S45677W22	CAP,CER.27RJ-CH1H-CP
MAIN-P.W.Board			C512	08S45676W79	CAP,CER 183K-B1E -CP
MAIN-P.W.Board			C513	08S45677W22	CAP,CER.27RJ-CH1H-CP
MAIN-P.W.Board			C514	08S45676W79	CAP,CER 183K-B1E -CP
MAIN-P.W.Board			C515	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C516	08S45677W60	CAP,CER 102J-CH1H-CP
MAIN-P.W.Board			C517	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C519	08S35374W01	CAP,CER 104K-B1E-CP
MAIN-P.W.Board			C520	08S65128F90	CAP,CER 473K-B1H -CP
MAIN-P.W.Board			C521	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C522	08T81833F07	CAP,CER 105K-B1C -CP
MAIN-P.W.Board		#1	C523	08S35374W01	CAP,CER 104K-B1E-CP
MAIN-P.W.Board		#1	C524	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C525	08S45677W22	CAP,CER.27RJ-CH1H-CP
MAIN-P.W.Board			C526	08S45677W36	CAP,CER.101J-CH1H-CP
MAIN-P.W.Board		#1	C527	08S45676W65	CAP,CER.222K-B1H -CP
MAIN-P.W.Board		#1	C528	08S45677W36	CAP,CER.101J-CH1H-CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C529	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C531	08S45676W60	CAP,CER.102J-SL1H-CP
MAIN-P.W.Board			C532	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C600	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C601	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C602	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C603	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C604	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C605	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C606	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C607	08S45677W20	CAP,CER.22RJ-CH1H-CP
MAIN-P.W.Board			C608	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C609	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C610	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C611	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C612	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C613	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C614	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C615	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C616	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C617	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C618	08S65674Y05	CAP,CER 105KX5R1C-CP
MAIN-P.W.Board			C619	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C620	08S65676Y05	CAP,CER 105KX7R1E-CP
MAIN-P.W.Board			C621	08S65676Y05	CAP,CER 105KX7R1E-CP
MAIN-P.W.Board			C622	08S65676Y05	CAP,CER 105KX7R1E-CP
MAIN-P.W.Board			C623	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C625	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C626	08S65676Y03	CAP,CER 225KX7R1C-CP
MAIN-P.W.Board			C627	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C628	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C700	08S45676W62	CAP,CER.122J-SL1H-CP
MAIN-P.W.Board			C701	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C702	08S45677W14	CAP,CER.12RJ-CH1H-CP
MAIN-P.W.Board			C703	08S45677W14	CAP,CER.12RJ-CH1H-CP
MAIN-P.W.Board			C704	08S65670Y04	CAP,CER 475KX5R1E-CP
MAIN-P.W.Board			C705	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C706	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C707	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C708	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C709	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C710	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C711	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C712	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C713	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C715	08S45676W85	CAP,CER 104K-B1C -CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C716	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C717	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C718	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C719	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C720	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C721	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C722	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C724	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C725	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C726	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C727	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C728	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C729	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C730	08S65676Y05	CAP,CER 105KX7R1E-CP
MAIN-P.W.Board			C731	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C732	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C733	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C734	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C735	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C736	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C739	08S45677W49	CAP,CER 361J-CH1H-CP
MAIN-P.W.Board			C742	08S45677W09	CAP,CER 7R0D-CH1H-CP
MAIN-P.W.Board			C743	08S45677W09	CAP,CER 7R0D-CH1H-CP
MAIN-P.W.Board			C744	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C745	08S45676W77	CAP,CER.333Z-F1H -CP
MAIN-P.W.Board			C746	08S45676W77	CAP,CER.333Z-F1H -CP
MAIN-P.W.Board			C749	08S45677W48	CAP,CER.331J-CH1H-CP
MAIN-P.W.Board			C750	08S45677W48	CAP,CER.331J-CH1H-CP
MAIN-P.W.Board			C751	08S45677W52	CAP,CER 471J-CH1H-CP
MAIN-P.W.Board			C752	08S45677W52	CAP,CER 471J-CH1H-CP
MAIN-P.W.Board			C753	08S45677W38	CAP,CER 121J-CH1H-CP
MAIN-P.W.Board			C754	08S45677W38	CAP,CER 121J-CH1H-CP
MAIN-P.W.Board			C757	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C758	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C800	08T55390W34	CAP,TF 274J-1H -R5
MAIN-P.W.Board			C801	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C803	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C804	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C805	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C806	08S60102F44	CAP,CER 474K-B1E -CP
MAIN-P.W.Board			C807	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C808	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C809	08S65667Y01	CAP,CER 224KX5R1C-CP
MAIN-P.W.Board			C810	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C811	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C812	08S45676W80	CAP,CER 223K-B1E -CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C813	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C814	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C815	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C816	08S35374W01	CAP,CER 104K-B1E-CP
MAIN-P.W.Board			C817	08S35350Y04	CAP,CER 105K-B1C -CP
MAIN-P.W.Board			C818	08-02764Z03	CAP,TF 224K-1E -CP
MAIN-P.W.Board			C819	08-02764Z03	CAP,TF 224K-1E -CP
MAIN-P.W.Board			C820	08-02764Z03	CAP,TF 224K-1E -CP
MAIN-P.W.Board			C821	08-02764Z03	CAP,TF 224K-1E -CP
MAIN-P.W.Board			C822	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C823	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C825	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C827	08S45676W83	CAP,CER 473K-B1C -CP
MAIN-P.W.Board			C829	08S65676Y05	CAP,CER 105KX7R1E-CP
MAIN-P.W.Board			C832	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C833	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			C834	08S45539Y04	CAP,CER 103KX7R2J-CP
MAIN-P.W.Board			CB500	09-05560Z01	BTB,DF15-S -DB
MAIN-P.W.Board			CB700	09-05987Z04	WTB,BM05B-PASS-TFTEA
MAIN-P.W.Board			CB800	09T35473Y16	WTB,F169B001-16 -DB
MAIN-P.W.Board			D100	48T85357W01	DIO,1PS226 -CP
MAIN-P.W.Board			D300	48T85357W01	DIO,1PS226 -CP
MAIN-P.W.Board			D301	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D303	48-07015Z01	DIO,KDS160-RTK -CP
MAIN-P.W.Board		#1	D500	48T25651W02	DIO,MA152WK-TX -CP
MAIN-P.W.Board			D502	48T25651W02	DIO,MA152WK-TX -CP
MAIN-P.W.Board			D503	48T25651W01	DIO,MA152WA -CP
MAIN-P.W.Board			D504	48T68828F11	DIO,1SS133 -RH
MAIN-P.W.Board			D600	48T25651W01	DIO,MA152WA -CP
MAIN-P.W.Board			D601	48T25651W01	DIO,MA152WA -CP
MAIN-P.W.Board			D602	48T25651W01	DIO,MA152WA -CP
MAIN-P.W.Board			D702	48-07924Z01	VST,EZJZ1V800AA -CP
MAIN-P.W.Board			D703	48-07924Z01	VST,EZJZ1V800AA -CP
MAIN-P.W.Board			D800	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D801	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D803	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D804	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D805	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D806	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D807	48T44813F03	DIO,MA165 -R5
MAIN-P.W.Board			D808	48-07015Z01	DIO,KDS160-RTK -CP
MAIN-P.W.Board			D809	48T75527Y01	DIO,1SR154-400 -E1
MAIN-P.W.Board			D810	48-05828Z01	DIO,1N5406G-04 -
MAIN-P.W.Board			DIN300	09-05377Z01	DIN,TC7753-019117-DB
MAIN-P.W.Board			DIN800	09T55071W11	CON,TCP9389-11 -DT
MAIN-P.W.Board			E100	23S65134W23	CAP,ELY 101-1A(6)-E6

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E301	23S75244Y23	CAP,ELY 681-1C -EA
MAIN-P.W.Board			E302	23S65134W24	CAP,ELY 221-1A(8)-E6
MAIN-P.W.Board			E303	23S65134W24	CAP,ELY 221-1A(8)-E6
MAIN-P.W.Board			E304	23S65134W31	CAP,ELY 10R-1C(4)-E2
MAIN-P.W.Board			E305	23S65134W64	CAP,ELY R47-1H(3)-E2
MAIN-P.W.Board			E306	23S65134W23	CAP,ELY 101-1A(6)-E6
MAIN-P.W.Board			E307	23S65134W45	CAP,ELY 33R-1E(6)-E6
MAIN-P.W.Board			E308	23S65134W11	CAP,ELY 22R-0J(4)-E2
MAIN-P.W.Board			E309	23S65134W23	CAP,ELY 101-1A(6)-E6
MAIN-P.W.Board			E500	23S65134W15	CAP,ELY 331-0J(8)-E6
MAIN-P.W.Board			E501	23S65134W31	CAP,ELY 10R-1C(4)-E2
MAIN-P.W.Board			E502	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E600	23S65134W31	CAP,ELY 10R-1C(4)-E2
MAIN-P.W.Board			E601	23S65134W31	CAP,ELY 10R-1C(4)-E2
MAIN-P.W.Board			E602	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E603	23S65134W31	CAP,ELY 10R-1C(4)-E2
MAIN-P.W.Board			E604	23S65134W41	CAP,ELY 4R7-1E(3)-E2
MAIN-P.W.Board			E605	23S65134W41	CAP,ELY 4R7-1E(3)-E2
MAIN-P.W.Board			E606	23S65134W51	CAP,ELY 2R2-1V(3)-E2
MAIN-P.W.Board			E607	23S65134W64	CAP,ELY R47-1H(3)-E2
MAIN-P.W.Board			E608	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E609	23S65134W51	CAP,ELY 2R2-1V(3)-E2
MAIN-P.W.Board			E610	23S65134W51	CAP,ELY 2R2-1V(3)-E2
MAIN-P.W.Board			E611	23S65134W51	CAP,ELY 2R2-1V(3)-E2
MAIN-P.W.Board			E612	23S65134W51	CAP,ELY 2R2-1V(3)-E2
MAIN-P.W.Board			E613	23S65134W51	CAP,ELY 2R2-1V(3)-E2
MAIN-P.W.Board			E614	23S65134W51	CAP,ELY 2R2-1V(3)-E2
MAIN-P.W.Board			E615	23S65134W41	CAP,ELY 4R7-1E(3)-E2
MAIN-P.W.Board			E616	23S65134W41	CAP,ELY 4R7-1E(3)-E2
MAIN-P.W.Board			E617	23S65134W64	CAP,ELY R47-1H(3)-E2
MAIN-P.W.Board			E618	23S65134W51	CAP,ELY 2R2-1V(3)-E2
MAIN-P.W.Board			E619	23S65134W31	CAP,ELY 10R-1C(4)-E2
MAIN-P.W.Board			E708	23S75244Y19	CAP,ELY 101-1C -E6
MAIN-P.W.Board			E709	23S75244Y20	CAP,ELY 221-1C -E6
MAIN-P.W.Board			E710	23S65134W12	CAP,ELY 47R-0J(5)-E3
MAIN-P.W.Board			E711	23S65134W72	CAP,ELY 3R3-1H(4)-E2
MAIN-P.W.Board			E712	23S65134W72	CAP,ELY 3R3-1H(4)-E2
MAIN-P.W.Board			E800	23S65134W36	CAP,ELY 221-1C(8)-EA
MAIN-P.W.Board			E801	23S75244Y14	CAP,ELY 681-1A -EA
MAIN-P.W.Board			E802	23S65134W41	CAP,ELY 4R7-1E(3)-E2
MAIN-P.W.Board			E803	23S65134W41	CAP,ELY 4R7-1E(3)-E2
MAIN-P.W.Board			E804	23S65134W41	CAP,ELY 4R7-1E(3)-E2
MAIN-P.W.Board			E805	23S65134W41	CAP,ELY 4R7-1E(3)-E2
MAIN-P.W.Board			E806	23S65134W34	CAP,ELY 47R-1C(6)-E6
MAIN-P.W.Board			E807	23S65134W65	CAP,ELY 1R0-1H(3)-E2
MAIN-P.W.Board			E808	23T75325Y01	CAP,VB 332-1C +

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E809	23-02519Z15	CAP,FC 22R-1C-C -E3
MAIN-P.W.Board			E810	23-02519Z32	CAP,FC 4R7-1V-B -E2
MAIN-P.W.Board			F800	65T75477Y13	FUSE,CCP2E 4.0A -CP
MAIN-P.W.Board			IC300	51T65072Y01	PQ070XH02ZP -NE9
MAIN-P.W.Board			IC301	51T25259Y03	BA00ASFP-E2 -NE5
MAIN-P.W.Board			IC302	51-12158Z01	S-1132B18-M5T1G -CP
MAIN-P.W.Board			IC303	51-05862Z01	NJM2845DL1-33-TE1NE5
MAIN-P.W.Board			IC304	51-11615Z01	BD7300EFV-E2 -SE6
MAIN-P.W.Board			IC305	51T25183Y02	TC7SET08FU-EL -CP
MAIN-P.W.Board			IC306	51-05862Z03	NJM2845DL1-05-TE1NE5
MAIN-P.W.Board		#1	IC500	53-12773Z59	OFL,V2.00MRAL703A
MAIN-P.W.Board		$1	IC500	51-12425Z01	IC,M30626MJPXXXGP-QT
MAIN-P.W.Board		%1	IC500	51-12425Z01	IC,M30626MJPXXXGP-QT
MAIN-P.W.Board			IC502	51T75063Y06	BD5228G-TR -CP
MAIN-P.W.Board			IC503	51-09594Z01	KIC7W04FK-RTK -CP
MAIN-P.W.Board		#1	IC504	51T93532F05	TC4S01F-TE85L -CP
MAIN-P.W.Board			IC505	51-10494Z01	KIA393F-EL -SE2
MAIN-P.W.Board			IC600	51-11419Z01	74HC4066PW,118 -SE2
MAIN-P.W.Board			IC601	51-11419Z01	74HC4066PW,118 -SE2
MAIN-P.W.Board			IC602	51T93340F02	NJM2060V-TE2 -SE2
MAIN-P.W.Board			IC603	51-07764Z01	TDA7417 -QE6
MAIN-P.W.Board			IC604	51T15420Y01	BA4560F-E2 -SE2
MAIN-P.W.Board			IC700	51T15191Y01	TC74VHC08FT-EL -SE5
MAIN-P.W.Board			IC701	51T15191Y01	TC74VHC08FT-EL -SE5
MAIN-P.W.Board			IC702	51T25576W07	NJM4580V-TE2 -SE2
MAIN-P.W.Board			IC703	51-10941Z01	TCC8600 -QT
MAIN-P.W.Board			IC704	51-11433Z01	RT9702AGB -CP
MAIN-P.W.Board			IC705	51-04231Z01	WM8725GED/RV -SE5
MAIN-P.W.Board			IC706	51-06214Z01	S29AL008D70TFI010-ST
MAIN-P.W.Board			IC708	51-11501Z01	HY57V641620FTP-HI-ST
MAIN-P.W.Board			IC709	51-09817Z01	V112_V1-00 -LE6
MAIN-P.W.Board			IC710	51-05314Z01	BA4560RFVM-TR -SE1
MAIN-P.W.Board			IC711	51T25183Y02	TC7SET08FU-EL -CP
MAIN-P.W.Board			IC712	51T25183Y02	TC7SET08FU-EL -CP
MAIN-P.W.Board			IC800	51T65147Y01	HA13165 -ZS
MAIN-P.W.Board			IC801	51-04635Z01	TB2904HQ -ZS
MAIN-P.W.Board		#1	JK500	09T03156K01	JAC,CK-3.5-14 -DB
MAIN-P.W.Board			JK600	09-11352Z01	RCA,YKC21-4816N -DB
MAIN-P.W.Board			L100	24T25164Y21	IND,FSLM2520 4R7J-CP
MAIN-P.W.Board			L101	24T16403W29	COI,IND.15R-M -CP
MAIN-P.W.Board			L700	24T95456W27	FBI,BLM18PG181SH1-CP
MAIN-P.W.Board			L702	24T95456W27	FBI,BLM18PG181SH1-CP
MAIN-P.W.Board			L704	24T95456W27	FBI,BLM18PG181SH1-CP
MAIN-P.W.Board			Q101	48-09581Z04	TR,KTA1505S-GRRTK-CP
MAIN-P.W.Board			Q102	48-04929Z01	TR,KRC101S-RTK -CP
MAIN-P.W.Board			Q300	48-09583Z04	TR,KTA1504S-GRRTK-CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q301	48-04929Z01	TR,KRC101S-RTK -CP
MAIN-P.W.Board			Q303	48T45594W12	TR ,XN1A312 -TX-CP
MAIN-P.W.Board			Q304	48T75031Y03	TR,2SB1440-S -E2
MAIN-P.W.Board			Q305	48-04929Z04	TR,KRC104S-RTK -CP
MAIN-P.W.Board			Q500	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board			Q505	48-04929Z02	TR,KRC102S-RTK -CP
MAIN-P.W.Board		#1	Q506	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board		#1	Q507	48-04929Z02	TR,KRC102S-RTK -CP
MAIN-P.W.Board			Q508	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board			Q509	48T52438F01	TR ,2SD601A-RS/TX-CP
MAIN-P.W.Board			Q510	48-04940Z03	TR,KRA103S-RTK -CP
MAIN-P.W.Board			Q600	48T25317Y01	TR,XN0F256-TX -CP
MAIN-P.W.Board			Q601	48T25317Y01	TR,XN0F256-TX -CP
MAIN-P.W.Board			Q602	48T25317Y01	TR,XN0F256-TX -CP
MAIN-P.W.Board			Q800	48-04929Z01	TR,KRC101S-RTK -CP
MAIN-P.W.Board			Q801	48-09583Z04	TR,KTA1504S-GRRTK-CP
MAIN-P.W.Board			Q802	48-04929Z01	TR,KRC101S-RTK -CP
MAIN-P.W.Board			Q803	48T45594W16	TR,XN1A311-TX -CP
MAIN-P.W.Board			Q804	48-05471Z01	TR,XP0NG8A00-L -CP
MAIN-P.W.Board			Q805	48T45594W12	TR ,XN1A312 -TX-CP
MAIN-P.W.Board			Q806	48-04929Z03	TR,KRC103S-RTK -CP
MAIN-P.W.Board			Q807	48T75031Y03	TR,2SB1440-S -E2
MAIN-P.W.Board			Q808	48-04929Z05	TR,KRC105S-RTK -CP
MAIN-P.W.Board			Q809	48T93828F04	TR,2SD1994A-S-TA -RD
MAIN-P.W.Board			Q810	48T93828F04	TR,2SD1994A-S-TA -RD
MAIN-P.W.Board			Q811	48-04929Z02	TR,KRC102S-RTK -CP
MAIN-P.W.Board			Q812	48-04929Z03	TR,KRC103S-RTK -CP
MAIN-P.W.Board			Q813	48T45594W16	TR,XN1A311-TX -CP
MAIN-P.W.Board			Q814	48-04929Z02	TR,KRC102S-RTK -CP
MAIN-P.W.Board			Q816	48T45594W12	TR ,XN1A312 -TX-CP
MAIN-P.W.Board			Q817	48-04929Z03	TR,KRC103S-RTK -CP
MAIN-P.W.Board			Q818	48-04929Z03	TR,KRC103S-RTK -CP
MAIN-P.W.Board			Q819	48-04929Z02	TR,KRC102S-RTK -CP
MAIN-P.W.Board			Q820	48-09581Z04	TR,KTA1505S-GRRTK-CP
MAIN-P.W.Board			Q821	48-04929Z01	TR,KRC101S-RTK -CP
MAIN-P.W.Board			R100	06S55363Y49	RES,RK 221J 1/8 -CP
MAIN-P.W.Board			R101	06S70072F05	RES,CP .10R-J-1/4-CP
MAIN-P.W.Board			R102	06S55365Y65	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R103	06S55365Y97	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R104	06S55366Y14	RES,RK 104J 1/10 -CP
MAIN-P.W.Board			R105	06S55365Y41	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R106	06S55365Y41	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R107	06S55366Y14	RES,RK 104J 1/10 -CP
MAIN-P.W.Board			R108	06S55365Y65	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R109	06S55365Y89	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R111	06S45675W43	RES,RK JUMPER1/10-CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R112	06S55361Y71	RES,RK 182J 1/4 -CP
MAIN-P.W.Board			R113	06S55365Y89	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R300	06S15593Y68	RES,RK 622F 1/10 -CP
MAIN-P.W.Board			R301	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R302	06S15593Y62	RES,RK 362F 1/10 -CP
MAIN-P.W.Board			R303	06S15593Y40	RES,RK 431F 1/10 -CP
MAIN-P.W.Board			R304	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R305	06S55366Y05	RES,RK 433J 1/10 -CP
MAIN-P.W.Board			R306	06S55361Y81	RES,RK 472J 1/4 -CP
MAIN-P.W.Board			R307	06S55361Y75	RES,RK 272J 1/4 -CP
MAIN-P.W.Board			R308	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R309	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R310	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R313	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R314	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R315	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R316	06S55366Y06	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R322	06S55366Y06	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R325	06S15593Y80	RES,RK 203F 1/10 -CP
MAIN-P.W.Board			R327	06S55366Y02	RES,RK 333J 1/10 -CP
MAIN-P.W.Board			R328	06S45674W99	RES,RK 563J 1/10 -CP
MAIN-P.W.Board			R329	06S55366Y06	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R330	06S15594Y12	RES,RK 394F 1/10 -CP
MAIN-P.W.Board			R331	06S15593Y85	RES,RK 333F 1/10 -CP
MAIN-P.W.Board			R333	06S45674W61	RES,RK 152J 1/10 -CP
MAIN-P.W.Board			R334	06S55366Y06	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R335	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R336	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board			R337	06S55361Y71	RES,RK 182J 1/4 -CP
MAIN-P.W.Board			R338	06S55361Y89	RES,RK 103J 1/4 -CP
MAIN-P.W.Board			R339	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R340	06S15593Y51	RES,RK 122F 1/10 -CP
MAIN-P.W.Board			R341	06S15594Y09	RES,RK 304F 1/10 -CP
MAIN-P.W.Board			R342	06S15594Y07	RES,RK 244F 1/10 -CP
MAIN-P.W.Board			R4901	06S64995F53	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R4921	06S64995F53	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R4931	06S64995F53	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R4941	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R4951	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R4971	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R4981	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R500	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R501	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R502	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R503	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R504	06S45674W33	RES,RK 101J 1/10 -CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board		$1	R505	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board		%1	R505	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R506	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R507	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R518	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R519	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R520	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R521	06S55366Y39	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R523	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R524	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R525	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R527	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R528	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R530	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R531	06S45675W22	RES,RK 474J 1/10 -CP
MAIN-P.W.Board			R532	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R533	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R534	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R537	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R538	06S45674W75	RES,RK 562J 1/10 -CP
MAIN-P.W.Board			R539	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R540	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R541	06S45674W75	RES,RK 562J 1/10 -CP
MAIN-P.W.Board			R542	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R543	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R544	06S64996F02	RES,RK 104J 1/8 -CP
MAIN-P.W.Board			R545	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R546	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R547	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R550	06S45674W67	RES,RK 272J 1/10 -CP
MAIN-P.W.Board			R551	06S15593Y83	RES,RK 273F 1/10 -CP
MAIN-P.W.Board			R552	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R553	06S15593Y63	RES,RK 392F 1/10 -CP
MAIN-P.W.Board			R554	06S64995F53	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R555	06S64995F53	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R556	06S35084Y37	RES,RK 103F 1/8 -CP
MAIN-P.W.Board			R557	06S35084Y37	RES,RK 103F 1/8 -CP
MAIN-P.W.Board			R558	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R559	06S64995F77	RES,RK 103J 1/8 -CP
MAIN-P.W.Board			R560	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R561	06S64995F53	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R562	06S64995F53	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R563	06S64995F53	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R564	06S64995F53	RES,RK 102J 1/8 -CP
MAIN-P.W.Board			R565	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R566	06S45674W89	RES,RK 223J 1/10 -CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R567	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R568	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board			R569	06S45674W91	RES,RK 273J 1/10 -CP
MAIN-P.W.Board		#1	R570	06S45675W22	RES,RK 474J 1/10 -CP
MAIN-P.W.Board		#1	R571	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board		#1	R572	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board			R573	06S45674W77	RES,RK 682J 1/10 -CP
MAIN-P.W.Board		#1	R574	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board		#1	R575	06S45674W69	RES,RK 332J 1/10 -CP
MAIN-P.W.Board			R576	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R577	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R578	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R579	06S45674W77	RES,RK 682J 1/10 -CP
MAIN-P.W.Board			R580	06S45674W59	RES,RK 122J 1/10 -CP
MAIN-P.W.Board			R581	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R582	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board		#1	R583	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R584	06S70072F19	RES,CP .39R-J-1/4-CP
MAIN-P.W.Board			R585	06S70072F19	RES,CP .39R-J-1/4-CP
MAIN-P.W.Board		#1	R586	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R587	06S70072F19	RES,CP .39R-J-1/4-CP
MAIN-P.W.Board			R588	06S70072F05	RES,CP .10R-J-1/4-CP
MAIN-P.W.Board			R589	06S70072F19	RES,CP .39R-J-1/4-CP
MAIN-P.W.Board			R590	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board			R591	06S45674W61	RES,RK 152J 1/10 -CP
MAIN-P.W.Board			R592	06S45674W61	RES,RK 152J 1/10 -CP
MAIN-P.W.Board			R593	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board			R595	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R598	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R600	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R601	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R602	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R603	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R604	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R605	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R606	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R607	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R608	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R609	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R610	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R611	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R612	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R613	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R614	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R615	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R616	06S15593Y81	RES,RK 223F 1/10 -CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R617	06S15593Y81	RES,RK 223F 1/10 -CP
MAIN-P.W.Board			R622	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R623	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R624	06S35083Y45	RES,RK 473F 1/4 -CP
MAIN-P.W.Board			R625	06S35083Y45	RES,RK 473F 1/4 -CP
MAIN-P.W.Board			R626	06S35083Y45	RES,RK 473F 1/4 -CP
MAIN-P.W.Board			R627	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R628	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R629	06S55366Y11	RES,RK 753J 1/10 -CP
MAIN-P.W.Board			R630	06S55366Y11	RES,RK 753J 1/10 -CP
MAIN-P.W.Board			R631	06S55366Y11	RES,RK 753J 1/10 -CP
MAIN-P.W.Board			R632	06S55366Y11	RES,RK 753J 1/10 -CP
MAIN-P.W.Board			R633	06S55366Y11	RES,RK 753J 1/10 -CP
MAIN-P.W.Board			R634	06S55366Y11	RES,RK 753J 1/10 -CP
MAIN-P.W.Board			R635	06S64995F37	RES,RK 221J 1/8 -CP
MAIN-P.W.Board			R636	06S64995F37	RES,RK 221J 1/8 -CP
MAIN-P.W.Board			R637	06S64995F37	RES,RK 221J 1/8 -CP
MAIN-P.W.Board			R638	06S64995F37	RES,RK 221J 1/8 -CP
MAIN-P.W.Board			R639	06S64995F37	RES,RK 221J 1/8 -CP
MAIN-P.W.Board			R640	06S64995F37	RES,RK 221J 1/8 -CP
MAIN-P.W.Board			R641	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R642	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R643	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R644	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R645	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R646	06S64995F29	RES,RK 101J 1/8 -CP
MAIN-P.W.Board			R647	06S15593Y50	RES,RK 112F 1/10 -CP
MAIN-P.W.Board			R648	06S55365Y89	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R649	06S55365Y89	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R654	06S55366Y39	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R656	06S55366Y39	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R700	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R701	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R702	06S55365Y66	RES,RK 112J 1/10 -CP
MAIN-P.W.Board			R704	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R705	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R714	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R715	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R716	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R717	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R718	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R720	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R721	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R723	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R724	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R725	06S45674W73	RES,RK 472J 1/10 -CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R726	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R727	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R729	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R730	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R731	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R733	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R736	06S45674W85	RES,RK 153J 1/10 -CP
MAIN-P.W.Board			R737	06S45674W85	RES,RK 153J 1/10 -CP
MAIN-P.W.Board			R738	06S45674W85	RES,RK 153J 1/10 -CP
MAIN-P.W.Board			R739	06S45674W85	RES,RK 153J 1/10 -CP
MAIN-P.W.Board			R740	06S55365Y41	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R741	06S55365Y41	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R742	06S55365Y41	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R743	06S55365Y41	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R744	06S55365Y41	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R745	06S55365Y41	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R746	06S45674W21	RES,RK 33RJ 1/10 -CP
MAIN-P.W.Board			R747	06S45674W21	RES,RK 33RJ 1/10 -CP
MAIN-P.W.Board			R748	06S45674W21	RES,RK 33RJ 1/10 -CP
MAIN-P.W.Board			R749	06S45674W21	RES,RK 33RJ 1/10 -CP
MAIN-P.W.Board			R750	06S55361Y21	RES,RK 15RJ 1/4 -CP
MAIN-P.W.Board			R751	06S55361Y21	RES,RK 15RJ 1/4 -CP
MAIN-P.W.Board			R752	06S15616Y40	RES,RK 565J 1/16 -CP
MAIN-P.W.Board			R753	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R757	06S15593Y97	RES,RK 104F 1/10 -CP
MAIN-P.W.Board			R759	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R760	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R761	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R762	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R763	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R764	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R765	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R766	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R767	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R769	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R770	06S15593Y69	RES,RK 682F 1/10 -CP
MAIN-P.W.Board			R771	06S15593Y69	RES,RK 682F 1/10 -CP
MAIN-P.W.Board			R772	06S15593Y72	RES,RK 912F 1/10 -CP
MAIN-P.W.Board			R773	06S45674W80	RES,RK 912J 1/10 -CP
MAIN-P.W.Board			R774	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R775	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R776	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R777	06S15593Y73	RES,RK 103F 1/10 -CP
MAIN-P.W.Board			R778	06S15593Y85	RES,RK 333F 1/10 -CP
MAIN-P.W.Board			R779	06S15593Y85	RES,RK 333F 1/10 -CP
MAIN-P.W.Board			R780	06S55365Y63	RES,RK 821J 1/10 -CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R781	06S55365Y63	RES,RK 821J 1/10 -CP
MAIN-P.W.Board			R782	06S45674W77	RES,RK 682J 1/10 -CP
MAIN-P.W.Board			R783	06S45674W77	RES,RK 682J 1/10 -CP
MAIN-P.W.Board			R786	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R789	06S45674W73	RES,RK 472J 1/10 -CP
MAIN-P.W.Board			R790	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R791	06S45674W89	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R800	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board			R801	06S55365Y77	RES,RK 332J 1/10 -CP
MAIN-P.W.Board			R802	06S55365Y77	RES,RK 332J 1/10 -CP
MAIN-P.W.Board			R803	06S45674W65	RES,RK 222J 1/10 -CP
MAIN-P.W.Board			R804	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R805	06S35095Y16	RES,RK 303J 1/4 -CP
MAIN-P.W.Board			R806	06S45674W97	RES,RK 473J 1/10 -CP
MAIN-P.W.Board			R807	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board			R808	06S35083Y31	RES,RK 332F 1/4 -CP
MAIN-P.W.Board			R809	06S35083Y35	RES,RK 682F 1/4 -CP
MAIN-P.W.Board			R810	06S55361Y70	RES,RK 162J 1/4 -CP
MAIN-P.W.Board			R812	06S55361Y70	RES,RK 162J 1/4 -CP
MAIN-P.W.Board			R813	06S55366Y14	RES,RK 104J 1/10 -CP
MAIN-P.W.Board			R814	06S55361Y70	RES,RK 162J 1/4 -CP
MAIN-P.W.Board			R815	06S35083Y42	RES,RK 273F 1/4 -CP
MAIN-P.W.Board			R816	06S55361Y70	RES,RK 162J 1/4 -CP
MAIN-P.W.Board			R817	06S55361Y01	RES,RK 2R2J 1/4 -CP
MAIN-P.W.Board			R818	06S55361Y01	RES,RK 2R2J 1/4 -CP
MAIN-P.W.Board			R819	06S35083Y45	RES,RK 473F 1/4 -CP
MAIN-P.W.Board			R821	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R822	06S55365Y98	RES,RK 243J 1/10 -CP
MAIN-P.W.Board			R823	06S55361Y70	RES,RK 162J 1/4 -CP
MAIN-P.W.Board			R824	06S55366Y14	RES,RK 104J 1/10 -CP
MAIN-P.W.Board			R825	06S55361Y54	RES,RK 361J 1/4 -CP
MAIN-P.W.Board			R826	06S70072F77	RES,CP .103-J-1/4-CP
MAIN-P.W.Board			R827	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R828	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R829	06S55362Y06	RES,RK 473J 1/4 -CP
MAIN-P.W.Board			R830	06S70072F29	RES,CP .101-J-1/4-CP
MAIN-P.W.Board			R832	06S45674W85	RES,RK 153J 1/10 -CP
MAIN-P.W.Board			R833	06S45674W33	RES,RK 101J 1/10 -CP
MAIN-P.W.Board			R834	06S45674W41	RES,RK 221J 1/10 -CP
MAIN-P.W.Board			R835	06S45674W81	RES,RK 103J 1/10 -CP
MAIN-P.W.Board			R836	06S70072F39	RES,CP .271-J-1/4-CP
MAIN-P.W.Board			R837	06S70072F39	RES,CP .271-J-1/4-CP
MAIN-P.W.Board			R840	06S55361Y65	RES,RK 102J 1/4 -CP
MAIN-P.W.Board			R841	06S55363Y89	RES,RK 103J 1/8 -CP
MAIN-P.W.Board			R877	06S55366Y14	RES,RK 104J 1/10 -CP
MAIN-P.W.Board			R878	06S55365Y89	RES,RK 103J 1/10 -CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R879	06S55361Y71	RES,RK 182J 1/4 -CP
MAIN-P.W.Board			RA500	06S45591W07	RES,ARY MNR101J 4-CP
MAIN-P.W.Board			SA100	48-00954Z01	VST,CSA30C201M-T -CP
MAIN-P.W.Board			SW500	40T16096W03	SW ,TACT SKHHLW
MAIN-P.W.Board			SW600	40T15452Y01	SW,SLIDE SLD-62-724X
MAIN-P.W.Board			SW601	40T15452Y01	SW,SLIDE SLD-62-724X
MAIN-P.W.Board			TU100	TU-04070Z04	TUNER,TFTE1U113C
MAIN-P.W.Board			VL700	24T75055W08	CHOKE,SA10HA-452JA +
MAIN-P.W.Board			VT100	24T35286Y02	IND,MG56 332J -DB
MAIN-P.W.Board			XL500	91T15849W02	XTAL,32.768KHZ
MAIN-P.W.Board			XL501	91T55360Y06	XTL,6M-AT51-TP
MAIN-P.W.Board			XL700	91T15849W02	XTAL,32.768KHZ
MAIN-P.W.Board			XL701	91T55217Y11	XTL,NX8045GB 12.0-E5
MAIN-P.W.Board			Z500	91T65112W06	EMI,BK2125HM102 -CP
MAIN-P.W.Board			Z501	91T65112W06	EMI,BK2125HM102 -CP
MAIN-P.W.Board			Z700	91T65123Y02	EMI,DLW21SN900SQ2-CP
MAIN-P.W.Board			ZD300	48-11191Z09	DIO,ZEN MAZ8036GL-CP
MAIN-P.W.Board			ZD301	48-11191Z09	DIO,ZEN MAZ8036GL-CP
MAIN-P.W.Board			ZD700	48T15541Y49	DIO,ZEN MAZS0510M-CP
MAIN-P.W.Board			ZD701	48T15541Y49	DIO,ZEN MAZS0510M-CP
MAIN-P.W.Board			ZD800	48T25766W09	DIO,ZEN.HZS 6C3L -R5
MAIN-P.W.Board			ZD801	48T25766W38	DIO,ZEN.HZS12A3L -R5
FRONT-P.W.Board			C405	08S45676W80	CAP,CER 223K-B1E -CP
FRONT-P.W.Board			C406	08S45676W80	CAP,CER 223K-B1E -CP
FRONT-P.W.Board			C407	08S35374W12	CAP,CER 106K-B0J -CP
FRONT-P.W.Board			C494	08T81833F07	CAP,CER 105K-B1C -CP
FRONT-P.W.Board			C495	08S45677W60	CAP,CER 102J-CH1H-CP
FRONT-P.W.Board			C496	08S45676W89	CAP,CER 473K-B1E -CP
FRONT-P.W.Board			C497	08S45676W89	CAP,CER 473K-B1E -CP
FRONT-P.W.Board			C498	08S45676W85	CAP,CER 104K-B1C -CP
FRONT-P.W.Board			C499	08S45676W85	CAP,CER 104K-B1C -CP
FRONT-P.W.Board			CH401	09-05559Z01	BTB,DF15-P -B
FRONT-P.W.Board			D401	48T85357W01	DIO,1PS226 -CP
FRONT-P.W.Board			D406	48-06707Z01	DIO,MA3J147-TX -CP
FRONT-P.W.Board			D407	48-06707Z01	DIO,MA3J147-TX -CP
FRONT-P.W.Board			D408	48-06707Z01	DIO,MA3J147-TX -CP
FRONT-P.W.Board			D410	48-06707Z01	DIO,MA3J147-TX -CP
FRONT-P.W.Board			IC401	51-10867Z01	PT6575B-TQ-L -QT
FRONT-P.W.Board			IC402	51-01707Z01	RS-771 -NE2
FRONT-P.W.Board			LCD401	65-12464Z01	LCD,LUC2538A
FRONT-P.W.Board			LD401	48-11289Z01	LED,ARY QB.L.031 -DB
FRONT-P.W.Board			LD402	48-06926Z01	LED,WHT VXW1147BS-CP
FRONT-P.W.Board			LD430	48-11137Z01	LED,BLU UB1116W -CP
FRONT-P.W.Board			LD435	48-11415Z01	LED,RED KPT-1608S-CP
FRONT-P.W.Board			LD438	48-11137Z01	LED,BLU UB1116W -CP
FRONT-P.W.Board			LD439	48-11415Z01	LED,RED KPT-1608S-CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board			LD440	48-11415Z01	LED,RED KPT-1608S-CP
FRONT-P.W.Board			LD441	48-11137Z01	LED,BLU UB1116W -CP
FRONT-P.W.Board			LD442	48-11137Z01	LED,BLU UB1116W -CP
FRONT-P.W.Board			LD444	48-11415Z01	LED,RED KPT-1608S-CP
FRONT-P.W.Board			LD446	48-11137Z01	LED,BLU UB1116W -CP
FRONT-P.W.Board			LD447	48-11415Z01	LED,RED KPT-1608S-CP
FRONT-P.W.Board			LD448	48-11137Z01	LED,BLU UB1116W -CP
FRONT-P.W.Board			LD450	48-11416Z02	LED,BLU SSB-ULD-WXCP
FRONT-P.W.Board			LD451	48-11137Z01	LED,BLU UB1116W -CP
FRONT-P.W.Board			Q399	48T52438F04	TR ,2SD601A-S /TX-CP
FRONT-P.W.Board			Q400	48T52438F04	TR ,2SD601A-S /TX-CP
FRONT-P.W.Board			Q410	48-04929Z02	TR,KRC102S-RTK -CP
FRONT-P.W.Board			Q411	48-04929Z02	TR,KRC102S-RTK -CP
FRONT-P.W.Board			Q412	48-04929Z02	TR,KRC102S-RTK -CP
FRONT-P.W.Board			Q413	48T52438F04	TR ,2SD601A-S /TX-CP
FRONT-P.W.Board			Q414	48T63788F04	TR,2SD1328-T-TX -CP
FRONT-P.W.Board			Q417	48T52438F04	TR ,2SD601A-S /TX-CP
FRONT-P.W.Board			Q450	48T63788F04	TR,2SD1328-T-TX -CP
FRONT-P.W.Board			R401	06S45674W97	RES,RK 473J 1/10 -CP
FRONT-P.W.Board			R402	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R403	06S55361Y48	RES,RK 201J 1/4 -CP
FRONT-P.W.Board			R404	06S55363Y81	RES,RK 472J 1/8 -CP
FRONT-P.W.Board			R405	06S64995F21	RES,RK 47RJ 1/8 -CP
FRONT-P.W.Board			R406	06S55363Y81	RES,RK 472J 1/8 -CP
FRONT-P.W.Board			R407	06S35084Y27	RES,RK 152F 1/8 -CP
FRONT-P.W.Board			R408	06S55361Y65	RES,RK 102J 1/4 -CP
FRONT-P.W.Board			R409	06S55361Y62	RES,RK 751J 1/4 -CP
FRONT-P.W.Board			R410	06S35084Y28	RES,RK 182F 1/8 -CP
FRONT-P.W.Board			R411	06S35084Y30	RES,RK 272F 1/8 -CP
FRONT-P.W.Board			R412	06S35084Y32	RES,RK 392F 1/8 -CP
FRONT-P.W.Board			R413	06S35084Y35	RES,RK 682F 1/8 -CP
FRONT-P.W.Board			R416	06S35084Y27	RES,RK 152F 1/8 -CP
FRONT-P.W.Board			R417	06S35084Y28	RES,RK 182F 1/8 -CP
FRONT-P.W.Board			R418	06S35084Y30	RES,RK 272F 1/8 -CP
FRONT-P.W.Board			R419	06S35084Y32	RES,RK 392F 1/8 -CP
FRONT-P.W.Board			R420	06S35084Y35	RES,RK 682F 1/8 -CP
FRONT-P.W.Board			R421	06S35084Y39	RES,RK 153F 1/8 -CP
FRONT-P.W.Board			R422	06S35084Y44	RES,RK 393F 1/8 -CP
FRONT-P.W.Board			R423	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R424	06S55363Y81	RES,RK 472J 1/8 -CP
FRONT-P.W.Board			R425	06S55361Y41	RES,RK 101J 1/4 -CP
FRONT-P.W.Board			R427	06S55361Y65	RES,RK 102J 1/4 -CP
FRONT-P.W.Board			R428	06S55363Y81	RES,RK 472J 1/8 -CP
FRONT-P.W.Board			R430	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R432	06S55361Y58	RES,RK 511J 1/4 -CP
FRONT-P.W.Board			R433	06S55361Y58	RES,RK 511J 1/4 -CP

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT-P.W.Board			R434	06S55361Y62	RES,RK 751J 1/4 -CP
FRONT-P.W.Board			R435	06S55361Y65	RES,RK 102J 1/4 -CP
FRONT-P.W.Board			R436	06S55361Y81	RES,RK 472J 1/4 -CP
FRONT-P.W.Board			R437	06S55361Y87	RES,RK 822J 1/4 -CP
FRONT-P.W.Board			R441	06S55361Y91	RES,RK 123J 1/4 -CP
FRONT-P.W.Board			R442	06S55361Y65	RES,RK 102J 1/4 -CP
FRONT-P.W.Board			R443	06S55361Y65	RES,RK 102J 1/4 -CP
FRONT-P.W.Board			R444	06S55363Y81	RES,RK 472J 1/8 -CP
FRONT-P.W.Board			R450	06S45674W61	RES,RK 152J 1/10 -CP
FRONT-P.W.Board			R455	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R456	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R457	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R489	06S55363Y65	RES,RK 102J 1/8 -CP
FRONT-P.W.Board			R490	06S45674W73	RES,RK 472J 1/10 -CP
FRONT-P.W.Board			R491	06S45674W73	RES,RK 472J 1/10 -CP
FRONT-P.W.Board			R492	06S45674W73	RES,RK 472J 1/10 -CP
FRONT-P.W.Board			R493	06S45674W95	RES,RK 393J 1/10 -CP
FRONT-P.W.Board			R496	06S55361Y41	RES,RK 101J 1/4 -CP
FRONT-P.W.Board			SW401	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW402	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW403	40-10796Z01	ENC,EC35B154H401 -DB
FRONT-P.W.Board			SW404	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW405	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW406	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW407	40T35558Y09	SW,TACT SKPMAQE010E2
FRONT-P.W.Board			SW409	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW410	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW411	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW412	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW413	40T65353Y01	SW,TACT SKRPACE010E2
FRONT-P.W.Board			SW415	40T65353Y01	SW,TACT SKRPACE010E2
Miscellaneous			ET700	09-11953Z02	ASSY,YAF11-1252N

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.

Exploded View (Cabinet)

NOTE : #1 : iDA-X200(North American) Only,
Others : Common.

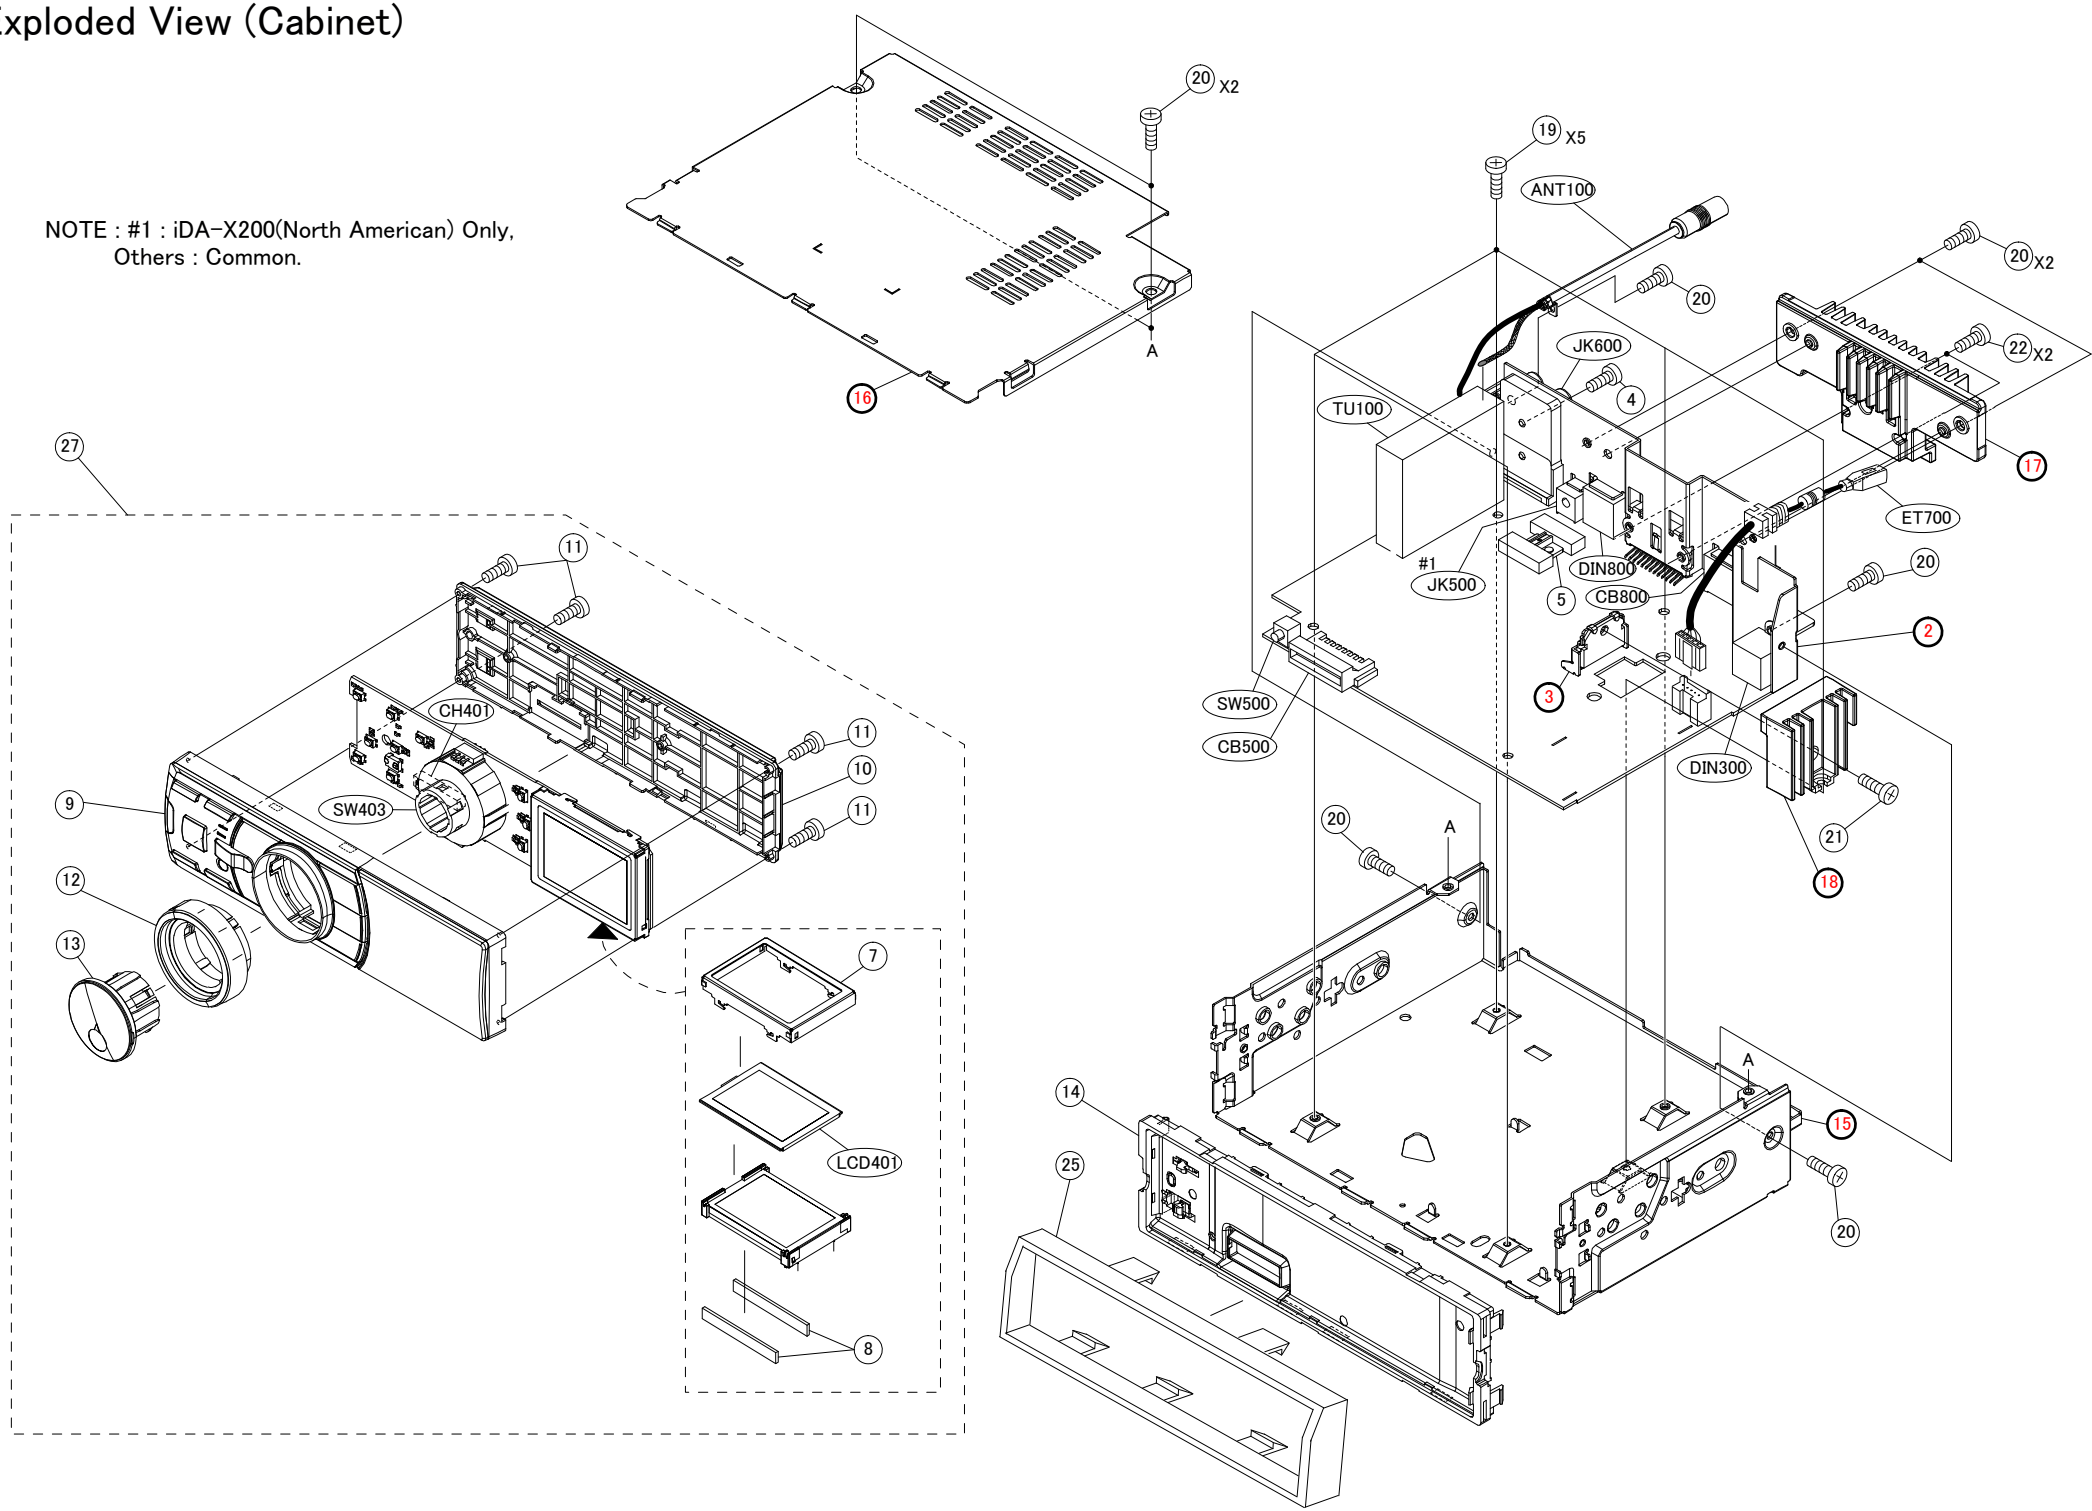

MODEL	Symbol No.	Parts No.	Description
	2	- - - - - - - - -	BKT,REAR
	3	- - - - - - - - -	BKT,IC
	4	03S60825Y04	SCR,B-T 3X8 ZN A
	5	36A04141K02	KNOB,SLIDE
	7	15-11240Z01	COVER,LCD
	8	75-11583Z01	RUBBER,ELECTRONIC
	9	13-11232Z01	NOSE,PIECE ASSY ML
	10	13-11234Z01	NOSE,BOTTOM ML
	11	03-02876Z16	SCR,WEV 1.7X8 ZB A
	12	36-11578Z01	KNOB,ROTARY ASSY
	13	15-11045Z01	PLATE,ROTARY,ASSY
	14	13-11531Z01	NOSE,BASE ASSY
	15	- - - - - - - - -	CHAS,BASE
	16	- - - - - - - - -	COVER,TOP
	17	- - - - - - - - -	HEAT,SINK PWR
	18	- - - - - - - - -	HEAT,SINK SYS
	19	03T25225Y01	SCR,GND
	20	03S60822Y12	SCR,S-T 2.6X6 ZN A
	21	03S60822Y19	SCR,S-T 2.6X10 ZN A
	22	03S60822Y23	SCR,S-T 2.6X16 ZN A
	25	33-11685Z01	FACE,PLATE
	27	SU-12819Z01	SERVICE_NOSE_X200(A)
	ANT100	09-06103Z02	ASSY,ANID-0035-02A
	CB500	09-05560Z01	BTB,DF15-S -DB
	CB800	09T35473Y16	WTB,F169B001-16 -DB
	CH401	09-05559Z01	BTB,DF15-P -B
	DIN300	09-05377Z01	DIN,TC7753-019117-DB
	DIN800	09T55071W11	CON,TCP9389-11 -DT
	ET700	09-11953Z02	ASSY,YAF11-1252N
#1	JK500	09T03156K01	JAC,CK-3.5-14 -DB
	JK600	09-11352Z01	RCA,YKC21-4816N -DB
	LCD401	65-12464Z01	LCD,LUC2538A
	SW403	40-10796Z01	ENC,EC35B154H401 -DB
	SW500	40T16096W03	SW ,TACT SKHHLW
	TU100	TU-04070Z04	TUNER,TFTE1U113C

Mark Model Code
#1 iDA-X200 (North American) Only,
$1 iDA-X200 (General Foreign) Only,
%1 iDA-X200 (Chinese) Only,
Others : Common.
NOTE : The part that has not PART NUMBER will not be supplied.