






# Exploded View (Cabinet) (1/3)

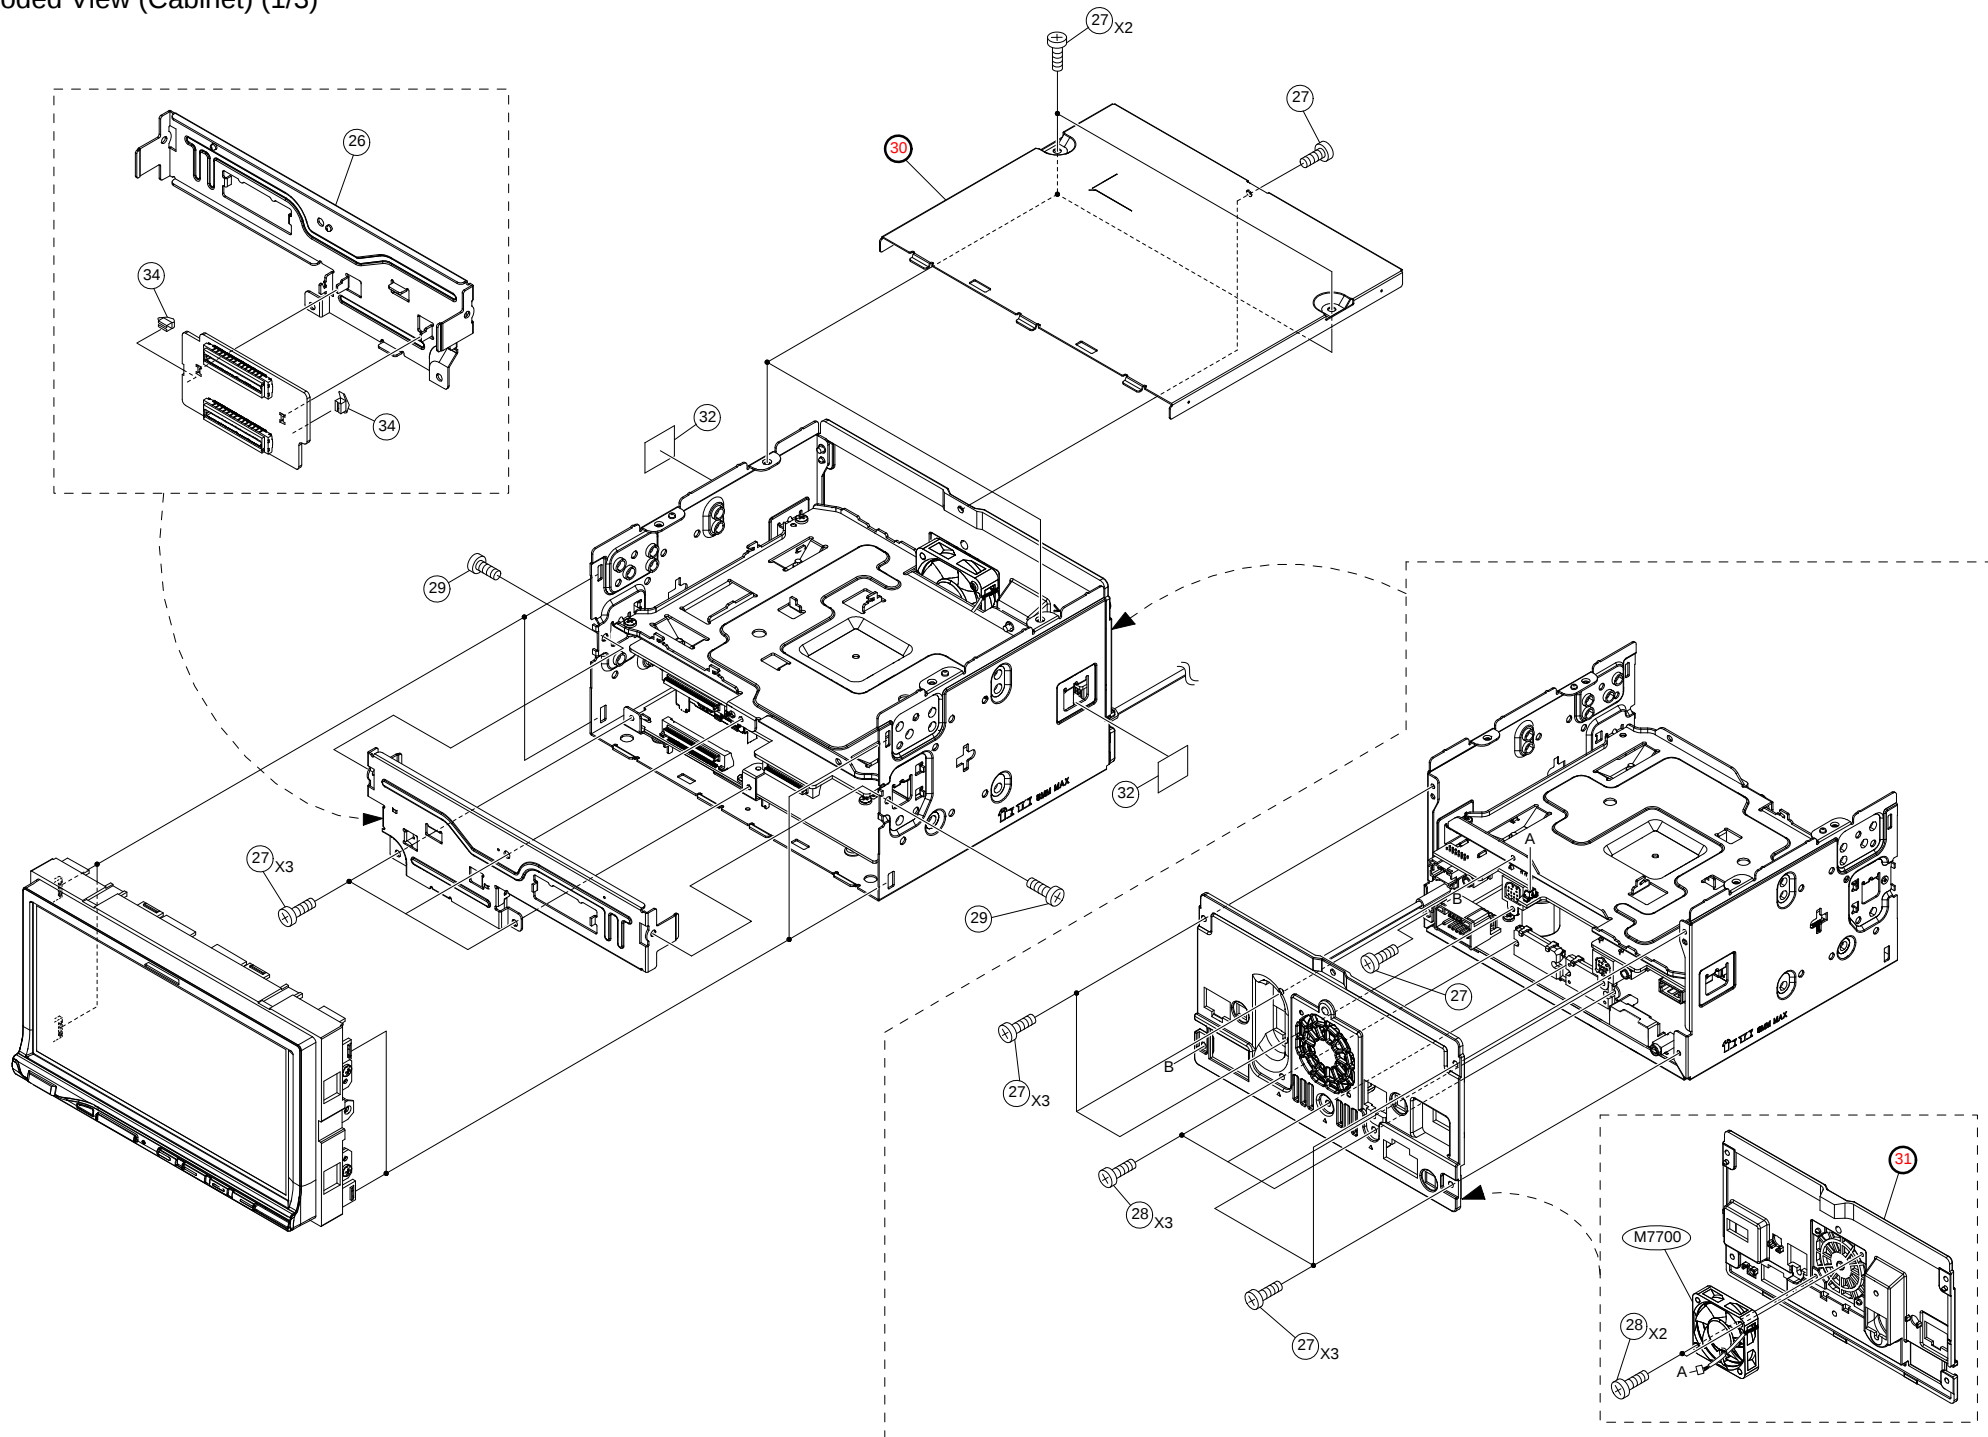

This diagram illustrates the assembly of the cabinet components. It shows the front panel (4) being attached to the main chassis (5) using screws (6) and a bracket (8). The top cover (39) is shown being placed over the chassis. The internal components, including the JK3600 and CB3601 modules, are shown being inserted into the chassis. The antenna (ANT3000) is shown being connected to the CB3600 module. The diagram also shows the installation of the side panel (40) and the top cover (39) using screws (27). The bottom panel (4) is shown being attached to the chassis using screws (7).

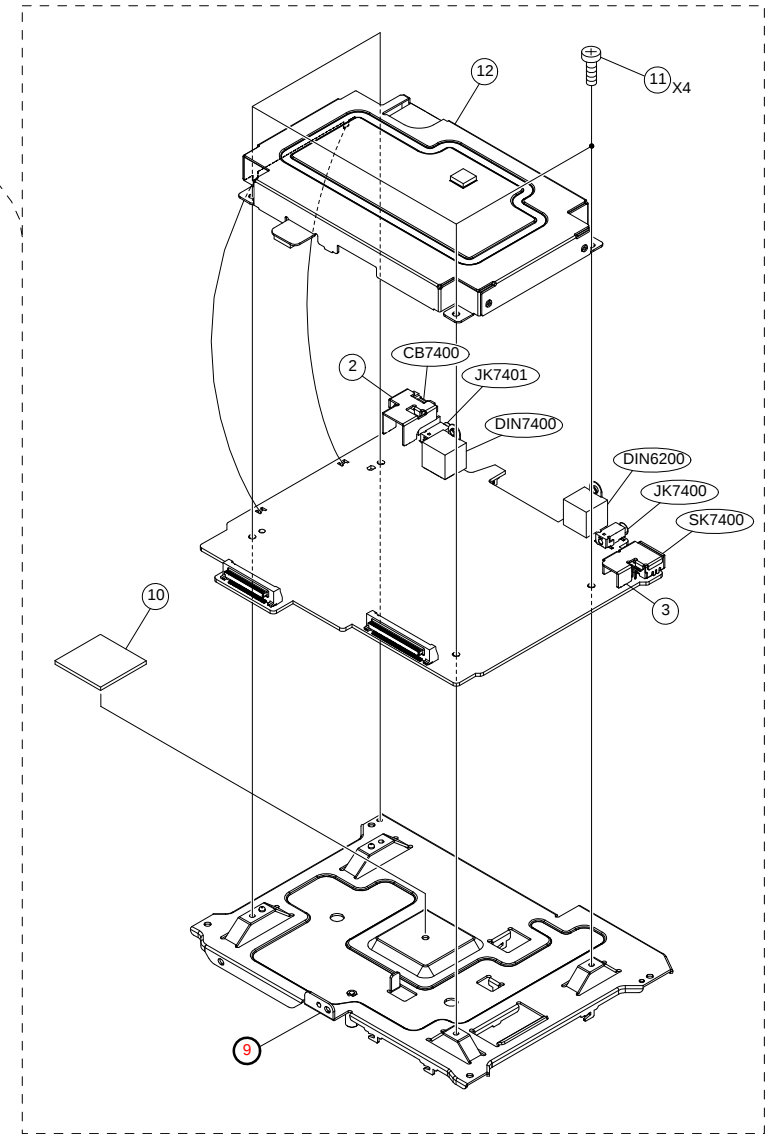

# Exploded View (Cabinet) (3/3)

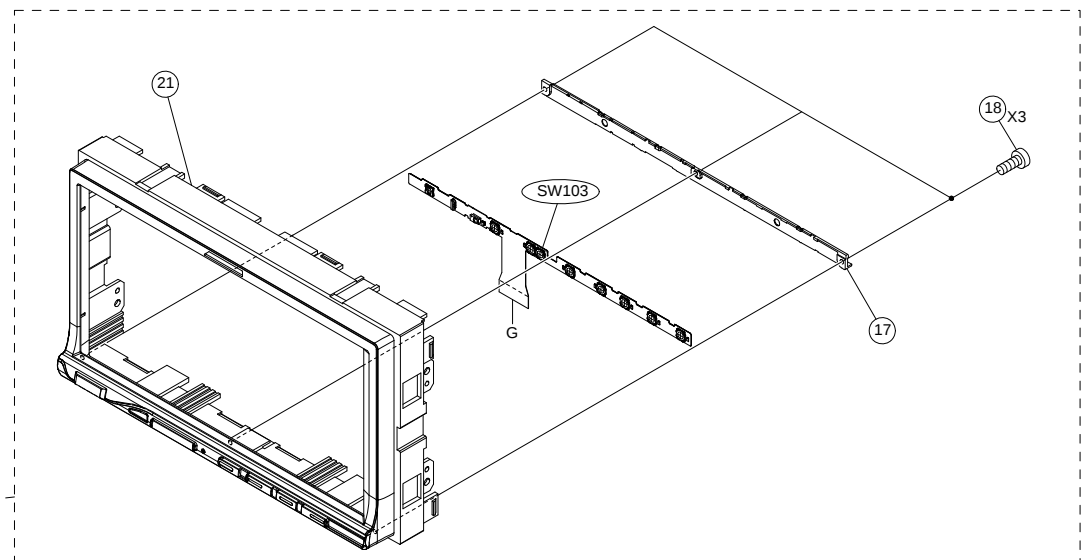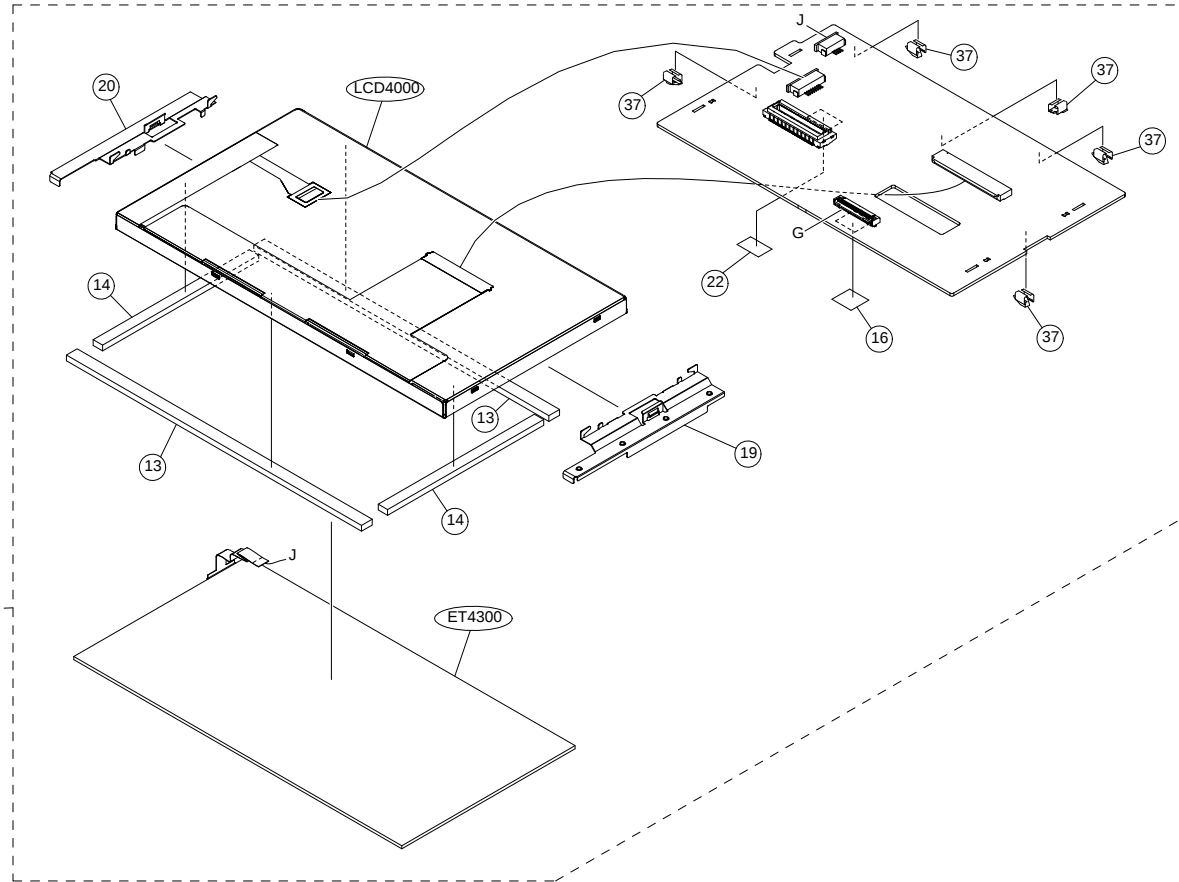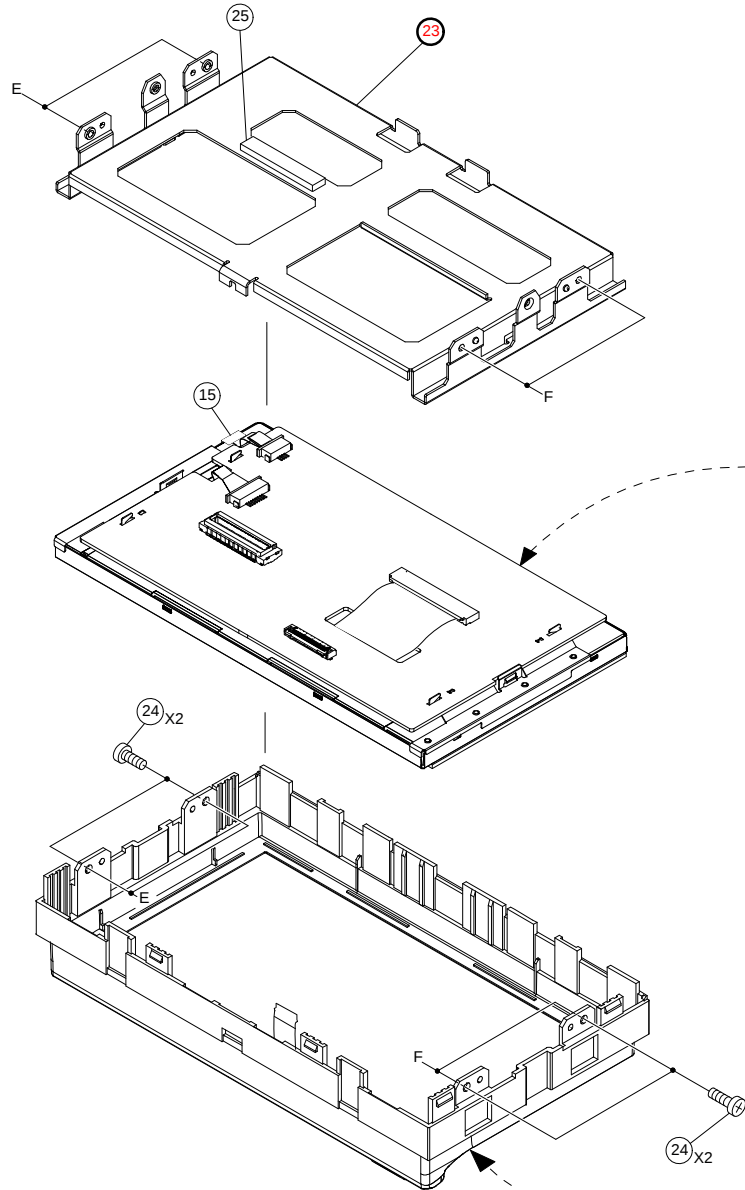


| MODEL | Symbol No.              | Parts No.   | Description          |
|-------|-------------------------|-------------|----------------------|
|       | <a href="#">2</a>       | 07-24250Z01 | BKT,CAMERA ASSY      |
|       | <a href="#">3</a>       | 07-22854Z01 | BKT,CONN USB         |
|       | <a href="#">4</a>       | -----       | CHAS,BASE            |
|       | <a href="#">5</a>       | 07-13002Z01 | BKT,LOWER            |
|       | <a href="#">6</a>       | 03S60822Y10 | SCR,S-T 2.6X5 ZN A   |
|       | <a href="#">7</a>       | 03-12686Z01 | SCR,S-T 2.6X6 ZN ATP |
|       | <a href="#">8</a>       | 14-14636Z58 | INS,CVR 6X55XT0.1    |
|       | <a href="#">9</a>       | -----       | CHAS,MID             |
|       | <a href="#">10</a>      | 75-04227Z07 | RIG3150-1.5-30-30    |
|       | <a href="#">11</a>      | 03S60822Y13 | SCR,S-T 2.6X6 ZN A   |
|       | <a href="#">12</a>      | 26-19569Z02 | SHIELD,ERATO         |
|       | <a href="#">13</a>      | 14-06140Z38 | INS,CVR 163X2XT0.05  |
|       | <a href="#">14</a>      | 14-06140Z93 | INS,CVR 82.6X2XT0.05 |
|       | <a href="#">15</a>      | 14-06145Z94 | INS,CVR 12X12XT0.05  |
|       | <a href="#">16</a>      | 75-06068Z86 | CUS,RUB 8X8XT2       |
|       | <a href="#">17</a>      | 15-20088Z01 | COVER,FPC ASSY       |
|       | <a href="#">18</a>      | 03S70693Y07 | SCR,P-T 1.7X5 ZB A   |
|       | <a href="#">19</a>      | 07-19469Z01 | BKT,LCD L            |
|       | <a href="#">20</a>      | 07-19470Z01 | BKT,LCD R            |
|       | <a href="#">21</a>      | EN-22857Z01 | NOSE,PIECE ASSY      |
|       | <a href="#">22</a>      | 75-23834Z01 | CUS,PWB              |
|       | <a href="#">23</a>      | -----       | BKT,MONITOR          |
|       | <a href="#">24</a>      | 03S60822Y08 | SCR,S-T 2.6X5 ZN A   |
|       | <a href="#">25</a>      | 75-20737Z03 | 65TSV5-5(KD2.5)HL=35 |
|       | <a href="#">26</a>      | 07-22852Z01 | BKT,ESC              |
|       | <a href="#">27</a>      | 03S60822Y13 | SCR,S-T 2.6X6 ZN A   |
|       | <a href="#">28</a>      | 03S60822Y22 | SCR,S-T 2.6X14 ZN A  |
|       | <a href="#">29</a>      | 03S60820Y40 | SCR,MCH 2.6X4 ZNNA   |
|       | <a href="#">30</a>      | -----       | COVER,TOP            |
|       | <a href="#">31</a>      | -----       | HEAT,SINK            |
|       | <a href="#">32</a>      | 54-24128Z01 | LABEL,CHAS           |
|       | <a href="#">34</a>      | 29T45687Y01 | CONTACT,OG363050 -E5 |
|       | <a href="#">35</a>      | -----       | BKT,IC PWR SYS       |
|       | <a href="#">36</a>      | 07-24249Z01 | BKT,PREOUT ASSY      |
|       | <a href="#">37</a>      | 29T45687Y02 | OG-363040 -E5        |
|       | <a href="#">39</a>      | 26-19568Z01 | SHIELD,HD TOP        |
|       | <a href="#">40</a>      | 26-20673Z01 | SHIELD,HD BTM        |
|       | <a href="#">ANT3000</a> | 09-17241Z02 | ASSY,ANID-0116-02A   |
|       | <a href="#">CB3600</a>  | 09T35473Y16 | WTB,F169B001-16 -DB  |
|       | <a href="#">CB3601</a>  | 09-07665Z04 | WTB,S20B-PADSS-1 -DB |
|       | <a href="#">CB7400</a>  | 09-07665Z06 | WTB,S14B-PADSS-1 -DB |
|       | <a href="#">DIN6200</a> | 09-18874Z01 | DIN,TCS7718-012117DB |
|       | <a href="#">DIN7400</a> | 09T15462Y05 | DIN,TCS7729-019117DB |
|       | <a href="#">ET4300</a>  | 40-23476Z01 | ASSY,EMU601G2A629    |
|       | <a href="#">JK3600</a>  | 09-19159Z02 | JAC,HSJ2636-011041EA |
|       | <a href="#">JK7400</a>  | 09-12459Z01 | JAC,HSJ1765-011075EA |
|       | <a href="#">JK7401</a>  | 09-19159Z01 | JAC,HSJ2636-011040EA |

NOTE:The part that has not PART NUMBER will not be supplied.

| MODEL | Symbol No.              | Parts No.   | Description          |
|-------|-------------------------|-------------|----------------------|
|       | <a href="#">LCD4000</a> | 65-19540Z02 | ASSY,C070VW06 V0     |
|       | <a href="#">M7700</a>   | 59-14185Z02 | MOTOR,ASB0412MA-9F1B |
|       | <a href="#">SK7400</a>  | 09-12732Z02 | SKT,GT17H-4P-2H(B)EF |
|       | <a href="#">SW103</a>   | 40-14849Z02 | SW,TACT SKRBACE010E2 |

NOTE:The part that has not PART NUMBER will not be supplied.

# Packing Method View

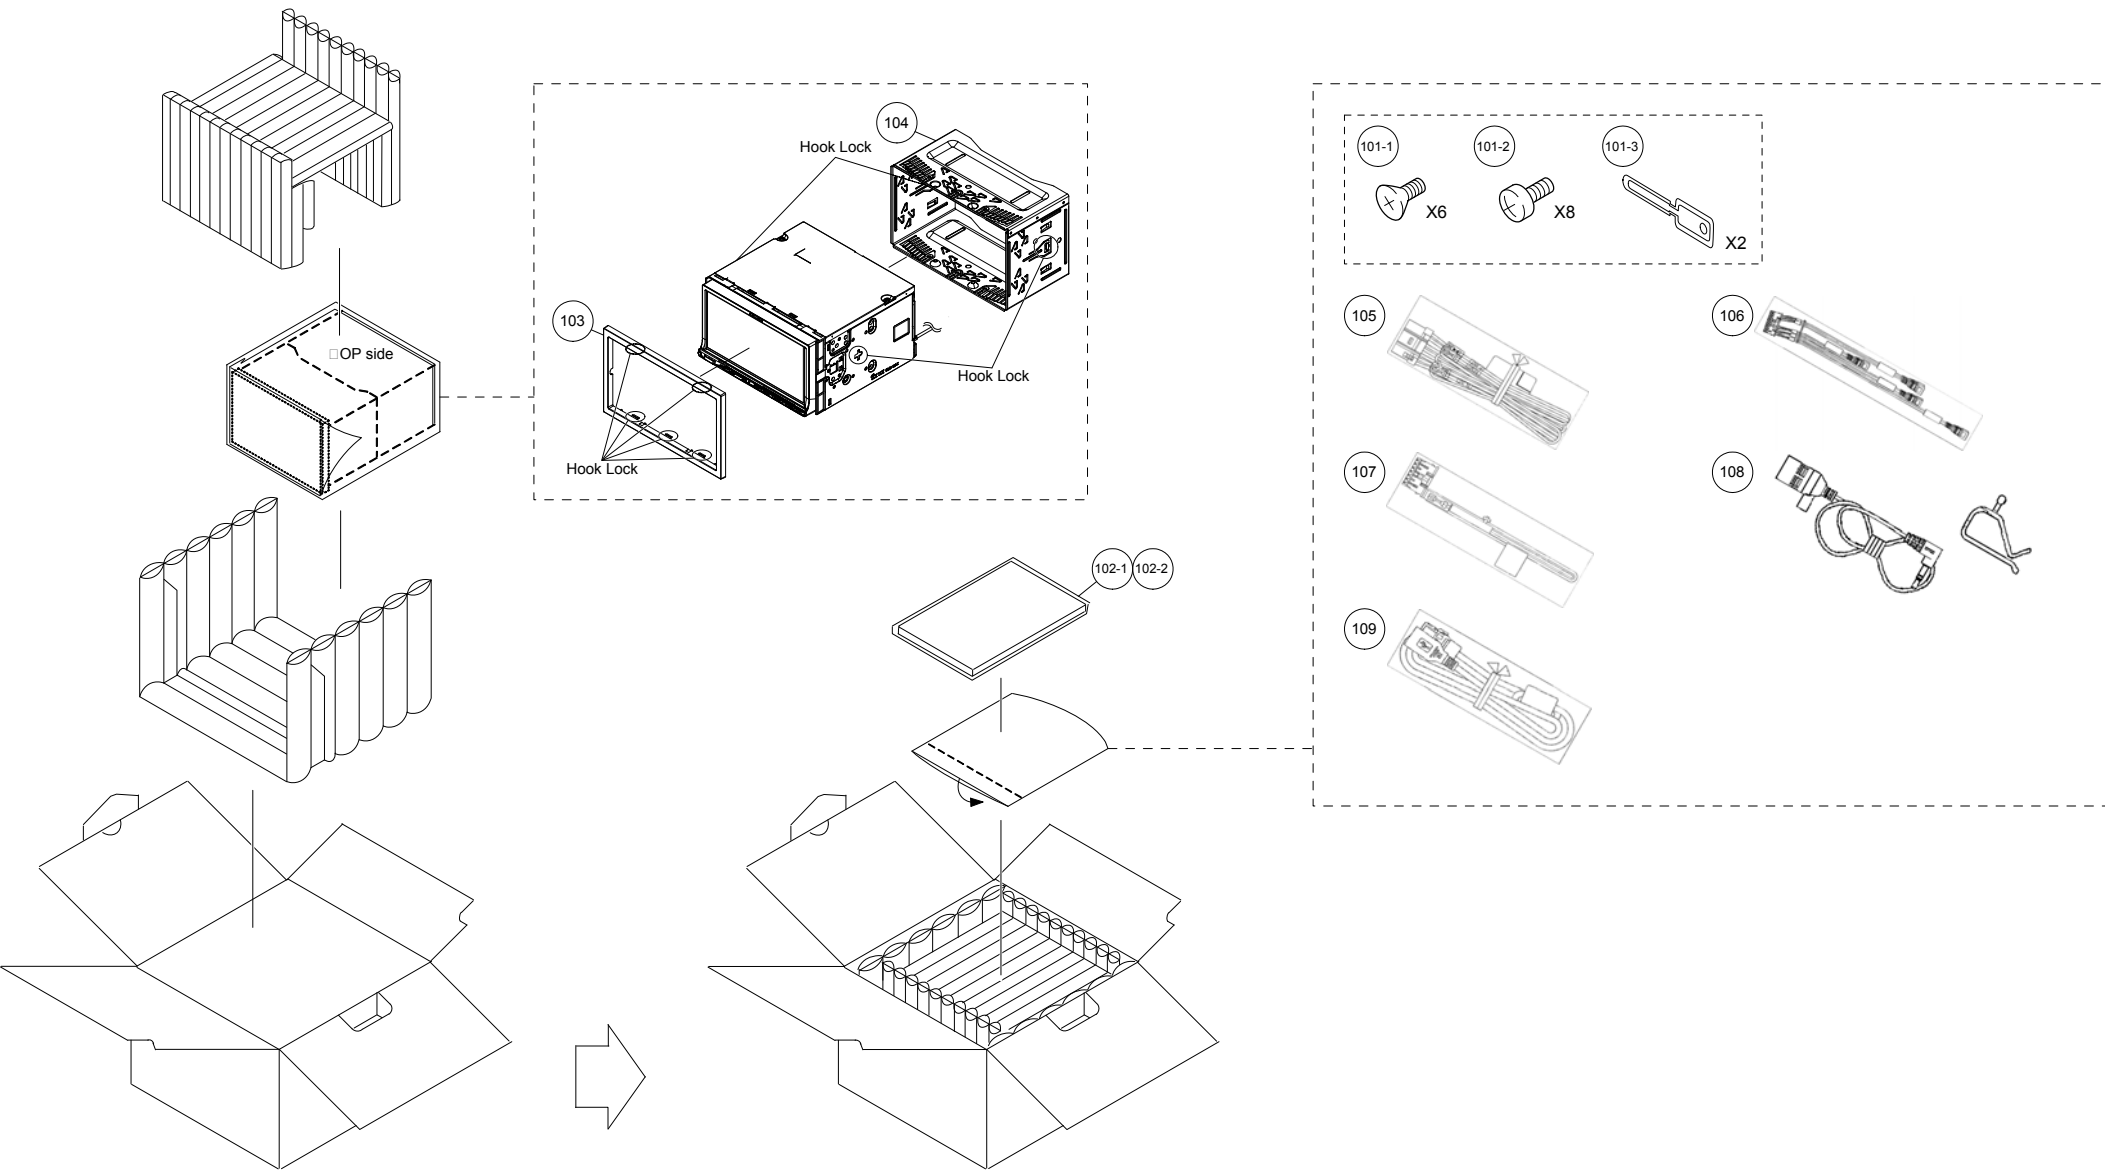

| MODEL | Symbol No. | Parts No. | Description |
|-------|------------|-----------|-------------|
|-------|------------|-----------|-------------|

|  |                       |             |                     |
|--|-----------------------|-------------|---------------------|
|  | <a href="#">101-1</a> | 03S60820Y16 | SCR,MCH 5X8 ZN A    |
|  | <a href="#">101-2</a> | 03S60820Y17 | SCR,MCH 5X8 ZN A    |
|  | <a href="#">101-3</a> | 07-01964Z01 | BKT,RELEASE         |
|  | <a href="#">102-1</a> | 68-16340Z06 | O/M-CDROM ICSX7 US  |
|  | <a href="#">102-2</a> | 68-21057Z35 | O/M-QUICK ICS7 AOAM |
|  | <a href="#">103</a>   | 33-14124Z02 | FACE,PLATE          |
|  | <a href="#">104</a>   | 15-14189Z01 | CASE,INNER          |
|  | <a href="#">105</a>   | 09-17244Z04 | ASSY,ANIC-0050-04A  |
|  | <a href="#">106</a>   | 09-19948Z03 | ASSY,AD0066-03A     |
|  | <a href="#">107</a>   | 09-19807Z03 | ASSY,ANIC-0071-03A  |
|  | <a href="#">108</a>   | 50-14386Z03 | ASSY,LYS-M9750-FUL  |
|  | <a href="#">109</a>   | 09-12483Z05 | ASSY,ANID-0078-05A  |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                               | MODEL | Ref.                    | Parts No.   | Parts Name           |
|-----------------|-----------------------------------------------------------------------------------|-------|-------------------------|-------------|----------------------|
| AUDIO-P.W.Board |  |       | <a href="#">ANT3000</a> | 09-17241Z02 | ASSY,ANID-0116-02A   |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2000</a>   | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2001</a>   | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2002</a>   | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2003</a>   | 08S35374W11 | CAP,CER 475K-B0J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2004</a>   | 08S65667Y01 | CAP,CER 224KX5R1C-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2005</a>   | 08S65676Y02 | CAP,CER 475KX7R1A-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2006</a>   | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2007</a>   | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2008</a>   | 08S65667Y01 | CAP,CER 224KX5R1C-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2011</a>   | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2012</a>   | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2013</a>   | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2014</a>   | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2015</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2017</a>   | 08S45676W73 | CAP,CER.103K-B1H -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2018</a>   | 08S45677W10 | CAP,CER 8R0D-CH1H-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2019</a>   | 08S45677W10 | CAP,CER 8R0D-CH1H-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2020</a>   | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2021</a>   | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2204</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2205</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2206</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2207</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2208</a>   | 08S35349Y15 | CAP,CER 474K-B1A -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2209</a>   | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2210</a>   | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2211</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2212</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2213</a>   | 08S45676W93 | CAP,CER 224K-B1A -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2214</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2215</a>   | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2216</a>   | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2217</a>   | 08S65667Y02 | CAP,CER 334KX5R1A-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2219</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2220</a>   | 08S45676W73 | CAP,CER.103K-B1H -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2221</a>   | 08S45676W67 | CAP,CER.332K-B1H -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2222</a>   | 08S45676W67 | CAP,CER.332K-B1H -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2223</a>   | 08S45676W67 | CAP,CER.332K-B1H -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2224</a>   | 08S45676W67 | CAP,CER.332K-B1H -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2225</a>   | 08S45676W67 | CAP,CER.332K-B1H -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2226</a>   | 08S45676W67 | CAP,CER.332K-B1H -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2227</a>   | 08S45676W93 | CAP,CER 224K-B1A -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2228</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2229</a>   | 08S45677W08 | CAP,CER.6R0D-CH1H-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2230</a>   | 08S45677W08 | CAP,CER.6R0D-CH1H-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">C2231</a>   | 08S35349Y16 | CAP,CER 105K-B1A -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| AUDIO-P.W.Board |     |       | <a href="#">C2232</a> | 08S65667Y02 | CAP,CER 334KX5R1A-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2233</a> | 08S65669Y01 | CAP,CER 334KX7R1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2234</a> | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2235</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2236</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2237</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2238</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2239</a> | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2240</a> | 08S35374W11 | CAP,CER 475K-B0J -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2241</a> | 08S35374W11 | CAP,CER 475K-B0J -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2243</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2244</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2245</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2246</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2247</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2248</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2249</a> | 08S35374W10 | CAP,CER 225K-B1A -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2250</a> | 08S35374W10 | CAP,CER 225K-B1A -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2251</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2252</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2253</a> | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2254</a> | 08S45231Y38 | CAP,CER 102J-CH1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2255</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2256</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2257</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2258</a> | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2259</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2260</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2261</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2262</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2263</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2269</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2270</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2271</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2272</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2273</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2274</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2275</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2276</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2277</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2278</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2401</a> | 08S65670Y03 | CAP,CER 335KX5R1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2402</a> | 08S65670Y03 | CAP,CER 335KX5R1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2403</a> | 08S65670Y03 | CAP,CER 335KX5R1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2404</a> | 08S65670Y03 | CAP,CER 335KX5R1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2405</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2406</a> | 08S35374W10 | CAP,CER 225K-B1A -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| AUDIO-P.W.Board |     |       | <a href="#">C2407</a> | 08S65676Y03 | CAP,CER 225KX7R1C-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2408</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| AUDIO-P.W.Board |     |       | <a href="#">C2409</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| AUDIO-P.W.Board |     |       | <a href="#">C2410</a> | 08S35374W10 | CAP,CER 225K-B1A -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2411</a> | 08S65676Y03 | CAP,CER 225KX7R1C-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2412</a> | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2413</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2414</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2415</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2416</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2417</a> | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2418</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2419</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2420</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2421</a> | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2423</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2604</a> | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2605</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2606</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2607</a> | 08S35349Y15 | CAP,CER 474K-B1A -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2610</a> | 08-16926Z01 | CAP,CER 224JX6S1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2611</a> | 08-16926Z01 | CAP,CER 224JX6S1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2612</a> | 08-16926Z01 | CAP,CER 224JX6S1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2613</a> | 08-16926Z01 | CAP,CER 224JX6S1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2800</a> | 08S65670Y07 | CAP,CER 105KX5R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2801</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2802</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2803</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2804</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2805</a> | 08S65670Y04 | CAP,CER 475KX5R1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2806</a> | 08S65670Y04 | CAP,CER 475KX5R1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2807</a> | 08S35349Y11 | CAP,CER 223K-B1H -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2808</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2809</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2810</a> | 08S45676W83 | CAP,CER 473K-B1C -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2811</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2812</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C2814</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C3000</a> | 08S45231Y16 | CAP,CER 18RJ-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C3002</a> | 08S82122F17 | CAP,CER.15RJ-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C3003</a> | 08S45231Y13 | CAP,CER 10RD-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C3004</a> | 08S45231Y18 | CAP,CER 27RJ-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C3005</a> | 08S45231Y38 | CAP,CER 102J-CH1E-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C3006</a> | 08S82122F61 | CAP,CER.102J-CH1H-CP |
| AUDIO-P.W.Board |     |       | <a href="#">C3007</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C3008</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| AUDIO-P.W.Board |     |       | <a href="#">C3009</a> | 08S45232Y13 | CAP,CER 223K-B1C -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                                 | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-------------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3010</a>  | 08S65668Y05 | CAP,CER 224KX5R1A-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3011</a>  | 08S45231Y38 | CAP,CER 102J-CH1E-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3012</a>  | 08S45232Y08 | CAP,CER 332K-B1H -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3013</a>  | 08S45232Y13 | CAP,CER 223K-B1C -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3015</a>  | 08S45676W68 | CAP,CER.392K-B1H -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3016</a>  | 08S45231Y38 | CAP,CER 102J-CH1E-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3400</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3401</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3402</a>  | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3404</a>  | 08S65128F89 | CAP,CER 333K-B1H -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3405</a>  | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3406</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3407</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3408</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3409</a>  | 08S45232Y13 | CAP,CER 223K-B1C -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3410</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3411</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3412</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3413</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3415</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3417</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3418</a>  | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3419</a>  | 08S65677Y06 | CAP,CER 226MX7R1C-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3420</a>  | 08S65677Y06 | CAP,CER 226MX7R1C-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3600</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3601</a>  | 08S45539Y01 | CAP,CER 102KX7R2J-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3602</a>  | 08S45539Y01 | CAP,CER 102KX7R2J-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3603</a>  | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3604</a>  | 08S45539Y01 | CAP,CER 102KX7R2J-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3605</a>  | 08S45539Y01 | CAP,CER 102KX7R2J-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3607</a>  | 08S45539Y01 | CAP,CER 102KX7R2J-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3608</a>  | 08S45539Y01 | CAP,CER 102KX7R2J-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3609</a>  | 08S45539Y01 | CAP,CER 102KX7R2J-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3610</a>  | 08S35350Y03 | CAP,CER 224K-B1C -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3611</a>  | 08S35350Y03 | CAP,CER 224K-B1C -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3612</a>  | 08S45677W42 | CAP,CER.181J-CH1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3613</a>  | 08S65676Y02 | CAP,CER 475KX7R1A-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3614</a>  | 08S45677W42 | CAP,CER.181J-CH1H-CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">C3615</a>  | 08S65128F90 | CAP,CER 473K-B1H -CP |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">CB2000</a> | 09-14451Z06 | FFC,502790-3091 -ED  |
| AUDIO-P.W.Board |  |       | <a href="#">CB3600</a> | 09T35473Y16 | WTB,F169B001-16 -DB  |
| AUDIO-P.W.Board |  |       | <a href="#">CB3601</a> | 09-07665Z04 | WTB,S20B-PADSS-1 -DB |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">CH3200</a> | 09-12770Z06 | BTB,DY11-120L-BT -EZ |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">D2400</a>  | 48-07154Z01 | DIO,1SS336-L -CP     |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">D2401</a>  | 48-07154Z01 | DIO,1SS336-L -CP     |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">D2402</a>  | 48-07154Z01 | DIO,1SS336-L -CP     |
| AUDIO-P.W.Board |                                                                                     |       | <a href="#">D2600</a>  | 48-05164Z01 | DIO,1SS352-TPH3 -CP  |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| AUDIO-P.W.Board |     |       | <a href="#">D2800</a> | 48T63462F01 | DIO,DAN202K-96 -CP   |
| AUDIO-P.W.Board |     |       | <a href="#">D2801</a> | 48-05965Z01 | DIO,1SS361-L -CP     |
| AUDIO-P.W.Board |     |       | <a href="#">D3000</a> | 48-17547Z01 | DIO,DA3J101F0L -CP   |
| AUDIO-P.W.Board |     |       | <a href="#">D3401</a> | 48T75527Y01 | DIO,1SR154-400 -E1   |
| AUDIO-P.W.Board |     |       | <a href="#">D3600</a> | 48-05164Z01 | DIO,1SS352-TPH3 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">E2000</a> | 23S75244Y19 | CAP,ELY 101-1C -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E2200</a> | 23T75234Y18 | CAP,MAR 221-1A-H63E6 |
| AUDIO-P.W.Board |     |       | <a href="#">E2201</a> | 23S75244Y04 | CAP,ELY 221-0J -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E2202</a> | 23S75244Y25 | CAP,ELY 22R-1E -E3   |
| AUDIO-P.W.Board |     |       | <a href="#">E2203</a> | 23S75244Y02 | CAP,ELY 47R-0J -E2   |
| AUDIO-P.W.Board |     |       | <a href="#">E2204</a> | 23S75244Y28 | CAP,ELY 101-1E -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E2205</a> | 23S75244Y27 | CAP,ELY 47R-1E -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E2206</a> | 23S75244Y27 | CAP,ELY 47R-1E -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E2207</a> | 23S75244Y30 | CAP,ELY 331-1E -EA   |
| AUDIO-P.W.Board |     |       | <a href="#">E2209</a> | 23S75244Y25 | CAP,ELY 22R-1E -E3   |
| AUDIO-P.W.Board |     |       | <a href="#">E2210</a> | 23S75244Y25 | CAP,ELY 22R-1E -E3   |
| AUDIO-P.W.Board |     |       | <a href="#">E2211</a> | 23S75244Y02 | CAP,ELY 47R-0J -E2   |
| AUDIO-P.W.Board |     |       | <a href="#">E2212</a> | 23S75244Y25 | CAP,ELY 22R-1E -E3   |
| AUDIO-P.W.Board |     |       | <a href="#">E2213</a> | 23T75234Y07 | CAP,MAR 47R-1C-F55E6 |
| AUDIO-P.W.Board |     |       | <a href="#">E2400</a> | 23T75234Y21 | CAP,MAR 33R-1E-F55E6 |
| AUDIO-P.W.Board |     |       | <a href="#">E2401</a> | 23T75234Y21 | CAP,MAR 33R-1E-F55E6 |
| AUDIO-P.W.Board |     |       | <a href="#">E2402</a> | 23T75234Y15 | CAP,MAR 3R3-1H-D55E2 |
| AUDIO-P.W.Board |     |       | <a href="#">E2403</a> | 23T75234Y15 | CAP,MAR 3R3-1H-D55E2 |
| AUDIO-P.W.Board |     |       | <a href="#">E2404</a> | 23T75234Y15 | CAP,MAR 3R3-1H-D55E2 |
| AUDIO-P.W.Board |     |       | <a href="#">E2405</a> | 23T75234Y15 | CAP,MAR 3R3-1H-D55E2 |
| AUDIO-P.W.Board |     |       | <a href="#">E2406</a> | 23T75234Y15 | CAP,MAR 3R3-1H-D55E2 |
| AUDIO-P.W.Board |     |       | <a href="#">E2407</a> | 23T75234Y15 | CAP,MAR 3R3-1H-D55E2 |
| AUDIO-P.W.Board |     |       | <a href="#">E2408</a> | 23T75234Y21 | CAP,MAR 33R-1E-F55E6 |
| AUDIO-P.W.Board |     |       | <a href="#">E2409</a> | 23T75234Y20 | CAP,MAR 22R-1E-F55E6 |
| AUDIO-P.W.Board |     |       | <a href="#">E2411</a> | 23S75244Y40 | CAP,ELY 4R7-1H -E2   |
| AUDIO-P.W.Board |     |       | <a href="#">E2419</a> | 23T75234Y08 | CAP,MAR 4R7-1V-D55E2 |
| AUDIO-P.W.Board |     |       | <a href="#">E2420</a> | 23T75234Y08 | CAP,MAR 4R7-1V-D55E2 |
| AUDIO-P.W.Board |     |       | <a href="#">E2600</a> | 23T65114Y17 | CAP,FK 10R-1C-B -E2  |
| AUDIO-P.W.Board |     |       | <a href="#">E2601</a> | 23-02519Z43 | CAP,FC 1R0-1H-B -E2  |
| AUDIO-P.W.Board |     |       | <a href="#">E2602</a> | 23S65134W34 | CAP,ELY 47R-1C(6)-E6 |
| AUDIO-P.W.Board |     |       | <a href="#">E3000</a> | 23S75244Y18 | CAP,ELY 47R-1C -E3   |
| AUDIO-P.W.Board |     |       | <a href="#">E3400</a> | 23S75244Y20 | CAP,ELY 221-1C -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E3401</a> | 23S75244Y19 | CAP,ELY 101-1C -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E3404</a> | 23T75234Y21 | CAP,MAR 33R-1E-F55E6 |
| AUDIO-P.W.Board |     |       | <a href="#">E3405</a> | 23S75244Y19 | CAP,ELY 101-1C -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E3406</a> | 23T65114Y25 | CAP,FK 10R-1E-B -E2  |
| AUDIO-P.W.Board |     |       | <a href="#">E3407</a> | 23S75244Y20 | CAP,ELY 221-1C -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E3408</a> | 23S75244Y28 | CAP,ELY 101-1E -E6   |
| AUDIO-P.W.Board |     |       | <a href="#">E3409</a> | 23S75244Y23 | CAP,ELY 681-1C -EA   |
| AUDIO-P.W.Board |     |       | <a href="#">E3410</a> | 23S75244Y25 | CAP,ELY 22R-1E -E3   |
| AUDIO-P.W.Board |     |       | <a href="#">E3411</a> | 23S75244Y31 | CAP,ELY 471-1E -EA   |
| AUDIO-P.W.Board |     |       | <a href="#">E3412</a> | 23S75244Y29 | CAP,ELY 221-1E -EA   |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                               | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-----------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">E3600</a>  | 23-04209Z04 | CAP,KRG 472-1C +     |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">E3601</a>  | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2000</a> | 51-18768Z01 | BR24S08FVM-WTR -SE1  |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2001</a> | 83-23717Z54 | V0.994ICSX7US_BU     |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2002</a> | 51-04315Z22 | BU4229G-TR -CP       |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2200</a> | 51-15650Z01 | SAF7741HV/N115 -QT   |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2201</a> | 51T55517Y01 | NJU7223DL118-TE1-NE5 |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2400</a> | 51-13600Z01 | TDA7717 -QT          |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2401</a> | 51-18799Z01 | AK4386VT-E2 -SE2     |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2600</a> | 51-16882Z01 | TDA7851F -ZS         |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2800</a> | 51-02032Z01 | TC7SET02FU-TE85L -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2801</a> | 51T15614Y01 | TC74HC4051AFT-EL-SE5 |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2802</a> | 51-12745Z01 | BH7073G-TR -CP       |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2803</a> | 51T25183Y03 | TC7SET08FU,JF-L -CP  |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC2804</a> | 51T35360Y01 | TC7WH08FU-L -SE1     |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC3000</a> | 51-15831Z01 | TEF7000 -LT          |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC3400</a> | 51T25259Y03 | BA00ASFP-E2 -NE5     |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC3401</a> | 51-13711Z02 | TB2920AHQ -ZS        |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">IC3600</a> | 51T15647Y01 | NJM4558V-TE2 -SE2    |
| AUDIO-P.W.Board |  |       | <a href="#">JK3600</a> | 09-19159Z02 | JAC,HSJ2636-011041EA |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2200</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2201</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2202</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2203</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2204</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2205</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2206</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2208</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2209</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2210</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2211</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2212</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2213</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2214</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2215</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2216</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2217</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L2800</a>  | 24T65067Y02 | FBI,MMZ1005S601AT-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L3000</a>  | 24T55476Y02 | IND,LLQ2012 R27J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L3001</a>  | 24T25164Y18 | IND,FSLM2520 2R7J-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L3002</a>  | 24T25164Y16 | IND,FSLM2520 1R8J-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L3003</a>  | 24T55476Y13 | IND,LLQ2012 R22J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L3004</a>  | 24-17733Z02 | IND,NLCV32T-331K -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L3005</a>  | 24-17733Z02 | IND,NLCV32T-331K -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L3008</a>  | 24T55476Y13 | IND,LLQ2012 R22J -CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L3400</a>  | 24T95457W15 | FBI,BLM21AG601SH1-CP |
| AUDIO-P.W.Board |                                                                                   |       | <a href="#">L3401</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name            |
|-----------------|-----|-------|-----------------------|-------------|-----------------------|
| AUDIO-P.W.Board |     |       | <a href="#">L3402</a> | 24T95456W11 | FBI,BLM18AG601SH1-CP  |
| AUDIO-P.W.Board |     |       | <a href="#">Q2400</a> | 48T75180Y04 | TR,IMH23-T110 -CP     |
| AUDIO-P.W.Board |     |       | <a href="#">Q2401</a> | 48T75180Y04 | TR,IMH23-T110 -CP     |
| AUDIO-P.W.Board |     |       | <a href="#">Q2402</a> | 48T75180Y04 | TR,IMH23-T110 -CP     |
| AUDIO-P.W.Board |     |       | <a href="#">Q2600</a> | 48T25737Y02 | TR,UMD3N-TR -CP       |
| AUDIO-P.W.Board |     |       | <a href="#">Q2601</a> | 48-13000Z05 | TR,LTC124EUBFS8-TLCP  |
| AUDIO-P.W.Board |     |       | <a href="#">Q2602</a> | 48-13000Z05 | TR,LTC124EUBFS8-TLCP  |
| AUDIO-P.W.Board |     |       | <a href="#">Q2800</a> | 48-13000Z01 | TR,LTC114EUBFS8-TLCP  |
| AUDIO-P.W.Board |     |       | <a href="#">Q2801</a> | 48T63420F01 | TR,2SA1037AK-146 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">Q2802</a> | 48-12999Z01 | TR,LT A114EUBFS8-TLCP |
| AUDIO-P.W.Board |     |       | <a href="#">Q2803</a> | 48-13000Z05 | TR,LTC124EUBFS8-TLCP  |
| AUDIO-P.W.Board |     |       | <a href="#">Q3400</a> | 48T94606F08 | TR,DTC143EUA-T106-CP  |
| AUDIO-P.W.Board |     |       | <a href="#">Q3401</a> | 48-17872Z01 | TR,2PA1576Q -CP       |
| AUDIO-P.W.Board |     |       | <a href="#">R2002</a> | 06S15616Y22 | RES,RK 105J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2003</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2004</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2005</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2007</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2008</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2009</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2010</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2011</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2012</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2013</a> | 06S65415Y41 | RES,RK 223F 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2014</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2015</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2016</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2017</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2018</a> | 06S45675W43 | RES,RK JUMPER1/10-CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2019</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2021</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2022</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2023</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2024</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2025</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2026</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2027</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2028</a> | 06S65415Y37 | RES,RK 103F 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2029</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2030</a> | 06S65415Y37 | RES,RK 103F 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2032</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2034</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2035</a> | 06S45674W81 | RES,RK 103J 1/10 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2036</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2037</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2038</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2039</a> | 06S15616Y43 | RES,RK 106J 1/16 -CP  |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| AUDIO-P.W.Board |     |       | <a href="#">R2041</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2042</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2043</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2044</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2045</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2046</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2047</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2048</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2049</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2050</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2052</a> | 06S15615Y33 | RES,RK 221J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2055</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2056</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2057</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2201</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2202</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2204</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2205</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2206</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2207</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2208</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2209</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2210</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2211</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2212</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2213</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2214</a> | 06S15615Y29 | RES,RK 151J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2215</a> | 06S15615Y29 | RES,RK 151J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2216</a> | 06S45674W17 | RES,RK 22RJ 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2217</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2218</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2219</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2220</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2221</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2222</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2223</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2224</a> | 06S45674W09 | RES,RK 10RJ 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2225</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2226</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2228</a> | 06S45674W09 | RES,RK 10RJ 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2231</a> | 06S15594Y18 | RES,RK 684F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2232</a> | 06S15593Y67 | RES,RK 562F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2233</a> | 06S15593Y95 | RES,RK 823F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2234</a> | 06S15593Y70 | RES,RK 752F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2235</a> | 06S15593Y92 | RES,RK 623F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2236</a> | 06S15593Y93 | RES,RK 683F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2237</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| AUDIO-P.W.Board |     |       | <a href="#">R2238</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2239</a> | 06S65415Y23 | RES,RK 681F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2240</a> | 06S65415Y45 | RES,RK 473F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2241</a> | 06S65415Y45 | RES,RK 473F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2242</a> | 06S65415Y23 | RES,RK 681F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2243</a> | 06S65415Y35 | RES,RK 682F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2244</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2245</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2246</a> | 06S65415Y41 | RES,RK 223F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2247</a> | 06S15615Y29 | RES,RK 151J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2248</a> | 06S15615Y29 | RES,RK 151J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2249</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2250</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2251</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2252</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2253</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2254</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2255</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2256</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2257</a> | 06S45674W43 | RES,RK 271J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2258</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2259</a> | 06S15615Y29 | RES,RK 151J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2260</a> | 06S64996F39 | RES,RK JUMPER 1/8-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2261</a> | 06S64996F39 | RES,RK JUMPER 1/8-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2262</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2264</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2265</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2266</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2267</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2268</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2269</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2270</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2271</a> | 06S65415Y42 | RES,RK 273F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2272</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2273</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2403</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2404</a> | 06S45675W03 | RES,RK 753J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2405</a> | 06S45675W03 | RES,RK 753J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2406</a> | 06S45675W03 | RES,RK 753J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2407</a> | 06S45675W03 | RES,RK 753J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2408</a> | 06S45675W03 | RES,RK 753J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2409</a> | 06S45675W03 | RES,RK 753J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2410</a> | 06S70072F29 | RES,CP .101-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2411</a> | 06S70072F29 | RES,CP .101-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2412</a> | 06S70072F29 | RES,CP .101-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2413</a> | 06S70072F29 | RES,CP .101-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2414</a> | 06S70072F29 | RES,CP .101-J-1/4-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| AUDIO-P.W.Board |     |       | <a href="#">R2415</a> | 06S70072F29 | RES,CP .101-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2416</a> | 06S70072F37 | RES,CP .221-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2417</a> | 06S70072F37 | RES,CP .221-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2418</a> | 06S70072F37 | RES,CP .221-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2419</a> | 06S70072F37 | RES,CP .221-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2420</a> | 06S70072F37 | RES,CP .221-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2421</a> | 06S70072F37 | RES,CP .221-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2426</a> | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2427</a> | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2428</a> | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2429</a> | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2431</a> | 06S45674W41 | RES,RK 221J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2434</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2439</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2445</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2600</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2601</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2602</a> | 06S45674W69 | RES,RK 332J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2603</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2604</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2605</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2606</a> | 06S15615Y33 | RES,RK 221J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2608</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2609</a> | 06S15593Y33 | RES,RK 221F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2610</a> | 06S15593Y33 | RES,RK 221F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2611</a> | 06S15593Y33 | RES,RK 221F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2612</a> | 06S15593Y33 | RES,RK 221F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2800</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2801</a> | 06S45674W69 | RES,RK 332J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2802</a> | 06S45674W65 | RES,RK 222J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2803</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2804</a> | 06S45675W22 | RES,RK 474J 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2805</a> | 06S70072F19 | RES,CP .39R-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2806</a> | 06S35083Y82 | RES,RK 36RF 1/4 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R2807</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2808</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2809</a> | 06S15615Y33 | RES,RK 221J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2810</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2811</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2812</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2813</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2814</a> | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R2815</a> | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R3000</a> | 06S65415Y15 | RES,RK 151F 1/16 -CP |
| AUDIO-P.W.Board |     |       | <a href="#">R3001</a> | 06S45348Y38 | RES,RK 474F 1/4 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R3002</a> | 06S45348Y38 | RES,RK 474F 1/4 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">R3004</a> | 06S45674W39 | RES,RK 181J 1/10 -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board | MIS | MODEL | Ref. | Parts No. | Parts Name |
|-----------|-----|-------|------|-----------|------------|
|-----------|-----|-------|------|-----------|------------|

|                 |  |  |                        |             |                      |
|-----------------|--|--|------------------------|-------------|----------------------|
| AUDIO-P.W.Board |  |  | <a href="#">R3006</a>  | 06S65415Y32 | RES,RK 392F 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3007</a>  | 06S65415Y41 | RES,RK 223F 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3009</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3400</a>  | 06S15593Y51 | RES,RK 122F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3401</a>  | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3402</a>  | 06S15593Y50 | RES,RK 112F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3403</a>  | 06S15594Y14 | RES,RK 474F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3404</a>  | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3405</a>  | 06S15593Y51 | RES,RK 122F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3406</a>  | 06S15593Y66 | RES,RK 512F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3407</a>  | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3408</a>  | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3409</a>  | 06S55365Y98 | RES,RK 243J 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3410</a>  | 06S15615Y47 | RES,RK 821J 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3411</a>  | 06S35095Y01 | RES,RK 333J 1/4 -CP  |
| AUDIO-P.W.Board |  |  | <a href="#">R3412</a>  | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3413</a>  | 06S15593Y92 | RES,RK 623F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3414</a>  | 06S70072F71 | RES,CP .562-J-1/4-CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3415</a>  | 06S15593Y75 | RES,RK 123F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3416</a>  | 06S70072F69 | RES,CP .472-J-1/4-CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3423</a>  | 06S95434W97 | RES,RK 103J 1/4 -CP  |
| AUDIO-P.W.Board |  |  | <a href="#">R3425</a>  | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3427</a>  | 06S15593Y67 | RES,RK 562F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3428</a>  | 06S15593Y88 | RES,RK 433F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3429</a>  | 06S15593Y71 | RES,RK 822F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3430</a>  | 06S15594Y18 | RES,RK 684F 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3432</a>  | 06S15615Y39 | RES,RK 391J 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3602</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3603</a>  | 06S15615Y52 | RES,RK 132J 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3604</a>  | 06S15615Y82 | RES,RK 243J 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3605</a>  | 06S15615Y61 | RES,RK 332J 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3606</a>  | 06S15615Y61 | RES,RK 332J 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3607</a>  | 06S15616Y06 | RES,RK 224J 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3608</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| AUDIO-P.W.Board |  |  | <a href="#">R3609</a>  | 06S15616Y06 | RES,RK 224J 1/16 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">R3610</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| AUDIO-P.W.Board |  |  | <a href="#">R3611</a>  | 06S45674W57 | RES,RK 102J 1/10 -CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2000</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2001</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2002</a> | 06S15771Y41 | RES,ARYEXB28V223J-CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2003</a> | 06S15771Y25 | RES,ARYEXB28V102J-CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2004</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2005</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2006</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2007</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2008</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |
| AUDIO-P.W.Board |  |  | <a href="#">RA2009</a> | 06S15771Y17 | RES,ARYEXB28V221J-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-----|-------|------------------------|-------------|----------------------|
| AUDIO-P.W.Board |     |       | <a href="#">RA2010</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |
| AUDIO-P.W.Board |     |       | <a href="#">RA2011</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |
| AUDIO-P.W.Board |     |       | <a href="#">SA3000</a> | 48-00954Z01 | VST,CSA30C201M-T -CP |
| AUDIO-P.W.Board |     |       | <a href="#">TH2000</a> | 48T75219Y02 | TMT,NCP18WB473F1S-CP |
| AUDIO-P.W.Board |     |       | <a href="#">XL2000</a> | 91-16024Z01 | XTL,AT-41CD2 3.98-E9 |
| AUDIO-P.W.Board |     |       | <a href="#">XL2001</a> | 91-16093Z03 | XTL,NX3215 32.7NS-E1 |
| AUDIO-P.W.Board |     |       | <a href="#">XL2200</a> | 91-17642Z04 | XTL,NX3225SA 41.6-CP |
| AUDIO-P.W.Board |     |       | <a href="#">Z2200</a>  | 91T15509Y08 | EMI,BK1608HM102 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">Z2201</a>  | 91T15509Y08 | EMI,BK1608HM102 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">Z2202</a>  | 91T15509Y07 | EMI,BK1608HM601 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">Z2203</a>  | 91T15509Y07 | EMI,BK1608HM601 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">Z2204</a>  | 91T15509Y07 | EMI,BK1608HM601 -CP  |
| AUDIO-P.W.Board |     |       | <a href="#">ZD3600</a> | 48-21879Z01 | DIO,ZEN SM5S24A -EA  |
| AUDIO-P.W.Board |     |       | <a href="#">ZD3601</a> | 48-06525Z23 | DIO,ZEN UDZS 18B -CP |
| AUDIO-P.W.Board |     |       | <a href="#">ZD3602</a> | 48-06525Z23 | DIO,ZEN UDZS 18B -CP |
| AUDIO-P.W.Board |     |       | <a href="#">ZD3607</a> | 48-06525Z23 | DIO,ZEN UDZS 18B -CP |
| AUDIO-P.W.Board |     |       | <a href="#">ZD3608</a> | 48-06525Z23 | DIO,ZEN UDZS 18B -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6000</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6001</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6002</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6003</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6004</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6005</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6006</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6007</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6008</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6009</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6010</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6011</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6012</a>  | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6013</a>  | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6016</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6017</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6018</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6200</a>  | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6203</a>  | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6204</a>  | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6205</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6206</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6207</a>  | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6208</a>  | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6209</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6210</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6211</a>  | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6212</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6213</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6214</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">C6215</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6216</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6217</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6218</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6219</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6220</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6223</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6225</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6226</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6227</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6401</a> | 08S45231Y10 | CAP,CER 7R0D-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6402</a> | 08S45231Y10 | CAP,CER 7R0D-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6403</a> | 08S45231Y09 | CAP,CER 6R0D-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6404</a> | 08S45231Y10 | CAP,CER 7R0D-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6405</a> | 08S45231Y11 | CAP,CER 8R0D-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6406</a> | 08S45231Y12 | CAP,CER 9R0D-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6408</a> | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6700</a> | 08S45231Y17 | CAP,CER 22RJ-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6701</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6702</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6703</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6704</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6705</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6706</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6707</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6708</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6709</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6710</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6711</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6712</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6713</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6714</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6715</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6716</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6717</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6718</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6719</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6720</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6721</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6722</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6723</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6724</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6725</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6726</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6727</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6728</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6729</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">C6730</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6731</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6732</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6733</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6734</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6735</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6736</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6737</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6738</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6739</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6740</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6741</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6742</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6743</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6744</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6745</a> | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6746</a> | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6747</a> | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6748</a> | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6749</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6750</a> | 08-13830Z01 | CAP,CER 476MX6S0G-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6751</a> | 08-13830Z01 | CAP,CER 476MX6S0G-CP |
| ERATO-P.W.Board |     |       | <a href="#">C6752</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6753</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6754</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6755</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6756</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6757</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6758</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6759</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6760</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6761</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6762</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6763</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6764</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6765</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6766</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6767</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6768</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6769</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6770</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6771</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6772</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6773</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6774</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6775</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6776</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">C6777</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6778</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6779</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6780</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6781</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6782</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6783</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6784</a> | 08S45232Y11 | CAP,CER 103K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6785</a> | 08S45232Y11 | CAP,CER 103K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6786</a> | 08S45232Y11 | CAP,CER 103K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6787</a> | 08S45232Y11 | CAP,CER 103K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6788</a> | 08S35349Y12 | CAP,CER 105K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6789</a> | 08S35349Y12 | CAP,CER 105K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6790</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6791</a> | 08S45232Y11 | CAP,CER 103K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6792</a> | 08S45232Y11 | CAP,CER 103K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6793</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6794</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6795</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6796</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6797</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6798</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6799</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6800</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6801</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6802</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6803</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6804</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6805</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6806</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6807</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6808</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6809</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6810</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6811</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6812</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6813</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6814</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6815</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6816</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6817</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6818</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6819</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6820</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6821</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6822</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6823</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">C6824</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6825</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6826</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6827</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6828</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6829</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6830</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6831</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6832</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6833</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6834</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6835</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6836</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6837</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6838</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6839</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6840</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6841</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6842</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6843</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6844</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6845</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6846</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6847</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6848</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6849</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6850</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6851</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6852</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6853</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6854</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6855</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6856</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6857</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C6858</a> | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6859</a> | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6860</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6861</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6862</a> | 08S35374W11 | CAP,CER 475K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C6863</a> | 08S35349Y15 | CAP,CER 474K-B1A -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7001</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7002</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C7003</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C7004</a> | 08S45676W93 | CAP,CER 224K-B1A -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7400</a> | 08S65670Y04 | CAP,CER 475KX5R1E-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7401</a> | 08S65670Y04 | CAP,CER 475KX5R1E-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7402</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">C7403</a> | 08S45676W83 | CAP,CER 473K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7404</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7405</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7406</a> | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7407</a> | 08S45232Y07 | CAP,CER 222K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7408</a> | 08S45232Y07 | CAP,CER 222K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7409</a> | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7410</a> | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7411</a> | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7414</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7416</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7417</a> | 08S45676W65 | CAP,CER.222K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7419</a> | 08S45232Y07 | CAP,CER 222K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7420</a> | 08S45232Y07 | CAP,CER 222K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7421</a> | 08S45232Y07 | CAP,CER 222K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7600</a> | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C7700</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7701</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7702</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7703</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7705</a> | 08S45231Y22 | CAP,CER 56RJ-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7706</a> | 08S45231Y36 | CAP,CER 681J-CH1E-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7707</a> | 08S45231Y25 | CAP,CER 101J-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7708</a> | 08S45231Y23 | CAP,CER 68RJ-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7709</a> | 08S45231Y27 | CAP,CER 151J-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7710</a> | 08S45231Y36 | CAP,CER 681J-CH1E-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7711</a> | 08S45231Y29 | CAP,CER 221J-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7712</a> | 08S45231Y36 | CAP,CER 681J-CH1E-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7713</a> | 08S45232Y14 | CAP,CER 333K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7714</a> | 08S45232Y11 | CAP,CER 103K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7716</a> | 08S45232Y13 | CAP,CER 223K-B1C -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7717</a> | 08S45231Y21 | CAP,CER 47RJ-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7718</a> | 08S45231Y21 | CAP,CER 47RJ-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7719</a> | 08S45231Y21 | CAP,CER 47RJ-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7720</a> | 08S45231Y21 | CAP,CER 47RJ-CH1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7721</a> | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7722</a> | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7723</a> | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7724</a> | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7725</a> | 08S35374W01 | CAP,CER 104K-B1E-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C7726</a> | 08S35374W01 | CAP,CER 104K-B1E-CP  |
| ERATO-P.W.Board |     |       | <a href="#">C7727</a> | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7728</a> | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7729</a> | 08T81833F08 | CAP,CER 475K-B1A -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7730</a> | 08T81833F08 | CAP,CER 475K-B1A -CP |
| ERATO-P.W.Board |     |       | <a href="#">C7731</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |     |       | <a href="#">C7732</a> | 08S65669Y03 | CAP,CER 224KX7R1H-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                                 | MODEL | Ref.                    | Parts No.   | Parts Name           |
|-----------------|-------------------------------------------------------------------------------------|-------|-------------------------|-------------|----------------------|
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7733</a>   | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7734</a>   | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7735</a>   | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7736</a>   | 08S65670Y09 | CAP,CER 106KX5R1E-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7737</a>   | 08S65670Y09 | CAP,CER 106KX5R1E-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7738</a>   | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7739</a>   | 08S65670Y09 | CAP,CER 106KX5R1E-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7740</a>   | 08S65670Y09 | CAP,CER 106KX5R1E-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7741</a>   | 08S65670Y09 | CAP,CER 106KX5R1E-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7742</a>   | 08S65670Y09 | CAP,CER 106KX5R1E-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7743</a>   | 08S45232Y08 | CAP,CER 332K-B1H -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7744</a>   | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7745</a>   | 08S45232Y07 | CAP,CER 222K-B1H -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7746</a>   | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7747</a>   | 08T81833F10 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7748</a>   | 08T81833F10 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7749</a>   | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7750</a>   | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7751</a>   | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7752</a>   | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7753</a>   | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7754</a>   | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7755</a>   | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7756</a>   | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7757</a>   | 08S45232Y11 | CAP,CER 103K-B1C -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7758</a>   | 08S45231Y25 | CAP,CER 101J-CH1H-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7759</a>   | 08S45232Y09 | CAP,CER 472K-B1E -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7760</a>   | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7761</a>   | 08T81833F10 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7762</a>   | 08S35374W12 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">C7763</a>   | 08T81833F10 | CAP,CER 106K-B0J -CP |
| ERATO-P.W.Board |  |       | <a href="#">CB7400</a>  | 09-07665Z06 | WTB,S14B-PADSS-1 -DB |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">CB7600</a>  | 09-11259Z02 | FFC,501951-2010 -E7  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">CB7700</a>  | 09T85454W02 | WTB,53398-0271-E6    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">CH6000</a>  | 09-17468Z01 | BTB,DY11-090L-BTN-EZ |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">CH7200</a>  | 09-12770Z06 | BTB,DY11-120L-BT -EZ |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">D7400</a>   | 48-08988Z01 | VST,EZJZ0V800AA -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">D7401</a>   | 48-08988Z01 | VST,EZJZ0V800AA -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">D7402</a>   | 48-05164Z01 | DIO,1SS352-TPH3 -CP  |
| ERATO-P.W.Board |  |       | <a href="#">DIN6200</a> | 09-18874Z01 | DIN,TCS7718-012117DB |
| ERATO-P.W.Board |  |       | <a href="#">DIN7400</a> | 09T15462Y05 | DIN,TCS7729-019117DB |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6000</a>   | 23S75244Y28 | CAP,ELY 101-1E -E6   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6001</a>   | 23S75244Y19 | CAP,ELY 101-1C -E6   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6002</a>   | 23S75244Y26 | CAP,ELY 33R-1E -E3   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6003</a>   | 23S75244Y26 | CAP,ELY 33R-1E -E3   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6004</a>   | 23S75244Y26 | CAP,ELY 33R-1E -E3   |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                                 | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-------------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6200</a>  | 23S75244Y02 | CAP,ELY 47R-0J -E2   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6201</a>  | 23S75244Y03 | CAP,ELY 101-0J -E3   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6700</a>  | 23T65679Y06 | CAP,CD 68R-0G -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6701</a>  | 23T65679Y06 | CAP,CD 68R-0G -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6702</a>  | 23T65679Y06 | CAP,CD 68R-0G -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6703</a>  | 23T65679Y01 | CAP,CD 101-0D -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E6704</a>  | 23T65679Y29 | CAP,CD 101-0G -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7400</a>  | 23S65134W65 | CAP,ELY 1R0-1H(3)-E2 |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7401</a>  | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7700</a>  | 23S75244Y28 | CAP,ELY 101-1E -E6   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7701</a>  | 23S75244Y25 | CAP,ELY 22R-1E -E3   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7702</a>  | 23S75244Y27 | CAP,ELY 47R-1E -E6   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7703</a>  | 23S75244Y31 | CAP,ELY 471-1E -EA   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7704</a>  | 23-09405Z02 | CAP,CX 331-0D -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7705</a>  | 23-09405Z05 | CAP,CX 101-0J -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7706</a>  | 23-09405Z02 | CAP,CX 331-0D -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7707</a>  | 23-09405Z11 | CAP,CX 221-0G -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">E7708</a>  | 23-09405Z05 | CAP,CX 101-0J -E2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">F6000</a>  | 65-10745Z10 | FUSE,TF16AT 2.50A-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC6000</a> | 51-19085Z02 | DS99R104TSQX -LE6    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC6200</a> | 51-18961Z01 | ML86V7665TBZ03A -QT  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC6201</a> | 51T75516Y07 | BA15BC0FP-E2 -NE5    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC6203</a> | 51T15194Y02 | TC74VHCT08AFT,K -SE5 |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC6400</a> | 51-17013Z01 | MN2WS0090DMCUB -BT   |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC6701</a> | 51-20504Z01 | MT47H64M16HR-25E -BT |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC6702</a> | 51-20504Z01 | MT47H64M16HR-25E -BT |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7001</a> | 51-15224Z01 | MFI341S2313 -SE2     |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7002</a> | 83-23717Z53 | V0.994ICSX7ERATO     |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7003</a> | 51-20753Z01 | MR48V256A-TA -ST     |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7004</a> | 51-20290Z01 | MX25L6406EM2I-12GSE6 |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7400</a> | 51-12745Z01 | BH7073G-TR -CP       |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7401</a> | 51-21187Z01 | TPS2032QDRQ1 -SE2    |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7700</a> | 51T25259Y03 | BA00ASFP-E2 -NE5     |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7701</a> | 51-12291Z01 | LTC3850IUF -LE2      |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7702</a> | 51-12291Z01 | LTC3850IUF -LE2      |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">IC7703</a> | 51-04315Z34 | BU4216G-TR -CP       |
| ERATO-P.W.Board |  |       | <a href="#">JK7400</a> | 09-12459Z01 | JAC,HSJ1765-011075EA |
| ERATO-P.W.Board |  |       | <a href="#">JK7401</a> | 09-19159Z01 | JAC,HSJ2636-011040EA |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">L6000</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">L6001</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">L6002</a>  | 24-17231Z01 | IND,NR8040 47RM -E6  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">L6003</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">L6004</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">L6200</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">L6201</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">L6202</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">L6203</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                   | Parts No.   | Parts Name            |
|-----------------|-----|-------|------------------------|-------------|-----------------------|
| ERATO-P.W.Board |     |       | <a href="#">L6205</a>  | 24-06212Z08 | FBI,BLM15BD102SH1-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L6400</a>  | 24T95457W10 | FBI,BLM21BD272SH1-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L6700</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L6701</a>  | 24-10967Z20 | IND,LBM2016 4R7J -CP  |
| ERATO-P.W.Board |     |       | <a href="#">L6702</a>  | 24T65067Y02 | FBI,MMZ1005S601AT-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L6703</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L6704</a>  | 24-06212Z07 | FBI,BLM15BD601SH1-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L6705</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L6706</a>  | 24T65067Y02 | FBI,MMZ1005S601AT-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L7200</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L7400</a>  | 24-06212Z08 | FBI,BLM15BD102SH1-CP  |
| ERATO-P.W.Board |     |       | <a href="#">L7700</a>  | 24-08610Z12 | IND,DS106C2 1R2N -EA  |
| ERATO-P.W.Board |     |       | <a href="#">L7701</a>  | 24-23871Z01 | IND,NRS8040T 10RM-E6  |
| ERATO-P.W.Board |     |       | <a href="#">L7702</a>  | 24-22372Z01 | IND,NRS6045T 6R3M-E2  |
| ERATO-P.W.Board |     |       | <a href="#">L7703</a>  | 24-08610Z01 | IND,DS106C2 4R7N -EA  |
| ERATO-P.W.Board |     |       | <a href="#">PS6200</a> | 48-16589Z03 | POLY,SW SMDCL150F -E2 |
| ERATO-P.W.Board |     |       | <a href="#">Q7400</a>  | 48-13000Z05 | TR,LTC124EUBFS8-TLCP  |
| ERATO-P.W.Board |     |       | <a href="#">Q7404</a>  | 48T25737Y02 | TR,UMD3N-TR -CP       |
| ERATO-P.W.Board |     |       | <a href="#">Q7405</a>  | 48T25737Y02 | TR,UMD3N-TR -CP       |
| ERATO-P.W.Board |     |       | <a href="#">Q7406</a>  | 48-13000Z05 | TR,LTC124EUBFS8-TLCP  |
| ERATO-P.W.Board |     |       | <a href="#">Q7700</a>  | 48-13000Z05 | TR,LTC124EUBFS8-TLCP  |
| ERATO-P.W.Board |     |       | <a href="#">Q7701</a>  | 48-13000Z01 | TR,LTC114EUBFS8-TLCP  |
| ERATO-P.W.Board |     |       | <a href="#">Q7704</a>  | 48-11272Z01 | FET,SP8K22-TB -E2     |
| ERATO-P.W.Board |     |       | <a href="#">Q7705</a>  | 48-11272Z01 | FET,SP8K22-TB -E2     |
| ERATO-P.W.Board |     |       | <a href="#">Q7706</a>  | 48-11272Z01 | FET,SP8K22-TB -E2     |
| ERATO-P.W.Board |     |       | <a href="#">Q7707</a>  | 48-11272Z01 | FET,SP8K22-TB -E2     |
| ERATO-P.W.Board |     |       | <a href="#">R6000</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6001</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6002</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6003</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6004</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6009</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6010</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6013</a>  | 06S15593Y81 | RES,RK 223F 1/10 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6014</a>  | 06S15615Y81 | RES,RK 223J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6015</a>  | 06S15615Y81 | RES,RK 223J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6016</a>  | 06S15615Y33 | RES,RK 221J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6017</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6018</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6019</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6020</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6021</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6022</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6023</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6024</a>  | 06S15615Y81 | RES,RK 223J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6025</a>  | 06S15615Y81 | RES,RK 223J 1/16 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6026</a>  | 06S15615Y81 | RES,RK 223J 1/16 -CP  |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">R6027</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6028</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6030</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6032</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6200</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6202</a> | 06S15593Y13 | RES,RK 33RF 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6203</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6204</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6205</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6206</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6207</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6208</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6209</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6210</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6212</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6213</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6214</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6215</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6216</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6219</a> | 06T25178Y46 | RES,RK 43RF 1/4 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6222</a> | 06S15593Y13 | RES,RK 33RF 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6223</a> | 06T25178Y46 | RES,RK 43RF 1/4 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6224</a> | 06S70072F53 | RES,CP .102-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6227</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6228</a> | 06S70072F98 | RES,RK 223J 1/4 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R6231</a> | 06S70072F53 | RES,CP .102-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6234</a> | 06S70072F51 | RES,CP .821-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6235</a> | 06S15594Y23 | RES,RK JUMPER1/10-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6236</a> | 06S15594Y23 | RES,RK JUMPER1/10-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6237</a> | 06S15594Y23 | RES,RK JUMPER1/10-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6243</a> | 06S35095Y08 | RES,RK JUMPER 1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6244</a> | 06S35095Y08 | RES,RK JUMPER 1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6400</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6401</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6402</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6403</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6404</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6405</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6406</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6407</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6408</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6412</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6413</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6414</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6415</a> | 06S15615Y31 | RES,RK 181J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6416</a> | 06S15615Y43 | RES,RK 561J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6417</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">R6418</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6420</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6421</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6422</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6426</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6427</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6430</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6431</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6432</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6433</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6434</a> | 06S15615Y33 | RES,RK 221J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6435</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6436</a> | 06S15615Y19 | RES,RK 56RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6437</a> | 06S15615Y19 | RES,RK 56RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6438</a> | 06S15615Y19 | RES,RK 56RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6439</a> | 06S15615Y19 | RES,RK 56RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6441</a> | 06S15615Y19 | RES,RK 56RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6442</a> | 06S15615Y19 | RES,RK 56RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6448</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6455</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6456</a> | 06S65415Y66 | RES,RK 622F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6457</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6460</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6461</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6462</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6463</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6464</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6465</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6466</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6467</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6469</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6470</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6471</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6472</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6473</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6474</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6475</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6476</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6477</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6478</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6479</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6480</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6482</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6483</a> | 06S15616Y22 | RES,RK 105J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6484</a> | 06S15616Y22 | RES,RK 105J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6485</a> | 06S15616Y22 | RES,RK 105J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6486</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">R6487</a> | 06S15615Y53 | RES,RK 152J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6488</a> | 06S15615Y42 | RES,RK 511J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6489</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6492</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6493</a> | 06S15615Y28 | RES,RK 131J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6494</a> | 06S15615Y37 | RES,RK 331J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6495</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6496</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6498</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6499</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6514</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6515</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6516</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6527</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6700</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6701</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6702</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6704</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6705</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6706</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6707</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6708</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6709</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6710</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6711</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6712</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6713</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6714</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6715</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6716</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6717</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6718</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6719</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6720</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6721</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6722</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6723</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6724</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6725</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6726</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6727</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6728</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6729</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6730</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6731</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6732</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6733</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">R6734</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6735</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6736</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6737</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6738</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6739</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6740</a> | 06S15615Y23 | RES,RK 82RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6741</a> | 06S15615Y23 | RES,RK 82RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6742</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6743</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6744</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6745</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6746</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6747</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6748</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6749</a> | 06S65415Y65 | RES,RK 301F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6750</a> | 06S65415Y64 | RES,RK 75RF 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6751</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6752</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6753</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6758</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6759</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6760</a> | 06S65415Y17 | RES,RK 221F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6761</a> | 06S65415Y17 | RES,RK 221F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6762</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6763</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6764</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6765</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6766</a> | 06S65415Y38 | RES,RK 123F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6767</a> | 06S65415Y36 | RES,RK 822F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6768</a> | 06S65415Y31 | RES,RK 332F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6769</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6770</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6771</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6772</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6773</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6774</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6775</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6776</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R6778</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6779</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6780</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6781</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6782</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6783</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6784</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6785</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">R6786</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6787</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6788</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6789</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6790</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6791</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6792</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6793</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6794</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6795</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R6796</a> | 06S15594Y23 | RES,RK JUMPER1/10-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7000</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7001</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7002</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7004</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7005</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7006</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7008</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7009</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7010</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7011</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7012</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7013</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7014</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7015</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7016</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7017</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7018</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7019</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7020</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7021</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7022</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7023</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7024</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7025</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7027</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7028</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7029</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7030</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7031</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7032</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7033</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7034</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7035</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7036</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7037</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7038</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">R7039</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7040</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7041</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7042</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7051</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7052</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7053</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7057</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7058</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7060</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7071</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7076</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7077</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7091</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7092</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7201</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7202</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7204</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7205</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7207</a> | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7208</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7400</a> | 06T25178Y45 | RES,RK 39RF 1/4 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R7401</a> | 06T25178Y44 | RES,RK 36RF 1/4 -CP  |
| ERATO-P.W.Board |     |       | <a href="#">R7402</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7403</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7404</a> | 06S70072F53 | RES,CP .102-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7405</a> | 06S70072F53 | RES,CP .102-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7406</a> | 06S70072F53 | RES,CP .102-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7407</a> | 06S15615Y57 | RES,RK 222J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7408</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7409</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7410</a> | 06S70072F53 | RES,CP .102-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7411</a> | 06S70072F31 | RES,CP .121-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7412</a> | 06S45674W55 | RES,RK 821J 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7413</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7414</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7415</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7417</a> | 06S70072F29 | RES,CP .101-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7418</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7419</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7422</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7423</a> | 06S70072F29 | RES,CP .101-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7424</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7430</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7431</a> | 06S70072F53 | RES,CP .102-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7432</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7435</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">R7600</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7601</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7602</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7620</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7700</a> | 06S70072F78 | RES,CP .2R2-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7702</a> | 06S15593Y87 | RES,RK 393F 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7703</a> | 06S15593Y68 | RES,RK 622F 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7704</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7705</a> | 06S15594Y18 | RES,RK 684F 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7706</a> | 06S65415Y29 | RES,RK 222F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7707</a> | 06S65415Y29 | RES,RK 222F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7708</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7711</a> | 06S65415Y31 | RES,RK 332F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7712</a> | 06S65415Y31 | RES,RK 332F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7713</a> | 06S65415Y31 | RES,RK 332F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7714</a> | 06S65415Y31 | RES,RK 332F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7715</a> | 06S15615Y94 | RES,RK 753J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7716</a> | 06S15615Y77 | RES,RK 153J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7717</a> | 06S15615Y93 | RES,RK 683J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7718</a> | 06S15615Y85 | RES,RK 333J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7719</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7720</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7721</a> | 06S65415Y29 | RES,RK 222F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7722</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7723</a> | 06S65415Y37 | RES,RK 103F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7724</a> | 06-02713Z09 | RES,RK 272D 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7725</a> | 06S65415Y37 | RES,RK 103F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7726</a> | 06S65415Y28 | RES,RK 182F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7727</a> | 06S65415Y34 | RES,RK 562F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7728</a> | 06S65415Y34 | RES,RK 562F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7729</a> | 06S65415Y34 | RES,RK 562F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7730</a> | 06-02713Z16 | RES,RK 103D 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7731</a> | 06S65415Y35 | RES,RK 682F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7732</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7733</a> | 06S65415Y35 | RES,RK 682F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7734</a> | 06-02713Z12 | RES,RK 472D 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7735</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7736</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7737</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7738</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7739</a> | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7740</a> | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7741</a> | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7742</a> | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7743</a> | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7744</a> | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7745</a> | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-----|-------|------------------------|-------------|----------------------|
| ERATO-P.W.Board |     |       | <a href="#">R7746</a>  | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7747</a>  | 06S70072F78 | RES,CP .2R2-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7748</a>  | 06S70072F78 | RES,CP .2R2-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">R7749</a>  | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7750</a>  | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7751</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7752</a>  | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7753</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7754</a>  | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7755</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7756</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7757</a>  | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7758</a>  | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7759</a>  | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7760</a>  | 06S15615Y01 | RES,RK 10RJ 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7765</a>  | 06S15616Y30 | RES,RK 4R7J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7766</a>  | 06S15616Y24 | RES,RK 1R0J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7767</a>  | 06S15616Y27 | RES,RK 2R2J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7768</a>  | 06S15616Y24 | RES,RK 1R0J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7769</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7770</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7771</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7772</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7773</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7774</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7777</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7781</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7782</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7783</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7784</a>  | 06S75462Y02 | RES,RK R056F 1/4 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7785</a>  | 06S65415Y34 | RES,RK 562F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7786</a>  | 06S65415Y37 | RES,RK 103F 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7795</a>  | 06S45674W47 | RES,RK 391J 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7796</a>  | 06S15593Y33 | RES,RK 221F 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7797</a>  | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7798</a>  | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7799</a>  | 06S15593Y34 | RES,RK 241F 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7805</a>  | 06S45674W51 | RES,RK 561J 1/10 -CP |
| ERATO-P.W.Board |     |       | <a href="#">R7806</a>  | 06S70072F43 | RES,CP .391-J-1/4-CP |
| ERATO-P.W.Board |     |       | <a href="#">RA6000</a> | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| ERATO-P.W.Board |     |       | <a href="#">RA6001</a> | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| ERATO-P.W.Board |     |       | <a href="#">RA6002</a> | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| ERATO-P.W.Board |     |       | <a href="#">RA6003</a> | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| ERATO-P.W.Board |     |       | <a href="#">RA6004</a> | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| ERATO-P.W.Board |     |       | <a href="#">RA6005</a> | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| ERATO-P.W.Board |     |       | <a href="#">RA6006</a> | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| ERATO-P.W.Board |     |       | <a href="#">RA6007</a> | 06S15771Y41 | RES,ARYEXB28V223J-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                                 | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-------------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6008</a> | 06S15771Y41 | RES,ARYEXB28V223J-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6009</a> | 06S15771Y41 | RES,ARYEXB28V223J-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6010</a> | 06S15771Y41 | RES,ARYEXB28V223J-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6200</a> | 06S15771Y41 | RES,ARYEXB28V223J-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6201</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6202</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6400</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6401</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6402</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6403</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6404</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6405</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6406</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6407</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6408</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6409</a> | 06S15771Y10 | RES,ARYEXB28V56RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6410</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6411</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6700</a> | 06S15771Y41 | RES,ARYEXB28V223J-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6701</a> | 06S15771Y41 | RES,ARYEXB28V223J-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6702</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6703</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA6704</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">RA7600</a> | 06S15771Y41 | RES,ARYEXB28V223J-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">SD7700</a> | 48-07511Z01 | DIO,SHT CRS12-L -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">SD7701</a> | 48-07511Z01 | DIO,SHT CRS12-L -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">SD7702</a> | 48-07511Z01 | DIO,SHT CRS12-L -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">SD7703</a> | 48-07511Z01 | DIO,SHT CRS12-L -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">SD7704</a> | 48-20962Z01 | DIO,SHT DB2440400LE1 |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">SD7705</a> | 48-20962Z01 | DIO,SHT DB2440400LE1 |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">SD7706</a> | 48-20962Z01 | DIO,SHT DB2440400LE1 |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">SD7707</a> | 48-20962Z01 | DIO,SHT DB2440400LE1 |
| ERATO-P.W.Board |  |       | <a href="#">SK7400</a> | 09-12732Z02 | SKT,GT17H-4P-2H(B)EF |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">XL6400</a> | 91-17642Z09 | XTL,NX3225SA 27.0-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">XL6401</a> | 91-17642Z10 | XTL,NX3225SA 33.0-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">XL6402</a> | 91-17642Z07 | XTL,NX3225SA 24NS-CP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">Z6000</a>  | 91T15509Y07 | EMI,BK1608HM601 -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">Z6400</a>  | 91T15509Y07 | EMI,BK1608HM601 -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">Z6401</a>  | 91T15509Y07 | EMI,BK1608HM601 -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">Z7400</a>  | 91T75196Y01 | EMI,BK1005HM102 -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">Z7401</a>  | 91-18210Z01 | EMI,EXC24CE900U -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">Z7402</a>  | 91T15509Y08 | EMI,BK1608HM102 -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">Z7403</a>  | 91T15509Y08 | EMI,BK1608HM102 -CP  |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">ZD6200</a> | 48-21149Z23 | DIO,ZEN DZ2J056M0LCP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">ZD6201</a> | 48-21149Z23 | DIO,ZEN DZ2J056M0LCP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">ZD6202</a> | 48-21149Z23 | DIO,ZEN DZ2J056M0LCP |
| ERATO-P.W.Board |                                                                                     |       | <a href="#">ZD7402</a> | 48-21149Z23 | DIO,ZEN DZ2J056M0LCP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board         | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-------------------|-----|-------|------------------------|-------------|----------------------|
| ERATO-P.W.Board   |     |       | <a href="#">ZD7403</a> | 48-21149Z23 | DIO,ZEN DZ2J056M0LCP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4003</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4004</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4005</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4006</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4007</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4008</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4009</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4010</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4011</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4012</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4013</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4014</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4015</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4016</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4017</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4018</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4019</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4020</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4022</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4100</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4101</a>  | 08-16834Z01 | CAP,CER 104KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4102</a>  | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4103</a>  | 08S45677W50 | CAP,CER 391J-CH1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4104</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4105</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4106</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4107</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4108</a>  | 08S65676Y09 | CAP,CER 475KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4109</a>  | 08S65676Y09 | CAP,CER 475KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4111</a>  | 08S65676Y09 | CAP,CER 475KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4112</a>  | 08S45676W91 | CAP,CER 154K-B1A -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4113</a>  | 08S35350Y03 | CAP,CER 224K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4114</a>  | 08S35349Y12 | CAP,CER 105K-B0J -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4115</a>  | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4116</a>  | 08S65670Y07 | CAP,CER 105KX5R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4117</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4118</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4119</a>  | 08S45231Y17 | CAP,CER 22RJ-CH1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4121</a>  | 08S65670Y07 | CAP,CER 105KX5R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4122</a>  | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4123</a>  | 08-16834Z01 | CAP,CER 104KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4124</a>  | 08-19309Z02 | CAP,CER 225KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4125</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4127</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4128</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4300</a>  | 08S45232Y05 | CAP,CER 102K-B1H -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board         | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-------------------|-----|-------|------------------------|-------------|----------------------|
| DISPLAY-P.W.Board |     |       | <a href="#">C4301</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4303</a>  | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4304</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4305</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4306</a>  | 08S65128F88 | CAP,CER 104K-B1H -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4307</a>  | 08S65128F88 | CAP,CER 104K-B1H -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4308</a>  | 08S65128F88 | CAP,CER 104K-B1H -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4309</a>  | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4310</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4311</a>  | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4312</a>  | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4313</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4500</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4501</a>  | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4505</a>  | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4506</a>  | 08S65669Y03 | CAP,CER 224KX7R1H-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4507</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4508</a>  | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4509</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4510</a>  | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4511</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">C4512</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">CB4000</a> | 09-16224Z03 | FFC,FH28-60S-0.5SHEZ |
| DISPLAY-P.W.Board |     |       | <a href="#">CB4001</a> | 09-17467Z02 | BTB,DY01-090S-BTN-EJ |
| DISPLAY-P.W.Board |     |       | <a href="#">CB4100</a> | 09-05352Z05 | FFC,52271-0869 -E9   |
| DISPLAY-P.W.Board |     |       | <a href="#">CB4300</a> | 09-05352Z01 | FFC,52271-0469 -E9   |
| DISPLAY-P.W.Board |     |       | <a href="#">CB4301</a> | 09-14451Z06 | FFC,502790-3091 -ED  |
| DISPLAY-P.W.Board |     |       | <a href="#">D4100</a>  | 48T25665Y01 | DIO,1SS355-TE17 -CP  |
| DISPLAY-P.W.Board |     |       | <a href="#">E4100</a>  | 23-12290Z19 | CAP,FP 47R-1C-D -E6  |
| DISPLAY-P.W.Board |     |       | <a href="#">E4101</a>  | 23-12290Z18 | CAP,FP 22R-1C-C -E3  |
| DISPLAY-P.W.Board |     |       | <a href="#">E4102</a>  | 23T75543Y06 | CAP,MVA 22R-1CD55-E2 |
| DISPLAY-P.W.Board |     |       | <a href="#">E4103</a>  | 23S65134W45 | CAP,ELY 33R-1E(6)-E6 |
| DISPLAY-P.W.Board |     |       | <a href="#">E4104</a>  | 23T75543Y13 | CAP,MVA 22R-1EE55-E3 |
| DISPLAY-P.W.Board |     |       | <a href="#">E4105</a>  | 23T75543Y13 | CAP,MVA 22R-1EE55-E3 |
| DISPLAY-P.W.Board |     |       | <a href="#">E4106</a>  | 23S65134W44 | CAP,ELY 22R-1E(6)-E6 |
| DISPLAY-P.W.Board |     |       | <a href="#">E4108</a>  | 23T75543Y13 | CAP,MVA 22R-1EE55-E3 |
| DISPLAY-P.W.Board |     |       | <a href="#">E4300</a>  | 23S65134W34 | CAP,ELY 47R-1C(6)-E6 |
| DISPLAY-P.W.Board |     |       | <a href="#">E4301</a>  | 23T75543Y08 | CAP,MVA 101-1CF55-E6 |
| DISPLAY-P.W.Board |     |       | <a href="#">E4500</a>  | 23S65134W45 | CAP,ELY 33R-1E(6)-E6 |
| DISPLAY-P.W.Board |     |       | <a href="#">E4501</a>  | 23S65134W34 | CAP,ELY 47R-1C(6)-E6 |
| DISPLAY-P.W.Board |     |       | <a href="#">IC4000</a> | 51-01931Z01 | TC7SZ04FU-TE85L -CP  |
| DISPLAY-P.W.Board |     |       | <a href="#">IC4100</a> | 51-19210Z01 | TK61226AMQGH -SE6    |
| DISPLAY-P.W.Board |     |       | <a href="#">IC4101</a> | 51-14365Z01 | LT1946AEMS8E -SE2    |
| DISPLAY-P.W.Board |     |       | <a href="#">IC4102</a> | 51-05314Z01 | BA4560RFVM-TR -SE1   |
| DISPLAY-P.W.Board |     |       | <a href="#">IC4300</a> | 51T95150W01 | NJM78M05DLA-TE1 -NE5 |
| DISPLAY-P.W.Board |     |       | <a href="#">IC4301</a> | 51-19188Z01 | NJU6062V-TE1 -SE2    |
| DISPLAY-P.W.Board |     |       | <a href="#">IC4500</a> | 51T75516Y07 | BA15BC0FP-E2 -NE5    |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board         | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-------------------|-----|-------|------------------------|-------------|----------------------|
| DISPLAY-P.W.Board |     |       | <a href="#">IC4501</a> | 51-21593Z01 | UGZZC-B02A -NEL      |
| DISPLAY-P.W.Board |     |       | <a href="#">L4000</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">L4100</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">L4101</a>  | 24-02145Z06 | IND,NLCV32T 6R8M -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">L4102</a>  | 24-05548Z10 | IND,SLF7045-H22RM-E6 |
| DISPLAY-P.W.Board |     |       | <a href="#">L4103</a>  | 24-05548Z10 | IND,SLF7045-H22RM-E6 |
| DISPLAY-P.W.Board |     |       | <a href="#">L4104</a>  | 24-05548Z10 | IND,SLF7045-H22RM-E6 |
| DISPLAY-P.W.Board |     |       | <a href="#">L4105</a>  | 24-06212Z01 | FBI,BLM15AG601SH1-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">L4106</a>  | 24T95458W07 | FBI,BLM31PG601SH1-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">L4107</a>  | 24T95458W07 | FBI,BLM31PG601SH1-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">Q4100</a>  | 48T55462Y01 | TR,2SB1132-QR-100-E2 |
| DISPLAY-P.W.Board |     |       | <a href="#">Q4101</a>  | 48-13000Z05 | TR,LTC124EUBFS8-TLCP |
| DISPLAY-P.W.Board |     |       | <a href="#">Q4300</a>  | 48-13000Z04 | TR,LTC123JUBFS8-TLCP |
| DISPLAY-P.W.Board |     |       | <a href="#">Q4301</a>  | 48-13000Z06 | TR,LTC143XUBFS8-TLCP |
| DISPLAY-P.W.Board |     |       | <a href="#">Q4302</a>  | 48-13000Z04 | TR,LTC123JUBFS8-TLCP |
| DISPLAY-P.W.Board |     |       | <a href="#">Q4303</a>  | 48T94606F67 | TR,DTA123YUA-T106-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">Q4304</a>  | 48-12999Z05 | TR,LTA143XUBFS8-TLCP |
| DISPLAY-P.W.Board |     |       | <a href="#">Q4305</a>  | 48-12999Z04 | TR,LTA124EUBFS8-TLCP |
| DISPLAY-P.W.Board |     |       | <a href="#">Q4306</a>  | 48T94875F06 | DTB,113ZK-96 -CP     |
| DISPLAY-P.W.Board |     |       | <a href="#">R4000</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4001</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4004</a>  | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4005</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4006</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4007</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4008</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4009</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4010</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4011</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4012</a>  | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4013</a>  | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4014</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4015</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4016</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4017</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4018</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4019</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4020</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4021</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4022</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4023</a>  | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4024</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4025</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4027</a>  | 06S15593Y53 | RES,RK 152F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4028</a>  | 06S15593Y60 | RES,RK 302F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4029</a>  | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4030</a>  | 06S15593Y59 | RES,RK 272F 1/10 -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board         | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-------------------|-----|-------|-----------------------|-------------|----------------------|
| DISPLAY-P.W.Board |     |       | <a href="#">R4031</a> | 06S15593Y33 | RES,RK 221F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4032</a> | 06S15593Y13 | RES,RK 33RF 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4033</a> | 06S15593Y13 | RES,RK 33RF 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4034</a> | 06S15593Y05 | RES,RK 15RF 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4035</a> | 06S15593Y43 | RES,RK 561F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4036</a> | 06S45675W43 | RES,RK JUMPER1/10-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4037</a> | 06S15593Y55 | RES,RK 182F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4038</a> | 06S15593Y43 | RES,RK 561F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4039</a> | 06S15593Y61 | RES,RK 332F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4040</a> | 06S15593Y15 | RES,RK 39RF 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4041</a> | 06S15593Y47 | RES,RK 821F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4042</a> | 06S15593Y03 | RES,RK 12RF 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4043</a> | 06S15593Y43 | RES,RK 561F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4044</a> | 06S15593Y15 | RES,RK 39RF 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4045</a> | 06S15593Y37 | RES,RK 331F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4046</a> | 06S15593Y39 | RES,RK 391F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4047</a> | 06S15593Y31 | RES,RK 181F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4049</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4054</a> | 06S65415Y37 | RES,RK 103F 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4056</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4057</a> | 06S15615Y45 | RES,RK 681J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4058</a> | 06S15615Y17 | RES,RK 47RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4102</a> | 06S15615Y89 | RES,RK 473J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4103</a> | 06S15615Y82 | RES,RK 243J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4106</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4109</a> | 06S15593Y75 | RES,RK 123F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4110</a> | 06S35095Y08 | RES,RK JUMPER 1/4-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4111</a> | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4112</a> | 06S15593Y43 | RES,RK 561F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4113</a> | 06S15593Y83 | RES,RK 273F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4114</a> | 06S15594Y22 | RES,RK 105F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4115</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4116</a> | 06S15593Y97 | RES,RK 104F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4117</a> | 06S15593Y97 | RES,RK 104F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4118</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4119</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4120</a> | 06S15593Y50 | RES,RK 112F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4121</a> | 06S15593Y93 | RES,RK 683F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4122</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4123</a> | 06S45674W75 | RES,RK 562J 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4124</a> | 06S15593Y75 | RES,RK 123F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4125</a> | 06S15593Y77 | RES,RK 153F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4126</a> | 06S15593Y67 | RES,RK 562F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4127</a> | 06S15593Y66 | RES,RK 512F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4128</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4129</a> | 06S70072F47 | RES,CP .561-J-1/4-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4130</a> | 06S70072F47 | RES,CP .561-J-1/4-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board         | MIS | MODEL | Ref.                    | Parts No.   | Parts Name           |
|-------------------|-----|-------|-------------------------|-------------|----------------------|
| DISPLAY-P.W.Board |     |       | <a href="#">R4131</a>   | 06S70072F47 | RES,CP .561-J-1/4-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4132</a>   | 06S70072F47 | RES,CP .561-J-1/4-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4133</a>   | 06S55365Y78 | RES,RK 362J 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4300</a>   | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4301</a>   | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4302</a>   | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4304</a>   | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4305</a>   | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4306</a>   | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4311</a>   | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4314</a>   | 06S35083Y29 | RES,RK 222F 1/4 -CP  |
| DISPLAY-P.W.Board |     |       | <a href="#">R4315</a>   | 06S65415Y13 | RES,RK 101F 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4316</a>   | 06S35083Y49 | RES,RK 104F 1/4 -CP  |
| DISPLAY-P.W.Board |     |       | <a href="#">R4317</a>   | 06S35083Y08 | RES,RK 39RF 1/4 -CP  |
| DISPLAY-P.W.Board |     |       | <a href="#">R4318</a>   | 06S35083Y01 | RES,RK 10RF 1/4 -CP  |
| DISPLAY-P.W.Board |     |       | <a href="#">R4319</a>   | 06S65415Y13 | RES,RK 101F 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4320</a>   | 06S35083Y29 | RES,RK 222F 1/4 -CP  |
| DISPLAY-P.W.Board |     |       | <a href="#">R4321</a>   | 06S35083Y49 | RES,RK 104F 1/4 -CP  |
| DISPLAY-P.W.Board |     |       | <a href="#">R4322</a>   | 06S45674W57 | RES,RK 102J 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4323</a>   | 06S45674W33 | RES,RK 101J 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4324</a>   | 06S35083Y84 | RES,RK 51RF 1/4 -CP  |
| DISPLAY-P.W.Board |     |       | <a href="#">R4325</a>   | 06S15593Y94 | RES,RK 753F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4326</a>   | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4327</a>   | 06S70072F29 | RES,CP .101-J-1/4-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4328</a>   | 06S70072F29 | RES,CP .101-J-1/4-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4329</a>   | 06S45674W33 | RES,RK 101J 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4330</a>   | 06S15615Y69 | RES,RK 682J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4331</a>   | 06S15615Y69 | RES,RK 682J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4332</a>   | 06S15593Y27 | RES,RK 121F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4333</a>   | 06S15593Y29 | RES,RK 151F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4334</a>   | 06S15593Y27 | RES,RK 121F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4500</a>   | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4504</a>   | 06S15593Y93 | RES,RK 683F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4505</a>   | 06S15593Y67 | RES,RK 562F 1/10 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4507</a>   | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4508</a>   | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">R4511</a>   | 06S15615Y09 | RES,RK 22RJ 1/16 -CP |
| DISPLAY-P.W.Board |     |       | <a href="#">RA4000</a>  | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">RA4001</a>  | 06S15771Y13 | RES,ARYEXB28V101J-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">RA4002</a>  | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">RA4003</a>  | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">RA4500</a>  | 06S15771Y05 | RES,ARYEXB28V22RJ-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">SD4100</a>  | 48-16033Z01 | DIOSHT PMEG4010CEJCP |
| DISPLAY-P.W.Board |     |       | <a href="#">SD4101</a>  | 48-17988Z01 | DIO,SHT RB060M-60-CP |
| DISPLAY-P.W.Board |     |       | <a href="#">SD4102</a>  | 48-22179Z01 | DIO,SHT DB3X313F0LCP |
| DISPLAY-P.W.Board |     |       | <a href="#">SD4103</a>  | 48-22179Z01 | DIO,SHT DB3X313F0LCP |
| DISPLAY-P.W.Board |     |       | <a href="#">TML4001</a> | 29T45687Y02 | OG-363040 -E5        |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board          | MIS | MODEL | Ref.                    | Parts No.   | Parts Name           |
|--------------------|-----|-------|-------------------------|-------------|----------------------|
| DISPLAY-P.W.Board  |     |       | <a href="#">TML4003</a> | 29T45687Y02 | OG-363040 -E5        |
| DISPLAY-P.W.Board  |     |       | <a href="#">TML4005</a> | 29T45687Y02 | OG-363040 -E5        |
| DISPLAY-P.W.Board  |     |       | <a href="#">TML4007</a> | 29T45687Y02 | OG-363040 -E5        |
| DISPLAY-P.W.Board  |     |       | <a href="#">TML4009</a> | 29T45687Y02 | OG-363040 -E5        |
| DISPLAY-P.W.Board  |     |       | <a href="#">Z4000</a>   | 91T75196Y18 | EMI,BK1005HM601 -CP  |
| DISPLAY-P.W.Board  |     |       | <a href="#">Z4001</a>   | 91-16521Z02 | EMI,NFL21SP506X1C-CP |
| DISPLAY-P.W.Board  |     |       | <a href="#">Z4100</a>   | 91T75197Y01 | EMI,ACM4532-801 -E2  |
| DISPLAY-P.W.Board  |     |       | <a href="#">Z4500</a>   | 91T75196Y08 | EMI,BK1005HW601 -CP  |
| DISPLAY-P.W.Board  |     |       | <a href="#">Z4501</a>   | 91T75196Y08 | EMI,BK1005HW601 -CP  |
| DISPLAY-P.W.Board  |     |       | <a href="#">ZD4100</a>  | 48-06525Z23 | DIO,ZEN UDZS 18B -CP |
| DISPLAY-P.W.Board  |     |       | <a href="#">ZD4300</a>  | 48-06525Z11 | DIO,ZEN UDZS 5.6B-CP |
| DISPLAY-P.W.Board  |     |       | <a href="#">ZD4301</a>  | 48-06525Z11 | DIO,ZEN UDZS 5.6B-CP |
| DISPLAY-P.W.Board  |     |       | <a href="#">ZD4302</a>  | 48-06525Z11 | DIO,ZEN UDZS 5.6B-CP |
| DISPLAY-P.W.Board  |     |       | <a href="#">ZD4303</a>  | 48-06525Z11 | DIO,ZEN UDZS 5.6B-CP |
| DISPLAY-P.W.Board  |     |       | <a href="#">ZD4304</a>  | 48-06525Z11 | DIO,ZEN UDZS 5.6B-CP |
| DISPLAY-P.W.Board  |     |       | <a href="#">ZD4305</a>  | 48-06525Z11 | DIO,ZEN UDZS 5.6B-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3850</a>   | 08S45231Y05 | CAP,CER 2R0C-CK1H-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3851</a>   | 08S45677W04 | CAP,CER.2R0C-CH1H-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3852</a>   | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3853</a>   | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3854</a>   | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3855</a>   | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3856</a>   | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3857</a>   | 08S65668Y05 | CAP,CER 224KX5R1A-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3858</a>   | 08S65668Y05 | CAP,CER 224KX5R1A-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3859</a>   | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3860</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3861</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3862</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3863</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3864</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3865</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3866</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3867</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3868</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3869</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3870</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3871</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3872</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3873</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3874</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3875</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3876</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3877</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3878</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3879</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3880</a>   | 08S45232Y21 | CAP,CER 104K-B1A-CP  |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board          | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|--------------------|-----|-------|------------------------|-------------|----------------------|
| HD.RADIO-P.W.Board |     |       | <a href="#">C3881</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3882</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3883</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3884</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3885</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3886</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3887</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3888</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3889</a>  | 08S65667Y05 | CAP,CER 105KX5R1A-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3890</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3891</a>  | 08S65667Y05 | CAP,CER 105KX5R1A-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3892</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3893</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3894</a>  | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3895</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3896</a>  | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3897</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3898</a>  | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3899</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3900</a>  | 06S45674W53 | RES,RK 681J 1/10 -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3901</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3902</a>  | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3903</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3904</a>  | 08S45676W93 | CAP,CER 224K-B1A -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3905</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3906</a>  | 08S65676Y08 | CAP,CER 106K-X7R1ACP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3907</a>  | 08S65676Y02 | CAP,CER 475KX7R1A-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3908</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3909</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3910</a>  | 08S45232Y21 | CAP,CER 104K-B1A-CP  |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3911</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">C3912</a>  | 08S45231Y38 | CAP,CER 102J-CH1E-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">CB3850</a> | 09-19687Z01 | PIN,IMSA9210B-20Z-DB |
| HD.RADIO-P.W.Board |     |       | <a href="#">E3850</a>  | 23-09405Z06 | CAP,CX 391-0D -E2    |
| HD.RADIO-P.W.Board |     |       | <a href="#">E3851</a>  | 23-09405Z12 | CAP,CX 151-0J -E2    |
| HD.RADIO-P.W.Board |     |       | <a href="#">E3852</a>  | 23-09405Z12 | CAP,CX 151-0J -E2    |
| HD.RADIO-P.W.Board |     |       | <a href="#">IC3850</a> | 51-04432Z03 | BD12KA5FP-E2 -NE5    |
| HD.RADIO-P.W.Board |     |       | <a href="#">IC3851</a> | 51-17563Z02 | SAF3560HV/V1100 -QT  |
| HD.RADIO-P.W.Board |     |       | <a href="#">IC3852</a> | 83-22687Z65 | V5.001G500MHD RADIO  |
| HD.RADIO-P.W.Board |     |       | <a href="#">IC3853</a> | 51-13063Z01 | MT48LC4M16A2P7EIT-ST |
| HD.RADIO-P.W.Board |     |       | <a href="#">L3850</a>  | 24T95456W11 | FBI,BLM18AG601SH1-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">L3851</a>  | 24T95456W31 | FBI,BLM18PG471SH1-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">L3852</a>  | 24T95456W01 | FBI,BLM18PG300SH1-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">L3853</a>  | 24T95456W01 | FBI,BLM18PG300SH1-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">L3854</a>  | 24T95456W01 | FBI,BLM18PG300SH1-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">L3855</a>  | 24T95456W31 | FBI,BLM18PG471SH1-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3850</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board          | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|--------------------|-----|-------|------------------------|-------------|----------------------|
| HD.RADIO-P.W.Board |     |       | <a href="#">R3851</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3854</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3855</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3856</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3857</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3858</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3860</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3861</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3862</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3863</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3864</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3865</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3866</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3867</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3868</a>  | 06S65415Y37 | RES,RK 103F 1/16 -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3869</a>  | 06S65415Y37 | RES,RK 103F 1/16 -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3870</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3871</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3872</a>  | 06S65415Y37 | RES,RK 103F 1/16 -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3873</a>  | 06S65415Y37 | RES,RK 103F 1/16 -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3874</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3875</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3876</a>  | 06S65415Y31 | RES,RK 332F 1/16 -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3877</a>  | 06S65415Y31 | RES,RK 332F 1/16 -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3878</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3879</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3880</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3881</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3882</a>  | 06S65415Y09 | RES,RK 47RF 1/16 -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3883</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3884</a>  | 06S65415Y09 | RES,RK 47RF 1/16 -CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3885</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3886</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">R3887</a>  | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">RA3850</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">RA3851</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">RA3852</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">RA3853</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">RA3854</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">RA3855</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">RA3856</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">RA3857</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">RA3858</a> | 06S15771Y62 | RES,ARYEXB28VR000-CP |
| HD.RADIO-P.W.Board |     |       | <a href="#">XL3850</a> | 91-17642Z15 | XTL,NX3225SA 28.2-CP |
| KEY-P.W.Board      |     |       | <a href="#">C100</a>   | 08S35349Y12 | CAP,CER 105K-B0J -CP |
| KEY-P.W.Board      |     |       | <a href="#">C101</a>   | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| KEY-P.W.Board      |     |       | <a href="#">C102</a>   | 08S35349Y17 | CAP,CER 225K-B0J -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board     | MIS                                                                                 | MODEL | Ref.                  | Parts No.   | Parts Name           |
|---------------|-------------------------------------------------------------------------------------|-------|-----------------------|-------------|----------------------|
| KEY-P.W.Board |                                                                                     |       | <a href="#">C111</a>  | 08S45231Y28 | CAP,CER 181J-CH1H-CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">C112</a>  | 08S45231Y28 | CAP,CER 181J-CH1H-CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">C114</a>  | 08S45231Y28 | CAP,CER 181J-CH1H-CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">C115</a>  | 08S45231Y28 | CAP,CER 181J-CH1H-CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">C116</a>  | 08S45231Y28 | CAP,CER 181J-CH1H-CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">C117</a>  | 08S45231Y28 | CAP,CER 181J-CH1H-CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">C118</a>  | 08S45231Y28 | CAP,CER 181J-CH1H-CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">IC100</a> | 51-20270Z01 | PNJ4K01F -CP         |
| KEY-P.W.Board |                                                                                     |       | <a href="#">IC101</a> | 51-11988Z01 | RPMS1381-H19-E4A-NE5 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">LD100</a> | 48-15438Z02 | LED,R/G/B NSSM038AE1 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">LD101</a> | 48-11867Z01 | LED,WHT SMLE12WBC7CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">LD102</a> | 48-11867Z01 | LED,WHT SMLE12WBC7CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">LD104</a> | 48-11867Z01 | LED,WHT SMLE12WBC7CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">LD105</a> | 48-11867Z01 | LED,WHT SMLE12WBC7CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">LD106</a> | 48-11867Z01 | LED,WHT SMLE12WBC7CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">LD107</a> | 48-11867Z01 | LED,WHT SMLE12WBC7CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">LD108</a> | 48-11867Z01 | LED,WHT SMLE12WBC7CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R100</a>  | 06S45674W91 | RES,RK 273J 1/10 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R101</a>  | 06S45674W79 | RES,RK 822J 1/10 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R102</a>  | 06S45674W79 | RES,RK 822J 1/10 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R103</a>  | 06S45674W71 | RES,RK 392J 1/10 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R104</a>  | 06S45674W71 | RES,RK 392J 1/10 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R105</a>  | 06S45674W67 | RES,RK 272J 1/10 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R106</a>  | 06S45674W67 | RES,RK 272J 1/10 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R107</a>  | 06S45674W25 | RES,RK 47RJ 1/10 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R108</a>  | 06S65415Y61 | RES,RK 105F 1/16 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R109</a>  | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">R110</a>  | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">SW100</a> | 40-19315Z01 | SW,TACT SKSDPCE010E2 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">SW101</a> | 40-14849Z02 | SW,TACT SKRBACE010E2 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">SW102</a> | 40-14849Z02 | SW,TACT SKRBACE010E2 |
| KEY-P.W.Board |  |       | <a href="#">SW103</a> | 40-14849Z02 | SW,TACT SKRBACE010E2 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">SW104</a> | 40-14849Z02 | SW,TACT SKRBACE010E2 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">SW105</a> | 40-14849Z02 | SW,TACT SKRBACE010E2 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">SW106</a> | 40-14849Z02 | SW,TACT SKRBACE010E2 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">SW107</a> | 40-14849Z02 | SW,TACT SKRBACE010E2 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">SW108</a> | 40-14849Z02 | SW,TACT SKRBACE010E2 |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD101</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD102</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD104</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD105</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD106</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD107</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD108</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD111</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD112</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |
| KEY-P.W.Board |                                                                                     |       | <a href="#">ZD113</a> | 48-01607Z08 | DIO,ZEN LUDZ3.9B -CP |

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board     | MIS                                                                               | MODEL | Ref.                    | Parts No.   | Parts Name           |
|---------------|-----------------------------------------------------------------------------------|-------|-------------------------|-------------|----------------------|
| ESC-P.W.Board |                                                                                   |       | <a href="#">CB5000</a>  | 09-06714Z02 | BTB,DY01-120S-BT -EZ |
| ESC-P.W.Board |                                                                                   |       | <a href="#">CB5001</a>  | 09-06714Z02 | BTB,DY01-120S-BT -EZ |
| ESC-P.W.Board |                                                                                   |       | <a href="#">TML5000</a> | 29T45687Y01 | CONTACT,OG363050 -E5 |
| ESC-P.W.Board |                                                                                   |       | <a href="#">TML5001</a> | 29T45687Y01 | CONTACT,OG363050 -E5 |
| Miscellaneous |  |       | <a href="#">ET4300</a>  | 40-23476Z01 | ASSY,EMU601G2A629    |
| Miscellaneous |  |       | <a href="#">LCD4000</a> | 65-19540Z02 | ASSY,C070VW06 V0     |
| Miscellaneous |  |       | <a href="#">M7700</a>   | 59-14185Z02 | MOTOR,ASB0412MA-9F1B |

NOTE:The part that has not PART NUMBER will not be supplied.