




# Packing Method View

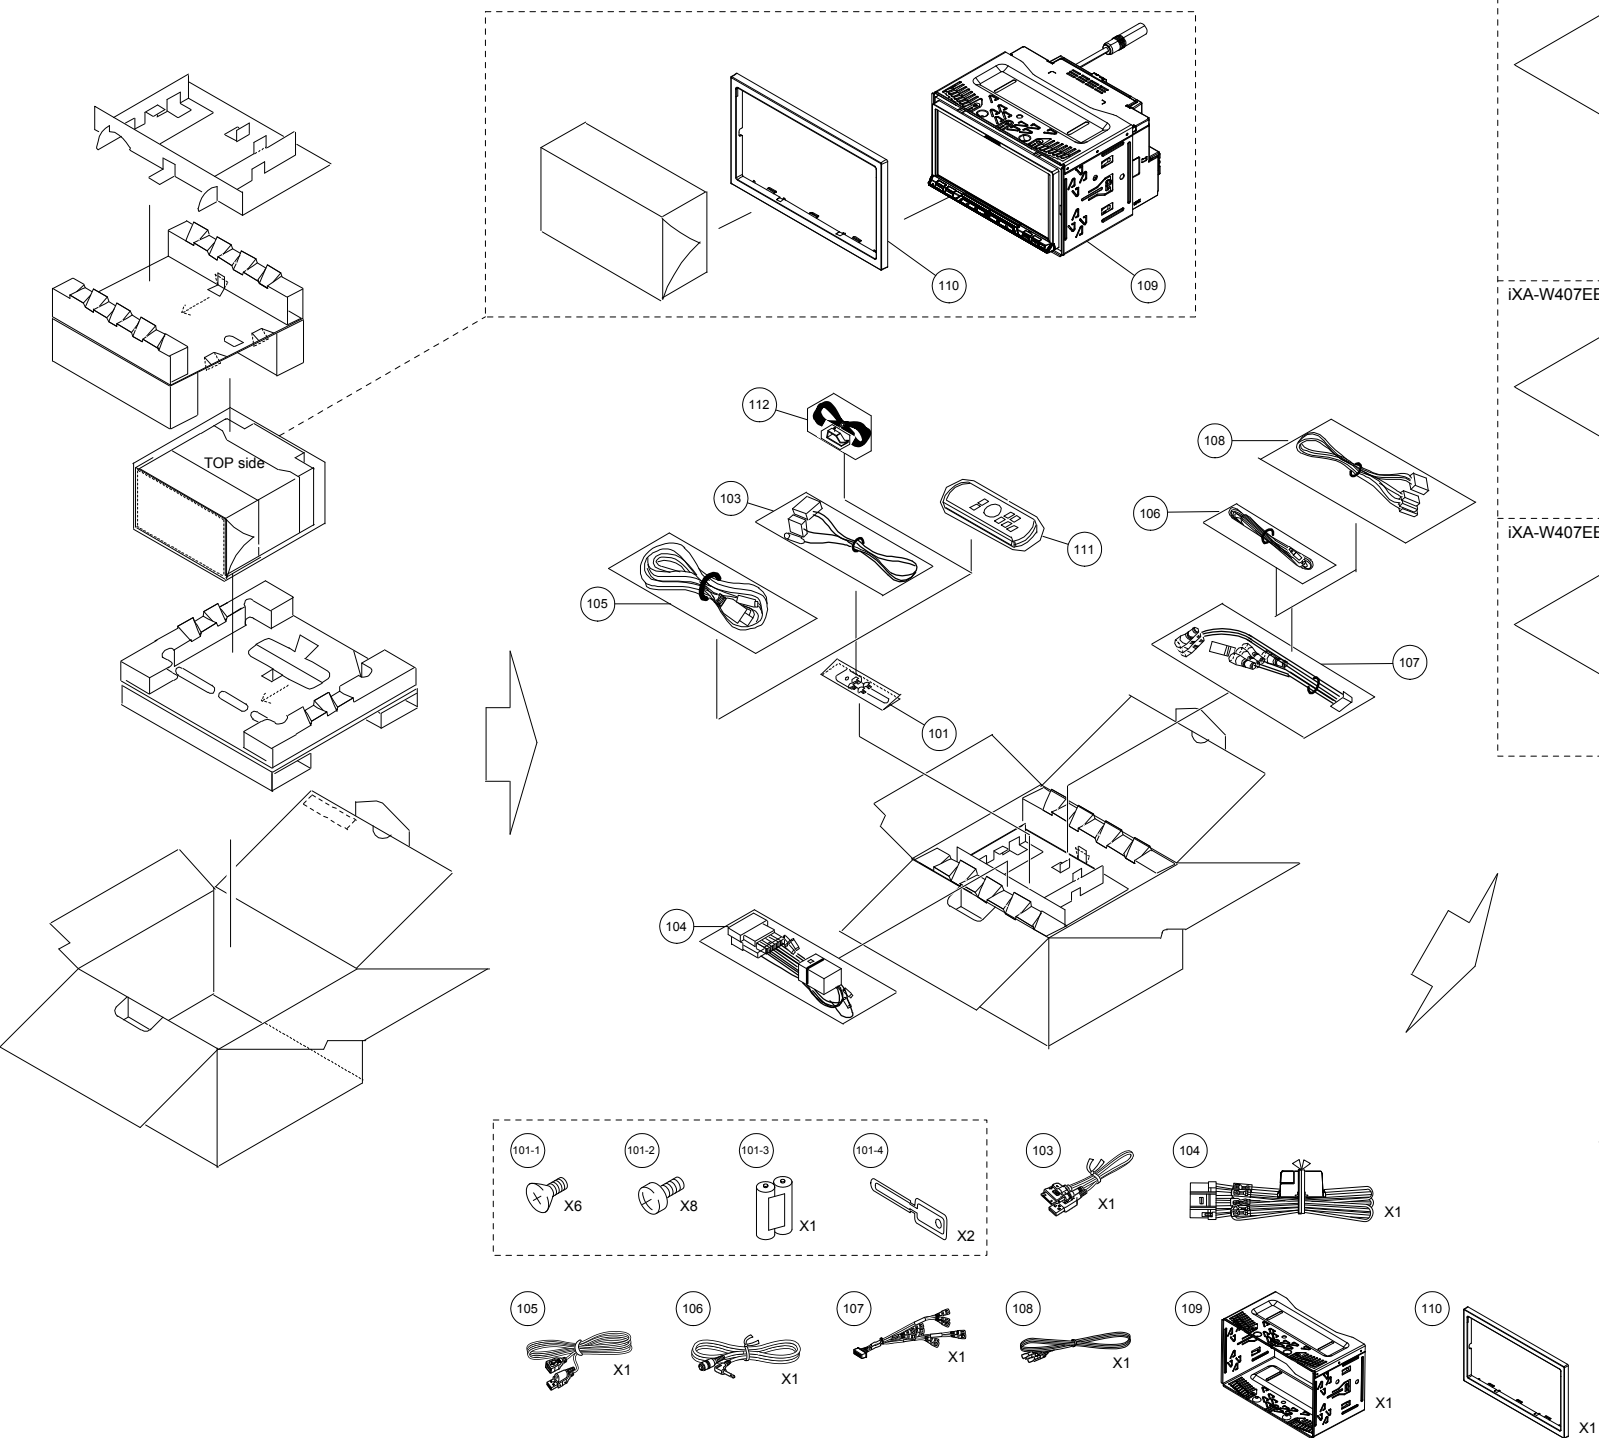



iXA-W407 Only

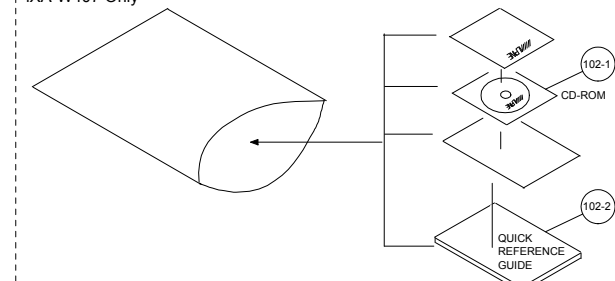

iXA-W407EBT (General Foreign) Only

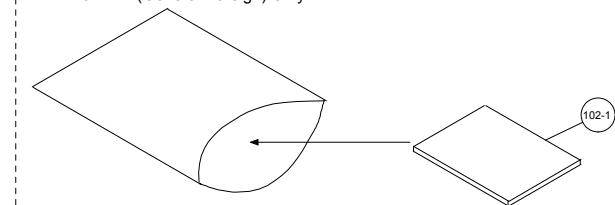

iXA-W407EBT (Chinese) Only

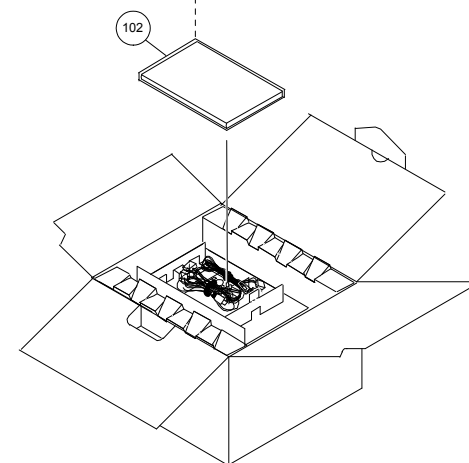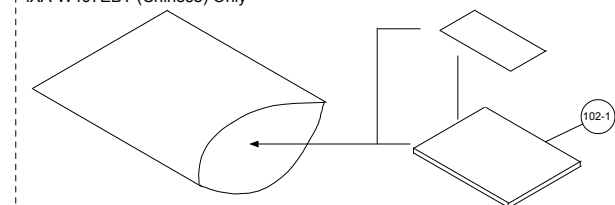

| MODEL | Symbol No.            | Parts No.   | Description         |
|-------|-----------------------|-------------|---------------------|
|       | <a href="#">101-1</a> | 03S60820Y16 | SCR,MCH 5X8 ZN A    |
|       | <a href="#">101-2</a> | 03S60820Y17 | SCR,MCH 5X8 ZN A    |
|       | <a href="#">101-3</a> | 60T55630W01 | BAT,MGN R03(NB)UM-4 |
|       | <a href="#">101-4</a> | 07-01964Z01 | BKT,RELEASE         |
| #1    | <a href="#">102-1</a> | 68-10334Z18 | O/M-CDROM 2DIN H    |
| \$1   | <a href="#">102-1</a> | 68-14470Z18 | O/M AAO AOTA        |
| %1    | <a href="#">102-1</a> | 68-14470Z19 | O/M AOCH AOTA       |
| #1    | <a href="#">102-2</a> | 68-14470Z25 | C/N-QRG AOAM AOTA   |
|       | <a href="#">103</a>   | 09-12482Z02 | ASSY,ANID-0077-02A  |
| #1    | <a href="#">104</a>   | 09-12300Z01 | ASSY,ANIC-0035-01A  |
| \$1   | <a href="#">104</a>   | 09-12300Z02 | ASSY,ANIC-0035-02A  |
| %1    | <a href="#">104</a>   | 09-12300Z02 | ASSY,ANIC-0035-02A  |
|       | <a href="#">105</a>   | 09-09243Z01 | ASSY,Z0607R         |
|       | <a href="#">106</a>   | 09-12484Z01 | ASSY,ANID-0079-01A  |
|       | <a href="#">107</a>   | 09-14727Z02 | ASSY,ANID-0097-02A  |
|       | <a href="#">108</a>   | 09-14613Z03 | ASSY,ANIC-0044-03A  |
|       | <a href="#">109</a>   | 15-05590Z01 | CASE,INNER          |
|       | <a href="#">110</a>   | 33-12546Z01 | FACE,PLATE          |
|       | <a href="#">111</a>   | 97-02291Z01 | ASSY,SBPF00001A     |
|       | <a href="#">112</a>   | 50-14386Z01 | ASSY,LYS-M9750-FUL  |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,


Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

# System Connection

(1) iXA-W407 Only

## Connections

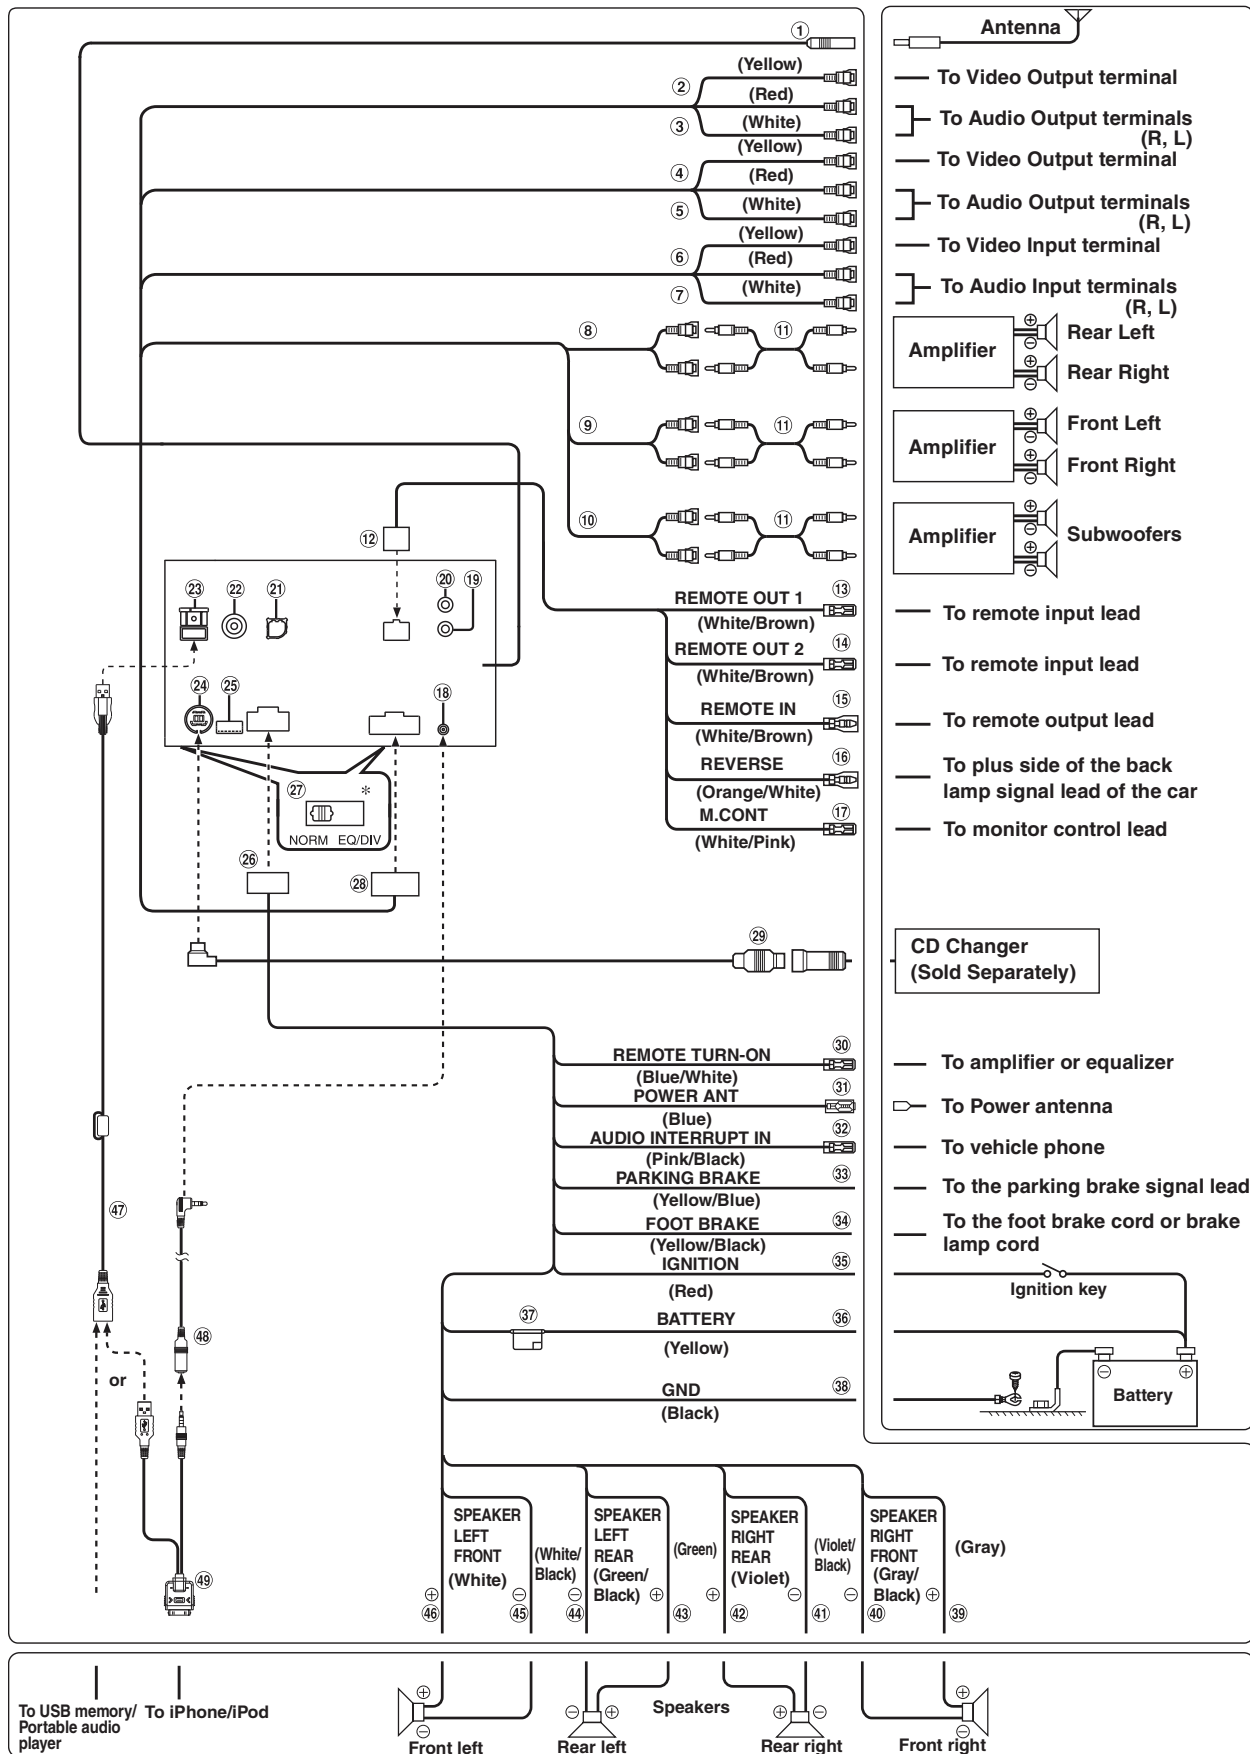


- Set the system switches to "NORM" when only a changer is connected (when the Ai-NET compatible equalizer is not used). When the IMPRINT audio processor is connected, set to EQ/DIV position.

\* The two system switches are located on the bottom of the unit.

- ① **Radio Antenna Receptacle**
- ② **Video Input Connector (AUX INPUT) (Yellow)**  
Input the video.
- ③ **Audio Input Connectors (AUX INPUT)**  
RED is right and WHITE is left input the audio.
- ④ **Video Input Connector (AUX INPUT) (Yellow)**  
Input the video.
- ⑤ **Audio Input Connectors (AUX INPUT)**  
RED is right and WHITE is left input the audio.
- ⑥ **Video Output Connector (AUX OUTPUT) (Yellow)**  
Output the video.
- ⑦ **Audio Output Connectors (AUX OUTPUT)**  
RED is right and WHITE is left output the audio.
- ⑧ **Rear Output/Input RCA Connectors**  
It can be used as Rear Output or Input RCA Connectors.
- ⑨ **Front Output/Input RCA Connectors**  
It can be used as Front Output or Input RCA Connectors.
- ⑩ **Subwoofer RCA Connectors**  
RED is right and WHITE is left.
- ⑪ **RCA Extension Cable (sold separately)**
- ⑫ **Remote IN/OUT Connector**
- ⑬ **Remote Control Output Lead (White/Brown)**  
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.
- ⑭ **Remote Control Output Lead (White/Brown)**  
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.
- ⑮ **Remote Control Input Lead (White/Brown)**  
Connect the external Alpine product to the remote control output lead.
- ⑯ **Reverse Lead (Orange/White)**  
Use only when a back-up camera is connected. Connect to the plus side of the car's reverse lamp. This lamp illuminates when the transmission is shifted into reverse (R).  
With this lead properly wired, the video picture automatically switches to the back-up camera whenever the car is put into reverse (R).
- ⑰ **Monitor Control Lead (White/Pink)**  
Connect this to the Monitor Control Lead of the touch panel-compatible rear monitor.
- ⑱ **iPod AUDIO/VIDEO Input Connector**  
Connect this to the AV extension cable.
- ⑲ **Steering Remote Control Interface Connector**  
To steering remote control interface box.  
For details about connections, consult your nearest Alpine dealer.
- ⑳ **MIC Input Connector**  
To Microphone (supplied).
- ㉑ **RGB Input Terminal**  
Connect this to the RGB output terminal of the Navigation System.
- ㉒ **CAMERA Input RCA Connector**  
Use when connecting a back-up camera with RCA Output Connector.
- ㉓ **USB Connector**
- ㉔ **Ai-NET Connector**  
Connect this to the output or input connector of another device (CD Changer, Equalizer, HD Radio™ TUNER MODULE, etc.) equipped with Ai-NET.

- You can input TV/video sound by connecting an optional Ai-NET/RCA Interface cable (KCA-121B) to this component.
  - Be sure to set "Setting the Connected Head Unit (MODEL SETUP)" to "DVD CHG", when the DHA-S690 is connected.
- ㉕ **Direct CAMERA Input Connector**  
Use when the optional rearview camera HCE-C107D is connected.
  - ㉖ **Power Supply Connector**
  - ㉗ **System Switches**  
When connecting an equalizer or divider using Ai-NET feature, place the two switches in the EQ/DIV position.  
When no device is connected, leave the switches in the NORM position.
  - Do not make the two switches to different settings.
  - Be sure to turn the power off to the unit before changing the switch position.
  - ㉘ **24 PIN pre-out/AUX-I/O Connector**
  - ㉙ **Ai-NET Cable (Included with CD Changer)**
  - ㉚ **Remote Turn-On Lead (Blue/White)**  
Connect this lead to the remote turn-on lead of your amplifier or signal processor.
  - ㉛ **Power Antenna Lead (Blue)**  
Connect this lead to the +B terminal of your power antenna, if applicable.
  - This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier or a signal processor, etc.
  - ㉜ **Audio Interrupt In Lead (Pink/Black)**
  - ㉝ **Parking Brake Lead (Yellow/Blue)**  
Connect this lead to the power supply side of the parking brake switch to transmit the parking brake status signals to the iXA-W407.
  - ㉞ **Foot Brake Lead (Yellow/Black)**  
Connect to the vehicle's foot brake lead or brake lamp lead.
  - ㉟ **Switched Power Lead (Ignition) (Red)**  
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+) 12V only when the ignition is turned on or in the accessory position.
  - ㊱ **Battery Lead (Yellow)**  
Connect this lead to the positive (+) post of the vehicle's battery.
  - ㊲ **Fuse Holder (10A)**
  - ㊳ **Ground Lead (Black)**  
Connect this lead to a good chassis ground on the vehicle.  
Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.
  - ㊴ **Right Front (+) Speaker Output Lead (Gray)**
  - ㊵ **Right Front (-) Speaker Output Lead (Gray/Black)**
  - ㊶ **Right Rear (-) Speaker Output Lead (Violet/Black)**
  - ㊷ **Right Rear (+) Speaker Output Lead (Violet)**
  - ㊸ **Left Rear (+) Speaker Output Lead (Green)**
  - ㊹ **Left Rear (-) Speaker Output Lead (Green/Black)**
  - ㊺ **Left Front (-) Speaker Output Lead (White/Black)**
  - ㊻ **Left Front (+) Speaker Output Lead (White)**
  - ㊼ **USB extension cable (Included)**
  - ㊽ **AV extension cable (Included)**
  - ㊾ **USB 30P cable (Included)**

**Connect the Ai-NET compatible audio processor (Fiber optic digital compatible), Navigation system, DVD player and changer.**

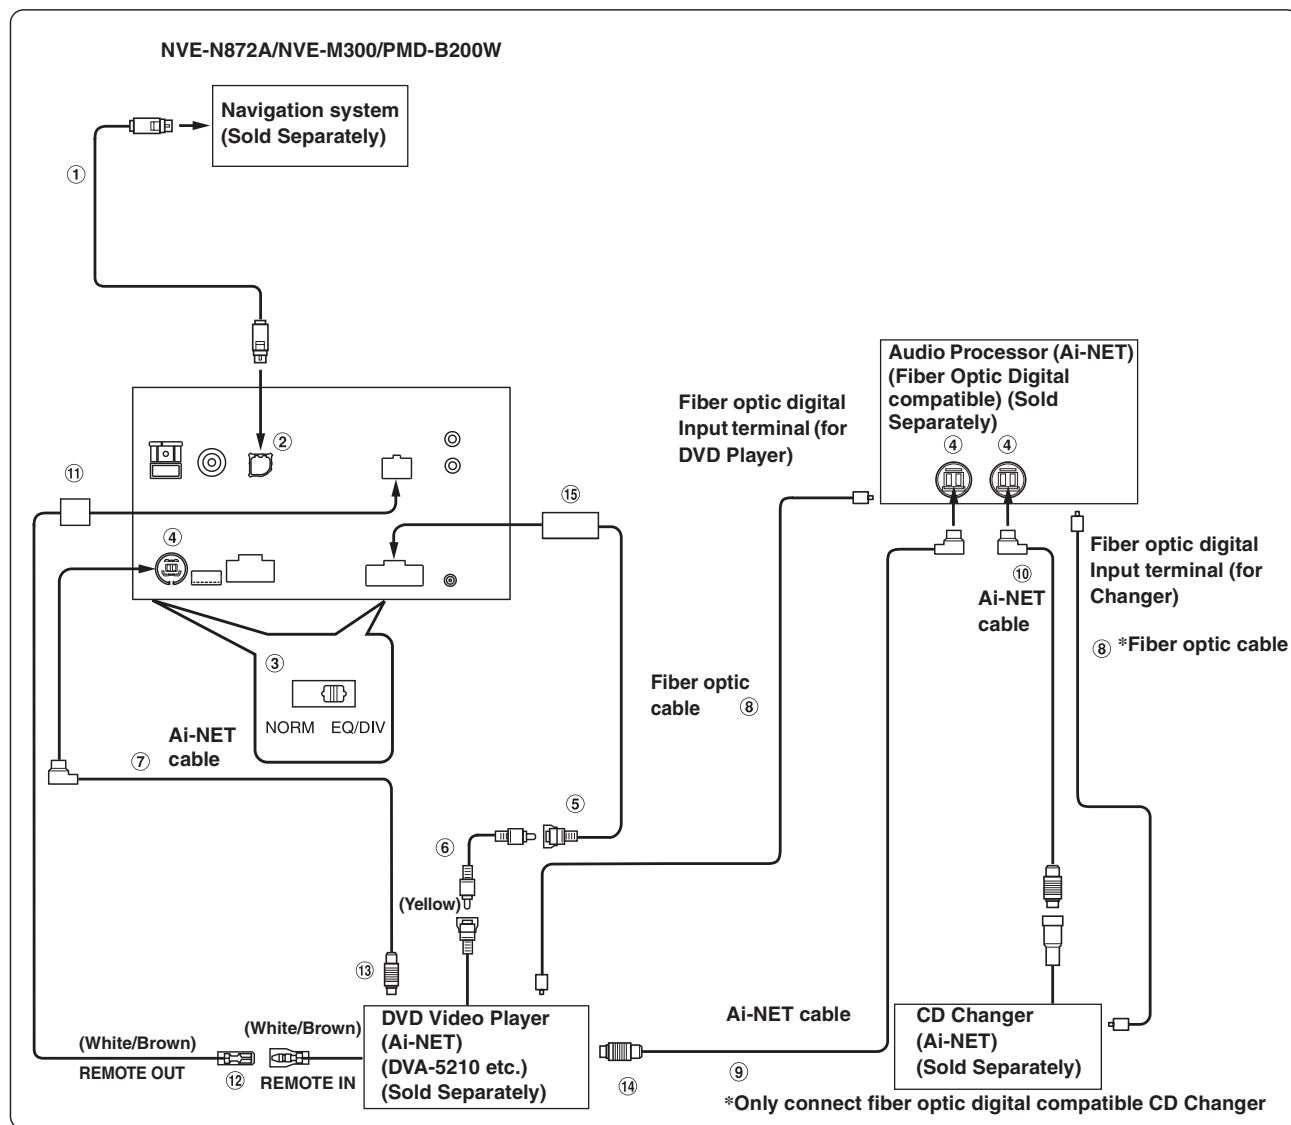


- When the NVA-N751AS is connected for the Navigation System, use the RGB conversion cable KWE-503N (Sold separately).

*Please observe the following when using Fiber Optic Cable (Optical Digital Cable).*

- *Do not coil the Fiber Optic Cable smaller than a 30 mm radius.*
- *Do not place anything on top of the Fiber Optic Cable.*
- *Be careful not to bend the Fiber Optic Cable at a sharp angle.*

- ① **RGB Cable (Included with Navigation)**
- ② **RGB Input Terminal**  
Connect this to the RGB output terminal of the Navigation System.
- ③ **System Switches**  
When connecting an equalizer or divider using Ai-NET feature, place the two switches in the EQ/DIV position. When no device is connected, leave the switches in the NORM position.
  - *Do not make the two switches to different settings.*
  - *Be sure to turn the power off to the unit before changing the switch position.*
- ④ **Ai-NET Connector**  
Connect this to the output or input connector of other product equipped with Ai-NET.
- ⑤ **Video Input Connector (AUX INPUT) (Yellow)**  
Connect the video output lead of a DVD video player or DVD changer to this terminal.
- ⑥ **RCA Extension Cable (Included with DVD video player)**
- ⑦ **Ai-NET Cable (Included with DVD video player)**
- ⑧ **Fiber Optic Cable (Sold Separately)**
- ⑨ **Ai-NET Cable (Included with Audio Processor)**
- ⑩ **Ai-NET Cable (Included with CD Changer)**
- ⑪ **Remote IN/OUT Connector**
- ⑫ **Remote Control Output Lead (White/Brown)**  
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.
- ⑬ **To Ai-NET Connector (Gray)**
- ⑭ **To Ai-NET Connector (Black)**
- ⑮ **24 PIN Pre-out/AUX I/O Connector**

## When Connecting External Equipment

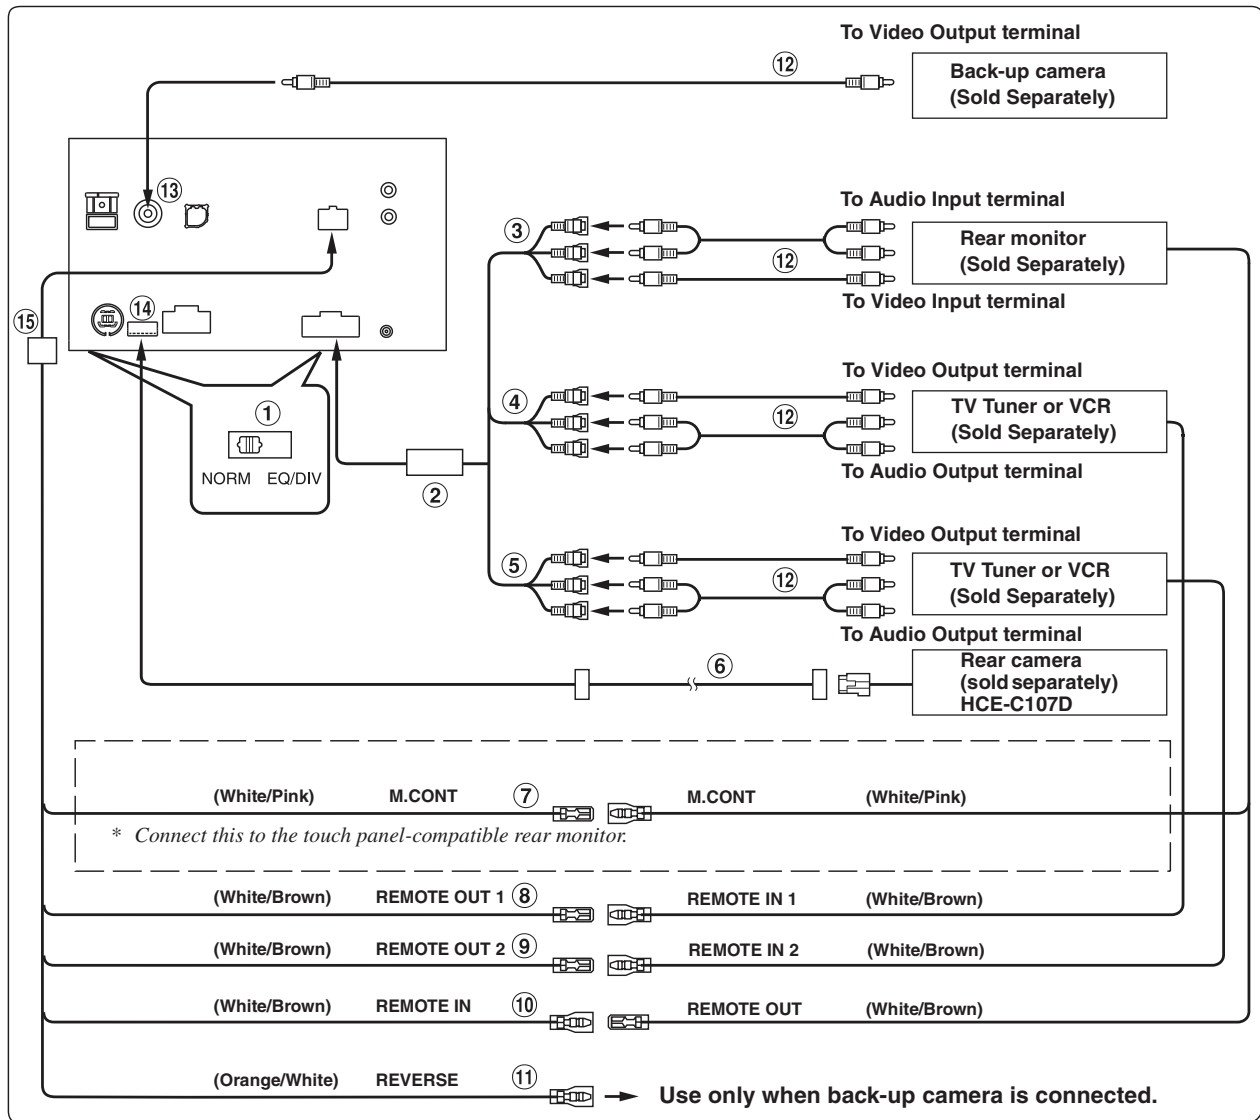

### ① System Switches

When connecting an equalizer or divider using Ai-NET feature, place the two switches in the EQ/DIV position. When no device is connected, leave the switches in the NORM position.

- Do not make the two switches to different settings.
- Be sure to turn the power off to the unit before changing the switch position.

### ② 24 PIN Pre-out/AUX I/O Connector

### ③ Video/Audio Output Connectors (AUX OUTPUT)

Use when connecting an optional monitor etc.

### ④ Video/Audio Input Connectors (AUX INPUT)

### ⑤ Video/Audio Input Connectors (AUX INPUT)

### ⑥ Camera extension cable (Included with Rear Camera (HCE-C107D))

### ⑦ Monitor Control Lead (White/Pink)

Connect this to the Monitor Control Lead of the touch panel-compatible rear monitor.

### ⑧ Remote Control Output Lead (White/Brown)

Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

### ⑨ Remote Control Output Lead (White/Brown)

Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

### ⑩ Remote Control Input Lead (White/Brown)

### ⑪ Reverse Lead (Orange/White)

Use only when a back-up camera is connected. Connect to the plus side of the car's reverse lamp. This lamp illuminates when the transmission is shifted into reverse (R). With this lead properly wired, the video picture automatically switches to the back-up camera whenever the car is put into reverse (R).

### ⑫ RCA Extension Cable (Sold Separately)

### ⑬ CAMERA Input RCA Connector

Use when connecting a back-up camera with RCA Output Connector.


### ⑭ Direct CAMERA Input Connector

Use when connecting a special rearview camera HCE-C107D is connected.

### ⑮ Remote IN/OUT Connector

## Extension Cable

\*Always connect the Extension Cable when making checks of voltage and repair.

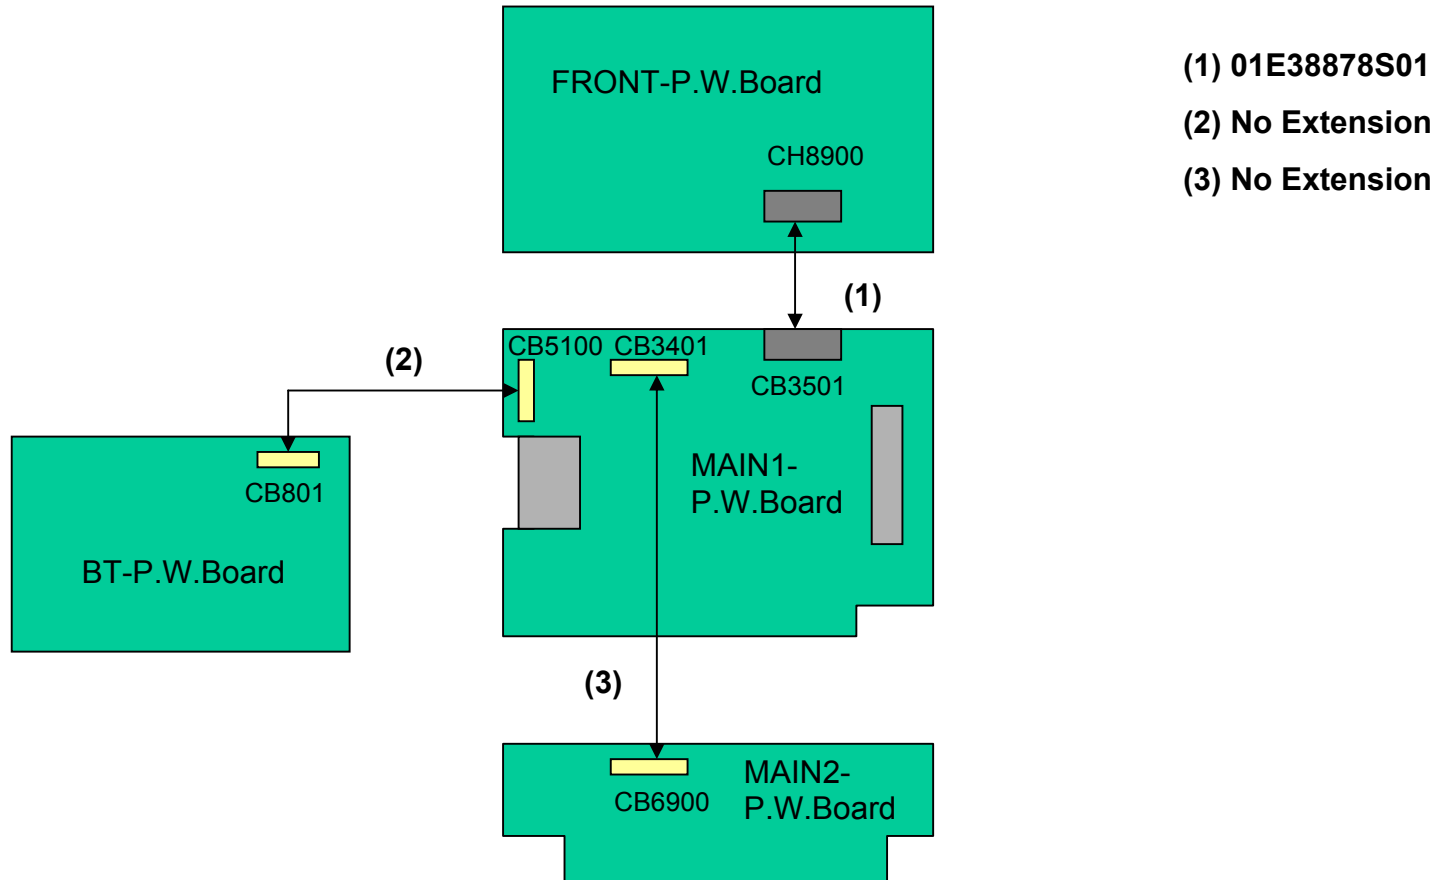

| P.W.Board       | MIS                                                                               | MODEL                   | Ref.        | Parts No. | Parts Name           |
|-----------------|-----------------------------------------------------------------------------------|-------------------------|-------------|-----------|----------------------|
| MAIN1-P.W.Board |  | <a href="#">ANT1001</a> | 09-06103Z01 |           | ASSY,ANID-0035-01A   |
| MAIN1-P.W.Board |                                                                                   | <a href="#">BZ5001</a>  | 50T04252K01 |           | BUZZER,XY13-5H       |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C1002</a>   | 08S45676W80 |           | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C1003</a>   | 08S45677W60 |           | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C1004</a>   | 08S82122F32 |           | CAP,CER.62RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C1005</a>   | 08S82122F27 |           | CAP,CER.39RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C1006</a>   | 08S82122F19 |           | CAP,CER.18RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2001</a>   | 08S45676W85 |           | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2002</a>   | 08S45677W20 |           | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2003</a>   | 08S45677W20 |           | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2004</a>   | 08S45677W20 |           | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2005</a>   | 08S45677W20 |           | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2006</a>   | 08S65674Y03 |           | CAP,CER 225KX5R1A-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2007</a>   | 08S65674Y03 |           | CAP,CER 225KX5R1A-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2008</a>   | 08S65674Y03 |           | CAP,CER 225KX5R1A-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2009</a>   | 08S65674Y03 |           | CAP,CER 225KX5R1A-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2010</a>   | 08S45677W20 |           | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2011</a>   | 08S45677W20 |           | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2012</a>   | 08S45677W20 |           | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2013</a>   | 08S45677W20 |           | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2014</a>   | 08S65674Y03 |           | CAP,CER 225KX5R1A-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2015</a>   | 08S65674Y03 |           | CAP,CER 225KX5R1A-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2016</a>   | 08S65674Y03 |           | CAP,CER 225KX5R1A-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2017</a>   | 08S65674Y03 |           | CAP,CER 225KX5R1A-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2018</a>   | 08S45676W73 |           | CAP,CER.103K-B1H -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2019</a>   | 08S45676W73 |           | CAP,CER.103K-B1H -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2020</a>   | 08S45676W80 |           | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2021</a>   | 08S45676W85 |           | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2022</a>   | 08S45676W85 |           | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2029</a>   | 08S45677W60 |           | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2030</a>   | 08S45677W60 |           | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2031</a>   | 08S45676W83 |           | CAP,CER 473K-B1C -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2034</a>   | 08S45676W80 |           | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2035</a>   | 08S65667Y01 |           | CAP,CER 224KX5R1C-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2036</a>   | 08S65667Y01 |           | CAP,CER 224KX5R1C-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2037</a>   | 08S65667Y01 |           | CAP,CER 224KX5R1C-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2038</a>   | 08S65667Y01 |           | CAP,CER 224KX5R1C-CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2039</a>   | 08S35349Y16 |           | CAP,CER 105K-B1A -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2040</a>   | 08S60102F40 |           | CAP,CER 224K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2041</a>   | 08S60102F40 |           | CAP,CER 224K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2042</a>   | 08S60102F48 |           | CAP,CER 105K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2043</a>   | 08S60102F48 |           | CAP,CER 105K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2044</a>   | 08S60102F48 |           | CAP,CER 105K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2045</a>   | 08S60102F48 |           | CAP,CER 105K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2046</a>   | 08S60102F48 |           | CAP,CER 105K-B1E -CP |
| MAIN1-P.W.Board |                                                                                   | <a href="#">C2047</a>   | 08S60102F48 |           | CAP,CER 105K-B1E -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN1-P.W.Board |     |       | <a href="#">C2048</a> | 08S65670Y04 | CAP,CER 475KX5R1E-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2049</a> | 08S65670Y04 | CAP,CER 475KX5R1E-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2050</a> | 08S65670Y04 | CAP,CER 475KX5R1E-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2051</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2052</a> | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2053</a> | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2061</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2062</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2063</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2064</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2065</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2066</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C2067</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN1-P.W.Board | #1  |       | <a href="#">C3001</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3002</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board | #1  |       | <a href="#">C3003</a> | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3004</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3005</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3101</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3201</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3202</a> | 08S45677W22 | CAP,CER.27RJ-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3203</a> | 08S45677W22 | CAP,CER.27RJ-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3204</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3301</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3302</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3303</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3304</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3305</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3306</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3307</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3308</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3309</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3310</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3311</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3312</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3313</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3314</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3315</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3316</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3317</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3318</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3319</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3320</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3321</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3322</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3323</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN1-P.W.Board |     |       | <a href="#">C3324</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3325</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3326</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3327</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3328</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3329</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3330</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3331</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3332</a> | 08S82122F45 | CAP,CER.221J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3333</a> | 08S82122F61 | CAP,CER.102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3334</a> | 08S82122F61 | CAP,CER.102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3335</a> | 08S65128F78 | CAP,CER.223K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3336</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3337</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3338</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3339</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3340</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3341</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3342</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3343</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3344</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3345</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3346</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3347</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3353</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3354</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C3355</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4001</a> | 08S65128F88 | CAP,CER 104K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4002</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4003</a> | 08S65128F88 | CAP,CER 104K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4004</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4005</a> | 08S65128F88 | CAP,CER 104K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4006</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4007</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4010</a> | 08S65667Y01 | CAP,CER 224KX5R1C-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4018</a> | 08T65463Y02 | CAP,CER 334K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4019</a> | 08S65128F88 | CAP,CER 104K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4101</a> | 08S35349Y17 | CAP,CER 225K-B0J -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4102</a> | 08S45676W69 | CAP,CER.472K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4103</a> | 08S45677W30 | CAP,CER.56RJ-CH1H-CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4106</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4108</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4201</a> | 08T65463Y02 | CAP,CER 334K-B1H -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4250</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4251</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |     |       | <a href="#">C4252</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                                 | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-------------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C4253</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C4303</a>  | 08T65463Y02 | CAP,CER 334K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C4402</a>  | 08S65128F90 | CAP,CER 473K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C4406</a>  | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C4407</a>  | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C4408</a>  | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C4409</a>  | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5000</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5001</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5002</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5003</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5004</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5005</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5006</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5007</a>  | 08S35374W01 | CAP,CER 104K-B1E-CP  |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5008</a>  | 08S65128F90 | CAP,CER 473K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5009</a>  | 08S45231Y34 | CAP,CER 24RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5010</a>  | 08S45231Y18 | CAP,CER 27RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5011</a>  | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5012</a>  | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5013</a>  | 08S35349Y11 | CAP,CER 223K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5014</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5015</a>  | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5016</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5017</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5020</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5021</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5022</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5023</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5024</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5025</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5026</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5027</a>  | 08S65128F78 | CAP,CER.223K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5028</a>  | 08T65463Y02 | CAP,CER 334K-B1H -CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5035</a>  | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">C5101</a>  | 08S65128F88 | CAP,CER 104K-B1H -CP |
| MAIN1-P.W.Board |  |       | <a href="#">CB2001</a> | 09-07665Z05 | WTB,S24B-PADSS-1 -DB |
| MAIN1-P.W.Board |  |       | <a href="#">CB3300</a> | 09-14579Z02 | WTB,S06B-PASK-2 -DB  |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">CB3401</a> | 09T75066Y60 | FFC,IMSA9634S-60Y-EZ |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">CB3501</a> | 09T75109Y60 | BTB,IMSA9828B-60Y-EK |
| MAIN1-P.W.Board |  |       | <a href="#">CB4401</a> | 09T35473Y16 | WTB,F169B001-16 -DB  |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">CB5100</a> | 09-01509Z06 | WTB,BM15B-GHS -ES    |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">D1001</a>  | 48T85357W01 | DIO,1PS226 -CP       |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">D2001</a>  | 48-07016Z01 | DIO,KDS181-RTK -CP   |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">D2002</a>  | 48-07016Z01 | DIO,KDS181-RTK -CP   |
| MAIN1-P.W.Board |                                                                                     |       | <a href="#">D2003</a>  | 48-07016Z01 | DIO,KDS181-RTK -CP   |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                               | MODEL | Ref.                    | Parts No.   | Parts Name           |
|-----------------|-----------------------------------------------------------------------------------|-------|-------------------------|-------------|----------------------|
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D2004</a>   | 48-06706Z01 | DIO,MA2J111-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D2005</a>   | 48-06706Z01 | DIO,MA2J111-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D3201</a>   | 48-06706Z01 | DIO,MA2J111-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D3202</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D3301</a>   | 48-07016Z01 | DIO,KDS181-RTK -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D4001</a>   | 48-07015Z01 | DIO,KDS160-RTK -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D4002</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D4003</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D4102</a>   | 48-07015Z01 | DIO,KDS160-RTK -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D4301</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D5001</a>   | 48-06706Z01 | DIO,MA2J111-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">D5002</a>   | 48-06706Z01 | DIO,MA2J111-TX -CP   |
| MAIN1-P.W.Board |  |       | <a href="#">DIN3201</a> | 09T55071W11 | CON,TCP9389-11 -DT   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E1000</a>   | 23S65134W53 | CAP,ELY 4R7-1V(4)-E2 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E1001</a>   | 23T65114Y20 | CAP,FK 101-1C-D -E6  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E1002</a>   | 23T65114Y20 | CAP,FK 101-1C-D -E6  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2000</a>   | 23T65114Y18 | CAP,FK 22R-1C-C -E3  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2003</a>   | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2004</a>   | 23S75244Y02 | CAP,ELY 47R-0J -E2   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2005</a>   | 23T65114Y23 | CAP,FK 471-1C-F -EA  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2006</a>   | 23S75244Y02 | CAP,ELY 47R-0J -E2   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2007</a>   | 23T65114Y32 | CAP,FK 4R7-1V-B -E2  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2008</a>   | 23T65114Y32 | CAP,FK 4R7-1V-B -E2  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2009</a>   | 23T65114Y32 | CAP,FK 4R7-1V-B -E2  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2010</a>   | 23T65114Y32 | CAP,FK 4R7-1V-B -E2  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2011</a>   | 23T65114Y32 | CAP,FK 4R7-1V-B -E2  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2012</a>   | 23T65114Y19 | CAP,FK 47R-1C-D -E6  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2013</a>   | 23T65114Y18 | CAP,FK 22R-1C-C -E3  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2014</a>   | 23T65114Y18 | CAP,FK 22R-1C-C -E3  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2017</a>   | 23S65134W52 | CAP,ELY 3R3-1V(3)-E2 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2018</a>   | 23S65134W52 | CAP,ELY 3R3-1V(3)-E2 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2019</a>   | 23S65134W52 | CAP,ELY 3R3-1V(3)-E2 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2020</a>   | 23S65134W52 | CAP,ELY 3R3-1V(3)-E2 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2021</a>   | 23S65134W52 | CAP,ELY 3R3-1V(3)-E2 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2022</a>   | 23S65134W52 | CAP,ELY 3R3-1V(3)-E2 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E2023</a>   | 23T65114Y18 | CAP,FK 22R-1C-C -E3  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3201</a>   | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3301</a>   | 23T65114Y26 | CAP,FK 22R-1E-C -E3  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3302</a>   | 23T65114Y10 | CAP,FK 22R-1A-B -E2  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3303</a>   | 23T65114Y10 | CAP,FK 22R-1A-B -E2  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3304</a>   | 23T65114Y01 | CAP,FK 47R-1E-D -E6  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3305</a>   | 23T65114Y26 | CAP,FK 22R-1E-C -E3  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3306</a>   | 23S65134W36 | CAP,ELY 221-1C(8)-EA |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3307</a>   | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3308</a>   | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">E3309</a>   | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-----|-------|------------------------|-------------|----------------------|
| MAIN1-P.W.Board |     |       | <a href="#">E3310</a>  | 23S65134W36 | CAP,ELY 221-1C(8)-EA |
| MAIN1-P.W.Board |     |       | <a href="#">E3311</a>  | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| MAIN1-P.W.Board |     |       | <a href="#">E3312</a>  | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| MAIN1-P.W.Board |     |       | <a href="#">E3313</a>  | 23-12290Z14 | CAP,FP 471-1A-F -EA  |
| MAIN1-P.W.Board |     |       | <a href="#">E4002</a>  | 23T65114Y18 | CAP,FK 22R-1C-C -E3  |
| MAIN1-P.W.Board |     |       | <a href="#">E4003</a>  | 23T65114Y15 | CAP,FK 681-1A-F -EA  |
| MAIN1-P.W.Board |     |       | <a href="#">E4004</a>  | 23T65114Y23 | CAP,FK 471-1C-F -EA  |
| MAIN1-P.W.Board |     |       | <a href="#">E4005</a>  | 23T65114Y19 | CAP,FK 47R-1C-D -E6  |
| MAIN1-P.W.Board |     |       | <a href="#">E4006</a>  | 23T65114Y33 | CAP,FK 10R-1V-C -E3  |
| MAIN1-P.W.Board |     |       | <a href="#">E4007</a>  | 23T65114Y33 | CAP,FK 10R-1V-C -E3  |
| MAIN1-P.W.Board |     |       | <a href="#">E4008</a>  | 23T65114Y02 | CAP,FK 221-1C-E -E6  |
| MAIN1-P.W.Board |     |       | <a href="#">E4009</a>  | 23T65114Y12 | CAP,FK 221-1A-D8-E6  |
| MAIN1-P.W.Board |     |       | <a href="#">E4102</a>  | 23T65114Y23 | CAP,FK 471-1C-F -EA  |
| MAIN1-P.W.Board |     |       | <a href="#">E4103</a>  | 23S65134W11 | CAP,ELY 22R-0J(4)-E2 |
| MAIN1-P.W.Board |     |       | <a href="#">E4104</a>  | 23S65134W36 | CAP,ELY 221-1C(8)-EA |
| MAIN1-P.W.Board |     |       | <a href="#">E4201</a>  | 23T65114Y02 | CAP,FK 221-1C-E -E6  |
| MAIN1-P.W.Board |     |       | <a href="#">E4302</a>  | 23S65134W36 | CAP,ELY 221-1C(8)-EA |
| MAIN1-P.W.Board |     |       | <a href="#">E4401</a>  | 23T75325Y01 | CAP,VB 332-1C +      |
| MAIN1-P.W.Board |     |       | <a href="#">E5000</a>  | 23T65114Y25 | CAP,FK 10R-1E-B -E2  |
| MAIN1-P.W.Board |     |       | <a href="#">E5001</a>  | 23S65134W15 | CAP,ELY 331-0J(8)-E6 |
| MAIN1-P.W.Board |     |       | <a href="#">E5002</a>  | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| MAIN1-P.W.Board |     |       | <a href="#">F3201</a>  | 65T75477Y13 | FUSE,CCP2E 4.0A -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">IC2001</a> | 51T93340F02 | NJM2060V-TE2 -SE2    |
| MAIN1-P.W.Board |     |       | <a href="#">IC2002</a> | 51-11419Z01 | 74HC4066PW,118 -SE2  |
| MAIN1-P.W.Board |     |       | <a href="#">IC2003</a> | 51-11419Z01 | 74HC4066PW,118 -SE2  |
| MAIN1-P.W.Board |     |       | <a href="#">IC2004</a> | 51-13600Z01 | TDA7717 -QT          |
| MAIN1-P.W.Board |     |       | <a href="#">IC2005</a> | 51-14471Z01 | TB2923AHQ -ZS        |
| MAIN1-P.W.Board |     |       | <a href="#">IC2006</a> | 51T25576W07 | NJM4580V-TE2 -SE2    |
| MAIN1-P.W.Board |     |       | <a href="#">IC3101</a> | 51T25183Y02 | TC7SET08FU-EL -CP    |
| MAIN1-P.W.Board |     |       | <a href="#">IC3201</a> | 51T55070W05 | MB88385CPF-ER -SE9   |
| MAIN1-P.W.Board |     |       | <a href="#">IC3301</a> | 51-14741Z01 | AN15887A-VTU -QT     |
| MAIN1-P.W.Board |     |       | <a href="#">IC3302</a> | 51T15567Y01 | NJM2535V-TE2 -SE2    |
| MAIN1-P.W.Board |     |       | <a href="#">IC4001</a> | 51-13711Z01 | TB2920HQ -ZS         |
| MAIN1-P.W.Board |     |       | <a href="#">IC4002</a> | 51-02830Z01 | BA7810HFP -NEA       |
| MAIN1-P.W.Board |     |       | <a href="#">IC4101</a> | 51-02248Z01 | BD9781HFP-TR -NEA    |
| MAIN1-P.W.Board |     |       | <a href="#">IC4201</a> | 51-02830Z01 | BA7810HFP -NEA       |
| MAIN1-P.W.Board |     |       | <a href="#">IC4250</a> | 51-05862Z01 | NJM2845DL1-33-TE1NE5 |
| MAIN1-P.W.Board |     |       | <a href="#">IC4301</a> | 51-02830Z01 | BA7810HFP -NEA       |
| MAIN1-P.W.Board |     |       | <a href="#">IC5000</a> | 51T25183Y02 | TC7SET08FU-EL -CP    |
| MAIN1-P.W.Board |     |       | <a href="#">IC5001</a> | 83-16494Z04 | V1.02RAAL903A_MP     |
| MAIN1-P.W.Board |     |       | <a href="#">IC5002</a> | 51T25183Y02 | TC7SET08FU-EL -CP    |
| MAIN1-P.W.Board |     |       | <a href="#">IC5003</a> | 51T15185Y02 | TC7SH08FU,JF-L -CP   |
| MAIN1-P.W.Board |     |       | <a href="#">IC5005</a> | 51T25183Y02 | TC7SET08FU-EL -CP    |
| MAIN1-P.W.Board |     |       | <a href="#">IC5006</a> | 51T65778Y01 | BR24L02F-W-E2 -SE2   |
| MAIN1-P.W.Board |     |       | <a href="#">IC5007</a> | 51T25183Y02 | TC7SET08FU-EL -CP    |
| MAIN1-P.W.Board |     |       | <a href="#">IC5008</a> | 51T75063Y06 | BD5228G-TR -CP       |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                               | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-----------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">IC5009</a> | 51T45594Y01 | TDA3664 -NE2         |
| MAIN1-P.W.Board |  |       | <a href="#">JK3301</a> | 09-12459Z01 | JAC,HSJ1765-011075EA |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">L1001</a>  | 24T55488Y20 | IND,LLQ1608 R027J-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">L1002</a>  | 24T55488Y24 | IND,LLQ1608 R039J-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">L1003</a>  | 24T16403W29 | COI,IND.15R-M -CP    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">L1004</a>  | 24T25164Y21 | IND,FSLM2520 4R7J-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">L3500</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">L4101</a>  | 24-05496Z03 | IND,SLF12575-H68RMEA |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">L4102</a>  | 24-05547Z06 | IND,SLF10145-H22RMEA |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q1002</a>  | 48-08602Z01 | TR,2SA2071-Q-T100-E2 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q1003</a>  | 48-07989Z11 | TR,UNR521FJ-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2002</a>  | 48T25317Y01 | TR,XN0F256-TX -CP    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2003</a>  | 48T25317Y01 | TR,XN0F256-TX -CP    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2004</a>  | 48T25317Y01 | TR,XN0F256-TX -CP    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2005</a>  | 48-07989Z02 | TR,UNR5212J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2006</a>  | 48-02302Z01 | TR,XP0331100L -CP    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2007</a>  | 48-07989Z01 | TR,UNR5211J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2008</a>  | 48-07989Z02 | TR,UNR5212J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2009</a>  | 48-02302Z01 | TR,XP0331100L -CP    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2010</a>  | 48-07989Z02 | TR,UNR5212J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q2011</a>  | 48-07989Z01 | TR,UNR5211J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q3001</a>  | 48-05471Z01 | TR,XP0NG8A00-L -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q3002</a>  | 48-05471Z01 | TR,XP0NG8A00-L -CP   |
| MAIN1-P.W.Board |                                                                                   | #1    | <a href="#">Q3003</a>  | 48-07989Z02 | TR,UNR5212J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q3004</a>  | 48-05471Z01 | TR,XP0NG8A00-L -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q3201</a>  | 48-02302Z01 | TR,XP0331100L -CP    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q3202</a>  | 48-07987Z13 | TR,UNR511LJ-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q3301</a>  | 48T63420F03 | TR,2SA1037AK-R146-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q3302</a>  | 48T25317Y01 | TR,XN0F256-TX -CP    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q3500</a>  | 48-09581Z03 | TR,KTA1505S-Y-RTK-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q3501</a>  | 48-07989Z02 | TR,UNR5212J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q4001</a>  | 48-12535Z02 | TR,XP0111200-L -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q4002</a>  | 48-07989Z02 | TR,UNR5212J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q4003</a>  | 48-09581Z03 | TR,KTA1505S-Y-RTK-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q4101</a>  | 48T45594W08 | TR ,XN1212 -TX-CP    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q4103</a>  | 48-07989Z03 | TR,UNR5213J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q4105</a>  | 48-07989Z03 | TR,UNR5213J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q4106</a>  | 48-07987Z01 | TR,UNR5111J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q5001</a>  | 48-09581Z03 | TR,KTA1505S-Y-RTK-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q5002</a>  | 48-07989Z04 | TR,UNR5214J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Q5003</a>  | 48-07989Z03 | TR,UNR5213J-TX -CP   |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R1001</a>  | 06S45674W19 | RES,RK 27RJ 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R1002</a>  | 06S45674W19 | RES,RK 27RJ 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R1003</a>  | 06S55361Y01 | RES,RK 2R2J 1/4 -CP  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R1005</a>  | 06S55361Y98 | RES,RK 243J 1/4 -CP  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R1006</a>  | 06S70072F61 | RES,CP .222-J-1/4-CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN1-P.W.Board |     |       | <a href="#">R1007</a> | 06S70072F61 | RES,CP .222-J-1/4-CP |
| MAIN1-P.W.Board |     |       | <a href="#">R1008</a> | 06S55362Y39 | RES,RK JUMPER 1/4-CP |
| MAIN1-P.W.Board |     |       | <a href="#">R1009</a> | 06S45674W93 | RES,RK 333J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R1013</a> | 06S55361Y17 | RES,RK 10RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2001</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2002</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2003</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2004</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2005</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2006</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2007</a> | 06S15593Y43 | RES,RK 561F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2008</a> | 06S15593Y43 | RES,RK 561F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2009</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2010</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2011</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2012</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2013</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2014</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2015</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2016</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2017</a> | 06S55365Y66 | RES,RK 112J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2018</a> | 06S55365Y66 | RES,RK 112J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2019</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2020</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2021</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2022</a> | 06S55365Y89 | RES,RK 103J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2023</a> | 06S55365Y89 | RES,RK 103J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2027</a> | 06S55365Y66 | RES,RK 112J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2028</a> | 06S55365Y66 | RES,RK 112J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2035</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2037</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2038</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2039</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2040</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2041</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2042</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2043</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2044</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2045</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2046</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2047</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2048</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2049</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2050</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2051</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2052</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN1-P.W.Board |     |       | <a href="#">R2053</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2054</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R2055</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2056</a> | 06S15593Y77 | RES,RK 153F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2057</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2058</a> | 06S15593Y89 | RES,RK 473F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2059</a> | 06S15593Y33 | RES,RK 221F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2060</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2061</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2062</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R2063</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3004</a> | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3005</a> | 06S15593Y89 | RES,RK 473F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3006</a> | 06S15593Y89 | RES,RK 473F 1/10 -CP |
| MAIN1-P.W.Board |     | #1    | <a href="#">R3007</a> | 06S55361Y89 | RES,RK 103J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3008</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3009</a> | 06S55361Y89 | RES,RK 103J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3010</a> | 06S15593Y89 | RES,RK 473F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3011</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3103</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3105</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3201</a> | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3202</a> | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3203</a> | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3204</a> | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3205</a> | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3206</a> | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3207</a> | 06S55361Y46 | RES,RK 161J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3208</a> | 06S55361Y46 | RES,RK 161J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3209</a> | 06S15593Y53 | RES,RK 152F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3210</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3211</a> | 06S55361Y46 | RES,RK 161J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3212</a> | 06S55361Y46 | RES,RK 161J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3213</a> | 06S55361Y17 | RES,RK 10RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3214</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3215</a> | 06S15593Y53 | RES,RK 152F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3216</a> | 06S55361Y51 | RES,RK 271J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3217</a> | 06S55361Y51 | RES,RK 271J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3218</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3219</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3220</a> | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3301</a> | 06S55361Y30 | RES,RK 36RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3302</a> | 06S55361Y31 | RES,RK 39RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3303</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3304</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3305</a> | 06S55361Y30 | RES,RK 36RJ 1/4 -CP  |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN1-P.W.Board |     |       | <a href="#">R3306</a> | 06S55361Y31 | RES,RK 39RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3307</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3308</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3309</a> | 06S55361Y30 | RES,RK 36RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3310</a> | 06S55361Y31 | RES,RK 39RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3311</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3312</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3313</a> | 06S55361Y30 | RES,RK 36RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3314</a> | 06S55361Y31 | RES,RK 39RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3315</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3316</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3318</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3319</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3320</a> | 06S15594Y22 | RES,RK 105F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3321</a> | 06S15594Y22 | RES,RK 105F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3322</a> | 06S15594Y22 | RES,RK 105F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3323</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3324</a> | 06S15593Y91 | RES,RK 563F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3325</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3326</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3327</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3328</a> | 06S55361Y51 | RES,RK 271J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3329</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3330</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3331</a> | 06S55361Y37 | RES,RK 68RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3332</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3336</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3337</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3338</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3339</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3340</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3341</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3342</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3343</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3344</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3345</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3346</a> | 06S55363Y65 | RES,RK 102J 1/8 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3347</a> | 06S55361Y30 | RES,RK 36RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3348</a> | 06S55361Y31 | RES,RK 39RJ 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3349</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3350</a> | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R3401</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3504</a> | 06S15593Y71 | RES,RK 822F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3508</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3509</a> | 06S55365Y63 | RES,RK 821J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R3510</a> | 06S55366Y06 | RES,RK 473J 1/10 -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN1-P.W.Board |     |       | <a href="#">R4001</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4002</a> | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4003</a> | 06S55365Y63 | RES,RK 821J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4004</a> | 06S15593Y43 | RES,RK 561F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4005</a> | 06S15594Y23 | RES,RK JUMPER1/10-CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4006</a> | 06S15593Y61 | RES,RK 332F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4007</a> | 06S45675W06 | RES,RK 104J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4009</a> | 06S45675W06 | RES,RK 104J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4010</a> | 06S55361Y89 | RES,RK 103J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R4011</a> | 06S15593Y90 | RES,RK 513F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4013</a> | 06S35083Y43 | RES,RK 333F 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R4014</a> | 06S35083Y34 | RES,RK 562F 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R4015</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4016</a> | 06S15593Y56 | RES,RK 202F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4017</a> | 06S15593Y93 | RES,RK 683F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4018</a> | 06S15593Y74 | RES,RK 113F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4019</a> | 06S15593Y53 | RES,RK 152F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4020</a> | 06S55366Y27 | RES,RK 364J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4101</a> | 06S55361Y85 | RES,RK 682J 1/4 -CP  |
| MAIN1-P.W.Board |     |       | <a href="#">R4103</a> | 06S15594Y03 | RES,RK 164F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4104</a> | 06S15593Y50 | RES,RK 112F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4105</a> | 06S15593Y97 | RES,RK 104F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4106</a> | 06S15593Y87 | RES,RK 393F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4107</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4109</a> | 06S15594Y14 | RES,RK 474F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4110</a> | 06S15593Y99 | RES,RK 124F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4112</a> | 06S15594Y06 | RES,RK 224F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4115</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4118</a> | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4119</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4120</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4121</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4204</a> | 06S15593Y31 | RES,RK 181F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4205</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4206</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4207</a> | 06S55366Y27 | RES,RK 364J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4250</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4302</a> | 06S15593Y41 | RES,RK 471F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4303</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4304</a> | 06S55366Y27 | RES,RK 364J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R4305</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5001</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5002</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5003</a> | 06S15615Y47 | RES,RK 821J 1/16 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5004</a> | 06S55365Y98 | RES,RK 243J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5005</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN1-P.W.Board |     |       | <a href="#">R5006</a> | 06S55365Y90 | RES,RK 113J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5007</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5008</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5010</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5011</a> | 06S15593Y66 | RES,RK 512F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5012</a> | 06S15593Y66 | RES,RK 512F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5015</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5016</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5018</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5019</a> | 06S55365Y90 | RES,RK 113J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5022</a> | 06S15593Y51 | RES,RK 122F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5023</a> | 06S15593Y83 | RES,RK 273F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5024</a> | 06S15593Y63 | RES,RK 392F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5025</a> | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5026</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5027</a> | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN1-P.W.Board |     | #1    | <a href="#">R5032</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN1-P.W.Board |     | \$1   | <a href="#">R5033</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN1-P.W.Board |     | %1    | <a href="#">R5033</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5034</a> | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5035</a> | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5036</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5040</a> | 06S15593Y47 | RES,RK 821F 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5044</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5045</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5046</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5048</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5049</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5050</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5051</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5052</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5053</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5054</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5055</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5056</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5057</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5058</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5059</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5060</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5061</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5062</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5063</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5064</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5065</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5066</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |     |       | <a href="#">R5067</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                               | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-----------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5068</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5071</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5072</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5074</a>  | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5076</a>  | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5078</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5079</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5081</a>  | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5082</a>  | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5083</a>  | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5086</a>  | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5087</a>  | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5100</a>  | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">R5101</a>  | 06S35095Y03 | RES,RK 473J 1/4 -CP  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">RA5002</a> | 06S45591W07 | RES,ARY MNR101J 4-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">RA5003</a> | 06S45591W07 | RES,ARY MNR101J 4-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">SA1001</a> | 48-00954Z01 | VST,CSA30C201M-T -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">SD4100</a> | 48-06874Z03 | DIO,SHT MA24D52-TXE1 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">SD4101</a> | 48-06874Z03 | DIO,SHT MA24D52-TXE1 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">SW2001</a> | 40T45282W02 | SW,SLIDE SLD-42-508X |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">SW2002</a> | 40T15452Y01 | SW,SLIDE SLD-62-724X |
| MAIN1-P.W.Board |  |       | <a href="#">TU1001</a> | TU-00887Z03 | TUNER,MX-A210        |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">VT1001</a> | 24T35286Y02 | IND,MG56 332J -DB    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">XL3201</a> | 91-12380Z01 | XTL,XJ 4.000M -E9    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">XL5001</a> | 91-16082Z01 | XTL,CM200C 32.768-E5 |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">XL5002</a> | 91-12380Z01 | XTL,XJ 4.000M -E9    |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">Z5001</a>  | 91T65112W06 | EMI,BK2125HM102 -CP  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD3201</a> | 48T35392Y06 | DIO,ZEN RLZ7.5A -CP  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD3202</a> | 48-11191Z23 | DIO,ZEN MAZ8056GM-CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD3203</a> | 48T35392Y06 | DIO,ZEN RLZ7.5A -CP  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD3300</a> | 48-12488Z01 | DIO,ZEN MAZ9062H -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD3301</a> | 48-12488Z01 | DIO,ZEN MAZ9062H -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD3302</a> | 48-12488Z01 | DIO,ZEN MAZ9062H -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD3303</a> | 48-12488Z01 | DIO,ZEN MAZ9062H -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD3304</a> | 48-12488Z01 | DIO,ZEN MAZ9062H -CP |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD4401</a> | 48-02592Z01 | DIO,ZEN Z5W27VJ -EA  |
| MAIN1-P.W.Board |                                                                                   |       | <a href="#">ZD5101</a> | 48-11191Z20 | DIO,ZEN MAZ8051GM-CP |
| MAIN2-P.W.Board |                                                                                   |       | <a href="#">C6001</a>  | 08S45677W49 | CAP,CER 361J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                   |       | <a href="#">C6002</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                   |       | <a href="#">C6003</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                   |       | <a href="#">C6004</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                   |       | <a href="#">C6005</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                   |       | <a href="#">C6006</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                   |       | <a href="#">C6007</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                   |       | <a href="#">C6008</a>  | 08S45231Y16 | CAP,CER 18RJ-CH1H-CP |
| MAIN2-P.W.Board |                                                                                   |       | <a href="#">C6009</a>  | 08S45231Y15 | CAP,CER 15RJ-CH1H-CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN2-P.W.Board |     |       | <a href="#">C6010</a> | 08S45676W65 | CAP,CER.222K-B1H -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6011</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6012</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6013</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6014</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6015</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6016</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6017</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6018</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6019</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6020</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6021</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6022</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6023</a> | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6025</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6050</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6052</a> | 08S45677W52 | CAP,CER 471J-CH1H-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6053</a> | 08S45677W52 | CAP,CER 471J-CH1H-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6054</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6057</a> | 08S45677W48 | CAP,CER.331J-CH1H-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6058</a> | 08S45677W48 | CAP,CER.331J-CH1H-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6059</a> | 08S45677W38 | CAP,CER 121J-CH1H-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6060</a> | 08S45677W38 | CAP,CER 121J-CH1H-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6061</a> | 08S45676W82 | CAP,CER 333K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6062</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6063</a> | 08S45676W82 | CAP,CER 333K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6064</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6065</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6066</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6090</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6091</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6092</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6093</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6094</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6095</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6096</a> | 08S65676Y03 | CAP,CER 225KX7R1C-CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6097</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6098</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6099</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6100</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6101</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6200</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6201</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6202</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6203</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |     |       | <a href="#">C6204</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                                 | MODEL | Ref.                    | Parts No.   | Parts Name           |
|-----------------|-------------------------------------------------------------------------------------|-------|-------------------------|-------------|----------------------|
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6205</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6206</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6300</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6301</a>   | 08S45677W07 | CAP,CER.5R0C-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6302</a>   | 08S45677W08 | CAP,CER.6R0D-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6303</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6304</a>   | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6400</a>   | 08S60102F48 | CAP,CER 105K-B1E -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6401</a>   | 08S60102F48 | CAP,CER 105K-B1E -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6402</a>   | 08S60102F48 | CAP,CER 105K-B1E -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6403</a>   | 08S60102F48 | CAP,CER 105K-B1E -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6404</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6405</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6406</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6407</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6408</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6409</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6410</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6411</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6421</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6422</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6423</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6424</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6425</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6426</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6427</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6428</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6501</a>   | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6600</a>   | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6601</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6602</a>   | 08S45676W65 | CAP,CER.222K-B1H -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6603</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6604</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6606</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6607</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6608</a>   | 08S65128F78 | CAP,CER.223K-B1H -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6609</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6610</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">C6700</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN2-P.W.Board |  |       | <a href="#">CB6051</a>  | 09-11455Z01 | SKT,YKF45-0039N -DB  |
| MAIN2-P.W.Board |  |       | <a href="#">CB6600</a>  | 09T13515W06 | WTB,5569-06A1 -DB    |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">CB6900</a>  | 09T75066Y60 | FFC,IMSA9634S-60Y-EZ |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">D6600</a>   | 48T45254W03 | DIO,SI-MA142WK -CP   |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">D6700</a>   | 48-06706Z01 | DIO,MA2J111-TX -CP   |
| MAIN2-P.W.Board |  |       | <a href="#">DIN6700</a> | 09T15462Y02 | DIN,TCS7741-01WA -DB |
| MAIN2-P.W.Board |                                                                                     |       | <a href="#">E6050</a>   | 23T65114Y23 | CAP,FK 471-1C-F -EA  |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                                 | MODEL                  | Ref.        | Parts No.            | Parts Name |
|-----------------|-------------------------------------------------------------------------------------|------------------------|-------------|----------------------|------------|
| MAIN2-P.W.Board |                                                                                     | <a href="#">E6051</a>  | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">E6052</a>  | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">E6053</a>  | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">E6090</a>  | 23S65134W81 | CAP,ELY 22R-1C(4)-E2 |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">E6091</a>  | 23T65114Y23 | CAP,FK 471-1C-F -EA  |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6001</a> | 51-10941Z01 | TCC8600 -QT          |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6050</a> | 51-04231Z01 | WM8725GED/RV -SE5    |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6051</a> | 51T25576W07 | NJM4580V-TE2 -SE2    |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6089</a> | 51T15191Y01 | TC74VHC08FT-EL -SE5  |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6090</a> | 51-11433Z01 | RT9702AGB -CP        |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6091</a> | 51-05862Z01 | NJM2845DL1-33-TE1NE5 |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6092</a> | 51-12158Z01 | S-1132B18-M5T1G -CP  |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6093</a> | 51T15185Y02 | TC7SH08FU,JF-L -CP   |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6100</a> | 83-16494Z08 | V1.15_EPF_AP         |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6200</a> | 51-11501Z01 | HY57V641620FTP-HI-ST |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6300</a> | 51-09817Z03 | 341S2307 -LE6        |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6400</a> | 51-03721Z01 | NJM2505F-TE1 -CP     |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6402</a> | 51-03721Z01 | NJM2505F-TE1 -CP     |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6403</a> | 51-03721Z01 | NJM2505F-TE1 -CP     |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6410</a> | 51-03721Z01 | NJM2505F-TE1 -CP     |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6600</a> | 51T93532F05 | TC4S01F-TE85L -CP    |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6601</a> | 51T25183Y02 | TC7SET08FU-EL -CP    |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6602</a> | 51-11440Z01 | 74HC4051PW,118 -SE2  |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6603</a> | 51-11440Z01 | 74HC4051PW,118 -SE2  |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6604</a> | 51T25083Y02 | TC74VHC32FT,K-EL-SE5 |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">IC6700</a> | 51T15192Y01 | TC74VHC14FT-EL -SE5  |            |
| MAIN2-P.W.Board |  | <a href="#">JK6001</a> | 09-14149Z01 | JAC,CK3-3.5-14D -DB  |            |
| MAIN2-P.W.Board |  | <a href="#">JK6500</a> | 09T15627W04 | RCA,T6314-AACB -DB   |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">L6003</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">L6004</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">L6005</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">Q6003</a>  | 48-05471Z01 | TR,XP0NG8A00-L -CP   |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">Q6089</a>  | 48-02302Z01 | TR,XP0331100L -CP    |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">Q6600</a>  | 48-07989Z01 | TR,UNR5211J-TX -CP   |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">Q6601</a>  | 48-11159Z01 | TR,2SA2122G0L-TX -CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">Q6602</a>  | 48-07989Z02 | TR,UNR5212J-TX -CP   |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">Q6700</a>  | 48-07989Z13 | TR,UNR521LJ-TX -CP   |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">R6004</a>  | 06S45674W89 | RES,RK 223J 1/10 -CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">R6005</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">R6006</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">R6007</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">R6008</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">R6009</a>  | 06S15615Y65 | RES,RK 472J 1/16 -CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">R6010</a>  | 06S15615Y65 | RES,RK 472J 1/16 -CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">R6011</a>  | 06S15615Y65 | RES,RK 472J 1/16 -CP |            |
| MAIN2-P.W.Board |                                                                                     | <a href="#">R6012</a>  | 06S15615Y81 | RES,RK 223J 1/16 -CP |            |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN2-P.W.Board |     |       | <a href="#">R6014</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6015</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6016</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6017</a> | 06S15615Y77 | RES,RK 153J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6018</a> | 06S15615Y77 | RES,RK 153J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6019</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6020</a> | 06S15616Y40 | RES,RK 565J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6021</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6022</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6023</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6024</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6025</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6026</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6027</a> | 06S15615Y89 | RES,RK 473J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6028</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6029</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6030</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6031</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6032</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6033</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6034</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6035</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6036</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6037</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6038</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6050</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6051</a> | 06S15593Y72 | RES,RK 912F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6052</a> | 06S45674W80 | RES,RK 912J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6053</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6056</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6057</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6058</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6060</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6061</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6062</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6063</a> | 06S55361Y21 | RES,RK 15RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6064</a> | 06S55361Y21 | RES,RK 15RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6065</a> | 06S15615Y77 | RES,RK 153J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6066</a> | 06S15615Y77 | RES,RK 153J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6067</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6068</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6069</a> | 06S55365Y66 | RES,RK 112J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6070</a> | 06S55365Y66 | RES,RK 112J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6071</a> | 06S45674W25 | RES,RK 47RJ 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6072</a> | 06S45674W25 | RES,RK 47RJ 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6075</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN2-P.W.Board |     |       | <a href="#">R6076</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6077</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6078</a> | 06S15593Y88 | RES,RK 433F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6079</a> | 06S15593Y88 | RES,RK 433F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6080</a> | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6081</a> | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6082</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6090</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6091</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6092</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6093</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6095</a> | 06S55361Y47 | RES,RK 181J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6096</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6097</a> | 06S45674W99 | RES,RK 563J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6098</a> | 06S55365Y47 | RES,RK 181J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6099</a> | 06S55361Y47 | RES,RK 181J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6101</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6102</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6103</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6104</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6105</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6106</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6107</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6108</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6109</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6110</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6111</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6112</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6113</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6114</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6115</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6116</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6117</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6136</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6137</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6138</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6139</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6200</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6201</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6202</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6203</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6204</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6205</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6206</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6207</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6208</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN2-P.W.Board |     |       | <a href="#">R6209</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6210</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6211</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6212</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6213</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6214</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6215</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6216</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6217</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6233</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6300</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6301</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6302</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6304</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6305</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6306</a> | 06S65415Y49 | RES,RK 104F 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6307</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6308</a> | 06S15615Y81 | RES,RK 223J 1/16 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6310</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6400</a> | 06S55362Y39 | RES,RK JUMPER 1/4-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6401</a> | 06S55362Y39 | RES,RK JUMPER 1/4-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6402</a> | 06S55362Y39 | RES,RK JUMPER 1/4-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6403</a> | 06S55362Y39 | RES,RK JUMPER 1/4-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6404</a> | 06S55362Y39 | RES,RK JUMPER 1/4-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6405</a> | 06S55362Y39 | RES,RK JUMPER 1/4-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6406</a> | 06S55362Y39 | RES,RK JUMPER 1/4-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6407</a> | 06S55362Y39 | RES,RK JUMPER 1/4-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6408</a> | 06S55361Y30 | RES,RK 36RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6409</a> | 06S55361Y30 | RES,RK 36RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6410</a> | 06S55361Y30 | RES,RK 36RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6411</a> | 06S55361Y31 | RES,RK 39RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6412</a> | 06S55361Y31 | RES,RK 39RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6413</a> | 06S55361Y31 | RES,RK 39RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6506</a> | 06S55365Y65 | RES,RK 102J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6600</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6601</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6602</a> | 06S55366Y30 | RES,RK 474J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6604</a> | 06S55365Y77 | RES,RK 332J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6605</a> | 06S55365Y73 | RES,RK 222J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6609</a> | 06S15593Y89 | RES,RK 473F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6610</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6611</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6612</a> | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6613</a> | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6614</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6615</a> | 06S15593Y89 | RES,RK 473F 1/10 -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-----|-------|------------------------|-------------|----------------------|
| MAIN2-P.W.Board |     |       | <a href="#">R6616</a>  | 06S55361Y89 | RES,RK 103J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6617</a>  | 06S55361Y89 | RES,RK 103J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6620</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6700</a>  | 06S55366Y14 | RES,RK 104J 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6702</a>  | 06S15593Y89 | RES,RK 473F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6703</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6704</a>  | 06S55361Y33 | RES,RK 47RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6705</a>  | 06S55361Y89 | RES,RK 103J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6706</a>  | 06S55361Y33 | RES,RK 47RJ 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6707</a>  | 06S70072F61 | RES,CP .222-J-1/4-CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6708</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6709</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6711</a>  | 06S15593Y89 | RES,RK 473F 1/10 -CP |
| MAIN2-P.W.Board |     |       | <a href="#">R6712</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">R6713</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN2-P.W.Board |     |       | <a href="#">XL6001</a> | 91-14119Z01 | XTL,XQ 12.000M -E5   |
| MAIN2-P.W.Board |     |       | <a href="#">XL6300</a> | 91-16082Z01 | XTL,CM200C 32.768-E5 |
| MAIN2-P.W.Board |     |       | <a href="#">Z6050</a>  | 91T65123Y02 | EMI,DLW21SN900SQ2-CP |
| MAIN2-P.W.Board |     |       | <a href="#">ZD6050</a> | 48-11191Z20 | DIO,ZEN MAZ8051GM-CP |
| MAIN2-P.W.Board |     |       | <a href="#">ZD6051</a> | 48-11191Z20 | DIO,ZEN MAZ8051GM-CP |
| MAIN2-P.W.Board |     |       | <a href="#">ZD6600</a> | 48-01607Z19 | DIO,ZEN LUDZ5.6B -CP |
| MAIN2-P.W.Board |     |       | <a href="#">ZD6601</a> | 48-01607Z19 | DIO,ZEN LUDZ5.6B -CP |
| MAIN2-P.W.Board |     |       | <a href="#">ZD6602</a> | 48-01607Z19 | DIO,ZEN LUDZ5.6B -CP |
| MAIN2-P.W.Board |     |       | <a href="#">ZD6700</a> | 48-11191Z23 | DIO,ZEN MAZ8056GM-CP |
| MAIN2-P.W.Board |     |       | <a href="#">ZD6701</a> | 48-11191Z23 | DIO,ZEN MAZ8056GM-CP |
| MAIN2-P.W.Board |     |       | <a href="#">ZD6702</a> | 48-11191Z23 | DIO,ZEN MAZ8056GM-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8000</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8001</a>  | 08S45677W16 | CAP,CER.15RJ-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8002</a>  | 08S45231Y11 | CAP,CER 8R0D-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8003</a>  | 08S45231Y11 | CAP,CER 8R0D-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8004</a>  | 08S45231Y19 | CAP,CER 33RJ-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8005</a>  | 08S45232Y11 | CAP,CER 103K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8006</a>  | 08S45231Y23 | CAP,CER 68RJ-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8007</a>  | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8008</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8009</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8010</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8012</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8013</a>  | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8014</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8015</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8016</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8017</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8018</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8019</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8020</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| FRONT-P.W.Board |     |       | <a href="#">C8021</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8022</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8023</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8024</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8025</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8026</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8027</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8028</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8029</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8030</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8031</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8032</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8033</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8034</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8035</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8036</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8037</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8038</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8039</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8040</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8041</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8042</a> | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8043</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8044</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8046</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8047</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8200</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8201</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8202</a> | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8203</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8204</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8250</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8251</a> | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8252</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8253</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8254</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8255</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8256</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8257</a> | 08S65668Y04 | CAP,CER 104KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8258</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8259</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8260</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8261</a> | 08S35374W12 | CAP,CER 106K-B0J -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8300</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8302</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8303</a> | 08S45676W95 | CAP,CER 823K-B1C -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| FRONT-P.W.Board |     |       | <a href="#">C8304</a> | 08S45676W72 | CAP,CER 822K-B1H -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8305</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8306</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8307</a> | 08S45676W83 | CAP,CER 473K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8308</a> | 08S45676W83 | CAP,CER 473K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8309</a> | 08S45676W83 | CAP,CER 473K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8311</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8312</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8313</a> | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8314</a> | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8315</a> | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8316</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8317</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8318</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8319</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8320</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8321</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8322</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8323</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8324</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8325</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8326</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8327</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8328</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8329</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8330</a> | 08S45677W32 | CAP,CER.68RJ-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8334</a> | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8335</a> | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8336</a> | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8400</a> | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8402</a> | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8403</a> | 08S65670Y02 | CAP,CER 225KX5R1E-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8404</a> | 08S65677Y02 | CAP,CER 475KX7R1E-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8405</a> | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8406</a> | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8407</a> | 08S45231Y21 | CAP,CER 47RJ-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8408</a> | 08S65670Y02 | CAP,CER 225KX5R1E-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8409</a> | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8410</a> | 08S65670Y06 | CAP,CER 226KX5R1A-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8411</a> | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8413</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8414</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8460</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8461</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| FRONT-P.W.Board |     |       | <a href="#">C8501</a> | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| FRONT-P.W.Board |     |       | <a href="#">C8502</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL                  | Ref.        | Parts No.            | Parts Name |
|-----------------|-----|------------------------|-------------|----------------------|------------|
| FRONT-P.W.Board |     | <a href="#">C8503</a>  | 08S45677W60 | CAP,CER 102J-CH1H-CP |            |
| FRONT-P.W.Board |     | <a href="#">C8700</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| FRONT-P.W.Board |     | <a href="#">C8701</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| FRONT-P.W.Board |     | <a href="#">C8720</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| FRONT-P.W.Board |     | <a href="#">C8721</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| FRONT-P.W.Board |     | <a href="#">C8722</a>  | 08S65670Y06 | CAP,CER 226KX5R1A-CP |            |
| FRONT-P.W.Board |     | <a href="#">C8900</a>  | 08S45677W60 | CAP,CER 102J-CH1H-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9400</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9401</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9402</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9403</a>  | 08S35349Y17 | CAP,CER 225K-B0J -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9404</a>  | 08S35374W08 | CAP,CER 474K-B1C -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9406</a>  | 08S35349Y12 | CAP,CER 105K-B0J -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9407</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9408</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9409</a>  | 08S45676W63 | CAP,CER 152K-B1H -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9410</a>  | 08S45676W89 | CAP,CER 473K-B1E -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9411</a>  | 08S45677W44 | CAP,CER.221J-CH1H-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9412</a>  | 08S45676W89 | CAP,CER 473K-B1E -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9413</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9414</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9415</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9416</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9417</a>  | 08S45676W73 | CAP,CER.103K-B1H -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9418</a>  | 08S65676Y03 | CAP,CER 225KX7R1C-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9419</a>  | 08S45676W82 | CAP,CER 333K-B1C -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9420</a>  | 08-02639Z03 | CAP,CER 22RJ-CG3F-E1 |            |
| FRONT-P.W.Board |     | <a href="#">C9421</a>  | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9422</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9424</a>  | 08S35374W11 | CAP,CER 475K-B0J -CP |            |
| FRONT-P.W.Board |     | <a href="#">C9520</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9521</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9701</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9702</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9703</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9704</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9705</a>  | 08S65668Y04 | CAP,CER 104KX5R1A-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9800</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9801</a>  | 08S35374W01 | CAP,CER 104K-B1E-CP  |            |
| FRONT-P.W.Board |     | <a href="#">C9804</a>  | 08S65670Y02 | CAP,CER 225KX5R1E-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9805</a>  | 08S45677W28 | CAP,CER 47RJ-CH1H-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9806</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9808</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |            |
| FRONT-P.W.Board |     | <a href="#">C9809</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |            |
| FRONT-P.W.Board |     | <a href="#">CB8500</a> | 09-05209Z01 | FFC,IMSA9617S-04Y-E9 |            |
| FRONT-P.W.Board |     | <a href="#">CB9000</a> | 09-12780Z03 | FFC,IMSA9637S-60Y-EZ |            |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL                  | Ref.        | Parts No.            | Parts Name |
|-----------------|-----|------------------------|-------------|----------------------|------------|
| FRONT-P.W.Board |     | <a href="#">CB9002</a> | 09T45391Y13 | FFC,IMSA9632S-13Y-E9 |            |
| FRONT-P.W.Board |     | <a href="#">CH8900</a> | 09-00711Z02 | BTB,IMSA9828S-60Y-EK |            |
| FRONT-P.W.Board |     | <a href="#">CH9400</a> | 09T45263Y02 | WTB,SM02B-BHSS-1 -EV |            |
| FRONT-P.W.Board |     | <a href="#">D9400</a>  | 48-07015Z01 | DIO,KDS160-RTK -CP   |            |
| FRONT-P.W.Board |     | <a href="#">D9401</a>  | 48-07015Z01 | DIO,KDS160-RTK -CP   |            |
| FRONT-P.W.Board |     | <a href="#">D9402</a>  | 48-07015Z01 | DIO,KDS160-RTK -CP   |            |
| FRONT-P.W.Board |     | <a href="#">D9403</a>  | 48T15707Y01 | DIO,MA133-TX -CP     |            |
| FRONT-P.W.Board |     | <a href="#">D9404</a>  | 48T15707Y01 | DIO,MA133-TX -CP     |            |
| FRONT-P.W.Board |     | <a href="#">D9405</a>  | 48-07015Z01 | DIO,KDS160-RTK -CP   |            |
| FRONT-P.W.Board |     | <a href="#">D9406</a>  | 48-07015Z01 | DIO,KDS160-RTK -CP   |            |
| FRONT-P.W.Board |     | <a href="#">E8401</a>  | 23T65114Y21 | CAP,FK 221-1C-D8-E6  |            |
| FRONT-P.W.Board |     | <a href="#">E8412</a>  | 23S65134W45 | CAP,ELY 33R-1E(6)-E6 |            |
| FRONT-P.W.Board |     | <a href="#">E8460</a>  | 23S65134W23 | CAP,ELY 101-1A(6)-E6 |            |
| FRONT-P.W.Board |     | <a href="#">E8700</a>  | 23S65134W23 | CAP,ELY 101-1A(6)-E6 |            |
| FRONT-P.W.Board |     | <a href="#">E9800</a>  | 23S65134W22 | CAP,ELY 47R-1A(6)-E6 |            |
| FRONT-P.W.Board |     | <a href="#">E9802</a>  | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |            |
| FRONT-P.W.Board |     | <a href="#">E9803</a>  | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |            |
| FRONT-P.W.Board |     | <a href="#">F8401</a>  | 65T75477Y05 | FUSE,CCP2E 1.0A -CP  |            |
| FRONT-P.W.Board |     | <a href="#">IC8000</a> | 51-15559Z01 | IC,MN103SE60PA -QT   |            |
| FRONT-P.W.Board |     | <a href="#">IC8200</a> | 83-16494Z07 | V1.20GERDA_DMSH_AP   |            |
| FRONT-P.W.Board |     | <a href="#">IC8250</a> | 51-12757Z01 | HY57V561620FTP-HI-ST |            |
| FRONT-P.W.Board |     | <a href="#">IC8300</a> | 51-14887Z01 | AD9985ABSTZ-110 -QT  |            |
| FRONT-P.W.Board |     | <a href="#">IC8400</a> | 51-11439Z01 | LT3487EDD -CE2       |            |
| FRONT-P.W.Board |     | <a href="#">IC8460</a> | 51T25259Y03 | BA00ASFP-E2 -NE5     |            |
| FRONT-P.W.Board |     | <a href="#">IC8700</a> | 51T25259Y03 | BA00ASFP-E2 -NE5     |            |
| FRONT-P.W.Board |     | <a href="#">IC8720</a> | 51T25259Y03 | BA00ASFP-E2 -NE5     |            |
| FRONT-P.W.Board |     | <a href="#">IC9400</a> | 51-10494Z01 | KIA393F-EL -SE2      |            |
| FRONT-P.W.Board |     | <a href="#">IC9401</a> | 51-02203Z01 | OZ964ISN-L -SE5      |            |
| FRONT-P.W.Board |     | <a href="#">IC9402</a> | 51T25183Y03 | TC7SET08FU,JF-L -CP  |            |
| FRONT-P.W.Board |     | <a href="#">IC9520</a> | 51-04637Z01 | TC74ACT04FT-EL -SE5  |            |
| FRONT-P.W.Board |     | <a href="#">IC9700</a> | 51-14439Z01 | TL2276MT -QT         |            |
| FRONT-P.W.Board |     | <a href="#">IC9800</a> | 51T25576W07 | NJM4580V-TE2 -SE2    |            |
| FRONT-P.W.Board |     | <a href="#">L8000</a>  | 24T95456W07 | FBI,BLM18BD102SH1-CP |            |
| FRONT-P.W.Board |     | <a href="#">L8002</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |            |
| FRONT-P.W.Board |     | <a href="#">L8300</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |            |
| FRONT-P.W.Board |     | <a href="#">L8301</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |            |
| FRONT-P.W.Board |     | <a href="#">L8302</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |            |
| FRONT-P.W.Board |     | <a href="#">L8303</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |            |
| FRONT-P.W.Board |     | <a href="#">L8400</a>  | 24-02145Z07 | IND,NLCV32T 10RK -CP |            |
| FRONT-P.W.Board |     | <a href="#">L8401</a>  | 24-02145Z08 | IND,NLCV32T 15RK -CP |            |
| FRONT-P.W.Board |     | <a href="#">L8402</a>  | 24-02145Z08 | IND,NLCV32T 15RK -CP |            |
| FRONT-P.W.Board |     | <a href="#">L8403</a>  | 24T45379Y06 | IND,D53LC 10RM -E2   |            |
| FRONT-P.W.Board |     | <a href="#">L9701</a>  | 24-06212Z02 | FBI,BLM15AG102SH1-CP |            |
| FRONT-P.W.Board |     | <a href="#">Q8001</a>  | 48-07989Z01 | TR,UNR5211J-TX -CP   |            |
| FRONT-P.W.Board |     | <a href="#">Q8002</a>  | 48T52438F01 | TR,2SD0601ARB-RSTXCP |            |
| FRONT-P.W.Board |     | <a href="#">Q8400</a>  | 48-07989Z02 | TR,UNR5212J-TX -CP   |            |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL                 | Ref.        | Parts No.            | Parts Name |
|-----------------|-----|-----------------------|-------------|----------------------|------------|
| FRONT-P.W.Board |     | <a href="#">Q8401</a> | 48T73022F01 | TR ,2SB766A -E2      |            |
| FRONT-P.W.Board |     | <a href="#">Q8402</a> | 48-02302Z02 | TR,XP0331200L -CP    |            |
| FRONT-P.W.Board |     | <a href="#">Q8403</a> | 48-02302Z02 | TR,XP0331200L -CP    |            |
| FRONT-P.W.Board |     | <a href="#">Q8404</a> | 48-09590Z01 | TR,MMBTA06-RTK -CP   |            |
| FRONT-P.W.Board |     | <a href="#">Q8500</a> | 48-15523Z02 | TR,BC817-40-RTK -CP  |            |
| FRONT-P.W.Board |     | <a href="#">Q8501</a> | 48-15523Z02 | TR,BC817-40-RTK -CP  |            |
| FRONT-P.W.Board |     | <a href="#">Q8502</a> | 48-07987Z02 | TR,UNR5112J-TX -CP   |            |
| FRONT-P.W.Board |     | <a href="#">Q8503</a> | 48-09581Z03 | TR,KTA1505S-Y-RTK-CP |            |
| FRONT-P.W.Board |     | <a href="#">Q8504</a> | 48-09581Z03 | TR,KTA1505S-Y-RTK-CP |            |
| FRONT-P.W.Board |     | <a href="#">Q8900</a> | 48T63788F01 | TR2SD13280RB-RSTTXCP |            |
| FRONT-P.W.Board |     | <a href="#">Q9400</a> | 48T75460Y01 | FET,SP8M3-TB -E2     |            |
| FRONT-P.W.Board |     | <a href="#">Q9401</a> | 48T94582F01 | TR,2SC4081-Q -CP     |            |
| FRONT-P.W.Board |     | <a href="#">Q9402</a> | 48-07989Z03 | TR,UNR5213J-TX -CP   |            |
| FRONT-P.W.Board |     | <a href="#">Q9403</a> | 48T75460Y01 | FET,SP8M3-TB -E2     |            |
| FRONT-P.W.Board |     | <a href="#">Q9520</a> | 48-11160Z01 | TR,2SC5950G0L-TX -CP |            |
| FRONT-P.W.Board |     | <a href="#">Q9800</a> | 48T73023F01 | TR ,2SD874A -E2      |            |
| FRONT-P.W.Board |     | <a href="#">Q9801</a> | 48T73022F01 | TR ,2SB766A -E2      |            |
| FRONT-P.W.Board |     | <a href="#">R8012</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8013</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8014</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8015</a> | 06S15593Y33 | RES,RK 221F 1/10 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8016</a> | 06S15593Y31 | RES,RK 181F 1/10 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8018</a> | 06S15593Y46 | RES,RK 751F 1/10 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8019</a> | 06S15593Y49 | RES,RK 102F 1/10 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8020</a> | 06S15615Y41 | RES,RK 471J 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8051</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8056</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8057</a> | 06S15593Y45 | RES,RK 681F 1/10 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8058</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8059</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8060</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8063</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8064</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8067</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8068</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8069</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8070</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8071</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8072</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8073</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |            |
| FRONT-P.W.Board |     | <a href="#">R8074</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8076</a> | 06S65415Y21 | RES,RK 471F 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8077</a> | 06S65415Y21 | RES,RK 471F 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8078</a> | 06S65415Y34 | RES,RK 562F 1/16 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8079</a> | 06S15593Y75 | RES,RK 123F 1/10 -CP |            |
| FRONT-P.W.Board |     | <a href="#">R8080</a> | 06S65415Y39 | RES,RK 153F 1/16 -CP |            |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| FRONT-P.W.Board |     |       | <a href="#">R8082</a> | 06S65415Y38 | RES,RK 123F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8084</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8085</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8087</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8089</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8090</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8093</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8096</a> | 06S55365Y29 | RES,RK 33RJ 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8097</a> | 06S55365Y29 | RES,RK 33RJ 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8098</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R8099</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R8101</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8122</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R8124</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R8130</a> | 06S15615Y89 | RES,RK 473J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8131</a> | 06S15615Y89 | RES,RK 473J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8132</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R8143</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8144</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8145</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8146</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8147</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8233</a> | 06S15593Y13 | RES,RK 33RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8234</a> | 06S15593Y13 | RES,RK 33RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8238</a> | 06S15593Y13 | RES,RK 33RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8239</a> | 06S15593Y13 | RES,RK 33RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8300</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8301</a> | 06S15615Y49 | RES,RK 102J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8302</a> | 06S15615Y59 | RES,RK 272J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8303</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8304</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8305</a> | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8309</a> | 06S15615Y29 | RES,RK 151J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8310</a> | 06S15615Y29 | RES,RK 151J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8311</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8312</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8313</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8314</a> | 06S15615Y41 | RES,RK 471J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8400</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8401</a> | 06S55365Y99 | RES,RK 273J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8402</a> | 06S55365Y81 | RES,RK 472J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8403</a> | 06S15593Y77 | RES,RK 153F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8404</a> | 06S15594Y16 | RES,RK 564F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8405</a> | 06S15594Y10 | RES,RK 334F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8406</a> | 06S15593Y89 | RES,RK 473F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8407</a> | 06S15593Y75 | RES,RK 123F 1/10 -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| FRONT-P.W.Board |     |       | <a href="#">R8408</a> | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8409</a> | 06S70072F99 | RES,RK 273J 1/4 -CP  |
| FRONT-P.W.Board |     |       | <a href="#">R8410</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8411</a> | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8412</a> | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8450</a> | 06S15593Y61 | RES,RK 332F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8460</a> | 06S15593Y55 | RES,RK 182F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8461</a> | 06S70072F71 | RES,CP .562-J-1/4-CP |
| FRONT-P.W.Board |     |       | <a href="#">R8462</a> | 06S15593Y77 | RES,RK 153F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8463</a> | 06S15593Y43 | RES,RK 561F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8500</a> | 06S15593Y09 | RES,RK 22RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8501</a> | 06S15593Y97 | RES,RK 104F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8502</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8503</a> | 06S15593Y97 | RES,RK 104F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8504</a> | 06S15593Y01 | RES,RK 10RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8505</a> | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8506</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8507</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8508</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8509</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8510</a> | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8511</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8512</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8513</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8514</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8515</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8516</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8517</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8518</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8519</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8700</a> | 06S70072F71 | RES,CP .562-J-1/4-CP |
| FRONT-P.W.Board |     |       | <a href="#">R8701</a> | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8702</a> | 06S15593Y56 | RES,RK 202F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8703</a> | 06S15593Y32 | RES,RK 201F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8720</a> | 06S15593Y53 | RES,RK 152F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8721</a> | 06S70072F71 | RES,CP .562-J-1/4-CP |
| FRONT-P.W.Board |     |       | <a href="#">R8722</a> | 06S15593Y61 | RES,RK 332F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8724</a> | 06S15593Y41 | RES,RK 471F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8900</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8901</a> | 06S55365Y81 | RES,RK 472J 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R8902</a> | 06S15594Y23 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9001</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9020</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9025</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9026</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9027</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| FRONT-P.W.Board |     |       | <a href="#">R9030</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9034</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9036</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9400</a> | 06S15593Y80 | RES,RK 203F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9401</a> | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9402</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9403</a> | 06S15593Y09 | RES,RK 22RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9404</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9405</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9406</a> | 06S15593Y77 | RES,RK 153F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9407</a> | 06S15593Y97 | RES,RK 104F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9408</a> | 06S15593Y77 | RES,RK 153F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9409</a> | 06S15593Y95 | RES,RK 823F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9411</a> | 06S15593Y90 | RES,RK 513F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9412</a> | 06S15593Y82 | RES,RK 243F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9413</a> | 06S15593Y90 | RES,RK 513F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9414</a> | 06S15593Y61 | RES,RK 332F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9415</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9416</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9417</a> | 06S15594Y22 | RES,RK 105F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9418</a> | 06S15593Y19 | RES,RK 56RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9419</a> | 06S15593Y39 | RES,RK 391F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9420</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9423</a> | 06S15593Y82 | RES,RK 243F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9424</a> | 06S15593Y97 | RES,RK 104F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9425</a> | 06S15593Y66 | RES,RK 512F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9520</a> | 06S15615Y73 | RES,RK 103J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9521</a> | 06S15615Y65 | RES,RK 472J 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9522</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9523</a> | 06S15593Y27 | RES,RK 121F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9524</a> | 06S15593Y35 | RES,RK 271F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9525</a> | 06S15593Y01 | RES,RK 10RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9526</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9527</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9528</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9529</a> | 06S15593Y17 | RES,RK 47RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9530</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9531</a> | 06S15593Y17 | RES,RK 47RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9532</a> | 06S15593Y17 | RES,RK 47RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9533</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9534</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9535</a> | 06S15593Y17 | RES,RK 47RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9536</a> | 06S15593Y21 | RES,RK 68RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9537</a> | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9538</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9539</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----|-------|-----------------------|-------------|----------------------|
| FRONT-P.W.Board |     |       | <a href="#">R9540</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9541</a> | 06S15593Y27 | RES,RK 121F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9542</a> | 06S15593Y01 | RES,RK 10RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9543</a> | 06S15593Y39 | RES,RK 391F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9544</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9545</a> | 06S15593Y21 | RES,RK 68RF 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9546</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9702</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9703</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9704</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9705</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9707</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9714</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9717</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9719</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9720</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9722</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9724</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9725</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9726</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9728</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9729</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9730</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9731</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9732</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9733</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9734</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9735</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9737</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9738</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9739</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9740</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9741</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9742</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9743</a> | 06S15616Y23 | RES,RK JUMPER1/16-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9745</a> | 06S15615Y19 | RES,RK 56RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9746</a> | 06S65415Y25 | RES,RK 102F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9747</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9748</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9749</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9750</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9751</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9752</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9753</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9754</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9755</a> | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-----|-------|------------------------|-------------|----------------------|
| FRONT-P.W.Board |     |       | <a href="#">R9756</a>  | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9757</a>  | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9758</a>  | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9759</a>  | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9760</a>  | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9761</a>  | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9762</a>  | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9763</a>  | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9764</a>  | 06S15615Y13 | RES,RK 33RJ 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9765</a>  | 06S65415Y19 | RES,RK 331F 1/16 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9800</a>  | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9801</a>  | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9802</a>  | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9803</a>  | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9804</a>  | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9805</a>  | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9806</a>  | 06S70072F13 | RES,CP .22R-J-1/4-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9807</a>  | 06S70072F13 | RES,CP .22R-J-1/4-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9810</a>  | 06S15593Y79 | RES,RK 183F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9811</a>  | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9812</a>  | 06S15594Y23 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9813</a>  | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">R9814</a>  | 06S15593Y25 | RES,RK 101F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9815</a>  | 06S15593Y63 | RES,RK 392F 1/10 -CP |
| FRONT-P.W.Board |     |       | <a href="#">R9816</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8001</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8002</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8003</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8004</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8006</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8007</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8008</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8009</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8010</a> | 06S15771Y11 | RES,ARYEXB28V68RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8011</a> | 06S15771Y11 | RES,ARYEXB28V68RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8012</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8013</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8014</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8015</a> | 06S15771Y07 | RES,ARYEXB28V33RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8016</a> | 06S15771Y11 | RES,ARYEXB28V68RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8018</a> | 06S15771Y37 | RES,ARYEXB28V103J-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8019</a> | 06S15771Y37 | RES,ARYEXB28V103J-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8020</a> | 06S15771Y11 | RES,ARYEXB28V68RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8250</a> | 06S15771Y11 | RES,ARYEXB28V68RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8251</a> | 06S15771Y11 | RES,ARYEXB28V68RJ-CP |
| FRONT-P.W.Board |     |       | <a href="#">RA8252</a> | 06S15771Y11 | RES,ARYEXB28V68RJ-CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL                  | Ref.        | Parts No.            | Parts Name |
|-----------------|-----|------------------------|-------------|----------------------|------------|
| FRONT-P.W.Board |     | <a href="#">RA8253</a> | 06S15771Y11 | RES,ARYEXB28V68RJ-CP |            |
| FRONT-P.W.Board |     | <a href="#">RA8300</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |            |
| FRONT-P.W.Board |     | <a href="#">RA8301</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |            |
| FRONT-P.W.Board |     | <a href="#">RA8302</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |            |
| FRONT-P.W.Board |     | <a href="#">RA8303</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |            |
| FRONT-P.W.Board |     | <a href="#">RA8304</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |            |
| FRONT-P.W.Board |     | <a href="#">RA8305</a> | 06S15771Y13 | RES,ARYEXB28V101J-CP |            |
| FRONT-P.W.Board |     | <a href="#">T9400</a>  | 25-05839Z01 | TRANS,ETJV18ZE3GAB-T |            |
| FRONT-P.W.Board |     | <a href="#">TH8450</a> | 48T25250Y06 | TMT,ERTJ1VR223G -CP  |            |
| FRONT-P.W.Board |     | <a href="#">VR9800</a> | 18T25282Y18 | VAR,EVM3VSX50 103-CP |            |
| FRONT-P.W.Board |     | <a href="#">VR9801</a> | 18T25282Y18 | VAR,EVM3VSX50 103-CP |            |
| FRONT-P.W.Board |     | <a href="#">XL8000</a> | 91-15685Z01 | XTL,XX 33.0M -CP     |            |
| FRONT-P.W.Board |     | <a href="#">XL8001</a> | 91T65170Y06 | XTL,2725T 8.0000M-E2 |            |
| FRONT-P.W.Board |     | <a href="#">Z8100</a>  | 91T15509Y08 | EMI,BK1608HM102 -CP  |            |
| FRONT-P.W.Board |     | <a href="#">Z8101</a>  | 91T15509Y08 | EMI,BK1608HM102 -CP  |            |
| FRONT-P.W.Board |     | <a href="#">Z8102</a>  | 91T15509Y08 | EMI,BK1608HM102 -CP  |            |
| FRONT-P.W.Board |     | <a href="#">ZD8500</a> | 48-11191Z24 | DIO,ZEN MAZ8056GH-CP |            |
| FRONT-P.W.Board |     | <a href="#">ZD8501</a> | 48-11191Z24 | DIO,ZEN MAZ8056GH-CP |            |
| FRONT-P.W.Board |     | <a href="#">ZD9400</a> | 48-11191Z23 | DIO,ZEN MAZ8056GM-CP |            |
| FRONT-P.W.Board |     | <a href="#">ZD9401</a> | 48-11191Z23 | DIO,ZEN MAZ8056GM-CP |            |
| BT-P.W.Board    |     | <a href="#">C501</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| BT-P.W.Board    |     | <a href="#">C502</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| BT-P.W.Board    |     | <a href="#">C503</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| BT-P.W.Board    |     | <a href="#">C504</a>   | 08S35349Y16 | CAP,CER 105K-B1A -CP |            |
| BT-P.W.Board    |     | <a href="#">C505</a>   | 08S45232Y17 | CAP,CER 104K-B0J -CP |            |
| BT-P.W.Board    |     | <a href="#">C506</a>   | 08S45676W89 | CAP,CER 473K-B1E -CP |            |
| BT-P.W.Board    |     | <a href="#">C507</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |            |
| BT-P.W.Board    |     | <a href="#">C509</a>   | 08S45232Y17 | CAP,CER 104K-B0J -CP |            |
| BT-P.W.Board    |     | <a href="#">C510</a>   | 08S45677W22 | CAP,CER.27RJ-CH1H-CP |            |
| BT-P.W.Board    |     | <a href="#">C511</a>   | 08S45677W22 | CAP,CER.27RJ-CH1H-CP |            |
| BT-P.W.Board    |     | <a href="#">C512</a>   | 08T65463Y02 | CAP,CER 334K-B1H -CP |            |
| BT-P.W.Board    |     | <a href="#">C514</a>   | 08S35374W07 | CAP,CER 334K-B1C -CP |            |
| BT-P.W.Board    |     | <a href="#">C515</a>   | 08S65667Y05 | CAP,CER 105KX5R1A-CP |            |
| BT-P.W.Board    |     | <a href="#">C516</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| BT-P.W.Board    |     | <a href="#">C801</a>   | 08S65128F90 | CAP,CER 473K-B1H -CP |            |
| BT-P.W.Board    |     | <a href="#">C802</a>   | 08S45539Y02 | CAP,CER 222KX7R2J-CP |            |
| BT-P.W.Board    |     | <a href="#">C803</a>   | 08S65128F78 | CAP,CER.223K-B1H -CP |            |
| BT-P.W.Board    |     | <a href="#">C805</a>   | 08S35349Y21 | CAP,CER 104K-B1H -CP |            |
| BT-P.W.Board    |     | <a href="#">C807</a>   | 08S45676W73 | CAP,CER.103K-B1H -CP |            |
| BT-P.W.Board    |     | <a href="#">C808</a>   | 08S35349Y21 | CAP,CER 104K-B1H -CP |            |
| BT-P.W.Board    |     | <a href="#">C811</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| BT-P.W.Board    |     | <a href="#">C812</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |            |
| BT-P.W.Board    |     | <a href="#">C820</a>   | 08S45539Y02 | CAP,CER 222KX7R2J-CP |            |
| BT-P.W.Board    |     | <a href="#">C822</a>   | 08S45232Y05 | CAP,CER 102K-B1H -CP |            |
| BT-P.W.Board    |     | <a href="#">C823</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |            |
| BT-P.W.Board    |     | <a href="#">C901</a>   | 08S45232Y05 | CAP,CER 102K-B1H -CP |            |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board    | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|--------------|-----|-------|-----------------------|-------------|----------------------|
| BT-P.W.Board |     |       | <a href="#">C902</a>  | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| BT-P.W.Board |     |       | <a href="#">C903</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| BT-P.W.Board |     |       | <a href="#">C905</a>  | 08S45677W38 | CAP,CER 121J-CH1H-CP |
| BT-P.W.Board |     |       | <a href="#">C906</a>  | 08S45677W38 | CAP,CER 121J-CH1H-CP |
| BT-P.W.Board |     |       | <a href="#">C907</a>  | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| BT-P.W.Board |     |       | <a href="#">C908</a>  | 08S45677W44 | CAP,CER.221J-CH1H-CP |
| BT-P.W.Board |     |       | <a href="#">C909</a>  | 08S45677W38 | CAP,CER 121J-CH1H-CP |
| BT-P.W.Board |     |       | <a href="#">C910</a>  | 08S45677W38 | CAP,CER 121J-CH1H-CP |
| BT-P.W.Board |     |       | <a href="#">C912</a>  | 08S45232Y17 | CAP,CER 104K-B0J -CP |
| BT-P.W.Board |     |       | <a href="#">C913</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| BT-P.W.Board |     |       | <a href="#">C914</a>  | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| BT-P.W.Board |     |       | <a href="#">C915</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| BT-P.W.Board |     |       | <a href="#">C916</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP |
| BT-P.W.Board |     |       | <a href="#">C917</a>  | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| BT-P.W.Board |     |       | <a href="#">C918</a>  | 08S45232Y13 | CAP,CER 223K-B1C -CP |
| BT-P.W.Board |     |       | <a href="#">C919</a>  | 08S45232Y13 | CAP,CER 223K-B1C -CP |
| BT-P.W.Board |     |       | <a href="#">C920</a>  | 08S45676W85 | CAP,CER 104K-B1C -CP |
| BT-P.W.Board |     |       | <a href="#">C921</a>  | 08S45231Y25 | CAP,CER 101J-CH1H-CP |
| BT-P.W.Board |     |       | <a href="#">C922</a>  | 08S45231Y25 | CAP,CER 101J-CH1H-CP |
| BT-P.W.Board |     |       | <a href="#">C924</a>  | 08S45232Y05 | CAP,CER 102K-B1H -CP |
| BT-P.W.Board |     |       | <a href="#">C925</a>  | 08S45232Y06 | CAP,CER 152K-B1H -CP |
| BT-P.W.Board |     |       | <a href="#">C926</a>  | 08S35349Y21 | CAP,CER 104K-B1H -CP |
| BT-P.W.Board |     |       | <a href="#">C927</a>  | 08S35349Y16 | CAP,CER 105K-B1A -CP |
| BT-P.W.Board |     |       | <a href="#">C928</a>  | 08S45676W93 | CAP,CER 224K-B1A -CP |
| BT-P.W.Board |     |       | <a href="#">CB801</a> | 09-01509Z06 | WTB,BM15B-GHS -ES    |
| BT-P.W.Board |     |       | <a href="#">CB901</a> | 09-14573Z01 | BTB,40P10.0-JMCS-GE9 |
| BT-P.W.Board |     |       | <a href="#">D501</a>  | 48T75527Y01 | DIO,1SR154-400 -E1   |
| BT-P.W.Board |     |       | <a href="#">D801</a>  | 48-07015Z01 | DIO,KDS160-RTK -CP   |
| BT-P.W.Board |     |       | <a href="#">D802</a>  | 48T75527Y01 | DIO,1SR154-400 -E1   |
| BT-P.W.Board |     |       | <a href="#">D901</a>  | 48-06707Z01 | DIO,MA3J147-TX -CP   |
| BT-P.W.Board |     |       | <a href="#">E301</a>  | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| BT-P.W.Board |     |       | <a href="#">E302</a>  | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| BT-P.W.Board |     |       | <a href="#">E501</a>  | 23T65114Y02 | CAP,FK 221-1C-E -E6  |
| BT-P.W.Board |     |       | <a href="#">E502</a>  | 23T65114Y37 | CAP,FK 101-1V-D8-E6  |
| BT-P.W.Board |     |       | <a href="#">E503</a>  | 23T65114Y21 | CAP,FK 221-1C-D8-E6  |
| BT-P.W.Board |     |       | <a href="#">E801</a>  | 23T65114Y38 | CAP,FK 221-1V-F -EA  |
| BT-P.W.Board |     |       | <a href="#">E802</a>  | 23S65134W24 | CAP,ELY 221-1A(8)-E6 |
| BT-P.W.Board |     |       | <a href="#">E803</a>  | 23T65114Y37 | CAP,FK 101-1V-D8-E6  |
| BT-P.W.Board |     |       | <a href="#">E804</a>  | 23S65134W13 | CAP,ELY 101-0J(6)-E6 |
| BT-P.W.Board |     |       | <a href="#">E805</a>  | 23T65114Y07 | CAP,FK 331-0J-D8-E6  |
| BT-P.W.Board |     |       | <a href="#">E901</a>  | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| BT-P.W.Board |     |       | <a href="#">E902</a>  | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| BT-P.W.Board |     |       | <a href="#">E903</a>  | 23S65134W11 | CAP,ELY 22R-0J(4)-E2 |
| BT-P.W.Board |     |       | <a href="#">IC501</a> | 51-04315Z01 | BU4228G-TR -CP       |
| BT-P.W.Board |     |       | <a href="#">IC503</a> | 83-16494Z06 | V1.01DMSH_BT         |
| BT-P.W.Board |     |       | <a href="#">IC504</a> | 51-02830Z01 | BA7810HFP -NEA       |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board    | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|--------------|-----|-------|-----------------------|-------------|----------------------|
| BT-P.W.Board |     |       | <a href="#">IC506</a> | 51-02830Z01 | BA7810HFP -NEA       |
| BT-P.W.Board |     |       | <a href="#">IC507</a> | 51T15185Y02 | TC7SH08FU,JF-L -CP   |
| BT-P.W.Board |     |       | <a href="#">IC801</a> | 51T25711Y01 | BA033SFP-E2 -NE5     |
| BT-P.W.Board |     |       | <a href="#">IC802</a> | 51T25259Y03 | BA00ASFP-E2 -NE5     |
| BT-P.W.Board |     |       | <a href="#">IC803</a> | 51T25259Y03 | BA00ASFP-E2 -NE5     |
| BT-P.W.Board |     |       | <a href="#">IC805</a> | 51T65016Y46 | S-80960CNMC-T2 -CP   |
| BT-P.W.Board |     |       | <a href="#">IC901</a> | 51-06822Z01 | NJM2115V-TE1 -SE2    |
| BT-P.W.Board |     |       | <a href="#">IC903</a> | 51-09404Z01 | PCM1754DBQR -SE2     |
| BT-P.W.Board |     |       | <a href="#">L901</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP |
| BT-P.W.Board |     |       | <a href="#">L902</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP |
| BT-P.W.Board |     |       | <a href="#">Q801</a>  | 48-04929Z01 | TR,KRC101S-RTK -CP   |
| BT-P.W.Board |     |       | <a href="#">Q802</a>  | 48-02302Z02 | TR,XP0331200L -CP    |
| BT-P.W.Board |     |       | <a href="#">R301</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| BT-P.W.Board |     |       | <a href="#">R302</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| BT-P.W.Board |     |       | <a href="#">R303</a>  | 06S64995F05 | RES,RK 10RJ 1/8 -CP  |
| BT-P.W.Board |     |       | <a href="#">R304</a>  | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| BT-P.W.Board |     |       | <a href="#">R305</a>  | 06S55366Y09 | RES,RK 623J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R306</a>  | 06S55366Y09 | RES,RK 623J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R307</a>  | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| BT-P.W.Board |     |       | <a href="#">R308</a>  | 06S64995F05 | RES,RK 10RJ 1/8 -CP  |
| BT-P.W.Board |     |       | <a href="#">R501</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R502</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R503</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R504</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R505</a>  | 06S45674W57 | RES,RK 102J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R506</a>  | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R507</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R508</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R509</a>  | 06S55365Y89 | RES,RK 103J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R510</a>  | 06S15593Y77 | RES,RK 153F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R519</a>  | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R520</a>  | 06S15593Y49 | RES,RK 102F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R523</a>  | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R524</a>  | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R525</a>  | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R527</a>  | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R528</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R529</a>  | 06S55366Y14 | RES,RK 104J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R530</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R531</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R533</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R534</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R535</a>  | 06S55365Y89 | RES,RK 103J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R536</a>  | 06S15593Y79 | RES,RK 183F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R537</a>  | 06S15593Y39 | RES,RK 391F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R538</a>  | 06S15593Y57 | RES,RK 222F 1/10 -CP |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board    | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|--------------|-----|-------|-----------------------|-------------|----------------------|
| BT-P.W.Board |     |       | <a href="#">R539</a>  | 06S55366Y27 | RES,RK 364J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R544</a>  | 06S15593Y71 | RES,RK 822F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R545</a>  | 06S15593Y34 | RES,RK 241F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R546</a>  | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R555</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| BT-P.W.Board |     |       | <a href="#">R801</a>  | 06S55361Y89 | RES,RK 103J 1/4 -CP  |
| BT-P.W.Board |     |       | <a href="#">R802</a>  | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| BT-P.W.Board |     |       | <a href="#">R803</a>  | 06S15593Y53 | RES,RK 152F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R804</a>  | 06S15593Y65 | RES,RK 472F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R805</a>  | 06S45675W10 | RES,RK 154J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R810</a>  | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R812</a>  | 06S15593Y79 | RES,RK 183F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R814</a>  | 06S55361Y97 | RES,RK 223J 1/4 -CP  |
| BT-P.W.Board |     |       | <a href="#">R823</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| BT-P.W.Board |     |       | <a href="#">R824</a>  | 06S15593Y53 | RES,RK 152F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R826</a>  | 06S65415Y59 | RES,RK 684F 1/16 -CP |
| BT-P.W.Board |     |       | <a href="#">R827</a>  | 06S45348Y38 | RES,RK 474F 1/4 -CP  |
| BT-P.W.Board |     |       | <a href="#">R828</a>  | 06S45348Y23 | RES,RK 753F 1/4 -CP  |
| BT-P.W.Board |     |       | <a href="#">R901</a>  | 06S55365Y73 | RES,RK 222J 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R902</a>  | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R905</a>  | 06S15593Y68 | RES,RK 622F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R906</a>  | 06S15593Y68 | RES,RK 622F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R907</a>  | 06S15593Y83 | RES,RK 273F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R908</a>  | 06S15593Y83 | RES,RK 273F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R909</a>  | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R910</a>  | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R911</a>  | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R912</a>  | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R913</a>  | 06S15593Y85 | RES,RK 333F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R914</a>  | 06S15593Y85 | RES,RK 333F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R915</a>  | 06S15593Y59 | RES,RK 272F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R916</a>  | 06S15593Y59 | RES,RK 272F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R917</a>  | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R918</a>  | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R919</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| BT-P.W.Board |     |       | <a href="#">R920</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| BT-P.W.Board |     |       | <a href="#">R921</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| BT-P.W.Board |     |       | <a href="#">R922</a>  | 06S15615Y25 | RES,RK 101J 1/16 -CP |
| BT-P.W.Board |     |       | <a href="#">R923</a>  | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| BT-P.W.Board |     |       | <a href="#">R924</a>  | 06S15615Y89 | RES,RK 473J 1/16 -CP |
| BT-P.W.Board |     |       | <a href="#">R925</a>  | 06S15615Y89 | RES,RK 473J 1/16 -CP |
| BT-P.W.Board |     |       | <a href="#">R926</a>  | 06S55361Y41 | RES,RK 101J 1/4 -CP  |
| BT-P.W.Board |     |       | <a href="#">R927</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| BT-P.W.Board |     |       | <a href="#">R928</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| BT-P.W.Board |     |       | <a href="#">SD801</a> | 48-12529Z01 | DIO,SHT MA2SD32 -CP  |
| BT-P.W.Board |     |       | <a href="#">XL501</a> | 91-12380Z02 | XTL,XJ 5.000M -E9    |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board    | MIS                                                                                 | MODEL | Ref.                   | Parts No.   | Parts Name            |
|--------------|-------------------------------------------------------------------------------------|-------|------------------------|-------------|-----------------------|
| BT-P.W.Board |                                                                                     |       | <a href="#">ZD803</a>  | 48-11191Z43 | DIO,ZEN MAZ8110GL-CP  |
| BT-P.W.Board |                                                                                     |       | <a href="#">ZD901</a>  | 48-11191Z09 | DIO,ZEN MAZ8036GL-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">C9200</a>  | 08S35374W12 | CAP,CER 106K-B0J -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">C9250</a>  | 08S45676W84 | CAP,CER 683K-B1C -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">C9251</a>  | 08S35349Y12 | CAP,CER 105K-B0J -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">CB9001</a> | 09T45391Y13 | FFC,IMSA9632S-13Y-E9  |
| SW-P.W.Board |                                                                                     |       | <a href="#">D9200</a>  | 48-06707Z01 | DIO,MA3J147-TX -CP    |
| SW-P.W.Board |                                                                                     |       | <a href="#">IC9200</a> | 51-11731Z01 | RPMS2381-H19-E4A-NE5  |
| SW-P.W.Board |                                                                                     |       | <a href="#">IC9250</a> | 51T75076Y01 | TPS851 -CP            |
| SW-P.W.Board |                                                                                     |       | <a href="#">LD9300</a> | 48-15702Z01 | LED,BLU SCM015BC7TCP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">LD9301</a> | 48-15702Z01 | LED,BLU SCM015BC7TCP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">LD9302</a> | 48-15702Z01 | LED,BLU SCM015BC7TCP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">LD9303</a> | 48-15702Z01 | LED,BLU SCM015BC7TCP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">LD9304</a> | 48-15702Z01 | LED,BLU SCM015BC7TCP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">LD9305</a> | 48-15702Z01 | LED,BLU SCM015BC7TCP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">LD9306</a> | 48-15702Z01 | LED,BLU SCM015BC7TCP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">LD9307</a> | 48-15702Z01 | LED,BLU SCM015BC7TCP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9100</a>  | 06S15594Y23 | RES,RK JUMPER1/10-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9102</a>  | 06S15593Y75 | RES,RK 123F 1/10 -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9103</a>  | 06S15593Y51 | RES,RK 122F 1/10 -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9104</a>  | 06S15593Y57 | RES,RK 222F 1/10 -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9105</a>  | 06S15593Y53 | RES,RK 152F 1/10 -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9106</a>  | 06S15593Y61 | RES,RK 332F 1/10 -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9107</a>  | 06S15593Y67 | RES,RK 562F 1/10 -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9200</a>  | 06S64995F21 | RES,RK 47RJ 1/8 -CP   |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9201</a>  | 06S45674W57 | RES,RK 102J 1/10 -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9250</a>  | 06S64995F21 | RES,RK 47RJ 1/8 -CP   |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9251</a>  | 06S45675W34 | RES,RK 225J 1/10 -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9252</a>  | 06S45674W57 | RES,RK 102J 1/10 -CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9300</a>  | 06S70072F50 | RES,CP .751-J-1/4-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9301</a>  | 06S70072F46 | RES,CP .511-J-1/4-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9302</a>  | 06S70072F51 | RES,CP .821-J-1/4-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">R9303</a>  | 06S70072F50 | RES,CP .751-J-1/4-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">SW9100</a> | 40T65353Y01 | SW,TACT SKRSPACE010E2 |
| SW-P.W.Board |                                                                                     |       | <a href="#">SW9101</a> | 40T65353Y01 | SW,TACT SKRSPACE010E2 |
| SW-P.W.Board |                                                                                     |       | <a href="#">SW9102</a> | 40T65353Y01 | SW,TACT SKRSPACE010E2 |
| SW-P.W.Board |                                                                                     |       | <a href="#">SW9103</a> | 40T65353Y01 | SW,TACT SKRSPACE010E2 |
| SW-P.W.Board |                                                                                     |       | <a href="#">SW9104</a> | 40T65353Y01 | SW,TACT SKRSPACE010E2 |
| SW-P.W.Board |                                                                                     |       | <a href="#">SW9105</a> | 40T65353Y01 | SW,TACT SKRSPACE010E2 |
| SW-P.W.Board |                                                                                     |       | <a href="#">SW9106</a> | 40T65353Y01 | SW,TACT SKRSPACE010E2 |
| SW-P.W.Board |  |       | <a href="#">SW9107</a> | 40T65353Y01 | SW,TACT SKRSPACE010E2 |
| SW-P.W.Board |                                                                                     |       | <a href="#">ZD9300</a> | 48T15541Y44 | DIO,ZEN MAZS0430H-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">ZD9301</a> | 48T15541Y44 | DIO,ZEN MAZS0430H-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">ZD9302</a> | 48T15541Y44 | DIO,ZEN MAZS0430H-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">ZD9303</a> | 48T15541Y44 | DIO,ZEN MAZS0430H-CP  |
| SW-P.W.Board |                                                                                     |       | <a href="#">ZD9304</a> | 48T15541Y44 | DIO,ZEN MAZS0430H-CP  |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board     | MIS                                                                               | MODEL | Ref.                    | Parts No.   | Parts Name           |
|---------------|-----------------------------------------------------------------------------------|-------|-------------------------|-------------|----------------------|
| SW-P.W.Board  |                                                                                   |       | <a href="#">ZD9305</a>  | 48T15541Y44 | DIO,ZEN MAZS0430H-CP |
| SW-P.W.Board  |                                                                                   |       | <a href="#">ZD9306</a>  | 48T15541Y44 | DIO,ZEN MAZS0430H-CP |
| SW-P.W.Board  |                                                                                   |       | <a href="#">ZD9307</a>  | 48T15541Y44 | DIO,ZEN MAZS0430H-CP |
| Miscellaneous |                                                                                   |       | <a href="#">CH5100</a>  | 09-16608Z01 | ASSY,ANID-0111-01A   |
| Miscellaneous |  |       | <a href="#">ET8500</a>  | 40-14616Z01 | ASSY,EMU601G2A619    |
| Miscellaneous |  |       | <a href="#">ET901</a>   | 51-14554Z01 | ASSY,CK5050+PF240013 |
| Miscellaneous |  |       | <a href="#">LCD9000</a> | 65-14268Z01 | ASSY,LB070WQ6-TD01   |

Mark Model Code

#1 iXA-W407 Only,


\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.


NOTE:The part that has not PART NUMBER will not be supplied.

# Exploded View (Cabinet) (1/3)

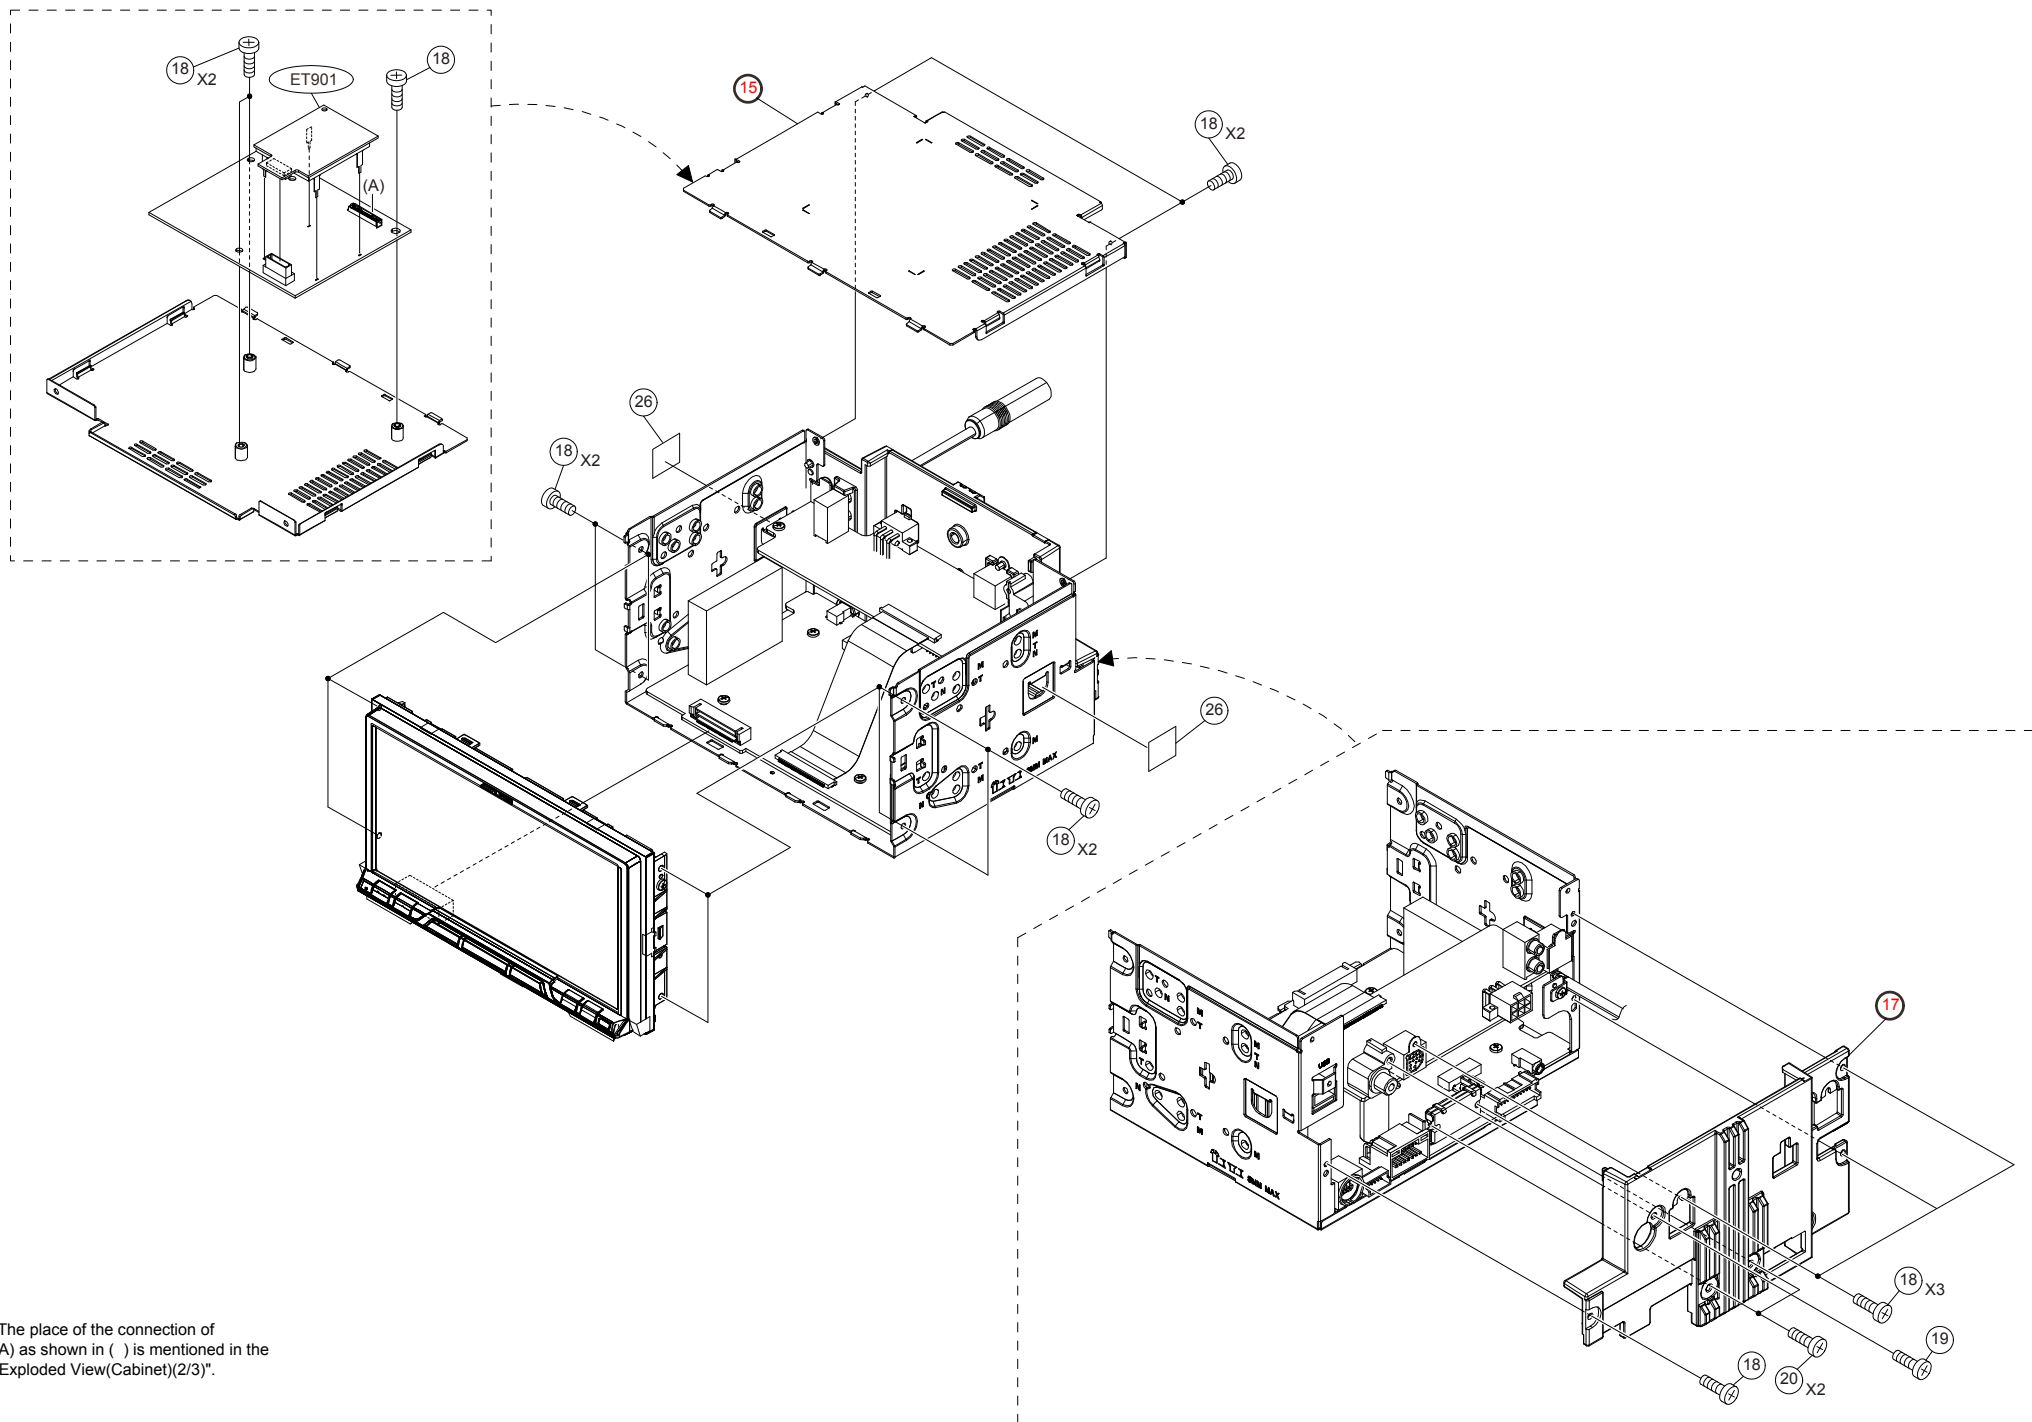


NOTE: The place of the connection of (A) as shown in ( ) is mentioned in the "Exploded View(Cabinet)(2/3)".

# Exploded View (Cabinet) (2/3)

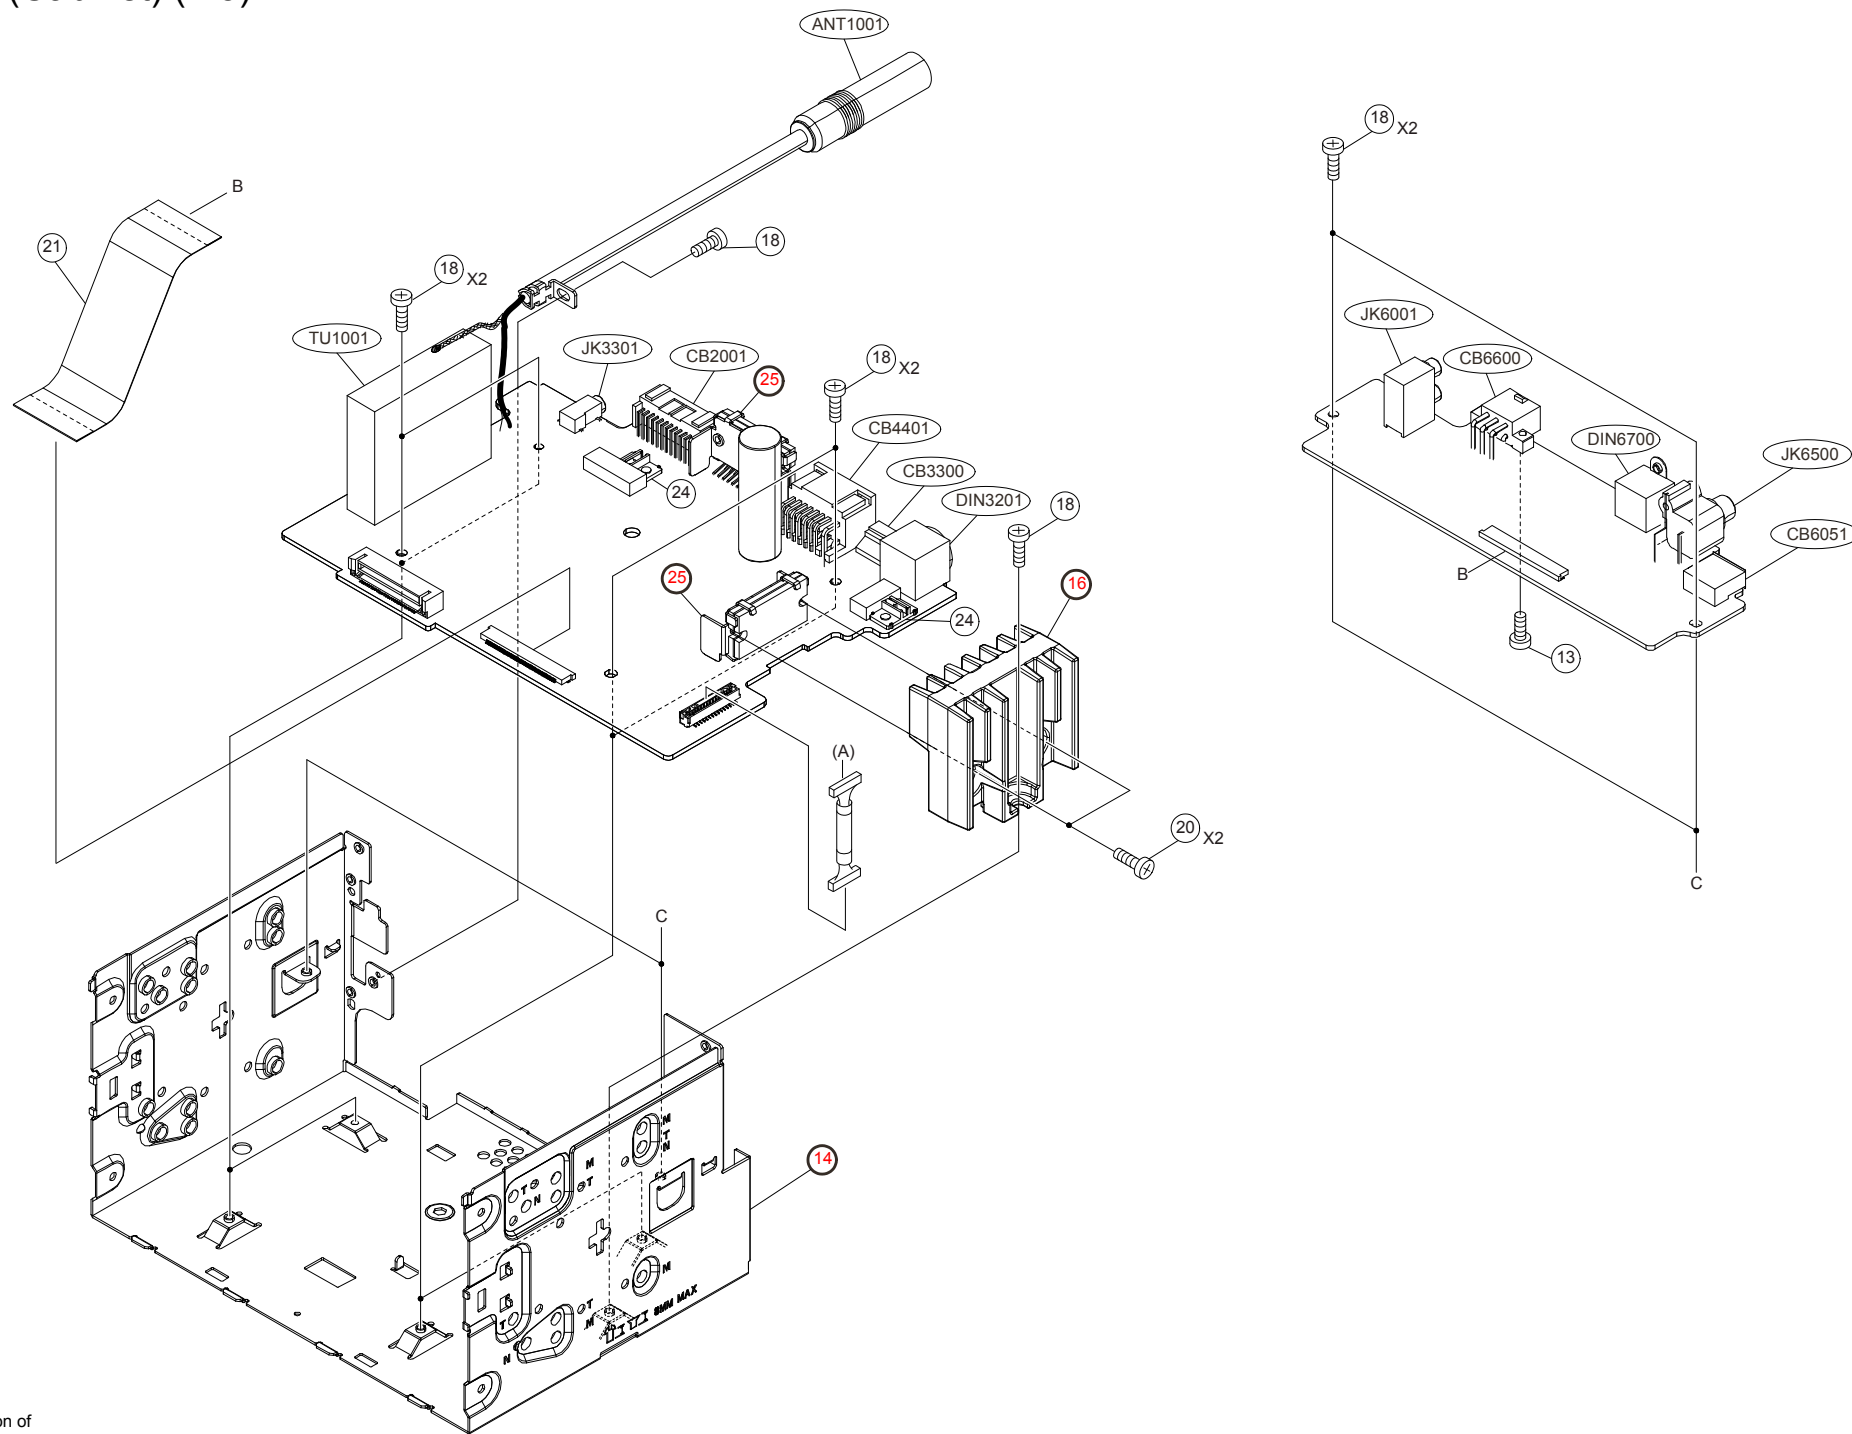

NOTE: The place of the connection of (A) as shown in ( ) is mentioned in the "Exploded View(Cabinet)(1/3)".

# Exploded View (Cabinet) (3/3)

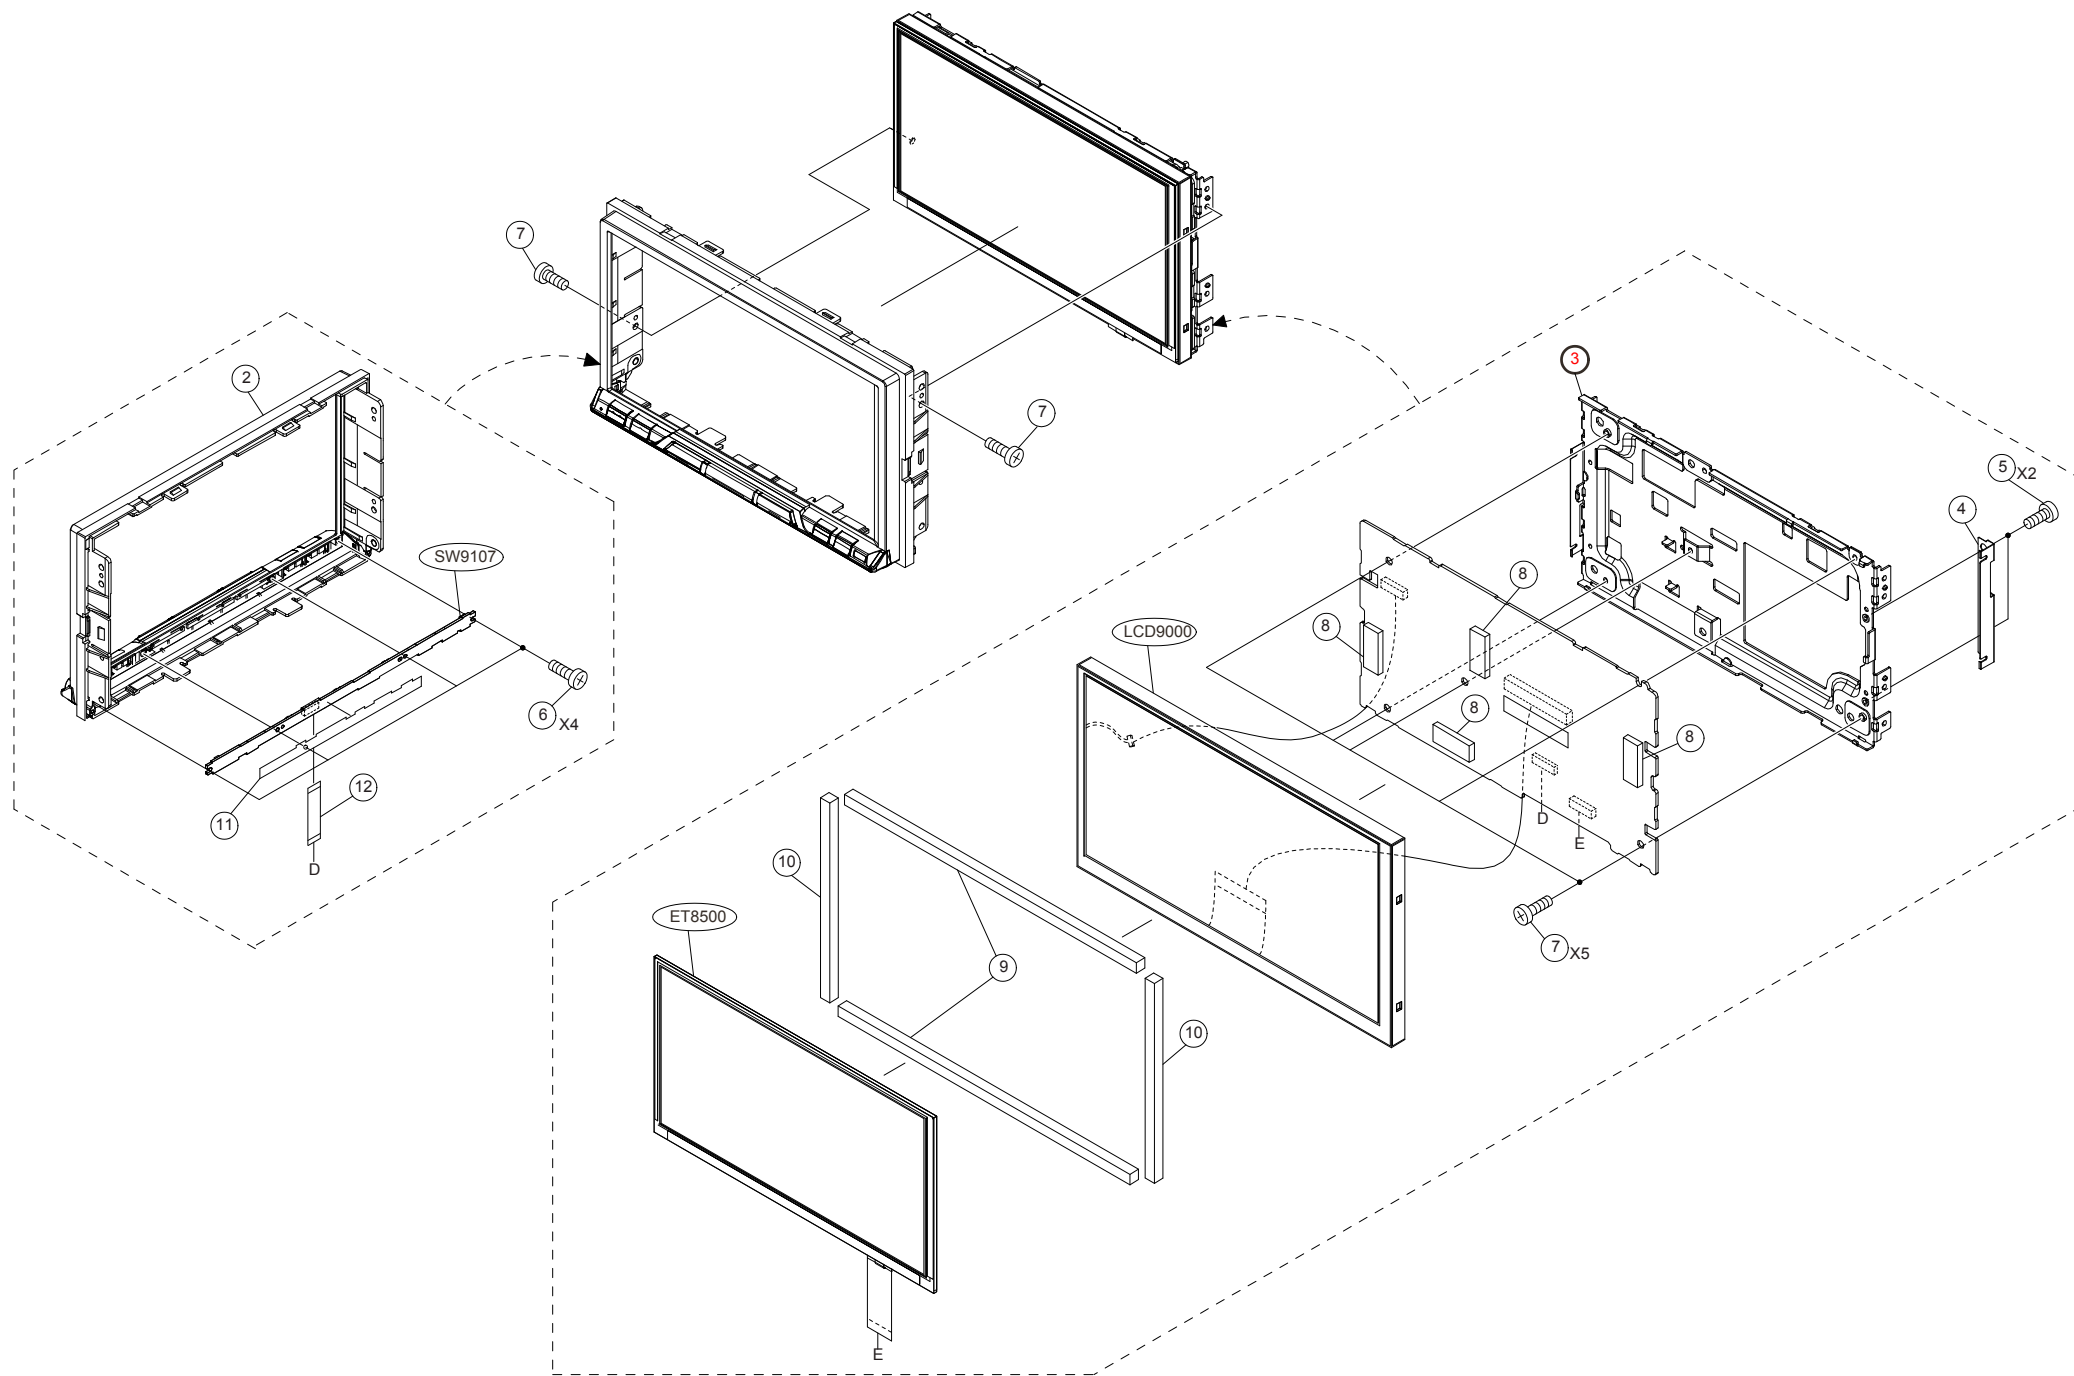

| MODEL | Symbol No.              | Parts No.   | Description           |
|-------|-------------------------|-------------|-----------------------|
| #1    | <a href="#">2</a>       | EN-14559Z01 | NOSE,PIECE ASSY       |
| \$1   | <a href="#">2</a>       | EN-14559Z03 | NOSE,PIECE ASSY       |
| %1    | <a href="#">2</a>       | EN-14559Z03 | NOSE,PIECE ASSY       |
|       | <a href="#">3</a>       | -----       | BKT,MONITOR ASSY      |
|       | <a href="#">4</a>       | 07-14523Z01 | BKT,LCD R             |
|       | <a href="#">5</a>       | 03S60827Y13 | SCR,P-L 2X2.2 ZN A    |
|       | <a href="#">6</a>       | 03S60823Y40 | SCR,P-T 1.7X4 ZN A    |
|       | <a href="#">7</a>       | 03S60822Y13 | SCR,S-T 2.6X6 ZN A    |
|       | <a href="#">8</a>       | 75-06068Z83 | CUS,RUB 20X8XT2.75    |
|       | <a href="#">9</a>       | 14-16000Z01 | INS,TAPE LCD          |
|       | <a href="#">10</a>      | 14-16000Z02 | INS,TAPE LCD          |
|       | <a href="#">11</a>      | 15-15765Z01 | COVER ,CUS LCD        |
|       | <a href="#">12</a>      | 30-15620Z01 | SML2CD-13X60-BDX6     |
|       | <a href="#">13</a>      | 03S71677F55 | SCR,T-TITE M3X8       |
|       | <a href="#">14</a>      | -----       | CHAS,BASE             |
|       | <a href="#">15</a>      | -----       | COVER,TOP             |
|       | <a href="#">16</a>      | -----       | HEAT,SINK SYS         |
|       | <a href="#">17</a>      | -----       | HEAT,SINK             |
|       | <a href="#">18</a>      | 03S60822Y13 | SCR,S-T 2.6X6 ZN A    |
|       | <a href="#">19</a>      | 03S60825Y04 | SCR,B-T 3X8 ZN A      |
|       | <a href="#">20</a>      | 03S60822Y22 | SCR,S-T 2.6X14 ZN A   |
|       | <a href="#">21</a>      | 30-14788Z01 | SML2CD-60X112-BDX6    |
|       | <a href="#">24</a>      | 36A04141K02 | KNOB,SLIDE            |
|       | <a href="#">25</a>      | -----       | BKT,IC                |
|       | <a href="#">26</a>      | 54-14525Z01 | LABEL,CHAS            |
|       | <a href="#">ANT1001</a> | 09-06103Z01 | ASSY,ANID-0035-01A    |
|       | <a href="#">CB2001</a>  | 09-07665Z05 | WTB,S24B-PADSS-1 -DB  |
|       | <a href="#">CB3300</a>  | 09-14579Z02 | WTB,S06B-PASK-2 -DB   |
|       | <a href="#">CB4401</a>  | 09T35473Y16 | WTB,F169B001-16 -DB   |
|       | <a href="#">CB6051</a>  | 09-11455Z01 | SKT,YKF45-0039N -DB   |
|       | <a href="#">CB6600</a>  | 09T13515W06 | WTB,5569-06A1 -DB     |
|       | <a href="#">DIN3201</a> | 09T55071W11 | CON,TCP9389-11 -DT    |
|       | <a href="#">DIN6700</a> | 09T15462Y02 | DIN,TCS7741-01WA -DB  |
|       | <a href="#">ET8500</a>  | 40-14616Z01 | ASSY,EMU601G2A619     |
|       | <a href="#">ET901</a>   | 51-14554Z01 | ASSY,CK5050+PF240013  |
|       | <a href="#">JK3301</a>  | 09-12459Z01 | JAC,HSJ1765-011075EA  |
|       | <a href="#">JK6001</a>  | 09-14149Z01 | JAC,CK3-3.5-14D -DB   |
|       | <a href="#">JK6500</a>  | 09T15627W04 | RCA,T6314-AACB -DB    |
|       | <a href="#">LCD9000</a> | 65-14268Z01 | ASSY,LB070WQ6-TD01    |
|       | <a href="#">SW9107</a>  | 40T65353Y01 | SW,TACT SKRSPACE010E2 |
|       | <a href="#">TU1001</a>  | TU-00887Z03 | TUNER,MX-A210         |

Mark Model Code

#1 iXA-W407 Only,

\$1 iXA-W407EBT(General Foreign) Only,

%1 iXA-W407EBT(Chinese) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.