


Exploded View (Cabinet)

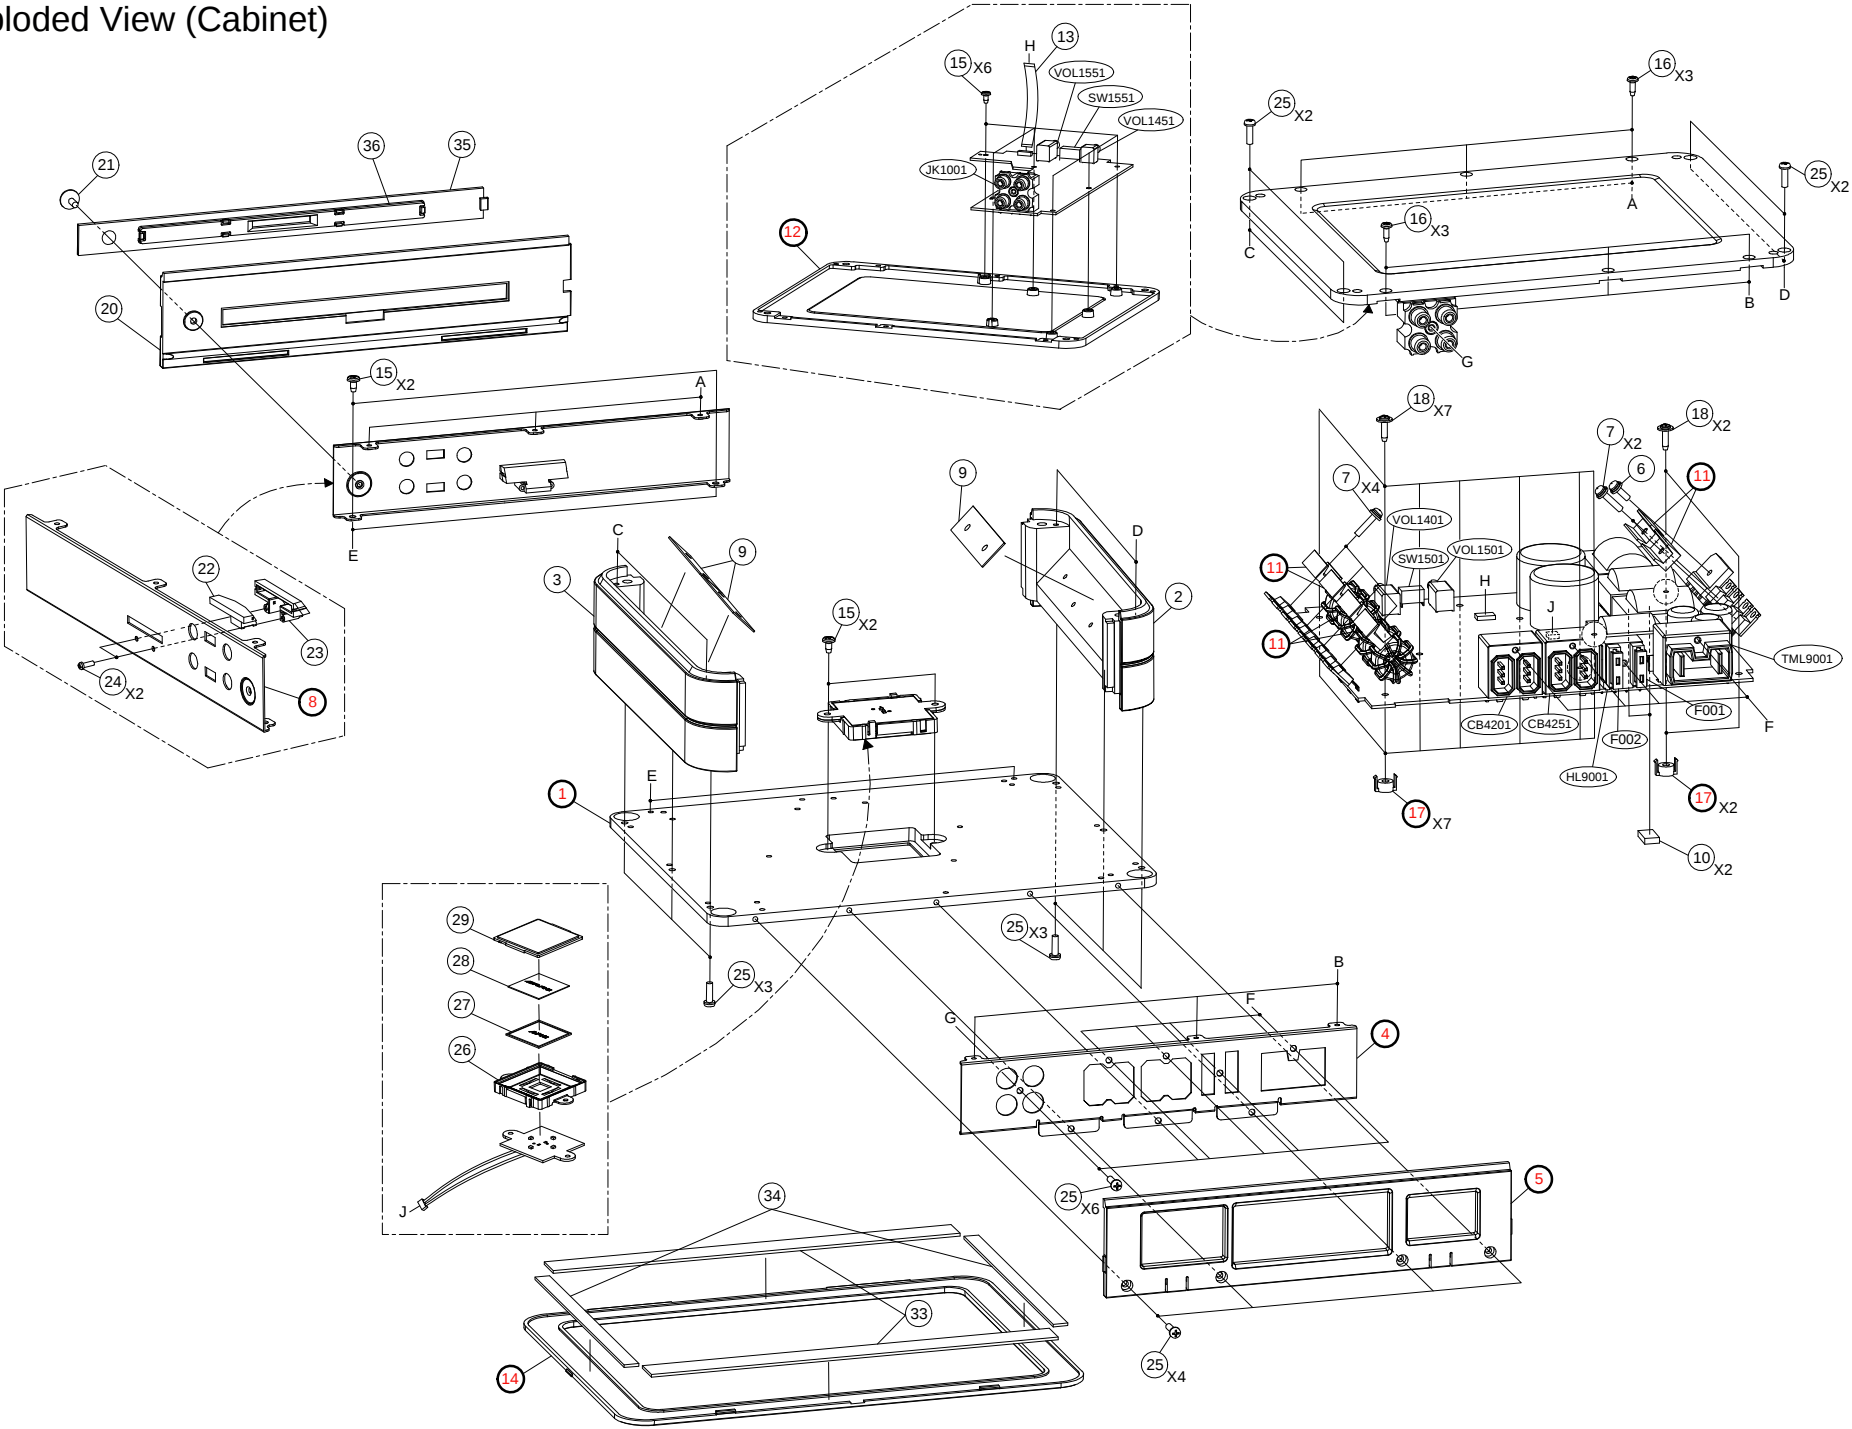

MODEL	Symbol No.	Parts No.	Description
	1	-----	HEAT,SINK MAIN
	2	13E41511S01	PANEL,SIDE-R
	3	13E41459S01	PANEL,SIDE-L
	4	-----	CHAS,REAR
	5	-----	COVER,REAR
	6	03E36210S01	SCR,M3X10(P)(WHT)
	7	03E38094S01	SCR,M3X15.5(WS)
	8	-----	CHAS,FRONT
	9	14E41450S01	INSULATOR,SILPAD-2H
	10	14E39754S01	INSULATOR,GAPPAD-COIL
	11	-----	HEAT,SINK BAR
	12	-----	COVER,BOTTOM
	13	30E40380S01	CABLE,FLAT 14P
	14	-----	COVER,STACKING
	15	03E38671S01	SCR,M3X6(B)
	16	03E41471S01	SCR,M2.6X8(P)(BLK)
	17	-----	SUPPORT,PWB
	18	03E39165S01	SCR,M3X11(WP)(WHT)
	20	15E41452S01	COVER,DOOR
	21	03E39505S01	SCR,M3X10(F)(BLK)
	22	34E41467S01	IND,COVER DOOR
	23	09E41464S01	HOLDER,IND
	24	03E39164S01	SCR,M2X6(P)(BLK)
	25	03E38698S01	SCR,M3X8(P)(BLK)
	26	09E41463S01	HOLDER,LED-TOP
	27	61E41457S01	LENS,LED
	28	33E41456S01	PLATE,LENS
	29	33E41454S01	PLATE,SCALE-TOP
	33	75E41465S01	CUSHION,CR SPONGE
	34	75E41466S01	CUSHION,CR SPONGE
	35	33E41455S01	PLATE,COVER DOOR
	36	34E41473S01	IND,PLATE COVER DOOR
	CB4201	09E41510S01	CONN,SPK-CON
	CB4251	09E41510S01	CONN,SPK-CON
	F001	65E38096S01	FUSE,AUTO 30A
	F002	65E38096S01	FUSE,AUTO 30A
	HL9001	09E39445S01	HOLDER,FUSE
	JK1001	09E41442S01	CONN,RCA 4P
	SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
	SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
	TML9001	09E41509S01	CONN,P-CON
	VOL1401	18E41507S01	VOL,ROTARY 50KX2

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

MODEL	Symbol No.	Parts No.	Description
	VOL1451	18E41507S01	VOL,ROTARY 50KX2
	VOL1501	18E41440S01	VOL,ROTARY 20KX4
	VOL1551	18E41440S01	VOL,ROTARY 20KX4

Mark Model Code


#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

Packing Method View

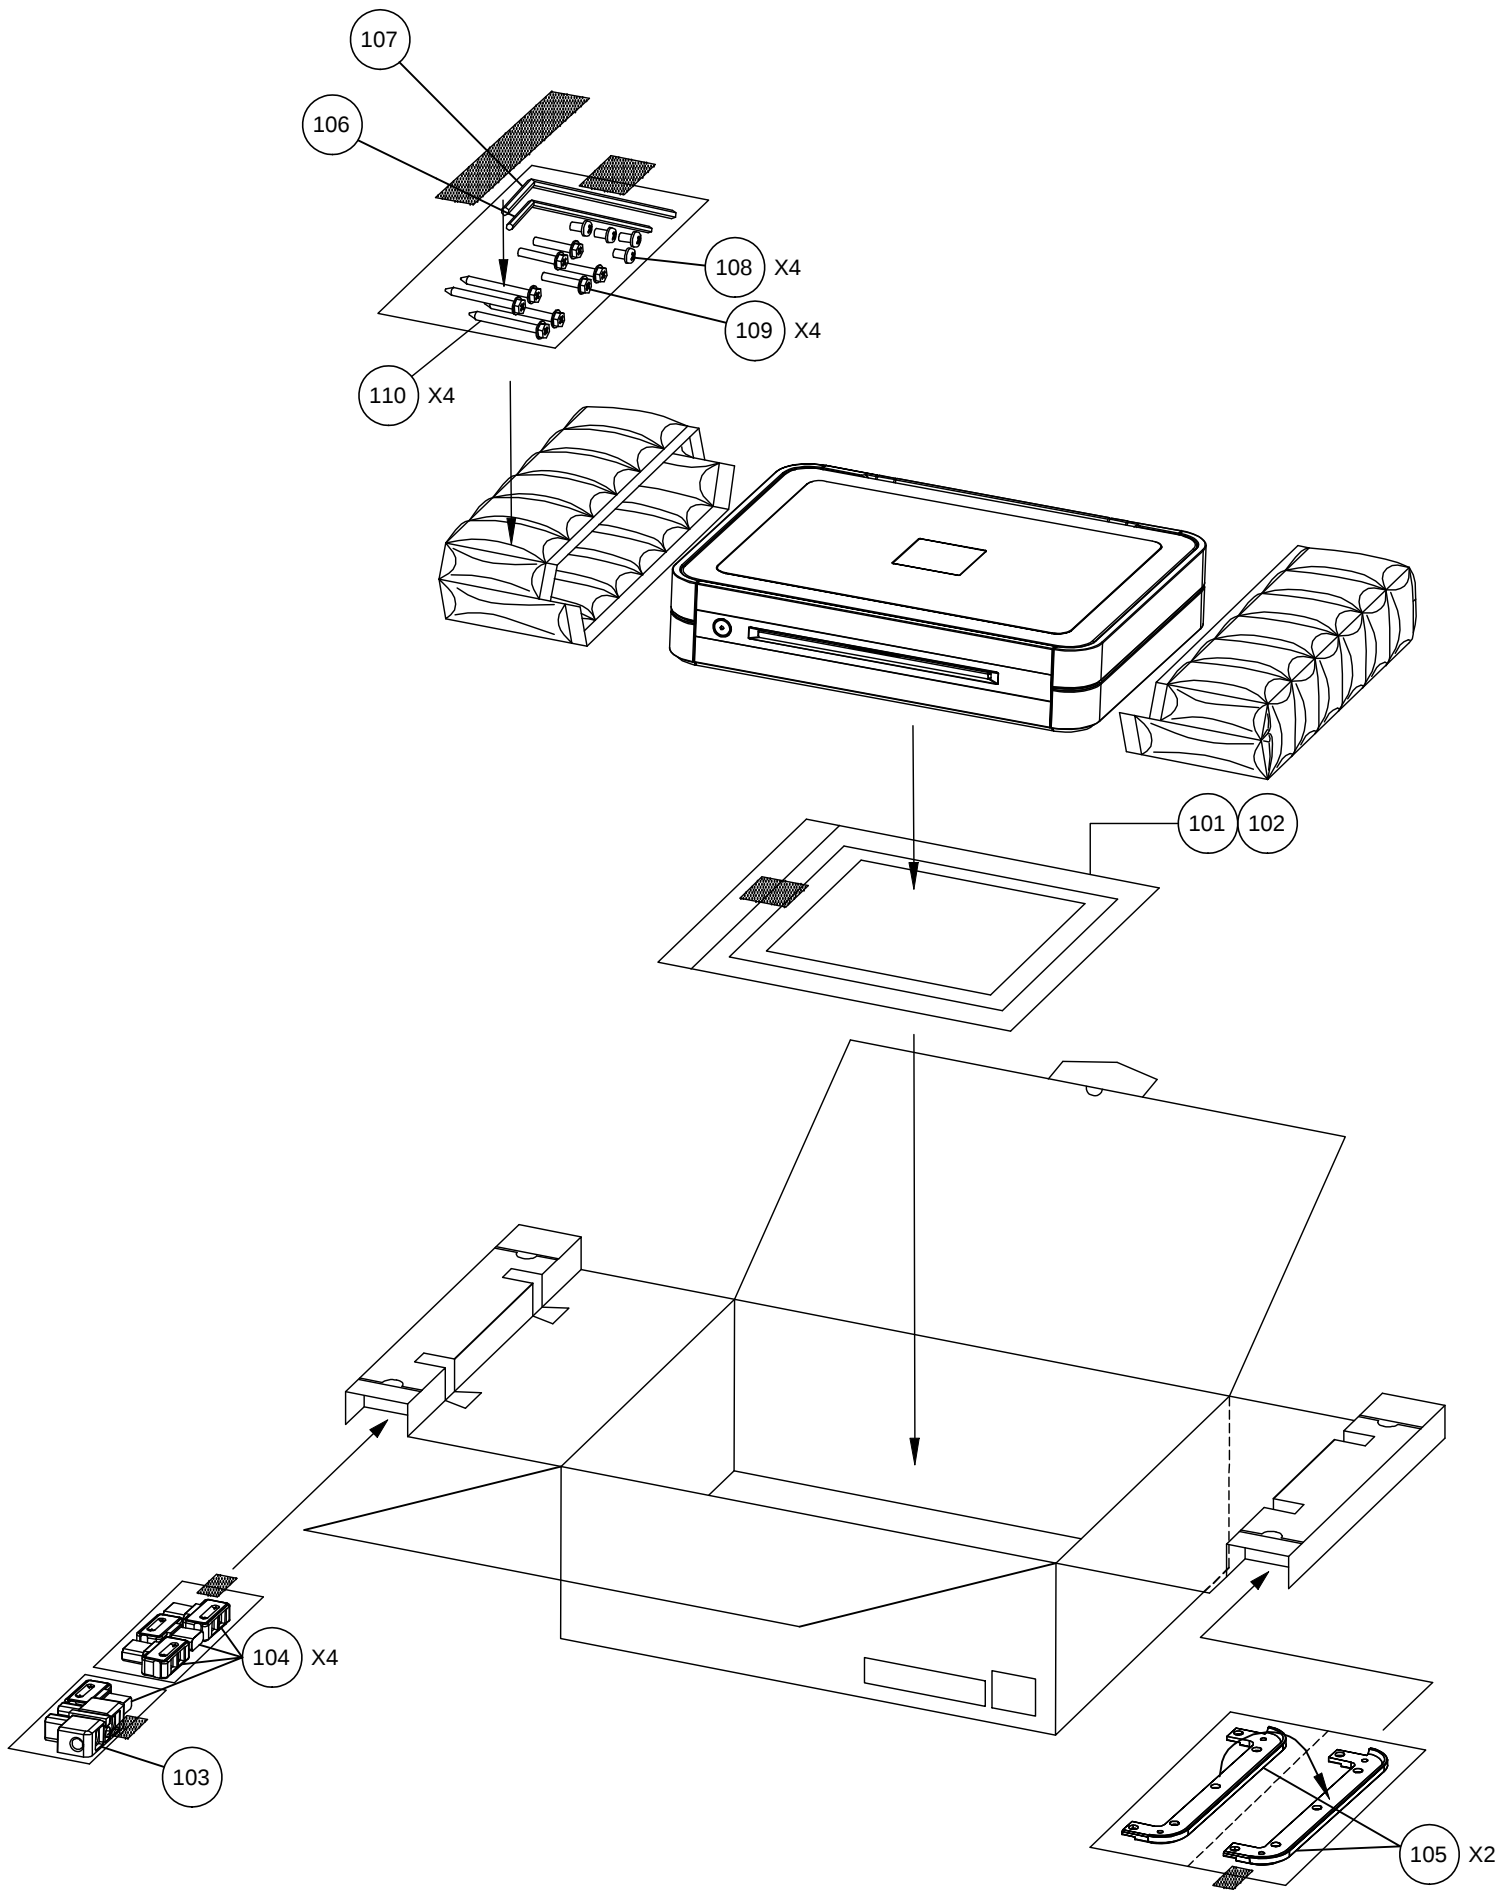

MODEL	Symbol No.	Parts No.	Description
	101	68-13530Z50	MANUAL,OWNER'S(AO),(GO)
\$1	102	68-13530Z51	MANUAL,OWNER'S(I,G,S)
	103	09E41508S01	CONN,P-PLUG
	104	09E41474S01	CONN,SPK-PLUG
	105	43E41458S01	SPACER,STACKING
	106	03E36691S01	WRENCH,2X2.3
	107	47E35195S01	WRENCH,4X4.6
	108	03E41468S01	SCR,M3X7(B)(BLK)
	109	03E41470S01	SCR,M4X24(HW)(BLK)
	110	03E41472S01	SCR,M4X36(HW)(BLK)

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1401	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1402	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C1403	08E35408S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1404	08E35408S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1406	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1408	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1409	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1413	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1501	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1502	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1503	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1504	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1505	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1506	08E35460S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1507	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C1508	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C1509	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1510	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1511	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C1512	08E38721S01	CAP,FILM 0.22uF/50V
MAIN-P.W.Board			C2001	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2002	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2003	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C2004	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2005	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C2006	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2007	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2008	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2009	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C2010	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C3601	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3602	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C3603	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C3604	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C3605	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C3606	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C3607	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3608	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3609	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3610	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3611	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3612	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3613	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3614	08E41492S01	CAP,CER.2700pF/50V

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3615	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3616	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C3617	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3618	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3619	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3620	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C3621	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3622	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3623	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3624	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3625	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3626	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C3627	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3628	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3629	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3630	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3633	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C3634	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C3635	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C3636	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C3637	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C3638	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C3639	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3640	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C3641	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3642	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3643	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3644	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C3701	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3702	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3703	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3704	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3705	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3706	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3707	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3708	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3709	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3710	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3711	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3712	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3713	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3714	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3715	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3716	08E37122S01	CAP,CER. 0.1uF/25V

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3717	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3718	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3719	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3720	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C3755	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3756	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3757	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3758	08E41394S01	CAP,CER.470pF/630V
MAIN-P.W.Board			C3759	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3760	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3761	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3762	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3763	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3764	08E39107S01	CAP,CER.0.33uF/100V
MAIN-P.W.Board			C3765	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C3766	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4003	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4004	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4053	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4054	08E38112S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4101	08E37159S01	CAP,CER. 0.047uF/50V
MAIN-P.W.Board			C4103	08E36625S01	CAP,CER. 1500, □F/50V
MAIN-P.W.Board			C4104	08E36625S01	CAP,CER. 1500, □F/50V
MAIN-P.W.Board			C4105	08E36625S01	CAP,CER. 1500, □F/50V
MAIN-P.W.Board			C4106	08E36625S01	CAP,CER. 1500, □F/50V
MAIN-P.W.Board			C4116	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4117	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4118	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4119	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C4206	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4207	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4208	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C4209	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C4210	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4211	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4256	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4257	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4258	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C4259	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C4260	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C4261	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C5001	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5002	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5003	08E37122S01	CAP,CER. 0.1uF/25V

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5004	08E37121S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C5005	08E40362S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C5006	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C5007	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5008	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5009	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5010	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5011	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5012	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5013	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5014	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5015	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5016	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5017	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5018	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5019	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5020	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5021	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5601	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C5602	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C5603	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C5604	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C5605	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C5606	08E38046S01	CAP,CER. 820pF/50V
MAIN-P.W.Board			C5607	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C5608	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C5609	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5610	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5611	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5612	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5613	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5614	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5615	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5616	08E41492S01	CAP,CER.2700pF/50V
MAIN-P.W.Board			C5617	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5618	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5619	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5620	08E36114S01	CAP,CER. 0.22uF/16V
MAIN-P.W.Board			C5621	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5622	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5623	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C5624	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C5625	08E38036S01	CAP,CER. 330pF/50V
MAIN-P.W.Board			C5626	08E38036S01	CAP,CER. 330pF/50V

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5627	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5628	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5629	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5630	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C5633	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C5634	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C5635	08E38604S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C5636	08E40363S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C5637	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C5638	08E37268S01	CAP,CER. 120pF/50V
MAIN-P.W.Board			C5639	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5640	08E37267S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C5641	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C5642	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C5643	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C5644	08E41389S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C8001	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8002	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8003	08E37118S01	CAP,CER. 220pF/50V
MAIN-P.W.Board			C8901	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C8902	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9001	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9002	08E39104S01	CAP,CER.0.01uF/500V
MAIN-P.W.Board			C9003	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9101	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9301	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9302	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C9303	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9305	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9307	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C9308	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C9309	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9310	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9311	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9313	08E37122S01	CAP,CER. 0.1uF/25V
MAIN-P.W.Board			C9314	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9702	08E40902S01	CAP,CER. 0.47uF/16V
MAIN-P.W.Board			C9703	08E40362S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C9704	08E41031S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C9705	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9801	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C9901	08E39188S01	CAP,CER.2200pF/500V
MAIN-P.W.Board			C9902	08E39188S01	CAP,CER.2200pF/500V
MAIN-P.W.Board			C9903	08E41491S01	CAP,CER.4700pF/500V

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C9904	08E41491S01	CAP,CER.4700pF/500V
MAIN-P.W.Board			C9905	08E40759S01	CAP,CER.1000pF/100V
MAIN-P.W.Board			C9906	08E39657S01	CAP,CER. 0.15uF/100V
MAIN-P.W.Board			C9907	08E39657S01	CAP,CER. 0.15uF/100V
MAIN-P.W.Board			C9908	08E40759S01	CAP,CER.1000pF/100V
MAIN-P.W.Board			CB1401	09E39715S01	CONN,FFC 14P
MAIN-P.W.Board			CB4201	09E41510S01	CONN,SPK-CON
MAIN-P.W.Board			CB4251	09E41510S01	CONN,SPK-CON
MAIN-P.W.Board			CB8001	09E41441S01	CONN,WTB 2P
MAIN-P.W.Board			CL5001	91E40781S01	RESONATOR,7.7MHz
MAIN-P.W.Board			D1701	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1702	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1801	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D1802	48E36633S01	DIODE,DAP202K
MAIN-P.W.Board			D2001	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D2002	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2003	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2004	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2005	48E38547S01	DIODE,DAN202U
MAIN-P.W.Board			D2006	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2007	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2008	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2009	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D2010	48E38037S01	DIODE,1PS226
MAIN-P.W.Board			D3601	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D3602	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D3603	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3604	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3605	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3606	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3607	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D3608	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5001	48E39348S01	DIODE,1SR154-400
MAIN-P.W.Board			D5002	48E40338S01	DIODE,KDR720E
MAIN-P.W.Board			D5003	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D5601	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D5602	48E41411S01	DIODE,DAP202U
MAIN-P.W.Board			D5603	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5604	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5605	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5606	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5607	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D5608	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D9101	48E39121S01	DIODE,GN1D

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D9301	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D9302	48E41409S01	DIODE,1SR159
MAIN-P.W.Board			D9501	48E41046S01	DIODE,1SS355
MAIN-P.W.Board			D9502	48E36568S01	DIODE,DAN202K
MAIN-P.W.Board			D9901	48E41410S01	DIODE,D30XBN20
MAIN-P.W.Board			E1501	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board			E1502	23E38100S01	CAP,ELY. 4.7uF/50V
MAIN-P.W.Board			E1701	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board			E1702	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board			E1703	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board			E1704	23E41496S01	CAP,ELY. 39uF/16V
MAIN-P.W.Board			E3601	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E3602	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E3603	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E3604	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E3605	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E3606	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E3607	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E3608	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E5001	23E40237S01	CAP,ELY. 33uF/16V
MAIN-P.W.Board			E5002	23E40237S01	CAP,ELY. 33uF/16V
MAIN-P.W.Board			E5601	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E5602	23E40760S01	CAP,ELY.10uF/16V
MAIN-P.W.Board			E5603	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E5604	23E41493S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E5605	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E5606	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E5607	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E5608	23E41495S01	CAP,ELY. 33uF/50V
MAIN-P.W.Board			E8901	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E8909	23E40369S01	CAP,ELY.470uF/16V
MAIN-P.W.Board			E9101	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9301	23E40765S01	CAP,ELY.330uF/10V
MAIN-P.W.Board			E9302	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9303	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9305	23E40364S01	CAP,ELY.100uF/25V
MAIN-P.W.Board			E9306	23E40764S01	CAP,ELY.220uF/16V
MAIN-P.W.Board			E9307	23E40764S01	CAP,ELY.220uF/16V
MAIN-P.W.Board			E9308	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9310	23E40764S01	CAP,ELY.220uF/16V
MAIN-P.W.Board			E9311	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9312	23E38013S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9702	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9703	23E39871S01	CAP,ELY. 100uF/16V

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E9704	23E41398S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E9801	23E38008S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E9901	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9902	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9903	23E40240S01	CAP,ELY. 2200uF/25V
MAIN-P.W.Board			E9904	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			E9905	23E41494S01	CAP,ELY. 8200uF/50V
MAIN-P.W.Board			F001	65E38096S01	FUSE,AUTO 30A
MAIN-P.W.Board			F002	65E38096S01	FUSE,AUTO 30A
MAIN-P.W.Board			F9301	65E41448S01	FUSE,15A
MAIN-P.W.Board			F9901	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9902	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9903	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9904	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9905	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9906	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9907	65E41480S01	FUSE,20A
MAIN-P.W.Board			F9908	65E41480S01	FUSE,20A
MAIN-P.W.Board			HL9001	09E39445S01	HOLDER,FUSE
MAIN-P.W.Board			IC1401	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1501	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1502	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1503	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1504	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC2001	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC2002	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC2003	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC3601	51E41429S01	IC,BA4580RF
MAIN-P.W.Board			IC3602	51E41430S01	IC,BA4580RF
MAIN-P.W.Board			IC3603	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC3604	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC3607	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC3608	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC4101	51E39596S01	IC,BA2901FV
MAIN-P.W.Board			IC4106	51E41502S01	IC,74VHC00MX_NL
MAIN-P.W.Board			IC4107	51E40343S01	IC,74VHC74MTCX
MAIN-P.W.Board			IC5001	51E36635S01	IC,NJU7222U50
MAIN-P.W.Board			IC5002	51E39139S01	IC,BD5243G
MAIN-P.W.Board			IC5003	51E40344S01	IC,BD5240G
MAIN-P.W.Board			IC5004	51-04615Z01	IC,TMP87C847UG -QT
MAIN-P.W.Board			IC5005	51E39395S01	IC,KIC7S04FU
MAIN-P.W.Board			IC5006	51E41501S01	IC,KIC7S32FU
MAIN-P.W.Board			IC5601	51E41429S01	IC,BA4580RF
MAIN-P.W.Board			IC5602	51E41430S01	IC,BA4580RF

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC5603	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC5604	51E41426S01	IC,98-1036TR
MAIN-P.W.Board			IC5607	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC5608	51E38067S01	IC,KIC7S00FU
MAIN-P.W.Board			IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9301	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board			IC9302	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9303	51E39892S01	IC,NJM78M15DL1A
MAIN-P.W.Board			IC9304	51E39893S01	IC,NJM79M15DL1A
MAIN-P.W.Board			IC9702	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board			IC9801	51E34504S01	IC,MC33152D
MAIN-P.W.Board			L4001	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board			L4002	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board			L4051	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board			L4052	24E39741S01	COIL,CHOKE 15uH
MAIN-P.W.Board			L9001	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			LD8001	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board			LD8002	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board			LD8003	48E41406S01	LED,SML-512UW RED
MAIN-P.W.Board			Q1701	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1702	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1703	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1704	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1705	48E37893S01	TR,DTA114EE
MAIN-P.W.Board			Q1706	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q1707	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q1801	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1802	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1803	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1804	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1805	48E37893S01	TR,DTA114EE
MAIN-P.W.Board			Q1806	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q1807	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q2001	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q2002	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q2003	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q2004	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q3601	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3602	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q3603	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3604	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3605	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3606	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3607	48E40339S01	TR,2N5400S

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q3608	48E40339S01	TR,2N5400S
MAIN-P.W.Board			Q3609	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3610	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q3611	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3612	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3613	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q3614	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q3615	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3616	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q3617	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3618	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3619	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3620	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3621	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3622	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3623	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3624	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3709	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3710	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3711	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3712	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3759	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3760	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3761	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q3762	48E41500S01	FET,FDP3682
MAIN-P.W.Board			Q4109	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4110	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4111	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4112	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5001	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q5002	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q5601	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q5602	48E41423S01	TR,UMY1N
MAIN-P.W.Board			Q5603	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5604	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5605	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5606	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5607	48E40339S01	TR,2N5400S
MAIN-P.W.Board			Q5608	48E40339S01	TR,2N5400S
MAIN-P.W.Board			Q5609	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5610	48E41420S01	TR,IMT4
MAIN-P.W.Board			Q5611	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5612	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5613	48E37097S01	TR,DTC114EE

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q5614	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q5615	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q5616	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q5617	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5618	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q5619	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q5620	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q5621	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q5622	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q5623	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q5624	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q8001	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q8002	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q9101	48E36577S01	TR,2SB1238P
MAIN-P.W.Board			Q9102	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9301	48E36597S01	TR,DTA124EKA
MAIN-P.W.Board			Q9302	48E41421S01	TR,IMT17
MAIN-P.W.Board			Q9303	48E41499S01	FET,RSS065N06
MAIN-P.W.Board			Q9304	48E41499S01	FET,RSS065N06
MAIN-P.W.Board			Q9501	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9502	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q9503	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9708	48E40769S01	TR,DTA124EE
MAIN-P.W.Board			Q9901	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9902	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9903	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9904	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			R1401	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R1402	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R1403	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1404	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1405	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1406	06E40553S01	RES,CF. 2.4K-1/16
MAIN-P.W.Board			R1407	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board			R1410	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board			R1411	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board			R1415	06E40331S01	RES,CF. 4.7-1/16W
MAIN-P.W.Board			R1501	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1502	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1503	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1504	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R1505	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1506	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1507	06E40845S01	RES,CF. 22K-1/10W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1508	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1509	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1510	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1511	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1512	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1513	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1514	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1515	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1516	06E40845S01	RES,CF. 22K-1/10W
MAIN-P.W.Board			R1517	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1518	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R1519	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1520	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1521	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1522	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1701	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1702	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1703	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1704	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1705	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1706	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1707	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1708	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1709	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1710	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1711	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1712	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R1713	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1714	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1715	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1716	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1717	06E40328S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1718	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1801	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1802	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1803	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1804	06E36615S01	RES,CF. 5.6K-1/4W
MAIN-P.W.Board			R1805	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1806	06E40328S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1808	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1809	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R2001	06E40323S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R2002	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2003	06E40744S01	RES,CF. 36K-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R2004	06E40324S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R2005	06E40323S01	RES,CF. 20K-1/16W
MAIN-P.W.Board			R2006	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R2007	06E33657S01	RES,CF. 15K-1/16W
MAIN-P.W.Board			R2008	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2009	06E39841S01	RES,CF. 62K-1/16W
MAIN-P.W.Board			R2010	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2011	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2012	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2013	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2014	06E40824S01	RES,CF. 2.2K-1/10W
MAIN-P.W.Board			R2015	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2016	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2017	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R2018	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R2019	06E40324S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R2020	06E39841S01	RES,CF. 62K-1/16W
MAIN-P.W.Board			R2021	06E33657S01	RES,CF. 15K-1/16W
MAIN-P.W.Board			R2022	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R2026	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R3601	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3602	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3603	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3604	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R3605	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3606	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3607	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3608	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R3609	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R3610	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3611	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3612	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3613	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3614	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3615	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3616	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3617	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3618	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3619	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3620	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3621	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3622	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3623	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3624	06E40737S01	RES,CF. 820-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3625	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3626	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3627	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3628	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3629	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3630	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R3631	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R3632	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3633	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3634	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3635	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3636	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R3637	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R3638	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R3639	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R3640	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3641	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3642	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3643	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3644	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3645	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R3646	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3647	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3648	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3649	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3650	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3651	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3652	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3653	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3654	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3655	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3656	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3657	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R3658	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R3659	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R3660	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R3661	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R3662	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R3664	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3665	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3668	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3669	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3670	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R3671	06E31154S01	RES,CF. 2.7K-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3672	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3673	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3674	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R3675	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R3676	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R3677	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R3678	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3679	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3680	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3681	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3682	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board			R3683	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board			R3684	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3685	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R3686	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3687	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R3688	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3689	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R3690	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R3691	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R3692	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3693	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3694	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R3695	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3696	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R3697	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R3698	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R3699	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R3700	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3701	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3702	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3703	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3704	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3705	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R3706	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R3707	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3708	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3709	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3710	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3711	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3712	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3713	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3714	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3715	06E36622S01	RES,CF. 100K-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3716	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3717	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3718	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3719	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3720	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3721	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3722	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3723	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3724	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3725	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R3726	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R3727	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3728	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R3729	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R3730	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3731	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3733	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R3734	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R3751	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3752	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3753	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3754	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R3759	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3760	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3761	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3762	06E41490S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3763	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3764	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3765	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3766	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R3767	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3768	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3769	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3770	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3771	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3772	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3773	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R3774	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R4105	06E40315S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R4106	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R4108	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4110	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4112	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4114	06E36463S01	RES,CF. 10K-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4117	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4118	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4119	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4120	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4125	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4126	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4127	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4128	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R4137	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4138	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4139	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R4140	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5001	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5002	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R5003	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R5004	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5005	06E40317S01	RES,CF. 3.9K-1/16W
MAIN-P.W.Board			R5006	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5007	06E40315S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R5008	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5009	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R5010	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5012	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5013	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5014	06E32288S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board			R5015	06E41376S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R5016	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5017	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5018	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5019	06E33657S01	RES,CF. 15K-1/16W
MAIN-P.W.Board			R5020	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5021	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R5022	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5601	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R5602	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R5603	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R5604	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R5605	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5606	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5607	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5608	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R5609	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R5610	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5611	06E34195S01	RES,CF. 680-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5612	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5613	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5614	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5615	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5616	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5617	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5618	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5619	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5620	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5621	06E34195S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5622	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5623	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5624	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5625	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5626	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5627	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5628	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5629	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5630	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R5631	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R5632	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5633	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5634	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5635	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5636	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R5637	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R5638	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R5639	06E40826S01	RES,CF. 33K-1/10W
MAIN-P.W.Board			R5640	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5641	06E41373S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5642	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5643	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5644	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5645	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R5646	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5647	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5648	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5649	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5650	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5651	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5652	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5653	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5654	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R5655	06E35189S01	RES,CF. 150-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5656	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R5657	06E35189S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R5658	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R5659	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R5660	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R5661	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R5662	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R5664	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5665	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5668	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5669	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5670	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R5671	06E31154S01	RES,CF. 2.7K-1/16W
MAIN-P.W.Board			R5672	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5673	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5674	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R5675	06E38392S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R5676	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R5677	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R5678	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5679	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5680	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5681	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5682	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board			R5683	06E41487S01	RES,CF. 1.5K-1/8W
MAIN-P.W.Board			R5684	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5685	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R5686	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5687	06E31680S01	RES,CF. 680-1/16W
MAIN-P.W.Board			R5688	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5689	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R5690	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R5691	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R5692	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5693	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5694	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R5695	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5696	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5697	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R5698	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R5699	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R5700	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5701	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R5702	06E36586S01	RES,CF. 22K-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5703	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R5704	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R5705	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R5706	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R5707	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5708	06E40320S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R5709	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R5710	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R5711	06E41388S01	RES,CF. 4.7-1/4W
MAIN-P.W.Board			R5713	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R5714	06E32296S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R8002	06E41387S01	RES,CF. 680-1/4W
MAIN-P.W.Board			R8003	06E39850S01	RES,CF. 2K-1/4W
MAIN-P.W.Board			R8004	06E40750S01	RES,CF. 1.1K-1/4W
MAIN-P.W.Board			R9101	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9102	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9103	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9104	06E36102S01	RES,CF. 30K-1/16W
MAIN-P.W.Board			R9105	06E36580S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R9106	06E36581S01	RES,CF. 30K-1/4W
MAIN-P.W.Board			R9107	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9301	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9302	06E40324S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R9303	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R9304	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9305	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9306	06E36672S01	RES,CF. 39K-1/16W
MAIN-P.W.Board			R9307	06E40742S01	RES,CF. 7.5K-1/16W
MAIN-P.W.Board			R9308	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9309	06E41488S01	RES,CF. 470K-1/16W
MAIN-P.W.Board			R9310	06E40324S01	RES,CF. 27K-1/16W
MAIN-P.W.Board			R9311	06E40824S01	RES,CF. 2.2K-1/10W
MAIN-P.W.Board			R9312	06E40230S01	RES,CF. 1.8K-1/10W
MAIN-P.W.Board			R9313	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9314	06E40737S01	RES,CF. 820-1/16W
MAIN-P.W.Board			R9315	06E37131S01	RES,CF. 39-1/4W
MAIN-P.W.Board			R9316	06E37131S01	RES,CF. 39-1/4W
MAIN-P.W.Board			R9317	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R9318	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9319	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9320	06E36583S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R9324	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9325	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9326	06E38034S01	RES,CF. 1K-1/4W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9327	06E38034S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9501	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9502	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9503	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9504	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9505	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9506	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9507	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R9508	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9601	06E40734S01	RES,CF. 560-1/16W
MAIN-P.W.Board			R9602	06E40741S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R9711	06E36665S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R9712	06E41513S01	RES,CF. 240-1/16W
MAIN-P.W.Board			R9718	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9719	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9721	06E40738S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R9722	06E40823S01	RES,CF. 390-1/10W
MAIN-P.W.Board			R9723	06E41385S01	RES,CF. 360K-1/16W
MAIN-P.W.Board			R9724	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R9725	06E40745S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R9726	06E40321S01	RES,CF. 10K-1/10W
MAIN-P.W.Board			R9727	06E40316S01	RES,CF. 2K-1/10W
MAIN-P.W.Board			R9728	06E41486S01	RES,CF. 3.6K-1/16W
MAIN-P.W.Board			R9729	06E40229S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R9730	06E36462S01	RES,CF. 4.7K-1/16W
MAIN-P.W.Board			R9731	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9732	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R9901	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9902	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9903	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9904	06E36555S01	RES,CF. 33-1/4W
MAIN-P.W.Board			R9905	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9906	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9907	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9908	06E36578S01	RES,CF. 10-1/4W
MAIN-P.W.Board			R9909	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9910	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9911	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9912	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R9913	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9914	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9915	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9916	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9917	06E40973S01	RES,CF. 47-1/4W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9918	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9919	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			R9920	06E40973S01	RES,CF. 47-1/4W
MAIN-P.W.Board			RA5001	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5002	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5003	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5004	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			SD9301	48E41412S01	DIODE,RF051UA1D
MAIN-P.W.Board			SD9302	48E41412S01	DIODE,RF051UA1D
MAIN-P.W.Board			SD9303	48E41412S01	DIODE,RF051UA1D
MAIN-P.W.Board			SW1501	40E40956S01	SW,SLIDE SK-23D55-G6
MAIN-P.W.Board			T9001	25E41504S01	COIL,CHOKE 200uH
MAIN-P.W.Board			T9301	25E41505S01	TRANS,MINI
MAIN-P.W.Board			T9901	25E41512S01	TRANS,POWER 4T/14T
MAIN-P.W.Board			T9902	25E41506S01	COIL,CHOKE 200u
MAIN-P.W.Board			T9903	25E41512S01	TRANS,POWER 4T/14T
MAIN-P.W.Board			TH2002	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TH3701	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board			TH3702	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board			TH3751	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board			TH3752	48E40346S01	THERMISTOR,10K
MAIN-P.W.Board			TH5001	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TH9601	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TML9001	09E41509S01	CONN,P-CON
MAIN-P.W.Board			VOL1401	18E41507S01	VOL,ROTARY 50KX2
MAIN-P.W.Board			VOL1501	18E41440S01	VOL,ROTARY 20KX4
MAIN-P.W.Board			ZD2001	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD3601	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board			ZD3602	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board			ZD3603	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD3604	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD3605	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD3606	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD3701	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3702	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3703	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3704	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3705	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3706	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3707	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD3708	48E41497S01	DIO,ZENER Z02W2.4V
MAIN-P.W.Board			ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD5601	48E41408S01	DIO,ZENER MMSZ4684T1
MAIN-P.W.Board			ZD5602	48E41408S01	DIO,ZENER MMSZ4684T1

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			ZD5603	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD5604	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD5605	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD5606	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD9001	48E41047S01	DIO,ZENER Z5W27V
MAIN-P.W.Board			ZD9101	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9501	48E39119S01	DIODE,ZENER HZK16-1L
MAIN-P.W.Board			ZD9502	48E39119S01	DIODE,ZENER HZK16-1L
SUB-P.W.Board			C1001	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1002	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1003	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1004	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1005	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1006	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1007	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1008	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1101	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1102	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1103	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1104	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1105	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1106	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1107	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1108	08E38714S01	CAP,CER. 330pF/50V
SUB-P.W.Board			C1109	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1110	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1111	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1112	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1113	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1114	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1115	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1116	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1201	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1202	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1203	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1204	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1205	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board			C1206	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board			C1207	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board			C1208	08E40754S01	CAP,CER.180pF/50V
SUB-P.W.Board			C1209	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1210	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1211	08E36675S01	CAP,CER. 33pF/50V
SUB-P.W.Board			C1212	08E36675S01	CAP,CER. 33pF/50V

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			C1213	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1214	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1215	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1216	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1451	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1452	08E36114S01	CAP,CER. 0.22uF/16V
SUB-P.W.Board			C1453	08E35408S01	CAP,CER. 10pF/50V
SUB-P.W.Board			C1454	08E35408S01	CAP,CER. 10pF/50V
SUB-P.W.Board			C1551	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board			C1552	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board			C1553	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1554	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1555	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board			C1556	08E35460S01	CAP,CER. 12pF/50V
SUB-P.W.Board			C1557	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board			C1558	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board			C1559	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1560	08E37267S01	CAP,CER. 0.047uF/25V
SUB-P.W.Board			C1561	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board			C1562	08E38721S01	CAP,FILM 0.22uF/50V
SUB-P.W.Board			CB1551	09E39715S01	CONN,FFC 14P
SUB-P.W.Board			D1101	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1102	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1103	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1104	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1105	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1106	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1107	48E38037S01	DIODE,1PS226
SUB-P.W.Board			D1108	48E38037S01	DIODE,1PS226
SUB-P.W.Board			E1101	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1102	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1103	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1104	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1105	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1106	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1107	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1108	23S75373W02	CAP,ELY 10R-1C -R2
SUB-P.W.Board			E1503	23E40762S01	CAP,ELY.100uF/16V
SUB-P.W.Board			E1504	23E40762S01	CAP,ELY.100uF/16V
SUB-P.W.Board			IC1101	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1102	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1103	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1104	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1201	51E40776S01	IC,BA4580RFVM

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			IC1202	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1451	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1551	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1552	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1553	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			IC1554	51E40776S01	IC,BA4580RFVM
SUB-P.W.Board			JK1001	09E41442S01	CONN,RCA 4P
SUB-P.W.Board			R1101	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board			R1102	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board			R1103	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board			R1104	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board			R1105	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board			R1106	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board			R1107	06E38034S01	RES,CF. 1K-1/4W
SUB-P.W.Board			R1108	06E40358S01	RES,CF. 1.2K-1/4W
SUB-P.W.Board			R1109	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board			R1110	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board			R1111	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board			R1112	06E41489S01	RES,CF. 120ohm-1/4W
SUB-P.W.Board			R1113	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1114	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1115	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1116	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1117	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1118	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1119	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1120	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1121	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1122	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1123	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1124	06E33279S01	RES,CF. 220K-1/16W
SUB-P.W.Board			R1125	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1126	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1127	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1128	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1129	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1130	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1131	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1132	06E36665S01	RES,CF. 1K-1/16W
SUB-P.W.Board			R1133	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1134	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1135	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1136	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1137	06E40315S01	RES,CF. 1.2K-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			R1138	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1139	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1140	06E40315S01	RES,CF. 1.2K-1/16W
SUB-P.W.Board			R1201	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1202	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1203	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1204	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1205	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1206	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1207	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1208	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1209	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1210	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1211	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1212	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1213	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1214	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1215	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1216	06E36591S01	RES,CF. 18K-1/16W
SUB-P.W.Board			R1451	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1452	06E40825S01	RES,CF. 4.7K-1/10W
SUB-P.W.Board			R1453	06E40825S01	RES,CF. 4.7K-1/10W
SUB-P.W.Board			R1454	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board			R1455	06E40553S01	RES,CF. 2.4K-1/16
SUB-P.W.Board			R1456	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1551	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board			R1552	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board			R1553	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board			R1554	06E40826S01	RES,CF. 33K-1/10W
SUB-P.W.Board			R1555	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1556	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1557	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1558	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1559	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1560	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1561	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board			R1562	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1563	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1564	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board			R1565	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1566	06E36592S01	RES,CF. 22K-1/16W
SUB-P.W.Board			R1567	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board			R1568	06E40230S01	RES,CF. 1.8K-1/10W
SUB-P.W.Board			R1569	06E36464S01	RES,CF. 0-1/16W

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
SUB-P.W.Board			R1570	06E36464S01	RES,CF. 0-1/16W
SUB-P.W.Board			R1571	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board			R1572	06E36623S01	RES,CF. 1M-1/16W
SUB-P.W.Board			SW1551	40E40956S01	SW,SLIDE SK-23D55-G6
SUB-P.W.Board			VOL1451	18E41507S01	VOL,ROTARY 50KX2
SUB-P.W.Board			VOL1551	18E41440S01	VOL,ROTARY 20KX4
LED-P.W.Board			C8101	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board			C8102	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board			C8103	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board			C8104	08E37118S01	CAP,CER. 220pF/50V
LED-P.W.Board			LD8101	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD8102	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD8103	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			LD8104	48E41405S01	LED,SML512BC5T BLUE
LED-P.W.Board			R8102	06E38034S01	RES,CF. 1K-1/4W
LED-P.W.Board			R8104	06E38034S01	RES,CF. 1K-1/4W
Miscellaneous			CH8001	01E41447S01	CONN,ASSY 2P

Mark Model Code

#1 PDX-F6(North American) Only,

\$1 PDX-F6(European) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.