
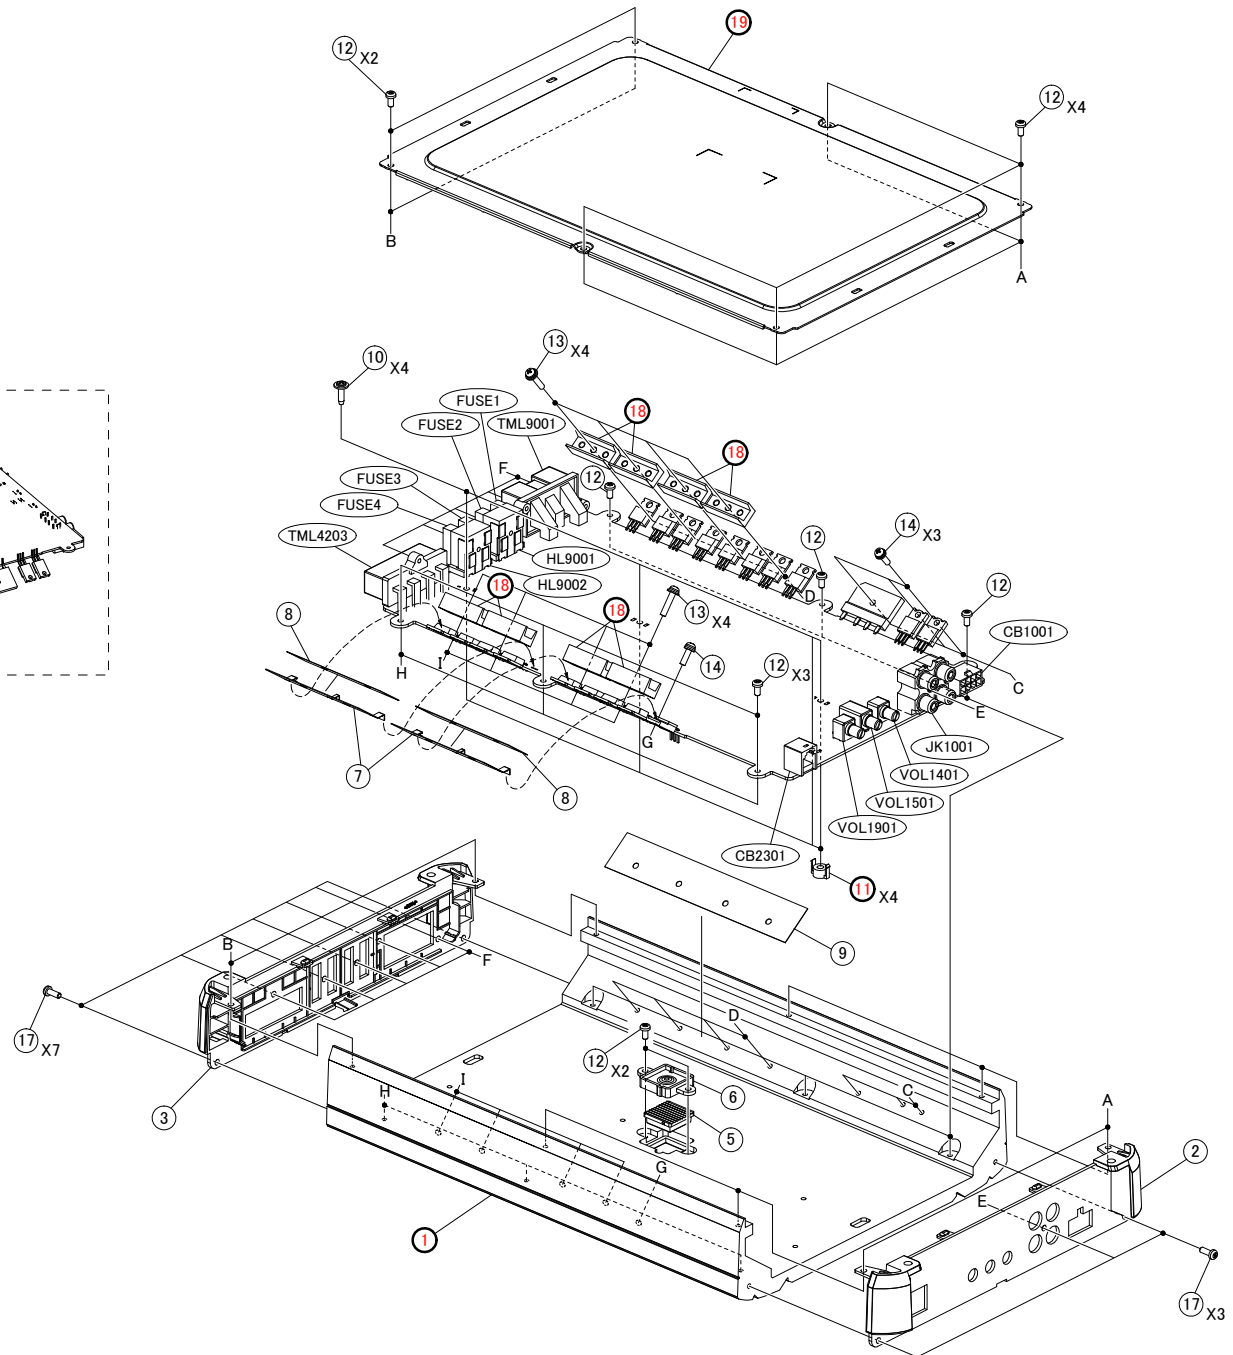


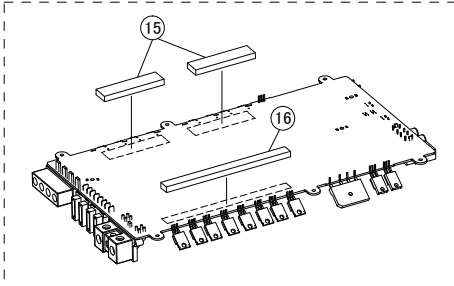


MODEL	Symbol No.	Parts No.	Description
	1	-----	HEAT,SINK
	2	15E44725S01	COVER,SIDE-L
	3	15E44726S01	COVER,SIDE-R
	5	61E44728S01	INDICATOR,LENS
	6	61E44729S01	LENS,HOLDER
	7	07E44727S01	BKT,SHIELD-A
	8	14E44723S01	INSULATOR,SILPAD-A
	9	14E44724S01	INSULATOR,SILPAD-B
	10	03E39165S01	SCR,M3X11(WP)(WHT)
	11	-----	SUPPORT,PWB
	12	03E38671S01	SCR,M3X6(B)(WHT)
	13	03E38094S01	SCR,M3X15.5(WS)
	14	03E44730S01	SCR,M3X11(WS)(WHT)
	15	75E44721S01	GAPPAD,15X60X5.5
	16	75E44722S01	GAPPAD,10X125X5.5
	17	03E38698S01	SCR,M3X8(P)(BLK)
	18	-----	HEAT,SINK BAR
	19	-----	COVER,BOTTOM
	20	33E39669S01	PLATE,NAME-F
	CB1001	09E42802S01	CONN,WAFER 8P
	CB2301	09E42970S01	CONN,JACK 6P
	FUSE1	65E44719S01	FUSE,AUTO 25A
	FUSE2	65E44719S01	FUSE,AUTO 25A

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

MODEL	Symbol No.	Parts No.	Description
	FUSE3	65E44719S01	FUSE,AUTO 25A
	FUSE4	65E44719S01	FUSE,AUTO 25A
	HL9001	09E42149S01	HOLDER,FUSE
	HL9002	09E42149S01	HOLDER,FUSE
	JK1001	09E42147S01	CONN,RCA 4P
	TML4203	09E44718S01	CONN,JSZ4A-23 4P
	TML9001	09E42148S01	CONN,TERMINAL 3P
	VOL1401	18E41439S01	VOL,ROTARY 50KX1
	VOL1501	18E42155S01	VOL,ROTARY 20KX4
	VOL1901	18E42212S01	VOL,ROTARY 5K

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

Packing Method View

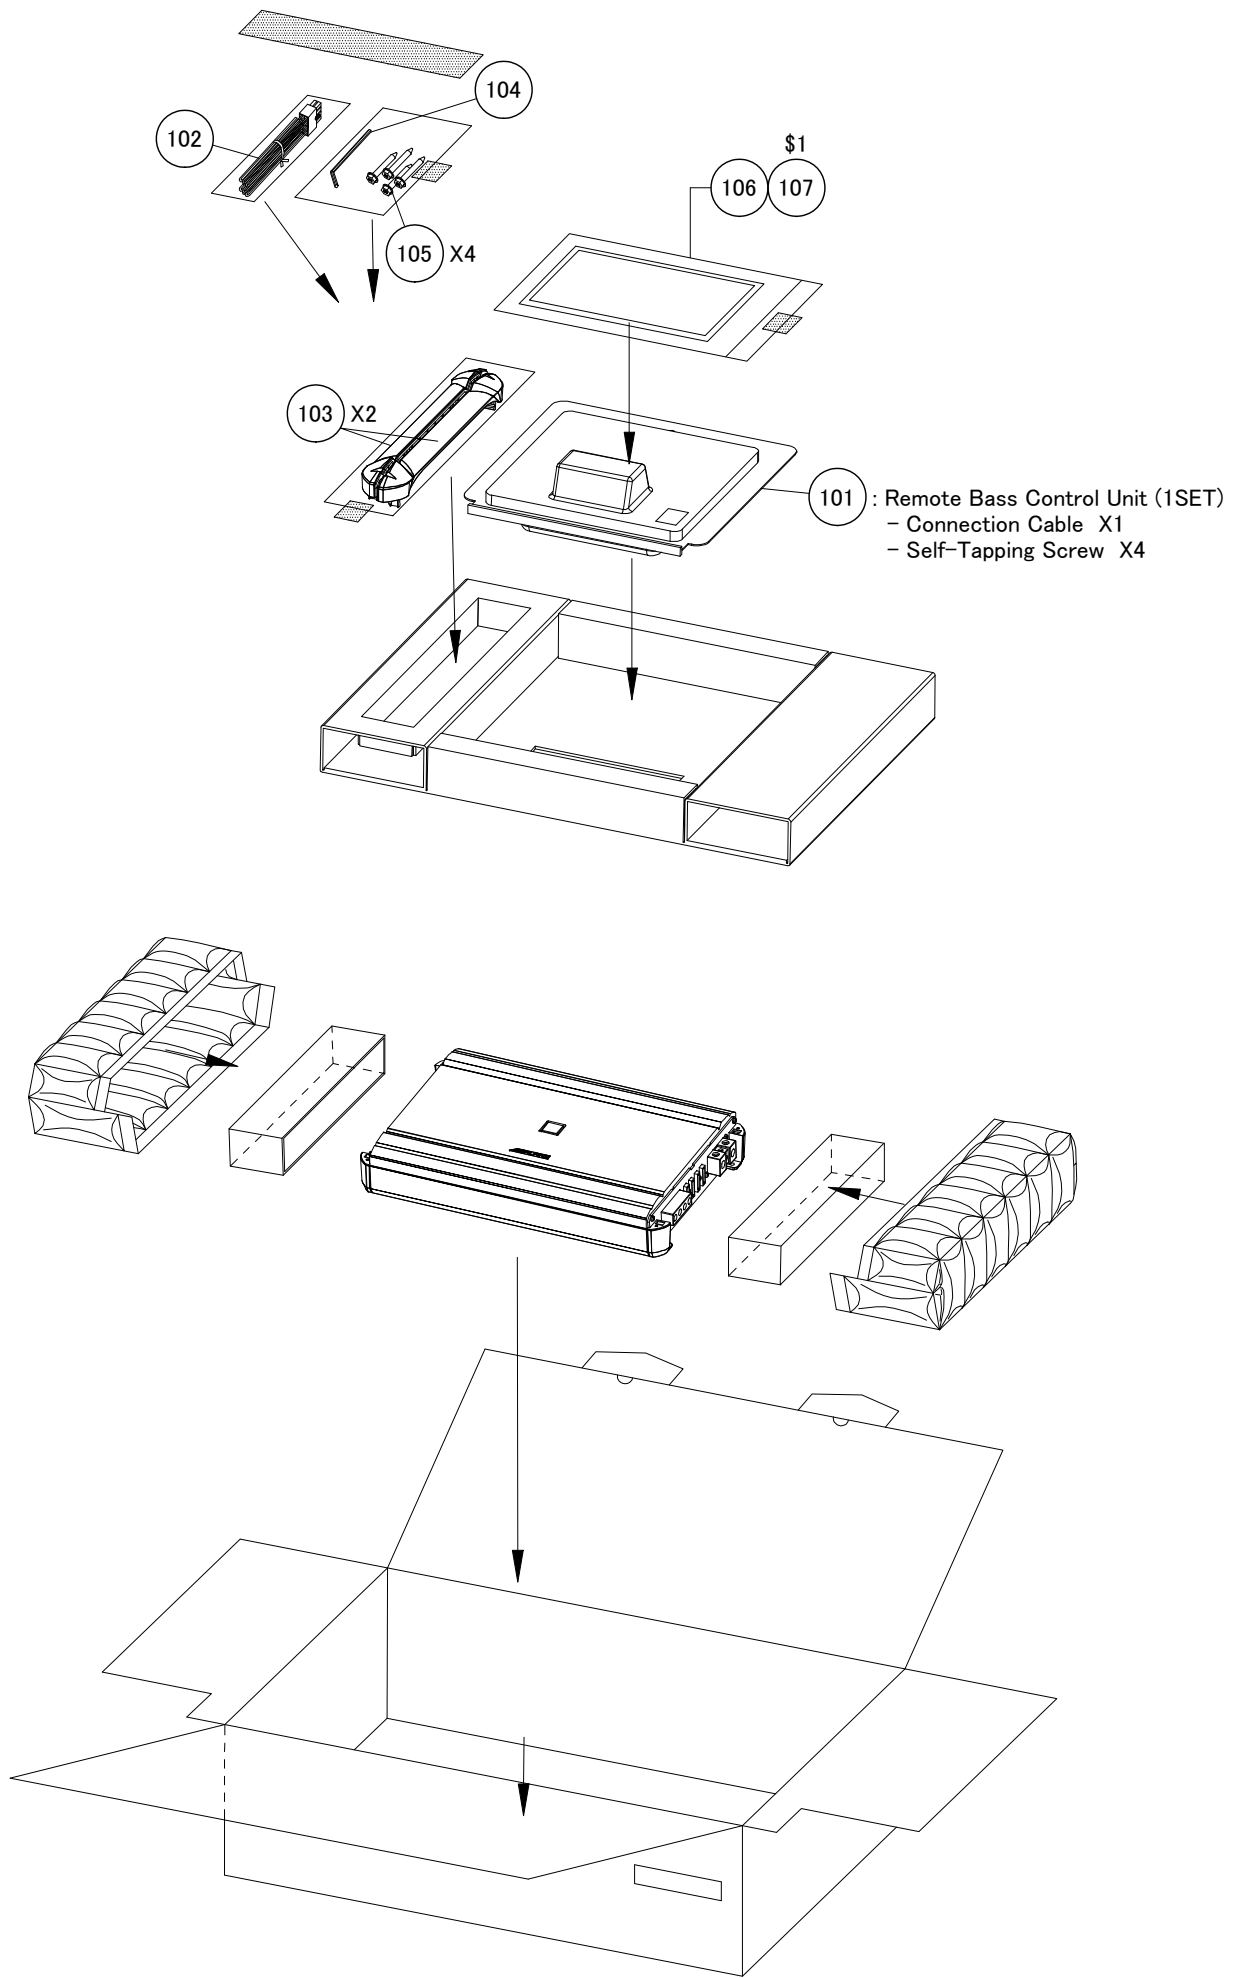

MODEL	Symbol No.	Parts No.	Description
	101	01E44715S01	SW,ROT RUX-KNOB
	102	01E42129S01	CONN,ASSY 8P
	103	15E44482S01	COVER,TERMINAL
	104	03E36690S01	WRENCH,HEX. 2.5X2.9
	105	03E40419S01	SCR,M4X20(BLK)
	106	68-29530Z91	MANUAL,OWNER'S
\$1	107	68-29530Z92	MANUAL,OWNER'S(EU)

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1001	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C1006	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1007	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1008	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1009	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1010	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1011	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1101	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1102	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1103	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1104	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1105	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1106	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1107	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1108	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1201	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1202	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1205	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1206	08E37115S01	CAP,CER.CP 33pF/50V
MAIN-P.W.Board			C1207	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1208	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1401	08E40234S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1402	23E41346S01	CAP,ELY 0.22uF/50V

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C1403	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1501	08E43010S01	CAP,FILM 56nF/63V
MAIN-P.W.Board			C1502	08E42191S01	CAP,FILM 0.1uF/63V
MAIN-P.W.Board			C1503	08E42120S01	CAP,FILM 220nF/63V
MAIN-P.W.Board			C1504	08E42118S01	CAP,FILM 150nF/63V
MAIN-P.W.Board			C1505	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1506	08E42323S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1507	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1508	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1801	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1802	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1803	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1804	08E39649S01	CAP,CER. 47pF/50V
MAIN-P.W.Board			C1805	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1806	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1901	08E43938S01	CAP,FILM 0.01uF/63V
MAIN-P.W.Board			C1902	08E40234S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1905	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C1906	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C2302	08E35412S01	CAP,CER 152-K-B1H-CP
MAIN-P.W.Board			C2303	08E35412S01	CAP,CER 152-K-B1H-CP
MAIN-P.W.Board			C3001	08E37118S01	CAP,CER.CP 220pF/50V
MAIN-P.W.Board			C3002	08E41392S01	CAP,CER.2200pF/50V

#1 MRV-M1200(North American) Only,
\$1 MRV-M1200(European) Only,
%1 MRV-M1200(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3003	08E41392S01	CAP,CER.2200pF/50V
MAIN-P.W.Board			C3004	08E37118S01	CAP,CER.CP 220pF/50V
MAIN-P.W.Board			C3005	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3006	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3007	08E38596S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3008	08E38596S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C3009	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3010	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3011	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3012	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3013	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3014	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3201	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3202	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3601	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3602	08E44702S01	CAP,CER. 0.22uF/100V
MAIN-P.W.Board			C3603	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C3604	08E44702S01	CAP,CER. 0.22uF/100V
MAIN-P.W.Board			C3607	08E44700S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3608	08E44700S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3611	08E42190S01	CAP,CER. 22uF/16V
MAIN-P.W.Board			C3612	08E42190S01	CAP,CER. 22uF/16V
MAIN-P.W.Board			C3613	08E37122S01	CAP,CER.CP 0.1uF/25V

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3614	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C3615	08E44700S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3616	08E44700S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C3715	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3716	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3717	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3718	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3719	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3720	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3721	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3722	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3723	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3724	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3725	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3726	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3727	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3728	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3729	08E43374S01	CAP,CER. 2.2uF/100V
MAIN-P.W.Board			C3730	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3731	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3732	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3733	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3734	08E37123S01	CAP,CER.CP 0.33/16

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C3735	08E37123S01	CAP,CER.CP 0.33/16
MAIN-P.W.Board			C3736	08E37123S01	CAP,CER.CP 0.33/16
MAIN-P.W.Board			C3737	08E37123S01	CAP,CER.CP 0.33/16
MAIN-P.W.Board			C3738	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C3739	08E42188S01	CAP,CER. 1000pF/250V
MAIN-P.W.Board			C3801	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C3802	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C4001	08E42145S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4002	08E42145S01	CAP,FILM 1uF/100V
MAIN-P.W.Board			C4003	08E42195S01	CAP,CER. 220pF/100V
MAIN-P.W.Board			C4004	08E42195S01	CAP,CER. 220pF/100V
MAIN-P.W.Board			C4005	08E42197S01	CAP,CER. 47pF/100V
MAIN-P.W.Board			C4006	08E42197S01	CAP,CER. 47pF/100V
MAIN-P.W.Board			C4007	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4008	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4013	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C4209	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4210	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4211	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4212	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4215	08E42189S01	CAP,CER. 1000pF/100V
MAIN-P.W.Board			C4216	08E39662S01	CAP,CER. 0.01uF/100V
MAIN-P.W.Board			C4501	08E37122S01	CAP,CER.CP 0.1uF/25V

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C4502	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C4701	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C4702	08E35412S01	CAP,CER 152-K-B1H-CP
MAIN-P.W.Board			C4703	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C4704	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C4705	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C4706	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C4707	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C4708	08E34594S01	CAP,CER 332-K-B1H-CP
MAIN-P.W.Board			C4711	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C4712	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C4713	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C4714	08E41028S01	CAP,CER 22pF/50V
MAIN-P.W.Board			C4715	08E41028S01	CAP,CER 22pF/50V
MAIN-P.W.Board			C4716	08E41028S01	CAP,CER 22pF/50V
MAIN-P.W.Board			C5001	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C5002	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5003	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C5004	08E37121S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C5005	08E38538S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C5006	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C5007	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C5008	08E41032S01	CAP,CER 0.1uF/50V

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C5009	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5010	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5011	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5013	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C5014	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5015	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5016	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5017	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C5020	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C5021	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C5022	08E36114S01	CAP,CER 224-K-CP
MAIN-P.W.Board			C8001	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C8002	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C8901	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C8902	08E37122S01	CAP,CER.CP 0.1uF/25V
MAIN-P.W.Board			C9001	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9002	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C9003	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C9005	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C9006	08E39103S01	CAP,CER.1000pF/500V
MAIN-P.W.Board			C9007	08E41035S01	CAP,CER 10nF/630V
MAIN-P.W.Board			C9008	08E39106S01	CAP,CER.100pF/500V
MAIN-P.W.Board			C9101	08E41031S01	CAP,CER 10nF/50V

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C9302	08E40527S01	CAP,CER. 0.068uF/50V
MAIN-P.W.Board			C9303	08E40527S01	CAP,CER. 0.068uF/50V
MAIN-P.W.Board			C9304	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C9305	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			C9701	08E42198S01	CAP,CER. 0.15uF/50V
MAIN-P.W.Board			C9702	08E41031S01	CAP,CER 10nF/50V
MAIN-P.W.Board			C9703	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C9704	08E42194S01	CAP,CER. 0.015uF/25V
MAIN-P.W.Board			C9705	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C9706	08E41032S01	CAP,CER 0.1uF/50V
MAIN-P.W.Board			C9707	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9708	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9901	08E42196S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C9902	08E42223S01	CAP,CER. 0.015uF/100V
MAIN-P.W.Board			C9903	08E42223S01	CAP,CER. 0.015uF/100V
MAIN-P.W.Board			C9904	08E42223S01	CAP,CER. 0.015uF/100V
MAIN-P.W.Board			C9905	08E42223S01	CAP,CER. 0.015uF/100V
MAIN-P.W.Board			C9910	08E35412S01	CAP,CER 152-K-B1H-CP
MAIN-P.W.Board			C9911	08E44701S01	CAP,CER. 68nF/100V
MAIN-P.W.Board			C9912	08E44701S01	CAP,CER. 68nF/100V
MAIN-P.W.Board			C9913	08E44702S01	CAP,CER. 0.22uF/100V
MAIN-P.W.Board			C9914	08E44702S01	CAP,CER. 0.22uF/100V
MAIN-P.W.Board			C9917	08E41032S01	CAP,CER 0.1uF/50V

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C9918	23E41346S01	CAP,ELY 0.22uF/50V
MAIN-P.W.Board			CL5001	91E39901S01	RESONATOR,7.7MHz
MAIN-P.W.Board			D1101	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D1102	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D1103	48E36633S01	DIODE,ARRAY DAP202K
MAIN-P.W.Board			D1104	48E36633S01	DIODE,ARRAY DAP202K
MAIN-P.W.Board			D2201	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D2202	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D2205	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D2206	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3001	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D3601	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3602	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3603	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3604	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3703	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3704	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3706	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3708	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3709	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3710	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3711	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D3712	48E40918S01	DIODE,KDS160

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			D4701	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D4711	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D4712	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D4713	48E34197S01	DIO,DAN 217(SOT-346)
MAIN-P.W.Board			D5001	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			D5002	48E40338S01	DIODE,KDR720E
MAIN-P.W.Board			D5003	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D8901	48E40860S01	DIO,RB160M
MAIN-P.W.Board			D9101	48E39121S01	DIODE,GN1D
MAIN-P.W.Board			D9301	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9302	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9303	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9304	48E39388S01	DIODE,MURA110
MAIN-P.W.Board			D9501	48E36568S01	DIODE,ARRAY DAN202K
MAIN-P.W.Board			D9502	48E40918S01	DIODE,KDS160
MAIN-P.W.Board			D9901	48E41410S01	DIODE,D30XBN20
MAIN-P.W.Board			E1001	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E1002	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E1101	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E1102	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E1103	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E1104	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E1701	23E44471S01	CAP,ELY. 33uF/16V

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E1901	23E43963S01	CAP,ELY.2.2uF/50V
MAIN-P.W.Board			E2201	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E2202	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E3001	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E3002	23E40908S01	CAP,ELY. 10uF/50V
MAIN-P.W.Board			E3003	23E41338S01	CAP,ELY.47uF/16V
MAIN-P.W.Board			E3004	23E41338S01	CAP,ELY.47uF/16V
MAIN-P.W.Board			E3201	23E44703S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E3202	23E44703S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E3701	23E44711S01	CAP,ELY. 47uF/63V
MAIN-P.W.Board			E3702	23E44711S01	CAP,ELY. 47uF/63V
MAIN-P.W.Board			E3703	23E44711S01	CAP,ELY. 47uF/63V
MAIN-P.W.Board			E3704	23E44711S01	CAP,ELY. 47uF/63V
MAIN-P.W.Board			E3705	23E44711S01	CAP,ELY. 47uF/63V
MAIN-P.W.Board			E3706	23E44711S01	CAP,ELY. 47uF/63V
MAIN-P.W.Board			E3707	23E44711S01	CAP,ELY. 47uF/63V
MAIN-P.W.Board			E3708	23E44711S01	CAP,ELY. 47uF/63V
MAIN-P.W.Board			E4901	23E44708S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E4902	23E44705S01	CAP,ELY. 220uF/35V
MAIN-P.W.Board			E4903	23E44707S01	CAP,ELY. 470uF/63V
MAIN-P.W.Board			E5001	23E44468S01	CAP,ELY. 680uF/16V
MAIN-P.W.Board			E5002	23E42346S01	CAP,ELY.22uF/16V
MAIN-P.W.Board			E8901	23E44710S01	CAP,ELY. 47uF/25V

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E8902	23E44712S01	CAP,ELY. 220uF/16V
MAIN-P.W.Board			E9101	23E44713S01	CAP,ELY. 470uF/25V
MAIN-P.W.Board			E9102	23E44474S01	CAP,ELY. 2.2uF/50V
MAIN-P.W.Board			E9301	23E44704S01	CAP,ELY. 330uF/50V
MAIN-P.W.Board			E9302	23E44704S01	CAP,ELY. 330uF/50V
MAIN-P.W.Board			E9303	23E44705S01	CAP,ELY. 220uF/35V
MAIN-P.W.Board			E9304	23E44705S01	CAP,ELY. 220uF/35V
MAIN-P.W.Board			E9701	23E44709S01	CAP,ELY. 22uF/16V
MAIN-P.W.Board			E9702	23E41339S01	CAP,ELY.100uF/16V
MAIN-P.W.Board			E9703	23E44710S01	CAP,ELY. 47uF/25V
MAIN-P.W.Board			E9705	23E44709S01	CAP,ELY. 22uF/16V
MAIN-P.W.Board			E9901	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9902	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9903	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9904	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9905	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9906	23E42796S01	CAP,ELY.2200uF/25V
MAIN-P.W.Board			E9907	23E44706S01	CAP,ELY. 2700uF/63V
MAIN-P.W.Board			E9908	23E44706S01	CAP,ELY. 2700uF/63V
MAIN-P.W.Board			E9910	23E44706S01	CAP,ELY. 2700uF/63V
MAIN-P.W.Board			E9911	23E44706S01	CAP,ELY. 2700uF/63V
MAIN-P.W.Board			E9913	23E44706S01	CAP,ELY. 2700uF/63V
MAIN-P.W.Board			E9914	23E44706S01	CAP,ELY. 2700uF/63V

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			F9901	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9902	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9907	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9912	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9913	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9914	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9915	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			F9916	65E44720S01	FUSE,0501020 20A
MAIN-P.W.Board			IC1001	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1101	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1102	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1201	51E40776S01	IC,BA4580RFVM
MAIN-P.W.Board			IC1401	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1501	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1801	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC1901	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC3001	51E38055S01	IC,NJM4580M
MAIN-P.W.Board			IC3201	51E44714S01	IC,MC74HC1G00DFT
MAIN-P.W.Board			IC3202	51E44714S01	IC,MC74HC1G00DFT
MAIN-P.W.Board			IC3601	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC3602	51E44072S01	IC,98-1036TRPBF
MAIN-P.W.Board			IC4501	51E40775S01	IC,BD5228G
MAIN-P.W.Board			IC4701	51E42208S01	IC,BA2903F

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC4702	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC4703	51E40343S01	IC,74VHC74MTCX
MAIN-P.W.Board			IC4711	51E39598S01	IC,BA4560RFVM
MAIN-P.W.Board			IC5001	51E44073S01	IC,AS78L05RTR
MAIN-P.W.Board			IC5002	51E39139S01	IC,BD5243G
MAIN-P.W.Board			IC5003	51E40344S01	IC,BD5240G
MAIN-P.W.Board			IC5004	51-27170Z01	IC,TMP87CH47UG -QT
MAIN-P.W.Board			IC5008	51E40862S01	IC,TC7SH08FU
MAIN-P.W.Board			IC8901	51E41428S01	IC,BAJ2CC0FP
MAIN-P.W.Board			IC9301	51E35123S01	IC,REG NJM7815FA
MAIN-P.W.Board			IC9302	51E35124S01	IC,REG NJM7915FA
MAIN-P.W.Board			IC9701	51E39585S01	IC,NCV494BDR2G
MAIN-P.W.Board			IC9702	51E34504S01	IC,MC33152D-CP
MAIN-P.W.Board			IC9703	51E34504S01	IC,MC33152D-CP
MAIN-P.W.Board			L4001	24E42217S01	COIL,IND. 10uH
MAIN-P.W.Board			L4002	24E42217S01	COIL,IND. 10uH
MAIN-P.W.Board			L9001	24E39739S01	COIL,IND. 10uH
MAIN-P.W.Board			LD8001	48E41405S01	LED,SML512BC5T BLUE
MAIN-P.W.Board			LD8002	48E41406S01	LED,SML-512UW RED
MAIN-P.W.Board			Q1701	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q1702	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q1703	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q2201	48E41051S01	TR,2SC2412K

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q2202	48E38062S01	TR,DTA114EK
MAIN-P.W.Board			Q3001	48E37157S01	TR,FMY1A
MAIN-P.W.Board			Q3002	48E41425S01	TR,IMX2
MAIN-P.W.Board			Q3003	48E42207S01	TR,BC846
MAIN-P.W.Board			Q3004	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3005	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3006	48E41498S01	TR,IMT2A
MAIN-P.W.Board			Q3007	48E42168S01	TR,BC856
MAIN-P.W.Board			Q3201	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3202	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3203	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q3204	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q3205	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3206	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q3701	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3702	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3703	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3704	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3705	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3706	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3707	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3708	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3709	48E41419S01	TR,2SA2094

#1 MRV-M1200(North American) Only,
\$1 MRV-M1200(European) Only,
%1 MRV-M1200(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q3710	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3711	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3712	48E41419S01	TR,2SA2094
MAIN-P.W.Board			Q3713	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3714	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3715	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3716	48E41416S01	FET,IRFB5615
MAIN-P.W.Board			Q3717	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q3718	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q3719	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q3720	48E41418S01	TR,2SC5866
MAIN-P.W.Board			Q4401	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q4402	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q4403	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4404	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q4501	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q4502	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4503	48E39389S01	TR,KTC2875
MAIN-P.W.Board			Q4504	48E37097S01	TR,DTC114EE
MAIN-P.W.Board			Q4701	48E40770S01	TR,DTA144EE
MAIN-P.W.Board			Q4702	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q4703	48E37188S01	TR,DTC144EE
MAIN-P.W.Board			Q4901	48E42180S01	TR,KTC4370A

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			Q8001	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q8002	48E40340S01	TR,DTC143XKA
MAIN-P.W.Board			Q9101	48E39125S01	TR,KTB1241
MAIN-P.W.Board			Q9102	48E41051S01	TR,2SC2412K
MAIN-P.W.Board			Q9501	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9502	48E39883S01	TR,2SC4102
MAIN-P.W.Board			Q9503	48E36573S01	TR,CP DTC144EK
MAIN-P.W.Board			Q9701	48E40769S01	TR,DTA124EE
MAIN-P.W.Board			Q9901	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9902	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9903	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9904	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9905	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9906	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9907	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			Q9908	48E37986S01	FET,IRF3205PB
MAIN-P.W.Board			R1001	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1002	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1003	06E32309S01	RES,CF 273-J-1/4-CP
MAIN-P.W.Board			R1004	06E32309S01	RES,CF 273-J-1/4-CP
MAIN-P.W.Board			R1005	06E32309S01	RES,CF 273-J-1/4-CP
MAIN-P.W.Board			R1006	06E32309S01	RES,CF 273-J-1/4-CP
MAIN-P.W.Board			R1007	06E32284S01	RES.CF 104-J-1/4-CP

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1008	06E32284S01	RES.CF 104-J-1/4-CP
MAIN-P.W.Board			R1009	06E32309S01	RES,CF 273-J-1/4-CP
MAIN-P.W.Board			R1010	06E32309S01	RES,CF 273-J-1/4-CP
MAIN-P.W.Board			R1011	06E32309S01	RES,CF 273-J-1/4-CP
MAIN-P.W.Board			R1012	06E32309S01	RES,CF 273-J-1/4-CP
MAIN-P.W.Board			R1013	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1014	06E40751S01	RES,CF. 330-1/4W
MAIN-P.W.Board			R1017	06E40999S01	RES,CF 1K-1/10-CP
MAIN-P.W.Board			R1018	06E40999S01	RES,CF 1K-1/10-CP
MAIN-P.W.Board			R1019	06E40999S01	RES,CF 1K-1/10-CP
MAIN-P.W.Board			R1020	06E40999S01	RES,CF 1K-1/10-CP
MAIN-P.W.Board			R1021	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1022	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1023	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1024	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1025	06E34814S01	RES,CF 513-F-1/16-CP
MAIN-P.W.Board			R1026	06E34814S01	RES,CF 513-F-1/16-CP
MAIN-P.W.Board			R1030	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1031	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1032	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1033	06E27630S01	RES,CF. 36K-1/8W
MAIN-P.W.Board			R1101	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R1102	06E37227S01	RES,CARBON 1K-1/10W

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1103	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R1104	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R1105	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1106	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1107	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1108	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1109	06E35446S01	RES,CF 112-F-1/16-CP
MAIN-P.W.Board			R1110	06E35446S01	RES,CF 112-F-1/16-CP
MAIN-P.W.Board			R1111	06E35446S01	RES,CF 112-F-1/16-CP
MAIN-P.W.Board			R1112	06E35446S01	RES,CF 112-F-1/16-CP
MAIN-P.W.Board			R1201	06E42961S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1202	06E42961S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1203	06E42961S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1204	06E42961S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1205	06E42961S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1206	06E42961S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1207	06E42961S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1208	06E42961S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R1209	06E37252S01	RES,CARBON 22K-1/10
MAIN-P.W.Board			R1210	06E37252S01	RES,CARBON 22K-1/10
MAIN-P.W.Board			R1401	06E37113S01	RES,CARBON 47K-1/16W
MAIN-P.W.Board			R1402	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R1403	06E34155S01	RES,CF 751-F-1/16

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1404	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R1405	06E35243S01	RES,CF 752-F-1/10-CP
MAIN-P.W.Board			R1406	06E36562S01	RES,CARBON 240-1/10
MAIN-P.W.Board			R1407	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R1501	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1502	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1503	06E40553S01	RES,CF. 2.4K-1/10
MAIN-P.W.Board			R1504	06E40553S01	RES,CF. 2.4K-1/10
MAIN-P.W.Board			R1505	06E40553S01	RES,CF. 2.4K-1/10
MAIN-P.W.Board			R1506	06E40553S01	RES,CF. 2.4K-1/10
MAIN-P.W.Board			R1507	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1508	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1701	06E41010S01	RES,CF 56K-1/10-CP
MAIN-P.W.Board			R1702	06E35236S01	RES,CF 152-J-1/4-CP
MAIN-P.W.Board			R1703	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R1704	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R1705	06E41007S01	RES,CF 22K-1/10-CP
MAIN-P.W.Board			R1803	06E32212S01	RES,CF 133-J-1/10-CP
MAIN-P.W.Board			R1804	06E32212S01	RES,CF 133-J-1/10-CP
MAIN-P.W.Board			R1805	06E37161S01	RES,CARBON 68K-1/16W
MAIN-P.W.Board			R1900	06E35164S01	RES,CF 202-F-1/10-CP
MAIN-P.W.Board			R1901	06E32299S01	RES,CF 824-J-1/10-CP
MAIN-P.W.Board			R1902	06E38591S01	RES,CF. 1M-1/10W

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1903	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R1904	06E44064S01	RES,CF. 43-1/10W
MAIN-P.W.Board			R1905	06E43653S01	RES,CF. 22-1/10W
MAIN-P.W.Board			R1906	06E42134S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1907	06E36467S01	RES CARBON 2.2K-1/10
MAIN-P.W.Board			R1908	06E44475S01	RES,CF. 510-1/10W
MAIN-P.W.Board			R1909	06E40324S01	RES,CF. 27K-1/10W
MAIN-P.W.Board			R1910	06E28536S01	RES,CF. 82K-1/10W
MAIN-P.W.Board			R2201	06E29451S01	RES,CF. 8.2K-1/4W
MAIN-P.W.Board			R2202	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R2203	06E41010S01	RES,CF 56K-1/10-CP
MAIN-P.W.Board			R2301	06E41015S01	RES,CF 1M-1/10-CP
MAIN-P.W.Board			R2302	06E41375S01	RES,CF. 150-1/10W
MAIN-P.W.Board			R3001	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R3002	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R3003	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3004	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3005	06E37137S01	RES,CARBON 5.6K-1/10
MAIN-P.W.Board			R3006	06E41014S01	RES,CF 330K-1/10-CP
MAIN-P.W.Board			R3007	06E42182S01	RES,CF. 7.5K-1/10W
MAIN-P.W.Board			R3008	06E41014S01	RES,CF 330K-1/10-CP
MAIN-P.W.Board			R3009	06E37137S01	RES,CARBON 5.6K-1/10
MAIN-P.W.Board			R3010	06E42182S01	RES,CF. 7.5K-1/10W

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3011	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3012	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3013	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3014	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3015	06E42182S01	RES,CF. 7.5K-1/10W
MAIN-P.W.Board			R3016	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R3017	06E43989S01	RES,CF. 430K-1/10W
MAIN-P.W.Board			R3018	06E42182S01	RES,CF. 7.5K-1/10W
MAIN-P.W.Board			R3019	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3020	06E37227S01	RES,CARBON 1K-1/10W
MAIN-P.W.Board			R3021	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3022	06E35373S01	RES,CF 331-J-1/10-CP
MAIN-P.W.Board			R3023	06E37257S01	RES,CARBON 2.4K-1/10
MAIN-P.W.Board			R3024	06E37196S01	RES,CARBON 3K-1/10W
MAIN-P.W.Board			R3025	06E35373S01	RES,CF 331-J-1/10-CP
MAIN-P.W.Board			R3026	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R3027	06E43989S01	RES,CF. 430K-1/10W
MAIN-P.W.Board			R3028	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3029	06E35242S01	RES,CF 432-F-1/10-CP
MAIN-P.W.Board			R3030	06E37161S01	RES,CARBON 68K-1/16W
MAIN-P.W.Board			R3031	06E35373S01	RES,CF 331-J-1/10-CP
MAIN-P.W.Board			R3032	06E35373S01	RES,CF 331-J-1/10-CP
MAIN-P.W.Board			R3033	06E37196S01	RES,CARBON 3K-1/10W

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3034	06E37111S01	RES,CARBON 27K-1/16W
MAIN-P.W.Board			R3035	06E40999S01	RES,CF 1K-1/10-CP
MAIN-P.W.Board			R3036	06E37196S01	RES,CARBON 3K-1/10W
MAIN-P.W.Board			R3037	06E37111S01	RES,CARBON 27K-1/16W
MAIN-P.W.Board			R3038	06E40999S01	RES,CF 1K-1/10-CP
MAIN-P.W.Board			R3039	06E43906S01	RES,CF. 620-1/10W
MAIN-P.W.Board			R3201	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3202	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3203	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3204	06E40992S01	RES,CF 100-1/10-CP
MAIN-P.W.Board			R3205	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3206	06E40992S01	RES,CF 100-1/10-CP
MAIN-P.W.Board			R3601	06E37167S01	RES,CARBON 2.2K-1/10
MAIN-P.W.Board			R3602	06E37167S01	RES,CARBON 2.2K-1/10
MAIN-P.W.Board			R3603	06E37170S01	RES,CARBON 2.7K-1/16
MAIN-P.W.Board			R3604	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3605	06E37170S01	RES,CARBON 2.7K-1/16
MAIN-P.W.Board			R3606	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3607	06E42219S01	RES,CF. 20K-1/4W
MAIN-P.W.Board			R3609	06E37105S01	RES,CARBON 3.3K-1/10
MAIN-P.W.Board			R3610	06E42219S01	RES,CF. 20K-1/4W
MAIN-P.W.Board			R3612	06E37105S01	RES,CARBON 3.3K-1/10
MAIN-P.W.Board			R3613	06E41005S01	RES,CF 10K-1/10-CP

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3614	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R3615	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3616	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R3617	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3618	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3619	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3620	06E37170S01	RES,CARBON 2.7K-1/16
MAIN-P.W.Board			R3621	06E35291S01	RES,CF 682-F-1/10-CP
MAIN-P.W.Board			R3622	06E37170S01	RES,CARBON 2.7K-1/16
MAIN-P.W.Board			R3623	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3624	06E31833S01	RES,CF 3R9-J-1/4-CP
MAIN-P.W.Board			R3719	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3720	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3721	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3722	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3723	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3724	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3725	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3730	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3731	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3732	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3733	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3736	06E22113S01	RES,CF. 22-1/4W

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3737	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3738	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3739	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R3740	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3741	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3742	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3743	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3744	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3745	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3746	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3747	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3748	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R3749	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R3750	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R3751	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R3752	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R3753	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R3754	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R3755	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R3756	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R3757	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3758	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3759	06E38746S01	RES,CF. 27-1/4W

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3760	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3761	06E38746S01	RES,CF. 27-1/4W
MAIN-P.W.Board			R3801	06E37142S01	RES,CARBON 12K-1/10W
MAIN-P.W.Board			R3802	06E37142S01	RES,CARBON 12K-1/10W
MAIN-P.W.Board			R3803	06E35242S01	RES,CF 432-F-1/10-CP
MAIN-P.W.Board			R3804	06E35242S01	RES,CF 432-F-1/10-CP
MAIN-P.W.Board			R4001	06E36651S01	RES,CARBON 3.9K-1/4
MAIN-P.W.Board			R4002	06E36651S01	RES,CARBON 3.9K-1/4
MAIN-P.W.Board			R4003	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R4005	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4006	06E36600S01	RES,CEMENT 0.01-5W
MAIN-P.W.Board			R4207	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R4208	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R4209	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R4210	06E42222S01	RES,CF. 1.1-1/4W
MAIN-P.W.Board			R4401	06E41007S01	RES,CF 22K-1/10-CP
MAIN-P.W.Board			R4402	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R4403	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R4404	06E31181S01	RES.CF.132-J-1/4-CP
MAIN-P.W.Board			R4501	06E41007S01	RES,CF 22K-1/10-CP
MAIN-P.W.Board			R4502	06E41007S01	RES,CF 22K-1/10-CP
MAIN-P.W.Board			R4503	06E35367S01	RES,CF 562-J-1/4-CP
MAIN-P.W.Board			R4504	06E36651S01	RES,CARBON 3.9K-1/4

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4505	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R4701	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R4702	06E40551S01	RES,CF. 1.3K-1/16
MAIN-P.W.Board			R4703	06E40976S01	RES,CF 10K-1/4-CP
MAIN-P.W.Board			R4704	06E41007S01	RES,CF 22K-1/10-CP
MAIN-P.W.Board			R4705	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R4706	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R4707	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R4708	06E37143S01	RES,CARBON 24K-1/16W
MAIN-P.W.Board			R4709	06E40327S01	RES,CF. 56K-1/10W
MAIN-P.W.Board			R4710	06E40976S01	RES,CF 10K-1/4-CP
MAIN-P.W.Board			R4711	06E37228S01	RES,CARBON 510-1/10W
MAIN-P.W.Board			R4712	06E40191S01	RES,CF. 11K-1/16
MAIN-P.W.Board			R4713	06E40745S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R4714	06E40824S01	RES,CF. 2.2K-1/10W
MAIN-P.W.Board			R4715	06E40318S01	RES,CF. 5.6K-1/10W
MAIN-P.W.Board			R4716	06E37252S01	RES,CARBON 22K-1/10
MAIN-P.W.Board			R4717	06E40312S01	RES,CF. 470-1/10W
MAIN-P.W.Board			R4718	06E40745S01	RES,CF. 47K-1/10W
MAIN-P.W.Board			R4719	06E37220S01	RES,CARBON 3.9K-1/10
MAIN-P.W.Board			R4720	06E39645S01	RES,CF. 18K-1/10W
MAIN-P.W.Board			R4721	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R4722	06E41016S01	RES,CF 0-1/10-CP

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R4901	06E35527S01	RES,CF 682-J-1/4-CP
MAIN-P.W.Board			R4902	06E35527S01	RES,CF 682-J-1/4-CP
MAIN-P.W.Board			R4903	06E37144S01	RES,CARBON 220K-1/16
MAIN-P.W.Board			R4904	06E41006S01	RES,CF 15K-1/16-CP
MAIN-P.W.Board			R4905	06E35527S01	RES,CF 682-J-1/4-CP
MAIN-P.W.Board			R5001	06E37093S01	RES,CARBON 5.6K-1/10
MAIN-P.W.Board			R5002	06E37224S01	RES,CARBON 2K-1/10W
MAIN-P.W.Board			R5003	06E35446S01	RES,CF 112-F-1/16-CP
MAIN-P.W.Board			R5004	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R5005	06E37220S01	RES,CARBON 3.9K-1/10
MAIN-P.W.Board			R5006	06E37093S01	RES,CARBON 5.6K-1/10
MAIN-P.W.Board			R5007	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R5008	06E35446S01	RES,CF 112-F-1/16-CP
MAIN-P.W.Board			R5009	06E37226S01	RES,CARBON 1.2K-1/10
MAIN-P.W.Board			R5010	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R5011	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R5013	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5014	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R5015	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R5016	06E35400S01	RES,CF 512-F-1/16-CP
MAIN-P.W.Board			R5017	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R5018	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R5021	06E37110S01	RES,CARBON 10K-1/10W

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R5022	06E37111S01	RES,CARBON 27K-1/16W
MAIN-P.W.Board			R5023	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R5024	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R5025	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R5026	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R5027	06E35290S01	RES,CF 622-F-1/16-CP
MAIN-P.W.Board			R5028	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R5029	06E37110S01	RES,CARBON 10K-1/10W
MAIN-P.W.Board			R8001	06E35529S01	RES,CF 242-F-1/4-CP
MAIN-P.W.Board			R8002	06E35529S01	RES,CF 242-F-1/4-CP
MAIN-P.W.Board			R8003	06E43711S01	RES,CF. 1.8K-1/4W
MAIN-P.W.Board			R8004	06E43711S01	RES,CF. 1.8K-1/4W
MAIN-P.W.Board			R8901	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R8902	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R9101	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9102	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9103	06E36581S01	RES,CARBON 30K-1/4
MAIN-P.W.Board			R9104	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9105	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9106	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9107	06E36102S01	RES,CF 303-J-1/10-CP
MAIN-P.W.Board			R9301	06E41011S01	RES,CF 100K-1/10-CP
MAIN-P.W.Board			R9302	06E41011S01	RES,CF 100K-1/10-CP

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9303	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R9304	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R9501	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9502	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9503	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R9504	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9505	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9506	06E41005S01	RES,CF 10K-1/10-CP
MAIN-P.W.Board			R9507	06E37113S01	RES,CARBON 47K-1/16W
MAIN-P.W.Board			R9508	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R9701	06E37229S01	RES,CARBON 100-1/16W
MAIN-P.W.Board			R9702	06E35242S01	RES,CF 432-F-1/10-CP
MAIN-P.W.Board			R9703	06E34814S01	RES,CF 513-F-1/16-CP
MAIN-P.W.Board			R9704	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R9705	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			R9706	06E34814S01	RES,CF 513-F-1/16-CP
MAIN-P.W.Board			R9707	06E40229S01	RES,CF. 1.5K-1/10W
MAIN-P.W.Board			R9708	06E41376S01	RES,CF. 220-1/10W
MAIN-P.W.Board			R9709	06E35407S01	RES,CF 364-F-1/16-CP
MAIN-P.W.Board			R9710	06E37252S01	RES,CARBON 22K-1/10
MAIN-P.W.Board			R9711	06E37167S01	RES,CARBON 2.2K-1/10
MAIN-P.W.Board			R9712	06E37169S01	RES,CARBON 1.8K-1/16
MAIN-P.W.Board			R9713	06E40998S01	RES,CF 820-1/16-CP

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9714	06E41003S01	RES,CF 4.7K-1/10-CP
MAIN-P.W.Board			R9715	06E40988S01	RES,CF 1K-1/4-CP
MAIN-P.W.Board			R9716	06E40988S01	RES,CF 1K-1/4-CP
MAIN-P.W.Board			R9901	06E38365S01	RES,CF. 130-1/4W
MAIN-P.W.Board			R9902	06E38365S01	RES,CF. 130-1/4W
MAIN-P.W.Board			R9903	06E38365S01	RES,CF. 130-1/4W
MAIN-P.W.Board			R9904	06E38365S01	RES,CF. 130-1/4W
MAIN-P.W.Board			R9905	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9906	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9907	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9908	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9909	06E38365S01	RES,CF. 130-1/4W
MAIN-P.W.Board			R9910	06E38365S01	RES,CF. 130-1/4W
MAIN-P.W.Board			R9911	06E38365S01	RES,CF. 130-1/4W
MAIN-P.W.Board			R9912	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9913	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9914	06E38365S01	RES,CF. 130-1/4W
MAIN-P.W.Board			R9915	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9916	06E35365S01	RES,CF 222-J-1/4-CP
MAIN-P.W.Board			R9917	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9918	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9919	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9920	06E22113S01	RES,CF. 22-1/4W

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R9921	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9922	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9923	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9924	06E22113S01	RES,CF. 22-1/4W
MAIN-P.W.Board			R9925	06E40825S01	RES,CF. 4.7K-1/10W
MAIN-P.W.Board			R9926	06E40737S01	RES,CF. 820-1/10W
MAIN-P.W.Board			R9927	06E43907S01	RES,CF. 470K-1/10W
MAIN-P.W.Board			R9928	06E44699S01	RES,CF. 1.3M-1/10W
MAIN-P.W.Board			R9929	06E41009S01	RES,CF 47K-1/16-CP
MAIN-P.W.Board			R9930	06E40746S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R9931	06E37167S01	RES,CARBON 2.2K-1/10
MAIN-P.W.Board			R9932	06E41016S01	RES,CF 0-1/10-CP
MAIN-P.W.Board			RA5001	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5002	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5003	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			RA5004	06E39855S01	RES,ARRAY. 10K-1/16W
MAIN-P.W.Board			T9001	24E44717S01	CHOKE,EER4045
MAIN-P.W.Board			T9901	25E44716S01	TRANS,POWER 4T/12T
MAIN-P.W.Board			T9902	25E44716S01	TRANS,POWER 4T/12T
MAIN-P.W.Board			TH3801	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH3802	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			TH4711	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			TH5001	48E40530S01	THERMISTOR,100K

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			TH9903	48E40530S01	THERMISTOR,100K
MAIN-P.W.Board			ZD3001	48E42210S01	DIO,ZENER KDZ
MAIN-P.W.Board			ZD3002	48E42210S01	DIO,ZENER KDZ
MAIN-P.W.Board			ZD4001	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD4002	48E41407S01	DIODE,ZENER VDZ15B
MAIN-P.W.Board			ZD4711	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD4901	48E39120S01	DIODE,ZENER HZK12A2L
MAIN-P.W.Board			ZD5001	48E39118S01	DIODE,ZENER HZK15-2L
MAIN-P.W.Board			ZD9001	48E41047S01	TR,Z5W27V
MAIN-P.W.Board			ZD9102	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9501	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			ZD9502	48E39101S01	DIODE,ZENER HZK6A1L
MAIN-P.W.Board			CB1001	09E42802S01	CONN,WAFER 8P
MAIN-P.W.Board			CB2301	09E42970S01	CONN,JACK 6P
MAIN-P.W.Board			FUSE1	65E44719S01	FUSE,AUTO 25A
MAIN-P.W.Board			FUSE2	65E44719S01	FUSE,AUTO 25A
MAIN-P.W.Board			FUSE3	65E44719S01	FUSE,AUTO 25A
MAIN-P.W.Board			FUSE4	65E44719S01	FUSE,AUTO 25A
MAIN-P.W.Board			HL9001	09E42149S01	HOLDER,FUSE
MAIN-P.W.Board			HL9002	09E42149S01	HOLDER,FUSE
MAIN-P.W.Board			JK1001	09E42147S01	CONN,RCA 4P
MAIN-P.W.Board			TML4203	09E44718S01	CONN,JSZ4A-23 4P
MAIN-P.W.Board			TML9001	09E42148S01	CONN,TERMINAL 3P

#1 MRV-M1200(North American) Only,
 \$1 MRV-M1200(European) Only,
 %1 MRV-M1200(General Foreign) Only,
 Others:Common.
 NOTE:The part that has not PART NUMBER will not be

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			VOL1401	18E41439S01	VOL,ROTARY 50KX1
MAIN-P.W.Board			VOL1501	18E42155S01	VOL,ROTARY 20KX4
MAIN-P.W.Board			VOL1901	18E42212S01	VOL,ROTARY 5K

#1 MRV-M1200(North American) Only,
\$1 MRV-M1200(European) Only,
%1 MRV-M1200(General Foreign) Only,
Others:Common.
NOTE:The part that has not PART NUMBER will not be