
Clarion Co., Ltd.
7-2, Shintoshin, Chuo-ku, Saitama-shi, Saitama 330-0081 Japan
Service Dept.: 7-2, Shintoshin, Chuo-ku, Saitama-shi, Saitama 330-0081 Japan
Tel: +81-48-601-3705 FAX: +81-48-601-3804

Published by Service Dept.
298-6803-00 Sep.2010
Printed in Japan

Service Manual

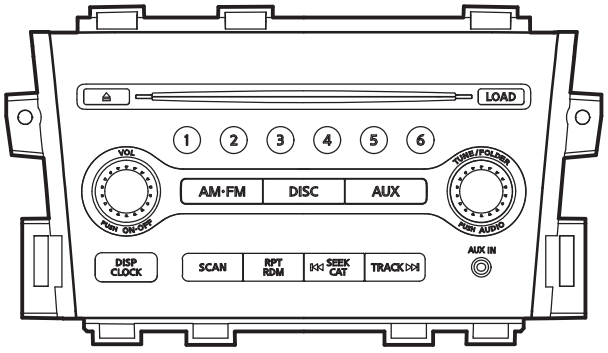

NISSAN Motor Genuine
AW/FM Radio 6CD Combination

Model PN-3351H-A
(Genuine No.28185 1SX0A)

ORIGINAL SERVICE MANUAL

The original model of PN-3351H-A(MY11) is PN-2955H-A(MY08). This additional service manual is designed to be used together with the service manual of PN-2955H-A.

Original model	Manual No.
PN-2955H-A	298-6542-00

MECHANISM SERVICE MANUAL

Please refer to the following service manual for the CD mechanism.

Original model	Manual No.
929-0410-80	298-6804-00

COMPONENT


PN-3351H-A


1. Main unit ---------- 1

CAUTION

Use of controls, adjustment, or performance of procedures other than those specified herein, may result in hazardous radiation exposure. The compact disc player should not be adjusted or repaired by anyone except properly qualified service personnel.

The set plate of PN-3351H-A

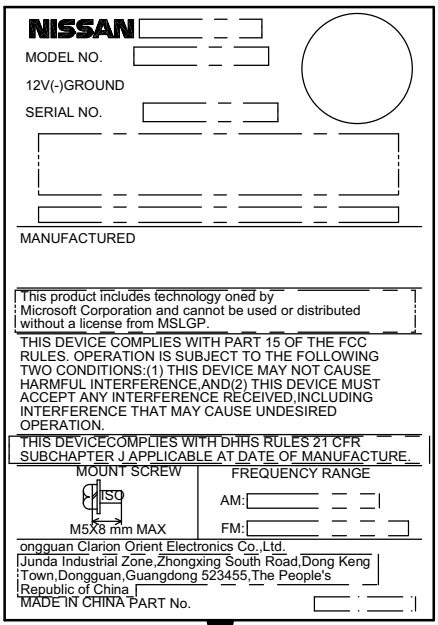



Top view of unit

EXPLODED VIEW/PARTS LIST

The following parts are different from the original model.
Other parts are the same as PN-2955H-A.
Please refer to page 13 to 14 of the original manual.
NO.1,NO.3,NO.6,NO.12,NO.21 and NO.29 are also changed in the the original manual.

Escutcheon section

NO.	PART NO.	DESCRIPTION	Q'TY
1	947-0695-62	BACK PLATE-ASSY	1
2	370-6291-20	ESCUTCHEON	1

NO.	PART NO.	DESCRIPTION	Q'TY
3	380-5705-01	KNOB	2

Main section

NO.	PART NO.	DESCRIPTION	Q'TY
6	929-0410-80	CD-CHANG-MODULE	1
12	313-1968-10	HEAT SINK	1
16	276-0066-23	SETPLATE	1

NO.	PART NO.	DESCRIPTION	Q'TY
21	----------	NU	1
29	345-5805-51	GASKET	1

ELECTRICAL PARTS LIST

The following parts are different from the original model.
Other parts are the same as PN-2955H-A.
Please refer to page 15 to 17 of the original manual.
All of the electrical parts are also changed in the the original manual.

Main PWB(B2) section

REF No.	PART No.	DESCRIPTION
C529	168-1542-58	0.15uF K
C530	168-1542-58	0.15uF K
C531	168-1542-58	0.15uF K
C532	168-1542-58	0.15uF K
C533	168-1052-78	16V 1uF K
C534	168-1542-58	0.15uF K
C535	168-1542-58	0.15uF K
C536	168-1542-58	0.15uF K
C537	168-1542-58	0.15uF K
C538	042-1760-90	16V 10uF M
C539	----------	NU
C540	----------	NU
C541	----------	NU
C542	----------	NU
C543	178-2742-78	0.27uF
C544	168-1052-78	16V 1uF K
C547	189-3383-31	16V 3300uF
C601	----------	NU
C602	----------	NU
C603	----------	NU
C604	----------	NU
C607	----------	NU
C611	----------	NU
C612	----------	NU
C613	----------	NU
D602	----------	NU
D605	----------	NU

REF No.	PART No.	DESCRIPTION
D606	----------	NU
D607	----------	NU
IC402	----------	M30876FJAGP
		VIRGIN-TYP
		(031510-052)
IC405	051-3034-90	NJM4558V
IC504	051-2067-00	TB2946HQ
J601	----------	NU
Q603	----------	NU
Q604	----------	NU
Q605	----------	NU
Q607	----------	NU
Q610	----------	NU
R308	----------	NU
R309	----------	NU
R310	----------	NU
R311	----------	NU
R331	119-1041-15	1/10W 100k ohm
R332	119-1041-15	1/10W 100k ohm
R333	119-1041-15	1/10W 100k ohm
R334	119-1041-15	1/10W 100k ohm
R460	119-4731-15	1/10W 47k ohm
		(Addtional parts)
R466	032-0140-15	1/10W 6.8k ohm F
R467	032-0140-15	1/10W 6.8k ohm F
R469	032-0140-15	1/10W 6.8k ohm F
R470	032-0140-15	1/10W 6.8k ohm F

REF No.	PART No.	DESCRIPTION
R471	032-0140-50	1/10W 10k ohm F
R472	032-0140-50	1/10W 10k ohm F
R473	032-0140-50	1/10W 10k ohm F
R474	032-0140-50	1/10W 10k ohm F
R539	119-4731-15	1/10W 47k ohm
R571	----------	NU
R572	----------	NU
R573	----------	NU
R574	----------	NU
R578	119-1021-15	1/10W 1k ohm
		(Addtional parts)
R601	----------	NU
R602	----------	NU
R607	----------	NU
R609	----------	NU
R610	----------	NU
R612	----------	NU
R613	----------	NU
R616	----------	NU
R617	----------	NU
R623	----------	NU
R624	----------	NU
R625	----------	NU
R626	----------	NU
PWB	039-3155-01	PWB(WITHOUT COMPONENT)