


Exploded View (Cabinet)

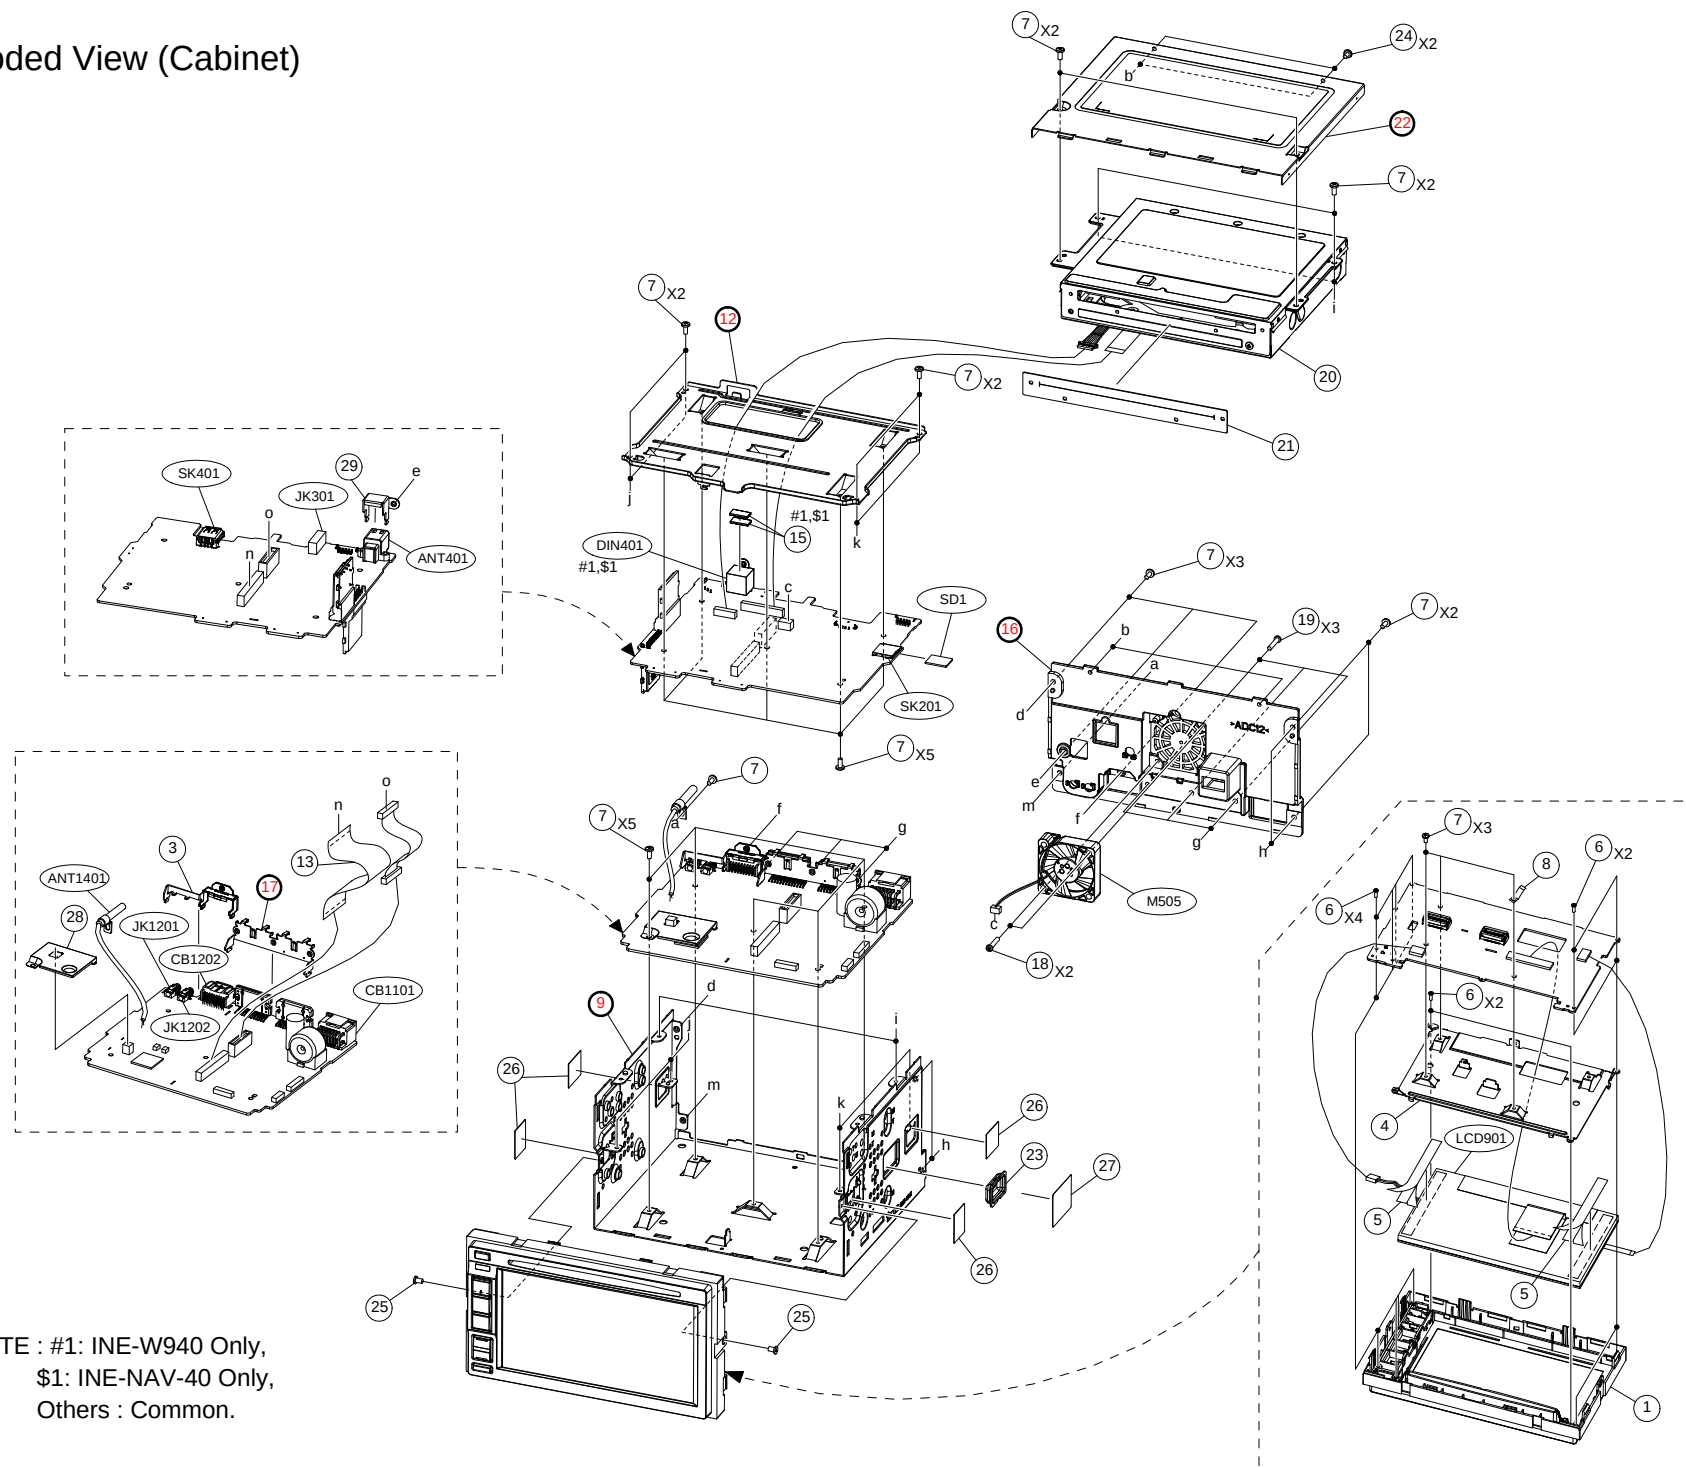

NOTE : #1: INE-W940 Only,
\$1: INE-NAV-40 Only,
Others : Common.

MODEL	Symbol No.	Parts No.	Description
#1	1	13E43630S01	ASS'Y NOSE PIECE
\$1	1	13E43631S01	ASS'Y NOSE PIECE
%1	1	13E43647S01	ASSY,NOSE PIECE
	3	07E43639S01	BKT,PREOUT
	4	15E43632S01	COVER,LCD
	5	75E43637S01	SHEET,TAPE
	6	03E41116S01	SCR,M2X6(B)(CR3BK)
	7	03E43645S01	SCR,M2.6X6(B)(WHT)
	8	07E43638S01	BKT,SURGE(A)
	9	-----	CHAS,MAIN
	12	-----	CHAS,MID
	13	30E43622S01	CABLE,FLAT 60P
#1	15	75E43629S01	Cushion Pad (6x10x0.3mm)
\$1	15	75E43629S01	Cushion Pad (6x10x0.3mm)
	16	-----	HEAT,SINK
	17	-----	BKT,IC
	18	03E43284S01	SCR TPG M3X14
	19	03E38461S01	SCR,M2.6X14(P)(WHT)
	20	01E43626S01	DVD DECK,DL-202
	21	15E43633S01	COVER,DUST
	22	-----	CHAS,TOP
	23	15E43643S01	HOLDER,SD
	24	03E40131S01	SCR,M3X6(B)(CR3BK)
	25	03E43646S01	SCR,M2.6X6(S)(CR3WHT)
	26	54E43635S01	LABEL,CHAS
	27	54E43636S01	LABEL,SD
	28	07E43642S01	BKT,SHIELD
	29	07E43640S01	BKT,CONNECTOR,SUPER
	ANT1401	09E43621S01	ASSY, CABLE,2P,BLACK
	ANT401	09E43605S01	CONN,GT5-1P WTB
	CB1101	09E43608S01	CONN,WTB 16P
	CB1202	09E43606S01	CONN,WTB
#1	DIN401	09E43604S01	CONN,SOCKET 10P
\$1	DIN401	09E43604S01	CONN,SOCKET 10P
	JK1201	09E43610S01	CONN,JACK 3P
	JK1202	09E43609S01	CONN,JACK 3P
	JK301	09E43602S01	CONN,JACK 5P
	LCD901	65E43597S01	DISPLAY,149□~82.9□~5.0
	M505	59E43624S01	DC-FAN
	SD1	82E43628S01	Micro SD Card 4G (Class4)
	SK201	09E43603S01	CONN,Micro SD 9P
	SK401	09E43611S01	CONN,UAA04H100 4P

Mark Model Code

#1 INE-W940 Only,


\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

Packing Method View

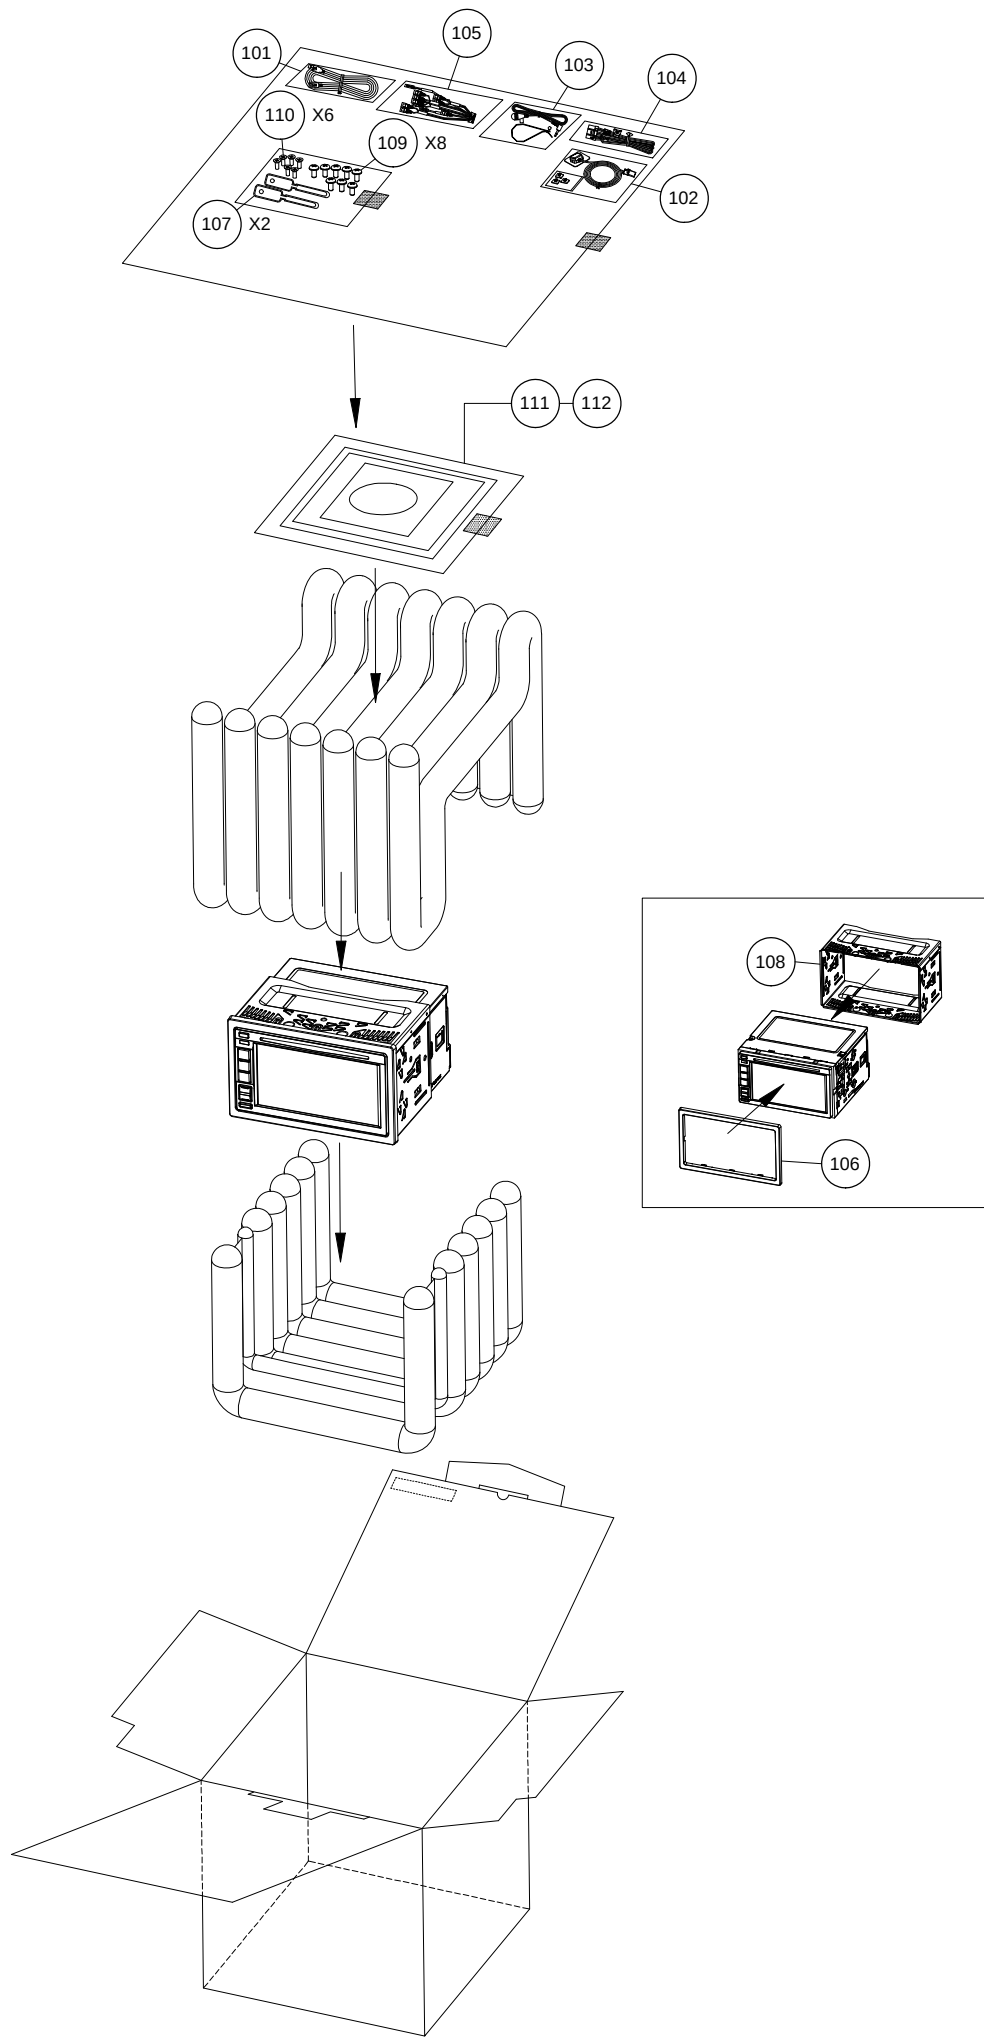

MODEL	Symbol No.	Parts No.	Description
	101	09E43616S01	ASSY,USB,4P,BLACK
	102	09E43617S01	ASSY,MAGE1835G4GEA
	103	09E43618S01	ASSY,HM6-OB34-W4M-353
	104	09E43619S01	ASSY,ANIC-0050-08A,16P
	105	09E43620S01	ASSY,ANIF-0792-01A,20P
	106	33E43634S01	FACE,PLATE
	107	07E43641S01	BKT,RELEASE
	108	15E43644S01	CASE,INNER
	109	03E38503S01	SCR,M5X8(B)(YEL)
	110	03E38509S01	SCR,M5X8(F)(YEL)
	111	68-25285Z01	MANUAL DISC (US)
	112	68-25285Z02	O/M-QUICK W940 AOAM

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			ANT1401	09E43621S01	ASSY, CABLE,2P,BLACK
MAIN-P.W.Board			C1101	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1102	08E37117S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1103	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1104	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1105	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C1107	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1108	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1109	08E37117S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1110	08E37117S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1111	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C1112	08E42969S01	CAP,CER.1uF/25V
MAIN-P.W.Board			C1113	08E42969S01	CAP,CER.1uF/25V
MAIN-P.W.Board			C1114	08E42969S01	CAP,CER.1uF/25V
MAIN-P.W.Board			C1116	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1117	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1118	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1119	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1125	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1126	08E43495S01	CAP,CER. 1uF/25V
MAIN-P.W.Board			C1127	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1128	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1129	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1130	08E42969S01	CAP,CER.1uF/25V
MAIN-P.W.Board			C1131	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1132	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C1133	08E43487S01	CAP,CER. 1uF/16V
MAIN-P.W.Board			C1138	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1139	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C1144	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C1145	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C1242	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C1243	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			C1244	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1245	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1246	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1247	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1248	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1249	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1250	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1251	08E43502S01	CAP,CER. 0.22uF/50V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1252	08E40855S01	CAP,CER. 2.2uF/25V
MAIN-P.W.Board			C1253	08E40855S01	CAP,CER. 2.2uF/25V
MAIN-P.W.Board			C1254	08E40855S01	CAP,CER. 2.2uF/25V
MAIN-P.W.Board			C1255	08E40855S01	CAP,CER. 2.2uF/25V
MAIN-P.W.Board			C1256	08E43187S01	CAP,CER.CP 4.7uF/25V
MAIN-P.W.Board			C1257	08E43187S01	CAP,CER.CP 4.7uF/25V
MAIN-P.W.Board			C1258	08E43187S01	CAP,CER.CP 4.7uF/25V
MAIN-P.W.Board			C1259	08E43187S01	CAP,CER.CP 4.7uF/25V
MAIN-P.W.Board			C1260	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C1261	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C1262	08E40849S01	CAP,CER. 1000pF/630V
MAIN-P.W.Board			C1263	08E38708S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1264	08E38708S01	CAP,CER. 0.047uF/25V
MAIN-P.W.Board			C1265	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C1266	08E36626S01	CAP,CER. 2200pF/50V
MAIN-P.W.Board			C1267	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1268	08E43496S01	CAP,CER. 4.7uF/16V
MAIN-P.W.Board			C1269	08E40754S01	CAP,CER.180pF/50V
MAIN-P.W.Board			C1270	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1271	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1272	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1273	08E37159S01	CAP,CER. 0.047uF/50V
MAIN-P.W.Board			C1274	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1275	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1301	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1302	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1303	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1304	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1305	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1306	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1307	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1308	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1309	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1310	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1311	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1312	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1313	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1314	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1315	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1316	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1317	08E36567S01	CAP,CER. 0.01uF/50V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C1318	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1319	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1328	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1377	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1378	08E43490S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C1381	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1382	08E43187S01	CAP,CER.CP 4.7uF/25V
MAIN-P.W.Board			C1383	08E40620S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1384	08E40620S01	CAP,CER. 12pF/50V
MAIN-P.W.Board			C1385	08E43481S01	CAP,CER. 24pF/50V
MAIN-P.W.Board			C1386	08E43481S01	CAP,CER. 24pF/50V
MAIN-P.W.Board			C1387	08E38393S01	CAP,CER. 680pF/50V
MAIN-P.W.Board			C1388	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1389	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C1390	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C1401	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1404	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1405	08E36567S01	CAP,CER. 0.01uF/50V
MAIN-P.W.Board			C1406	08E43482S01	CAP,CER. 82pF/50V
MAIN-P.W.Board			C1407	08E28760S01	CAP,CER. 10pF/50V
MAIN-P.W.Board			C1408	08E37117S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1409	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1410	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1411	08E36626S01	CAP,CER. 2200pF/50V
MAIN-P.W.Board			C1412	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1413	08E37117S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1414	08E38421S01	CAP,CER. 22pF/50V
MAIN-P.W.Board			C1415	08E37117S01	CAP,CER. 100pF/50V
MAIN-P.W.Board			C1416	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1418	08E36471S01	CAP,CER. 470pF/50V
MAIN-P.W.Board			C1419	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1420	08E43480S01	CAP,CER. 15pF/50V
MAIN-P.W.Board			C1421	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1422	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1423	08E43480S01	CAP,CER. 15pF/50V
MAIN-P.W.Board			C1424	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1425	08E36626S01	CAP,CER. 2200pF/50V
MAIN-P.W.Board			C1426	08E34594S01	CAP,CER. 3300pF/50V
MAIN-P.W.Board			C1427	08E43491S01	CAP,CER. 10uF/6.3V
MAIN-P.W.Board			C1428	08E43491S01	CAP,CER. 10uF/6.3V
MAIN-P.W.Board			C1429	08E43502S01	CAP,CER. 0.22uF/50V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1430	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1431	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1432	08E43495S01	CAP,CER. 1uF/25V
MAIN-P.W.Board			C1433	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1434	08E43496S01	CAP,CER. 4.7uF/16V
MAIN-P.W.Board			C1435	08E43489S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C1436	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1437	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1439	08E43489S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C1441	08E38538S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C1442	08E38538S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board		#1	C1444	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		\$1	C1444	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		#1	C1445	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		\$1	C1445	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		#1	C1446	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		\$1	C1446	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		#1	C1447	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board		\$1	C1447	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C1448	08E43498S01	CAP,CER. 2.2uF/16V
MAIN-P.W.Board			C1449	08E43491S01	CAP,CER. 10uF/6.3V
MAIN-P.W.Board			C1450	08E43491S01	CAP,CER. 10uF/6.3V
MAIN-P.W.Board			C1451	08E38538S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C1452	08E38538S01	CAP,CER. 6800pF/50V
MAIN-P.W.Board			C1453	08E43489S01	CAP,CER. 10uF/10V
MAIN-P.W.Board			C1492	08E36596S01	CAP,CER. 1000pF/50V
MAIN-P.W.Board			C1495	08E43479S01	CAP,CER. 3pF/50V
MAIN-P.W.Board			C1497	08E38481S01	CAP,CER. 18pF/50V
MAIN-P.W.Board			C1499	08E43492S01	CAP,CER. 3.3uF/25V
MAIN-P.W.Board			C1552	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C1553	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C1554	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C1555	08E41032S01	CAP,CER. 0.1uF/50V
MAIN-P.W.Board			C1557	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1558	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1559	08E43497S01	CAP,CER. 1uF/50V
MAIN-P.W.Board			C1560	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1561	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1562	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C1563	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			C1564	08E43502S01	CAP,CER. 0.22uF/50V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			C1567	08E41035S01	CAP,CER. 0.01uF/630V
MAIN-P.W.Board			C1569	08E43490S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C1570	08E43490S01	CAP,CER. 0.022uF/50V
MAIN-P.W.Board			C1571	08E43502S01	CAP,CER. 0.22uF/50V
MAIN-P.W.Board			CB1101	09E43608S01	CONN,WTB 16P
MAIN-P.W.Board			CB1202	09E43606S01	CONN,WTB
MAIN-P.W.Board			CB1304	09E43208S01	WTB,5P 1.25mm ANG-S
MAIN-P.W.Board			CB1306	09E43613S01	CONN,WTB 60P
MAIN-P.W.Board			CB1407	09E43598S01	CONN,WTB 8P
MAIN-P.W.Board			CB1508	09E43614S01	CONN, SMW200-10P
MAIN-P.W.Board			D1101	48E41046S01	DIODE,1SS355
MAIN-P.W.Board			D1102	48E41046S01	DIODE,1SS355
MAIN-P.W.Board			D1103	48E43533S01	DIODE SWITCHING
MAIN-P.W.Board			D1104	48E43532S01	DIO,KDS184
MAIN-P.W.Board			D1205	48E37886S01	DIODE,DAP222
MAIN-P.W.Board			D1206	48E37886S01	DIODE,DAP222
MAIN-P.W.Board			D1207	48E37886S01	DIODE,DAP222
MAIN-P.W.Board			D1208	48E43535S01	DIO,SWITCHING,1SS361
MAIN-P.W.Board			D1209	48E43534S01	DIO,SWITCHING,1SS352
MAIN-P.W.Board			D1410	48E43536S01	DIO,SWITCHING,DA3J101F0L
MAIN-P.W.Board			D1512	48E39348S01	DIODE,1SR154-400
MAIN-P.W.Board			D1513	48E43535S01	DIO,SWITCHING,1SS361
MAIN-P.W.Board			E1101	23E43508S01	CAP,ELY. 22uF/16V
MAIN-P.W.Board			E1102	23E43508S01	CAP,ELY. 22uF/16V
MAIN-P.W.Board			E1103	23E43508S01	CAP,ELY. 22uF/16V
MAIN-P.W.Board			E1104	23E43508S01	CAP,ELY. 22uF/16V
MAIN-P.W.Board			E1105	23E43503S01	CAP,ELY. 10uF/16V
MAIN-P.W.Board			E1106	23E43513S01	CAP,ELY.4700uF/16V
MAIN-P.W.Board			E1107	23E43508S01	CAP,ELY. 22uF/16V
MAIN-P.W.Board			E1208	23E43503S01	CAP,ELY. 10uF/16V
MAIN-P.W.Board			E1309	23E43512S01	CAP,ELY. 1000uF/6.3V
MAIN-P.W.Board			E1411	23E43503S01	CAP,ELY. 10uF/16V
MAIN-P.W.Board			E1412	23E43503S01	CAP,ELY. 10uF/16V
MAIN-P.W.Board			E1413	23E43505S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board			E1414	23E43505S01	CAP,ELY. 100uF/16V
MAIN-P.W.Board			E1515	23E43503S01	CAP,ELY. 10uF/16V
MAIN-P.W.Board			E1516	23E43503S01	CAP,ELY. 10uF/16V
MAIN-P.W.Board			E1517	23E43504S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1518	23E43507S01	CAP,ELY. 220uF/25V
MAIN-P.W.Board			E1519	23E43510S01	CAP,ELY. 470uF/16V
MAIN-P.W.Board			E1520	23E43506S01	CAP,ELY. 220uF/16V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			E1521	23E43506S01	CAP,ELY. 220uF/16V
MAIN-P.W.Board			E1522	23E43506S01	CAP,ELY. 220uF/16V
MAIN-P.W.Board			E1523	23E43506S01	CAP,ELY. 220uF/16V
MAIN-P.W.Board			E1524	23E43504S01	CAP,ELY. 1uF/50V
MAIN-P.W.Board			E1525	23E43508S01	CAP,ELY. 22uF/16V
MAIN-P.W.Board			IC1101	51E43571S01	IC,TDA7717
MAIN-P.W.Board			IC1102	48E43552S01	TR,S-80942CNMC-G9CT2U
MAIN-P.W.Board			IC1103	51E43570S01	IC,TDA7388A
MAIN-P.W.Board			IC1204	48E43547S01	TR,BH7073G
MAIN-P.W.Board			IC1205	48E43547S01	TR,BH7073G
MAIN-P.W.Board			IC1206	51E38444S01	IC,NJM 4558M
MAIN-P.W.Board			IC1207	51E43556S01	IC,TC7SET08FU
MAIN-P.W.Board			IC1208	51E43557S01	IC,TC7SET02FU-X
MAIN-P.W.Board			IC1309	48E43551S01	TR,S-80927CNMC-G8XT2U
MAIN-P.W.Board			IC1310	51E43560S01	IC,MB9AF116NAPMC-G-JNE2
MAIN-P.W.Board			IC1311	51E43566S01	IC,GT24C16 EEPROM
MAIN-P.W.Board			IC1412	51-22873Z01	TEA6636HW/V103 -QT
MAIN-P.W.Board			IC1413	51E43558S01	IC,CS4344-DZZR
MAIN-P.W.Board			IC1514	51-13711Z02	TB2920AHQ -ZS
MAIN-P.W.Board			JK1201	09E43610S01	CONN,JACK 3P
MAIN-P.W.Board			JK1202	09E43609S01	CONN,JACK 3P
MAIN-P.W.Board		#1	L1301	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board		\$1	L1301	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board		%1	L1301	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board			L1302	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board			L1303	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board			L1304	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board			L1305	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board			L1306	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1307	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1308	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1309	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1310	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1311	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1312	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1313	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1314	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1315	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1316	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1318	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1319	06E36464S01	RES,CF. 0-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			L1320	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1321	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1322	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1323	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1324	06E34580S01	RES,CF. 300-1/16W
MAIN-P.W.Board			L1325	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1326	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1327	06E34580S01	RES,CF. 300-1/16W
MAIN-P.W.Board			L1328	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1329	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1330	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1331	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1332	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1333	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1334	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			L1409	24E43587S01	COIL,IND. 4.7uH
MAIN-P.W.Board			L1411	24E43586S01	COIL,IND. 0.82uH
MAIN-P.W.Board			L1412	24E43588S01	COIL,IND. 0.27uH
MAIN-P.W.Board			L1413	24E43576S01	COIL,IND. 3.3uH
MAIN-P.W.Board			L1414	24E43585S01	COIL,IND. 290nH
MAIN-P.W.Board			L1415	24E43589S01	COIL,RF. 100MHz
MAIN-P.W.Board			L1416	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1417	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1418	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1419	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1420	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1421	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1422	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1423	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1424	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1425	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			L1526	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board			L1527	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board			L1528	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board			L1529	91E43520S01	FIL,EMI HH-1M1608
MAIN-P.W.Board			Q1101	48E43549S01	TR,KRA 102S
MAIN-P.W.Board			Q1102	48E08369S01	TR,CP KRC103S
MAIN-P.W.Board			Q1103	48E43003S01	TR,UMD3N
MAIN-P.W.Board			Q1104	48E43549S01	TR,KRA 102S
MAIN-P.W.Board			Q1105	48E08369S01	TR,CP KRC103S
MAIN-P.W.Board			Q1206	48E43550S01	TR,IMH23

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			Q1207	48E43550S01	TR,IMH23
MAIN-P.W.Board			Q1208	48E43550S01	TR,IMH23
MAIN-P.W.Board			Q1209	48E43549S01	TR,KRA 102S
MAIN-P.W.Board			Q1210	48E37219S01	TR,2SA1774TL
MAIN-P.W.Board			Q1412	48E43555S01	TR,BCX54
MAIN-P.W.Board			Q1513	48E08369S01	TR,CP KRC103S
MAIN-P.W.Board			Q1514	48E08369S01	TR,CP KRC103S
MAIN-P.W.Board			Q1515	48E43546S01	TR,KTA1505SY
MAIN-P.W.Board			Q1516	48E08369S01	TR,CP KRC103S
MAIN-P.W.Board			Q1517	48E43548S01	TR,KRA 102S
MAIN-P.W.Board			Q1518	48E08369S01	TR,CP KRC103S
MAIN-P.W.Board			R1101	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1102	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1103	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1104	06E31172S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1105	06E31172S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1106	06E36620S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R1108	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1109	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1110	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1111	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1112	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1113	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1114	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1115	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1117	06E35132S01	RES,CF. 82K-1/16W
MAIN-P.W.Board			R1118	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1119	06E43368S01	RES,CF. 33K-1/4W
MAIN-P.W.Board			R1120	06E36559S01	RES,CF. 47K-1/16W
MAIN-P.W.Board			R1121	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1123	06E40975S01	RES,CF. 4.7K-1/4W
MAIN-P.W.Board			R1124	06E36659S01	RES,CF. 15K-1/16W
MAIN-P.W.Board			R1125	06E40975S01	RES,CF. 4.7K-1/4W
MAIN-P.W.Board			R1223	06E36658S01	RES,CF. 8.2K-1/16W
MAIN-P.W.Board			R1224	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1225	06E31805S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R1226	06E31805S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R1227	06E31805S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R1228	06E31805S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R1229	06E31805S01	RES,CF. 75K-1/16W
MAIN-P.W.Board			R1230	06E31805S01	RES,CF. 75K-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R1231	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1232	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1233	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1234	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1235	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1236	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1237	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1238	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1239	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1240	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1241	06E36486S01	RES,CF. 100-1/4W
MAIN-P.W.Board			R1242	06E36486S01	RES,CF. 100-1/4W
MAIN-P.W.Board			R1243	06E36486S01	RES,CF. 100-1/4W
MAIN-P.W.Board			R1244	06E36486S01	RES,CF. 100-1/4W
MAIN-P.W.Board			R1245	06E36486S01	RES,CF. 100-1/4W
MAIN-P.W.Board			R1246	06E36486S01	RES,CF. 100-1/4W
MAIN-P.W.Board			R1247	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1248	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1249	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1250	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1251	06E40976S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1252	06E40976S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1253	06E40976S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1254	06E40976S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1255	06E27917S01	RES,CF.36-1/4W
MAIN-P.W.Board			R1256	06E37131S01	RES,CF. 39-1/4W
MAIN-P.W.Board			R1257	06E37131S01	RES,CF. 39-1/4W
MAIN-P.W.Board			R1258	06E27917S01	RES,CF.36-1/4W
MAIN-P.W.Board			R1259	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1260	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1261	06E31163S01	RES,CF. 220K-1/16W
MAIN-P.W.Board			R1262	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1265	06E38586S01	RES,CF. 470K-1/16W
MAIN-P.W.Board			R1266	06E31163S01	RES,CF. 220K-1/16W
MAIN-P.W.Board			R1267	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1268	06E36620S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R1269	06E36620S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R1270	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1271	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1272	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1273	06E36579S01	RES,CF. 1K-1/4W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1274	06E36579S01	RES,CF. 1K-1/4W
MAIN-P.W.Board			R1275	06E22929S01	RES,CF. 3.3K-1/4W
MAIN-P.W.Board			R1301	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1302	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1303	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1304	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1305	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1306	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1307	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1308	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1309	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1310	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1311	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1312	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1313	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1314	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1315	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1316	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1317	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1318	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1319	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1320	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1321	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1322	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1323	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1324	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1325	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1326	06E29168S01	RES,CF.106-J-1/16-CP
MAIN-P.W.Board			R1328	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1329	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1330	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1331	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1332	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1333	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1334	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1335	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1336	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1337	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1338	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1341	06E36623S01	RES,CF. 1M-1/16W
MAIN-P.W.Board			R1342	06E36622S01	RES,CF. 100K-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R1343	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1344	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1345	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1346	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1348	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1349	06E40980S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R1350	06E40980S01	RES,CF. 33-1/16W
MAIN-P.W.Board			R1351	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1353	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1354	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1355	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1356	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1357	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1358	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1359	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1361	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1364	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1365	06E36585S01	RES,CF. 2.2K-1/16W
MAIN-P.W.Board			R1366	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1367	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1371	06E36618S01	RES,CF. 1K-1/16W
MAIN-P.W.Board			R1372	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1373	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1374	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1375	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1376	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1378	06E33657S01	RES,CF. 15K-1/16W
MAIN-P.W.Board			R1380	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1381	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1382	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1383	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1384	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1385	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1386	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1387	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1388	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1389	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1391	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1392	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			R1393	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1394	06E36463S01	RES,CF. 10K-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			R1395	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1396	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1397	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1398	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1399	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1402	06E37279S01	RES,CF. 0-1/4W
MAIN-P.W.Board			R1405	06E38586S01	RES,CF. 470K-1/16W
MAIN-P.W.Board			R1409	06E38586S01	RES,CF. 470K-1/16W
MAIN-P.W.Board			R1410	06E31173S01	RES,CF. 68-1/16W
MAIN-P.W.Board			R1411	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1412	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1413	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1414	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1415	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1416	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1417	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1418	06E40983S01	RES,CF. 220-1/16W
MAIN-P.W.Board			R1419	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1420	06E31800S01	RES,CF. 150-1/16W
MAIN-P.W.Board			R1421	06E34580S01	RES,CF. 300-1/16W
MAIN-P.W.Board			R1422	06E34580S01	RES,CF. 300-1/16W
MAIN-P.W.Board			R1423	06E34580S01	RES,CF. 300-1/16W
MAIN-P.W.Board			R1425	91E43522S01	FIL,EMI BLM18EG601SN1D
MAIN-P.W.Board			R1426	06E31172S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1427	06E31172S01	RES,CF. 47-1/16W
MAIN-P.W.Board			R1430	06E40360S01	RES,CF. 3.3-1/16W
MAIN-P.W.Board			R1432	06E36463S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1433	06E36622S01	RES,CF. 100K-1/16W
MAIN-P.W.Board			R1434	06E36616S01	RES,CF. 100-1/16W
MAIN-P.W.Board			R1501	06E43371S01	RES,CF. 2.2K-1/4W
MAIN-P.W.Board			R1502	06E40976S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1503	06E40976S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1504	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1505	06E36668S01	RES,CF. 10K-1/16W
MAIN-P.W.Board			R1506	06E36465S01	RES,CF. 1.2K-1/16W
MAIN-P.W.Board			R1507	06E32227S01	RES,CF. 6.8K-1/16W
MAIN-P.W.Board			R1508	06E28796S01	RES,CF. 62K-1/16W
MAIN-P.W.Board			R1509	06E33241S01	RES,CF 334-F-1/16-CP
MAIN-P.W.Board			R1510	06E35404S01	RES,CF 333-F-1/16-CP
MAIN-P.W.Board			R1511	06E36466S01	RES,CF. 1.5K-1/16W
MAIN-P.W.Board			R1512	06E31809S01	RES,CF. 8.2K-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1513	06E36468S01	RES,CF. 3.3K-1/16W
MAIN-P.W.Board			R1514	06E40976S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1515	06E36587S01	RES,CF. 24K-1/16W
MAIN-P.W.Board			R1517	06E38407S01	RES,CF. 1.2K-1/4W
MAIN-P.W.Board			R1518	06E31156S01	RES,CF. 5.1K-1/16W
MAIN-P.W.Board			R1519	06E28796S01	RES,CF. 62K-1/16W
MAIN-P.W.Board			R1520	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1521	06E27904S01	RES,CF. 6.8K-1/4W
MAIN-P.W.Board			R1527	06E40976S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1529	06E40976S01	RES,CF. 10K-1/4W
MAIN-P.W.Board			R1530	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1531	06E36586S01	RES,CF. 22K-1/16W
MAIN-P.W.Board			R1538	06E35290S01	RES,CF. 6.2K-1/16W
MAIN-P.W.Board			R1539	06E32202S01	RES,CF,913-J-1/16-CP
MAIN-P.W.Board			R1542	06E31805S01	RES,CF. 75K-1/16W
MAIN-P.W.Board		#1	R1601	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		\$1	R1601	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board		%1	R1604	06E36464S01	RES,CF. 0-1/16W
MAIN-P.W.Board			SA1401	91E40632S01	FIL,SURGE 200V
MAIN-P.W.Board			TH1301	48E42173S01	THERMISTOR,100K
MAIN-P.W.Board			VL1101	24E43590S01	COIL,CHOKE 350uH
MAIN-P.W.Board			VL1402	24E43577S01	COIL,IND.560 uH
MAIN-P.W.Board			VL1403	24E43577S01	COIL,IND.560 uH
MAIN-P.W.Board			XL1301	91E43595S01	CRYSTAL,32.768KHz
MAIN-P.W.Board			XL1302	91E43592S01	CRYSTAL,4MHz
MAIN-P.W.Board			XL1403	91E43591S01	CRYSTAL,62.4MHz
MAIN-P.W.Board			ZD1101	48E43542S01	DIO,ZENER Z02W20V-Y
MAIN-P.W.Board			ZD1102	48E41047S01	DIO,ZENER Z5W27V
MAIN-P.W.Board			ZD1103	48E43540S01	DIO,ZENER UDZS4.3B
MAIN-P.W.Board			ZD1104	48E43538S01	DIO,ZENER UDZS9.1B
MAIN-P.W.Board			ZD1204	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1205	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1206	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1207	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1208	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1209	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1210	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1211	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1212	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1213	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1214	48E43539S01	DIO,ZENER UDZS18B

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MAIN-P.W.Board			ZD1215	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1216	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1217	48E43539S01	DIO,ZENER UDZS18B
MAIN-P.W.Board			ZD1218	48E43541S01	DIO,ZENER DZ2J056M0L
MULTI P.W.Board			ANT401	09E43605S01	CONN,GT5-1P WTB
MULTI P.W.Board			C101	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C102	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C103	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C104	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C105	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C106	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C107	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C108	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C109	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C110	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C111	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C112	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C113	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C114	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C115	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C116	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C117	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C118	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C119	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C120	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C121	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C122	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C123	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C124	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C125	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C126	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C127	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C128	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C129	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C130	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C131	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C132	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C133	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C134	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C135	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C136	08E43486S01	CAP,CER. 0.1uF/16V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MULTI P.W.Board			C137	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C138	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C139	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C140	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C141	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C142	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C143	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C149	08E40620S01	CAP,CER. 12pF/50V
MULTI P.W.Board			C150	08E40620S01	CAP,CER. 12pF/50V
MULTI P.W.Board			C151	08E43483S01	CAP,CER. 18pF/50V
MULTI P.W.Board			C152	08E43483S01	CAP,CER. 18pF/50V
MULTI P.W.Board			C156	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C157	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C158	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C159	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C161	08E36681S01	CAP,CER. 1000pF/50V
MULTI P.W.Board			C201	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C202	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C203	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C204	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C205	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C206	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C207	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C208	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C209	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C210	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C211	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C212	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C213	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C214	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C215	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C216	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C217	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C218	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C219	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C220	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C233	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C244	08E43500S01	CAP,CER. 2.2uF/16V
MULTI P.W.Board			C245	08E43500S01	CAP,CER. 2.2uF/16V
MULTI P.W.Board			C246	08E37117S01	CAP,CER. 100pF/50V
MULTI P.W.Board			C247	08E37117S01	CAP,CER. 100pF/50V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MULTI P.W.Board			C248	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C249	08E43496S01	CAP,CER. 4.7uF/16V
MULTI P.W.Board			C250	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C251	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C252	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C253	08E43486S01	CAP,CER. 0.1uF/16V
MULTI P.W.Board			C254	08E43498S01	CAP,CER. 2.2uF/16V
MULTI P.W.Board			C257	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C301	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C302	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C303	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C304	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C305	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C306	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C307	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C308	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C309	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C310	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C311	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C312	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C313	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C314	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C315	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C316	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C317	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C318	08E43485S01	CAP,CER. 20pF50V
MULTI P.W.Board			C319	08E42139S01	CAP,CER.100pF/50V
MULTI P.W.Board			C323	08E42139S01	CAP,CER.100pF/50V
MULTI P.W.Board			C327	08E42139S01	CAP,CER.100pF/50V
MULTI P.W.Board			C328	08E42139S01	CAP,CER.100pF/50V
MULTI P.W.Board			C329	08E42139S01	CAP,CER.100pF/50V
MULTI P.W.Board			C333	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C334	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C335	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C336	08E38421S01	CAP,CER. 22pF/50V
MULTI P.W.Board			C337	08E38421S01	CAP,CER. 22pF/50V
MULTI P.W.Board			C340	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C341	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C342	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C343	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C344	08E41032S01	CAP,CER. 0.1uF/50V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MULTI P.W.Board			C345	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C346	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C347	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C348	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C349	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C350	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C351	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C352	08E43502S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C353	08E43496S01	CAP,CER. 4.7uF/16V
MULTI P.W.Board			C354	08E43496S01	CAP,CER. 4.7uF/16V
MULTI P.W.Board			C358	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board			C359	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board			C360	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board			C361	08E37159S01	CAP,CER. 0.047uF/50V
MULTI P.W.Board			C362	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C363	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C364	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C365	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C366	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C367	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C368	08E39649S01	CAP,CER. 47pF/50V
MULTI P.W.Board			C369	08E39649S01	CAP,CER. 47pF/50V
MULTI P.W.Board			C371	08E43495S01	CAP,CER. 1uF/25V
MULTI P.W.Board			C372	08E43495S01	CAP,CER. 1uF/25V
MULTI P.W.Board			C373	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C374	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C401	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C404	08E37117S01	CAP,CER. 100pF/50V
MULTI P.W.Board			C405	08E35494S01	CAP,CER. 2pF/50V
MULTI P.W.Board			C408	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C409	08E36681S01	CAP,CER. 1000pF/50V
MULTI P.W.Board			C410	08E43500S01	CAP,CER. 2.2uF/16V
MULTI P.W.Board			C411	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C412	08E43500S01	CAP,CER. 2.2uF/16V
MULTI P.W.Board			C414	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board		#1	C416	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board		\$1	C416	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board			C419	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C420	08E43500S01	CAP,CER. 2.2uF/16V
MULTI P.W.Board			C421	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C426	08E43489S01	CAP,CER. 10uF/10V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MULTI P.W.Board		#1	C428	08E43502S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board		\$1	C428	08E43502S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board		#1	C430	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board		\$1	C430	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board		#1	C431	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board		\$1	C431	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board			C472	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C481	08E43483S01	CAP,CER. 18pF/50V
MULTI P.W.Board			C482	08E43483S01	CAP,CER. 18pF/50V
MULTI P.W.Board			C501	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C503	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C515	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C517	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C519	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C520	08E36567S01	CAP,CER. 0.01uF/50V
MULTI P.W.Board			C521	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C523	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C599	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C602	08E43501S01	CAP,CER. 22uF/6.3V
MULTI P.W.Board			C606	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C607	08E41389S01	CAP,CER. 3300pF/50V
MULTI P.W.Board			C608	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C609	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C611	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C612	08E37117S01	CAP,CER. 100pF/50V
MULTI P.W.Board			C613	08E36627S01	CAP,CER. 0.022uF/50V
MULTI P.W.Board			C614	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C615	08E37123S01	CAP,CER. 0.33uF/16V
MULTI P.W.Board			C616	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C617	08E37123S01	CAP,CER. 0.33uF/16V
MULTI P.W.Board			C618	08E43501S01	CAP,CER. 22uF/6.3V
MULTI P.W.Board			C619	08E36566S01	CAP,CER. 4700pF/50V
MULTI P.W.Board			C620	08E43488S01	CAP,CER. 10uF/25V
MULTI P.W.Board			C621	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C622	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C623	08E43501S01	CAP,CER. 22uF/6.3V
MULTI P.W.Board			C624	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C627	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C628	08E43496S01	CAP,CER. 4.7uF/16V
MULTI P.W.Board			C630	08E43488S01	CAP,CER. 10uF/25V
MULTI P.W.Board			C631	08E43488S01	CAP,CER. 10uF/25V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MULTI P.W.Board			C632	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C633	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C635	08E43488S01	CAP,CER. 10uF/25V
MULTI P.W.Board			C636	08E41032S01	CAP,CER. 0.1uF/50V
MULTI P.W.Board			C637	08E36681S01	CAP,CER. 1000pF/50V
MULTI P.W.Board			C638	08E37123S01	CAP,CER. 0.33uF/16V
MULTI P.W.Board			C639	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C640	08E43493S01	CAP,CER. 0.039uF50V
MULTI P.W.Board			C641	08E43484S01	CAP,CER. 220pF/50V
MULTI P.W.Board			C642	08E43494S01	CAP,CER. 0.082uF50V
MULTI P.W.Board			C643	08E37152S01	CAP,CER. 560pF/50V
MULTI P.W.Board			C644	08E43496S01	CAP,CER. 4.7uF/16V
MULTI P.W.Board			C651	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C652	08E36681S01	CAP,CER. 1000pF/50V
MULTI P.W.Board			C653	08E36681S01	CAP,CER. 1000pF/50V
MULTI P.W.Board			C654	08E36681S01	CAP,CER. 1000pF/50V
MULTI P.W.Board			C655	08E36681S01	CAP,CER. 1000pF/50V
MULTI P.W.Board			C656	08E36681S01	CAP,CER. 1000pF/50V
MULTI P.W.Board			C657	08E36681S01	CAP,CER. 1000pF/50V
MULTI P.W.Board			C659	23E41346S01	CAP,CER. 0.22uF/50V
MULTI P.W.Board			C661	08E43489S01	CAP,CER. 10uF/10V
MULTI P.W.Board			C664	08E36566S01	CAP,CER. 4700pF/50V
MULTI P.W.Board			C677	08E43501S01	CAP,CER. 22uF/6.3V
MULTI P.W.Board			CH1508	09E43615S01	ASSY,10P, ASS'Y CABLE
MULTI P.W.Board			CN501	09E37938S01	CONN,WTB 8P
MULTI P.W.Board			CN502	09E43612S01	CONN,WTB 26P
MULTI P.W.Board			CN503	09E43390S01	CONN,SMW200-10G
MULTI P.W.Board			CN504	09E43613S01	CONN,WTB 60P
MULTI P.W.Board			CN505	09E37199S01	CONN,WTB-02P
MULTI P.W.Board			CN506	09E43391S01	CONN,DW11-040L-BT
MULTI P.W.Board			CN507	09E43391S01	CONN,DW11-040L-BT
MULTI P.W.Board			CN701	09E43599S01	CONN,WTB 15P
MULTI P.W.Board			D401	48E43543S01	DIO,SHOTTKY RB160M
MULTI P.W.Board			D601	48E42527S01	DIODE,SHOTTKYSMAB34
MULTI P.W.Board			D602	48E42527S01	DIODE,SHOTTKYSMAB34
MULTI P.W.Board			D603	48E42527S01	DIODE,SHOTTKYSMAB34
MULTI P.W.Board			D609	48E41046S01	DIODE,1SS355
MULTI P.W.Board			D610	48E42527S01	DIODE,SHOTTKYSMAB34
MULTI P.W.Board		#1	DIN401	09E43604S01	CONN,SOCKET 10P
MULTI P.W.Board		\$1	DIN401	09E43604S01	CONN,SOCKET 10P
MULTI P.W.Board			E502	23E43505S01	CAP,ELY. 100uF/16V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MULTI P.W.Board			E503	23E43511S01	CAP,ELY. 47uF/6.3V
MULTI P.W.Board			E504	23E43511S01	CAP,ELY. 47uF/6.3V
MULTI P.W.Board			E505	23E43505S01	CAP,ELY. 100uF/16V
MULTI P.W.Board			E506	23E43505S01	CAP,ELY. 100uF/16V
MULTI P.W.Board			E507	23E43508S01	CAP,ELY. 22uF/16V
MULTI P.W.Board			E508	23E43511S01	CAP,ELY. 47uF/6.3V
MULTI P.W.Board			E509	23E43507S01	CAP,ELY. 220uF/25V
MULTI P.W.Board			E601	23E43508S01	CAP,ELY. 22uF/16V
MULTI P.W.Board			E602	23E43505S01	CAP,ELY. 100uF/16V
MULTI P.W.Board			E603	23E43505S01	CAP,ELY. 100uF/16V
MULTI P.W.Board			E604	23E43505S01	CAP,ELY. 100uF/16V
MULTI P.W.Board			E606	23E43508S01	CAP,ELY. 22uF/16V
MULTI P.W.Board			E607	23E43505S01	CAP,ELY. 100uF/16V
MULTI P.W.Board			E610	23E43505S01	CAP,ELY. 100uF/16V
MULTI P.W.Board		#1	F401	65E43623S01	FUSE, 1.5A
MULTI P.W.Board		\$1	F401	65E43623S01	FUSE, 1.5A
MULTI P.W.Board			F402	91E43514S01	FIL,SAWFIL
MULTI P.W.Board			IC101	51E43561S01	CPU,TCC9101
MULTI P.W.Board			IC201	51E43564S01	IC,MT47H64M16HR
MULTI P.W.Board			IC202	51E43564S01	IC,MT47H64M16HR
MULTI P.W.Board			IC203	51E43563S01	IC,MT29F1G08
MULTI P.W.Board			IC204	51-15224Z01	MFI341S2313 -SE2
MULTI P.W.Board			IC205	51E43565S01	IC,MB85RC16
MULTI P.W.Board			IC206	51E43558S01	IC,CS4344-DZZR
MULTI P.W.Board			IC301	51E43559S01	IC,TW8835
MULTI P.W.Board			IC302	48E43547S01	TR,BH7073G
MULTI P.W.Board			IC401	51E43573S01	IC,UBX-G6010NT
MULTI P.W.Board			IC404	51E43627S01	UGZZC-G02A
MULTI P.W.Board		#1	IC406	51E40066S01	IC,TC74VHCT08AFT
MULTI P.W.Board		\$1	IC406	51E40066S01	IC,TC74VHCT08AFT
MULTI P.W.Board			IC601	51E43572S01	IC,NJM1815GM1(TE2)
MULTI P.W.Board			IC602	51E43567S01	IC,BA33BC0FP
MULTI P.W.Board			IC603	51E43200S01	IC,L5973DTR
MULTI P.W.Board			IC604	51E43200S01	IC,L5973DTR
MULTI P.W.Board			IC605	51E43200S01	IC,L5973DTR
MULTI P.W.Board			IC606	51E43569S01	IC,ST1S10
MULTI P.W.Board			IC607	51E43568S01	IC,BA15BC0FP-E2
MULTI P.W.Board			IC608	51E43569S01	IC,ST1S10
MULTI P.W.Board			IC609	51E43200S01	IC,L5973DTR
MULTI P.W.Board			JK301	09E43602S01	CONN,JACK 5P
MULTI P.W.Board			L105	91E43525S01	FIL,EMI

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MULTI P.W.Board			L109	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L110	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L125	91E43517S01	FIL,EMI
MULTI P.W.Board			L143	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L204	91E43525S01	FIL,EMI
MULTI P.W.Board			L205	91E43525S01	FIL,EMI
MULTI P.W.Board			L206	91E43517S01	FIL,EMI
MULTI P.W.Board			L207	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L208	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L212	91E43517S01	FIL,EMI
MULTI P.W.Board			L301	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			L304	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L307	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L312	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			L313	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			L314	91E43524S01	FIL,EMI HH-1M2012
MULTI P.W.Board			L333	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			L345	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L346	91E43524S01	FIL,EMI HH-1M2012
MULTI P.W.Board			L347	91E43524S01	FIL,EMI HH-1M2012
MULTI P.W.Board			L348	91E43524S01	FIL,EMI HH-1M2012
MULTI P.W.Board			L349	91E43524S01	FIL,EMI HH-1M2012
MULTI P.W.Board			L350	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L401	24E43584S01	COIL,IND. 6.8nH
MULTI P.W.Board		#1	L402	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board		\$1	L402	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			L416	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L418	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L419	91E43527S01	FIL,EMI BLM15HD102SN1
MULTI P.W.Board			L421	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			L422	91E43525S01	FIL,EMI
MULTI P.W.Board			L423	91E43525S01	FIL,EMI
MULTI P.W.Board			L515	91E43525S01	FIL,EMI
MULTI P.W.Board			L517	91E43526S01	FIL,EMI
MULTI P.W.Board			L520	91E43517S01	FIL,EMI
MULTI P.W.Board			L524	91E43517S01	FIL,EMI
MULTI P.W.Board			L530	91E43525S01	FIL,EMI
MULTI P.W.Board			L533	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L534	91E43515S01	FIL,EMI HB-1M1608-601J
MULTI P.W.Board			L535	91E43515S01	FIL,EMI HB-1M1608-601J
MULTI P.W.Board			L536	91E43525S01	FIL,EMI

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MULTI P.W.Board			L537	91E43515S01	FIL,EMI HB-1M1608-601J
MULTI P.W.Board			L538	91E43517S01	FIL,EMI
MULTI P.W.Board			L539	91E43517S01	FIL,EMI
MULTI P.W.Board			L540	91E43517S01	FIL,EMI
MULTI P.W.Board			L541	91E43517S01	FIL,EMI
MULTI P.W.Board			L601	24E43579S01	COIL,IND.33 uH
MULTI P.W.Board			L602	24E43578S01	COIL,IND.22 uH
MULTI P.W.Board			L603	24E43582S01	COIL,IND. 10uH
MULTI P.W.Board			L605	24E43581S01	COIL,IND.68 uH
MULTI P.W.Board			L611	24E43583S01	COIL,IND. 6.8uH
MULTI P.W.Board			L612	24E43580S01	COIL,IND.56 uH
MULTI P.W.Board			L613	91E43517S01	FIL,EMI
MULTI P.W.Board			L621	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L622	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L626	91E43516S01	FIL,EMI
MULTI P.W.Board			L627	91E43524S01	FIL,EMI HH-1M2012
MULTI P.W.Board			L628	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L629	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L630	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L631	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L632	06E43467S01	RES,CF.0-1/8
MULTI P.W.Board			L705	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L733	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			L734	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			L735	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			L737	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			L738	91E43520S01	FIL,EMI HH-1M1608
MULTI P.W.Board			L739	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			Q301	48E38440S01	TR,2SA1037AK
MULTI P.W.Board			Q302	48E38440S01	TR,2SA1037AK
MULTI P.W.Board		#1	Q401	48E43553S01	FET, 2N7002LT1G
MULTI P.W.Board		\$1	Q401	48E43553S01	FET, 2N7002LT1G
MULTI P.W.Board			Q501	48E43554S01	TR,KTA1666
MULTI P.W.Board			Q502	48E08369S01	TR,CP KRC103S
MULTI P.W.Board			R101	06E36667S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R103	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R114	06E42134S01	RES,CF. 1M-1/16W
MULTI P.W.Board			R115	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R117	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R119	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R121	06E42227S01	RES,CF. 4.7K-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MULTI P.W.Board			R146	06E43460S01	RES,CF.10K-1/16W
MULTI P.W.Board			R148	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R149	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R150	06E43469S01	RES,CF402-1/16W
MULTI P.W.Board			R151	06E43459S01	RES,CF.1K-1/16W
MULTI P.W.Board			R154	06E43460S01	RES,CF.10K-1/16W
MULTI P.W.Board			R155	06E40848S01	RES,CF. 47K-1/16W
MULTI P.W.Board			R157	06E43459S01	RES,CF.1K-1/16W
MULTI P.W.Board			R158	06E43471S01	RES,CF.44.2-1/16W
MULTI P.W.Board			R159	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R163	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R164	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R168	06E43470S01	RES,CF.6.2M-1/16W
MULTI P.W.Board			R181	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R182	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R183	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R184	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R185	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R186	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R187	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R188	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R189	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R191	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R192	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R193	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R194	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R195	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R196	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R203	06E42299S01	RES,CF. 1K-1/16W
MULTI P.W.Board			R204	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R205	06E42299S01	RES,CF. 1K-1/16W
MULTI P.W.Board			R206	06E40848S01	RES,CF. 47K-1/16W
MULTI P.W.Board			R207	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R208	06E40848S01	RES,CF. 47K-1/16W
MULTI P.W.Board			R209	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R211	06E43459S01	RES,CF.1K-1/16W
MULTI P.W.Board			R225	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R226	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R227	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R228	06E31800S01	RES,CF. 150-1/16W
MULTI P.W.Board			R229	06E40980S01	RES,CF. 33-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MULTI P.W.Board			R230	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R231	06E43460S01	RES,CF.10K-1/16W
MULTI P.W.Board			R232	06E43460S01	RES,CF.10K-1/16W
MULTI P.W.Board			R233	06E43460S01	RES,CF.10K-1/16W
MULTI P.W.Board			R234	06E43460S01	RES,CF.10K-1/16W
MULTI P.W.Board			R235	06E43460S01	RES,CF.10K-1/16W
MULTI P.W.Board			R236	06E36559S01	RES,CF. 47K-1/16W
MULTI P.W.Board			R246	06E43460S01	RES,CF.10K-1/16W
MULTI P.W.Board			R253	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R254	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R255	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R256	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R257	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R258	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R259	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R260	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R269	06E36618S01	RES,CF. 1K-1/16W
MULTI P.W.Board			R270	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R272	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R273	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R274	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R300	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R3001	06E42283S01	RES,CF. 22K-1/16W
MULTI P.W.Board			R3002	06E40848S01	RES,CF. 47K-1/16W
MULTI P.W.Board			R3003	06E43465S01	RES,CF560.-1/16W
MULTI P.W.Board			R3008	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R3010	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R329	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R331	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R335	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R337	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R338	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R339	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R340	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R341	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R343	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R345	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R346	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R347	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R348	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R349	06E43462S01	RES,CF.33-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MULTI P.W.Board			R350	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R352	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R353	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R360	06E36618S01	RES,CF. 1K-1/16W
MULTI P.W.Board			R361	06E40976S01	RES,CF. 10K-1/4W
MULTI P.W.Board			R362	06E27917S01	RES,CF.36-1/4W
MULTI P.W.Board			R363	06E37131S01	RES,CF. 39-1/4W
MULTI P.W.Board			R364	06E36618S01	RES,CF. 1K-1/16W
MULTI P.W.Board			R365	06E36579S01	RES,CF. 1K-1/4W
MULTI P.W.Board			R366	06E36579S01	RES,CF. 1K-1/4W
MULTI P.W.Board			R367	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R369	06E36579S01	RES,CF. 1K-1/4W
MULTI P.W.Board			R370	06E40976S01	RES,CF. 10K-1/4W
MULTI P.W.Board			R373	06E40848S01	RES,CF. 47K-1/16W
MULTI P.W.Board			R374	06E42283S01	RES,CF. 22K-1/16W
MULTI P.W.Board			R375	06E43465S01	RES,CF560.-1/16W
MULTI P.W.Board			R376	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R377	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R378	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R381	06E42134S01	RES,CF. 1M-1/16W
MULTI P.W.Board			R382	06E43464S01	RES,CF.300-1/16W
MULTI P.W.Board			R383	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R384	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R385	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R386	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R391	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R392	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R393	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R394	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R395	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R396	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R397	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R398	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R399	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R402	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R403	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R405	06E36462S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R406	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R407	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R408	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R409	06E40980S01	RES,CF. 33-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MULTI P.W.Board			R410	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R411	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R412	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R413	06E36462S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R414	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board		#1	R429	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board		\$1	R429	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R461	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R479	06E43470S01	RES,CF.6.2M-1/16W
MULTI P.W.Board		#1	R481	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board		\$1	R481	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board		#1	R482	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board		\$1	R482	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board		#1	R483	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board		\$1	R483	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board		#1	R484	06E28547S01	RES,CF. 820-1/4W
MULTI P.W.Board		\$1	R484	06E28547S01	RES,CF. 820-1/4W
MULTI P.W.Board		#1	R485	06E36579S01	RES,CF. 1K-1/4W
MULTI P.W.Board		\$1	R485	06E36579S01	RES,CF. 1K-1/4W
MULTI P.W.Board		#1	R486	06E36579S01	RES,CF. 1K-1/4W
MULTI P.W.Board		\$1	R486	06E36579S01	RES,CF. 1K-1/4W
MULTI P.W.Board			R501	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R502	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R503	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R504	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R505	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R506	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R507	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R509	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R510	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R511	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R512	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R513	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R514	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R515	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R516	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R517	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R519	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R520	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R521	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R522	06E43457S01	RES,CF. 0-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MULTI P.W.Board			R526	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R527	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R528	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R529	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R530	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R531	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R541	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board			R542	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board			R543	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board			R544	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board			R558	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R559	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R560	06E43463S01	RES,CF.75-1/16W
MULTI P.W.Board			R561	06E43463S01	RES,CF.75-1/16W
MULTI P.W.Board			R562	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R563	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R564	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R565	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R568	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R569	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R570	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R571	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R572	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R573	06E36465S01	RES,CF. 1.2K-1/16W
MULTI P.W.Board			R574	06E35349S01	RES,CF. 1-1/4W
MULTI P.W.Board			R575	06E36587S01	RES,CF. 24K-1/16W
MULTI P.W.Board			R576	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R578	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R579	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R580	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R581	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R582	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R583	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R584	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R585	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R586	06E28790S01	RES,CF. 5.6K-1/16W
MULTI P.W.Board			R587	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R588	06E36624S01	RES,CF. 56K-1/16W
MULTI P.W.Board			R589	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R590	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R591	06E43457S01	RES,CF. 0-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

MULTI P.W.Board			R592	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R593	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R594	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R595	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R596	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R597	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R598	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R599	06E43457S01	RES,CF. 0-1/16W
MULTI P.W.Board			R604	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R605	06E36466S01	RES,CF. 1.5K-1/16W
MULTI P.W.Board			R606	06E35164S01	RES,CF. 2K-1/16W
MULTI P.W.Board			R613	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R614	06E36591S01	RES,CF. 18K-1/16W
MULTI P.W.Board			R615	06E36667S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R619	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R620	06E43468S01	RES,CF.9.1K-1/16
MULTI P.W.Board			R621	06E43477S01	RES,CF.5.49K-1/10W
MULTI P.W.Board			R622	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R623	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R624	06E36666S01	RES,CF. 2.7K-1/16W
MULTI P.W.Board			R625	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R627	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R629	06E43473S01	RES,CF.2.15-1/10W
MULTI P.W.Board			R632	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board			R634	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R635	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R636	06E35163S01	RES,CF 132-F-1/16-CP
MULTI P.W.Board			R637	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R638	06E36466S01	RES,CF. 1.5K-1/16W
MULTI P.W.Board			R639	06E36468S01	RES,CF. 3.3K-1/16W
MULTI P.W.Board			R640	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R641	06E35290S01	RES,CF. 6.2K-1/16W
MULTI P.W.Board			R642	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R643	06E40553S01	RES,CF. 2.4K-1/16
MULTI P.W.Board			R644	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R648	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board			R651	06E32227S01	RES,CF. 6.8K-1/16W
MULTI P.W.Board			R652	06E32202S01	RES,CF,913-J-1/16-CP
MULTI P.W.Board			R653	06E28790S01	RES,CF. 5.6K-1/16W
MULTI P.W.Board			R654	06E32036S01	RES,CF. 110K-1/16W
MULTI P.W.Board			R655	06E28796S01	RES,CF. 62K-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MULTI P.W.Board			R656	06E41012S01	RES,CF. 300K-1/16W
MULTI P.W.Board			R657	06E31156S01	RES,CF. 5.1K-1/16W
MULTI P.W.Board			R658	06E37260S01	RES,CF. 150K-1/16W
MULTI P.W.Board			R660	06E28790S01	RES,CF. 5.6K-1/16W
MULTI P.W.Board			R661	06E31804S01	RES,CF. 68K-1/16W
MULTI P.W.Board			R662	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R663	06E37142S01	RES,CF. 12K-1/16W
MULTI P.W.Board			R665	06E37142S01	RES,CF. 12K-1/16W
MULTI P.W.Board			R666	06E38392S01	RES,CF. 560-1/16W
MULTI P.W.Board			R667	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R668	06E31804S01	RES,CF. 68K-1/16W
MULTI P.W.Board			R669	06E36463S01	RES,CF. 10K-1/16W
MULTI P.W.Board			R670	06E36560S01	RES,CF. 240K-1/16W
MULTI P.W.Board			R671	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R672	06E31156S01	RES,CF. 5.1K-1/16W
MULTI P.W.Board			R673	06E32037S01	RES,CF. 120K-1/16W
MULTI P.W.Board			R674	06E32227S01	RES,CF. 6.8K-1/16W
MULTI P.W.Board			R675	06E43458S01	RES,CF.160K-1/16W
MULTI P.W.Board			R677	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R679	06E36591S01	RES,CF. 18K-1/16W
MULTI P.W.Board			R680	06E36468S01	RES,CF. 3.3K-1/16W
MULTI P.W.Board			R681	06E37129S01	RES,CF. 2.2-1/4W
MULTI P.W.Board			R682	06E37129S01	RES,CF. 2.2-1/4W
MULTI P.W.Board			R683	06E37129S01	RES,CF. 2.2-1/4W
MULTI P.W.Board			R684	06E37129S01	RES,CF. 2.2-1/4W
MULTI P.W.Board			R685	06E37129S01	RES,CF. 2.2-1/4W
MULTI P.W.Board			R686	06E37129S01	RES,CF. 2.2-1/4W
MULTI P.W.Board			R687	06E36618S01	RES,CF. 1K-1/16W
MULTI P.W.Board			R688	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board			R697	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R698	06E37142S01	RES,CF. 12K-1/16W
MULTI P.W.Board			R701	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R702	06E43457S01	RES,CF.0-1/16W
MULTI P.W.Board			R703	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R704	06E37279S01	RES,CF. 0-1/4W
MULTI P.W.Board			R707	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R730	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R731	06E40980S01	RES,CF. 33-1/16W
MULTI P.W.Board			R732	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			R738	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R739	06E43462S01	RES,CF.33-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MULTI P.W.Board			R740	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R741	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R742	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R743	06E43462S01	RES,CF.33-1/16W
MULTI P.W.Board			R745	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R771	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R772	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R773	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board			R774	06E42227S01	RES,CF. 4.7K-1/16W
MULTI P.W.Board		#1	R781	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board		\$1	R781	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board		%1	R784	06E36464S01	RES,CF. 0-1/16W
MULTI P.W.Board			RA301	91E43519S01	FIL,EMI 4RV20-050A250
MULTI P.W.Board			RA302	91E43519S01	FIL,EMI 4RV20-050A250
MULTI P.W.Board			RA303	91E43519S01	FIL,EMI 4RV20-050A250
MULTI P.W.Board			RA304	91E43519S01	FIL,EMI 4RV20-050A250
MULTI P.W.Board			RA305	91E43519S01	FIL,EMI 4RV20-050A250
MULTI P.W.Board			RA306	91E43519S01	FIL,EMI 4RV20-050A250
MULTI P.W.Board			RA307	06E43478S01	RES,ARRAY. 33-1/16
MULTI P.W.Board			RA308	06E43478S01	RES,ARRAY. 33-1/16
MULTI P.W.Board			RA309	06E43478S01	RES,ARRAY. 33-1/16
MULTI P.W.Board			RA310	06E43478S01	RES,ARRAY. 33-1/16
MULTI P.W.Board			SK201	09E43603S01	CONN,Micro SD 9P
MULTI P.W.Board			SK401	09E43611S01	CONN,UAA04H100 4P
MULTI P.W.Board			VD401	48E43545S01	DIO,TVS,PGB1010603
MULTI P.W.Board			VD402	48E43545S01	DIO,TVS,PGB1010603
MULTI P.W.Board			VD403	91E43529S01	FIL,SURGE 100V
MULTI P.W.Board			VD407	91E43528S01	FIL,SURGE
MULTI P.W.Board			VD702	91E43528S01	FIL,SURGE
MULTI P.W.Board			VD703	91E43528S01	FIL,SURGE
MULTI P.W.Board			XL101	91E43593S01	CRYSTAL,12MHz
MULTI P.W.Board			XL102	91E43595S01	CRYSTAL,32.768KHz
MULTI P.W.Board			XL301	91E43594S01	CRYSTAL,27MHz
MULTI P.W.Board			XL401	91E43596S01	OSC CLOCK,KT3225L26000
MULTI P.W.Board			XL402	91E43595S01	CRYSTAL,32.768KHz
MULTI P.W.Board			Z401	91E43523S01	FIL,EMI CL-2S2012
MULTI P.W.Board		#1	ZD401	48E43541S01	DIO,ZENER DZ2J056M0L
MULTI P.W.Board		\$1	ZD401	48E43541S01	DIO,ZENER DZ2J056M0L
MULTI P.W.Board		#1	ZD402	48E43541S01	DIO,ZENER DZ2J056M0L
MULTI P.W.Board		\$1	ZD402	48E43541S01	DIO,ZENER DZ2J056M0L
MULTI P.W.Board		#1	ZD403	48E43541S01	DIO,ZENER DZ2J056M0L

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MULTI P.W.Board		\$1	ZD403	48E43541S01	DIO,ZENER DZ2J056M0L
FRONT P.W.Board			C801	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C803	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C804	08E43489S01	CAP,CER. 10uF/10V
FRONT P.W.Board			C805	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C806	08E43489S01	CAP,CER. 10uF/10V
FRONT P.W.Board			C810	23E41346S01	CAP,CER. 0.22uF/50V
FRONT P.W.Board			C812	08E40754S01	CAP,CER.180pF/50V
FRONT P.W.Board			C813	08E40754S01	CAP,CER.180pF/50V
FRONT P.W.Board			C814	08E40754S01	CAP,CER.180pF/50V
FRONT P.W.Board			C815	08E40754S01	CAP,CER.180pF/50V
FRONT P.W.Board			C816	08E40754S01	CAP,CER.180pF/50V
FRONT P.W.Board			C817	08E40754S01	CAP,CER.180pF/50V
FRONT P.W.Board			C818	08E40754S01	CAP,CER.180pF/50V
FRONT P.W.Board			C819	08E40754S01	CAP,CER.180pF/50V
FRONT P.W.Board			C820	08E40754S01	CAP,CER.180pF/50V
FRONT P.W.Board			C901	08E43498S01	CAP,CER. 2.2uF/16V
FRONT P.W.Board			C910	23E41346S01	CAP,CER. 0.22uF/50V
FRONT P.W.Board			C911	08E43499S01	CAP,CER. 2.2uF/25V
FRONT P.W.Board			C912	08E43489S01	CAP,CER. 10uF/10V
FRONT P.W.Board			C914	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C917	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C919	23E41346S01	CAP,CER. 0.22uF/50V
FRONT P.W.Board			C921	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C923	23E41346S01	CAP,CER. 0.22uF/50V
FRONT P.W.Board			C925	08E43499S01	CAP,CER. 2.2uF/25V
FRONT P.W.Board			C929	08E43488S01	CAP,CER. 10uF/25V
FRONT P.W.Board			C930	08E43488S01	CAP,CER. 10uF/25V
FRONT P.W.Board			C931	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C932	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C933	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C934	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C935	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C936	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C937	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C938	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C939	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C940	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C941	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C943	23E41346S01	CAP,CER. 0.22uF/50V
FRONT P.W.Board			C961	08E43488S01	CAP,CER. 10uF/25V

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT P.W.Board			C962	08E43488S01	CAP,CER. 10uF/25V
FRONT P.W.Board			C964	23E41346S01	CAP,CER. 0.22uF/50V
FRONT P.W.Board			C967	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			C968	08E38708S01	CAP,CER. 0.047uF/25V
FRONT P.W.Board			C980	08E43495S01	CAP,CER. 1uF/25V
FRONT P.W.Board			C981	08E40753S01	CAP,CER.390pF/50V
FRONT P.W.Board			C988	08E41032S01	CAP,CER. 0.1uF/50V
FRONT P.W.Board			CN801	09E43392S01	CONN,DW01-040S-BT
FRONT P.W.Board			CN802	09E43392S01	CONN,DW01-040S-BT
FRONT P.W.Board			CN901	09E43601S01	CONN,WTB 60P
FRONT P.W.Board			CN902	09E43600S01	CONN,WTB 4P
FRONT P.W.Board			CN903	09E43607S01	CONN,SM02B 4P
FRONT P.W.Board			D901	48E42527S01	DIODE,SHOTTKYSMAB34
FRONT P.W.Board			D902	48E43544S01	DIO, SHOTTKY DB3X313F
FRONT P.W.Board			D903	48E43544S01	DIO, SHOTTKY DB3X313F
FRONT P.W.Board			D904	48E43537S01	DIODE,ZENER KDZ6.2V
FRONT P.W.Board			D908	48E41050S01	DIODE,SHOTTKYRB050L-40
FRONT P.W.Board			E801	23E43511S01	CAP,ELY. 47uF/6.3V
FRONT P.W.Board			E901	23E43503S01	CAP,ELY. 10uF/16V
FRONT P.W.Board			E902	23E43509S01	CAP,ELY. 33uF/25V
FRONT P.W.Board			E903	23E43509S01	CAP,ELY. 33uF/25V
FRONT P.W.Board			E905	23E43505S01	CAP,ELY. 100uF/16V
FRONT P.W.Board			E906	23E43509S01	CAP,ELY. 33uF/25V
FRONT P.W.Board			IC901	51E43574S01	IC,LT1946AEMS8E
FRONT P.W.Board			IC903	51E37263S01	IC,NJM2130F
FRONT P.W.Board			IC904	51E43562S01	IC,BD81A04EFV
FRONT P.W.Board			L901	24E43583S01	COIL,IND. 6.8uH
FRONT P.W.Board			L902	24E43579S01	COIL,IND.33 uH
FRONT P.W.Board			L903	91E43520S01	FIL,EMI HH-1M1608
FRONT P.W.Board			L904	91E43520S01	FIL,EMI HH-1M1608
FRONT P.W.Board			L906	91E43520S01	FIL,EMI HH-1M1608
FRONT P.W.Board			L907	91E43518S01	FIL,EMI HH-1M1608
FRONT P.W.Board			L908	91E43520S01	FIL,EMI HH-1M1608
FRONT P.W.Board			L909	91E43524S01	FIL,EMI HH-1M2012
FRONT P.W.Board			L911	91E43520S01	FIL,EMI HH-1M1608
FRONT P.W.Board			L912	91E43520S01	FIL,EMI HH-1M1608
FRONT P.W.Board			L920	91E43521S01	FIL,EMI HH-1M2012
FRONT P.W.Board			L921	06E43467S01	RES,CF.0-1/8
FRONT P.W.Board			LD801	48E43530S01	LED,SMLE12WBC7W1 WHT
FRONT P.W.Board			LD802	48E43530S01	LED,SMLE12WBC7W1 WHT
FRONT P.W.Board			LD803	48E43530S01	LED,SMLE12WBC7W1 WHT

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

FRONT P.W.Board			LD804	48E43530S01	LED,SMLE12WBC7W1 WHT
FRONT P.W.Board			LD805	48E43530S01	LED,SMLE12WBC7W1 WHT
FRONT P.W.Board			LD806	48E43530S01	LED,SMLE12WBC7W1 WHT
FRONT P.W.Board			LD807	48E43530S01	LED,SMLE12WBC7W1 WHT
FRONT P.W.Board			LD808	48E43530S01	LED,SMLE12WBC7W1 WHT
FRONT P.W.Board			LD809	48E43530S01	LED,SMLE12WBC7W1 WHT
FRONT P.W.Board			P1001	29E43625S01	Finger Gasket F661
FRONT P.W.Board			Q801	48E43554S01	TR,KTA1666
FRONT P.W.Board			Q802	48E37234S01	TR,DTC114EKA
FRONT P.W.Board			Q901	48E37234S01	TR,DTC114EKA
FRONT P.W.Board			Q905	48E38440S01	TR,2SA1037AK
FRONT P.W.Board			R801	06E40984S01	RES,CF. 330-1/16W
FRONT P.W.Board			R802	06E40984S01	RES,CF. 330-1/16W
FRONT P.W.Board			R803	06E40984S01	RES,CF. 330-1/16W
FRONT P.W.Board			R804	06E40984S01	RES,CF. 330-1/16W
FRONT P.W.Board			R805	06E40984S01	RES,CF. 330-1/16W
FRONT P.W.Board			R806	06E40984S01	RES,CF. 330-1/16W
FRONT P.W.Board			R807	06E40984S01	RES,CF. 330-1/16W
FRONT P.W.Board			R811	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R812	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R813	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R814	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R815	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R816	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R817	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R818	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R819	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R821	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R822	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R823	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R825	06E36618S01	RES,CF. 1K-1/16W
FRONT P.W.Board			R826	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R827	06E36618S01	RES,CF. 1K-1/16W
FRONT P.W.Board			R828	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R829	06E42954S01	RES,CF. 160-1/16W
FRONT P.W.Board			R830	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R831	06E42954S01	RES,CF. 160-1/16W
FRONT P.W.Board			R832	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R833	06E42954S01	RES,CF. 160-1/16W
FRONT P.W.Board			R834	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R835	06E42954S01	RES,CF. 160-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

FRONT P.W.Board			R836	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R837	06E42954S01	RES,CF. 160-1/16W
FRONT P.W.Board			R838	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R839	06E42954S01	RES,CF. 160-1/16W
FRONT P.W.Board			R840	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R841	06E42954S01	RES,CF. 160-1/16W
FRONT P.W.Board			R842	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R843	06E31172S01	RES,CF. 47-1/16W
FRONT P.W.Board			R844	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R845	06E36463S01	RES,CF. 10K-1/16W
FRONT P.W.Board			R846	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R847	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R848	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R849	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R850	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R851	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R852	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R853	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R862	06E35388S01	RES,CF. 24K-1/16W
FRONT P.W.Board			R863	06E32033S01	RES,CF. 910-1/16W
FRONT P.W.Board			R864	06E35132S01	RES,CF. 82K-1/16W
FRONT P.W.Board			R865	06E32202S01	RES,CF.913-J-1/16-CP
FRONT P.W.Board			R903	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R904	06E37165S01	RES,CF. 3.9K-1/16W
FRONT P.W.Board			R905	06E42952S01	RES,CF. 510-1/16W
FRONT P.W.Board			R906	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R907	06E36463S01	RES,CF. 10K-1/16W
FRONT P.W.Board			R909	06E34552S01	RES,CF 753-F-1/16-CP
FRONT P.W.Board			R910	06E33241S01	RES,CF 334-F-1/16-CP
FRONT P.W.Board			R914	06E36650S01	RES,CF. 560-1/4W
FRONT P.W.Board			R915	06E35388S01	RES,CF. 24K-1/16W
FRONT P.W.Board			R916	06E32036S01	RES,CF. 110K-1/16W
FRONT P.W.Board			R917	06E40324S01	RES,CF. 27K-1/16W
FRONT P.W.Board			R920	06E28790S01	RES,CF. 5.6K-1/16W
FRONT P.W.Board			R921	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R922	06E36616S01	RES,CF. 100-1/16W
FRONT P.W.Board			R923	06E36462S01	RES,CF. 4.7K-1/16W
FRONT P.W.Board			R924	06E36464S01	RES,CF. 0-1/16W
FRONT P.W.Board			R925	06E40980S01	RES,CF. 33-1/16W
FRONT P.W.Board			R926	06E40980S01	RES,CF. 33-1/16W
FRONT P.W.Board			R927	06E40980S01	RES,CF. 33-1/16W

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
-----------	-----	-------	------	-----------	------------

FRONT P.W.Board			R928	06E40980S01	RES,CF. 33-1/16W
FRONT P.W.Board			R931	06E36467S01	RES,CF. 2.2K-1/16W
FRONT P.W.Board			R932	06E37142S01	RES,CF. 12K-1/16W
FRONT P.W.Board			R933	06E43466S01	RES,CF.91-1/16W
FRONT P.W.Board			R934	06E31809S01	RES,CF. 8.2K-1/16W
FRONT P.W.Board			R935	06E42954S01	RES,CF. 160-1/16W
FRONT P.W.Board			R937	06E43476S01	RES,CF.43.2-1/10W
FRONT P.W.Board			R939	06E43474S01	RES,CF.37.4-1/16W
FRONT P.W.Board			R941	06E39613S01	RES,CF. 100-1/16W
FRONT P.W.Board			R943	06E43472S01	RES,CF.158-1/10W
FRONT P.W.Board			R945	06E39613S01	RES,CF. 100-1/16W
FRONT P.W.Board			R947	06E43474S01	RES,CF.37.4-1/16W
FRONT P.W.Board			R949	06E43476S01	RES,CF.43.2-1/10W
FRONT P.W.Board			R951	06E42954S01	RES,CF. 160-1/16W
FRONT P.W.Board			R953	06E43461S01	RES,CF.59-1/10W
FRONT P.W.Board			R961	06E37129S01	RES,CF. 2.2-1/4W
FRONT P.W.Board			R963	06E36463S01	RES,CF. 10K-1/16W
FRONT P.W.Board			R967	06E36463S01	RES,CF. 10K-1/16W
FRONT P.W.Board			R968	06E37129S01	RES,CF. 2.2-1/4W
FRONT P.W.Board			R969	06E37129S01	RES,CF. 2.2-1/4W
FRONT P.W.Board			R970	06E37129S01	RES,CF. 2.2-1/4W
FRONT P.W.Board			R978	06E32227S01	RES,CF. 6.8K-1/16W
FRONT P.W.Board			R981	06E43475S01	RES,CF.43.2K-1/10W
FRONT P.W.Board			R982	06E36624S01	RES,CF. 56K-1/16W
FRONT P.W.Board			R983	06E36463S01	RES,CF. 10K-1/16W
FRONT P.W.Board			R984	06E40980S01	RES,CF. 33-1/16W
FRONT P.W.Board			RA901	91E43519S01	FIL,EMI 4RV20-050A250
FRONT P.W.Board			RA902	91E43519S01	FIL,EMI 4RV20-050A250
FRONT P.W.Board			RA903	91E43519S01	FIL,EMI 4RV20-050A250
FRONT P.W.Board			RA904	91E43519S01	FIL,EMI 4RV20-050A250
FRONT P.W.Board			RA905	91E43519S01	FIL,EMI 4RV20-050A250
FRONT P.W.Board			RM801	51E43531S01	IC,ROM-V038THAS
FRONT P.W.Board			SW801	40E43575S01	SW,TACT SKRPABE010
FRONT P.W.Board			SW802	40E43575S01	SW,TACT SKRPABE010
FRONT P.W.Board			SW803	40E43575S01	SW,TACT SKRPABE010
FRONT P.W.Board			SW804	40E43575S01	SW,TACT SKRPABE010
FRONT P.W.Board			SW805	40E43575S01	SW,TACT SKRPABE010
FRONT P.W.Board			SW806	40E43575S01	SW,TACT SKRPABE010
FRONT P.W.Board			SW807	40E43575S01	SW,TACT SKRPABE010
FRONT P.W.Board			VD801	91E43528S01	FIL,SURGE
FRONT P.W.Board			VD802	91E43528S01	FIL,SURGE

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
FRONT P.W.Board			VD803	91E43528S01	FIL,SURGE
FRONT P.W.Board			VD804	91E43528S01	FIL,SURGE
FRONT P.W.Board			VD805	91E43528S01	FIL,SURGE
FRONT P.W.Board			VD806	91E43528S01	FIL,SURGE
FRONT P.W.Board			VD807	91E43528S01	FIL,SURGE
FRONT P.W.Board			VD901	91E43528S01	FIL,SURGE
FRONT P.W.Board			VD902	91E43528S01	FIL,SURGE
FRONT P.W.Board			VD903	91E43528S01	FIL,SURGE
FRONT P.W.Board			VD904	91E43528S01	FIL,SURGE
MISCELLANEOUS			M505	59E43624S01	DC-FAN
MISCELLANEOUS			LCD901	65E43597S01	DISPLAY,149□~82.9□~5.0
MISCELLANEOUS			SD1	82E43628S01	Micro SD Card 4G (Class4)

Mark Model Code

#1 INE-W940 Only,

\$1 INE-NAV-40 Only,

%1 INE-W940S Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.