
■ EXPLODE VIEW • PARTS LIST


Control Panel section

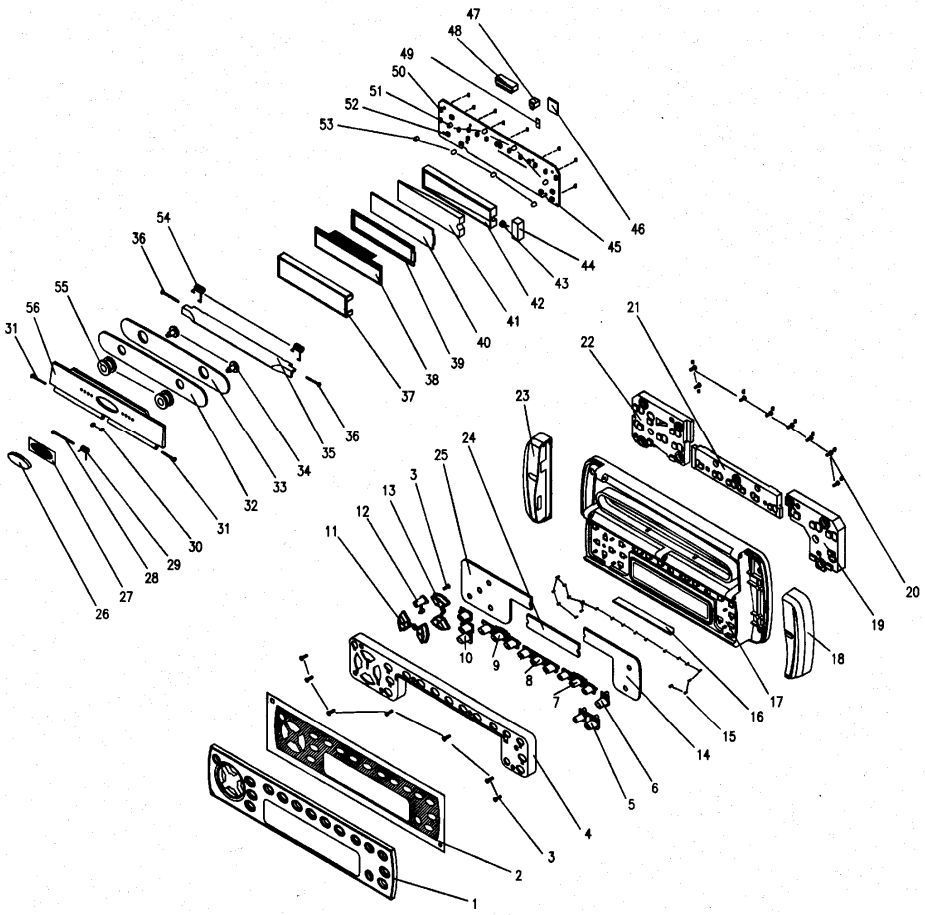

NO.	PART NO	DESCRIPTION	Q'TY
1	373-0935-00	DIAL CVR(PE-2338B-A/E-A)	1
	373-0935-01	DIAL CVR(PE-2339B-A)	1
2	347-6235-00	DOUBLE FACE	1
3	716-0872-00	PAD SCREW	8
4	335-6297-00	BUTTON HOLDER	1
5	382-5796-00	BUTTON (ISR/D)	1
6	382-5797-00	BUTTON (Z/E)	1
7	382-5795-00	BUTTON (SCN/RPT/RDM)	1
8	382-5794-00	BUTTON (4/5/6)	1
9	382-5802-00	BUTTON (1/2/3)	1
10	382-5801-00	BUTTON (PWR/BND/A.M)	1
11	382-5800-00	BUTTON (SRCH UP/DN)	1
12	382-5798-00	BUTTON (PLAY/PAUSE)	1
13	382-5799-00	BUTTON (VOL UP/DN)	1
14	347-6234-00	FILM-R	1
15	335-6299-00	PIN	20
16	290-7886-00	LABEL	1
17	370-5884-00	ESCUTCHEON	1
18	335-6302-00	SIDE-CVR(R)	1
19	335-6305-00	ILLUMI PLATE(R)	1
20	716-1721-00	P-TIGHT-SCREW	8
21	335-6304-00	ILLUMI PLATE(M)	1
22	335-6303-00	ILLUMI PLATE(L)	1
23	335-6301-00	SIDE-CVR(L)	1
24	347-6233-00	FILM-M	1
25	347-6236-00	FILM-L	1
26	378-0532-00	BADGE	1
27	347-6232-00	DOUBLE FACE	1
28	341-1714-00	SHAFT	1

NO.	PART NO	DESCRIPTION	Q'TY
29	750-6705-00	SPRING	1
30	746-0918-01	WASHER	2
31	341-1715-01	SHAFT	2
32	331-2878-01	DOOR PLATE	1
33	345-8425-01	SPONGE	1
34	780-2610-01	SP MACHINE SCREW	2
35	335-6300-00	HOOK	1
36	341-1716-01	SHAFT	2
37	331-2808-00	LCD CVR	1
38	379-1184-41	INDICATOR	1
39	347-6167-00	SHADE	1
40	347-6166-00	FILM	1
41	335-6212-00	LCD ILLUMI	1
42	335-6208-00	LCD HOLDER	1
43	001-7046-00	DIODE	1
44	335-6216-00	LED HOLDER	1
45	039-1703-00	SWITCH PWB (WITHOUT COMPONENTS)	1
46	051-6013-00	IC 75854w	1
47	076-0566-03	PLUG	1
48	076-0566-11	PLUG	1
49	051-7400-06	IC HD74LS07	1
50	013-6001-50	TACT SWITCH	1
51	017-0444-00	PILOT LAMP(14V 50mA)	4
52	013-3812-11	TACT SWITCH	19
53	345-4441-37	LAMP CAP	4
54	750-6704-00	SPRING	2
55	345-8427-00	RUBBER PART	2
56	320-0577-00	DUSTPROOF CVR	1

Main section

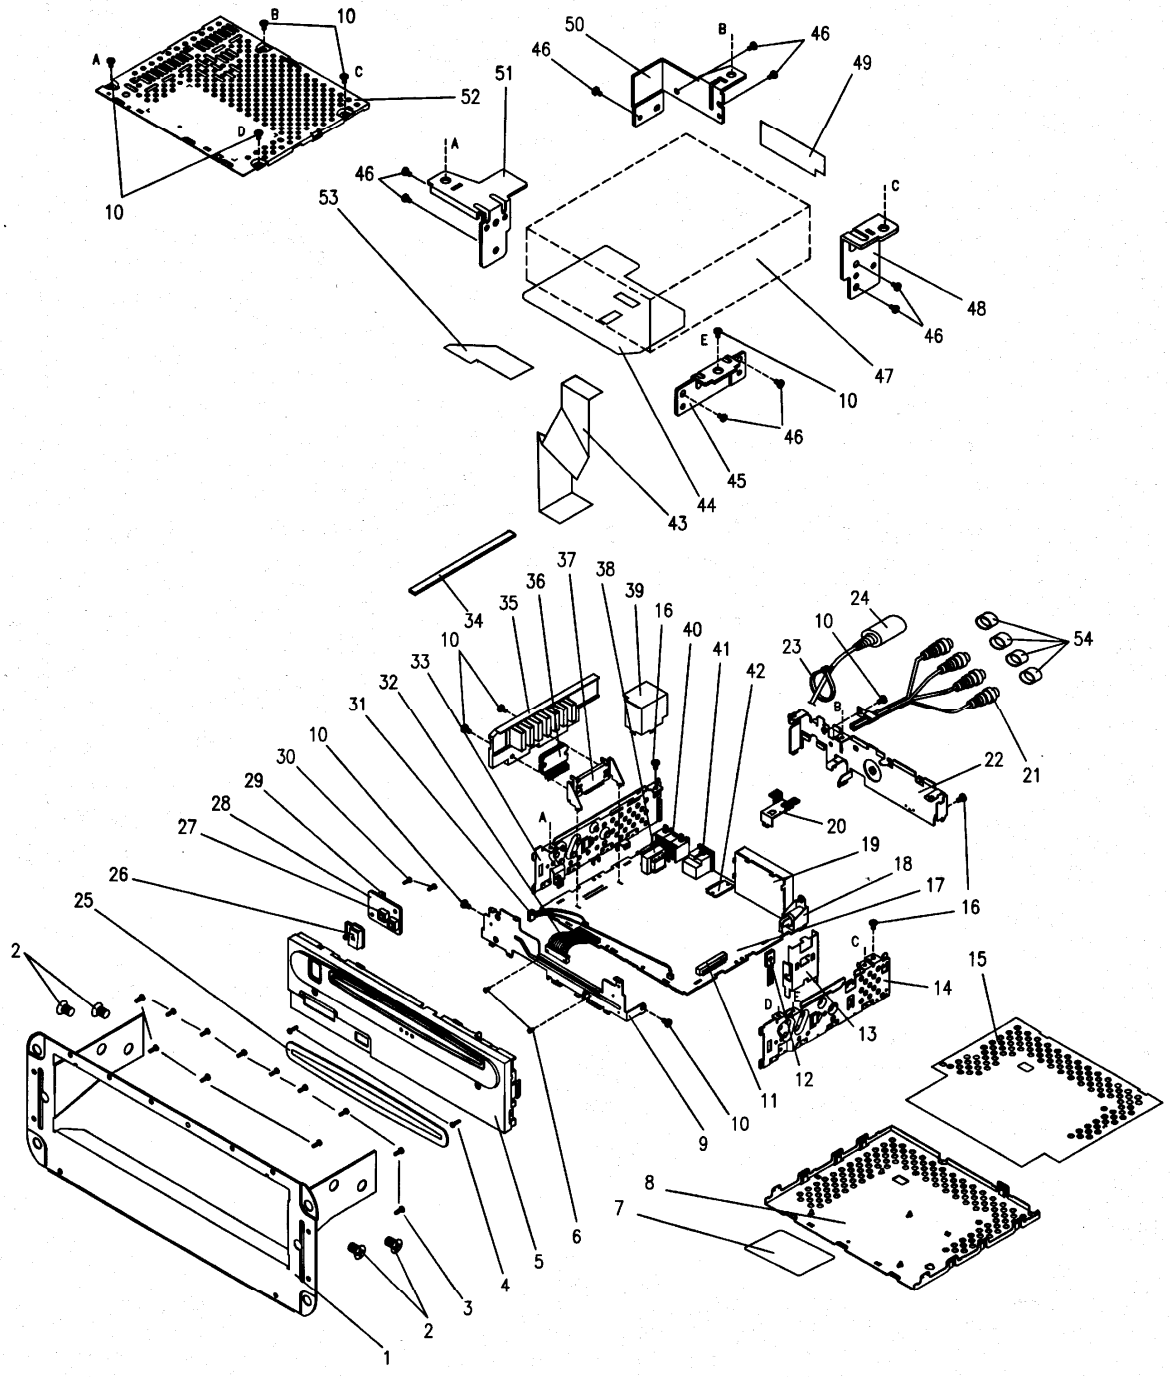

NO	PART NO	DESCRIPTION	Q'TY
1	300-9870-00	MOUNT BRK	1
2	714-5008-41	MACHINE SCREW	4
3	716-1721-00	P-TIGHT-SCREW	12
4	780-2012-00	SPECIAL SCREW	2
5	370-5885-01	INNER ES	1
6	780-2004-01	SPECIAL SCREW	2
7	286-9388-00	SET PLATE(for PE-2338B-A)	1
	286-9442-00	SET PLATE(for PE-2338E-A)	
	286-9403-00	SET PLATE(for PE-2339B-A)	
8	304-0460-00	LOWER CVR	1
9	309-0721-03	FRONT PLATE	1
10	731-3006-80	TAP-TIGHT SCREW	10
11	074-0986-26	OUTLET SOCKET	1
12	103-2012-00	TRANSISTOR	1
13	313-1651-20	HEAT SINK	1
14	305-0275-00	SIDE-CVR-R	1
15	347-5918-00	INSULATOR	1
16	714-3006-81	MACHINE SCREW	3
17	039-1613-01	MAIN PWB (WITHOUT COMPONENTS)	1
18	092-4000-50	ANT RECEPTOR	1
19	880-2087B	TUNER PACK	1
20	313-1772-00	HEAT SINK	1
21	855-5428-50	RCA PIN CORD(for PE-2338B-A/E-A)	1
	855-5426-52	RCA PIN CORD(for PE-2339B-A)	
22	307-0626-02	REAR CVR	1
23	335-0833-07	LEAD HOLDER	1
24	855-1442-50	DIN CORD	1
25	346-0114-01	LEATHER SHEET	1
26	382-5803-00	BUTTON(EJECT)	1
27	013-6002-50	TACT SWITCH	2

NO.	PART NO	DESCRIPTION	Q'TY
28	039-1701-00	EJECT SW PWB (WITHOUT COMPONENTS)	1
29	076-0566-04	PLUG	1
30	716-0872-11	PAD SCREW	2
31	854-4497-50	EXTENSION LEAD	1
32	854-4498-50	EXTENSION LEAD	1
33	305-0274-00	SIDE-CVR-L	1
34	345-8511-00	RUBBER SHEET	1
35	313-1744-20	HEAT SINK	1
36	051-2031-11	IC	1
37	331-2255-20	IC HOLDER	1
38	009-9006-50	CHOKE	1
39	331-2820-00	SHIELD CASE	1
40	074-1214-00	OUTLET SOCKET	1
41	074-1126-10	OUTLET SOCKET(PE-2338 only)	1
42	051-3261-00	IC	1
43	816-2391-00	FLAT CABLE	1
44	347-5916-02	INSULATOR	1
45	331-2492-00	CD-SUB-BRKT	1
46	716-0717-10	STEEL SCREW	9
47	929-0092-82	CD-MECH-MO	1
48	331-2494-00	CD-SUB-BRKT	1
49	347-5215-00	INSULATOR	1
50	331-2493-00	CD-SUB-BRKT	1
51	331-2491-00	CD-SUB-BRKT	1
52	303-0472-01	UPPER CVR	1
53	347-5416-00	INSULATOR	1
54	345-3799-20	RUBBER PART (for PE-2338B-A/E-A)	4
	345-3799-20	RUBBER PART(for PE-2339B-A)	2

■ ELECTRICAL PARTS LIST

Main PWB section (B1) Note:Blue and Black:PE-2338B-A/PE-2338E-A, Black only:PE-2339B-A

REFNo.	PART No.	DESCRIPTION
C101	176-1801-00	18P
C102	178-1032-05	0.01µF
C103	178-1032-05	0.01µF
C104	178-2232-05	0.022µF
C105	183-1073-21	10V 100µF
C106	183-1073-21	10V 100µF
C107	183-1073-21	10V 100µF
C108	176-1011-00	100P
C109	176-1011-00	100P
C110	178-2232-05	0.022µF
C111	176-1011-00	100P
C112	176-3311-00	330P
C113	178-1022-05	1000P
C114	183-1053-61	50V 1µF
C117	178-2732-05	0.027µF
C118	178-2732-05	0.027µF
C122	042-9002-01	LN 50V 3.3µF
C123	178-1032-05	0.01µF
C125	178-4722-05	4700P
C126	178-6822-05	6800P
C128	178-1032-05	0.01µF
C129	176-2201-00	22P
C130	178-1032-05	0.01µF
C131	176-1011-00	100P
C132	176-1011-00	100P
C133	178-1022-05	1000P
C134	178-2232-05	0.022µF
C135	176-2096-00	2P
C302	172-1031-11	0.01µF
C303	172-1031-11	0.01µF
C305	183-1063-51	35V 10µF
C308	183-1063-51	35V 10µF
C309	178-1032-05	0.01µF
C310	178-1032-05	0.01µF
C311	178-1032-05	0.01µF
C312	183-1063-31	16V 10µF
C401	183-1073-21	10V 100µF
C402	183-1063-51	35V 10µF
C403	183-1073-21	10V 100µF
C404	183-1063-51	35V 10µF
C405	176-6811-00	680P
C406	176-6811-00	680P
C408	178-1022-05	1000P
C501	178-1042-05	0.1µF
C502	178-1042-05	0.1µF
C503	183-1053-61	50V 1µF
C504	183-1053-61	50V 1µF
C505	183-1053-61	50V 1µF
C506	183-1053-61	50V 1µF
C509	183-4763-31	16V 47µF
C510	183-1063-51	35V 10µF
C511	183-1063-51	35V 10µF
C512	183-1063-51	35V 10µF
C513	183-1063-51	35V 10µF
C514	183-1063-51	35V 10µF
C515	178-1032-05	0.01µF
C516	178-1022-05	1000P
C519	178-1022-05	1000P
C601	172-2231-11	0.022µF
C602	042-0447-00	16V 2200µF
C603	183-3353-61	50V 3.3µF
C604	183-2263-31	16V 22µF
C605	183-4763-31	16V 47µF
C606	182-4743-62	50V 0.47µF
C607	182-4743-62	50V 0.47µF
C608	182-4743-62	50V 0.47µF
C609	182-4743-62	50V 0.47µF
C611	172-1041-11	0.1µF
C612	172-1041-11	0.1µF
C613	172-1041-11	0.1µF
C614	172-1041-11	0.1µF
C615	172-1021-11	1000P
C701	178-4732-05	0.047µF
C702	178-1022-05	1000P
C801	176-2201-00	22P
C802	176-2201-00	22P
C803	178-4732-05	0.047µF
C804	178-4732-05	0.047µF
C805	178-1032-05	0.01µF
C806	182-4763-33	16V 47µF
C807	183-1073-21	10V 100µF
C808	178-1032-05	0.01µF
C809	178-1032-05	0.01µF
C810	178-1042-05	0.1µF
C811	178-4732-05	0.047µF
C812	178-1022-05	1000P
C813	178-1022-05	1000P
C814	178-1022-05	1000P

REFNo.	PART No.	DESCRIPTION
CN101	092-9000-41	ANT
CN401	074-0986-26	OUTLET SOCKET
CN601	074-1214-00	OUTLET SOCKET
CN701	074-1126-10	OUTLET SOCKET
CN801	074-1217-00	OUTLET SOCKET
D301	001-0376-41	MTZ7.5JB
D302	001-0376-26	MTZ4.7JB
D303	001-0466-01	S5688G
D305	001-0330-00	ISS119
D306	001-0330-00	ISS119
D307	001-0466-01	S5688G
D309	001-0330-00	ISS119
D310	001-0376-47	MTZ9.1JB
D311	001-0330-00	ISS119
D401	001-0376-32	MTZ5.6JB
D402	001-0376-47	MTZ9.1JB
D403	001-0516-00	MA111
D601	001-0592-00	RM4Z
D602	001-0466-01	S5688G
D603	001-0466-01	S5688G
D604	001-0466-01	S5688G
D605	001-0466-01	S5688G
D606	001-0466-01	S5688G
D607	001-0466-01	S5688G
D608	001-0466-01	S5688G
D609	001-0466-01	S5688G
D701	001-0330-00	ISS119
D702	001-0330-00	ISS119
D801	001-0330-00	ISS119
IC301	051-3261-00	BA4906
IC501	051-5016-90	TDA7404
IC601	051-2031-11	LA4743B
IC701	051-0160-01	HD74LS07
IC801	052-1914-02 (PE-2338B-A/ PE-2339B-A)	µPD178006
IC801	052-1914-10 (PE-2338E-A)	µPD178006
L101	010-4007-00	33µH
L102	010-2230-14	2.2µH
L103	010-2230-31	56µH
L501	010-2285-07	CHIP-L
L502	010-2285-07	CHIP-L
L503	010-2285-07	CHIP-L
L504	010-2285-07	CHIP-L
L505	010-2285-07	CHIP-L
L601	009-9006-50	CHOKE
L701	010-2230-28	33µH
L801	010-2230-38	220µH
Q102	102-2712-00	C2712GL
Q103	102-2712-00	C2712GL
Q108	125-2004-03	RN1403
Q301	102-2712-00	C2712GL
Q303	125-2004-02	RN1402
Q304	102-2712-00	C2712GL
Q305	101-1237-00	B1237
Q306	125-0002-02	RN2402
Q307	125-0002-02	RN2402
Q308	101-1243-00	B1243
Q309	125-2004-02	RN1402
Q310	103-1858-00	D1858
Q401	103-1858-00	D1858
Q402	125-0002-06	RN2406
Q403	125-2004-06	RN1406
Q404	125-2004-06	RN1406
Q405	100-1048-00	A1048
Q406	103-2012-00	D2012
Q407	103-1858-00	D1858
Q408	125-2004-02	RN1402
Q501	125-4001-00	XN1504
Q502	125-4001-00	XN1504
Q601	125-0002-02	RN2402
Q701	125-2004-02	RN1402
Q702	100-1162-00	A1162
Q703	125-2004-02	RN1402
Q704	102-2712-00	C2712GL
R101	117-2221-10	1/10W 2.2K
R103	117-2221-10	1/10W 2.2K
R105	117-1021-10	1/10W 1K
R106	117-1231-10	1/10W 12K
R111	117-4721-10	1/10W 4.7K
R112	117-1011-10	1/10W 100
R115	117-1021-10	1/10W 1K
R116	117-1021-10	1/10W 1K
R120	117-5631-10	1/10W 56K
R121	117-4741-10	1/10W 470K
R123	117-2221-10	1/10W 2.2K
R206	117-1041-10	1/10W 100K

REFNo.	PART No.	DESCRIPTION
R301	117-4731-10	1/10W 47K
R302	117-2231-10	1/10W 22K
R303	117-2231-10	1/10W 22K
R304	117-4721-10	1/10W 4.7K
R305	117-2231-10	1/10W 22K
R307	117-4721-10	1/10W 4.7K
R308	111-3321-91	1/4W 3.3K
R309	117-1031-10	1/10W 10K
R310	111-5611-81	1/2W 560
R311	117-1031-10	1/10W 10K
R312	117-1031-10	1/10W 10K
R313	117-4721-10	1/10W 4.7K
R314	111-4711-91	1/4W 470
R402	117-1041-10	1/10W 100K
R403	117-4731-10	1/10W 47K
R404	111-1041-91	1/4W 100K
R405	117-1041-10	1/10W 100K
R406	111-4711-91	1/4W 470
R407	111-2291-91	1/4W 2.2
R408	111-2291-91	1/4W 2.2
R409	111-2211-91	1/4W 220
R410	111-2211-91	1/4W 220
R411	111-1221-91	1/4W 1.2K
R412	117-4721-10	1/10W 4.7K
R413	117-1041-10	1/10W 100K
R501	117-4721-10	1/4W 4.7K
R502	117-4721-10	1/4W 4.7K
R503	117-1021-10	1/10W 1K
R504	117-1021-10	1/10W 1K
R505	117-1031-10	1/10W 10K
R506	117-1031-10	1/10W 10K
R507	117-3311-10	1/10W 330
R508	117-3311-10	1/10W 330
R509	117-1021-10	1/10W 1K
R510	117-1021-10	1/10W 1K
R511	117-1031-10	1/10W 10K
R512	117-1031-10	1/10W 10K
R513	117-3311-10	1/10W 330
R514	117-3311-10	1/10W 330
R515	111-4721-91	1/4W 4.7K
R516	111-4721-91	1/4W 4.7K
R517	111-4721-91	1/4W 4.7K
R518	111-4721-91	1/4W 4.7K
R519	111-4721-91	1/4W 4.7K
R520	111-4721-91	1/4W 4.7K
R524	111-1031-91	1/4W 10K
R602	111-1031-10	1/10W 10K
R604	117-1231-10	1/10W 12K
R605	116-4721-10	1/8W 4.7K
R606	111-4721-91	1/4W 4.7K
R607	117-4721-91	1/4W 4.7K
R608	116-4721-10	1/8W 4.7K
R609	117-4721-10	1/10W 4.7K
R701	117-4721-10	1/10W 4.7K
R702	117-4721-10	1/10W 4.7K
R703	117-1021-10	1/10W 1K
R704	117-4721-10	1/10W 4.7K
R705	117-1021-10	1/10W 1K
R706	117-4721-10	1/10W 4.7K
R707	117-1021-10	1/10W 1K
R709	117-1031-10	1/10W 10K
R710	116-1021-10	1/8W 1K
R711	117-4731-10	1/10W 47K
R712	117-2231-10	1/10W 22K
R713	117-2231-10	1/10W 22K
R714	117-1031-10	1/10W 10K
R715	117-2231-10	1/10W 22K
R803	117-1031-10	1/10W 10K
R810	117-2231-10	1/10W 22K
R812	117-2221-10	1/10W 2.2K
R813	117-2221-10	1/10W 2.2K
R818	111-4731-91	1/4W 47K
R819	117-1041-10	1/10W 100K
R820	117-1041-10	1/10W 100K
R821	111-1031-91	1/4W 10K
R823	111-1031-91	1/4W 10K
R825	117-1031-10	1/10W 10K
R826	117-1031-10	1/10W 10K
R827	111-2231-91	1/4W 22K
R830	117-1031-10	1/10W 10K
R831	117-4731-10	1/10W 47K
R832	117-4731-10	1/10W 47K
R903	117-4731-10	1/10W 47K
SUP101	060-0122-20	SURGE
X801	061-1064-00	"CRYSTAL,4.5MHz"

Switch PWB section (B2)

REF No.	PART No.	DESCRIPTION
C101	178-1022-05	1000pF
C102	178-4732-05	0.047µF
C103	178-4732-05	0.047µF
C104	042-0423-02	6.3V 4.7µF TANTAL
CN101	076-0566-11	PLUG
CN102	076-0566-03	PLUG
D101	001-0528-29	5.1V
D102	001-0528-11	3V
D103	001-0528-41	7.5V
IC101	051-6013-00	LC75854
IC102	051-7400-00	LS07
LCD1	379-1184-41	LCD
LED1	001-7046-00	LED
PL101	017-0444-00	14V 50mA
PL102	017-0444-00	14V 50mA
PL103	017-0444-00	14V 50mA
PL104	017-0444-00	14V 50mA
Q101	190-1162-00	A1162 CHIP
R101	117-2221-10	1/10W 2.2k

REF No.	PART No.	DESCRIPTION
R102	116-2221-10	1/8W 2.2k
R103	116-2221-10	1/8W 2.2k
R104	117-1021-10	1/10W 1k
R105	117-4731-10	1/10W 47k
R106	117-3921-10	1/10W 3.9k
R107	116-1241-10	1/8W 120k
R108	117-1811-10	1/10W 180
R109	117-1811-10	1/10W 180
R110	117-1011-10	1/10W 100
R111	117-1011-10	1/10W 100
R112	117-1031-10	1/10W 10k
R113	117-3311-10	1/10W 330
R114	117-3311-10	1/10W 330
R115	116-1021-10	1/8W 1k
R116	117-1021-10	1/10W 1k
R117	117-1021-10	1/10W 1k
SW101	013-3812-01	TACT SWITCH
SW102	013-6001-00	TACT SWITCH
SW103	013-3812-01	TACT SWITCH

REF No.	PART No.	DESCRIPTION
SW104	013-3812-01	TACT SWITCH
SW105	013-3812-01	TACT SWITCH
SW106	013-3812-01	TACT SWITCH
SW107	013-3812-01	TACT SWITCH
SW108	013-3812-01	TACT SWITCH
SW109	013-3812-01	TACT SWITCH
SW110	013-3812-01	TACT SWITCH
SW111	013-3812-01	TACT SWITCH
SW112	013-3812-01	TACT SWITCH
SW113	013-3812-01	TACT SWITCH
SW114	013-3812-01	TACT SWITCH
SW115	013-3812-01	TACT SWITCH
SW116	013-3812-01	TACT SWITCH
SW117	013-3812-01	TACT SWITCH
SW118	013-3812-01	TACT SWITCH
SW119	013-3812-01	TACT SWITCH
SW120	013-3812-01	TACT SWITCH

CD PWB section (B3)

Note) Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

REF No.	PART No.	DESCRIPTION
C1	163-1073-10	6.3V 100µF
C3	178-1042-05	0.1µF
C4	178-2222-05	2200PF
C5	178-1042-05	0.1µF
C6	178-1042-05	0.1µF
C7	178-1042-05	0.1µF
C8	176-1501-00	15PF CH
C9	176-1501-00	15PF CH
C10	176-1201-00	12PF CH
C11	178-1042-05	0.1µF
C13	178-1042-05	0.1µF
C14	178-1042-05	0.1µF
C15	178-1042-05	0.1µF
C16	178-1042-05	0.1µF
C17	163-1073-31	16V 100µF
C18	176-4701-00	47PF CH
C19	178-1532-05	0.015µF
C20	178-1032-05	0.01µF
C21	178-2722-05	2700PF
C22	178-4722-05	4700PF
C23	178-1042-05	0.1µF
C24	178-1042-05	0.1µF
C25	178-1042-05	0.1µF
C26	178-4712-05	470PF
C27	178-4712-05	470PF
C28	178-4732-05	0.047µF
C29	178-4732-05	0.047µF
C30	178-4732-05	0.047µF
C31	178-4732-05	0.047µF
C32	163-4763-05	4V 47µF
C33	163-4763-05	4V 47µF
C34	176-1801-00	18PF CH
C35	176-6097-00	6PF CH

REF No.	PART No.	DESCRIPTION
C36	176-6801-00	68PF CH
C37	176-2201-00	22PF CH
C38	178-1042-05	0.1µF
C39	163-4763-05	4V 47µF
C44	178-2242-05	0.22µF
C45	178-2242-05	0.22µF
C46	163-4763-10	6.3V 47µF
C47	178-8222-05	8200PF
C48	178-1042-05	0.1µF
C50	163-1073-10	6.3V 100µF
C51	178-1042-05	0.1µF
C52	178-2232-05	0.022µF
C54	176-2201-00	22PF CH
C61	178-1042-05	0.1µF
C63	178-1042-05	0.1µF
C64	178-1042-05	0.1µF
C65	178-1042-05	0.1µF
D4	001-0516-00	MA111
IC1	051-5704-00	TA2096FN
IC2	051-6342-00	TC9462F
IC3	051-6045-08	BA5984FP
J1	074-1138-66	16P
J2	074-1138-06	6P
L1	010-2155-03	10µH
L3	010-2199-24	10µH J
Q1	101-1188-50	2SB1188PQR
R1	117-2211-10	1/10W 220
R2	117-2211-10	1/10W 220
R3	117-5611-10	1/10W 560
R4	117-5611-10	1/10W 560
R5	117-4711-10	1/10W 470
R6	117-3311-10	1/10W 330
R7	117-4721-10	1/10W 4.7K

REF No.	PART No.	DESCRIPTION
R8	117-1041-10	1/10W 100K
R9	117-1031-10	1/10W 10K
R10	117-4731-10	1/10W 47K
R12	117-4741-10	1/10W 470K
R13	117-3331-10	1/10W 33K
R14	117-3321-10	1/10W 3.3K
R15	117-1031-10	1/10W 10K
R16	117-3321-10	1/10W 3.3K
R17	117-3321-10	1/10W 3.3K
R18	117-3321-10	1/10W 3.3K
R19	117-3321-10	1/10W 3.3K
R20	117-3321-10	1/10W 3.3K
R21	117-2221-10	1/10W 2.2K
R22	117-8211-10	1/10W 820
R23	117-9131-10	1/10W 91K
R24	117-1041-10	1/10W 100K
R25	117-1041-10	1/10W 100K
R26	117-1841-10	1/10W 180K
R27	117-1841-10	1/10W 180K
R28	117-2211-10	1/10W 220
R29	117-2201-10	1/10W 22
R30	117-1041-10	1/10W 100K
R31	117-1041-10	1/10W 100K
R32	117-1041-10	1/10W 100K
R33	117-1041-10	1/10W 100K
R34	117-1041-10	1/10W 100K
R35	117-2241-10	1/10W 220K
R36	117-1041-10	1/10W 100K
R37	117-1041-10	1/10W 100K
R38	117-8231-10	1/10W 82K
R39	117-1841-10	1/10W 180K
X1	061-3500-90	16.920MHz

Sensor PWB section (B4)

REF No.	PART No.	DESCRIPTION
Q101	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
Q102	060-0252-01	PT4850F

REF No.	PART No.	DESCRIPTION
Q103	060-0252-01	PT4850F

Chucking PWB section (B5)

REF No.	PART No.	DESCRIPTION
S2	013-3879-01	SPPB12

Limit SW PWB section (B6)

REF No.	PART No.	DESCRIPTION
S1	013-7100-00	SPPB11


Eject SW PWB section (B7)

REF No.	PART No.	DESCRIPTION
CN1	076-0566-04	PLUG
SW1	013-6002-50	TACT SWITCH
SW2	013-6002-50	TACT SWITCH


■ EXPLODE VIEW

CD mechanism section: 929-0092-82(CDS-801)

Mecha chassis section:

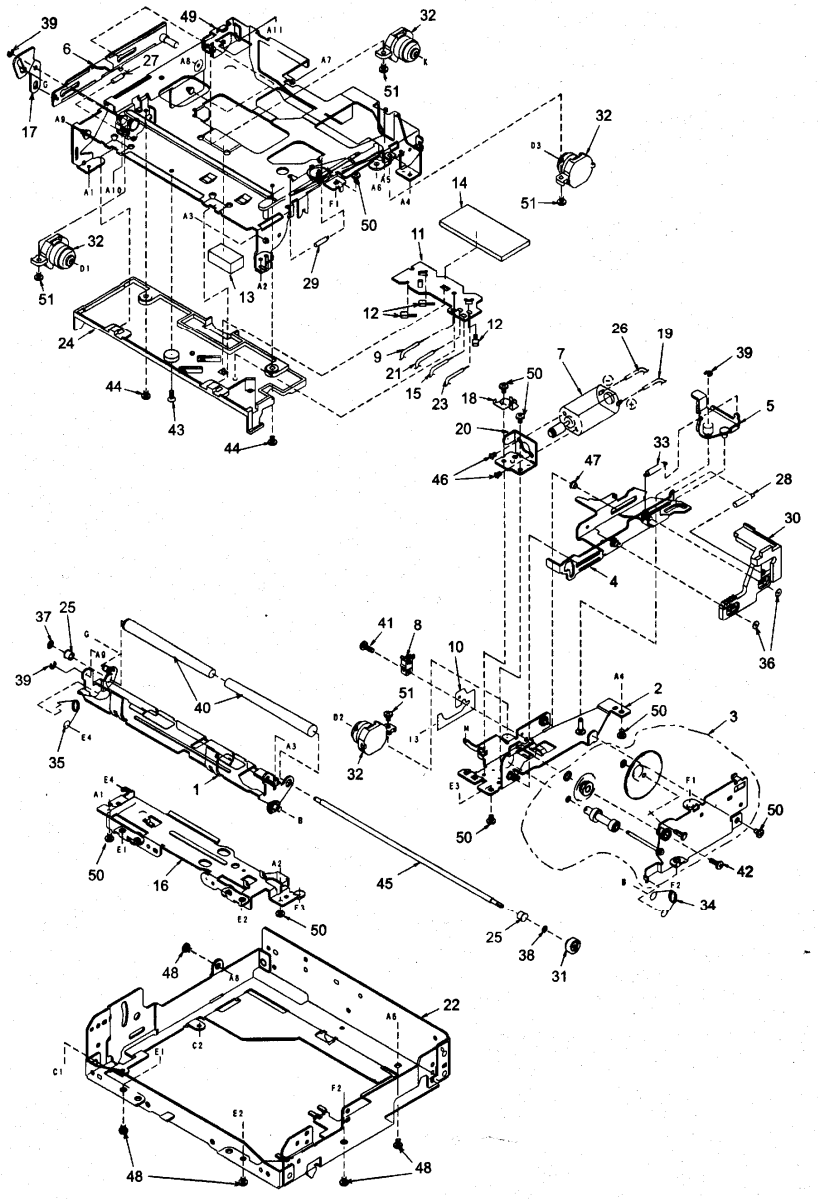

Drive unit section:

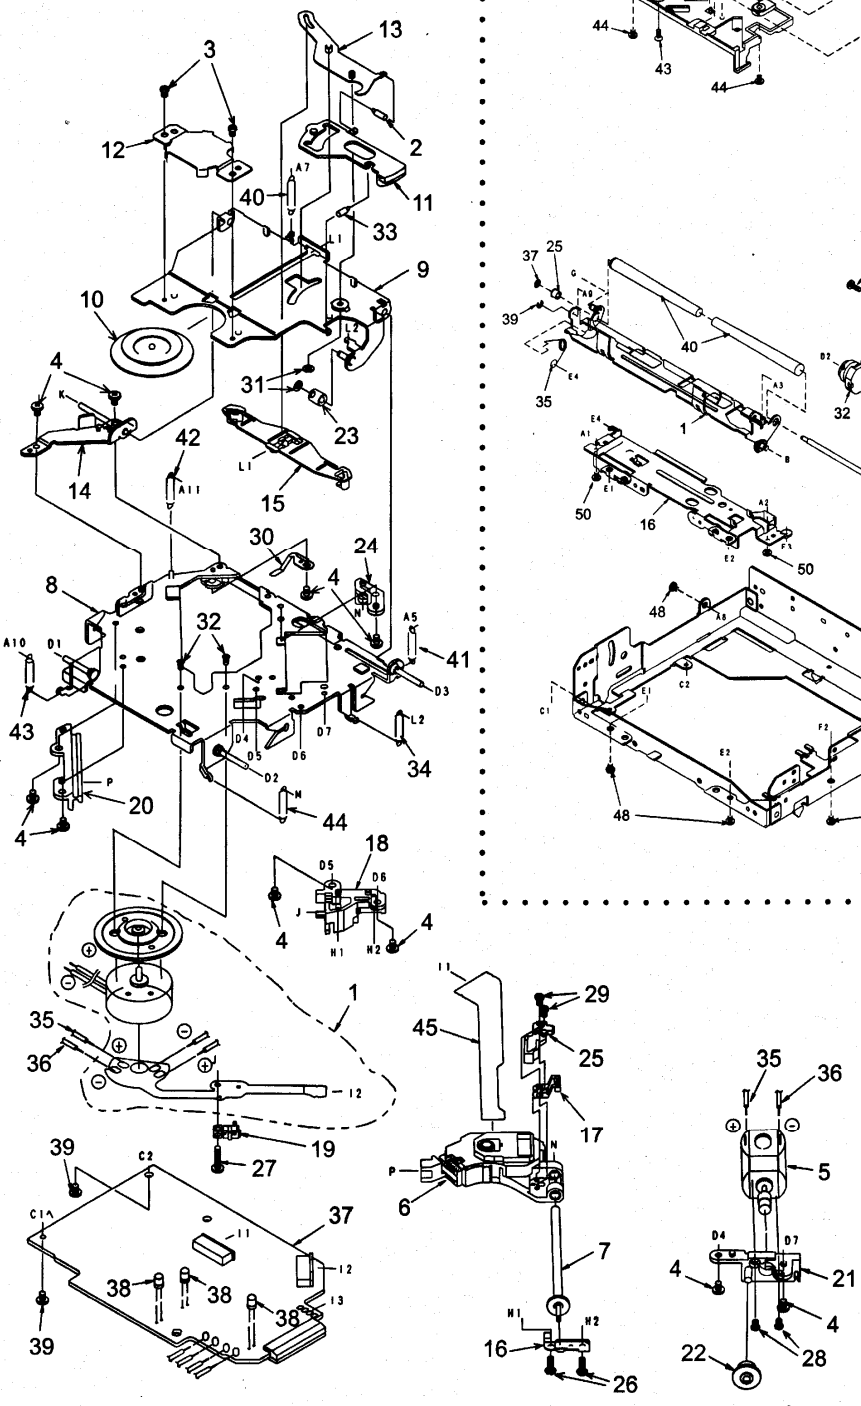

■ PARTS LIST

CD mechanism section:
929-0092-82(CDS-801)

DRIVE UNIT SECTION

NO.	PART NO.	DESCRIPTION	Q'TY
1	SMA-151-100	MOTOR ASSY(SPINDLE)	1
2	750-3098-00	L-LINK SPRING	1
3	716-1468-00	SCREW(M2 ~2.5)	2
4	716-2003-81	SCREW(M2 ~3)	10
5	SMA-146-100	MOTOR ASSY(SLED)	1
6	969-0008-00	PICK UP UNIT	1
7	HBS-432-100	LS-GEAR ASSY	1
8	966-0447-05	DR-PLATE-ASSY	1
9	966-0449-22	CLAMP-LINK-ASSY	1
10	621-0205-02	CLAMPER RING	1
11	621-0251-03	LOCK LINK	1
12	620-0198-03	CLAMPER PLATE	1
13	966-0314-01	STOP LINK-ASSY	1
14	966-0448-21	SIDE PLATE-ASSY	1
15	621-0252-03	DISC STOPPER	1
16	620-0491-03	SPRING PLATE	1
17	966-0454-00	SCREW H-RACK-ASSY	1
18	621-0358-02	LS-HOLDER-F	1
19	013-7100-00	SWITCH(LIMIT)	1
20	621-0357-03	PICK UP GUIDE	1
21	621-0253-02	MOTOR HOLDER	1
22	621-0255-02	SECOND GEAR	1
23	622-1073-02	CLAMPER ROLLER	1
24	621-0359-02	LS-HOLDER-R	1
25	621-0375-00	SH-BASE	1
26	716-0675-00	SCREW(M2 ~5.5)	2
27	716-1555-00	WAVE SCREW($f^3$2 ~8)	1
28	732-2004-11	SEMS SCREW(M2 ~4)	2
29	739-1735-17	PRECISION SCREW (M1.7 ~3.5)	2
30	620-0690-01	RATTLE PLATE	1
31	746-0761-00	WASHER	2
32	716-1733-00	SCREW(M1.7 ~2.3)	2
33	750-3099-00	ES-SPRING	1
34	750-3097-03	CLAMPER SPRING	1
35	816-2373-00	LEAD WIRE(WHT)	1
36	816-2372-00	LEAD WIRE(BLU)	1
37	039-1732-00	CD PWB (WITHOUT COMPONENT)	1
38	001-0563-00	LED	3
39	716-1670-00	SCREW(M2 ~4)	2
40	750-3202-00	CENTER SPRING-B	1
41	750-3096-01	DR-SPRING R	1
42	750-3164-00	DR-SPRING LR	1
43	750-3188-00	DR-SPRING F-B	1
44	750-3201-00	DR-SPRING F-R	1
45	039-1587-00	FPC	1

MECHA CHASSIS SECTION

NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0309-04	L-DISC-G-ASSY	1
2	966-0310-06	SHIFT-P-CH-ASSY	1
3	HBS-430-100	GEAR PLATE ASSY	1
4	966-0312-06	SHIFT-PLATE-ASSY	1
5	966-0358-01	DRIVE-L-PLATE-ASSY	1
6	966-0359-03	SIDE-L-PLATE-ASSY	1
7	SMA-147-100	MOTOR ASSY(LOADING)	1
8	013-3879-01	CHUCKING SWITCH	1
9	804-4910-60	VINYL-COAT-WIRE(YEL)	1
10	039-0586-01	CHUCKING SWITCH PWB (WITHOUT COMPONENT)	1
11	039-0588-01	SENSOR PWB (WITHOUT COMPONENT))	1
12	060-0252-01	PHOTO-TR	3
13	345-7513-01	CLAMPER SHEET	1
14	345-7514-00	SENSOR PWB SHEET	1
15	802-4910-60	VINYL-COAT-WIRE(RED)	1
16	620-0485-04	FRONT PLATE	1
17	620-0488-01	S-L-LINK PLATE	1
18	620-0489-02	MOTOR PLATE	1
19	802-4904-60	VINYL-COAT-WIRE(RED)	1
20	620-0492-01	MOTOR BRACKET	1
21	801-4910-60	VINYL-COAT-WIRE(BRN)	1
22	620-0773-01	CD-MECH-BRKT	1
23	800-4910-60	VINYL-COAT-WIRE(BLK)	1
24	621-0402-01	U-DISC GUIDE-F	1
25	621-0243-02	ROLLER SLEEVE	2
26	800-4904-60	VINYL-COAT-WIRE(BLK)	1
27	750-3189-00	SIDE-L-SPRING	1
28	750-3098-00	L-LINK SPRING	1
29	750-3094-00	S-ARM SPRING	1
30	621-0248-07	RACK GEAR	1
31	621-0249-02	ROLLER GEAR	1
32	629-0074-00	DAMPER	4
33	750-3092-03	SHIFT SPRING	1
34	750-3091-03	ROADING-SPRING-R	1
35	750-3090-02	ROADING-SPRING-L	1
36	746-0877-02	WASHER	2
37	746-0762-00	WASHER	1
38	746-0712-03	WASHER	1
39	743-1500-10	E-RING	3
40	621-0258-03	LOADING ROLLER	2
41	716-1742-00	SCREW(M2 ~5)	1
42	716-1704-00	SCREW(M2 ~7)	1
43	716-1677-00	SCREW(M2 ~5)	1
44	716-1507-00	SCREW(M2 ~3)	2
45	622-1072-05	ROLLER SHAFT	1
46	716-1468-00	SCREW(M2 ~2.5)	2
47	622-1219-01	SHIFT ROLLER	1
48	714-2603-81	SCREW(M2.6 ~3)	5
49	966-0308-10	CHASSIS ASSY	1
50	714-2003-81	SCREW(M2 ~3)	8
51	716-1670-00	SCREW(M2 ~4)	4