
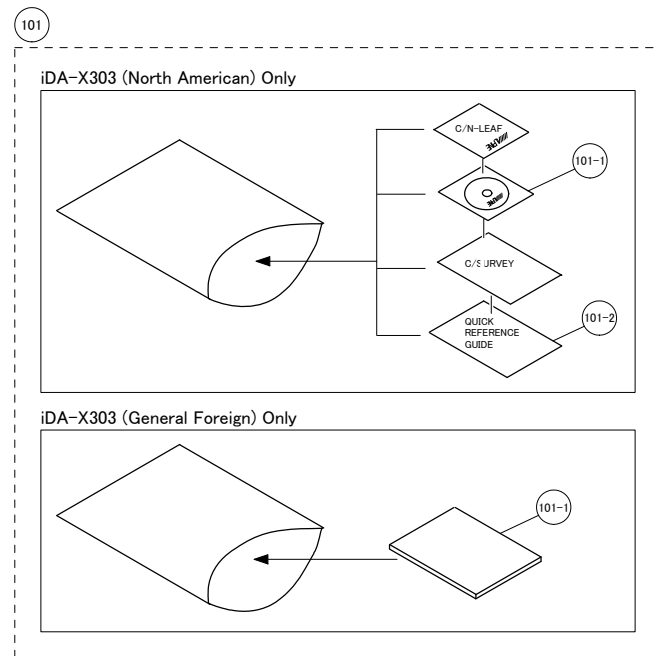
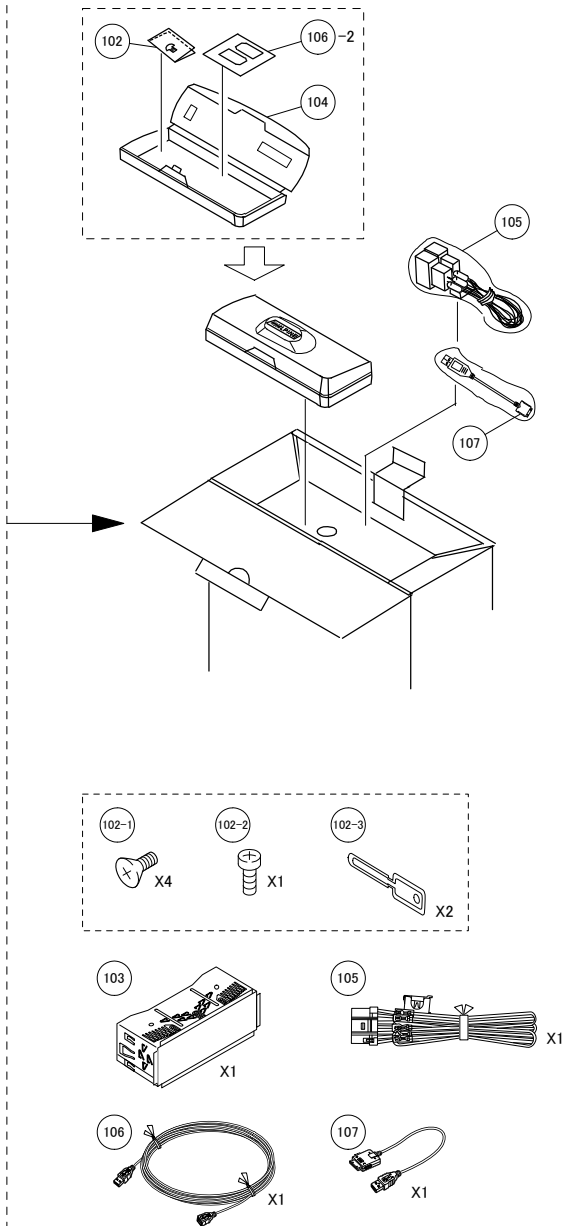


# Packing Method View

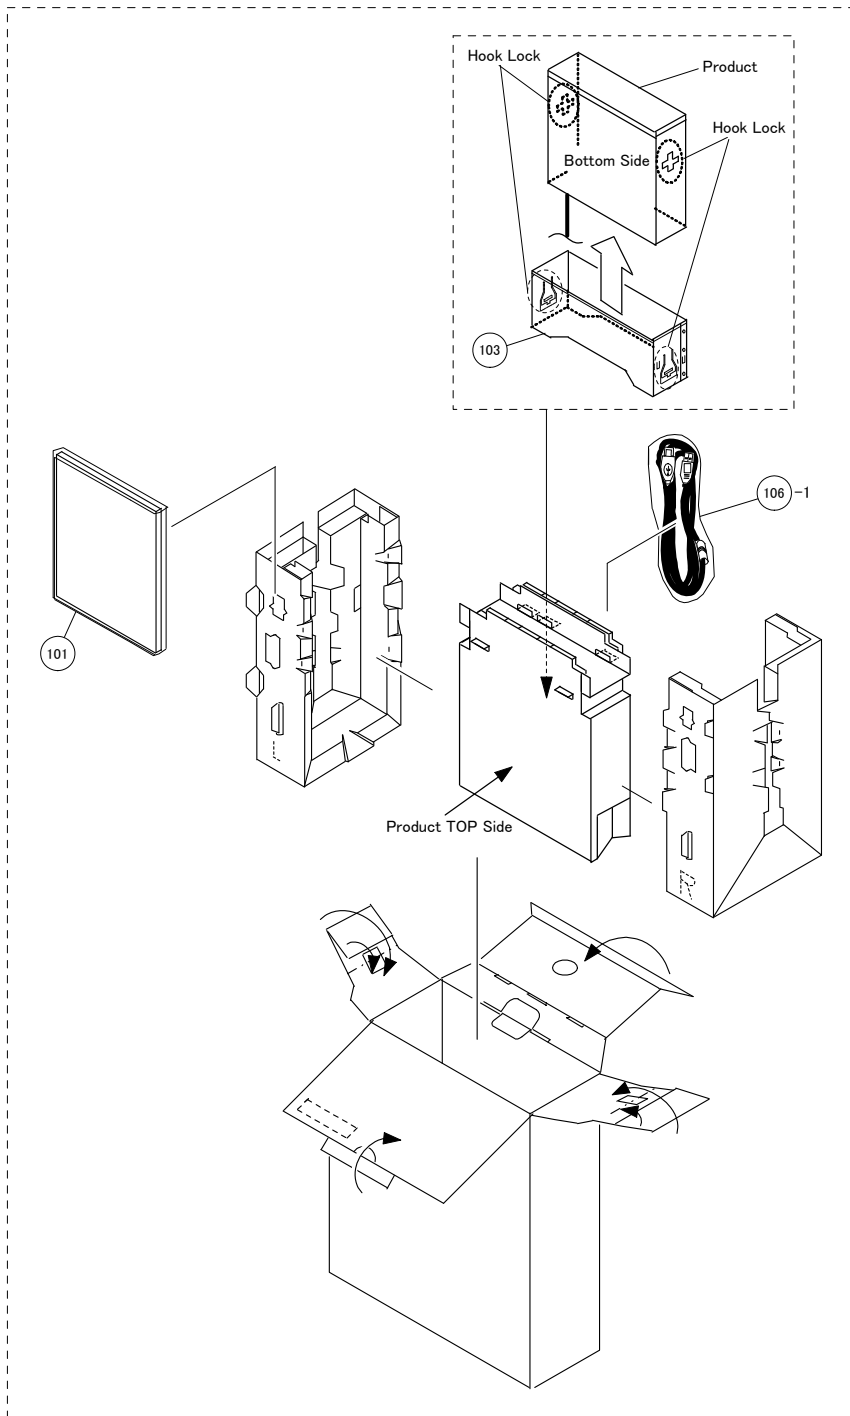

| MODEL | Symbol No.            | Parts No.   | Description        |
|-------|-----------------------|-------------|--------------------|
| #1    | <a href="#">101-1</a> | 68-10334Z15 | O/M-CDROM X-POD    |
| \$1   | <a href="#">101-1</a> | 68-14470Z02 | O/M AAO AOTH       |
| #1    | <a href="#">101-2</a> | 68-09359Z92 | C/N-QRG AOAM AOTH  |
|       | <a href="#">102-1</a> | 03S60820Y16 | SCR,MCH 5X8 ZN A   |
|       | <a href="#">102-2</a> | 03S60824Y01 | SCR,WEV 1.7X4 ZN A |
|       | <a href="#">102-3</a> | 07-12021Z01 | BKT,RELEASE        |
|       | <a href="#">103</a>   | 15-12022Z01 | CASE,INNER         |
|       | <a href="#">104</a>   | 15-11587Z01 | CARRING,CASE       |
|       | <a href="#">105</a>   | 09-09395Z01 | ASSY,ANIC-0032-01A |
|       | <a href="#">106</a>   | 09-11953Z03 | ASSY,YAF11-1253N   |
|       | <a href="#">107</a>   | 09-14676Z01 | ASSY,ATFD-0777-01A |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,


Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

# System Coonection

iDA-X303 (North American) Only

## Connections

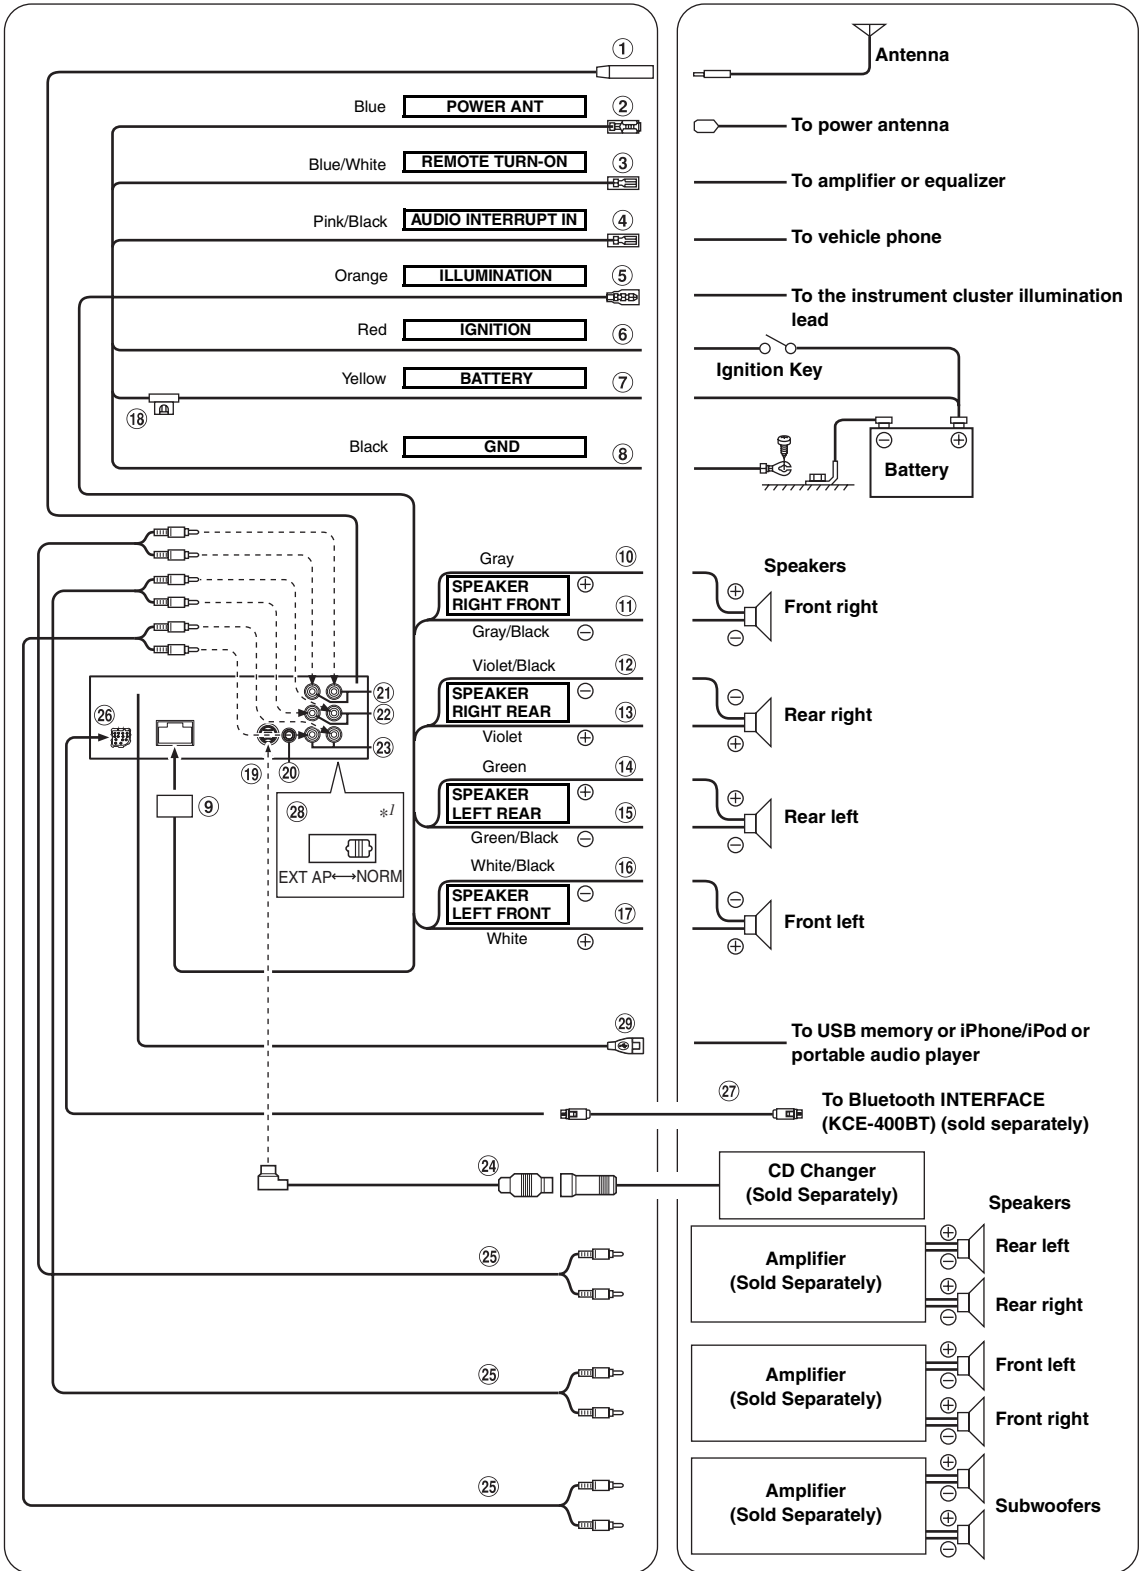

\* The system switch is located on the bottom of the unit.


- ① **Antenna Receptacle**
- ② **Power Antenna Lead (Blue)**  
Connect this lead to the +B terminal of your power antenna, if applicable.
  - *This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier, or a signal processor, etc.*
- ③ **Remote Turn-On Lead (Blue/White)**  
Connect this lead to the remote turn-on lead of your amplifier or signal processor.
- ④ **Audio Interrupt In Lead (Pink/Black)**
- ⑤ **Illumination Lead (Orange)**  
This lead may be connected to the vehicle's instrument cluster illumination lead. This will allow the backlighting of the iDA-X303 to dim whenever the vehicle's lights are turned on.
- ⑥ **Switched Power Lead (Ignition) (Red)**  
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+)12V only when the ignition is turned on or in the accessory position.
- ⑦ **Battery Lead (Yellow)**  
Connect this lead to the positive (+) post of the vehicle's battery.
- ⑧ **Ground Lead (Black)**  
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.
- ⑨ **Power Supply Connector**
- ⑩ **Right Front (+) Speaker Output Lead (Gray)**
- ⑪ **Right Front (-) Speaker Output Lead (Gray/Black)**
- ⑫ **Right Rear (-) Speaker Output Lead (Violet/Black)**
- ⑬ **Right Rear (+) Speaker Output Lead (Violet)**
- ⑭ **Left Rear (+) Speaker Output Lead (Green)**
- ⑮ **Left Rear (-) Speaker Output Lead (Green/Black)**
- ⑯ **Left Front (-) Speaker Output Lead (White/Black)**
- ⑰ **Left Front (+) Speaker Output Lead (White)**
- ⑱ **Fuse Holder (10A)**
- ⑲ **Ai-NET Connector**  
Connect this to the output or input connector of another device (CD Changer, Equalizer, HD Radio TUNER MODULE, etc.) equipped with Ai-NET.
  - *Be sure to set "Setting the Connected Head Unit (MODEL SETUP)" to "CD CHG", when the DHA-S690 is connected.*
  - *Interface adapter for iPod (KCA-420i) is not recommended for use with this product.*
  - *You can input TV/video sound by connecting an optional Ai-NET/RCA Interface cable (KCA-121B) to this component.*

- ⑳ **Steering Remote Control Interface Connector**  
To steering remote control interface box.
- ㉑ **Rear Output/Input RCA Connectors**  
It can be used as Rear Output or Input RCA Connectors. RED is right and WHITE is left.
- ㉒ **Front Output/Input RCA Connectors**  
It can be used as Front Output or Input RCA Connectors. RED is right and WHITE is left.
- ㉓ **Subwoofer Output RCA Connectors**  
RED is right and WHITE is left.
- ㉔ **Ai-NET Cable (Included with CD Changer)**
- ㉕ **RCA Extension Cable (sold separately)**
- ㉖ **Bluetooth interface connector**  
Connect this to an optional Bluetooth INTERFACE (KCE-400BT). To use a hands-free mobile phone, an optional Bluetooth INTERFACE (KCE-400BT) connection is required. For details on connection, refer to the Owner's Manual of the Bluetooth INTERFACE (KCE-400BT). You can also connect this to an external device (such as a portable player) by using Conversion cable (KCE-237B) for building up the AUX IN (sold separately).
  - \* *Refer to "Setting the AUX+ Mode" (page 22).*
  - AUX+ ON : When the external device is connected.
  - AUX+ OFF : When set to OFF, AUX+ source cannot be selected.
- ㉗ **KCE-400BT Connection Cable (Included with KCE-400BT)**
- ㉘ **System Switch**  
When connecting a processor or divider using Ai-NET, place this switch in the EXT AP position. When no device is connected, leave the switch in the NORM position. When switched to NORM, the RCA Connectors ㉑ and ㉒ can be used as Output RCA Connectors. When switched to EXT AP, the RCA Connectors ㉑ and ㉒ can be used as Input RCA Connectors.
  - *Be sure to turn the power off to the unit before changing the switch position.*
- ㉙ **USB Connector**  
Connect this to an USB memory or to an iPhone/iPod or to a portable audio player. To use an iPhone/iPod, Interface cable for iPod connection is required.
  - *Use the supplied USB cable. If a USB cable other than the supplied is used, correct performance cannot be guaranteed.*
  - *Route the USB cable away from other cables.*

#### **To prevent external noise from entering the audio system.**

- Locate the unit and route the leads at least 10 cm away from the car harness.
- Keep the battery power leads as far away from other leads as possible.
- Connect the ground lead securely to a bare metal spot (remove any paint, dirt or grease if necessary) of the car chassis.
- If you add an optional noise suppressor, connect it as far away from the unit as possible. Your Alpine dealer carries various noise suppressors, contact them for further information.
- Your Alpine dealer knows best about noise prevention measures so consult your dealer for further information.

## Connections

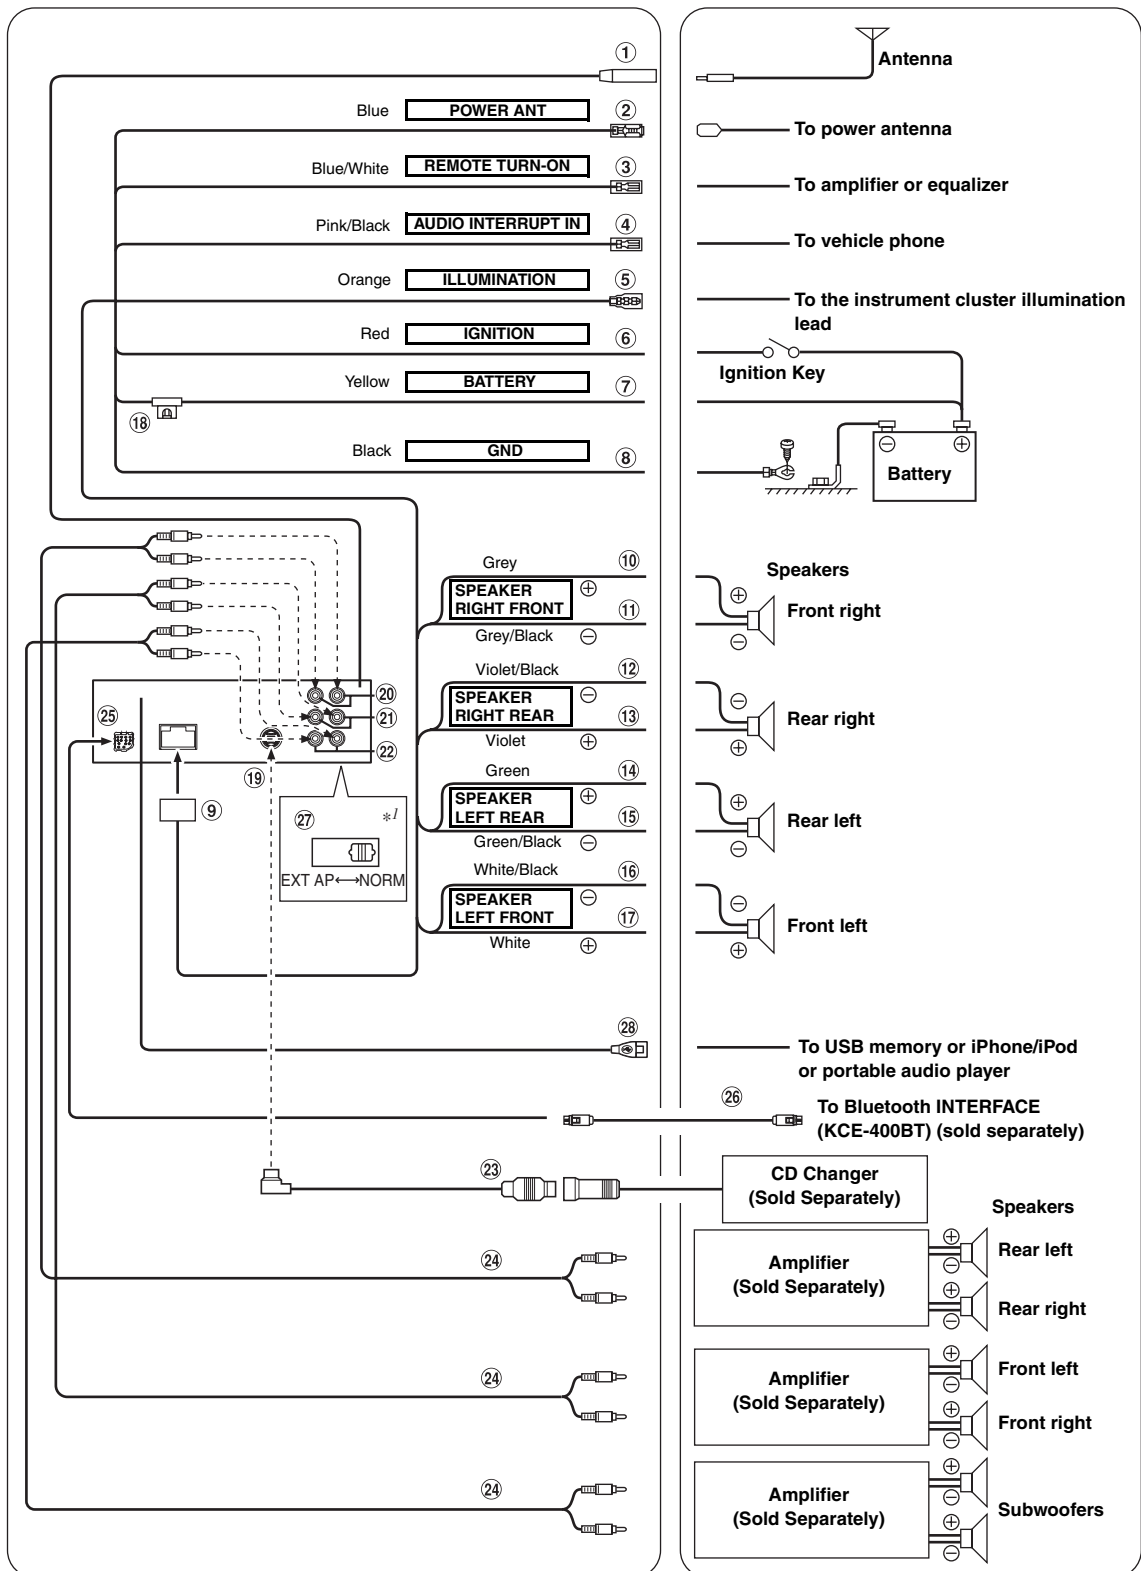

\*<sup>1</sup> The system switch is located on the bottom of the unit.

- ① **Antenna Receptacle**
- ② **Power Antenna Lead (Blue)**  
Connect this lead to the +B terminal of your power antenna, if applicable.
  - *This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier, or a signal processor, etc.*
- ③ **Remote Turn-On Lead (Blue/White)**  
Connect this lead to the remote turn-on lead of your amplifier or signal processor.
- ④ **Audio Interrupt In Lead (Pink/Black)**
- ⑤ **Illumination Lead (Orange)**  
This lead may be connected to the vehicle's instrument cluster illumination lead. This will allow the backlighting of the iDA-X303 to dim whenever the vehicle's lights are turned on.
- ⑥ **Switched Power Lead (Ignition) (Red)**  
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+)12V only when the ignition is turned on or in the accessory position.
- ⑦ **Battery Lead (Yellow)**  
Connect this lead to the positive (+) post of the vehicle's battery.
- ⑧ **Ground Lead (Black)**  
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.
- ⑨ **Power Supply Connector**
- ⑩ **Right Front (+) Speaker Output Lead (Grey)**
- ⑪ **Right Front (-) Speaker Output Lead (Grey/Black)**
- ⑫ **Right Rear (-) Speaker Output Lead (Violet/Black)**
- ⑬ **Right Rear (+) Speaker Output Lead (Violet)**
- ⑭ **Left Rear (+) Speaker Output Lead (Green)**
- ⑮ **Left Rear (-) Speaker Output Lead (Green/Black)**
- ⑯ **Left Front (-) Speaker Output Lead (White/Black)**
- ⑰ **Left Front (+) Speaker Output Lead (White)**
- ⑱ **Fuse Holder (10A)**
- ⑲ **Ai-NET Connector**  
Connect this to the output or input connector of another device (CD Changer, Equalizer, etc.) equipped with Ai-NET.
  - *Be sure to set "Setting the Connected Head Unit (MODEL SETUP)" to "CD CHG", when the DHA-S690 is connected.*
  - *Interface adapter for iPod (KCA-420i) is not recommended for use with this product.*
  - *You can input TV/video sound by connecting an optional Ai-NET/ RCA Interface cable (KCA-121B) to this component.*

- ⑳ **Rear Output/Input RCA Connectors**  
It can be used as Rear Output or Input RCA Connectors. RED is right and WHITE is left.
- ㉑ **Front Output/Input RCA Connectors**  
It can be used as Front Output or Input RCA Connectors. RED is right and WHITE is left.
- ㉒ **Subwoofer Output RCA Connectors**  
RED is right and WHITE is left.
- ㉓ **Ai-NET Cable (Included with CD Changer)**
- ㉔ **RCA Extension Cable (sold separately)**
- ㉕ **Bluetooth interface Connector**  
Connect this to an optional Bluetooth INTERFACE (KCE-400BT). To use a hands-free mobile phone, an optional Bluetooth INTERFACE (KCE-400BT) connection is required. For details on connection, refer to the Owner's Manual of the Bluetooth INTERFACE (KCE-400BT). You can also connect this to an external device (such as a portable player) by using Conversion cable (KCE-237B) (sold separately) for building up the AUX IN.
  - \* *Refer to "Setting the AUX+ Mode" (page 21).*
  - AUX+ ON : When the external device is connected.
  - AUX+ OFF : When set to OFF, AUX+ source cannot be selected.
- ㉖ **KCE-400BT Connection Cable (Included with KCE-400BT)**
- ㉗ **System Switch**  
When connecting a processor or divider using Ai-NET, place this switch in the EXT AP position. When no device is connected, leave the switch in the NORM position. When switched to NORM, the RCA Connectors ㉔ and ㉕ can be used as Output RCA Connectors. When switched to EXT AP, the RCA Connectors ㉔ and ㉕ can be used as Input RCA Connectors.
  - *Be sure to turn the power off to the unit before changing the switch position.*
- ㉘ **USB Connector**  
Connect this to an USB memory or to an iPhone/iPod or to a portable audio player. To use an iPhone/iPod, Interface cable for iPod connection is required.
  - *Use the supplied USB cable. If a USB cable other than the supplied is used, correct performance cannot be guaranteed.*
  - *Route the USB cable away from other cables.*

#### **To prevent external noise from entering the audio system.**

- Locate the unit and route the leads at least 10 cm away from the car harness.
- Keep the battery power leads as far away from other leads as possible.
- Connect the ground lead securely to a bare metal spot (remove any paint, dirt or grease if necessary) of the car chassis.
- If you add an optional noise suppressor, connect it as far away from the unit as possible. Your Alpine dealer carries various noise suppressors, contact them for further information.
- Your Alpine dealer knows best about noise prevention measures so consult your dealer for further information.

| P.W.Board      | MIS                                                                               | MODEL | Ref.                   | Parts No.   | Parts Name           |
|----------------|-----------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| MAIN-P.W.Board |  |       | <a href="#">ANT100</a> | 09-06103Z02 | ASSY,ANID-0035-02A   |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">BZ800</a>  | 50T04252K01 | BUZZER,XY13-5H       |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C1</a>     | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C100</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C101</a>   | 08S45676W89 | CAP,CER 473K-B1E -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C107</a>   | 08S82122F32 | CAP,CER.62RJ-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C112</a>   | 08S82122F27 | CAP,CER.39RJ-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C113</a>   | 08S82122F19 | CAP,CER.18RJ-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C2</a>     | 08S82122F61 | CAP,CER.102J-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C300</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C301</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C302</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C303</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C305</a>   | 08S65669Y01 | CAP,CER 334KX7R1E-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C306</a>   | 08S65669Y01 | CAP,CER 334KX7R1E-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C308</a>   | 08S45539Y02 | CAP,CER 222KX7R2J-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C309</a>   | 08S45539Y02 | CAP,CER 222KX7R2J-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C310</a>   | 08S45539Y02 | CAP,CER 222KX7R2J-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C315</a>   | 08S65670Y08 | CAP,CER 225KX5R1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C316</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C317</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C318</a>   | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C319</a>   | 08S45676W77 | CAP,CER.333Z-F1H -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C320</a>   | 08S65676Y03 | CAP,CER 225KX7R1C-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C321</a>   | 08S65669Y01 | CAP,CER 334KX7R1E-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C509</a>   | 08S45677W24 | CAP,CER 33RJ-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C510</a>   | 08S45677W22 | CAP,CER.27RJ-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C511</a>   | 08S45677W22 | CAP,CER.27RJ-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C512</a>   | 08S45676W79 | CAP,CER 183K-B1E -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C513</a>   | 08S45677W22 | CAP,CER.27RJ-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C514</a>   | 08S45676W79 | CAP,CER 183K-B1E -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C515</a>   | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C516</a>   | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C517</a>   | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C519</a>   | 08S35374W01 | CAP,CER 104K-B1E-CP  |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C520</a>   | 08S65128F90 | CAP,CER 473K-B1H -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C521</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C522</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| MAIN-P.W.Board |                                                                                   | #1    | <a href="#">C523</a>   | 08S35374W01 | CAP,CER 104K-B1E-CP  |
| MAIN-P.W.Board |                                                                                   | #1    | <a href="#">C524</a>   | 08S65128F78 | CAP,CER.223K-B1H -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C525</a>   | 08S45677W22 | CAP,CER.27RJ-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C526</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN-P.W.Board |                                                                                   | #1    | <a href="#">C527</a>   | 08S45676W65 | CAP,CER.222K-B1H -CP |
| MAIN-P.W.Board |                                                                                   | #1    | <a href="#">C528</a>   | 08S45677W36 | CAP,CER.101J-CH1H-CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C529</a>   | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |                                                                                   |       | <a href="#">C531</a>   | 08S45677W60 | CAP,CER 102J-CH1H-CP |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                 | Parts No.   | Parts Name           |
|----------------|-----|-------|----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">C532</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |     |       | <a href="#">C600</a> | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C601</a> | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C602</a> | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C603</a> | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C604</a> | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C605</a> | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C606</a> | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C607</a> | 08S45677W20 | CAP,CER.22RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C608</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |     |       | <a href="#">C609</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |     |       | <a href="#">C610</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |     |       | <a href="#">C611</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C612</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C613</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C614</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C615</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C616</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C617</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C618</a> | 08S65674Y05 | CAP,CER 105KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C619</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |     |       | <a href="#">C620</a> | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| MAIN-P.W.Board |     |       | <a href="#">C621</a> | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| MAIN-P.W.Board |     |       | <a href="#">C622</a> | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| MAIN-P.W.Board |     |       | <a href="#">C623</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |
| MAIN-P.W.Board |     |       | <a href="#">C624</a> | 08S82122F61 | CAP,CER.102J-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C625</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C626</a> | 08S65676Y03 | CAP,CER 225KX7R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C627</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |     |       | <a href="#">C628</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |     |       | <a href="#">C629</a> | 08S60102F40 | CAP,CER 224K-B1E -CP |
| MAIN-P.W.Board |     |       | <a href="#">C630</a> | 08S60102F40 | CAP,CER 224K-B1E -CP |
| MAIN-P.W.Board |     |       | <a href="#">C700</a> | 08S45676W62 | CAP,CER.122J-SL1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C701</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |     |       | <a href="#">C702</a> | 08S45677W18 | CAP,CER.18RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C703</a> | 08S45677W18 | CAP,CER.18RJ-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C704</a> | 08S65670Y04 | CAP,CER 475KX5R1E-CP |
| MAIN-P.W.Board |     |       | <a href="#">C705</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C706</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C707</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C708</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C709</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C710</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C711</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C712</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C713</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                 | Parts No.   | Parts Name           |
|----------------|-----|-------|----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">C715</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C716</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C717</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C718</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C719</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C720</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C721</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C722</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C724</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C725</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C726</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C727</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C728</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C729</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C730</a> | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| MAIN-P.W.Board |     |       | <a href="#">C731</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C732</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C733</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C734</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C735</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C736</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C739</a> | 08S45677W49 | CAP,CER 361J-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C742</a> | 08S45677W07 | CAP,CER.5R0C-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C743</a> | 08S45677W07 | CAP,CER.5R0C-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C744</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C745</a> | 08S45676W77 | CAP,CER.333Z-F1H -CP |
| MAIN-P.W.Board |     |       | <a href="#">C746</a> | 08S45676W77 | CAP,CER.333Z-F1H -CP |
| MAIN-P.W.Board |     |       | <a href="#">C749</a> | 08S45677W48 | CAP,CER.331J-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C750</a> | 08S45677W48 | CAP,CER.331J-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C751</a> | 08S45677W52 | CAP,CER 471J-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C752</a> | 08S45677W52 | CAP,CER 471J-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C753</a> | 08S45677W38 | CAP,CER 121J-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C754</a> | 08S45677W38 | CAP,CER 121J-CH1H-CP |
| MAIN-P.W.Board |     |       | <a href="#">C757</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C758</a> | 08S65670Y01 | CAP,CER 106KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C801</a> | 08S65667Y01 | CAP,CER 224KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C803</a> | 08S45676W73 | CAP,CER.103K-B1H -CP |
| MAIN-P.W.Board |     |       | <a href="#">C804</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C805</a> | 08S65667Y01 | CAP,CER 224KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C806</a> | 08S60102F44 | CAP,CER 474K-B1E -CP |
| MAIN-P.W.Board |     |       | <a href="#">C807</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C808</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C809</a> | 08S65667Y01 | CAP,CER 224KX5R1C-CP |
| MAIN-P.W.Board |     |       | <a href="#">C810</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C811</a> | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |     |       | <a href="#">C812</a> | 08S45676W80 | CAP,CER 223K-B1E -CP |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS                                                                                 | MODEL | Ref.                   | Parts No.   | Parts Name           |
|----------------|-------------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C813</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C814</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C815</a>   | 08S65128F78 | CAP,CER.223K-B1H -CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C816</a>   | 08S35374W01 | CAP,CER 104K-B1E-CP  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C817</a>   | 08S35350Y04 | CAP,CER 105K-B1C -CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C818</a>   | 08-13593Z02 | CAP,TF 224K-1C -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C819</a>   | 08-13593Z02 | CAP,TF 224K-1C -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C820</a>   | 08-13593Z02 | CAP,TF 224K-1C -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C821</a>   | 08-13593Z02 | CAP,TF 224K-1C -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C822</a>   | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C823</a>   | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C825</a>   | 08S65128F78 | CAP,CER.223K-B1H -CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C827</a>   | 08S45676W83 | CAP,CER 473K-B1C -CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C829</a>   | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C832</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C833</a>   | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">C834</a>   | 08S45539Y04 | CAP,CER 103KX7R2J-CP |
| MAIN-P.W.Board |    |       | <a href="#">CB500</a>  | 09-05560Z01 | BTB,DF15-S -DB       |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">CB700</a>  | 09-05987Z04 | WTB,BM05B-PASS-TFTEA |
| MAIN-P.W.Board |    |       | <a href="#">CB800</a>  | 09T35473Y16 | WTB,F169B001-16 -DB  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D100</a>   | 48T85357W01 | DIO,1PS226 -CP       |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D300</a>   | 48-06707Z01 | DIO,MA3J147-TX -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D301</a>   | 48-06707Z01 | DIO,MA3J147-TX -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D303</a>   | 48-07015Z01 | DIO,KDS160-RTK -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D304</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN-P.W.Board |                                                                                     | #1    | <a href="#">D500</a>   | 48T25651W02 | DIO,MA152WK-TX -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D502</a>   | 48T25651W02 | DIO,MA152WK-TX -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D503</a>   | 48-07016Z01 | DIO,KDS181-RTK -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D504</a>   | 48-07015Z01 | DIO,KDS160-RTK -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D600</a>   | 48-07016Z01 | DIO,KDS181-RTK -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D601</a>   | 48-07016Z01 | DIO,KDS181-RTK -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D602</a>   | 48-07016Z01 | DIO,KDS181-RTK -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D702</a>   | 48-07924Z01 | VST,EZJZ1V800AA -CP  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D703</a>   | 48-07924Z01 | VST,EZJZ1V800AA -CP  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D800</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D801</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D803</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D804</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D805</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D806</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D807</a>   | 48T44813F03 | DIO,MA165 -R5        |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D808</a>   | 48-07015Z01 | DIO,KDS160-RTK -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D809</a>   | 48T75527Y01 | DIO,1SR154-400 -E1   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">D810</a>   | 48-02592Z01 | DIO,ZEN Z5W27VJ -EA  |
| MAIN-P.W.Board |  |       | <a href="#">DIN300</a> | 09T15462Y08 | DIN,TCS7782-019117DB |
| MAIN-P.W.Board |  |       | <a href="#">DIN800</a> | 09T55071W11 | CON,TCP9389-11 -DT   |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                 | Parts No.   | Parts Name           |
|----------------|-----|-------|----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">E100</a> | 23S65134W23 | CAP,ELY 101-1A(6)-E6 |
| MAIN-P.W.Board |     |       | <a href="#">E101</a> | 23S65134W35 | CAP,ELY 101-1C(8)-E6 |
| MAIN-P.W.Board |     |       | <a href="#">E102</a> | 23S65134W53 | CAP,ELY 4R7-1V(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E301</a> | 23T65114Y24 | CAP,FK 681-1C-G -EA  |
| MAIN-P.W.Board |     |       | <a href="#">E302</a> | 23S65134W24 | CAP,ELY 221-1A(8)-E6 |
| MAIN-P.W.Board |     |       | <a href="#">E303</a> | 23S65134W24 | CAP,ELY 221-1A(8)-E6 |
| MAIN-P.W.Board |     |       | <a href="#">E304</a> | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E305</a> | 23S65134W64 | CAP,ELY R47-1H(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E306</a> | 23T65114Y15 | CAP,FK 681-1A-F -EA  |
| MAIN-P.W.Board |     |       | <a href="#">E308</a> | 23S65134W11 | CAP,ELY 22R-0J(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E309</a> | 23S65134W23 | CAP,ELY 101-1A(6)-E6 |
| MAIN-P.W.Board |     |       | <a href="#">E500</a> | 23S65134W15 | CAP,ELY 331-0J(8)-E6 |
| MAIN-P.W.Board |     |       | <a href="#">E501</a> | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E502</a> | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| MAIN-P.W.Board |     |       | <a href="#">E600</a> | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E601</a> | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E602</a> | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| MAIN-P.W.Board |     |       | <a href="#">E603</a> | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E604</a> | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E605</a> | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E606</a> | 23S65134W51 | CAP,ELY 2R2-1V(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E607</a> | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| MAIN-P.W.Board |     |       | <a href="#">E608</a> | 23S65134W32 | CAP,ELY 22R-1C(5)-E3 |
| MAIN-P.W.Board |     |       | <a href="#">E609</a> | 23S65134W51 | CAP,ELY 2R2-1V(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E610</a> | 23S65134W51 | CAP,ELY 2R2-1V(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E611</a> | 23S65134W51 | CAP,ELY 2R2-1V(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E612</a> | 23S65134W51 | CAP,ELY 2R2-1V(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E613</a> | 23S65134W51 | CAP,ELY 2R2-1V(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E614</a> | 23S65134W51 | CAP,ELY 2R2-1V(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E615</a> | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E616</a> | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E617</a> | 08S65676Y05 | CAP,CER 105KX7R1E-CP |
| MAIN-P.W.Board |     |       | <a href="#">E618</a> | 23S65134W51 | CAP,ELY 2R2-1V(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E619</a> | 23S65134W31 | CAP,ELY 10R-1C(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E708</a> | 23T65114Y20 | CAP,FK 101-1C-D -E6  |
| MAIN-P.W.Board |     |       | <a href="#">E709</a> | 23T65114Y21 | CAP,FK 221-1C-D8-E6  |
| MAIN-P.W.Board |     |       | <a href="#">E710</a> | 23S65134W12 | CAP,ELY 47R-0J(5)-E3 |
| MAIN-P.W.Board |     |       | <a href="#">E711</a> | 23S65134W72 | CAP,ELY 3R3-1H(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E712</a> | 23S65134W72 | CAP,ELY 3R3-1H(4)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E800</a> | 23S65134W36 | CAP,ELY 221-1C(8)-EA |
| MAIN-P.W.Board |     |       | <a href="#">E801</a> | 23T65114Y15 | CAP,FK 681-1A-F -EA  |
| MAIN-P.W.Board |     |       | <a href="#">E802</a> | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E803</a> | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E804</a> | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E805</a> | 23S65134W41 | CAP,ELY 4R7-1E(3)-E2 |
| MAIN-P.W.Board |     |       | <a href="#">E806</a> | 23S65134W34 | CAP,ELY 47R-1C(6)-E6 |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS                                                                                 | MODEL | Ref.                  | Parts No.   | Parts Name           |
|----------------|-------------------------------------------------------------------------------------|-------|-----------------------|-------------|----------------------|
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E807</a>  | 23S65134W65 | CAP,ELY 1R0-1H(3)-E2 |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E808</a>  | 23T75325Y01 | CAP,VB 332-1C +      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E809</a>  | 23T65114Y18 | CAP,FK 22R-1C-C -E3  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">E810</a>  | 23T65114Y32 | CAP,FK 4R7-1V-B -E2  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">F800</a>  | 65T75477Y13 | FUSE,CCP2E 4.0A -CP  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC300</a> | 51T65072Y01 | PQ070XH02ZP -NE9     |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC301</a> | 51T25259Y03 | BA00ASFP-E2 -NE5     |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC302</a> | 51-12158Z01 | S-1132B18-M5T1G -CP  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC303</a> | 51-05862Z01 | NJM2845DL1-33-TE1NE5 |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC304</a> | 51T35123Y01 | TC7W14FK-TE85L -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC305</a> | 51T35410Y01 | S-817A33ANB-T2 -CP   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC306</a> | 51-05862Z03 | NJM2845DL1-05-TE1NE5 |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC500</a> | 83-15264Z61 | V1.0MAIN09X-PODM_A   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC502</a> | 51T75063Y06 | BD5228G-TR -CP       |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC503</a> | 51-09594Z01 | KIC7W04FK-RTK -CP    |
| MAIN-P.W.Board |                                                                                     | #1    | <a href="#">IC504</a> | 51T93532F05 | TC4S01F-TE85L -CP    |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC505</a> | 51-10494Z01 | KIA393F-EL -SE2      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC600</a> | 51-11419Z01 | 74HC4066PW,118 -SE2  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC601</a> | 51-11419Z01 | 74HC4066PW,118 -SE2  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC602</a> | 51T93340F02 | NJM2060V-TE2 -SE2    |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC603</a> | 51-07764Z01 | TDA7417 -QE6         |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC604</a> | 51T15420Y01 | BA4560F-E2 -SE2      |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC700</a> | 51T15191Y01 | TC74VHC08FT-EL -SE5  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC701</a> | 51T15191Y01 | TC74VHC08FT-EL -SE5  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC702</a> | 51T25576W07 | NJM4580V-TE2 -SE2    |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC703</a> | 83-15264Z90 | V1.103USB09X-PODL/M  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC704</a> | 51-11433Z01 | RT9702AGB -CP        |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC705</a> | 51-04231Z01 | WM8725GED/RV -SE5    |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC706</a> | 51-06214Z01 | S29AL008D70TFI010-ST |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC708</a> | 51-11501Z01 | HY57V641620FTP-HI-ST |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC709</a> | 51-09817Z03 | 341S2307 -LE6        |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC710</a> | 51-05314Z01 | BA4560RFVM-TR -SE1   |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC711</a> | 51T25183Y02 | TC7SET08FU-EL -CP    |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC712</a> | 51T25183Y02 | TC7SET08FU-EL -CP    |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC800</a> | 51T65147Y01 | HA13165 -ZS          |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">IC801</a> | 51-04635Z01 | TB2904HQ -ZS         |
| MAIN-P.W.Board |  | #1    | <a href="#">JK500</a> | 09T03156K01 | JAC,CK-3.5-14 -DB    |
| MAIN-P.W.Board |  |       | <a href="#">JK600</a> | 09-11352Z01 | RCA,YKC21-4816N -DB  |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">L100</a>  | 24T25164Y21 | IND,FSLM2520 4R7J-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">L101</a>  | 24T16403W29 | COI,IND.15R-M -CP    |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">L102</a>  | 24T55488Y20 | IND,LLQ1608 R027J-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">L103</a>  | 24T55488Y24 | IND,LLQ1608 R039J-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">L700</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">L702</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">L704</a>  | 24T95456W27 | FBI,BLM18PG181SH1-CP |
| MAIN-P.W.Board |                                                                                     |       | <a href="#">Q101</a>  | 48-08602Z01 | TR,2SA2071-Q-T100-E2 |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                 | Parts No.   | Parts Name           |
|----------------|-----|-------|----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">Q102</a> | 48-04929Z18 | TR,KRC119S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q300</a> | 48-09583Z04 | TR,KTA1504S-GRRTK-CP |
| MAIN-P.W.Board |     |       | <a href="#">Q301</a> | 48-04929Z01 | TR,KRC101S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q302</a> | 48-02302Z01 | TR,XP0331100L -CP    |
| MAIN-P.W.Board |     |       | <a href="#">Q304</a> | 48-08602Z01 | TR,2SA2071-Q-T100-E2 |
| MAIN-P.W.Board |     |       | <a href="#">Q305</a> | 48-04929Z04 | TR,KRC104S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q306</a> | 48-07989Z13 | TR,UNR521LJ-TX -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q500</a> | 48-09583Z04 | TR,KTA1504S-GRRTK-CP |
| MAIN-P.W.Board |     |       | <a href="#">Q505</a> | 48-04929Z02 | TR,KRC102S-RTK -CP   |
| MAIN-P.W.Board |     | #1    | <a href="#">Q506</a> | 48-09583Z04 | TR,KTA1504S-GRRTK-CP |
| MAIN-P.W.Board |     | #1    | <a href="#">Q507</a> | 48-04929Z02 | TR,KRC102S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q508</a> | 48-09583Z04 | TR,KTA1504S-GRRTK-CP |
| MAIN-P.W.Board |     |       | <a href="#">Q509</a> | 48T52438F01 | TR ,2SD601A-RS/TX-CP |
| MAIN-P.W.Board |     |       | <a href="#">Q510</a> | 48-04940Z03 | TR,KRA103S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q600</a> | 48T25317Y01 | TR,XN0F256-TX -CP    |
| MAIN-P.W.Board |     |       | <a href="#">Q601</a> | 48T25317Y01 | TR,XN0F256-TX -CP    |
| MAIN-P.W.Board |     |       | <a href="#">Q602</a> | 48T25317Y01 | TR,XN0F256-TX -CP    |
| MAIN-P.W.Board |     |       | <a href="#">Q800</a> | 48-04929Z01 | TR,KRC101S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q801</a> | 48-09583Z04 | TR,KTA1504S-GRRTK-CP |
| MAIN-P.W.Board |     |       | <a href="#">Q802</a> | 48-04929Z01 | TR,KRC101S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q803</a> | 48-02302Z01 | TR,XP0331100L -CP    |
| MAIN-P.W.Board |     |       | <a href="#">Q804</a> | 48-05471Z01 | TR,XP0NG8A00-L -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q805</a> | 48-02302Z02 | TR,XP0331200L -CP    |
| MAIN-P.W.Board |     |       | <a href="#">Q806</a> | 48-04929Z03 | TR,KRC103S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q807</a> | 48T75031Y03 | TR,2SB1440-S -E2     |
| MAIN-P.W.Board |     |       | <a href="#">Q808</a> | 48-04929Z05 | TR,KRC105S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q810</a> | 48T73023F01 | TR ,2SD874A -E2      |
| MAIN-P.W.Board |     |       | <a href="#">Q811</a> | 48-04929Z02 | TR,KRC102S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q812</a> | 48-04929Z03 | TR,KRC103S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q813</a> | 48-02302Z01 | TR,XP0331100L -CP    |
| MAIN-P.W.Board |     |       | <a href="#">Q814</a> | 48-04929Z02 | TR,KRC102S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q816</a> | 48-02302Z02 | TR,XP0331200L -CP    |
| MAIN-P.W.Board |     |       | <a href="#">Q817</a> | 48-04929Z03 | TR,KRC103S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q818</a> | 48-04929Z03 | TR,KRC103S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q819</a> | 48-04929Z02 | TR,KRC102S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">Q820</a> | 48-09581Z04 | TR,KTA1505S-GRRTK-CP |
| MAIN-P.W.Board |     |       | <a href="#">Q821</a> | 48-04929Z01 | TR,KRC101S-RTK -CP   |
| MAIN-P.W.Board |     |       | <a href="#">R100</a> | 06S70072F78 | RES,CP .2R2-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R109</a> | 06S45674W19 | RES,RK 27RJ 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R110</a> | 06S45674W19 | RES,RK 27RJ 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R111</a> | 06S55361Y98 | RES,RK 243J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R112</a> | 06S70072F61 | RES,CP .222-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R113</a> | 06S70072F61 | RES,CP .222-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R115</a> | 06S55361Y17 | RES,RK 10RJ 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R116</a> | 06S45674W93 | RES,RK 333J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R300</a> | 06S15593Y68 | RES,RK 622F 1/10 -CP |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">R301</a>  | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R302</a>  | 06S15593Y62 | RES,RK 362F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R303</a>  | 06S15593Y40 | RES,RK 431F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R304</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R305</a>  | 06S55366Y05 | RES,RK 433J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R306</a>  | 06S55361Y81 | RES,RK 472J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R307</a>  | 06S55361Y75 | RES,RK 272J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R308</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R309</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R310</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R313</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R314</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R316</a>  | 06S55366Y06 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R322</a>  | 06S55365Y97 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R325</a>  | 06S15593Y80 | RES,RK 203F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R327</a>  | 06S45674W45 | RES,RK 331J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R328</a>  | 06S45674W99 | RES,RK 563J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R329</a>  | 06S55365Y81 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R331</a>  | 06S55365Y90 | RES,RK 113J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R333</a>  | 06S45674W61 | RES,RK 152J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R335</a>  | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R336</a>  | 06S45674W65 | RES,RK 222J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R337</a>  | 06S55361Y71 | RES,RK 182J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R338</a>  | 06S55361Y89 | RES,RK 103J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R339</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R340</a>  | 06S15593Y51 | RES,RK 122F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R4901</a> | 06S64995F53 | RES,RK 102J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R4921</a> | 06S64995F53 | RES,RK 102J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R4931</a> | 06S64995F53 | RES,RK 102J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R4971</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R4981</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R501</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R502</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R503</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R504</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     | \$1   | <a href="#">R505</a>  | 06S45675W43 | RES,RK JUMPER1/10-CP |
| MAIN-P.W.Board |     |       | <a href="#">R506</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R507</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R520</a>  | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R523</a>  | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R524</a>  | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R525</a>  | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R527</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R528</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R530</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R531</a>  | 06S45675W22 | RES,RK 474J 1/10 -CP |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                 | Parts No.   | Parts Name           |
|----------------|-----|-------|----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">R533</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R534</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R537</a> | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R538</a> | 06S45674W75 | RES,RK 562J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R539</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R540</a> | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R541</a> | 06S45674W75 | RES,RK 562J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R543</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R544</a> | 06S64996F02 | RES,RK 104J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R545</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R546</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R550</a> | 06S45674W67 | RES,RK 272J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R551</a> | 06S15593Y83 | RES,RK 273F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R552</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R553</a> | 06S15593Y63 | RES,RK 392F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R554</a> | 06S64995F53 | RES,RK 102J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R555</a> | 06S64995F53 | RES,RK 102J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R556</a> | 06S35084Y37 | RES,RK 103F 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R557</a> | 06S35084Y37 | RES,RK 103F 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R558</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R559</a> | 06S64995F77 | RES,RK 103J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R560</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R561</a> | 06S64995F53 | RES,RK 102J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R562</a> | 06S64995F53 | RES,RK 102J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R563</a> | 06S64995F53 | RES,RK 102J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R564</a> | 06S64995F53 | RES,RK 102J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R565</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R566</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R567</a> | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R568</a> | 06S45674W65 | RES,RK 222J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R569</a> | 06S45674W91 | RES,RK 273J 1/10 -CP |
| MAIN-P.W.Board |     | #1    | <a href="#">R570</a> | 06S45675W22 | RES,RK 474J 1/10 -CP |
| MAIN-P.W.Board |     | #1    | <a href="#">R571</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     | #1    | <a href="#">R572</a> | 06S70072F29 | RES,CP .101-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R573</a> | 06S45674W77 | RES,RK 682J 1/10 -CP |
| MAIN-P.W.Board |     | #1    | <a href="#">R574</a> | 06S45674W65 | RES,RK 222J 1/10 -CP |
| MAIN-P.W.Board |     | #1    | <a href="#">R575</a> | 06S45674W69 | RES,RK 332J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R576</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R577</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R578</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R579</a> | 06S45674W77 | RES,RK 682J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R580</a> | 06S45674W59 | RES,RK 122J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R581</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R582</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     | #1    | <a href="#">R583</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R584</a> | 06S70072F19 | RES,CP .39R-J-1/4-CP |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                 | Parts No.   | Parts Name           |
|----------------|-----|-------|----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">R585</a> | 06S70072F19 | RES,CP .39R-J-1/4-CP |
| MAIN-P.W.Board |     | #1    | <a href="#">R586</a> | 06S45674W57 | RES,RK 102J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R587</a> | 06S70072F19 | RES,CP .39R-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R588</a> | 06S70072F05 | RES,CP .10R-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R589</a> | 06S70072F19 | RES,CP .39R-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R590</a> | 06S45674W65 | RES,RK 222J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R591</a> | 06S45674W61 | RES,RK 152J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R592</a> | 06S45674W61 | RES,RK 152J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R593</a> | 06S45674W65 | RES,RK 222J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R595</a> | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R598</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R600</a> | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R601</a> | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R602</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R603</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R604</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R605</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R606</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R607</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R608</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R609</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R610</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R611</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R612</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R613</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R614</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R615</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R616</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R617</a> | 06S15593Y81 | RES,RK 223F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R622</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R623</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R624</a> | 06S35083Y45 | RES,RK 473F 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R625</a> | 06S35083Y45 | RES,RK 473F 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R626</a> | 06S35083Y45 | RES,RK 473F 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R627</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R628</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R629</a> | 06S55366Y11 | RES,RK 753J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R630</a> | 06S55366Y11 | RES,RK 753J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R631</a> | 06S55366Y11 | RES,RK 753J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R632</a> | 06S55366Y11 | RES,RK 753J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R633</a> | 06S55366Y11 | RES,RK 753J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R634</a> | 06S55366Y11 | RES,RK 753J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R635</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R636</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R637</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R638</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                 | Parts No.   | Parts Name           |
|----------------|-----|-------|----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">R639</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R640</a> | 06S64995F37 | RES,RK 221J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R641</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R642</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R643</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R644</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R645</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R646</a> | 06S64995F29 | RES,RK 101J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R647</a> | 06S15593Y50 | RES,RK 112F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R648</a> | 06S55365Y89 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R649</a> | 06S55365Y89 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R654</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| MAIN-P.W.Board |     |       | <a href="#">R656</a> | 06S55366Y39 | RES,RK JUMPER1/10-CP |
| MAIN-P.W.Board |     |       | <a href="#">R700</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R701</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R702</a> | 06S55365Y66 | RES,RK 112J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R704</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R705</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R714</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R715</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R716</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R717</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R718</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R720</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R721</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R723</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R724</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R725</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R726</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R727</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R729</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R730</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R731</a> | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R733</a> | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R736</a> | 06S45674W85 | RES,RK 153J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R737</a> | 06S45674W85 | RES,RK 153J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R738</a> | 06S45674W85 | RES,RK 153J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R739</a> | 06S45674W85 | RES,RK 153J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R740</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R741</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R742</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R743</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R744</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R745</a> | 06S55365Y41 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R746</a> | 06S45674W21 | RES,RK 33RJ 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R747</a> | 06S45674W21 | RES,RK 33RJ 1/10 -CP |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                 | Parts No.   | Parts Name           |
|----------------|-----|-------|----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">R748</a> | 06S45674W21 | RES,RK 33RJ 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R749</a> | 06S45674W21 | RES,RK 33RJ 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R750</a> | 06S55361Y27 | RES,RK 27RJ 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R751</a> | 06S55361Y27 | RES,RK 27RJ 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R752</a> | 06S15616Y40 | RES,RK 565J 1/16 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R753</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R757</a> | 06S15593Y97 | RES,RK 104F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R759</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R760</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R761</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R762</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R763</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R764</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R765</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R766</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R767</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R769</a> | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R770</a> | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R771</a> | 06S15593Y69 | RES,RK 682F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R772</a> | 06S15593Y72 | RES,RK 912F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R773</a> | 06S45674W80 | RES,RK 912J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R774</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R775</a> | 06S15593Y57 | RES,RK 222F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R776</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R777</a> | 06S15593Y73 | RES,RK 103F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R778</a> | 06S15593Y85 | RES,RK 333F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R779</a> | 06S15593Y85 | RES,RK 333F 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R780</a> | 06S55365Y63 | RES,RK 821J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R781</a> | 06S55365Y63 | RES,RK 821J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R782</a> | 06S45674W77 | RES,RK 682J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R783</a> | 06S45674W77 | RES,RK 682J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R786</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R789</a> | 06S45674W73 | RES,RK 472J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R790</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R791</a> | 06S45674W89 | RES,RK 223J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R800</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R801</a> | 06S55365Y77 | RES,RK 332J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R802</a> | 06S55365Y77 | RES,RK 332J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R803</a> | 06S45674W65 | RES,RK 222J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R804</a> | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R805</a> | 06S35095Y16 | RES,RK 303J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R806</a> | 06S45674W97 | RES,RK 473J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R807</a> | 06S70072F77 | RES,CP .103-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R808</a> | 06S35083Y31 | RES,RK 332F 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R809</a> | 06S35083Y35 | RES,RK 682F 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R810</a> | 06S55361Y70 | RES,RK 162J 1/4 -CP  |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board      | MIS | MODEL | Ref.                  | Parts No.   | Parts Name           |
|----------------|-----|-------|-----------------------|-------------|----------------------|
| MAIN-P.W.Board |     |       | <a href="#">R812</a>  | 06S55361Y70 | RES,RK 162J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R813</a>  | 06S55366Y14 | RES,RK 104J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R814</a>  | 06S55361Y70 | RES,RK 162J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R815</a>  | 06S35083Y42 | RES,RK 273F 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R816</a>  | 06S55361Y70 | RES,RK 162J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R817</a>  | 06S55365Y01 | RES,RK 2R2J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R819</a>  | 06S35083Y45 | RES,RK 473F 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R821</a>  | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R822</a>  | 06S55365Y98 | RES,RK 243J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R823</a>  | 06S55361Y70 | RES,RK 162J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R824</a>  | 06S55366Y14 | RES,RK 104J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R825</a>  | 06S55361Y54 | RES,RK 361J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R826</a>  | 06S70072F77 | RES,CP .103-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R827</a>  | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R828</a>  | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R829</a>  | 06S55362Y06 | RES,RK 473J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R830</a>  | 06S70072F29 | RES,CP .101-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R832</a>  | 06S45674W85 | RES,RK 153J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R833</a>  | 06S45674W33 | RES,RK 101J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R834</a>  | 06S45674W41 | RES,RK 221J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R835</a>  | 06S45674W81 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R836</a>  | 06S70072F39 | RES,CP .271-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R837</a>  | 06S70072F39 | RES,CP .271-J-1/4-CP |
| MAIN-P.W.Board |     |       | <a href="#">R840</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R841</a>  | 06S55363Y89 | RES,RK 103J 1/8 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">R877</a>  | 06S55366Y14 | RES,RK 104J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R878</a>  | 06S55365Y89 | RES,RK 103J 1/10 -CP |
| MAIN-P.W.Board |     |       | <a href="#">R879</a>  | 06S55361Y71 | RES,RK 182J 1/4 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">RA500</a> | 06S45591W07 | RES,ARY MNR101J 4-CP |
| MAIN-P.W.Board |     |       | <a href="#">SA100</a> | 48-00954Z01 | VST,CSA30C201M-T -CP |
| MAIN-P.W.Board |     |       | <a href="#">SW500</a> | 40T16096W03 | SW ,TACT SKHHLW      |
| MAIN-P.W.Board |     |       | <a href="#">SW600</a> | 40T15452Y01 | SW,SLIDE SLD-62-724X |
| MAIN-P.W.Board |     |       | <a href="#">SW601</a> | 40T15452Y01 | SW,SLIDE SLD-62-724X |
| MAIN-P.W.Board |     |       | <a href="#">TU100</a> | TU-00887Z03 | TUNER,MX-A210        |
| MAIN-P.W.Board |     |       | <a href="#">VL700</a> | 24T75055W08 | CHOKE,SA10HA-452JA + |
| MAIN-P.W.Board |     |       | <a href="#">VT100</a> | 24T35286Y02 | IND,MG56 332J -DB    |
| MAIN-P.W.Board |     |       | <a href="#">XL500</a> | 91T95554W03 | XTL,CM200S 32.76K-E5 |
| MAIN-P.W.Board |     |       | <a href="#">XL501</a> | 91-11385Z04 | XTL,XI 6.000M -R5    |
| MAIN-P.W.Board |     |       | <a href="#">XL700</a> | 91T95554W03 | XTL,CM200S 32.76K-E5 |
| MAIN-P.W.Board |     |       | <a href="#">XL701</a> | 91-14119Z01 | XTL,XQ 12.000M -E5   |
| MAIN-P.W.Board |     |       | <a href="#">Z500</a>  | 91T65112W06 | EMI,BK2125HM102 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">Z501</a>  | 91T65112W06 | EMI,BK2125HM102 -CP  |
| MAIN-P.W.Board |     |       | <a href="#">Z700</a>  | 91T65123Y02 | EMI,DLW21SN900SQ2-CP |
| MAIN-P.W.Board |     |       | <a href="#">ZD700</a> | 48T15541Y49 | DIO,ZEN MAZS0510M-CP |
| MAIN-P.W.Board |     |       | <a href="#">ZD701</a> | 48T15541Y49 | DIO,ZEN MAZS0510M-CP |
| MAIN-P.W.Board |     |       | <a href="#">ZD800</a> | 48-11191Z26 | DIO,ZEN MAZ8062GM-CP |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                               | MODEL | Ref.                   | Parts No.   | Parts Name           |
|-----------------|-----------------------------------------------------------------------------------|-------|------------------------|-------------|----------------------|
| MAIN-P.W.Board  |                                                                                   |       | <a href="#">ZD801</a>  | 48-11191Z49 | DIO,ZEN MAZ8130GL-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C401</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C405</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C406</a>   | 08S45676W80 | CAP,CER 223K-B1E -CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C407</a>   | 08S35374W12 | CAP,CER 106K-B0J -CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C494</a>   | 08T81833F07 | CAP,CER 105K-B1C -CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C495</a>   | 08S45677W60 | CAP,CER 102J-CH1H-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C496</a>   | 08S45676W89 | CAP,CER 473K-B1E -CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C497</a>   | 08S45676W89 | CAP,CER 473K-B1E -CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C498</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">C499</a>   | 08S45676W85 | CAP,CER 104K-B1C -CP |
| FRONT-P.W.Board |  |       | <a href="#">CH401</a>  | 09-05559Z01 | BTB,DF15-P -B        |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">D401</a>   | 48T85357W01 | DIO,1PS226 -CP       |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">D406</a>   | 48-06707Z01 | DIO,MA3J147-TX -CP   |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">D407</a>   | 48-06707Z01 | DIO,MA3J147-TX -CP   |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">D408</a>   | 48-06707Z01 | DIO,MA3J147-TX -CP   |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">D410</a>   | 48-06707Z01 | DIO,MA3J147-TX -CP   |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">IC401</a>  | 51-10867Z01 | PT6575B-TQ-L -QT     |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">IC402</a>  | 51-01707Z01 | RS-771 -NE2          |
| FRONT-P.W.Board |  |       | <a href="#">LCD401</a> | 65-14395Z01 | LCD,LUC2743A         |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD401</a>  | 48-11289Z01 | LED,ARY QB.L.031 -DB |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD402</a>  | 48-11946Z01 | LED,WHT SMLZ13WBD-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD430</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD435</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD438</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD439</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD440</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD441</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD442</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD444</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD446</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD447</a>  | 48-11415Z01 | LED,RED KPT-1608S-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD448</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD450</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">LD451</a>  | 48-14200Z01 | LED,BLU LNJ926W8C-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">Q399</a>   | 48T52438F04 | TR ,2SD601A-S /TX-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">Q400</a>   | 48T52438F04 | TR ,2SD601A-S /TX-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">Q410</a>   | 48-04929Z02 | TR,KRC102S-RTK -CP   |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">Q411</a>   | 48-04929Z02 | TR,KRC102S-RTK -CP   |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">Q412</a>   | 48-04929Z02 | TR,KRC102S-RTK -CP   |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">Q413</a>   | 48T52438F04 | TR ,2SD601A-S /TX-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">Q414</a>   | 48T63788F04 | TR,2SD1328-T-TX -CP  |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">Q417</a>   | 48T52438F04 | TR ,2SD601A-S /TX-CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">Q450</a>   | 48T63788F04 | TR,2SD1328-T-TX -CP  |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">R401</a>   | 06S45674W97 | RES,RK 473J 1/10 -CP |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">R402</a>   | 06S55363Y65 | RES,RK 102J 1/8 -CP  |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS | MODEL | Ref.                  | Parts No.   | Parts Name            |
|-----------------|-----|-------|-----------------------|-------------|-----------------------|
| FRONT-P.W.Board |     |       | <a href="#">R403</a>  | 06S55361Y48 | RES,RK 201J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R404</a>  | 06S55363Y81 | RES,RK 472J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R405</a>  | 06S64995F21 | RES,RK 47RJ 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R406</a>  | 06S55363Y81 | RES,RK 472J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R407</a>  | 06S35084Y27 | RES,RK 152F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R408</a>  | 06S55361Y71 | RES,RK 182J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R409</a>  | 06S55361Y62 | RES,RK 751J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R410</a>  | 06S35084Y28 | RES,RK 182F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R411</a>  | 06S35084Y30 | RES,RK 272F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R412</a>  | 06S35084Y32 | RES,RK 392F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R413</a>  | 06S35084Y35 | RES,RK 682F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R416</a>  | 06S35084Y27 | RES,RK 152F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R417</a>  | 06S35084Y28 | RES,RK 182F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R418</a>  | 06S35084Y30 | RES,RK 272F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R419</a>  | 06S35084Y32 | RES,RK 392F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R420</a>  | 06S35084Y35 | RES,RK 682F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R421</a>  | 06S35084Y39 | RES,RK 153F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R422</a>  | 06S35084Y44 | RES,RK 393F 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R423</a>  | 06S55363Y65 | RES,RK 102J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R424</a>  | 06S55363Y81 | RES,RK 472J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R425</a>  | 06S55361Y41 | RES,RK 101J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R427</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R428</a>  | 06S55363Y81 | RES,RK 472J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R430</a>  | 06S55363Y65 | RES,RK 102J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R432</a>  | 06S55361Y74 | RES,RK 242J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R433</a>  | 06S55361Y74 | RES,RK 242J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R434</a>  | 06S55361Y73 | RES,RK 222J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R435</a>  | 06S55361Y73 | RES,RK 222J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R436</a>  | 06S55361Y81 | RES,RK 472J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R437</a>  | 06S55361Y87 | RES,RK 822J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R440</a>  | 06S55361Y71 | RES,RK 182J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R441</a>  | 06S55361Y91 | RES,RK 123J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R442</a>  | 06S55361Y69 | RES,RK 152J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R443</a>  | 06S55361Y65 | RES,RK 102J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R444</a>  | 06S55363Y81 | RES,RK 472J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R450</a>  | 06S45674W61 | RES,RK 152J 1/10 -CP  |
| FRONT-P.W.Board |     |       | <a href="#">R455</a>  | 06S55363Y65 | RES,RK 102J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R456</a>  | 06S55363Y65 | RES,RK 102J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R457</a>  | 06S55363Y65 | RES,RK 102J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R489</a>  | 06S55363Y65 | RES,RK 102J 1/8 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">R490</a>  | 06S45674W73 | RES,RK 472J 1/10 -CP  |
| FRONT-P.W.Board |     |       | <a href="#">R491</a>  | 06S45674W73 | RES,RK 472J 1/10 -CP  |
| FRONT-P.W.Board |     |       | <a href="#">R492</a>  | 06S45674W73 | RES,RK 472J 1/10 -CP  |
| FRONT-P.W.Board |     |       | <a href="#">R493</a>  | 06S45674W95 | RES,RK 393J 1/10 -CP  |
| FRONT-P.W.Board |     |       | <a href="#">R496</a>  | 06S55361Y41 | RES,RK 101J 1/4 -CP   |
| FRONT-P.W.Board |     |       | <a href="#">SW401</a> | 40T65353Y01 | SW,TACT SKRSPACE010E2 |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

| P.W.Board       | MIS                                                                               | MODEL | Ref.                  | Parts No.   | Parts Name           |
|-----------------|-----------------------------------------------------------------------------------|-------|-----------------------|-------------|----------------------|
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW402</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| FRONT-P.W.Board |  |       | <a href="#">SW403</a> | 40-10796Z01 | ENC,EC35B154H401 -DB |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW404</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW405</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW406</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW407</a> | 40T35558Y09 | SW,TACT SKPMAQE010E2 |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW409</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW410</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW411</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW412</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW413</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| FRONT-P.W.Board |                                                                                   |       | <a href="#">SW415</a> | 40T65353Y01 | SW,TACT SKRPACE010E2 |
| Miscellaneous   |  |       | <a href="#">ET700</a> | 09-11953Z02 | ASSY,YAF11-1252N     |

Mark Model Code


#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.

# Exploded View(Cabinet)

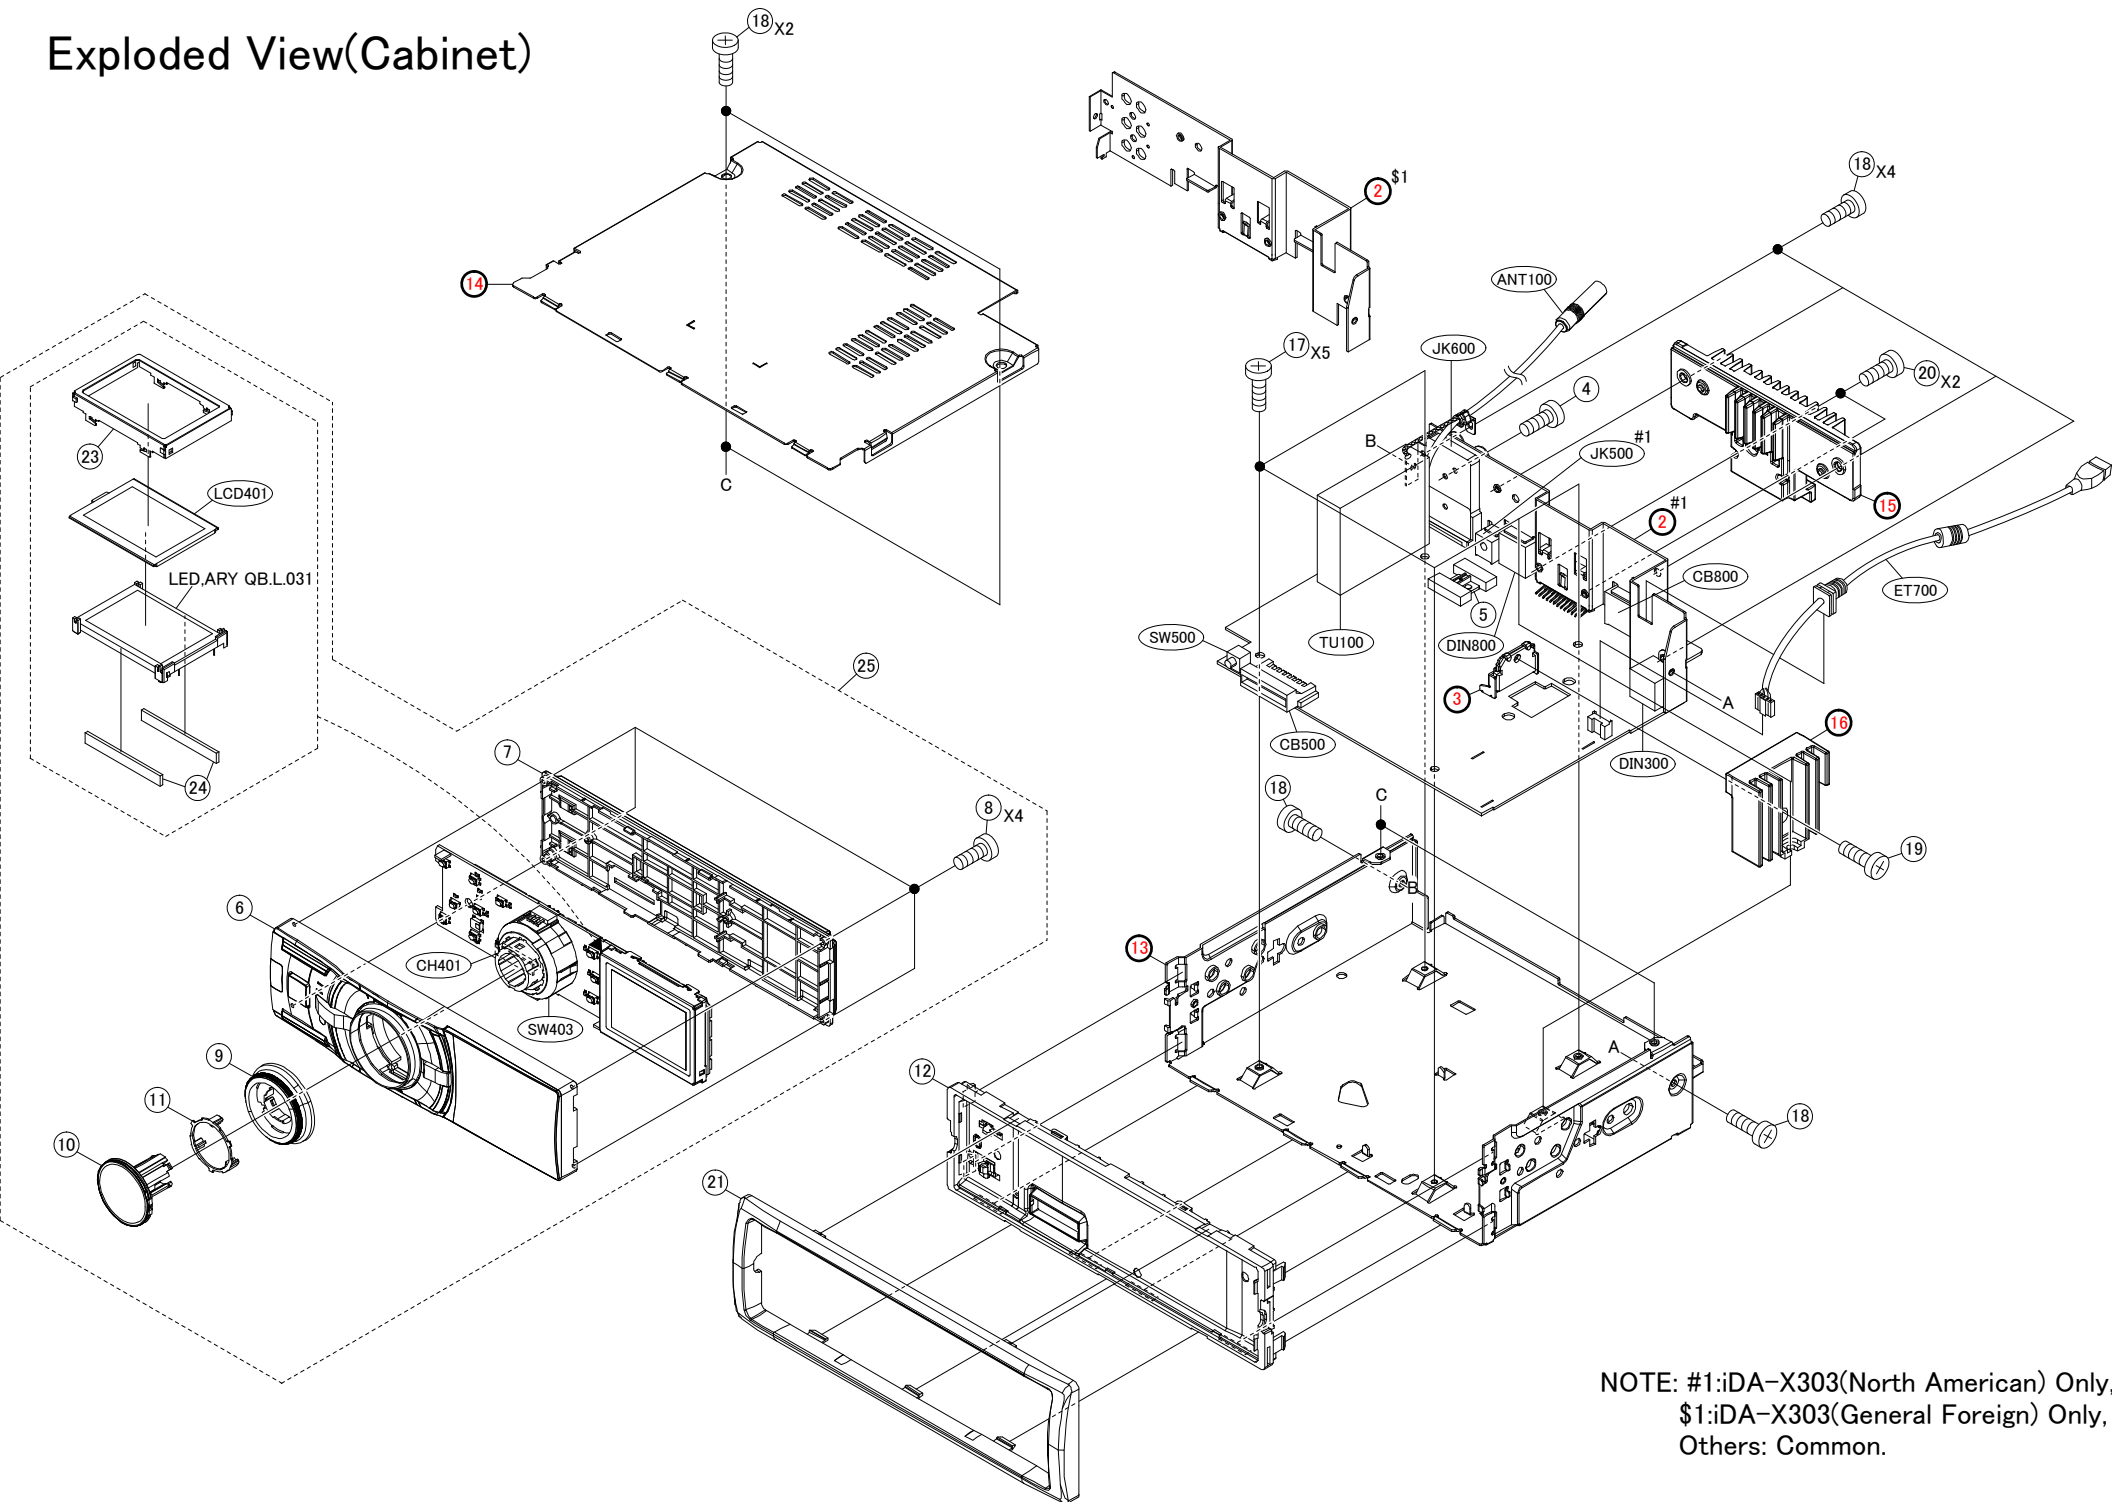

NOTE: #1:iDA-X303(North American) Only,  
\$1:iDA-X303(General Foreign) Only,  
Others: Common.

| MODEL | Symbol No.             | Parts No.   | Description          |
|-------|------------------------|-------------|----------------------|
| #1    | <a href="#">2</a>      | -----       | BKT,REAR             |
| \$1   | <a href="#">2</a>      | -----       | BKT,REAR             |
|       | <a href="#">3</a>      | -----       | BKT,IC               |
|       | <a href="#">4</a>      | 03S60825Y04 | SCR,B-T 3X8 ZN A     |
|       | <a href="#">5</a>      | 36A04141K02 | KNOB,SLIDE           |
| #1    | <a href="#">6</a>      | EN-14183Z01 | NOSE,PIECE ASSY ML   |
| \$1   | <a href="#">6</a>      | EN-14183Z05 | NOSE,PIECE ASSY ML   |
|       | <a href="#">7</a>      | 13-11234Z01 | NOSE,BOTTOM ML       |
|       | <a href="#">8</a>      | 03-02876Z16 | SCR,WEV 1.7X8 ZB A   |
|       | <a href="#">9</a>      | 36-14173Z01 | KNOB,ROTARY          |
| #1    | <a href="#">10</a>     | 15-14170Z01 | PLATE,ROTARY ASSY    |
| \$1   | <a href="#">10</a>     | 15-14170Z02 | PLATE,ROTARY ASSY    |
|       | <a href="#">11</a>     | 15-14174Z01 | HOLDER,LOCK          |
|       | <a href="#">12</a>     | 13-11531Z01 | NOSE,BASE ASSY       |
|       | <a href="#">13</a>     | -----       | CHAS,BASE            |
|       | <a href="#">14</a>     | -----       | COVER,TOP            |
|       | <a href="#">15</a>     | -----       | HEAT,SINK PWR        |
|       | <a href="#">16</a>     | -----       | HEAT,SINK SYS        |
|       | <a href="#">17</a>     | 03T25225Y01 | SCR,GND              |
|       | <a href="#">18</a>     | 03S60822Y12 | SCR,S-T 2.6X6 ZN A   |
|       | <a href="#">19</a>     | 03S60822Y19 | SCR,S-T 2.6X10 ZN A  |
|       | <a href="#">20</a>     | 03S60822Y23 | SCR,S-T 2.6X16 ZN A  |
|       | <a href="#">21</a>     | 33-11685Z01 | FACE,PLATE           |
|       | <a href="#">23</a>     | 15-11240Z01 | COVER,LCD            |
|       | <a href="#">24</a>     | 75-11583Z01 | RUBBER,ELECTRONIC    |
| #1    | <a href="#">25</a>     | SU-14867Z01 | SERVICE_NOSE_X303    |
| \$1   | <a href="#">25</a>     | SU-14897Z01 | SERVICE_NOSE_X303(E) |
|       | <a href="#">ANT100</a> | 09-06103Z02 | ASSY,ANID-0035-02A   |
|       | <a href="#">CB500</a>  | 09-05560Z01 | BTB,DF15-S -DB       |
|       | <a href="#">CB800</a>  | 09T35473Y16 | WTB,F169B001-16 -DB  |
|       | <a href="#">CH401</a>  | 09-05559Z01 | BTB,DF15-P -B        |
|       | <a href="#">DIN300</a> | 09T15462Y08 | DIN,TCS7782-019117DB |
|       | <a href="#">DIN800</a> | 09T55071W11 | CON,TCP9389-11 -DT   |
|       | <a href="#">ET700</a>  | 09-11953Z02 | ASSY,YAF11-1252N     |
| #1    | <a href="#">JK500</a>  | 09T03156K01 | JAC,CK-3.5-14 -DB    |
|       | <a href="#">JK600</a>  | 09-11352Z01 | RCA,YKC21-4816N -DB  |
|       | <a href="#">LCD401</a> | 65-14395Z01 | LCD,LUC2743A         |
|       | <a href="#">SW403</a>  | 40-10796Z01 | ENC,EC35B154H401 -DB |
|       | <a href="#">SW500</a>  | 40T16096W03 | SW ,TACT SKHHLW      |
|       | <a href="#">TU100</a>  | TU-00887Z03 | TUNER,MX-A210        |

Mark Model Code

#1 iDA-X303 (North American) Only,

\$1 iDA-X303 (General Foreign) Only,

Others:Common.

NOTE:The part that has not PART NUMBER will not be supplied.