Packing Method View

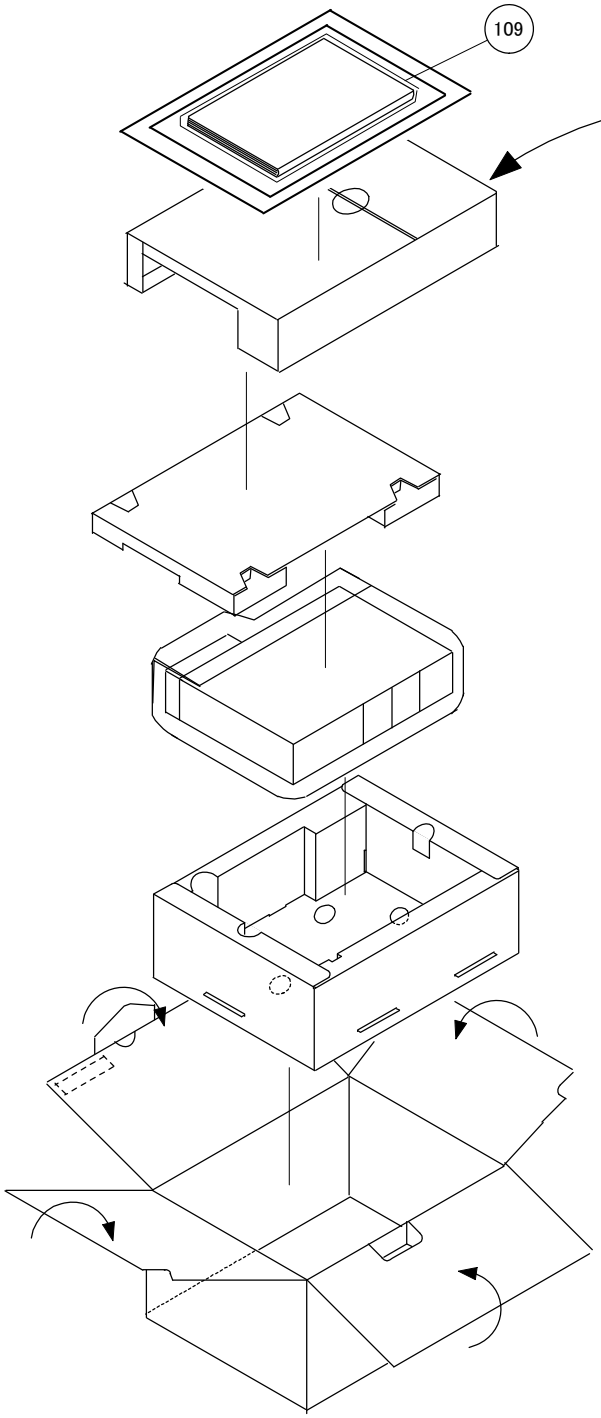

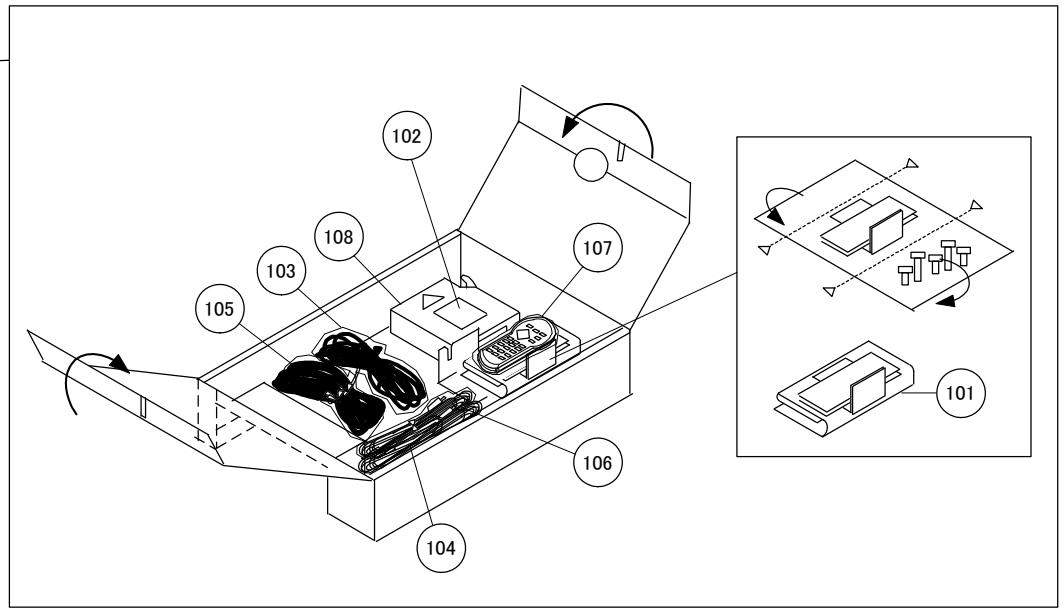

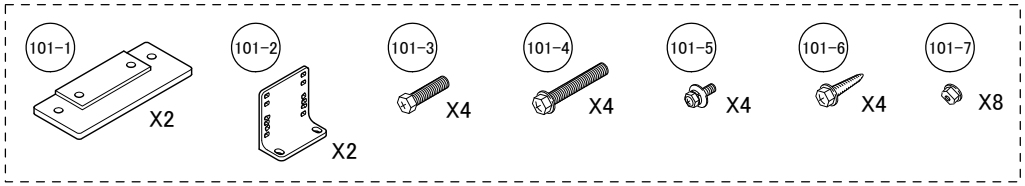

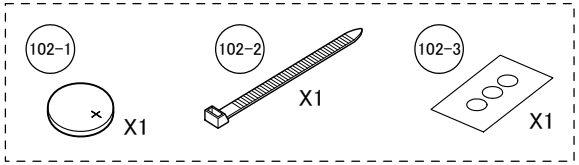











MODEL	Symbol No.	Parts No.	Description
	101-1	07B01121K01	BKT,MTG BASE
	101-2	07B00738K01	BKT,SIDE
	101-3	03B40155F10	SCR,MCH 6X25 ZB A
	101-4	03B90962F03	BOLT,HEX M6X50 A
	101-5	03D40121T11	SCR,MCH(W/W)M4X8 A
	101-6	03S70694Y03	SCR,TPG 5X15 ZB A
	101-7	02-02981Z01	NUT,CUS 6X6 ZB A
	102-1	60S70585F01	BAT,LIT.3V (CR2025)
	102-2	37T73127F01	WIRE,BIND
	102-3	54A01484K03	LABEL,KEY
	103	01T25635Y03	ASSY,WIRE POWER(680)
	104	01T15694Y06	ASSY,REMO EYE 6000-L
	105	01T45598Y01	ASSY,DIN AI(5.5/L-L)
	106	01T45597Y01	ASSY,WIRE VIDEO(P-L)
	107	97-11355Z01	ASSY,SBNN00008A
	108	01D00560K05	ASSY,MAGAZINE
	109	68-12118Z83	O/M AOAM AODL

System Connection

Connections

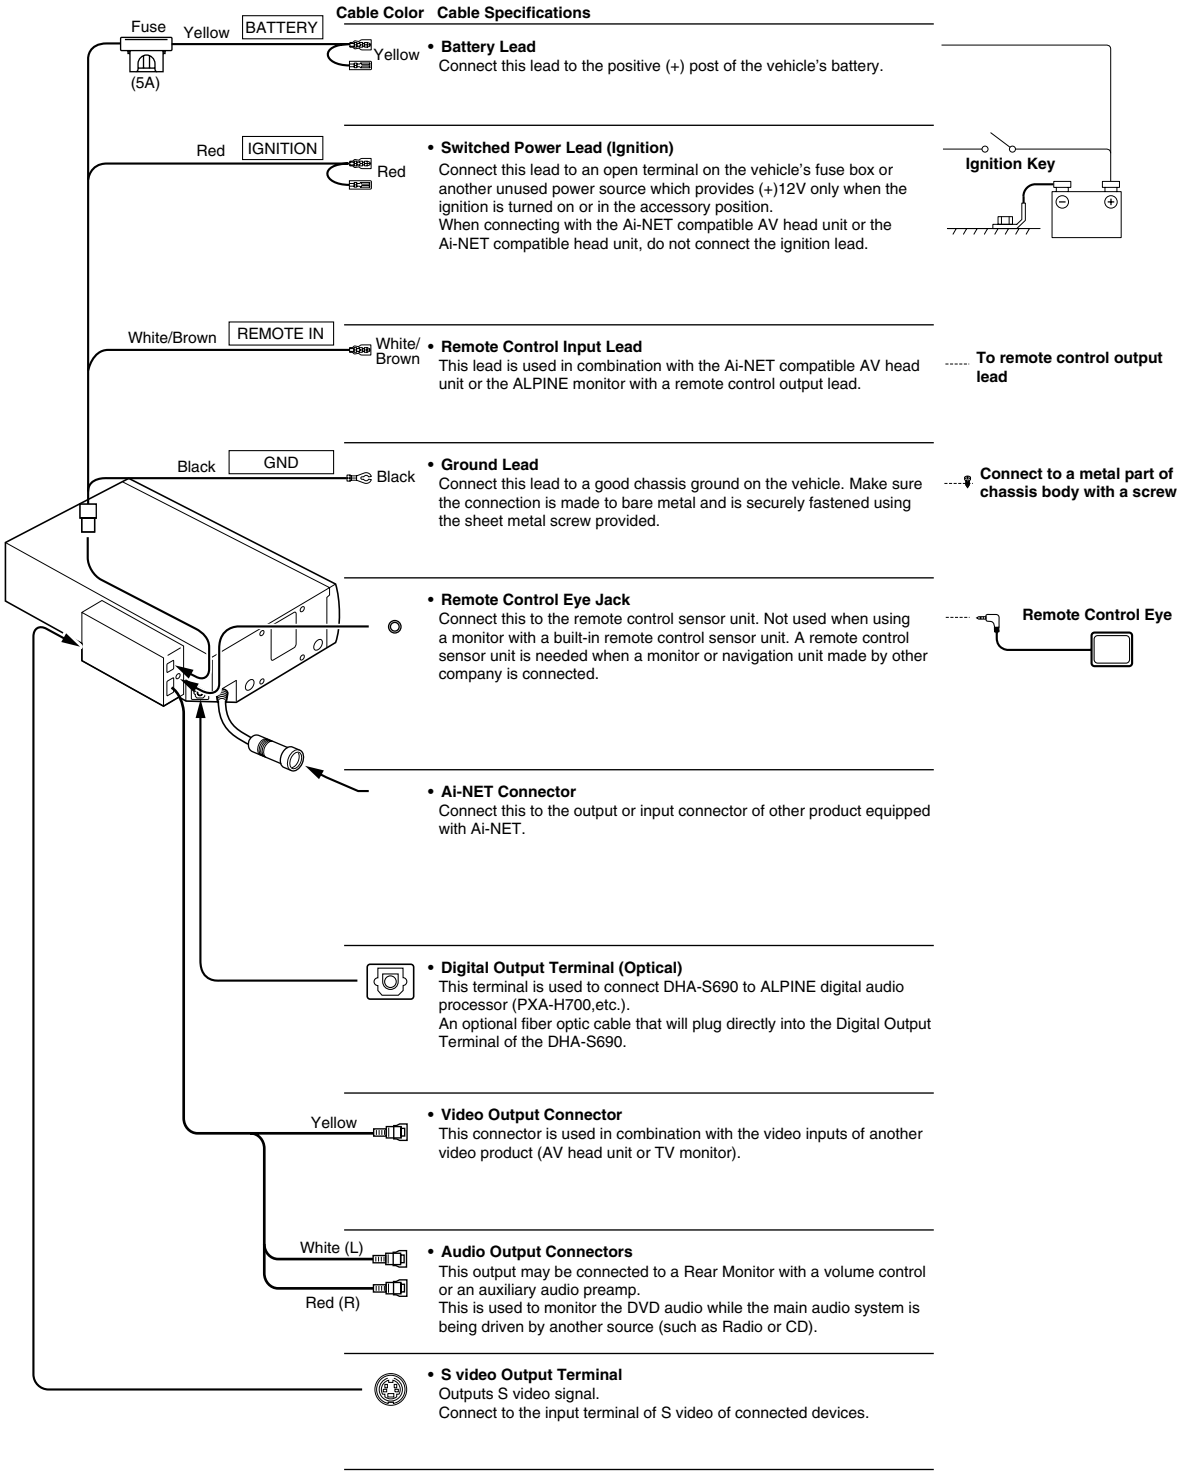

- *Connect properly. Never connect to parts other than the ones indicated in these operating instructions.*
- *Also refer to the operating instructions of the other products in the system.*

Setting the System Switch

Switch to operate from either an Ai-NET compatible head unit or Ai-NET compatible AV head unit connected to this unit.
Be sure to set the system switch before fastening the DHA-S690 in place.

1 **Disconnect the power plug.**

2 **Change the System Switch (Fig. 1).**
This switch is used to select Ai-NET or Stand Alone operation. Change the switch position using a small screwdriver or other pointed object.



Fig. 1

① Ai-NET system

Stand Alone system

1:
When connecting to an Ai-NET compatible head unit or Ai-NET compatible AV head unit.
If set to 2, with any of the Ai-NET compatible (AV) head units connected, you may not be able to operate from the head unit, or listen to audio from some external devices, etc.
The factory default is 1.

2:
When connecting to an Ai-NET incompatible head unit or another manufacturer's head unit.

CAUTION:
When switching the System Switch, make sure there are no cables attached to the DHA-S690.

3 **Connect the power plug.**

System Example

• Connecting a Monitor

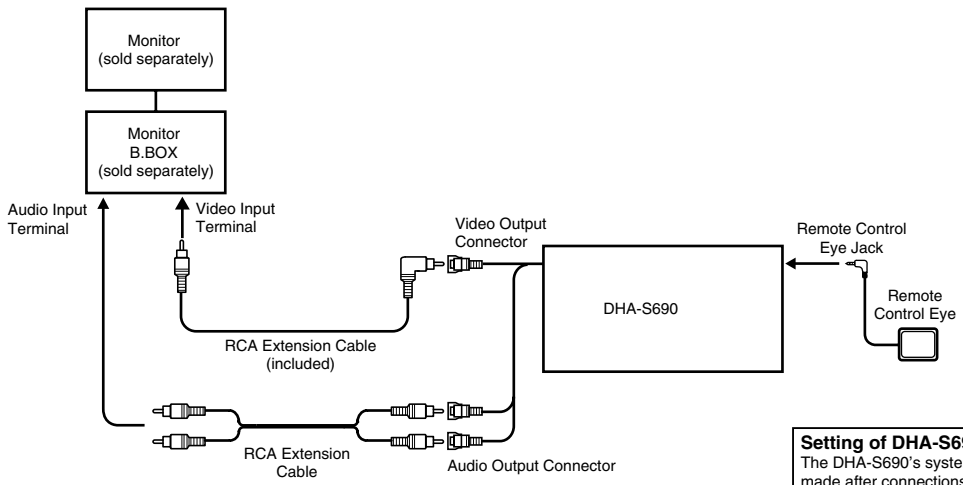

Setting of DHA-S690
The DHA-S690's system settings must be made after connections are completed. Before fixing the unit in place, refer to page 2 to change the system setting.

System Switch

Switches to "2".

- *Be sure to connect the switched Power Lead (Ignition).*
- *Also refer to the operating instructions of the other products in the system.*

• Connecting an Alpine front monitor/a rear monitor other than Alpine / Vehiclehub Pro (VPA-B222)

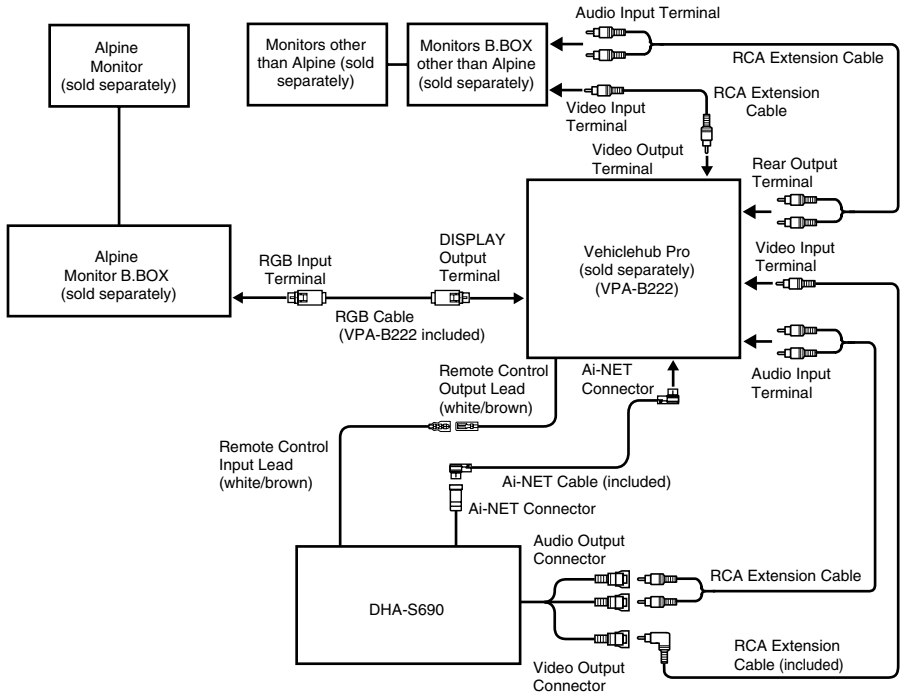

- *When connecting an S terminal compatible monitor, connect to the S video terminal using the optional cable to output a video.*
- *Also refer to the operating instructions of the other products in the system.*

• Connecting an Ai-NET compatible Head Unit / Alpine Monitor

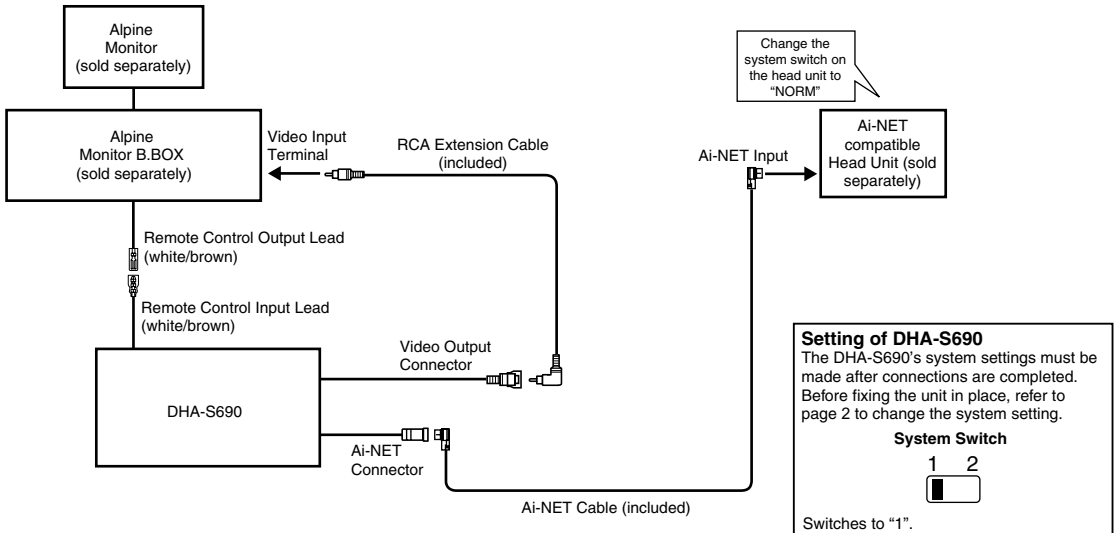

- ***Be sure to switch the head unit's system switch before turning the power on.***
- ***Be sure to make the setting (DVD CHG or CD CHG) in "Setting the Connected Head Unit" according to the connected Ai-NET compatible head unit.***
- *Also refer to the operating instructions of the other products in the system.*
- *When connecting another brand of TV monitor, there is no need to connect the remote control input cord (white/brown). Use the remote control sensor unit included with the DHA-S690.*

• Connecting an Ai-NET compatible AV head unit / Digital Audio Processor

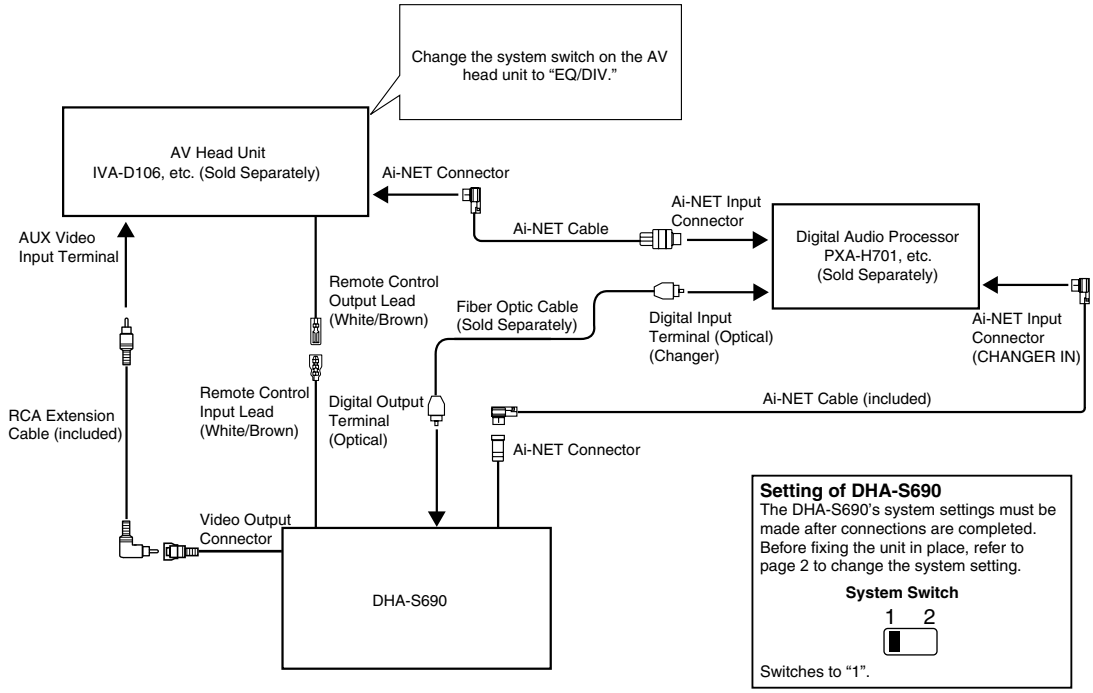

- ***Be sure to switch the head unit’s system switch before turning the power on.***
- ***Be sure to make the setting (DVD CHG or CD CHG) in “Setting the Connected Head Unit” according to the connected Ai-NET compatible head unit.***
- ***If CD CHG is set in “Setting the Connected Head Unit” :***
  If you want to play back a DVD Audio, set “Switching the input (non Ai-NET connections)” on the connected Alpine audio processor (PXA-H700, PXA-H701) to “Analog.” For details on operation, refer to the Owner’s Manual of the audio processor.
- ***The switched Power Lead (Ignition) connection is not needed.***
- *Also refer to the operating instructions of the other products in the system.*
- *When connecting the optical digital output to a digital audio processor, be sure to make connection to the CHANGER connectors of the digital audio processor optical digital input connectors. This arrangement allows you to enjoy Dolby Digital 5.1 Channel Surround and other effects even when connection is made to the CHANGER connectors.*

Observe the following when using Fiber Optic Cable.

- *Be careful not to bend the fiber optic cable at a sharp angle.*
- *Do not coil the fiber optic cable smaller than a 30 mm radius.*
- *Do not place anything on top of the fiber optic cable.*

Extension Cable

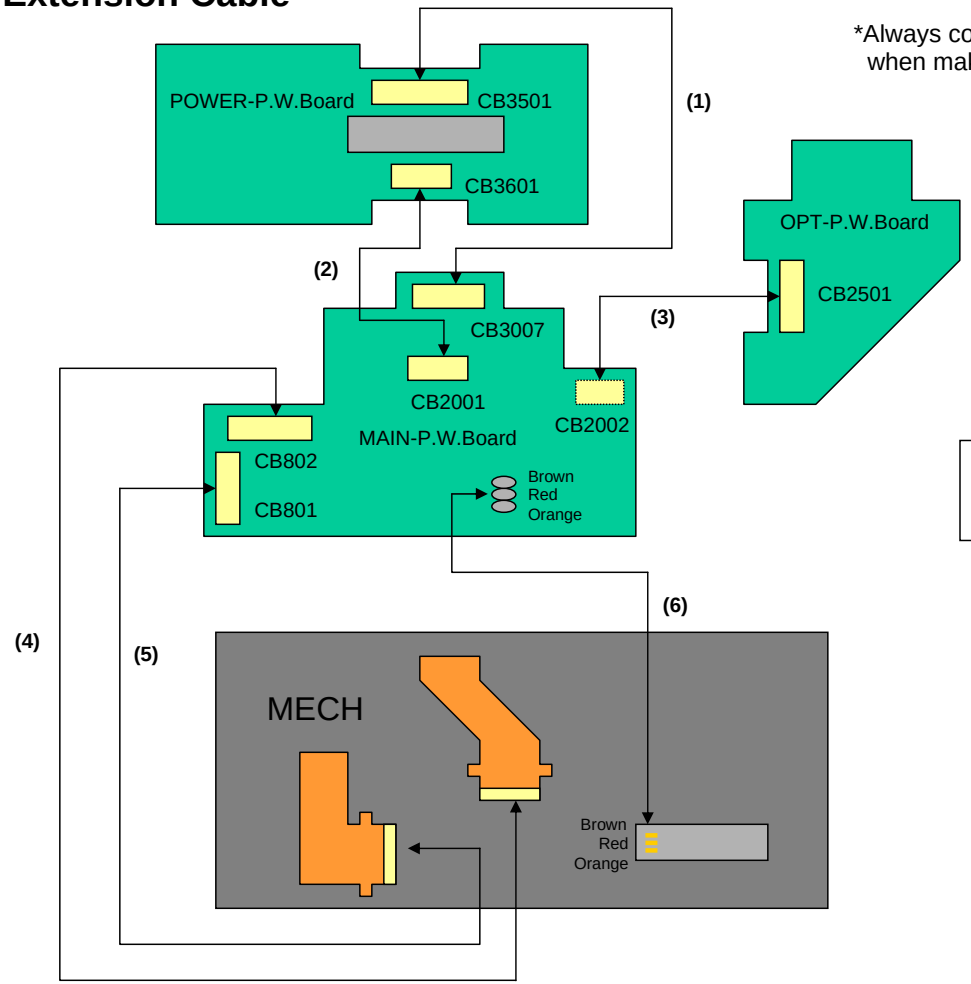

*Always connect the Extension Cable
when making checks of voltage and repair.

(1) No Extension
(2) No Extension
(3) No Extension
(4) 01E38927S01
(5) 01E40262S01
(6) 01E40469S01

*Note

Connect wiring (6) in order of the line as shown in figure.

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C1007	08S45232Y13	CAP,CER 223K-B1C -CP
MAIN-P.W.Board			C1010	08S35374W11	CAP,CER 475K-B0J -CP
MAIN-P.W.Board			C1011	08S45231Y15	CAP,CER 15RJ-CH1H-CP
MAIN-P.W.Board			C1012	08S45231Y15	CAP,CER 15RJ-CH1H-CP
MAIN-P.W.Board			C1013	08S45232Y13	CAP,CER 223K-B1C -CP
MAIN-P.W.Board			C1014	08S45232Y13	CAP,CER 223K-B1C -CP
MAIN-P.W.Board			C1015	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1016	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1017	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1019	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C1100	08S45232Y13	CAP,CER 223K-B1C -CP
MAIN-P.W.Board			C2001	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2002	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2003	08S60102F44	CAP,CER 474K-B1E -CP
MAIN-P.W.Board			C2004	08S60102F44	CAP,CER 474K-B1E -CP
MAIN-P.W.Board			C2005	08S60102F44	CAP,CER 474K-B1E -CP
MAIN-P.W.Board			C2006	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2007	08S60102F44	CAP,CER 474K-B1E -CP
MAIN-P.W.Board			C2008	08S60102F44	CAP,CER 474K-B1E -CP
MAIN-P.W.Board			C2009	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2010	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2011	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2012	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2013	08S45677W46	CAP,CER 271J-CH1H-CP
MAIN-P.W.Board			C2014	08S45677W46	CAP,CER 271J-CH1H-CP
MAIN-P.W.Board			C2015	08S45677W46	CAP,CER 271J-CH1H-CP
MAIN-P.W.Board			C2016	08S45677W24	CAP,CER 33RJ-CH1H-CP
MAIN-P.W.Board			C2017	08S45677W24	CAP,CER 33RJ-CH1H-CP
MAIN-P.W.Board			C2018	08S45677W46	CAP,CER 271J-CH1H-CP
MAIN-P.W.Board			C2028	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C2029	08S45677W18	CAP,CER.18RJ-CH1H-CP
MAIN-P.W.Board			C2030	08S45677W18	CAP,CER.18RJ-CH1H-CP
MAIN-P.W.Board			C2031	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2032	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C2033	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C2034	08S45677W36	CAP,CER.101J-CH1H-CP
MAIN-P.W.Board			C2041	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C2043	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C2044	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C2045	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C2046	08T65463Y01	CAP,CER 335K-B1A -CP
MAIN-P.W.Board			C2047	08T65463Y01	CAP,CER 335K-B1A -CP
MAIN-P.W.Board			C2048	08S45677W48	CAP,CER.331J-CH1H-CP
MAIN-P.W.Board			C2049	08S45677W48	CAP,CER.331J-CH1H-CP
MAIN-P.W.Board			C2050	08S45677W50	CAP,CER 391J-CH1H-CP
MAIN-P.W.Board			C2051	08S45677W50	CAP,CER 391J-CH1H-CP
MAIN-P.W.Board			C2052	08S45677W34	CAP,CER.82RJ-CH1H-CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C2053	08S45677W34	CAP,CER.82RJ-CH1H-CP
MAIN-P.W.Board			C2054	08S45677W38	CAP,CER 121J-CH1H-CP
MAIN-P.W.Board			C2055	08S45677W38	CAP,CER 121J-CH1H-CP
MAIN-P.W.Board			C2056	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C2088	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C2089	08T81833F13	CAP,CER 106K-B1C -CP
MAIN-P.W.Board			C2502	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C3001	08S45676W85	CAP,CER 104K-B1C -CP
MAIN-P.W.Board			C3002	08S45231Y25	CAP,CER 101J-CH1H-CP
MAIN-P.W.Board			C3004	08T65463Y02	CAP,CER 334K-B1H -CP
MAIN-P.W.Board			C3006	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C3010	08S45232Y07	CAP,CER 222K-B1H -CP
MAIN-P.W.Board			C3011	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C3012	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C3014	08S45232Y13	CAP,CER 223K-B1C -CP
MAIN-P.W.Board			C3015	08S65128F78	CAP,CER.223K-B1H -CP
MAIN-P.W.Board			C3028	08S65667Y02	CAP,CER 334KX5R1A-CP
MAIN-P.W.Board			C3034	08S45676W73	CAP,CER.103K-B1H -CP
MAIN-P.W.Board			C502	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C507	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C514	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C540	08S45231Y33	CAP,CER 471J-CH1H-CP
MAIN-P.W.Board			C541	08S45231Y36	CAP,CER 681J-CH1E-CP
MAIN-P.W.Board			C601	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C602	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C603	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C604	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C605	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C606	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C607	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C608	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C609	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C610	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C611	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C612	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C613	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C614	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C615	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C616	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C617	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C618	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C619	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C620	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C621	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C622	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C623	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C624	08S45232Y17	CAP,CER 104K-B0J -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C625	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C626	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C627	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C628	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C632	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C633	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C652	08T81833F12	CAP,CER 106K-B1A -CP
MAIN-P.W.Board			C679	08S45231Y22	CAP,CER 56RJ-CH1H-CP
MAIN-P.W.Board			C702	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C703	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C704	08S45232Y13	CAP,CER 223K-B1C -CP
MAIN-P.W.Board			C740	08S35349Y12	CAP,CER 105K-B0J -CP
MAIN-P.W.Board			C741	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C781	08S65670Y01	CAP,CER 106KX5R1C-CP
MAIN-P.W.Board			C783	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C784	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C785	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C786	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C787	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C788	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C789	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C801	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C806	08S45232Y05	CAP,CER 102K-B1H -CP
MAIN-P.W.Board			C807	08S45676W87	CAP,CER 333K-B1E -CP
MAIN-P.W.Board			C808	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C809	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C810	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C811	08S45676W70	CAP,CER 562K-B1H -CP
MAIN-P.W.Board			C812	08S45676W79	CAP,CER 183K-B1E -CP
MAIN-P.W.Board			C813	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C814	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C815	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C816	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C817	08S35349Y16	CAP,CER 105K-B1A -CP
MAIN-P.W.Board			C818	08S35349Y16	CAP,CER 105K-B1A -CP
MAIN-P.W.Board			C819	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C820	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C821	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C822	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C823	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C824	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C825	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C826	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C827	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C828	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C829	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C830	08S45232Y08	CAP,CER 332K-B1H -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			C831	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN-P.W.Board			C832	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN-P.W.Board			C833	08S45232Y08	CAP,CER 332K-B1H -CP
MAIN-P.W.Board			C835	08S45232Y07	CAP,CER 222K-B1H -CP
MAIN-P.W.Board			C836	08S45232Y07	CAP,CER 222K-B1H -CP
MAIN-P.W.Board			C837	08S45231Y25	CAP,CER 101J-CH1H-CP
MAIN-P.W.Board			C838	08S45677W40	CAP,CER.151J-CH1H-CP
MAIN-P.W.Board			C839	08S45677W40	CAP,CER.151J-CH1H-CP
MAIN-P.W.Board			C840	08S45231Y25	CAP,CER 101J-CH1H-CP
MAIN-P.W.Board			C841	08S45677W40	CAP,CER.151J-CH1H-CP
MAIN-P.W.Board			C842	08S45677W40	CAP,CER.151J-CH1H-CP
MAIN-P.W.Board			C844	08T81833F13	CAP,CER 106K-B1C -CP
MAIN-P.W.Board			C852	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C853	08T81833F13	CAP,CER 106K-B1C -CP
MAIN-P.W.Board			C854	08T81833F13	CAP,CER 106K-B1C -CP
MAIN-P.W.Board			C856	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C857	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN-P.W.Board			C860	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C861	08S65668Y04	CAP,CER 104KX5R1A-CP
MAIN-P.W.Board			C862	08S35374W10	CAP,CER 225K-B1A -CP
MAIN-P.W.Board			C863	08S35374W10	CAP,CER 225K-B1A -CP
MAIN-P.W.Board			C864	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C865	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C871	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C872	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C873	08S65670Y06	CAP,CER 226KX5R1A-CP
MAIN-P.W.Board			C874	08S65670Y06	CAP,CER 226KX5R1A-CP
MAIN-P.W.Board			C876	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			C877	08S45232Y13	CAP,CER 223K-B1C -CP
MAIN-P.W.Board			C881	08S65670Y06	CAP,CER 226KX5R1A-CP
MAIN-P.W.Board			C882	08S65670Y06	CAP,CER 226KX5R1A-CP
MAIN-P.W.Board			C883	08S35349Y12	CAP,CER 105K-B0J -CP
MAIN-P.W.Board			C884	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C891	08S65670Y06	CAP,CER 226KX5R1A-CP
MAIN-P.W.Board			C892	08S65670Y06	CAP,CER 226KX5R1A-CP
MAIN-P.W.Board			C893	08S35349Y12	CAP,CER 105K-B0J -CP
MAIN-P.W.Board			C894	08S45676W80	CAP,CER 223K-B1E -CP
MAIN-P.W.Board			C899	08S45232Y13	CAP,CER 223K-B1C -CP
MAIN-P.W.Board			C901	08S65667Y05	CAP,CER 105KX5R1A-CP
MAIN-P.W.Board			C902	08S65667Y05	CAP,CER 105KX5R1A-CP
MAIN-P.W.Board			C903	08S35374W12	CAP,CER 106K-B0J -CP
MAIN-P.W.Board			C904	08S65667Y05	CAP,CER 105KX5R1A-CP
MAIN-P.W.Board			C905	08S45232Y11	CAP,CER 103K-B1C -CP
MAIN-P.W.Board			C906	08S45232Y17	CAP,CER 104K-B0J -CP
MAIN-P.W.Board			CB1000	09T15548Y05	WTB,SM(5)B-SRSS -E5
MAIN-P.W.Board			CB2001	09-06992Z01	FFC,IMSA9686S-30Y-ED
MAIN-P.W.Board			CB2002	09T55175Y11	FFC,IMSA9617S-11Y-ED

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			CB3001	09T75307W04	WTB,53261-0490 -E9
MAIN-P.W.Board			CB3007	09-06992Z03	FFC,IMSA9686S-50Y-EZ
MAIN-P.W.Board			CB503	09-05086Z07	FFC,IMSA9632S-10Y-E9
MAIN-P.W.Board			CB801	09T75287Y36	FFC,IMSA9631S-36Y-EQ
MAIN-P.W.Board			CB802	09T75287Y24	FFC,IMSA9631S-24Y-ED
MAIN-P.W.Board			D2001	48T63462F01	DIO,DAN202K-96 -CP
MAIN-P.W.Board			D2002	48-05965Z01	DIO,1SS361-L -CP
MAIN-P.W.Board			D3001	48-05472Z01	DIO,1SS272-L -CP
MAIN-P.W.Board			D3002	48-05472Z01	DIO,1SS272-L -CP
MAIN-P.W.Board			E1006	23S65134W14	CAP,ELY 221-0J(8)-E6
MAIN-P.W.Board			E2001	23S65134W23	CAP,ELY 101-1A(6)-E6
MAIN-P.W.Board			E2002	23S65134W15	CAP,ELY 331-0J(8)-E6
MAIN-P.W.Board			E2003	23S65134W15	CAP,ELY 331-0J(8)-E6
MAIN-P.W.Board			E2004	23S65134W15	CAP,ELY 331-0J(8)-E6
MAIN-P.W.Board			E2005	23S65134W15	CAP,ELY 331-0J(8)-E6
MAIN-P.W.Board			E2006	23S65134W15	CAP,ELY 331-0J(8)-E6
MAIN-P.W.Board			E2007	23S65134W63	CAP,ELY R33-1H(3)-E2
MAIN-P.W.Board			E2008	23S65134W34	CAP,ELY 47R-1C(6)-E6
MAIN-P.W.Board			E2010	23S65134W31	CAP,ELY 10R-1C(4)-E2
MAIN-P.W.Board			E2011	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E2012	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E2013	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E2014	23S65134W34	CAP,ELY 47R-1C(6)-E6
MAIN-P.W.Board			E2015	23S65134W63	CAP,ELY R33-1H(3)-E2
MAIN-P.W.Board			E2016	23S65134W63	CAP,ELY R33-1H(3)-E2
MAIN-P.W.Board			E2023	23S65134W31	CAP,ELY 10R-1C(4)-E2
MAIN-P.W.Board			E2024	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E2025	23S65134W32	CAP,ELY 22R-1C(5)-E3
MAIN-P.W.Board			E3003	23S65134W12	CAP,ELY 47R-0J(5)-E3
MAIN-P.W.Board			E3004	23S65134W31	CAP,ELY 10R-1C(4)-E2
MAIN-P.W.Board			E3005	23S65134W75	CAP,ELY 22R-1H -E6
MAIN-P.W.Board			E3011	23S65134W75	CAP,ELY 22R-1H -E6
MAIN-P.W.Board			E3014	23S75244Y18	CAP,ELY 47R-1C -E3
MAIN-P.W.Board			IC1002	51-10969Z01	IC,D703260YGC-311-QT
MAIN-P.W.Board			IC2001	51-02829Z01	AN13301A -QT
MAIN-P.W.Board			IC2002	51T15420Y01	BA4560F-E2 -SE2
MAIN-P.W.Board			IC2003	51T55070W05	MB88385CPF-ER -SE9
MAIN-P.W.Board			IC2004	51T93332F01	IC,NJM2903M-TE3 -SE2
MAIN-P.W.Board			IC2005	51T25370W01	IC ,MC14538BFEL -SE6
MAIN-P.W.Board			IC2006	51T25183Y02	TC7SET08FU-EL -CP
MAIN-P.W.Board			IC2008	51-09404Z01	PCM1754DBQR -SE2
MAIN-P.W.Board			IC2009	51T25576W07	NJM4580V-TE2 -SE2
MAIN-P.W.Board			IC2010	51T15420Y01	BA4560F-E2 -SE2
MAIN-P.W.Board			IC2011	51T15420Y01	BA4560F-E2 -SE2
MAIN-P.W.Board			IC2100	51T15194Y01	TC74VHCT08AFT-EL-SE5
MAIN-P.W.Board			IC3002	51-04048Z01	BD3931HFP-TR -NEA
MAIN-P.W.Board			IC3004	51T45571W02	IC ,LB1836M -SE05

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			IC3006	51-06219Z01	BD7820FP-E2 -NE5
MAIN-P.W.Board			IC3008	51T25711Y02	BA05SFP-E2 -NE5
MAIN-P.W.Board			IC601	51-07925Z01	MN2DS0016UB -QT
MAIN-P.W.Board			IC701	53-13717Z74	OFL,V10012HNAL701A_B
MAIN-P.W.Board			IC702	51-00726Z02	MB85R256PFCN-G -ST
MAIN-P.W.Board			IC703	51T15185Y01	TC7SH08FU-TE85L -CP
MAIN-P.W.Board			IC781	51-11515Z01	HY57V281620FTP-HI-ST
MAIN-P.W.Board			IC806	51-08553Z01	BU4309G-TR -CP
MAIN-P.W.Board			IC851	51T55021Y02	BD7905BFS-E2 -SEE
MAIN-P.W.Board			L2001	24T25164Y17	IND,FSLM2520 2R2J-CP
MAIN-P.W.Board			L2002	24T95456W27	FBI,BLM18PG181SH1-CP
MAIN-P.W.Board			L501	24T65689Y01	FBI,FBMJ2125HS420-CP
MAIN-P.W.Board			L502	24T65689Y01	FBI,FBMJ2125HS420-CP
MAIN-P.W.Board			L503	24T65689Y01	FBI,FBMJ2125HS420-CP
MAIN-P.W.Board			L504	24T65689Y01	FBI,FBMJ2125HS420-CP
MAIN-P.W.Board			L820	24T95456W27	FBI,BLM18PG181SH1-CP
MAIN-P.W.Board			LD3001	48-05731Z01	LED,BLU SML012BCT-CP
MAIN-P.W.Board			Q2001	48T94606F06	TR,DTC114EUA-T106-CP
MAIN-P.W.Board			Q2002	48T62967F03	TR,DTC124EKA-T146-CP
MAIN-P.W.Board			Q2003	48T25317Y01	TR,XN0F256-TX -CP
MAIN-P.W.Board			Q2004	48T25317Y01	TR,XN0F256-TX -CP
MAIN-P.W.Board			Q2005	48T62967F02	TR,DTC114EKA-T146-CP
MAIN-P.W.Board			Q2006	48T75205Y01	TR,FMC2A-T148 -CP
MAIN-P.W.Board			Q2007	48T65619Y01	FET,HN1K06FU-85L -CP
MAIN-P.W.Board			Q2008	48T62966F19	TR,DTA143TKA-T146-CP
MAIN-P.W.Board			Q2009	48T62966F19	TR,DTA143TKA-T146-CP
MAIN-P.W.Board			Q2010	48T62966F19	TR,DTA143TKA-T146-CP
MAIN-P.W.Board			Q2011	48T62966F19	TR,DTA143TKA-T146-CP
MAIN-P.W.Board			Q2012	48T62967F03	TR,DTC124EKA-T146-CP
MAIN-P.W.Board			Q2013	48T62967F03	TR,DTC124EKA-T146-CP
MAIN-P.W.Board			Q3001	48T55464Y01	TR,2SD1664-QR-100-E2
MAIN-P.W.Board			Q3002	48T75205Y01	TR,FMC2A-T148 -CP
MAIN-P.W.Board			Q540	48T45251W53	TR ,UN5112 22-22 -CP
MAIN-P.W.Board			Q541	48T15656Y01	TR,2SC4617-TL -CP
MAIN-P.W.Board			Q872	48T25137Y02	TR,UN9212J-TX -CP
MAIN-P.W.Board			Q873	48T25137Y06	TR,UN9216J-TX -CP
MAIN-P.W.Board			Q874	48T25137Y06	TR,UN9216J-TX -CP
MAIN-P.W.Board			Q881	48T75011W01	TR,2SD1782K-PQR-6-CP
MAIN-P.W.Board			Q882	48T55462Y01	TR,2SB1132-QR-100-E2
MAIN-P.W.Board			Q891	48T75011W01	TR,2SD1782K-PQR-6-CP
MAIN-P.W.Board			Q892	48T55462Y01	TR,2SB1132-QR-100-E2
MAIN-P.W.Board			R1001	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1002	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1016	06S15615Y09	RES,RK 22RJ 1/16 -CP
MAIN-P.W.Board			R1018	06S15615Y65	RES,RK 472J 1/16 -CP
MAIN-P.W.Board			R1019	06S15615Y65	RES,RK 472J 1/16 -CP
MAIN-P.W.Board			R1025	06S65415Y39	RES,RK 153F 1/16 -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R1034	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1036	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1037	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1038	06S65415Y41	RES,RK 223F 1/16 -CP
MAIN-P.W.Board			R1039	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1042	06S15615Y65	RES,RK 472J 1/16 -CP
MAIN-P.W.Board			R1043	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R1056	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1057	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1059	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1060	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1061	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1062	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1064	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1066	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1068	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1069	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1071	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1072	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1073	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1074	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1075	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1076	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1077	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1078	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1079	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1080	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1081	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1082	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1083	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1084	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1085	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1086	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R1088	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1089	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1091	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1099	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R1100	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1199	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R1350	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R2000	06S55365Y97	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R2002	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2004	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2005	06S15615Y85	RES,RK 333J 1/16 -CP
MAIN-P.W.Board			R2006	06S15615Y85	RES,RK 333J 1/16 -CP
MAIN-P.W.Board			R2007	06S15615Y65	RES,RK 472J 1/16 -CP
MAIN-P.W.Board			R2008	06S15615Y65	RES,RK 472J 1/16 -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R2009	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2016	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2017	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R2019	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R2022	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R2023	06S45674W57	RES,RK 102J 1/10 -CP
MAIN-P.W.Board			R2026	06S70072F53	RES,CP .102-J-1/4-CP
MAIN-P.W.Board			R2028	06S45674W54	RES,RK 751J 1/10 -CP
MAIN-P.W.Board			R2029	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R2030	06S45674W54	RES,RK 751J 1/10 -CP
MAIN-P.W.Board			R2031	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R2032	06S45674W54	RES,RK 751J 1/10 -CP
MAIN-P.W.Board			R2033	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R2034	06S45674W54	RES,RK 751J 1/10 -CP
MAIN-P.W.Board			R2035	06S70072F34	RES,CP .161-J-1/4-CP
MAIN-P.W.Board			R2036	06S15615Y57	RES,RK 222J 1/16 -CP
MAIN-P.W.Board			R2037	06S15615Y53	RES,RK 152J 1/16 -CP
MAIN-P.W.Board			R2038	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R2039	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R2040	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R2041	06S55361Y33	RES,RK 47RJ 1/4 -CP
MAIN-P.W.Board			R2042	06S55361Y33	RES,RK 47RJ 1/4 -CP
MAIN-P.W.Board			R2043	06S55366Y10	RES,RK 683J 1/10 -CP
MAIN-P.W.Board			R2044	06S55366Y10	RES,RK 683J 1/10 -CP
MAIN-P.W.Board			R2052	06S55365Y97	RES,RK 223J 1/10 -CP
MAIN-P.W.Board			R2053	06S55365Y37	RES,RK 68RJ 1/10 -CP
MAIN-P.W.Board			R2054	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R2055	06S15593Y49	RES,RK 102F 1/10 -CP
MAIN-P.W.Board			R2056	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R2057	06S15593Y57	RES,RK 222F 1/10 -CP
MAIN-P.W.Board			R2058	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2059	06S15593Y83	RES,RK 273F 1/10 -CP
MAIN-P.W.Board			R2060	06S15593Y83	RES,RK 273F 1/10 -CP
MAIN-P.W.Board			R2061	06S65415Y37	RES,RK 103F 1/16 -CP
MAIN-P.W.Board			R2062	06S65415Y37	RES,RK 103F 1/16 -CP
MAIN-P.W.Board			R2063	06S65415Y37	RES,RK 103F 1/16 -CP
MAIN-P.W.Board			R2064	06S65415Y37	RES,RK 103F 1/16 -CP
MAIN-P.W.Board			R2065	06S55366Y26	RES,RK 334J 1/10 -CP
MAIN-P.W.Board			R2066	06S55366Y26	RES,RK 334J 1/10 -CP
MAIN-P.W.Board			R2067	06S55365Y83	RES,RK 562J 1/10 -CP
MAIN-P.W.Board			R2068	06S55365Y83	RES,RK 562J 1/10 -CP
MAIN-P.W.Board			R2069	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2070	06S15615Y69	RES,RK 682J 1/16 -CP
MAIN-P.W.Board			R2071	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2072	06S15615Y69	RES,RK 682J 1/16 -CP
MAIN-P.W.Board			R2073	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2074	06S15615Y69	RES,RK 682J 1/16 -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R2075	06S15615Y69	RES,RK 682J 1/16 -CP
MAIN-P.W.Board			R2076	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R2077	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R2078	06S55361Y17	RES,RK 10RJ 1/4 -CP
MAIN-P.W.Board			R2079	06S55361Y17	RES,RK 10RJ 1/4 -CP
MAIN-P.W.Board			R2080	06S55361Y33	RES,RK 47RJ 1/4 -CP
MAIN-P.W.Board			R2081	06S55361Y33	RES,RK 47RJ 1/4 -CP
MAIN-P.W.Board			R2082	06S15615Y93	RES,RK 683J 1/16 -CP
MAIN-P.W.Board			R2083	06S15615Y93	RES,RK 683J 1/16 -CP
MAIN-P.W.Board			R2084	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R2085	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R2088	06S55361Y41	RES,RK 101J 1/4 -CP
MAIN-P.W.Board			R2089	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2090	06S15615Y57	RES,RK 222J 1/16 -CP
MAIN-P.W.Board			R2091	06S70072F34	RES,CP .161-J-1/4-CP
MAIN-P.W.Board			R2092	06S70072F34	RES,CP .161-J-1/4-CP
MAIN-P.W.Board			R2093	06S70072F34	RES,CP .161-J-1/4-CP
MAIN-P.W.Board			R2094	06S15615Y53	RES,RK 152J 1/16 -CP
MAIN-P.W.Board			R2095	06S15615Y57	RES,RK 222J 1/16 -CP
MAIN-P.W.Board			R2096	06S15616Y22	RES,RK 105J 1/16 -CP
MAIN-P.W.Board			R2097	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R2098	06S15615Y77	RES,RK 153J 1/16 -CP
MAIN-P.W.Board			R2099	06S45674W79	RES,RK 822J 1/10 -CP
MAIN-P.W.Board			R2100	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R2101	06S15615Y83	RES,RK 273J 1/16 -CP
MAIN-P.W.Board			R2102	06S15616Y10	RES,RK 334J 1/16 -CP
MAIN-P.W.Board			R2103	06S15616Y14	RES,RK 474J 1/16 -CP
MAIN-P.W.Board			R2104	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R2105	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R2106	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R2107	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R2109	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R2111	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R2113	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R2115	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R2117	06S15615Y65	RES,RK 472J 1/16 -CP
MAIN-P.W.Board			R2118	06S15615Y65	RES,RK 472J 1/16 -CP
MAIN-P.W.Board			R2119	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R2120	06S15615Y58	RES,RK 242J 1/16 -CP
MAIN-P.W.Board			R2121	06S15615Y58	RES,RK 242J 1/16 -CP
MAIN-P.W.Board			R2122	06S15615Y58	RES,RK 242J 1/16 -CP
MAIN-P.W.Board			R2123	06S15615Y58	RES,RK 242J 1/16 -CP
MAIN-P.W.Board			R2124	06S15615Y57	RES,RK 222J 1/16 -CP
MAIN-P.W.Board			R2125	06S15615Y57	RES,RK 222J 1/16 -CP
MAIN-P.W.Board			R264	06S65415Y19	RES,RK 331F 1/16 -CP
MAIN-P.W.Board			R265	06S65415Y19	RES,RK 331F 1/16 -CP
MAIN-P.W.Board			R2999	06S15615Y69	RES,RK 682J 1/16 -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R3001	06S55361Y41	RES,RK 101J 1/4 -CP
MAIN-P.W.Board			R3002	06S15593Y79	RES,RK 183F 1/10 -CP
MAIN-P.W.Board			R3004	06S15593Y84	RES,RK 303F 1/10 -CP
MAIN-P.W.Board			R3007	06S15615Y89	RES,RK 473J 1/16 -CP
MAIN-P.W.Board			R3012	06S70072F67	RES,CP .392-J-1/4-CP
MAIN-P.W.Board			R3015	06S45674W78	RES,RK 752J 1/10 -CP
MAIN-P.W.Board			R3027	06S55361Y09	RES,RK 4R7J 1/4 -CP
MAIN-P.W.Board			R3028	06S55361Y09	RES,RK 4R7J 1/4 -CP
MAIN-P.W.Board			R3029	06S55361Y09	RES,RK 4R7J 1/4 -CP
MAIN-P.W.Board			R3120	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R4	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R504	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R505	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R506	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R507	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R521	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R522	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R523	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R524	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R525	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R526	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R527	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R528	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R529	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R530	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R531	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R532	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R533	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R534	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R535	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R536	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R538	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R542	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R545	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R551	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R552	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R553	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R554	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R555	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R556	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R557	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R558	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R559	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R560	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R602	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R603	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R604	06S15615Y81	RES,RK 223J 1/16 -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R605	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R606	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R607	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R608	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R609	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R610	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R611	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R612	06S65415Y37	RES,RK 103F 1/16 -CP
MAIN-P.W.Board			R613	06S65415Y37	RES,RK 103F 1/16 -CP
MAIN-P.W.Board			R621	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R671	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R672	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R675	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R676	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R677	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R678	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R679	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R701	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R703	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R704	06S15615Y17	RES,RK 47RJ 1/16 -CP
MAIN-P.W.Board			R710	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R711	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R712	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R713	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R714	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R715	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R716	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R717	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R718	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R719	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R720	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R721	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R722	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R723	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R724	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R725	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R740	06S65415Y41	RES,RK 223F 1/16 -CP
MAIN-P.W.Board			R742	06S65415Y24	RES,RK 821F 1/16 -CP
MAIN-P.W.Board			R743	06S65415Y43	RES,RK 333F 1/16 -CP
MAIN-P.W.Board			R744	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R751	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R752	06S15615Y09	RES,RK 22RJ 1/16 -CP
MAIN-P.W.Board			R753	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R754	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R755	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R756	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R757	06S15615Y21	RES,RK 68RJ 1/16 -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R758	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R759	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R760	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R761	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R762	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R763	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R764	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R765	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R766	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R767	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R768	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R769	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R770	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R771	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R772	06S15615Y21	RES,RK 68RJ 1/16 -CP
MAIN-P.W.Board			R780	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R781	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R782	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R783	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R784	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R785	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R786	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R787	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R788	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R789	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R790	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R791	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R792	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R793	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R794	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R795	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R800	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R801	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R802	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R803	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R804	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R805	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R806	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R807	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R809	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R810	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R811	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R812	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R813	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R814	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R815	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R816	06S65415Y31	RES,RK 332F 1/16 -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R819	06S65415Y45	RES,RK 473F 1/16 -CP
MAIN-P.W.Board			R820	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R821	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R822	06S15615Y73	RES,RK 103J 1/16 -CP
MAIN-P.W.Board			R823	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R824	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R825	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R835	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R836	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R837	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R838	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R839	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R840	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R841	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R842	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R843	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R844	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R845	06S15616Y23	RES,RK JUMPER1/16-CP
MAIN-P.W.Board			R846	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R851	06S15615Y25	RES,RK 101J 1/16 -CP
MAIN-P.W.Board			R853	06S55364Y42	RES,RK 1R0J 1/8 -CP
MAIN-P.W.Board			R854	06S55364Y42	RES,RK 1R0J 1/8 -CP
MAIN-P.W.Board			R855	06S55364Y42	RES,RK 1R0J 1/8 -CP
MAIN-P.W.Board			R856	06S55364Y42	RES,RK 1R0J 1/8 -CP
MAIN-P.W.Board			R857	06S15615Y33	RES,RK 221J 1/16 -CP
MAIN-P.W.Board			R858	06S15615Y27	RES,RK 121J 1/16 -CP
MAIN-P.W.Board			R859	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R860	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R861	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R862	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R863	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R864	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R865	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R866	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R867	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R868	06S45674W02	RES,RK 2R7J 1/10 -CP
MAIN-P.W.Board			R871	06S15615Y49	RES,RK 102J 1/16 -CP
MAIN-P.W.Board			R872	06S15615Y23	RES,RK 82RJ 1/16 -CP
MAIN-P.W.Board			R873	06S15615Y23	RES,RK 82RJ 1/16 -CP
MAIN-P.W.Board			R881	06S15615Y35	RES,RK 271J 1/16 -CP
MAIN-P.W.Board			R882	06S15615Y41	RES,RK 471J 1/16 -CP
MAIN-P.W.Board			R883	06S15615Y09	RES,RK 22RJ 1/16 -CP
MAIN-P.W.Board			R884	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R885	06S45675W06	RES,RK 104J 1/10 -CP
MAIN-P.W.Board			R886	06S65522Y19	RES,RK 3R3F 1/4 -CP
MAIN-P.W.Board			R890	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			R891	06S15615Y35	RES,RK 271J 1/16 -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
MAIN-P.W.Board			R892	06S15615Y41	RES,RK 471J 1/16 -CP
MAIN-P.W.Board			R893	06S15615Y09	RES,RK 22RJ 1/16 -CP
MAIN-P.W.Board			R894	06S45675W43	RES,RK JUMPER1/10-CP
MAIN-P.W.Board			R895	06S45675W06	RES,RK 104J 1/10 -CP
MAIN-P.W.Board			R896	06S65522Y19	RES,RK 3R3F 1/4 -CP
MAIN-P.W.Board			R898	06S65522Y24	RES,RK 8R2F 1/4 -CP
MAIN-P.W.Board			R899	06S35083Y52	RES,RK 1R0F 1/4 -CP
MAIN-P.W.Board			R901	06S65415Y41	RES,RK 223F 1/16 -CP
MAIN-P.W.Board			R902	06S65415Y33	RES,RK 472F 1/16 -CP
MAIN-P.W.Board			R903	06S65415Y37	RES,RK 103F 1/16 -CP
MAIN-P.W.Board			R905	06S65415Y38	RES,RK 123F 1/16 -CP
MAIN-P.W.Board			R911	06S65415Y19	RES,RK 331F 1/16 -CP
MAIN-P.W.Board			R912	06S65415Y19	RES,RK 331F 1/16 -CP
MAIN-P.W.Board			R921	06S65415Y19	RES,RK 331F 1/16 -CP
MAIN-P.W.Board			R922	06S65415Y19	RES,RK 331F 1/16 -CP
MAIN-P.W.Board			R931	06S65415Y19	RES,RK 331F 1/16 -CP
MAIN-P.W.Board			R932	06S65415Y19	RES,RK 331F 1/16 -CP
MAIN-P.W.Board			R951	06S15615Y13	RES,RK 33RJ 1/16 -CP
MAIN-P.W.Board			R952	06S15615Y81	RES,RK 223J 1/16 -CP
MAIN-P.W.Board			SW1001	40T55656W06	SW,TACT SKQMAJ001-E2
MAIN-P.W.Board			SW2001	40T16358W09	SW,SLIDE SSSS9295-DB
MAIN-P.W.Board			TH1001	48T25250Y01	TMT,ERTJ1VV104J -CP
MAIN-P.W.Board			TH801	48T75201Y03	TMT,NCP15XH103F0S-CP
MAIN-P.W.Board			TH802	48T75201Y03	TMT,NCP15XH103F0S-CP
MAIN-P.W.Board			VOL3001	18T55678W01	SLD,RS32111 103-BX1
MAIN-P.W.Board			VR901	18T25282Y15	VAR,EVM3VSX50 472-CP
MAIN-P.W.Board			XL1001	91-04265Z01	XTL,AT-51CD2 5.0M-E7
MAIN-P.W.Board			XL2001	91-04265Z02	XTL,AT-51CD2 4.0M-E7
MAIN-P.W.Board			XL601	91T75115Y01	XTL,FXO-64FL2 27M-E2
MAIN-P.W.Board			Z671	91T75196Y23	EMI,BK1005LL181 -CP
MAIN-P.W.Board			Z677	91T75196Y12	EMI,BK1005HS121 -CP
MAIN-P.W.Board			Z902	91T75196Y01	EMI,BK1005HM102 -CP
MAIN-P.W.Board			Z903	91T75196Y01	EMI,BK1005HM102 -CP
MAIN-P.W.Board			Z904	91T75196Y01	EMI,BK1005HM102 -CP
MAIN-P.W.Board			Z905	91T75196Y01	EMI,BK1005HM102 -CP
MAIN-P.W.Board			Z951	91T75196Y19	EMI,BK1005LL220 -CP
MAIN-P.W.Board			ZD2001	48-06525Z11	DIO,ZEN UDZS 5.6B-CP
MAIN-P.W.Board			ZD2002	48-05851Z02	DIO,ZEN TDZ7.5-TR-CP
MAIN-P.W.Board			ZD2003	48-05851Z02	DIO,ZEN TDZ7.5-TR-CP
MAIN-P.W.Board			ZD2004	48T75381Y01	DIO,ZEN NNCD5.6F -CP
MAIN-P.W.Board			ZD2005	48T75381Y01	DIO,ZEN NNCD5.6F -CP
POWER-P.W.Board			C3026	08S45232Y15	CAP,CER 473K-B1A -CP
POWER-P.W.Board			C3030	08S65667Y05	CAP,CER 105KX5R1A-CP
POWER-P.W.Board			C3510	08S65128F69	CAP,CER.103K-B1H -CP
POWER-P.W.Board			C3511	08S65128F69	CAP,CER.103K-B1H -CP
POWER-P.W.Board			C3513	08S45539Y02	CAP,CER 222KX7R2J-CP
POWER-P.W.Board			C3515	08S45676W85	CAP,CER 104K-B1C -CP

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
POWER-P.W.Board			C3516	08S45676W85	CAP,CER 104K-B1C -CP
POWER-P.W.Board			C3517	08S45676W85	CAP,CER 104K-B1C -CP
POWER-P.W.Board			C3518	08S45676W85	CAP,CER 104K-B1C -CP
POWER-P.W.Board			C3519	08S45676W85	CAP,CER 104K-B1C -CP
POWER-P.W.Board			C3520	08S45676W85	CAP,CER 104K-B1C -CP
POWER-P.W.Board			C3521	08S45676W85	CAP,CER 104K-B1C -CP
POWER-P.W.Board			C3522	08S65128F88	CAP,CER 104K-B1H -CP
POWER-P.W.Board			C3523	08S65128F88	CAP,CER 104K-B1H -CP
POWER-P.W.Board			C3524	08S65128F90	CAP,CER 473K-B1H -CP
POWER-P.W.Board			C3525	08S65667Y05	CAP,CER 105KX5R1A-CP
POWER-P.W.Board			C3526	08S45676W94	CAP,CER 563K-B1C -CP
POWER-P.W.Board			C3527	08S45676W94	CAP,CER 563K-B1C -CP
POWER-P.W.Board			C3528	08S45676W73	CAP,CER.103K-B1H -CP
POWER-P.W.Board			C3529	08S45676W73	CAP,CER.103K-B1H -CP
POWER-P.W.Board			C3530	08S35374W11	CAP,CER 475K-B0J -CP
POWER-P.W.Board			C3531	08S45676W65	CAP,CER.222K-B1H -CP
POWER-P.W.Board			C3532	08S45676W65	CAP,CER.222K-B1H -CP
POWER-P.W.Board			C3533	08S45539Y02	CAP,CER 222KX7R2J-CP
POWER-P.W.Board			C3534	08S35374W10	CAP,CER 225K-B1A -CP
POWER-P.W.Board			C3601	08S75335Y01	CAP,CER 101K-CH2J-CP
POWER-P.W.Board			C3602	08S75335Y01	CAP,CER 101K-CH2J-CP
POWER-P.W.Board			C3612	08S45676W85	CAP,CER 104K-B1C -CP
POWER-P.W.Board			C3701	08S65128F78	CAP,CER.223K-B1H -CP
POWER-P.W.Board			C3702	08S35374W07	CAP,CER 334K-B1C -CP
POWER-P.W.Board			C5314	08S45539Y02	CAP,CER 222KX7R2J-CP
POWER-P.W.Board			CB3501	09-06992Z03	FFC,IMSA9686S-50Y-EZ
POWER-P.W.Board			CB3504	09T13515W04	WTB,5569-04A1 -DB
POWER-P.W.Board			CB3601	09-06992Z01	FFC,IMSA9686S-30Y-ED
POWER-P.W.Board			CB3603	09T03498K05	WTB,53253-0510 -DB
POWER-P.W.Board			D3501	48T75527Y01	DIO,1SR154-400 -E1
POWER-P.W.Board			D3510	48T75527Y01	DIO,1SR154-400 -E1
POWER-P.W.Board			DIN3601	09-02960Z01	DIN,DSW-06 -DB
POWER-P.W.Board			E3501	23S75244Y02	CAP,ELY 47R-0J -E2
POWER-P.W.Board			E3502	23S75244Y20	CAP,ELY 221-1C -E6
POWER-P.W.Board			E3503	23T75346W03	CAP,X-PRO 332-1C +
POWER-P.W.Board			E3504	23S75244Y22	CAP,ELY 471-1C -EA
POWER-P.W.Board			E3505	23S75244Y26	CAP,ELY 33R-1E -E3
POWER-P.W.Board			E3506	23T65114Y15	CAP,FK 681-1A-F -EA
POWER-P.W.Board			E3507	23T65114Y15	CAP,FK 681-1A-F -EA
POWER-P.W.Board			E3508	23-02519Z16	CAP,FC 47R-1C-D -E6
POWER-P.W.Board			E3701	23S65134W81	CAP,ELY 22R-1C(4)-E2
POWER-P.W.Board			F3501	65T75477Y01	FUSE,CCP2E 0.4A -CP
POWER-P.W.Board			IC3001	51-04315Z23	BU4227G-TR -CP
POWER-P.W.Board			IC3501	51-04412Z01	L5960PD -SEU
POWER-P.W.Board			IC3701	51T25711Y02	BA05SFP-E2 -NE5
POWER-P.W.Board			JK3602	09T75358W02	JAC,HSJ1102-01-520DB
POWER-P.W.Board			L3501	24-05496Z03	IND,SLF12575-H68RMEA

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
POWER-P.W.Board			L3502	24-05496Z04	IND,SLF12575-H101MEA
POWER-P.W.Board			Q3501	48T75180Y01	TR,IMH1A-T110 -CP
POWER-P.W.Board			R3017	06S65415Y39	RES,RK 153F 1/16 -CP
POWER-P.W.Board			R3020	06S65415Y25	RES,RK 102F 1/16 -CP
POWER-P.W.Board			R3512	06S15594Y06	RES,RK 224F 1/10 -CP
POWER-P.W.Board			R3516	06S15593Y01	RES,RK 10RF 1/10 -CP
POWER-P.W.Board			R3517	06S15593Y01	RES,RK 10RF 1/10 -CP
POWER-P.W.Board			R3518	06S15593Y81	RES,RK 223F 1/10 -CP
POWER-P.W.Board			R3519	06S15593Y58	RES,RK 242F 1/10 -CP
POWER-P.W.Board			R3520	06S15593Y50	RES,RK 112F 1/10 -CP
POWER-P.W.Board			R3521	06S15593Y33	RES,RK 221F 1/10 -CP
POWER-P.W.Board			R3522	06S15593Y72	RES,RK 912F 1/10 -CP
POWER-P.W.Board			R3523	06S15593Y87	RES,RK 393F 1/10 -CP
POWER-P.W.Board			R3524	06S45348Y31	RES,RK 224F 1/4 -CP
POWER-P.W.Board			R3525	06S15593Y65	RES,RK 472F 1/10 -CP
POWER-P.W.Board			R3526	06S15593Y65	RES,RK 472F 1/10 -CP
POWER-P.W.Board			R3527	06S15593Y95	RES,RK 823F 1/10 -CP
POWER-P.W.Board			R3528	06S15593Y25	RES,RK 101F 1/10 -CP
POWER-P.W.Board			R3529	06S15593Y25	RES,RK 101F 1/10 -CP
POWER-P.W.Board			R3530	06S55362Y18	RES,RK 154J 1/4 -CP
POWER-P.W.Board			R3531	06S15593Y86	RES,RK 363F 1/10 -CP
POWER-P.W.Board			R3532	06S15593Y71	RES,RK 822F 1/10 -CP
POWER-P.W.Board			R3598	06S55361Y51	RES,RK 271J 1/4 -CP
POWER-P.W.Board			R3599	06S55361Y51	RES,RK 271J 1/4 -CP
POWER-P.W.Board			R3609	06S55361Y38	RES,RK 75RJ 1/4 -CP
POWER-P.W.Board			R3610	06S55361Y38	RES,RK 75RJ 1/4 -CP
POWER-P.W.Board			R3611	06S55361Y38	RES,RK 75RJ 1/4 -CP
POWER-P.W.Board			R3612	06S55361Y17	RES,RK 10RJ 1/4 -CP
POWER-P.W.Board			R3613	06S55361Y17	RES,RK 10RJ 1/4 -CP
POWER-P.W.Board			R3614	06S55361Y47	RES,RK 181J 1/4 -CP
POWER-P.W.Board			R3615	06S55361Y47	RES,RK 181J 1/4 -CP
POWER-P.W.Board			R3616	06S55361Y81	RES,RK 472J 1/4 -CP
POWER-P.W.Board			R3901	06S15616Y23	RES,RK JUMPER1/16-CP
POWER-P.W.Board			R3903	06S15616Y23	RES,RK JUMPER1/16-CP
POWER-P.W.Board			SD3501	48-06874Z01	DIO,SHT MA24D51-TXE1
POWER-P.W.Board			SD3502	48-06874Z01	DIO,SHT MA24D51-TXE1
POWER-P.W.Board			SW3003	40T16096W03	SW ,TACT SKHHLW
POWER-P.W.Board			T3501	25T45638Y01	CHOKE,ALD-16-3 +
POWER-P.W.Board			Z3601	91T75198W05	EMI,NFE61PT472C1H-E1
POWER-P.W.Board			Z3602	91T45556Y03	EMI,NFM21HC101U1H-CP
POWER-P.W.Board			ZD3501	48-02592Z01	DIO,ZEN Z5W27VJ -EA
POWER-P.W.Board			ZD3601	48T62934F19	DIO,ZEN.RD5.1MB2 -CP
OPT-P.W.Board			C2501	08S45676W85	CAP,CER 104K-B1C -CP
OPT-P.W.Board			C2599	08S45232Y05	CAP,CER 102K-B1H -CP
OPT-P.W.Board			CB2501	09T55174Y11	FFC,IMSA9616S-11Y-ED
OPT-P.W.Board			E2501	23S65134W11	CAP,ELY 22R-0J(4)-E2
OPT-P.W.Board			ET2501	01T55619W17	AI-NET CABLE

P.W.Board	MIS	MODEL	Ref.	Parts No.	Parts Name
OPT-P.W.Board			IC2501	51T75111W01	TOTX193 -DS
OPT-P.W.Board			R2501	06S45674W79	RES,RK 822J 1/10 -CP
Miscellaneous			ET3603	01T04219K04	RCA CABLE
DT63V110			CH3	01T35436Y01	ASSY,WIRE MOTOR 4PV
DT63V110			HD101	EP-05381Z01	ED21A55L-E
DT63V110			M101	59T65085W01	MOTOR,LOAD FF-050SK
DT63V110			M102	59T65085W01	MOTOR,LOAD FF-050SK
DT63V110			M104	59-09841Z02	MOTOR,25C030D010
DT63V110			M105	59T65142Y01	MOTOR,MSDV020L01
DT63V110			S101	40T35543W02	SW ,DET.SPVC21 -E07
DT63V110			S102	40T35543W02	SW ,DET.SPVC21 -E07
DT63V110			SW104	40T15222W01	SW ,DETECTOR
DT63V110			SW406	40T15494Y12	SW,DETCT SPVG2303-E6
DT63V110			VOL3001	18T55678W01	SLD,RS32111 103-BX1

Exploded View (Cabinet)

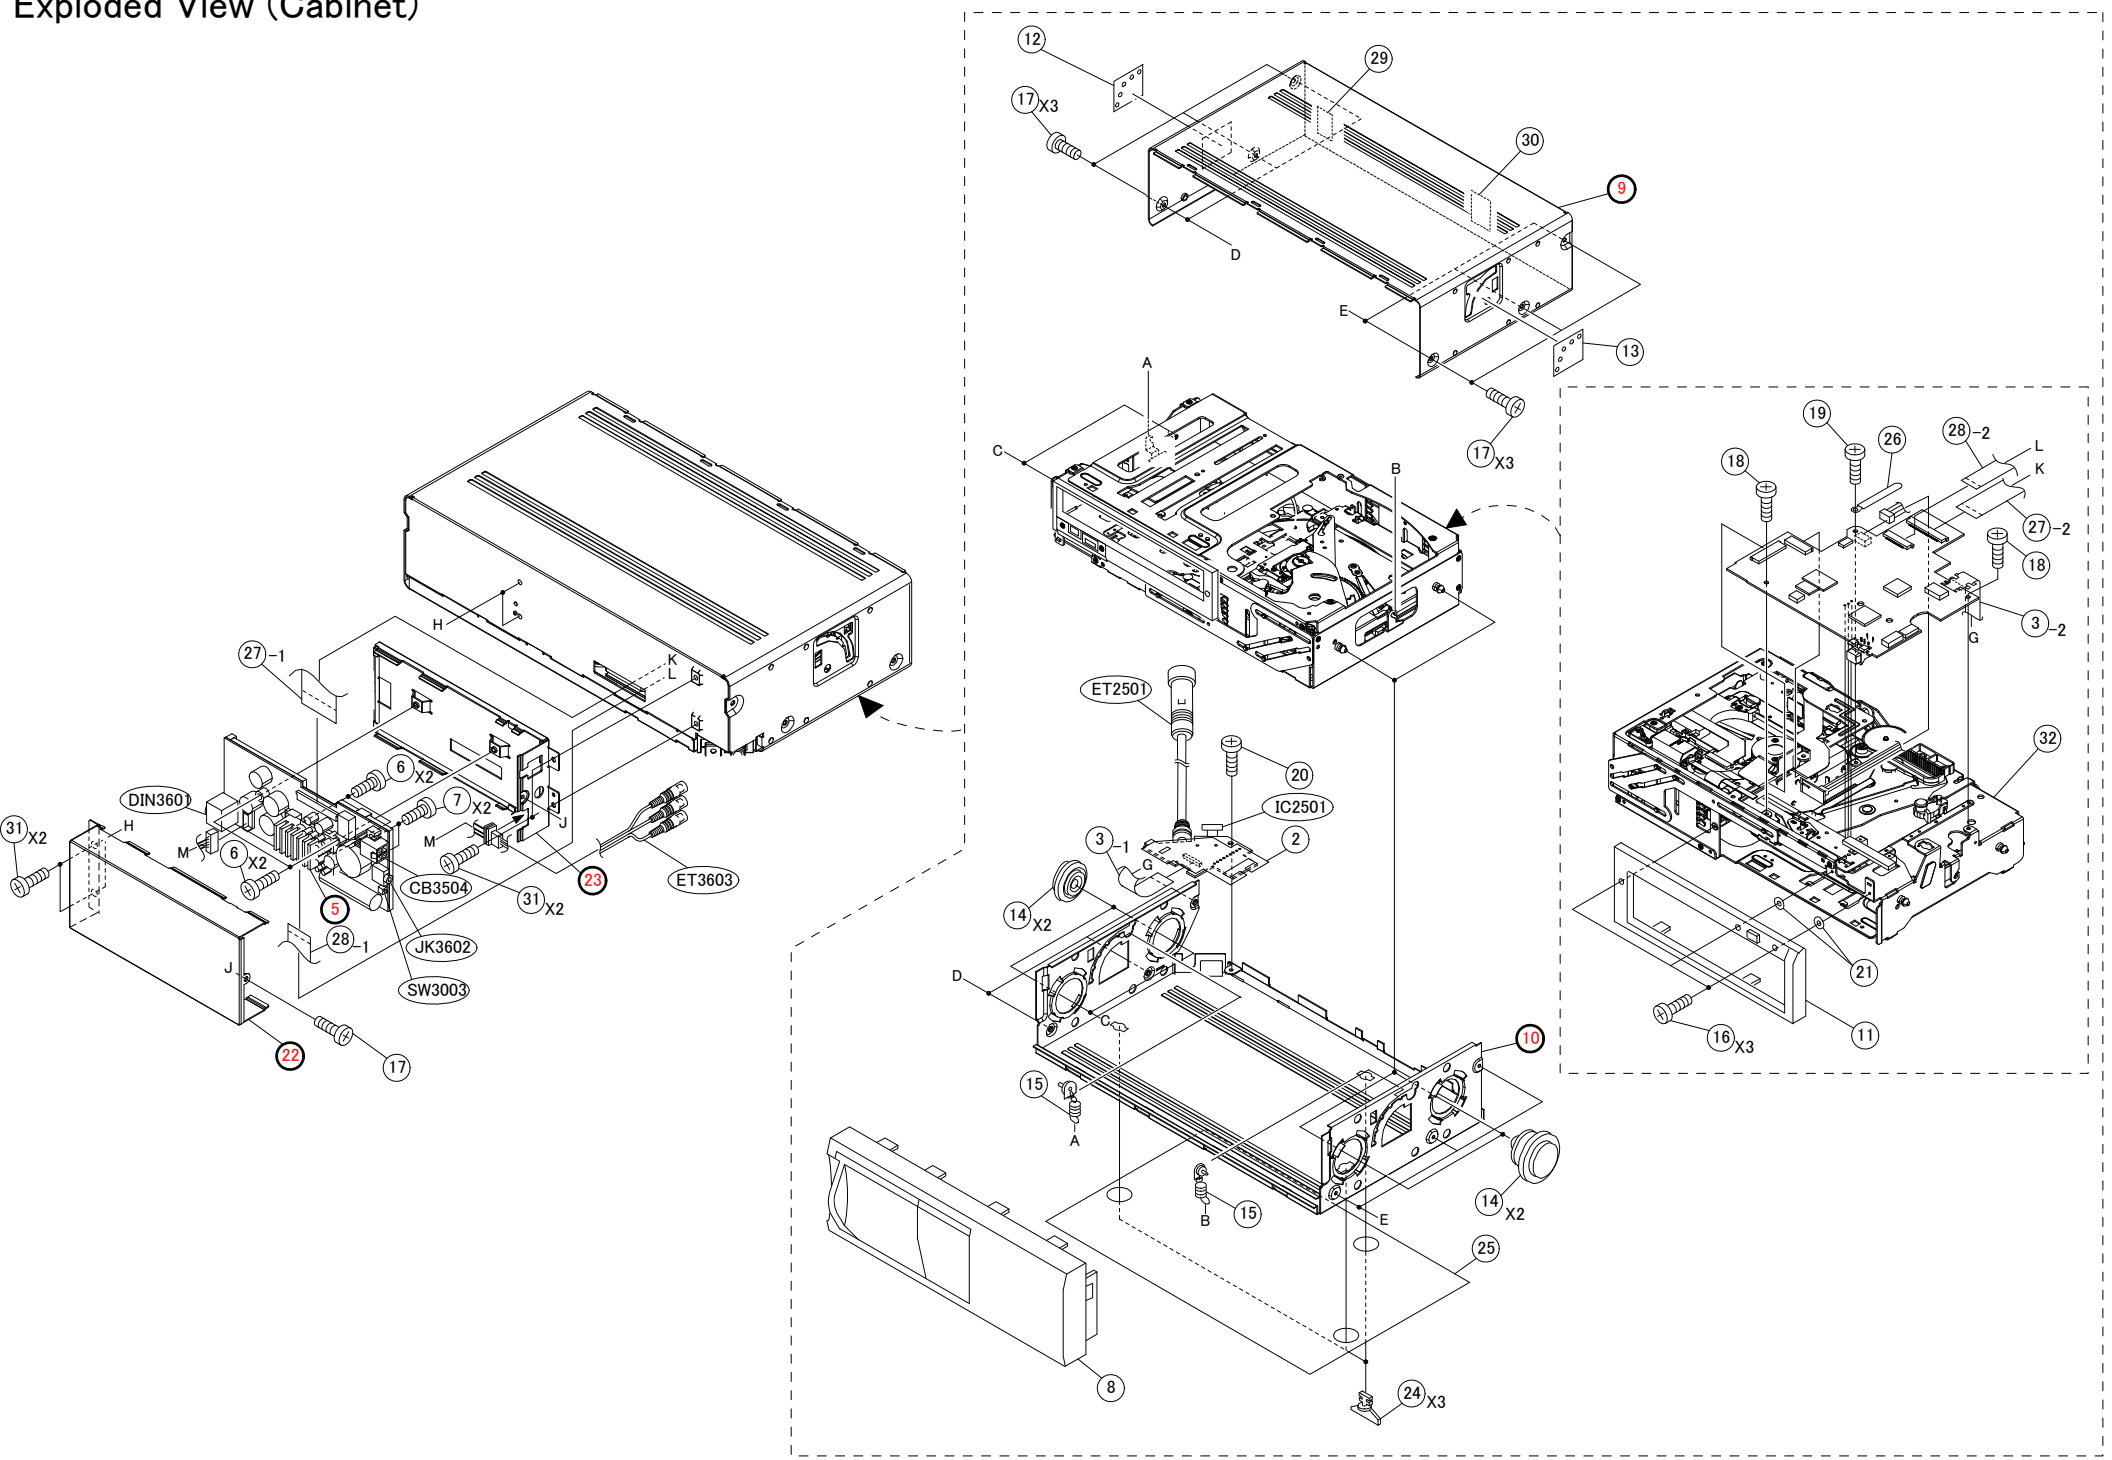

MODEL	Symbol No.	Parts No.	Description
	2	14A20715Y01	INSULATOR,PANEL
	3	84T55292Y01	FPC,11P DT-L
	5	- - - - - - - - -	HEAT,SINK IC
	6	03S60822Y28	SCR,S-T 2.6X5 ZN A
	7	03-02877Z02	SCR,D-T 3X8 ZB A
	8	13C02202K05	FRONT,ESC ASSY
	9	- - - - - - - - -	COVER,TOP
	10	- - - - - - - - -	CHAS,BASE
	11	64B01123K03	PLATE,INNER ASSY
	12	15B01132K03	COVER,SPRING(L)
	13	15B01132K04	COVER,SPRING(R)
	14	75C10781Y03	DAMPER,DT(D)
	15	07A01108K01	BKT,SPRING ASSY
	16	03-00712Z02	SCR,MCH 2X4 ZBNA
	17	03A61184W04	SCR,M2.6X5 BLK3POINT A
	18	03A38056W01	SCR,T-TIME M2.6X6 DR
	19	03B01233K02	SCR,T-TITE M2.6X6 A
	20	03S38013W36	SCR,T-TITE M2.6X4
	21	14A11387Y01	INS,COVER PLATE
	22	- - - - - - - - -	CASE,TOP
	23	- - - - - - - - -	CASE,BOTTOM
	24	55A01141K01	KEY,LOCK
	25	54B02182K01	CARD,CAUTION(KEY)
	26	29C41045P02	LUG WRAP AROUND
	27	30-11392Z01	SML2CD-50X82-ADX6
	28	30-11392Z02	SML2CD-30X82-BDX6
	29	75-06068Z65	CUS,RUB 20X15XT3
	30	75-06068Z66	CUS,RUB 30X15XT2
	31	03-02876Z29	SCR,WEV 2.6X3 ZB A
	32	DT-10904Z01	DT63V110
	CB3504	09T13515W04	WTB,5569-04A1 -DB
	DIN3601	09-02960Z01	DIN,DSW-06 -DB
	ET2501	01T55619W17	AI-NET CABLE
	ET3603	01T04219K04	RCA CABLE
	IC2501	51T75111W01	TOTX193 -DS
	JK3602	09T75358W02	JAC,HSJ1102-01-520DB
	SW3003	40T16096W03	SW ,TACT SKHHLW

Exploded View (DVD Changer Mechanism)

(DT63V110)

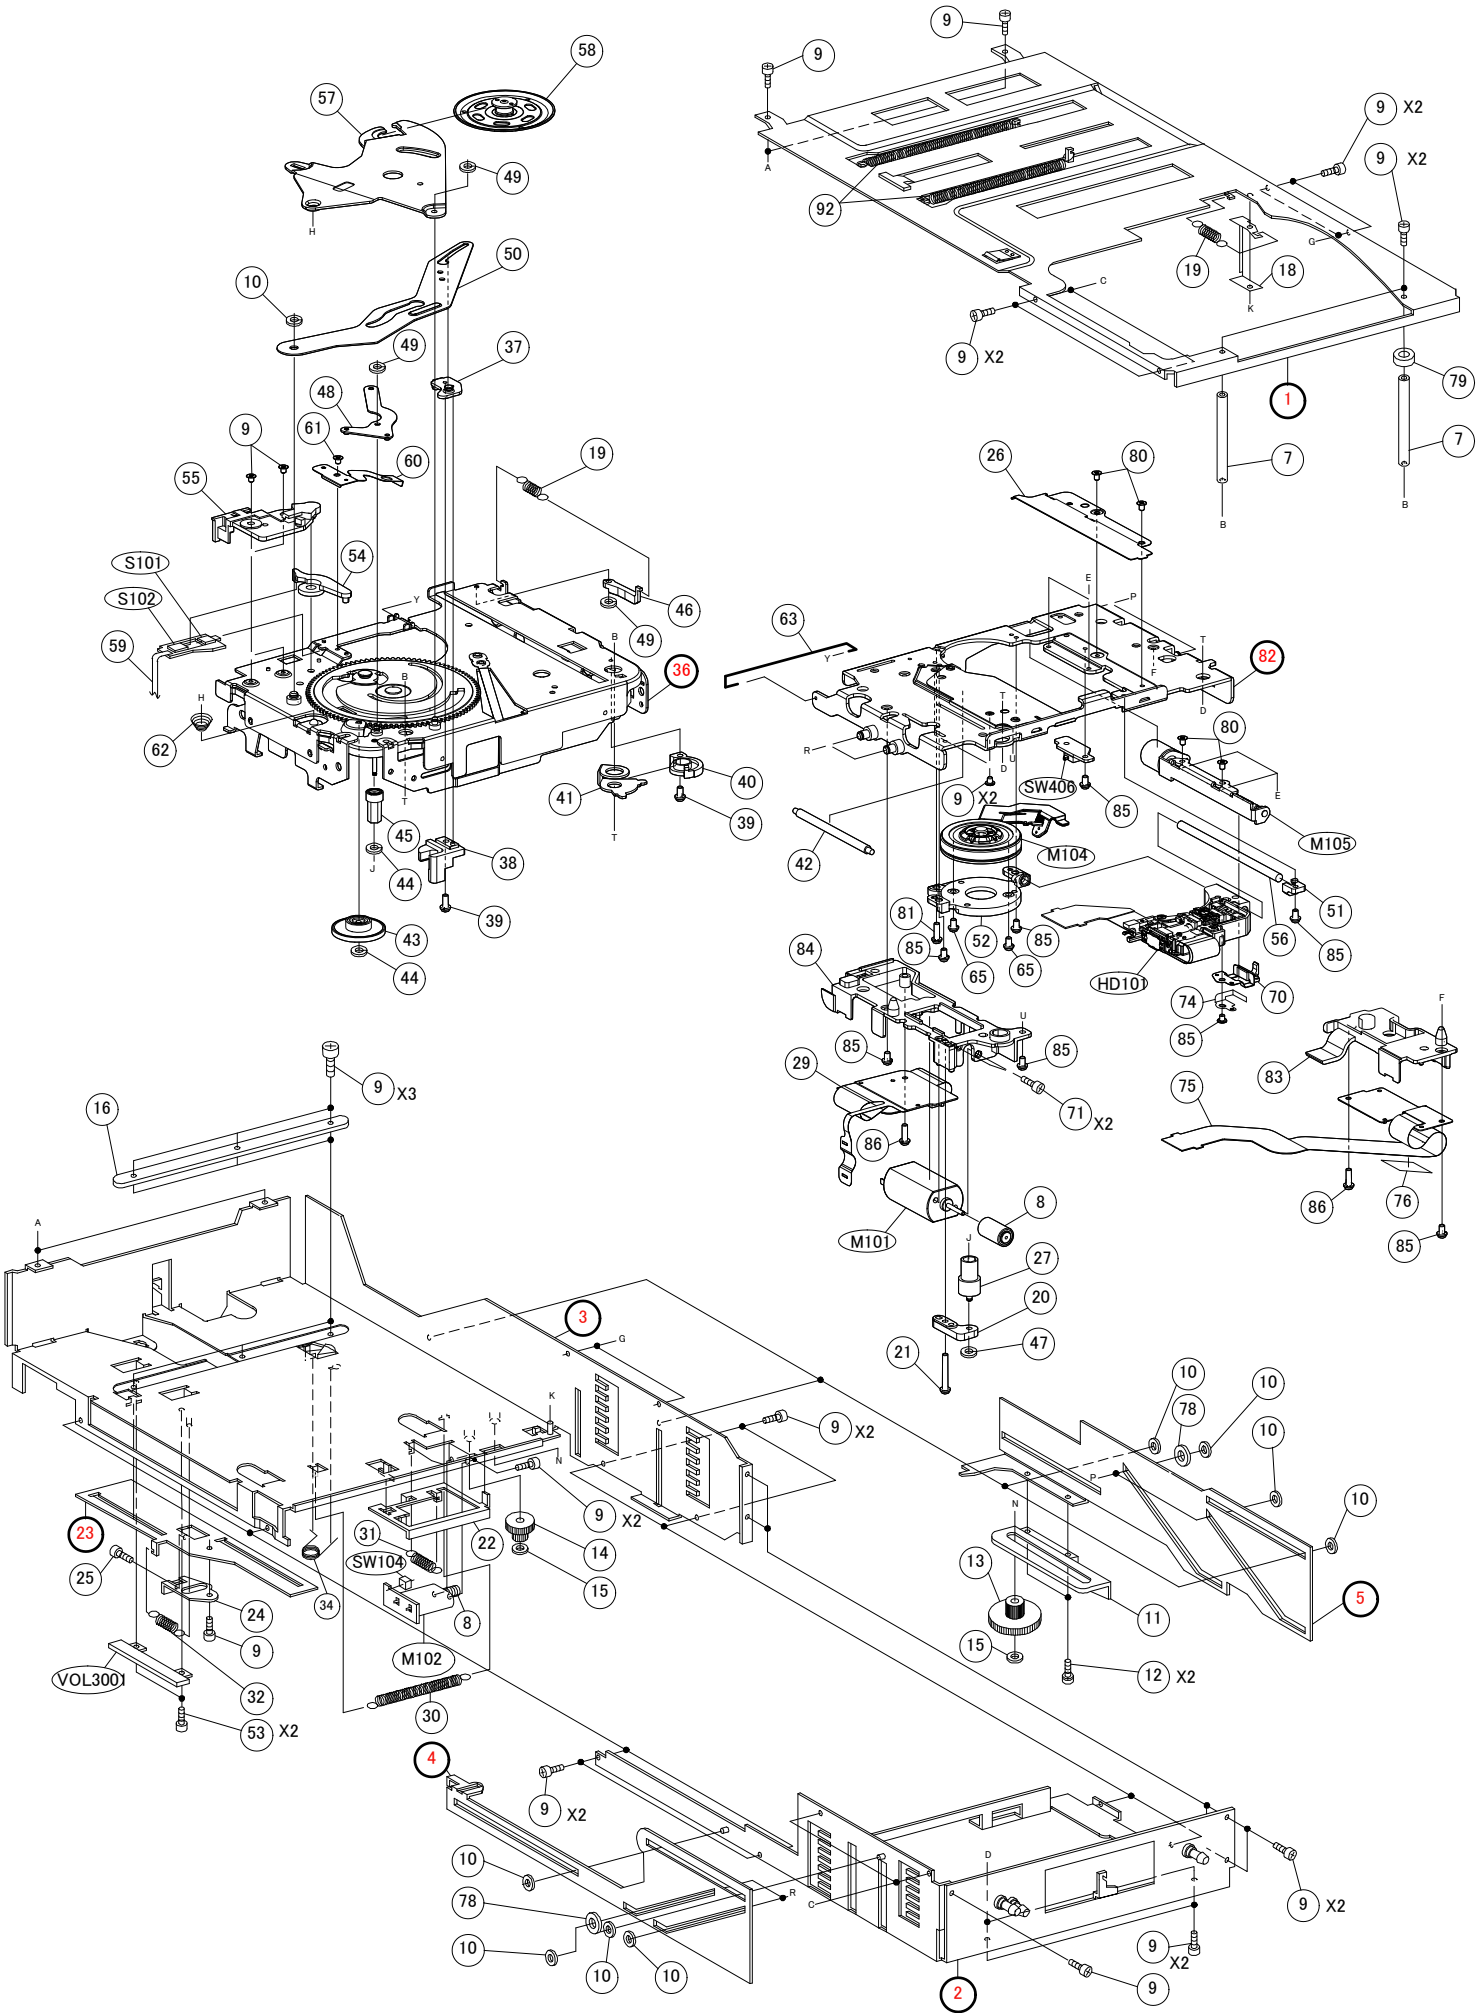

MODEL	Symbol No.	Parts No.	Description
	1	- - - - - - - - -	ASSY,RIV CHAS TOP
	2	- - - - - - - - -	ASSY,RIV CHAS FRAME
	3	- - - - - - - - -	ASSY,RIV CHAS MAG
	4	- - - - - - - - -	SLIDER,CAM BS
	5	- - - - - - - - -	SLIDER,CAM AS
	7	47A51917W02	SHAFT,GUIDE
	8	44A10811Y02	WORM,STD
	9	03S94385F19	SCR,NYLOK M2X2.5
	10	04B41345P22	WASH,2.6X6X0.35
	11	44B51886W10	RACK,ELEVEATOR
	12	03S60821Y02	SCR,WAS 2X4 ZN A
	13	44A60088W02	GEAR,RACK
	14	44A60089W02	GEAR,WHEEL
	15	04B41345P24	WASH,2.1X5X0.35
	16	15A51889W02	GUIDE,MAGAZINE
	18	45A51880W02	STOPPER,TRAY
	19	41B51993W02	SPRING,EXTENSION
	20	45A60160W02	SPACER,BKT MOTOR
	21	03S60821Y07	SCR,WAS 2X14 ZN A
	22	45A51874W22	SLIDE,MAG SW
	23	- - - - - - - - -	SLIDE,SENSOR
	24	07A51882W22	BKT,SENSOR
	25	03S94385F11	SCR,NYLOK M2X5 P2
	26	15-10975Z01	COVER,MAIN DTV
	27	44A52035W01	GEAR,DRIVE
	29	84-11269Z01	FPC,OPU-DTV
	30	41B51993W03	SPRING,EXTENSION
	31	41B51993W04	SPRING,EXTENSION
	32	41B51993W05	SPRING,EXTENSION
	34	41A51996W01	SPRING,TORSION
	36	- - - - - - - - -	ASSY,RIV CHAS TRAY
	37	01A51932W02	ASSY,RIV BKT PUSH P
	38	45A51898W02	ARM,PUSH PULL
	39	03S60821Y03	SCR,WAS 2X5 ZN A
	40	15A51890W02	GUIDE,CHASSIS TRAY
	41	07A51884W22	BKT,CORNER
	42	47-01057Z01	SHAFT,PICKUP SUB
	43	44A52036W02	GEAR,CAM
	44	04B41345P15	WASH,1.2X3.5X0.35
	45	44A51896W02	GEAR,DRIVEN
	46	45A51894W02	ARM,TRAY A
	47	04B41345P02	WASH,1.7X3.5X0.25
	48	01A51937W02	ASSY,RIV LEVER SLIDE
	49	04B41345P12	WASH,L. 1.7X3.5X0.35
	50	45A52034W02	LEVER,CAM
	51	07A50823Y11	BKT,SHAFT PICKUP
	52	07-10982Z01	BKT,SPDL ADJUST DTV

MODEL	Symbol No.	Parts No.	Description
	53	03S94385F01	SCR,NYLOK M1.7X2.3
	54	45A51887W02	ARM,SW
	55	15B51891W02	GUIDE,TRAY SIDE
	56	47A51347Y01	SHAFT,PICKUP MAIN
	57	07B51879W22	BKT,CLAMPER
	58	66-11413Z42	ASSY,CLAMPER DTV
	59	84T00692K01	FPC,SW/TRAY
	60	41A51872W10	SPRING,CLAMPER
	61	03S94385F07	SCR,NYLOK M2X2
	62	41A51995W01	SPRING,COMPRESSION
	63	41A51923W01	SPRING,ROD
	65	03S60827Y09	SCR,P-L 2X3 ZN A
	70	41-10978Z01	SPRING,NUT DTV
	71	03S94385F58	SCR,NYLOK M2X3.5
	74	07-11624Z01	STOPPER,SPG NUT DTV
	75	84-11268Z01	FPC,SPM-DTV
	76	14-11687Z01	DOUBLE FACE TAPE DTV
	78	04B41345P05	WASH,3.5X8X0.25
	79	75A80830W01	RUBBER,SLEEVE
	80	03S94385F98	SCR,NYLOK M2X2.5
	81	03S60820Y86	SCR,MCH 2X4.5 ZN A
	82	- - - - - - - - -	ASSY,RIV CHAS PICK
	83	07-10981Z01	BKT,BASE (A) DTV
	84	07-10983Z01	BKT,BASE (B) DTV
	85	03S60821Y37	SCR,WAS 2X3.5 ZN A
	86	03S60821Y04	SCR,WAS 2X6.5 ZN A
	92	41B51993W01	SPRING,EXTENSION
	HD101	EP-05381Z01	ED21A55L-E
	M101	59T65085W01	MOTOR,LOAD FF-050SK
	M102	59T65085W01	MOTOR,LOAD FF-050SK
	M104	59-09841Z02	MOTOR,25C030D010
	M105	59T65142Y01	MOTOR,MSDV020L01
	S101	40T35543W02	SW ,DET.SPVC21 -E07
	S102	40T35543W02	SW ,DET.SPVC21 -E07
	SW104	40T15222W01	SW ,DETECTOR
	SW406	40T15494Y12	SW,DETCT SPVG2303-E6
	VOL3001	18T55678W01	SLD,RS32111 103-BX1