


EXPLODED VIEW • PARTS LIST


Escutcheon section

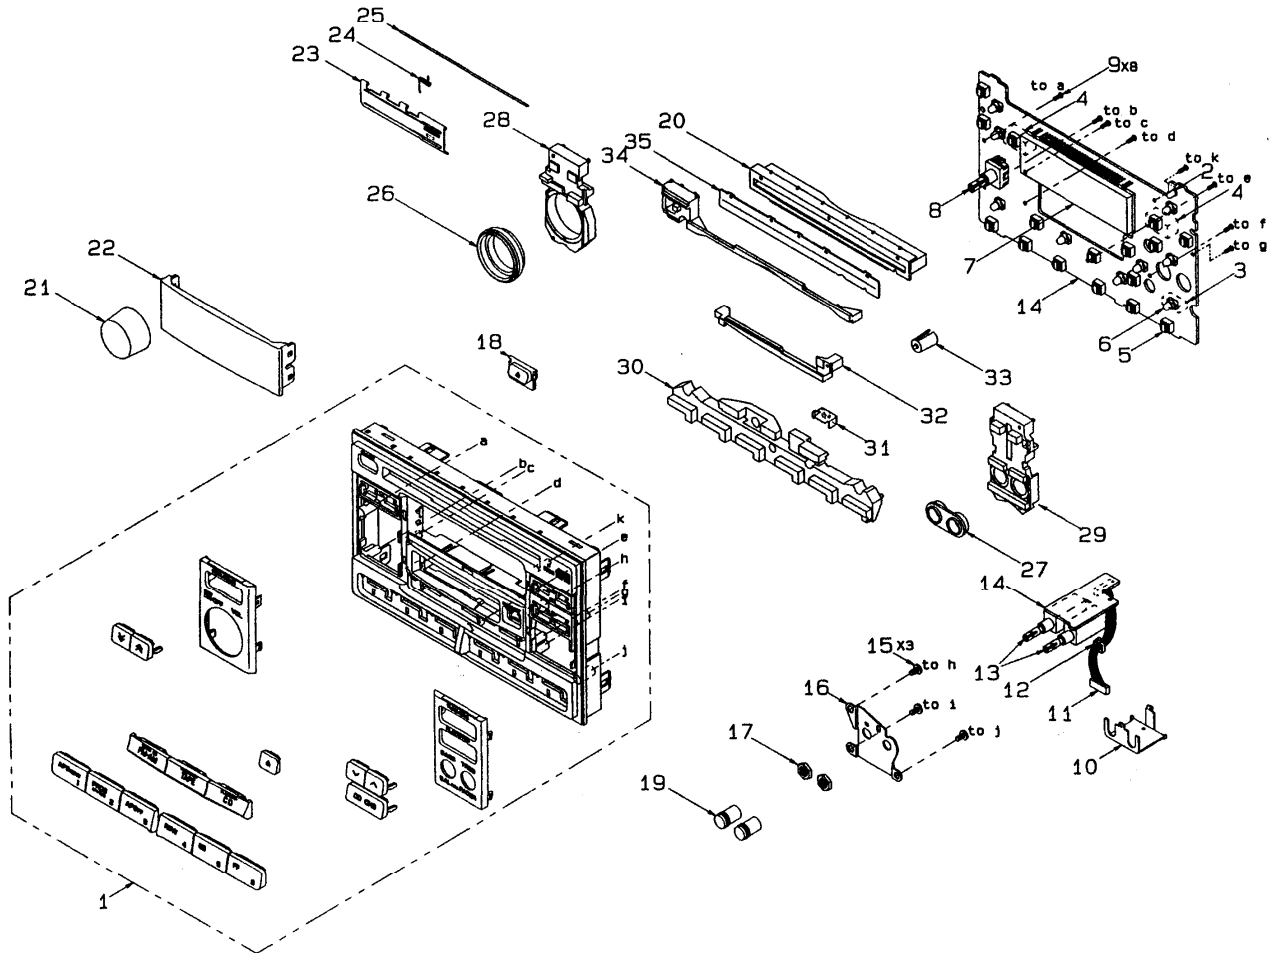

NO.	PART NO.	DESCRIPTION	Q'TY
1	940-7759-00	ESCUTCHEON ASS'Y	1
2	001-0412-18	DIODE	1
3	076-0312-06	PULG(6P)	1
4	074-1105-16	OUTLET SOCKET(16P)	2
5	013-6300-00	SWITCH	16
6	017-0433-02	PILOT LAMP(14V 40mA)	9
7	379-4005-20	INDICATOR	1
8	016-0010-01	VARIABLE RESISTOR(MAIN)	1
9	716-0872-00	PAD SCREW	8
10	331-0572-01	VR HOLDER	1
11	854-4111-00	EXTENSION LEAD	1
12	335-3700-00	MINI SADDLE	1
13	016-3200-01	VARIABLE RESISTOR(B/T)	2
14	039-0719-00	DISPLAY PWB	1
15	716-1573-00	SCREW	3
16	331-1815-00	VR HOLDER	1
17	722-0332-00	NUT	2
18	382-3994-00	BUTTON(CD EJ)	1


NO.	PART NO.	DESCRIPTION	Q'TY
19	380-5318-02	KNOB(BASS/TREB)	2
20	335-4770-00	DISC GUIDE	1
21	380-5334-00	KNOB(MAIN VOL)	1
22	373-0798-10	DIAL COVER	1
23	320-0503-19	DUSTPROOF COVER(TAPE)	1
24	750-2626-00	SPRING	1
25	341-1380-00	DOOR SHAFT	1
26	335-4965-00	ILLUMI RING(MAIN VOL)	1
27	335-4501-11	ILLUMI RING(BASS/TREB)	1
28	335-4861-00	ILLUMI B	1
29	335-4901-00	ILLUMI E	1
30	335-4860-01	ILLUMI A	1
31	331-1816-00	EARTH PLATE	1
32	335-4978-00	ILLUMI BAR(TAPE)	1
33	335-4769-00	INDICATOR LENZ	1
34	335-4977-00	ILLUMI BAR(CD)	1
35	346-0094-01	DUSTPROOF COVER(CD)	1

Main section

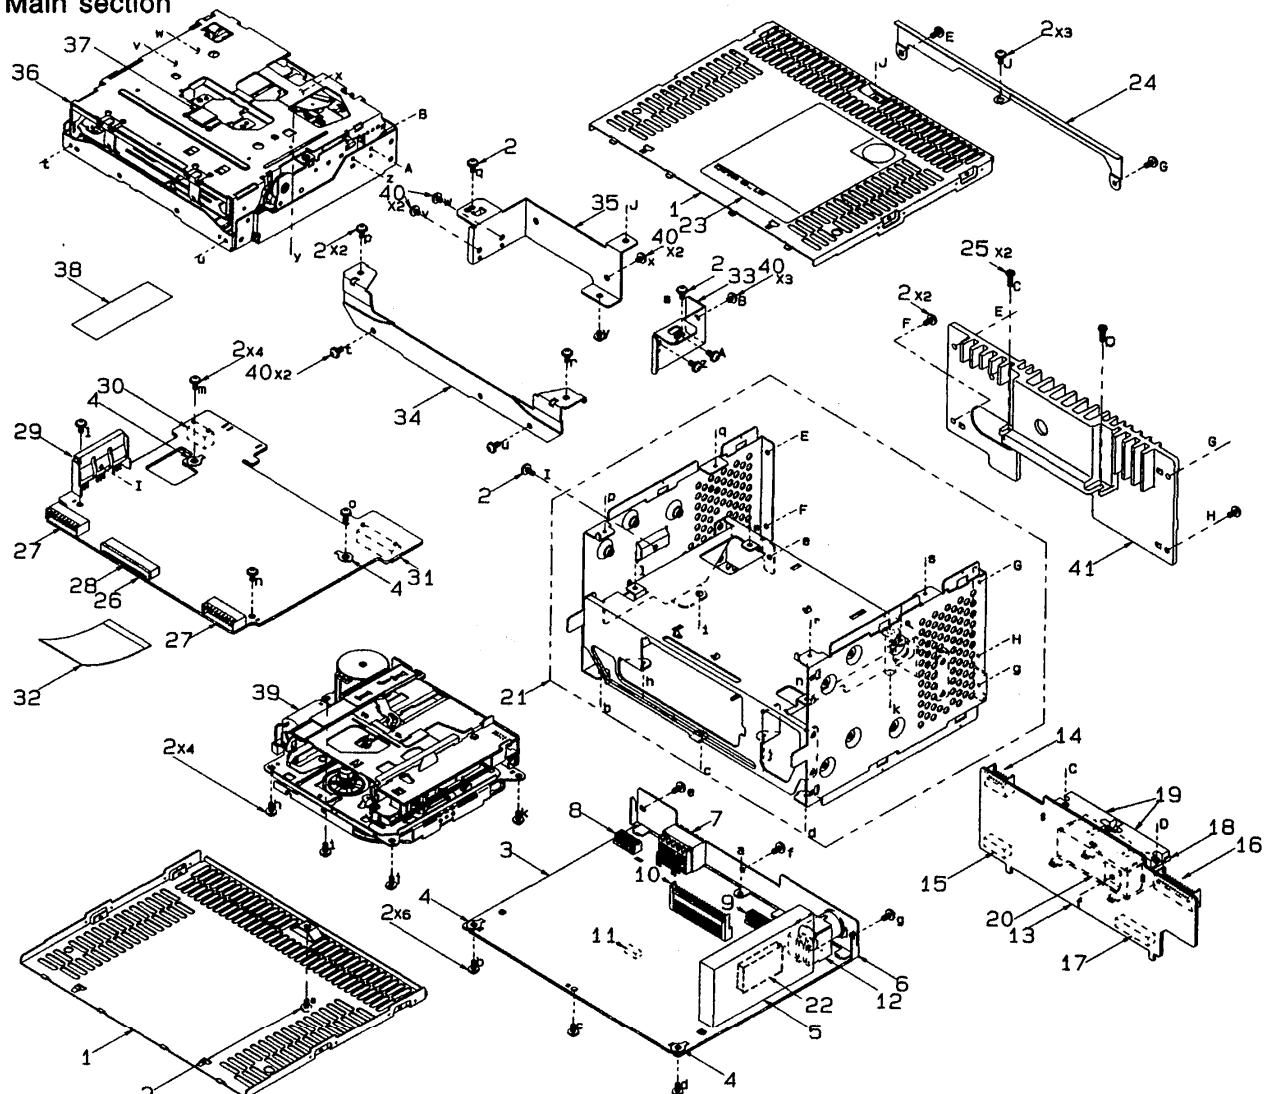


NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	310-1561-00	UPPER CASE	2	22	880-1514D	AM TUNER PACK	1
2	716-0878-00	IT-SCREW	25	23	286-8153-06	SETPLATE	1
3	039-0757-00	MAIN PWB	1	24	331-1762-00	SHIELD PLATE	1
4	073-0731-01	TERMINAL	4	25	737-2612-11	MACHINE SCREW	2
5	880-1725B	FM TUNER PACK	1	26	039-0718-01	SYSTEM CONTROL PWB	1
6	331-0563-00	ANT HOLDER	1	27	076-0515-16	PLUG(16PIN)	2
7	074-1013-00	OUTLET SOCKET(A12)	1	28	074-0986-26	OUTLET SOCKET(26PIN)	1
8	076-0368-14	PLUG(14PIN)	1	29	331-0567-00	TR HOLDER	1
9	076-0368-24	PLUG(24PIN)	1	30	074-1047-12	OUTLET SOCKET(12PIN)	1
10	076-0510-20	PLUG(20PIN)	1	31	074-1047-26	OUTLET SOCKET(26PIN)	1
11	345-3166-00	SPACER	1	32	816-2398-00	FLAT CABLE	1
12	331-1668-00	ANT SHIELD	1	33	300-9789-00	CD MOUNTING BRACKET(RH)	1
13	039-0758-00	AMP PWB	1	34	300-9791-00	CD MOUNTING BRACKET(FR)	1
14	076-0477-12	PLUG(12PIN)	1	35	300-9793-00	CD MOUNTING BRACKET(RR)	1
15	074-0898-14	OUTLET SOCKET(14PIN)	1	36	929-0065-81	CD MECHANISM	1
16	076-0477-26	PLUG(26PIN)	1	37	345-4138-00	SPACER	1
17	074-0898-24	OUTLET SOCKET(24PIN)	1	38	347-2022-00	TAPE	1
18	331-1924-00	IC HOLDER	1	39	930-0736-03	TAPE MECHANISM	1
19	051-2011-00	POWER IC	2	40	714-2303-81	MACHINE SCREW	9
20	074-1131-00	OUTLET SOCKET(S16)	1	41	313-1617-31	HEAT SINK	1
21	946-0056-01	CHASSIS ASS'Y	1				


Tape mechanism section : 930-0736-03

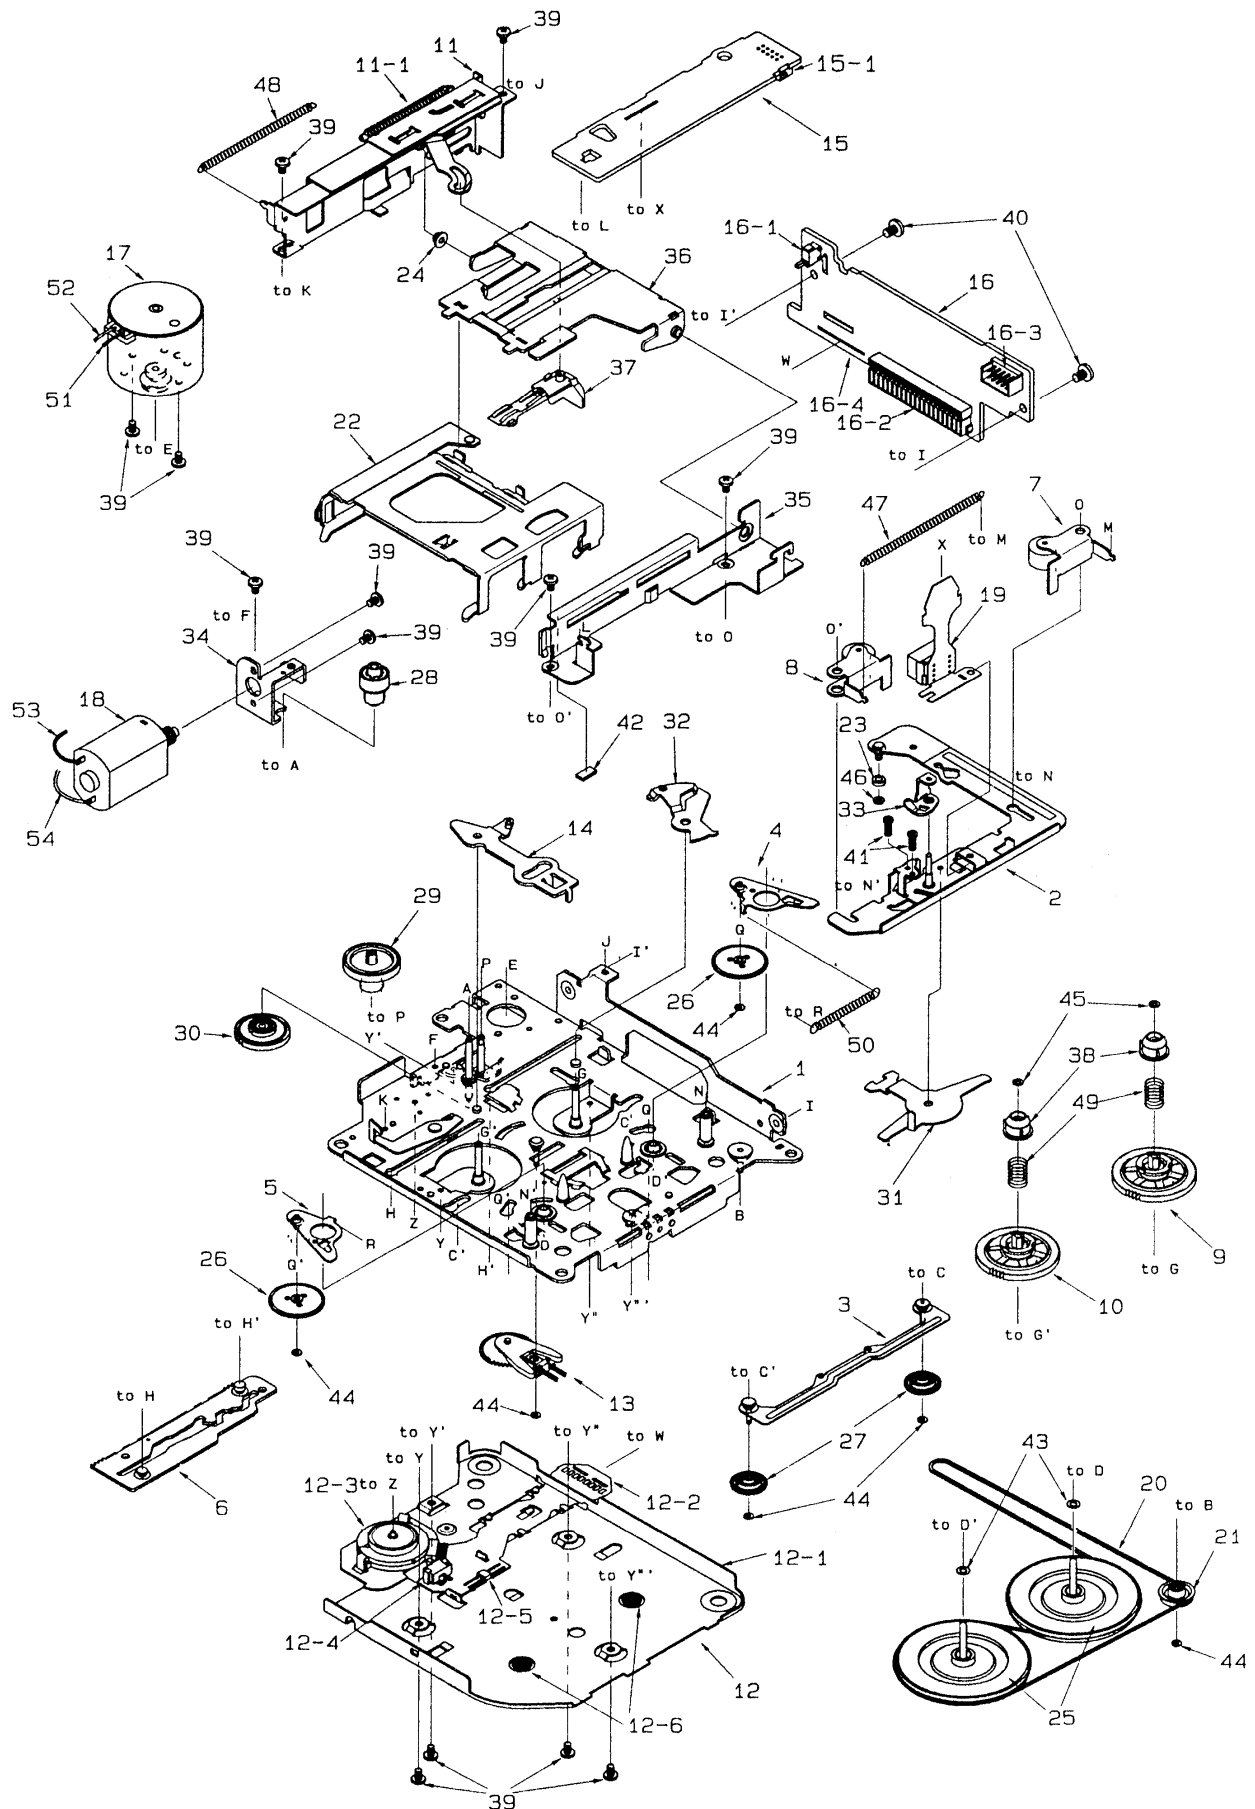

NO.	PART NO.	DESCRIPTION	QTY	NO.	PART NO.	DESCRIPTION	QTY
1	960-4294-14	DECK PLATE ASS'Y	1	22	606-0101-08	PACK GUIDE	1
2	960-4261-05	HEAD PLATE ASS'Y	1	23	610-0342-01	HEAD-P-ROLLER	1
3	960-4262-03	FF/REW-P-ASS'Y	1	24	610-0343-00	GUIDE-A-ROLLER	1
4	960-4263-03	IDLER-P-ASS'Y L	1	25	611-0091-02	FLYWHEEL	2
5	960-4264-03	IDLER-P-ASS'Y R	1	26	613-0285-02	IDLER GEAR	2
6	960-4266-05	MODE PLATE ASS'Y	1	27	613-0286-02	FF/REW GEAR	2
7	960-4269-05	ROLLER ASS'Y F	1	28	613-0288-01	HELIACAL GEAR	1
8	960-4270-05	ROLLER ASS'Y R	1	29	613-0289-01	GEAR A	1
9	960-4348-02	REEL ASS'Y F	1	30	613-0337-00	POWER GEAR	1
10	960-4349-02	REEL ASS'Y R	1	31	630-2597-01	CHANGE LINK	1
11	960-4298-09	EJECT SUB ASS'Y	1	32	630-2598-05	EJECT LINK	1
11-1	750-2948-01	SWITCH PLATE SPRING	1	33	630-2600-01	ADJUST LINK	1
12	960-4338-07	BOTTOM SUB ASS'Y	1	34	630-2601-02	MOTOR PLATE	1
12-1	960-4295-02	BOTTOM-P-ASS'Y	1	35	630-2626-03	PWB FLAME	1
12-2	099-9926-01	FLEXIBLE PWB	1	36	630-2605-02	GUIDE ARM	1
12-3	013-3951-10	SWITCH(MODE)	1	37	631-1992-02	PACK STOPPER	1
12-4	013-3953-01	SWITCH(METAL)	1	38	631-1993-01	SLIDE BUSH	2
12-5	051-1776-00	IC	1	39	716-0484-00	SCREW(M2X2.5)	13
12-6	746-0767-00	WASHER	2	40	716-1676-00	PWB SCREW(M2.6X6)	2
13	960-4282-06	DIRECT SUB ASS'Y	1	41	716-0833-10	AZIMUTH SCREW	2
14	960-4301-02	PLATE LINK ASS'Y	1	42	746-0861-00	PACK SET WASHER	1
15	099-9927-00	SIDE PWB	1	43	746-0624-00	WASHER	2
15-1	074-0898-10	OUTLET SOCKET(10P)	1	44	746-0724-00	WASHER	6
16	990-0713-00	REAR PWB ASS'Y	1	45	746-0761-00	WASHER	2
16-1	013-3906-00	SWITCH(TAPE IN)	1	46	746-0762-00	WASHER	1
16-2	074-1104-20	OUTLET SOCKET(20P)	1	47	750-2946-02	PINCH SPRING	1
16-3	076-0368-10	PLUG(10P)	1	48	750-2947-03	EJECT-P-SPRING	1
16-4	039-0489-00	REAR PWB	1	49	750-2949-00	SLIDE SPRING	2
17	SMA-130-100	MAIN MOTOR ASS'Y	1	50	750-3017-02	IDLER-P-SPRING	1
18	SMA-131-100	POWER MOTOR ASS'Y	1	51	800-4910-60	WIRE(BLK)	1
19	011-0307-34	HEAD	1	52	802-4911-60	WIRE(RED)	1
20	602-0118-00	BELT	1	53	806-4914-60	WIRE(BLU)	1
21	604-0046-00	TENSION PULLEY	1	54	809-4914-60	WIRE(WHT)	1

※ PARTS LIST on page 12.



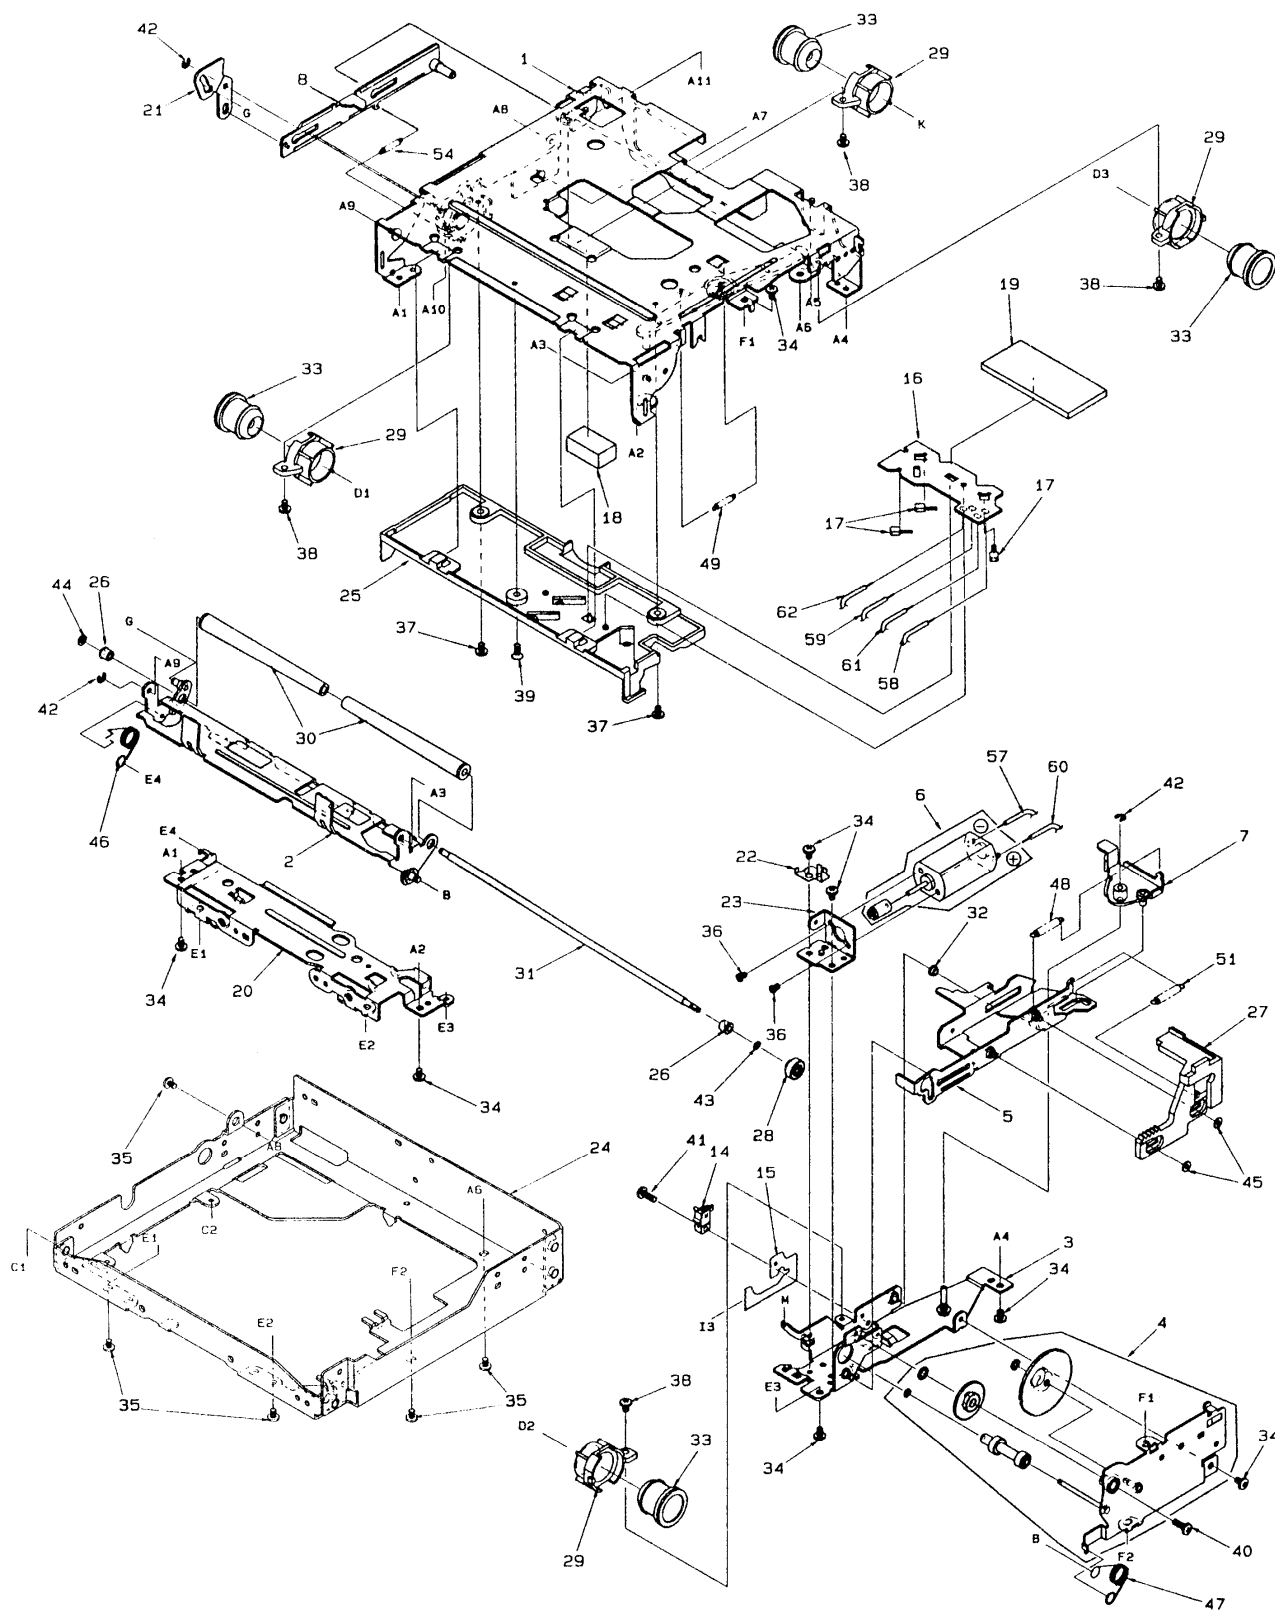

CD mechanism section : 929-0065-81

NO.	PART NO.	DESCRIPTION	Q'TY	NO.	PART NO.	DESCRIPTION	Q'TY
1	966-0308-06	CHASSIS ASS'Y	1	18	345-7513-01	CLAMPER SHEET	1
2	966-0309-04	L-DISC-G-ASS'Y	1	19	345-7514-00	S-PEB-SHEET	1
3	966-0310-06	SFT-P-CH-ASS'Y	1	20	620-0485-03	FRONT PLATE	1
4	HBS-430-100	GEAR-SUB-ASS'Y	1	21	620-0488-01	S-L-LINK PLATE	1
5	966-0312-06	SHIFT-P-ASS'Y	1	22	620-0489-01	MOTOR PLATE	1
6	SMA-147-100	MOTOR ASS'Y(LOADING)	1	23	620-0492-01	MOTOR BRACKET	1
7	966-0358-01	DRIVE-L-PL-ASS'Y	1	24	620-0697-00	MECHA BRACKET	1
8	966-0359-03	SIDE-L-PL-ASS'Y	1	25	621-0242-02	U-DISC GUIDE	1
9	HBS-431-100	PWB ASS'Y	1	26	621-0243-02	ROLLER SLEEVE	2
10	HBS-432-100	LS-GEAR ASS'Y	1	27	621-0248-06	RACK GEAR	1
11	SMA-146-100	MOTOR ASS'Y(SLED)	1	28	621-0249-02	ROLLER GEAR	1
12	SMA-151-100	MOTOR ASS'Y(SPINDLE)	1	29	621-0250-01	DAMPER HOLDER	4
13	HBS-433-100	DRIVE UNIT	1	30	621-0258-03	LOADING ROLLER	2
13-1	013-7100-00	LIMIT SWITCH	1	31	622-1072-05	ROLER SHAFT	1
13-2	620-0198-03	CLAMPER PLATE	1	32	622-1219-01	SHIFT ROLLER	1
13-3	620-0491-02	SPRING PLATE	1	33	629-0058-00	DAMPER-DL	4
13-4	620-0690-00	RATTLE PLATE	1	34	714-2003-81	MACHINE SCREW(M2X3)	8
13-5	621-0205-02	CLAMPER PLATE	1	35	714-2603-81	MACHINE SCREW(M2.6X3)	5
13-6	621-0251-02	LOCK LINK	1	36	716-1468-00	SCREW	2
13-7	621-0252-03	DISC STOPPER	1	37	716-1507-00	SCREW	2
13-8	621-0253-01	MOTOR HOLDER	1	38	716-1670-00	SCREW	6
13-9	621-0255-02	SECOND GEAR	1	39	716-1677-00	SCREW	1
13-10	621-0257-05	SCREW HOLDER	1	40	716-1704-00	SCREW	1
13-11	621-0357-01	PICKUP GUIDE	1	41	716-1742-00	SCREW	1
13-12	621-0358-02	LS-HOLDER-F	1	42	743-1500-10	E-RING	3
13-13	621-0359-02	LS-HOLDER-R	1	43	746-0712-03	WASHER	1
13-14	622-1073-02	CLAMPER ROLLER	1	44	746-0762-00	WASHER	1
13-15	714-2003-81	MACHINE SCREW (M2X3)	10	45	746-0877-02	WASHER	2
13-16	716-0675-00	SCREW	2	46	750-3090-02	RO-SPRING-L	1
13-17	716-1468-00	SCREW	2	47	750-3091-03	RO-SPRING-R	1
13-18	716-1555-00	WAVE SCREW	1	48	750-3092-03	SHIFT SPRING	1
13-19	716-1733-00	SCREW	2	49	750-3094-00	S-ARM SPRING	1
13-20	732-2004-11	SEMS SCREW	2	50	750-3096-01	DR-SPRING-R	1
13-21	739-1735-17	PRECISION SCREW	2	51	750-3098-00	L-LINK SPRING	1
13-22	750-3097-03	CLAMPER SPRING	1	52	750-3164-00	DR-SPRING-LR	1
13-23	750-3098-00	L-LINK SPRING	1	53	750-3188-00	DR-SP-F-B	1
13-24	750-3099-00	ES-SPRING	1	54	750-3189-00	SIDE-L-SPRING	1
13-25	746-0761-00	WASHER	2	55	750-3201-00	DR-SPRING-F-R	1
13-26	966-0314-01	STOP LINK ASS'Y	1	56	750-3202-00	CENTER SPRING-B	1
13-27	966-0447-02	DR-PLATE ASS'Y	1	57	800-4904-60	VINYL COAT WIRE(BLK)	1
13-28	966-0448-00	SIDE PLATE ASS'Y	1	58	800-4910-60	VINYL COAT WIRE(BLK)	1
13-29	966-0449-00	CLAMP LINK ASS'Y	1	59	801-4910-60	VINYL COAT WIRE(BRN)	1
13-30	969-0005-00	PICKUP UNIT ASS'Y	1	60	802-4904-60	VINYL COAT WIRE(RED)	1
14	013-3879-01	CHACKING SWITCH	1	61	802-4910-60	VINYL COAT WIRE(RED)	1
15	039-0586-01	FLEXIBLE PWB	1	62	804-4910-60	VINYL COAT WIRE(YEL)	1
16	039-0588-01	SENSOR PWB	1	63	816-2372-00	VINYL COAT WIRE(BLU)	1
17	060-0252-01	PHOTO TR (PT4850F)	3	64	816-2373-00	VINYL COAT WIRE(WHT)	1

ELECTRICAL PARTS LIST

Note)Several different parts of the same reference number are alternative parts.
One of those parts is used in the set.

Main PWB section

REF No.	PART No.	DESCRIPTION
BL 101	880-1514D	AM TUNER
BL 102	880-1725B	FM TUNER
C 101	178-1022-78	1000pF
C 102	178-1022-78	1000pF
C 103	176-1007-00	10pF CH
C 104	178-1022-78	1000pF
C 105	178-3922-78	3900pF
C 106	178-2232-78	0.022 μ F
C 107	043-0277-01	0.022 μ F
C 108	182-4753-53	35V4.7 μ F
C 109	178-3922-78	3900pF
C 110	182-1063-33	16V10 μ F
C 111	178-1042-78	0.1 μ F
C 112	043-0277-01	0.022 μ F
C 113	178-2232-78	0.022 μ F
C 114	182-4763-22	10V47 μ F
C 115	178-1042-78	0.1 μ F
C 116	178-6832-78	0.068 μ F
C 118	178-2232-78	0.022 μ F
C 119	178-2732-78	0.027 μ F
C 120	178-2732-78	0.027 μ F
C 121	042-0548-05	35V10 μ F
C 122	042-0548-05	35V10 μ F
C 123	042-0548-05	35V10 μ F
C 124	042-0548-05	35V10 μ F
C 125	043-0277-01	0.022 μ F
C 126	182-3363-23	10V33 μ F
C 129	042-0505-06	16V1 μ F
C 130	182-1073-32	16V100 μ F
C 131	178-1022-78	1000pF
C 132	176-4701-00	47pF CH
C 133	176-4701-00	47pF CH
C 134	178-1042-78	0.1 μ F
C 135	176-4701-00	47pF CH
C 136	182-4753-53	35V4.7 μ F
C 137	176-4701-00	47pF CH
C 138	176-1011-00	100pF CH
C 139	176-1011-00	100pF CH
C 140	176-1011-00	100pF CH
C 141	042-0505-03	16V2.2 μ F
C 142	178-1042-78	0.1 μ F
C 145	042-0548-05	35V10 μ F
C 146	178-4732-78	0.047 μ F
C 147	042-0548-00	10V47 μ F
C 148	176-1501-00	15pF CH
C 152	182-1043-63	50V0.1 μ F
C 153	182-1043-63	50V0.1 μ F
C 154	176-1501-00	15pF CH
C 156	182-1073-22	10V100 μ F
C 160	178-1232-78	0.012 μ F
C 161	178-1232-78	0.012 μ F
C 162	178-1232-78	0.012 μ F
C 163	178-1232-78	0.012 μ F
C 164	042-0548-05	35V10 μ F
C 165	042-0548-05	35V10 μ F
C 166	178-1042-78	0.1 μ F
C 180	178-4732-78	0.047 μ F
C 181	176-2201-00	22pF CH
C 182	176-2201-00	22pF CH
C 183	042-0549-05	35V10 μ F
C 184	042-0549-05	35V10 μ F
C 185	042-0549-07	50V2.2 μ F
C 186	042-0549-07	50V2.2 μ F
C 187	042-0548-06	50V1 μ F
C 188	042-0548-06	50V1 μ F
C 189	042-0549-06	50V1 μ F
C 190	042-0549-06	50V1 μ F
C 191	178-6832-78	0.068 μ F
C 192	178-6832-78	0.068 μ F
C 193	178-6822-78	6800pF
C 194	178-6822-78	6800pF
C 195	178-6822-78	6800pF
C 196	178-6822-78	6800pF
C 197	042-0549-05	35V10 μ F
C 198	042-0549-05	35V10 μ F
C 203	178-5632-78	0.056 μ F

REF No.	PART No.	DESCRIPTION
C 204	178-2242-78	0.22 μ F
C 210	178-1242-78	0.12 μ F
C 211	178-1242-78	0.12 μ F
C 216	176-2201-00	22pF CH
C 217	178-1032-78	0.01 μ F
C 223	178-5632-78	0.056 μ F
C 224	178-2242-78	0.22 μ F
C 228	042-0548-00	10V47 μ F
C 229	042-0548-02	10V220 μ F
C 230	178-1242-78	0.12 μ F
C 231	178-1242-78	0.12 μ F
C 235	178-1032-78	0.01 μ F
C 236	176-2201-00	22pF CH
C 241	178-2242-78	0.22 μ F
C 242	178-8232-78	0.082 μ F
C 243	178-1832-78	0.018 μ F
C 244	178-1832-78	0.018 μ F
C 250	178-1242-78	0.12 μ F
C 251	178-1242-78	0.12 μ F
C 255	178-1032-78	0.01 μ F
C 256	176-2201-00	22pF CH
C 261	178-2242-78	0.22 μ F
C 262	178-8232-78	0.082 μ F
C 263	178-1832-78	0.018 μ F
C 264	178-1832-78	0.018 μ F
C 270	178-1242-78	0.12 μ F
C 271	178-1242-78	0.12 μ F
C 276	176-2201-00	22pF CH
C 277	178-1032-78	0.01 μ F
C 292	042-0548-05	35V10 μ F
C 293	042-0548-05	35V10 μ F
C 294	042-0548-05	35V10 μ F
C 295	042-0548-05	35V10 μ F
C 301	042-0505-03	16V2.2 μ F
C 302	178-1042-78	0.1 μ F
C 303	182-1073-32	16V100 μ F
C 304	178-1042-78	0.1 μ F
C 306	042-0548-03	16V100 μ F
C 307	042-0548-04	16V330 μ F
C 308	042-0548-01	10V100 μ F
C 309	178-1042-78	0.1 μ F
C 311	178-1222-78	1200pF
C 312	178-1042-78	0.1 μ F
CCT101	050-0122-03	1k Ω x4
CCT302	050-0137-02	10kx4 Ω
D 101	001-0589-00	1SS145
D 102	001-0589-00	1SS145
D 103	001-0421-38	MTZJ36
D 104	001-0376-45	MTZJ8.2C
D 104	001-0377-44	MA4082M
D 104	001-0400-44	HZS8.2JB2
D 105	001-0376-49	MTZJ10A
D 105	001-0377-48	MA4091H
D 105	001-0400-44	HZS9.1JB3
D 106	001-0330-00	1SS119
D 106	001-0352-00	1SS176
D 107	001-0330-00	1SS119
D 107	001-0352-00	1SS176
D 108	001-0356-00	1SS184
D 108	001-0506-00	DAN202K
D 110	001-0356-00	1SS184
D 110	001-0506-00	DAN202K
D 111	001-0356-00	1SS184
D 111	001-0506-00	DAN202K
D 301	001-0330-00	1SS119
D 301	001-0352-00	1SS176
D 302	001-0376-39	MTZJ6.8C
D 302	001-0377-38	MA4068M
D 302	001-0400-38	HZS6.8JB2
D 303	001-0376-49	MTZJ10A
D 303	001-0377-48	MA4091H
D 303	001-0400-48	HZS9.1JB3
D 304	001-0330-00	1SS119
D 304	001-0352-00	1SS176
IC 101	051-0599-51	NJM2903M
IC 102	051-1500-00	NJM2060M

REF No.	PART No.	DESCRIPTION
IC 103	051-6201-00	LC72146M
IC 180	051-5008-00	M62419FP
IC 202	051-1500-00	NJM2060M
IC 260	051-1500-00	NJM2060M
IC 261	051-1500-00	NJM2060M
IC 262	051-1500-00	NJM2060M
IC 301	052-4004-01	SC75006GB-648-3B4
IC 302	051-1014-10	TA7291S
L 101	010-2003-03	
L 102	010-2174-16	22 μ H
L 103	010-2174-16	22 μ H
L 104	010-2174-16	22 μ H
L 105	010-2174-16	22 μ H
L 107	010-2199-04	0.22 μ H
L 301	010-2174-16	22 μ H
Q 101	102-2412-00	2SC2412
Q 101	102-2712-00	2SC2712
Q 102	125-9006-00	IMX1
Q 102	125-9007-00	HN1C01F
Q 103	102-2412-00	2SC2412
Q 103	102-2712-00	2SC2712
Q 104	125-2004-02	RN1402
Q 104	125-2005-01	UN2211
Q 104	125-2020-02	DTC114EK
Q 104	125-2031-02	MUN2211
Q 105	125-9002-02	RN4602
Q 105	125-9003-02	IMD3
Q 107	125-2024-02	RN1602
Q 107	125-2025-02	IMH11
Q 108	125-2004-02	RN1402
Q 108	125-2005-01	UN2211
Q 108	125-2020-02	DTC114EK
Q 108	125-2031-02	MUN2211
Q 110	125-9002-02	RN4602
Q 110	125-9003-02	IMD3
Q 111	100-1298-00	2SA1298
Q 112	125-2024-02	RN1602
Q 112	125-2025-02	IMH11
Q 114	100-1037-00	2SA1037
Q 114	100-1162-00	2SA1162
Q 114	101-0709-00	2SB709A-Q.R.S
Q 116	102-2458-27	2SC2458BL
Q 116	102-2458-28	2SC2458GR
Q 116	102-2458-51	2SC2458Y.GR.BL
Q 117	102-2458-27	2SC2458BL
Q 117	102-2458-28	2SC2458GR
Q 117	102-2458-51	2SC2458Y.GR.BL
Q 120	100-1037-00	2SA1037
Q 120	100-1162-00	2SA1162
Q 120	101-0709-00	2SB709A-Q.R.S
Q 121	100-1037-00	2SA1037
Q 121	100-1162-00	2SA1162
Q 121	101-0709-00	2SB709A-Q.R.S
Q 122	100-1037-00	2SA1037
Q 122	100-1162-00	2SA1162
Q 122	101-0709-00	2SB709A-Q.R.S
Q 123	100-1037-00	2SA1037
Q 123	100-1162-00	2SA1162
Q 123	101-0709-00	2SB709A-Q.R.S
Q 124	125-2004-02	RN1402
Q 124	125-2005-01	UN2211
Q 124	125-2020-02	DTC114EK
Q 124	125-2031-02	MUN2211
Q 301	125-9002-02	RN4602
Q 301	125-9003-02	IMD3
Q 302	100-1213-00	2SA1213
Q 302	100-1797-00	2SA1797
Q 302	101-1123-00	2SB1123
Q 303	125-2004-06	RN1406
Q 303	125-2020-06	DTC143ZK
Q 304	100-1213-00	2SA1213
Q 304	100-1797-00	2SA1797
Q 304	101-1123-00	2SB1123
Q 305	125-2004-06	RN1406
Q 305	125-2020-06	DTC143ZK

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
Q 306	125-2004-02	RN1402	R 151	117-1021-10	1/10W 1kΩ	R 245	117-1521-10	1/10W 1.5kΩ
Q 306	125-2005-01	UN2211	R 152	117-2221-10	1/10W 2.2kΩ	R 246	117-1511-10	1/10W 150Ω
Q 306	125-2020-02	DTC114EK	R 153	117-1031-10	1/10W 10kΩ	R 247	117-1541-10	1/10W 150kΩ
Q 306	125-2031-02	MUN2211	R 155	117-5651-10	1/10W 5.6MΩ	R 250	117-4331-10	1/10W 43kΩ
Q 307	100-1213-00	2SA1213	R 159	117-1021-10	1/10W 1kΩ	R 251	117-5621-10	1/10W 5.6kΩ
Q 307	100-1797-00	2SA1797	R 163	117-1521-10	1/10W 1.5kΩ	R 252	117-1031-10	1/10W 10kΩ
Q 307	101-1123-00	2SB1123	R 165	117-2231-10	1/10W 22kΩ	R 253	117-5131-10	1/10W 51kΩ
Q 308	103-2118-00	2SD2118	R 167	117-2231-10	1/10W 22kΩ	R 255	117-1031-10	1/10W 10kΩ
Q 309	125-9002-02	RN4602	R 169	117-1521-10	1/10W 1.5kΩ	R 256	117-8211-10	1/10W 820Ω
Q 309	125-9003-02	IMD3	R 170	117-2731-10	1/10W 27kΩ	R 257	117-1031-10	1/10W 10kΩ
R 101	117-5631-10	1/10W 56kΩ	R 171	117-2731-10	1/10W 27kΩ	R 259	117-4721-10	1/10W 4.7kΩ
R 102	117-1031-10	1/10W 10kΩ	R 172	117-2231-10	1/10W 22kΩ	R 261	117-2221-10	1/10W 2.2kΩ
R 103	117-5621-10	1/10W 5.6kΩ	R 173	117-2231-10	1/10W 22kΩ	R 262	117-7511-15	750Ω
R 104	117-5621-10	1/10W 5.6kΩ	R 175	117-1041-10	1/10W 100kΩ	R 263	117-1511-10	1/10W 150Ω
R 105	117-5631-10	1/10W 56kΩ	R 176	117-1041-10	1/10W 100kΩ	R 264	117-1541-10	1/10W 150kΩ
R 106	117-5631-10	1/10W 56kΩ	R 178	117-1021-10	1/10W 1kΩ	R 265	117-1521-10	1/10W 1.5kΩ
R 107	117-1001-10	1/10W 10Ω	R 179	117-1011-10	1/10W 100Ω	R 266	117-1511-10	1/10W 150Ω
R 108	117-1031-10	1/10W 10kΩ	R 180	117-1021-10	1/10W 1kΩ	R 267	117-1541-10	1/10W 150kΩ
R 109	117-1031-10	1/10W 10kΩ	R 181	117-1011-10	1/10W 100Ω	R 270	117-4331-10	1/10W 43kΩ
R 111	117-1031-10	1/10W 10kΩ	R 190	117-3331-10	1/10W 33kΩ	R 271	117-5621-10	1/10W 5.6kΩ
R 112	117-1031-10	1/10W 10kΩ	R 191	117-3331-10	1/10W 33kΩ	R 272	117-1031-10	1/10W 10kΩ
R 113	117-2221-10	1/10W 2.2kΩ	R 192	117-3931-10	1/10W 39kΩ	R 273	117-5131-10	1/10W 51kΩ
R 114	111-1021-91	1/4WS 1kΩ	R 193	117-3931-10	1/10W 39kΩ	R 275	117-1031-10	1/10W 10kΩ
R 115	117-4731-10	1/10W 47kΩ	R 194	117-5631-10	1/10W 56kΩ	R 277	117-1031-10	1/10W 10kΩ
R 116	117-1531-10	1/10W 15kΩ	R 195	117-5631-10	1/10W 56kΩ	R 278	117-2431-10	1/10W 24kΩ
R 117	117-5631-10	1/10W 56kΩ	R 196	117-2431-10	1/10W 24kΩ	R 279	117-4721-10	1/10W 4.7kΩ
R 118	117-2221-10	1/10W 2.2kΩ	R 197	117-2431-10	1/10W 24kΩ	R 307	117-1021-10	1/10W 1kΩ
R 119	117-1031-10	1/10W 10kΩ	R 198	111-1021-91	1/4WS 1kΩ	R 309	117-1031-10	1/10W 10kΩ
R 120	117-1031-10	1/10W 10kΩ	R 201	117-2221-10	1/10W 2.2kΩ	R 310	117-1021-10	1/10W 1kΩ
R 121	117-1021-10	1/10W 1kΩ	R 205	117-1821-10	1/10W 1.8kΩ	R 311	111-1321-91	1/4WS 1.3kΩ
R 122	117-1041-10	1/10W 100kΩ	R 206	117-1511-10	1/10W 150Ω	R 312	117-4731-10	1/10W 47kΩ
R 123	117-3011-10	1/10W 300Ω	R 207	117-1541-10	1/10W 150kΩ	R 313	117-1021-10	1/10W 1kΩ
R 124	117-3011-10	1/10W 300Ω	R 210	117-5131-10	1/10W 51kΩ	R 314	111-1321-91	1/4WS 1.3kΩ
R 125	032-0106-15	1/10W 100kΩ	R 211	117-7521-10	1/10W 7.5kΩ	R 315	111-1321-91	1/4WS 1.3kΩ
R 126	032-0106-15	1/10W 100kΩ	R 212	117-1031-10	1/10W 10kΩ	R 316	117-1021-10	1/10W 1kΩ
R 127	032-0106-15	1/10W 100kΩ	R 213	117-5131-10	1/10W 51kΩ	R 317	117-1021-10	1/10W 1kΩ
R 128	032-0106-15	1/10W 100kΩ	R 215	117-1031-10	1/10W 10kΩ	R 318	117-1021-10	1/10W 1kΩ
R 129	117-3331-10	1/10W 33kΩ	R 217	117-1031-10	1/10W 10kΩ	R 319	117-1021-10	1/10W 1kΩ
R 130	117-2221-10	1/10W 2.2kΩ	R 218	117-2431-10	1/10W 24kΩ	R 320	117-1021-10	1/10W 1kΩ
R 131	117-1041-10	1/10W 100kΩ	R 219	117-4721-10	1/10W 4.7kΩ	R 321	117-1021-10	1/10W 1kΩ
R 132	117-5621-10	1/10W 5.6kΩ	R 221	117-2221-10	1/10W 2.2kΩ	R 322	117-1051-10	1/10W 1MΩ
R 133	032-0106-07	1/10W 18kΩ	R 225	117-1821-10	1/10W 1.8kΩ	R 323	117-2221-10	1/10W 2.2kΩ
R 134	032-0106-07	1/10W 18kΩ	R 226	117-1511-10	1/10W 150Ω	R 324	114-2291-11	1W 2.2Ω
R 135	117-4731-10	1/10W 47kΩ	R 227	117-1541-10	1/10W 150kΩ	R 325	111-1321-91	1/4WS 1.3kΩ
R 136	117-2231-10	1/10W 22kΩ	R 230	117-5131-10	1/10W 51kΩ	R 326	111-3911-91	1/4WS 390Ω
R 137	117-1001-10	1/10W 10Ω	R 231	117-7521-10	1/10W 7.5kΩ	R 327	117-2231-10	1/10W 22kΩ
R 139	117-2721-10	1/10W 2.7kΩ	R 232	117-1031-10	1/10W 10kΩ	R 328	111-1021-91	1/4WS 1kΩ
R 140	032-0106-07	1/10W 18kΩ	R 233	117-5131-10	1/10W 51kΩ	R 329	111-1321-91	1/4WS 1.3kΩ
R 141	117-5611-10	1/10W 560Ω	R 235	117-1031-10	1/10W 10kΩ	R 330	111-1021-91	1/4WS 1kΩ
R 142	032-0106-07	1/10W 18kΩ	R 236	117-8211-10	1/10W 820Ω	R 331	111-1321-91	1/4WS 1.3kΩ
R 143	117-4731-10	1/10W 47kΩ	R 237	117-1031-10	1/10W 10kΩ	SUP101	060-0122-20	DSP-141N-S00B
R 144	117-2221-10	1/10W 2.2kΩ	R 239	117-4721-10	1/10W 4.7kΩ	VR 101	012-4738-00	100kΩ
R 147	117-1031-10	1/10W 10kΩ	R 241	117-2221-10	1/10W 2.2kΩ	VR 102	012-4738-00	100kΩ
R 148	117-1031-10	1/10W 10kΩ	R 242	117-7511-15	750Ω	VR 103	012-4738-07	22kΩ
R 149	117-1031-10	1/10W 10kΩ	R 243	117-1511-10	1/10W 150Ω	X 101	061-1066-00	7.2MHz
R 150	117-1031-10	1/10W 10kΩ	R 244	117-1541-10	1/10W 150kΩ	X 301	060-0130-50	4.19MHz

System control PWB section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 501	183-1063-32	16V10 μF	C 518	043-0206-20	22pF CH	D 502	001-0352-00	1SS176
C 502	183-1063-32	16V10 μF	C 519	043-0206-61	0.1 μF	D 503	001-0330-00	1SS119
C 503	183-1053-62	50V1 μF	C 520	043-0206-61	0.1 μF	D 503	001-0352-00	1SS176
C 504	172-1031-11	0.01 μF	C 521	043-0207-26	39pF	D 504	001-0330-00	1SS119
C 505	172-1041-11	0.1 μF	C 522	183-1063-32	16V10 μF	D 504	001-0352-00	1SS176
C 506	183-4753-51	35V4.7 μF	C 523	184-2273-22	10V220 μF	D 506	001-0330-00	1SS119
C 507	183-4753-52	35V4.7 μF	C 524	183-1063-31	16V10 μF	D 506	001-0352-00	1SS176
C 508	174-2200-13	22pF CH	C 525	174-1007-13	10pF CH	D 507	001-0330-00	1SS119
C 509	183-1063-31	16V10 μF	C 527	174-1007-13	10pF CH	D 507	001-0352-00	1SS176
C 510	043-0206-61	0.1 μF	C 528	174-1007-13	10pF CH	D 508	001-0361-10	1SS198
C 512	173-4711-11	470pF	C 529	043-0206-60	0.01 μF	D 509	001-0361-10	1SS198
C 513	173-4711-11	470pF	C 530	183-3353-62	50V3.3 μF	D 510	001-0361-10	1SS198
C 514	043-0206-44	470pF	CCT501	050-0093-02		D 511	001-0361-10	1SS198
C 515	043-0206-44	470pF	D 501	001-0330-00	1SS119	D 512	001-0361-10	1SS198
C 516	043-0206-44	470pF	D 501	001-0352-00	1SS176	D 513	001-0361-10	1SS198
C 517	043-0206-36	100pF	D 502	001-0330-00	1SS119	D 514	001-0361-10	1SS198

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
D 515	001-0361-10	1SS198	R 505	111-4731-91	1/4WS 47kΩ	R 545	111-4731-91	1/4WS 47kΩ
D 516	001-0361-10	1SS198	R 506	111-4731-91	1/4WS 47kΩ	R 546	111-4731-91	1/4WS 47kΩ
D 522	001-0376-70	MTZJ18C	R 507	111-4721-91	1/4WS 4.7kΩ	R 547	111-1031-91	1/4WS 10kΩ
D 522	001-0377-69	MA4180M	R 508	111-4721-91	1/4WS 4.7kΩ	R 548	111-1031-91	1/4WS 10kΩ
D 522	001-0400-68	HZS18JB2	R 509	111-4721-91	1/4WS 4.7kΩ	R 549	111-4731-91	1/4WS 47kΩ
D 523	001-0503-02	HZS2CLL	R 510	111-2231-91	1/4WS 22kΩ	R 550	111-1031-91	1/4WS 10kΩ
D 524	001-0503-48	HZS9C2L	R 511	111-1041-91	1/4WS 100kΩ	R 551	111-1041-91	1/4WS 100kΩ
D 525	001-0503-32	HZS6A3L	R 512	111-4731-91	1/4WS 47kΩ	R 552	111-4731-91	1/4WS 47kΩ
IC 501	051-0869-50	NJM2103D	R 513	111-4731-91	1/4WS 47kΩ	R 553	111-1021-91	1/4WS 1kΩ
IC 502	052-3123-11	uPD78058FGC-030-3B9	R 514	111-4731-91	1/4WS 47kΩ	R 554	111-1021-91	1/4WS 1kΩ
L 501	010-2230-76	22μH	R 515	111-1021-91	1/4WS 1kΩ	R 555	111-1021-91	1/4WS 1kΩ
Q 501	125-2016-01	DTA114EL	R 516	111-1021-91	1/4WS 1kΩ	R 556	111-1021-91	1/4WS 1kΩ
Q 502	125-2016-01	DTA114EL	R 517	111-1021-91	1/4WS 1kΩ	R 557	111-1021-91	1/4WS 1kΩ
Q 503	125-2016-01	DTA114EL	R 518	111-4731-91	1/4WS 47kΩ	R 558	111-1021-91	1/4WS 1kΩ
Q 504	125-2016-01	DTA114EL	R 519	111-4731-91	1/4WS 47kΩ	R 560	111-6230-98	1/4WS 62kΩ
Q 505	125-2016-01	DTA114EL	R 520	111-1021-91	1/4WS 1kΩ	R 561	111-3930-98	1/4WS 39kΩ
Q 506	125-2016-01	DTA114EL	R 523	111-1021-91	1/4WS 1kΩ	R 565	111-2231-91	1/4WS 22kΩ
Q 507	103-1858-00	2SD1858	R 524	111-1021-91	1/4WS 1kΩ	R 567	111-2231-91	1/4WS 22kΩ
Q 508	125-0012-01	DTA114EL	R 525	111-1021-91	1/4WS 1kΩ	R 568	111-2231-91	1/4WS 22kΩ
Q 509	125-2016-01	DTA114EL	R 526	111-1021-91	1/4WS 1kΩ	R 569	111-4731-91	1/4WS 47kΩ
Q 510	103-2012-00	2SD2012	R 527	111-1021-91	1/4WS 1kΩ	R 570	111-1021-91	1/4WS 1kΩ
Q 511	125-0012-01	DTA114EL	R 528	111-4731-91	1/4WS 47kΩ	R 571	114-1201-31	3W 12Ω
Q 512	125-2016-01	DTA114EL	R 529	111-4731-91	1/4WS 47kΩ	R 572	111-4711-81	1/2WS 470Ω
Q 513	103-2012-00	2SD2012	R 530	111-4731-91	1/4WS 47kΩ	R 573	111-3311-81	1/2WS 330Ω
Q 514	100-1561-50	2SA1561Q.R	R 531	111-1021-91	1/4WS 1kΩ	R 574	111-1031-91	1/4WS 10kΩ
Q 515	125-2016-01	DTA114EL	R 532	111-1021-91	1/4WS 1kΩ	R 575	111-3321-91	1/4WS 3.3kΩ
Q 516	103-1858-00	2SD1858	R 533	111-1021-91	1/4WS 1kΩ	R 576	111-1041-91	1/4WS 100kΩ
Q 517	103-1858-00	2SD1858	R 534	111-1021-91	1/4WS 1kΩ	R 577	111-2211-91	1/4WS 220Ω
Q 518	125-0028-00	DTA144TSA	R 535	111-1021-91	1/4WS 1kΩ	R 578	111-1091-91	1/4WS 1Ω
Q 520	125-0028-00	DTA144TSA	R 536	111-1021-91	1/4WS 1kΩ	R 579	111-1091-91	1/4WS 1Ω
Q 521	125-0028-00	DTA144TSA	R 537	111-1021-91	1/4WS 1kΩ	R 580	111-1041-91	1/4WS 100kΩ
Q 522	125-2016-01	DTA114EL	R 538	111-1021-91	1/4WS 1kΩ	R 581	111-1041-91	1/4WS 100kΩ
R 501	111-5631-91	1/4WS 56kΩ	R 539	111-1021-91	1/4WS 1kΩ	R 582	111-1041-91	1/4WS 100kΩ
R 502	111-1231-91	1/4WS 12kΩ	R 540	111-1021-91	1/4WS 1kΩ	R 583	111-4731-91	1/4WS 47kΩ
R 503	111-1031-91	1/4WS 10kΩ	R 541	111-1021-91	1/4WS 1kΩ	TH 501	002-0212-00	NTH300WC104J
R 504	111-1041-91	1/4WS 100kΩ	R 543	111-1021-91	1/4WS 1kΩ	X 501	060-0319-00	4.915MHz
			R 544	111-1031-91	1/4WS 10kΩ			

Amp PWB section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 501	042-0548-11	35V4.7μF	C 556	178-1045-79	0.1μF	R 512	117-2231-10	1/10W 22kΩ
C 502	042-0548-11	35V4.7μF	C 557	182-4763-32	16V47μF	R 513	117-2721-10	1/10W 2.7kΩ
C 503	042-0548-11	35V4.7μF	C 559	182-3353-62	50V3.3μF	R 514	117-2721-10	1/10W 2.7kΩ
C 504	042-0548-11	35V4.7μF	C 562	172-1041-11	0.1μF	R 515	117-2721-10	1/10W 2.7kΩ
C 507	178-3322-78	3300pF	CCT501	050-0122-03	1kΩ x4	R 516	117-2721-10	1/10W 2.7kΩ
C 508	178-3322-78	3300pF	D 553	001-0334-30	RL202	R 517	117-1021-10	1/10W 1kΩ
C 509	042-0548-03	16V100μF	D 555	001-0466-00	S5688B	R 518	117-1021-10	1/10W 1kΩ
C 510	042-0548-03	16V100μF	D 555	001-0499-00	ERA15-01	R 519	117-1021-10	1/10W 1kΩ
C 511	042-0548-09	10V33μF	D 555	001-0626-00	1A2	R 520	117-1021-10	1/10W 1kΩ
C 512	042-0548-09	10V33μF	IC 501	051-2011-00	LA4708	R 527	117-2291-10	1/10W 2.2Ω
C 513	178-3322-78	3300pF	IC 502	051-2011-00	LA4708	R 528	117-2291-10	1/10W 2.2Ω
C 514	178-3322-78	3300pF	IC 551	051-1905-01	AN77L05M	R 529	117-2291-10	1/10W 2.2Ω
C 515	042-0548-07	50V2.2μF	Q 501	125-4001-00	XN1504	R 530	117-2291-10	1/10W 2.2Ω
C 516	042-0548-07	50V2.2μF	Q 502	125-4001-00	XN1504	R 531	117-2291-10	1/10W 2.2Ω
C 517	178-1042-78	0.1μF	Q 551	125-0006-00	UN2110	R 532	117-2291-10	1/10W 2.2Ω
C 518	178-1042-78	0.1μF	Q 551	125-0019-03	DTA114TK	R 533	117-2291-10	1/10W 2.2Ω
C 519	178-1042-78	0.1μF	Q 552	125-9002-02	RN4602	R 534	117-2291-10	1/10W 2.2Ω
C 520	178-1042-78	0.1μF	Q 552	125-9003-02	IMD3	R 551	117-1031-10	1/10W 10kΩ
C 521	178-1042-78	0.1μF	Q 554	125-0013-07	RN2427	R 552	117-4721-10	1/10W 4.7kΩ
C 522	178-1042-78	0.1μF	Q 555	125-2004-06	RN1406	R 554	111-4701-91	1/4WS 47Ω
C 523	178-1042-78	0.1μF	Q 555	125-2020-06	DTC143ZK	R 556	117-2221-10	1/10W 2.2kΩ
C 524	178-1042-78	0.1μF	R 505	117-5621-10	1/10W 5.6kΩ	R 557	111-4701-91	1/4WS 47Ω
C 525	042-0551-00	16V200μF	R 506	117-5621-10	1/10W 5.6kΩ	R 558	117-1041-10	1/10W 100kΩ
C 526	042-0551-00	16V200μF	R 507	117-5621-10	1/10W 5.6kΩ	R 559	117-4731-10	1/10W 47kΩ
C 551	182-3363-22	10V33μF	R 508	117-5621-10	1/10W 5.6kΩ	T 551	009-0658-03	
C 553	182-1063-32	16V10μF	R 509	117-2231-10	1/10W 22kΩ	T 551	009-0658-62	
C 554	184-3373-11	6.3V330μF	R 510	117-2231-10	1/10W 22kΩ			
C 555	042-0504-07	6.3V10μF	R 511	117-2231-10	1/10W 22kΩ			

Display PWB section

REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION	REF No.	PART No.	DESCRIPTION
C 701	176-1011-00	100pF CH	PL 707	017-0433-02	14V40mA	S 706	013-6300-00	
C 702	178-2232-78	0.022uF	PL 708	017-0433-02	14V40mA	S 707	013-6300-00	
C 703	178-4745-79	0.47uF	PL 709	017-0433-02	14V40mA	S 708	013-6300-00	
C 704	178-2232-78	0.022uF	Q 701	125-2004-02	RN1402	S 709	013-6300-00	
C 705	176-4701-00	47pF CH	Q 701	125-2005-01	UN2211	S 710	013-6300-00	
C 706	176-2201-00	22pF CH	Q 701	125-2031-02	DTC114EK	S 711	013-6300-00	
C 707	176-1011-00	100pF CH	Q 702	125-9002-02	RN4602	S 712	013-6300-00	
D 701	001-0412-18	GL-3EG8	Q 702	125-9003-02	IMD3	S 713	013-6300-00	
IC 701	051-6011-00	LC75741E	R 701	117-1811-10	1/10W 180ohm	S 714	013-6300-00	
L 701	010-2174-16	22uH	R 702	117-1831-10	1/10W 18kohm	S 715	013-6300-00	
PL 701	017-0433-02	14V40mA	S 701	013-6300-00		S 716	013-6300-00	
PL 702	017-0433-02	14V40mA	S 702	013-6300-00		VR 701	016-0010-01	
PL 703	017-0433-02	14V40mA	S 703	013-6300-00		VR 702	016-3200-01	
PL 704	017-0433-02	14V40mA	S 704	013-6300-00		VR 703	016-3200-01	
PL 705	017-0433-02	14V40mA	S 705	013-6300-00				
PL 706	017-0433-02	14V40mA						

CD mechanism PWB section

C	REF No.	PART No.	DESCRIPTION	C	REF No.	PART No.	DESCRIPTION	R	REF No.	PART No.	DESCRIPTION
C	10	178-1032-78	0.01uF	C	36	178-4732-78	0.047uF	R	14	117-5631-10	1/10W 56kohm
C	11	182-1063-32	16V10uF	C	37	178-1522-78	1500pF	R	15	117-2731-10	1/10W 27kohm
C	12	178-1042-78	0.1uF	C	38	178-1032-78	0.01uF	R	16	117-2211-10	1/10W 22kohm
C	13	182-1073-12	6.3V100uF	C	39	042-0230-00	35V0.47uF	R	17	117-2211-10	1/10W 22kohm
C	14	178-1032-78	0.01uF	C	40	178-1032-78	0.01uF	R	18	117-1031-10	1/10W 10kohm
C	15	182-2263-12	6.3V22uF	C	41	178-1042-78	0.1uF	R	19	117-2231-10	1/10W 22kohm
C	16	178-1032-78	0.01uF	C	42	178-2222-78	2200pF	R	20	117-4721-10	1/10W 4.7kohm
C	17	178-1042-78	0.1uF	C	100	182-4763-12	6.3V47uF	R	21	117-2231-10	1/10W 22kohm
C	18	178-1042-78	0.1uF	C	101	182-4763-12	6.3V47uF	R	22	117-4711-10	1/10W 47ohm
C	19	176-1007-00	10pF CH	C	102	178-1032-78	0.01uF	R	23	117-1011-10	1/10W 100kohm
C	20	178-1042-78	0.1uF	C	103	182-1073-32	16V100uF	R	24	117-1021-10	1/10W 1kohm
C	21	182-2263-12	6.3V22uF	D	1	001-0563-00	GL380	R	25	117-1001-10	1/10W 10ohm
C	22	176-2096-00	2pF CJ	D	2	001-0563-00	GL380	R	26	117-3331-10	1/10W 33kohm
C	23	178-1042-78	0.1uF	D	3	001-0563-00	GL380	R	27	117-3631-10	1/10W 36kohm
C	24	178-1022-78	1000pF	IC	1	051-1014-10	TA7291S	R	28	117-1241-10	1/10W 120kohm
C	25	176-1007-00	10pF CH	IC	2	051-6015-05	BA6392FP	R	29	117-3631-10	1/10W 36kohm
C	26	176-1007-00	10pF CH	IC	3	051-6314-05	TC9404FN	R	30	117-1041-10	1/10W 100kohm
C	27	182-1073-12	6.3V100uF	IC	4	051-1971-00	CXA16010M	R	31	117-1031-10	1/10W 10kohm
C	28	178-1042-78	0.1uF	IC	5	051-6313-00	CXD2545Q	R	32	117-6821-10	1/10W 6.8kohm
C	29	182-1073-12	6.3V100uF	L	1	010-2155-03	10uH	R	33	117-3321-10	1/10W 3.3kohm
C	30	178-1042-78	0.1uF	L	2	010-2155-03	10uH	R	34	117-1051-10	1/10W 1Mohm
C	31	176-1007-00	10pF CH	L	3	010-2155-03	10uH	R	35	117-1041-10	1/10W 100kohm
C	32	178-2212-78	220pF	Q	1	101-1237-00	2SB1237	R	36	117-1031-10	1/10W 10kohm
C	33	178-1042-78	0.1uF	R	10	111-2711-91	1/4WS 270ohm	X	1	060-1014-00	16.934MHz
C	34	178-2212-78	220pF	R	11	117-8231-10	1/10W 82kohm				
C	35	178-1032-78	0.01uF	R	12	117-1031-10	1/10W 10kohm				