

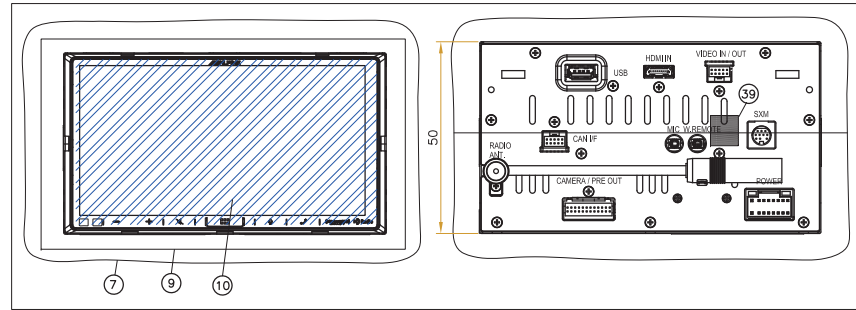
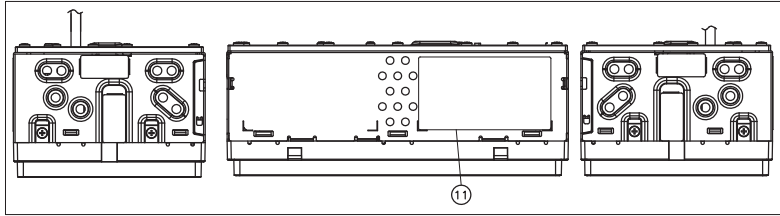
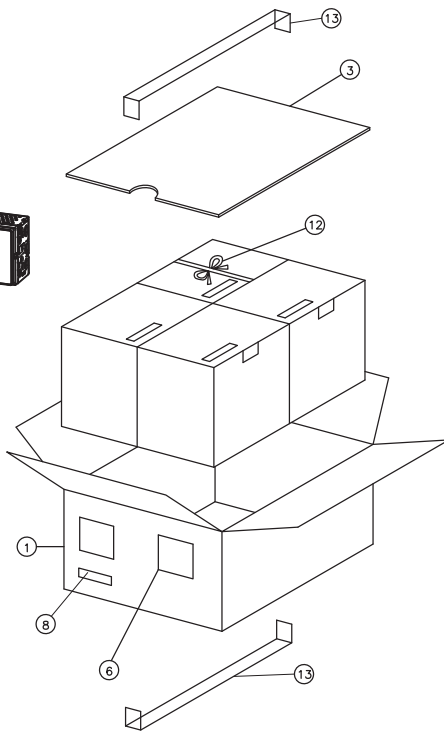
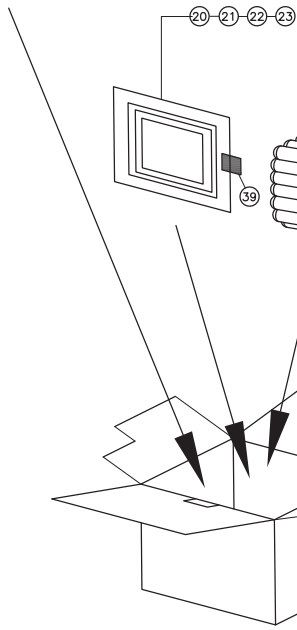





TAPE 부착방법
(TAPE Method of attachment)



(39)	SCOTCH TAPE(20mmX50m)	A0701000180	AR		
(38)	ASSY CABLE (CAN I/F)	E2703005170	1		
(37)	ASSY CABLE (VIDEO IN/OUT)	E2703005130	1		
(36)	ASSY CABLE (PREOUT) ; ANF-2821-01A	E2703005050	1		
(35)	ASSY CABLE (POWER) ; ANF-0913-01A	E2703005070	1		
(34)	ASSY CABLE(BT MIC)	50-14386203-A	1		
(33)	ASSY CABLE; USB CABLE (1M)	E2703004700	1		
(32)	SCR,MSX8(B) MCH(Zn,3-WHT)	M981400501A	4		
(31)	SACK;POLY (75X140X0.1T)	M1724001010	1		
(30)	SACK;POLY(230X330X0.03T)	M1724013010	2		
(23)	SACK;POLY(230X330X0.03T)	M1724013010	1		
(22)	CARD-URL	M3514736010	1		
(21)	CARD;SURVEY-AL	M3544262010	1		
(20)	MANUAL,QUICK-GUIDE(QRG)	M3514732010	1		
(13)	SCOTCH TAPE(50mmX50m)	A0701000200	AR		
(12)	T-NYLON(YELLOW)	A1001000010	AR		
(11)	LABEL;COMPOSITE	M0694017010	1		
(10)	SHEET;PROTECT	M1214554010	1		
(9)	CUSHION SHEET	M3164772010	1		
(8)	LABEL;UPC-CODE	M0694014010	1		
(7)	SACK;POLY(300X380X0.05T)	M1724004020	1		
(6)	LABEL, BAR CODE-MAS:1/4_KOR	M0674869040	1/4		
(5)	LABEL;BAR CODE-IND	M0674870010	1		
(4)	PKG;CUSHION AIR(BOTTOM)	M0624652010	1		
(3)	PKG;PAD (430X295)	M0614587010	1/4		
(2)	PKG;CARTON-IND	M062487901A	1		
(1)	PKG;CARTON-MAS	M0624886010	1/4		

REVISE			
(DRAWN)	(CHECKED)	(APPROVED)	
(REVIEW)	(CHECKED)	(APPROVED)	
70060021620			
P K G			
iLX-407 / DM-S91911U			

Connections

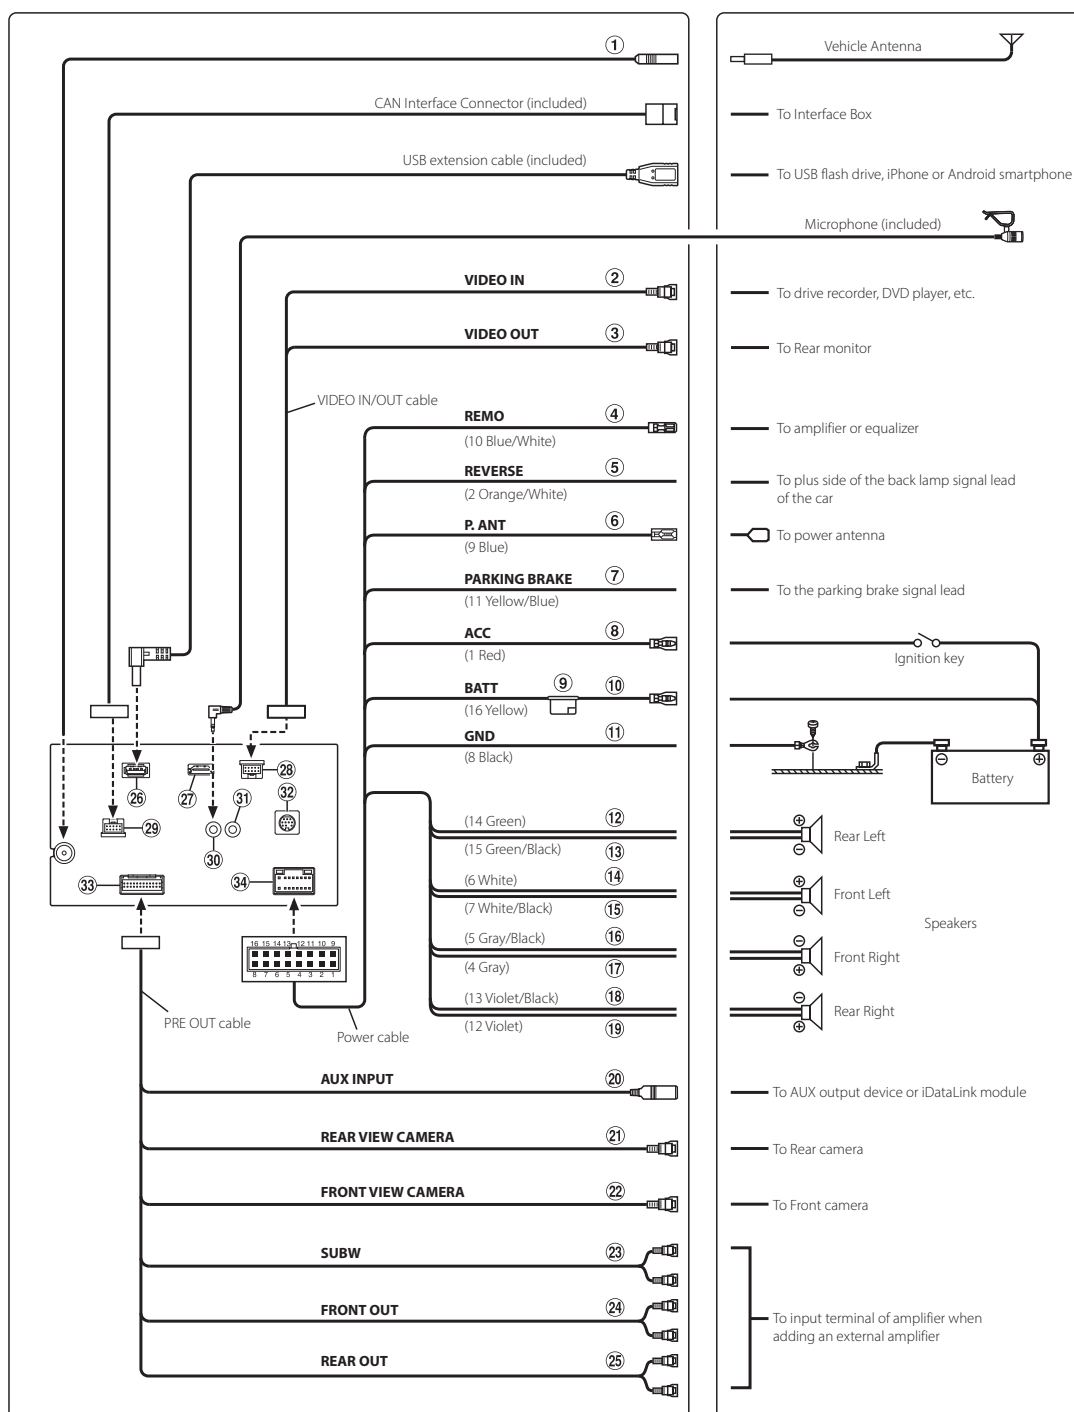

① **Radio Antenna Receptacle**

② **Video Input Lead**

③ **Video Output Lead**

④ **Remote Turn-On Lead (Blue/White)**

Connect this lead to the remote turn-on lead of your amplifier or signal processor.

⑤ **Reverse Lead (Orange/White)**

⑥ **Power Antenna Lead (Blue)**

Connect this lead to the +B terminal of your power antenna, if applicable.

- This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier or a signal processor, etc.

⑦ **Parking Brake Lead (Yellow/Blue)**

Connect this lead to the power supply side of parking brake switch to transmit the parking brake status signals to the unit.

⑧ **Switched Power Lead (Ignition) (Red)**

Connect this lead to an open terminal on the vehicle's fuse box or another unused power source that provides (+) 12V only when the ignition is turned on or in the accessory position.

⑨ **Fuse Holder (15A)**

⑩ **Battery Lead (Yellow)**

Connect this lead to the positive (+) post of the vehicle's battery.

⑪ **Ground Lead (Black)**

Connect this lead to a good chassis ground on the vehicle.
Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

⑫ **Left Rear (+) Speaker Output Lead (Green)**

⑬ **Left Rear (-) Speaker Output Lead (Green/Black)**

⑭ **Left Front (+) Speaker Output Lead (White)**

⑮ **Left Front (-) Speaker Output Lead (White/Black)**

⑯ **Right Front (-) Speaker Output Lead (Gray/Black)**

⑰ **Right Front (+) Speaker Output Lead (Gray)**

⑱ **Right Rear (-) Speaker Output Lead (Violet/Black)**

⑲ **Right Rear (+) Speaker Output Lead (Violet)**

⑳ **AUX Input Connector**

Input lead for AUX video/audio signal or iDataLink audio signal.

㉑ **REAR CAMERA Input RCA Connector**

Use when connecting a rear camera with RCA Output Connector.

㉒ **FRONT CAMERA Input RCA Connector**

Use when connecting a front camera with RCA Output Connector.

㉓ **Subwoofer RCA Connectors**

㉔ **Front Output RCA Connectors**

Can be used as Front Output RCA Connectors. RED is right and WHITE is left.

㉕ **Rear Output RCA Connectors**


Can be used as Rear Output RCA Connectors. RED is right and WHITE is left.

㉖ **USB Connector**

To USB flash drive, iPhone or Android smartphone.

㉗ **HDMI Input Connector**

- To connect to the HDMI Input Connector, use an optional HDMI cable with an L-Type (270 degree) connector.
- Please take note of the size of the HDMI cable's L-Type connector. An HDMI cable with a connector exceeding this size will not be able to connect, as it will interfere with the peripheral cables, stacking amplifiers, etc.

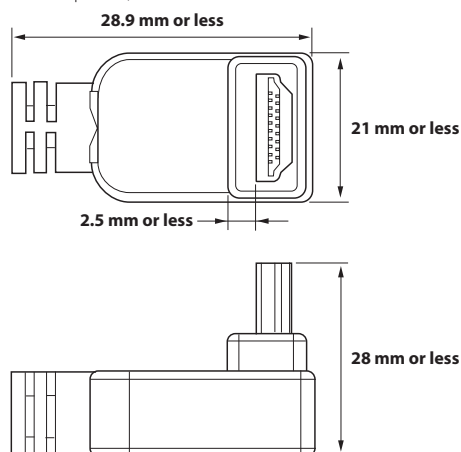

㉘ **VIDEO Input/Output Connector**

㉙ **MAESTRO Connector**

To Interface Box.

㉚ **MIC Input Connector**

To Microphone (included)

③① **Steering Remote Control Interface Connector**






To steering remote control interface.
For details about connections, consult your nearest Alpine dealer.

③② **SiriusXM Tuner Input Connector**

To SiriusXM Tuner (sold separately).
For more information on how to install the SiriusXM Connect Vehicle tuner, consult the installation guide included with the tuner.

③③ **AUX/PRE OUT/CAMERA Connector**

③④ **Power Supply Connector**

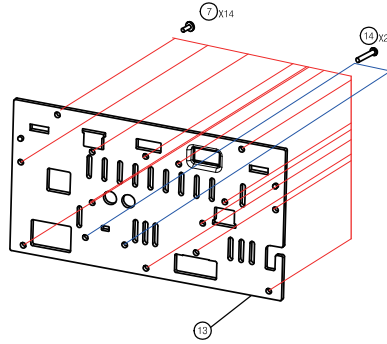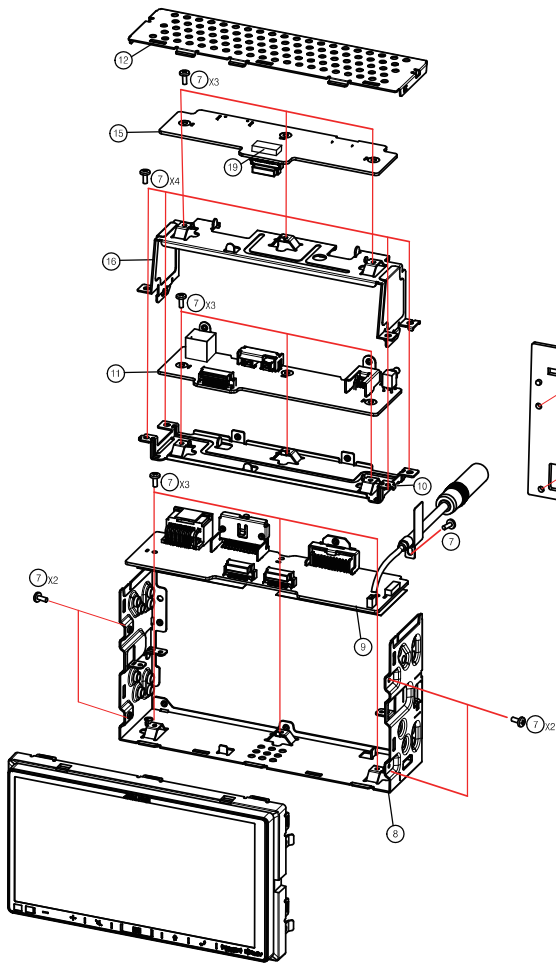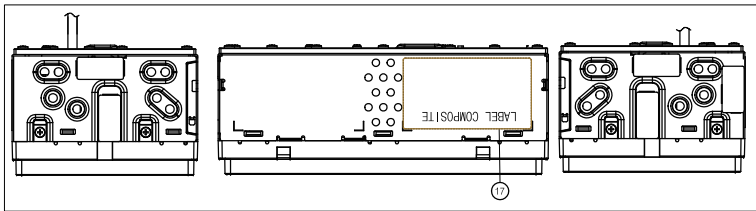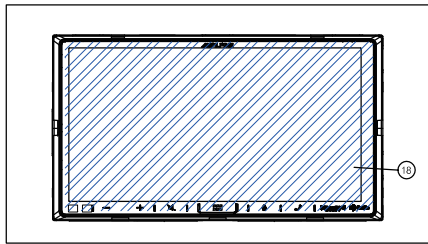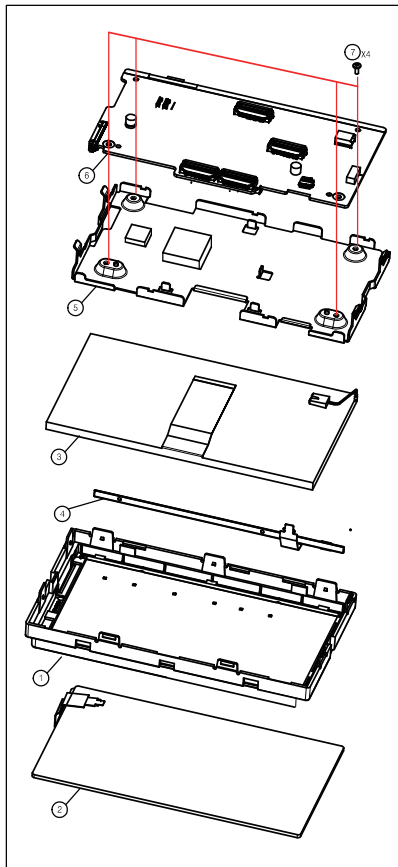

19	GASKET:7X10X13	E3401004930	1
18	SHEET:PROTECT	M1214554010	1
17	LABEL:COMPOSITE	M0694017010	1
16	CHAS:UPPER	M1932536010	1
15	ASSY:HDMI PCB	HACTR001050	1
14	SCR:M2.6X12(P)MCH-TPT(Zn,3-WHT)	M9844180010	2
13	HEAT:SINK	M1492261010	1
12	CHAS:TOP	M1932475010	1
11	ASSY:SUB PCB	HACTR001070	1
10	CHAS:MID	M1932535010	1
9	ASSY:MAIN PCB	HACTR001050	1
8	CHAS:MAIN	M193247401A	1
7	SCR:M2.6X6.0(B)MCH-TPT(WHT):Cr+3	M9824075010	36
6	AI:RF(TOP)FRONT	SFCTR003320	1
5	BKT:LCD	M193253401A	1
4	ASSY:LED PCD:DM-S91911U	JACTR005170	1
3	DISPLAY: W668520283084HB	E2501001610	1
2	TOUCH PANNEL	E3401004780	1
1	NOSE:PIECE	M1041338010	1
NO	PART NAME	PART NO	Q'TY

DRAWING NO	70080020360
PART NAME	EXPLODED
MODEL NAME	iLX-407 / DM-S91911U

NOTE

- 1.SERIAL No.
R O 11 10001
SERIAL NO. WOULD BE CONSECUTIVE NO. FROM 10001
UP TO 99999 AND THEN REPEAT SERIES.
TWO DIGIT OF THE MONTH EX) 01; JAN, 11 ; NOV
LAST DIGIT OF THE YEAR EX)2020;0
SIGN OF PRODUCT FACTORY NAME
EX) R ; DAE SUNG FACTORY
- 2.PACKING
FOUR INDIVIDUALLY PACKED UNITS ARE TO BE PACKED
ONE MASTER
- 3.ALLOWABLE VARIATION ON DIMENSIONS: ±2
- 4.LABEL BAR-CODE (CARTON)




PRODUCT CODE (제품코드) SERIAL NO. (NOTE 1 番地)



- 5.MARKED "*" DIMENSIONS MEAN IMPORTANT CONTROLLED DIMENSIONS.
6.MUSH BE 16 PLACES M5 SCREW TAP VISION IS CHECK. (Blocked hole, Opened hole)



A LABEL.COMPOSITE



ANT. RECEPTACLE
150MIN (FROM CHAS MAIN)

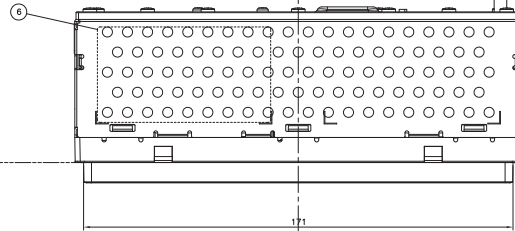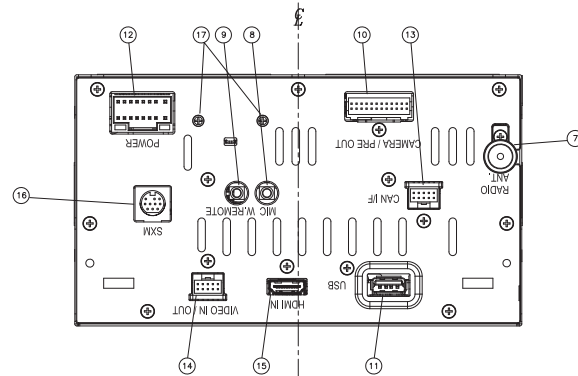

3	M3514736010	CARD,URL	1	
2	M3544245010	CARD,SURVEY-AL	1	
1	M3514732010	MANUAL,ORG	1	
No.	PARTS No.	PARTS NAME	Q'TY	REMARKS

ASS'Y PAMPHLET

7	E2703005170	ASSY CABLE; ANIF-3510-01A	1	
6	50-14386203-A	ASSY CABLE; MIC CABLE	1	
5	E2703005130	ASSY CABLE; ANIF-3452-01A	1	
4	E2703005050	ASSY CABLE; PRE-OUT CABLE	1	
3	E2703004700	ASSY CABLE; USB ASSY CABLE(1.0M)	1	
2	E2703004320	ASSY CABLE; ANIF-D913091A	1	
1	M981400501A	SCR MSX8(B) MCH (WHT)	4	
No.	PARTS No.	PARTS NAME	Q'TY	REMARKS



KIT INSTAL

TOLERANCES UNLESS OTHERWISE SPEC.	ALL RIGHT ANGLE BENDS TO BE 90° UNLESS OTHERWISE SPECIFICATION
DIVISIONS OF DIMENSIONS	TOLERANCE FOR DIMENSION
30<L<=120	±0.15 ±0.5
120<L<=120	±0.25 ±1
120<L<=120	±0.4 ±1.5
	ANGULAR TOLERANCES SPECIFIED AT DIM.
	HOLE DIA. VARIATION
	±0.07 ±0.5

SPECIFICATION LIST OF COLOR

PART NAME	PART NAME	PRINT	LIGHTING
NOSEPIECE	鼻出し部	-	-
PANEL TOUCH	-	SILK PRINT(PANTONE 430C)	WHITE

No.	PART NAME	PART No.	MATERIAL	QTY	REMARK
1	NOSEPIECE	M1041338010	PC	1	
2	PANEL TOUCH	-	GLASS	1	
3	CHAS.TOP	M1932475010	SECC 0.8R	1	
4	HEAT-SINK	M1492261010	AL 3R	1	
5	CHAS.MAIN	M193247401A	SECC 0.8R	1	
6	LABEL.COMPOSITE	M0684017010	ART PAPER	1	
7	ANT.RECEPTACLE	-	-	1	
8	MIC JACK	-	-	1	
9	REMOTE JACK	-	-	1	
10	PREOUT CONNECTOR 24P	-	-	1	
11	USB CONNECTOR	-	-	1	
12	POWER CONNECTOR	-	-	1	
13	CAN I/F CONNECTOR	-	-	1	
14	VIDEO IN/OUT CONNECTOR	-	-	1	
15	HDMI IN CONNECTOR	-	-	1	
16	SXM CONNECTOR	-	-	1	
17	SCR M2.6X12(P) MCH-TPT	M0844180010	SWCH15A	2	
18	SCR M2.6X6(B) MCH TPT	M0824075010	SWCH15A	36	

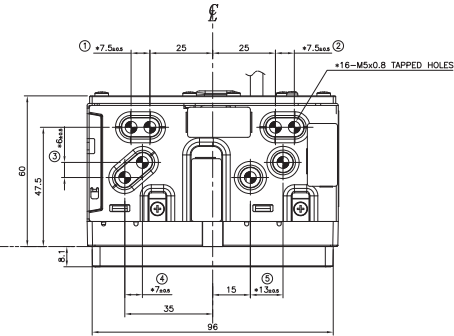

No.	Connector Pin No.	Color	Connection
1	Red	(Rouge)	Accessory
2	Orange/White	(Orange/Blanc)	Reverse
3			N.C.
4	Gray	(Gris)	Front SP(R) ⊕
5	Gray/Black	(Gris/Noir)	Front SP(R) ⊖
6	White	(Blanc)	Front SP(L) ⊕
7	White/Black	(Blanc/Noir)	Front SP(L) ⊖
8	Black	(Noir)	Ground
9	Blue	(Bleu)	Power Antenna
10	Blue/White	(Bleu/Blanc)	Remote Turn-on
11	Yellow/Blue	(Jaune/Bleu)	Parking Brake
12	Purple	(Violet)	Rear SP(R) ⊕
13	Purple/Black	(Violet/Noir)	Rear SP(R) ⊖
14	Green	(Vert)	Rear SP(L) ⊕
15	Green/Black	(Vert/Noir)	Rear SP(L) ⊖
16	Yellow	(Jaune)	Battery

MAIN CONNECTOR








PT. ISS. A
1/1







RELEASES AND REVISIONS MEMO		
(DRAWN BY)/(CHECKED BY)/(APPROVED BY)		
DATE	DATE	DATE
20.08.24	20.08.24	20.08.24
20.08.24	20.08.24	20.08.24
20.08.24	20.08.24	20.08.24
4011000441A		
OUTLINE (US)		
RU00051A (20M7 DA)		
株式会社 大星電機		
DAEJUNG ELECTRIC CO., LTD.		

iLX-407(PCMTUN01210) Service Parts List

- GLOBAL DA AM向

- DATE: 2021.08.13

No.	Symbol No.	Photo of actual part	Photo of actual packaging	Part No.	Description	Piece Price	MOQ	L/T	Remark
Example				xxxxxx	xxxxxxx	xxx	xxx	xxx	
Repair Parts									
1				M1041338010	NOSE;PIECE	US\$5.70	1,000	60	
2				M193253401A	BKT;LCD	US\$3.40	100	60	
3				M1492261010	HEAT;SINK	US\$4.50	100	60	
4				M193247401A	CHAS;MAIN	US\$3.90	100	60	
5				M1932475010	CHAS;TOP	US\$1.30	100	60	
6				M1932476010	CHAS;MID	US\$1.80	100	60	
7				M193253601A	CHAS;UPPER	US\$1.90	100	60	
8				M2002585010	BKT;HDMI	US\$0.40	100	60	
9				M2002694010	BKT;MAESTRO	US\$0.42	50	50	
10				M2002635010	BKT;PREOUT	US\$0.42	50	50	
11				M2001029010	BKT;IC	US\$0.60	100	60	
12				M1214554010	SHEET;PROTECT	US\$0.45	1,000	50	
13				M9824075010	SCR;M2.6×6.0(B)MCH-TPT	US\$0.01	2,000	50	
14				M9844180010	SCR;M2.6X12(P)MCH-TPT(Zn,3-WHT)	US\$0.01	2,000	50	
15				HACTR001050 (PCMTUN01520)	ASSY MAIN PCB;DM-S91911U	US\$50.00	100	130	
16				HACTR001060 (PCMTUN01550)	ASSY HDMI PCB;DM-S91911U	US\$24.00	100	130	
17				HACTR001070 (PCMTUN01540)	ASSY SUB PCB;DM-S91911U	US\$33.00	100	130	
18				SFCTR003320 (PCMTUN01530)	AI RF(TOP)FRONT;DM-S91911U	US\$160.00	100	130	
19				E1103014390	4700uF;25;20%;4.0MC;NHA16X25;7.5mm;105;*	US\$0.90	300	100	
20				E1605010510	TCB501HQ;HZIP;25P;4;TR	US\$4.25	510	260	
21				E1802000800	IFT;100MHz;±5%;5.9x6.2;Gray	US\$0.38	1,000	100	
22				E1803001360	350uH;*;30mOhm;23x17x25mm;*	US\$1.37	2,000	100	
23				E2601010530	WTB;16P;*;HOR-s;*,2	US\$0.60	1,000	145	
24				E2601013540	CONN;24P;*,*,*,2	US\$1.00	2,240	180	

No.	Symbol No.	Photo of actual part	Photo of actual packaging	Part No.	Description	Piece Price	MOQ	L/T	Remark
25				E2703005250	*;1P;160mm;B;Din;*	US\$1.50	100	120	
26				09-25106Z01-A	S10B-PUDSS-1 -DB	US\$0.50	5,500	180	
27				E2601012520	USB;4p;2;ANGLE;*;*	US\$0.55	150	90	
28				09-25106Z01-A	S10B-PUDSS-1 -DB	US\$0.50	5,500	180	
29				E2601010480	SOCKET;10P;2;ANG;*;2	US\$2.20	8,000	180	
30				E2601013550	JACK;3P;*;*;1	US\$0.57	1,000	90	
31				E2501001610	WG;6.95inch;650cd/m2;TFT	US\$66.00	2,000	250	
32				E3401004780	6.95 정전식 TOUCH_US"	US\$35.00	3,000	250	
33				JACTR005170	ASSY LED PCB;DM-S91911U	US\$7.20	6,000	120	
34				E3401004930	GASKET;7X12X13	US\$0.07	1,000	50	
User Parts									
1				M981400501A	SCR,M5X8(B)MCH(Zn,3-WHT)	US\$0.010	1,000	50	
2				M3514732010	MANUAL;QRG	US\$1.600	1,000	40	
3				M3544245010	CARD;SURVEY-AL	US\$0.190	100	40	
4				M3514736010	CARD,URL	US\$0.500	100	40	
5				50-14386Z03-A	*;2;1P;4M;B;*;*	US\$4.500	2,000	130	
6				E2703002300	#22#20;*;16P;*;*;ANIF-0913-01A (AP)	US\$3.550	100	120	
7				E2703004700	#10;4/5mm;4P;1m;BLACK;DIN;JABARA	US\$4.000	1,000	90	
8				E2703005050	UL224;*;12P;300mm;*;*;*	US\$12.000	500	120	
9				E2703005130	XY10SA;*;2P;150;Y;RCA;*	US\$3.500	1,000	120	
10				E2703005170	UL224;*;1P*;150mm;*;*;*	US\$1.700	500	120	