

9.2 EXTERIOR (1)

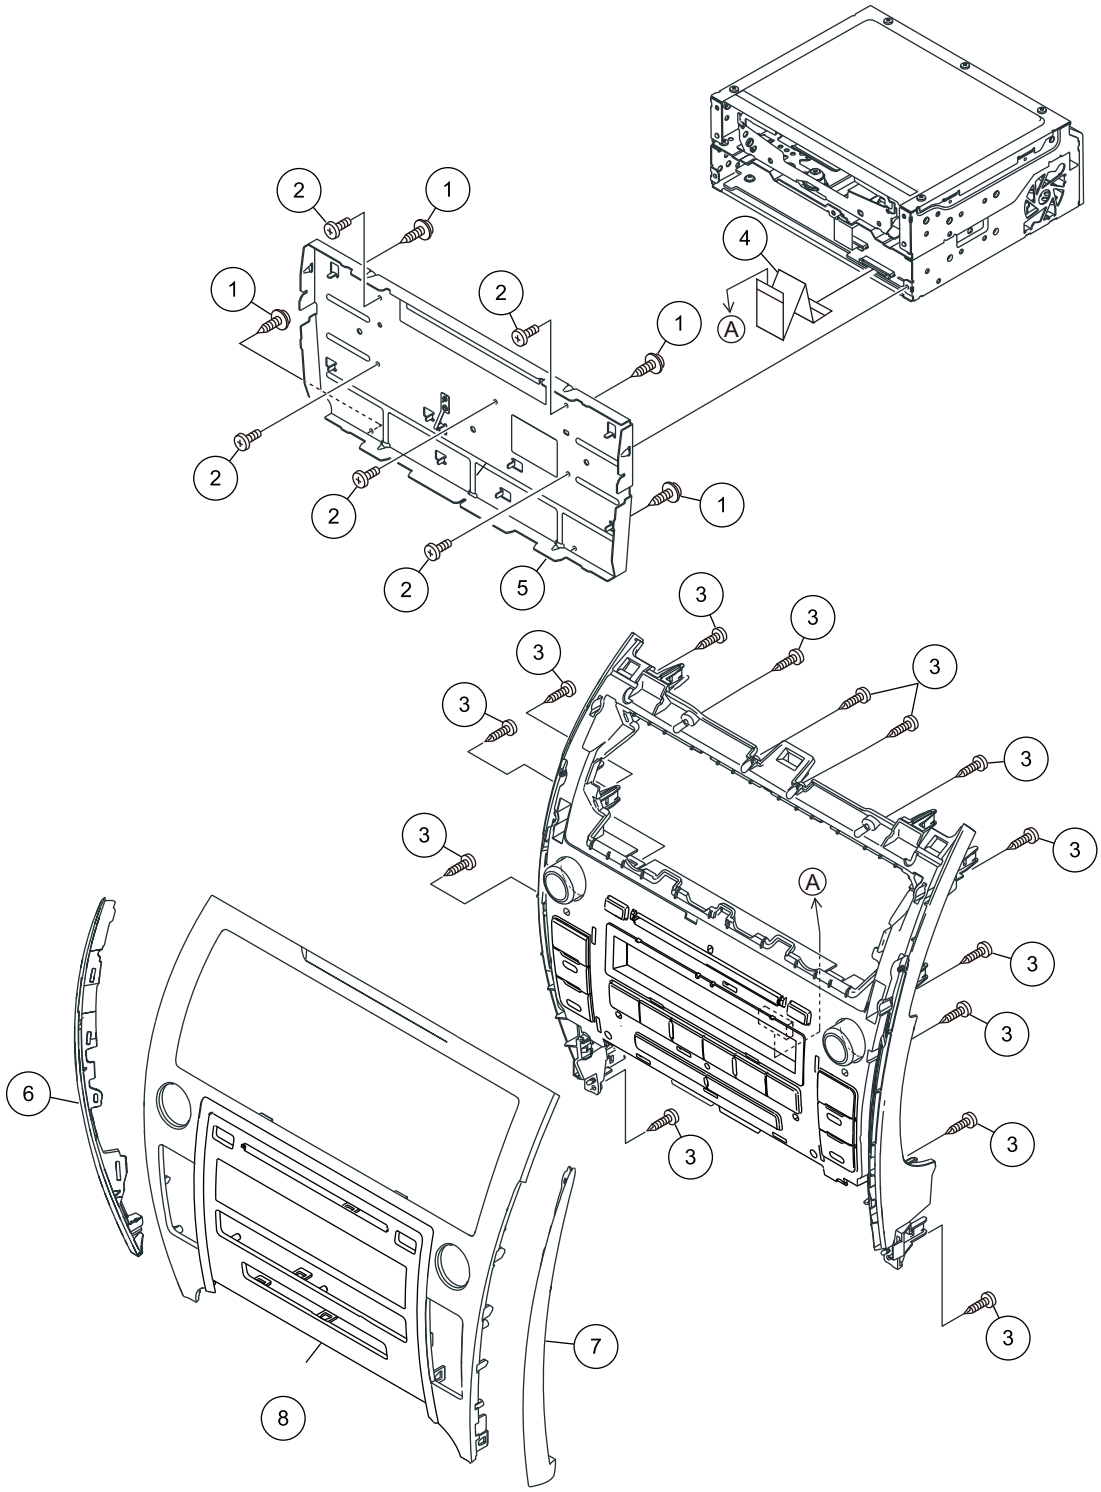

EXTERIOR (1) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	APZ26P100FTC
	2	Screw	BSZ26P050FTC
	3	Screw	BPZ20P100FTC
	4	Connector	CDE9323
	5	Frame Unit	CXE3610
	6	Panel	CNU1338
	7	Panel	CNU1339
	8	Panel	CNU1343


9.3 EXTERIOR (2)

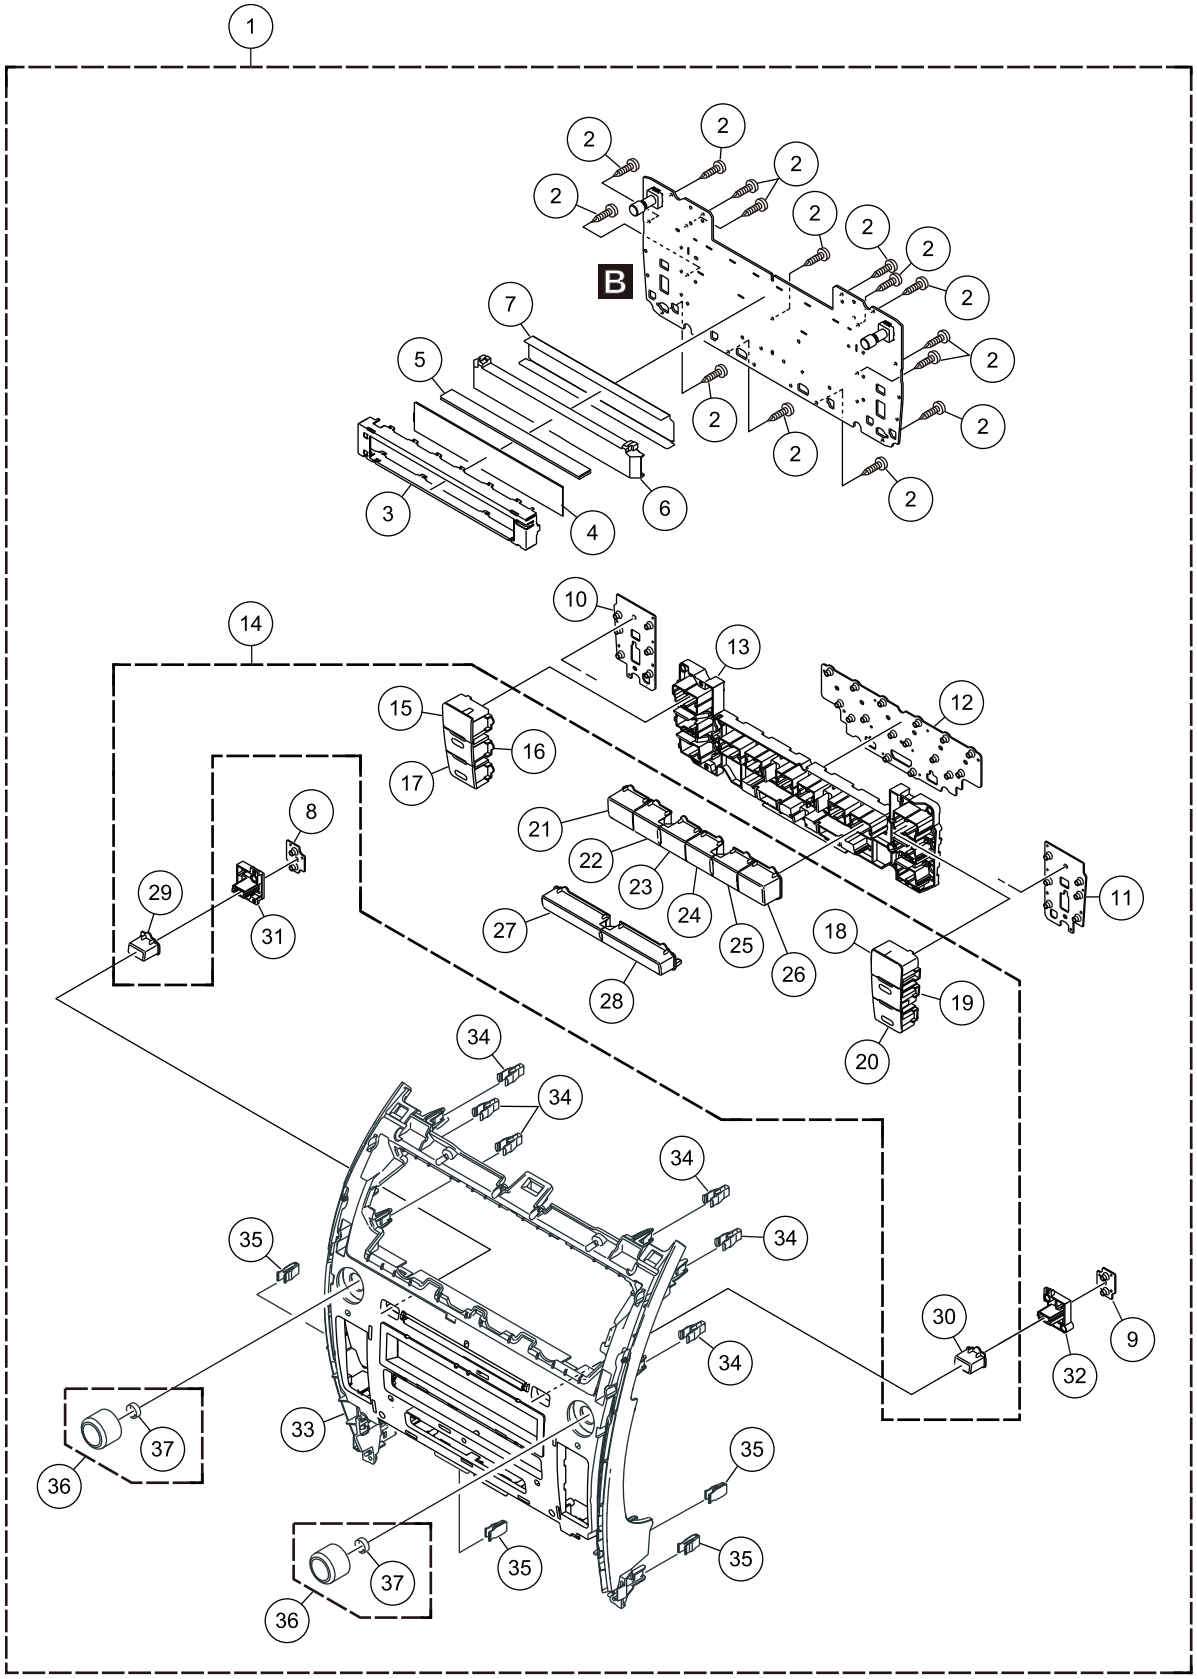

EXTERIOR (2) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Panel Assy	CPN3861
	2	Screw	BPZ20P100FTC
	3	Holder	CND5821
	4	LCD(V2001)	CAW1993
	5	Connector	CNW2023
	6	Lighting Conductor	CNW2039
	7	Sheet	CNN3452
	8	Rubber Contact	CNW2021
	9	Rubber Contact	CNW2022
	10	Rubber Contact	CNW2019
	11	Rubber Contact	CNW2020
	12	Rubber Contact	CNW2018
	13	Holder Unit	CXE3891
*	14	Service Button Unit	CXX3215
	15	Button(TEXT)	CXX3217
	16	Button(SEEK)	CXX3218
	17	Button(TRACK)	CXX3219
	18	Button(SCAN)	CXX3220
	19	Button(TYPE)	CXX3221
	20	Button(FOLDER)	CXX3222
	21	Button(1)	CXX3225
	22	Button(2)	CXX3226
	23	Button(3)	CXX3227
	24	Button(4)	CXX3228
	25	Button(5)	CXX3229
	26	Button(6)	CXX3230
	27	Button(MEDIA)	CXX3231
	28	Button(RADIO)	CXX3232
	29	Button(EJECT)	CXX3223
	30	Button(SETUP)	CXX3224
	31	Holder	CNW2010
	32	Holder	CNW2011
	33	Grille Unit	CXE3608
	34	90467-10203	CNV5641
	35	90468-05138	CNW2254
	36	Knob Unit	CXE3612
	37	Spring	CBL1695


9.4 EXTERIOR (3)

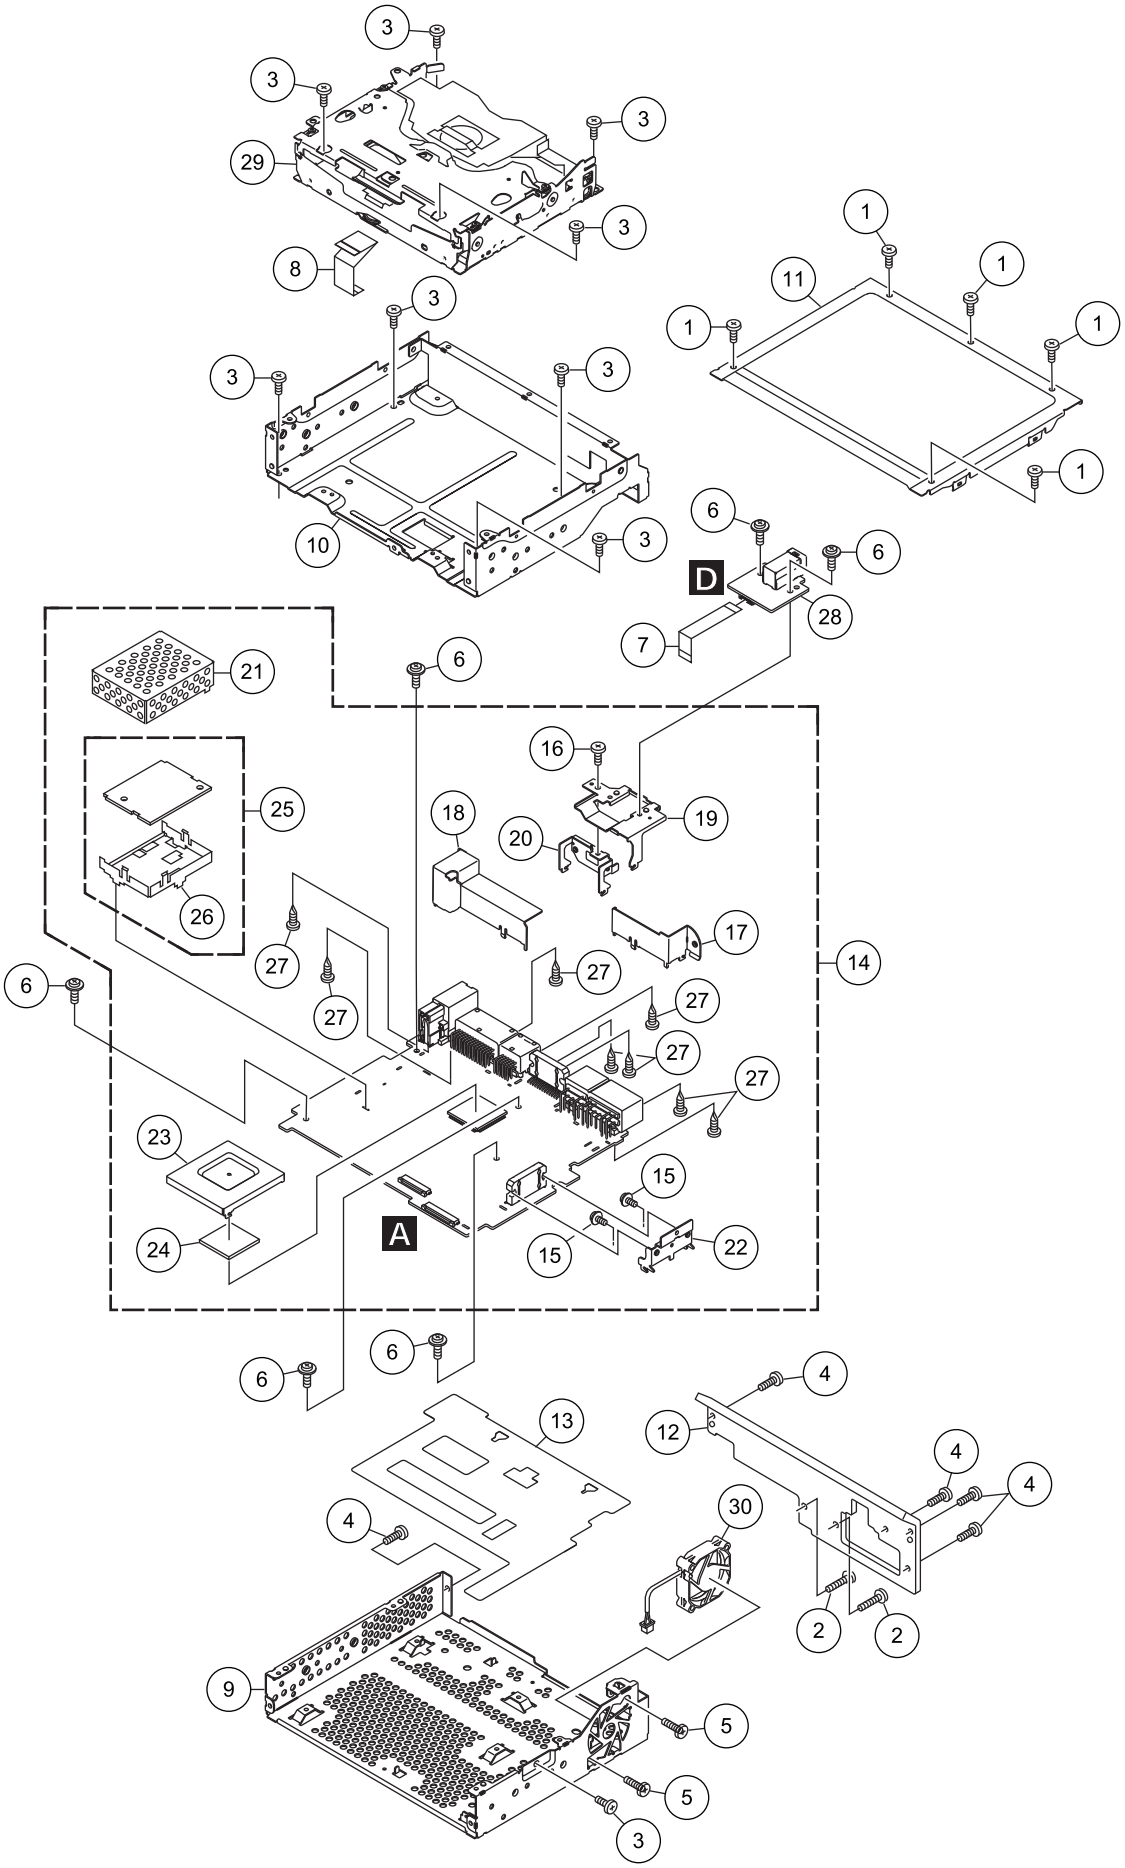

EXTERIOR (3) SECTION PARTS LIST

Mark	No.	Description	Part No.
	1	Screw	BSZ26P050FTC
	2	Screw	AMZ26P140FCC
	3	Screw	BMZ26P050FCC
	4	Screw	BSZ26P100FTC
	5	Screw(M2.6 x 14)	CBA2103
	6	Screw(M2.6 x 6)	CBA2258
	7	Connector	CDE9222
	8	Connector	CDE9293
	9	Chassis	CNA3182
	10	Chassis	CNA3183
	11	Case	CNB3637
	12	Heat Sink	CND5720
	13	Insulator	CNN3365
	14	Mother Unit	CWN5178
	15	Screw	AMZ26P080FCC
	16	Screw	BMZ26P050FCC
	17	Shield	CND5535
	18	Shield	CND5536
	19	Holder	CND5712
	20	Holder	CND5713
	21	Holder	CND5717
	22	Holder	CND5718
	23	Shield	CND5893
	24	Sheet	CNM9256
	25	FM/AM Tuner Unit(U401)	CWE2242
	26	Holder	CND5716
	27	Screw	PPZ30P060FSN
	28	USB Unit	CWN5179
	29	CD Mechanism Module(S11STD-T)	CXK5810
	30	Fan Motor	CXM1425

9.5 CD MECHANISM MODULE

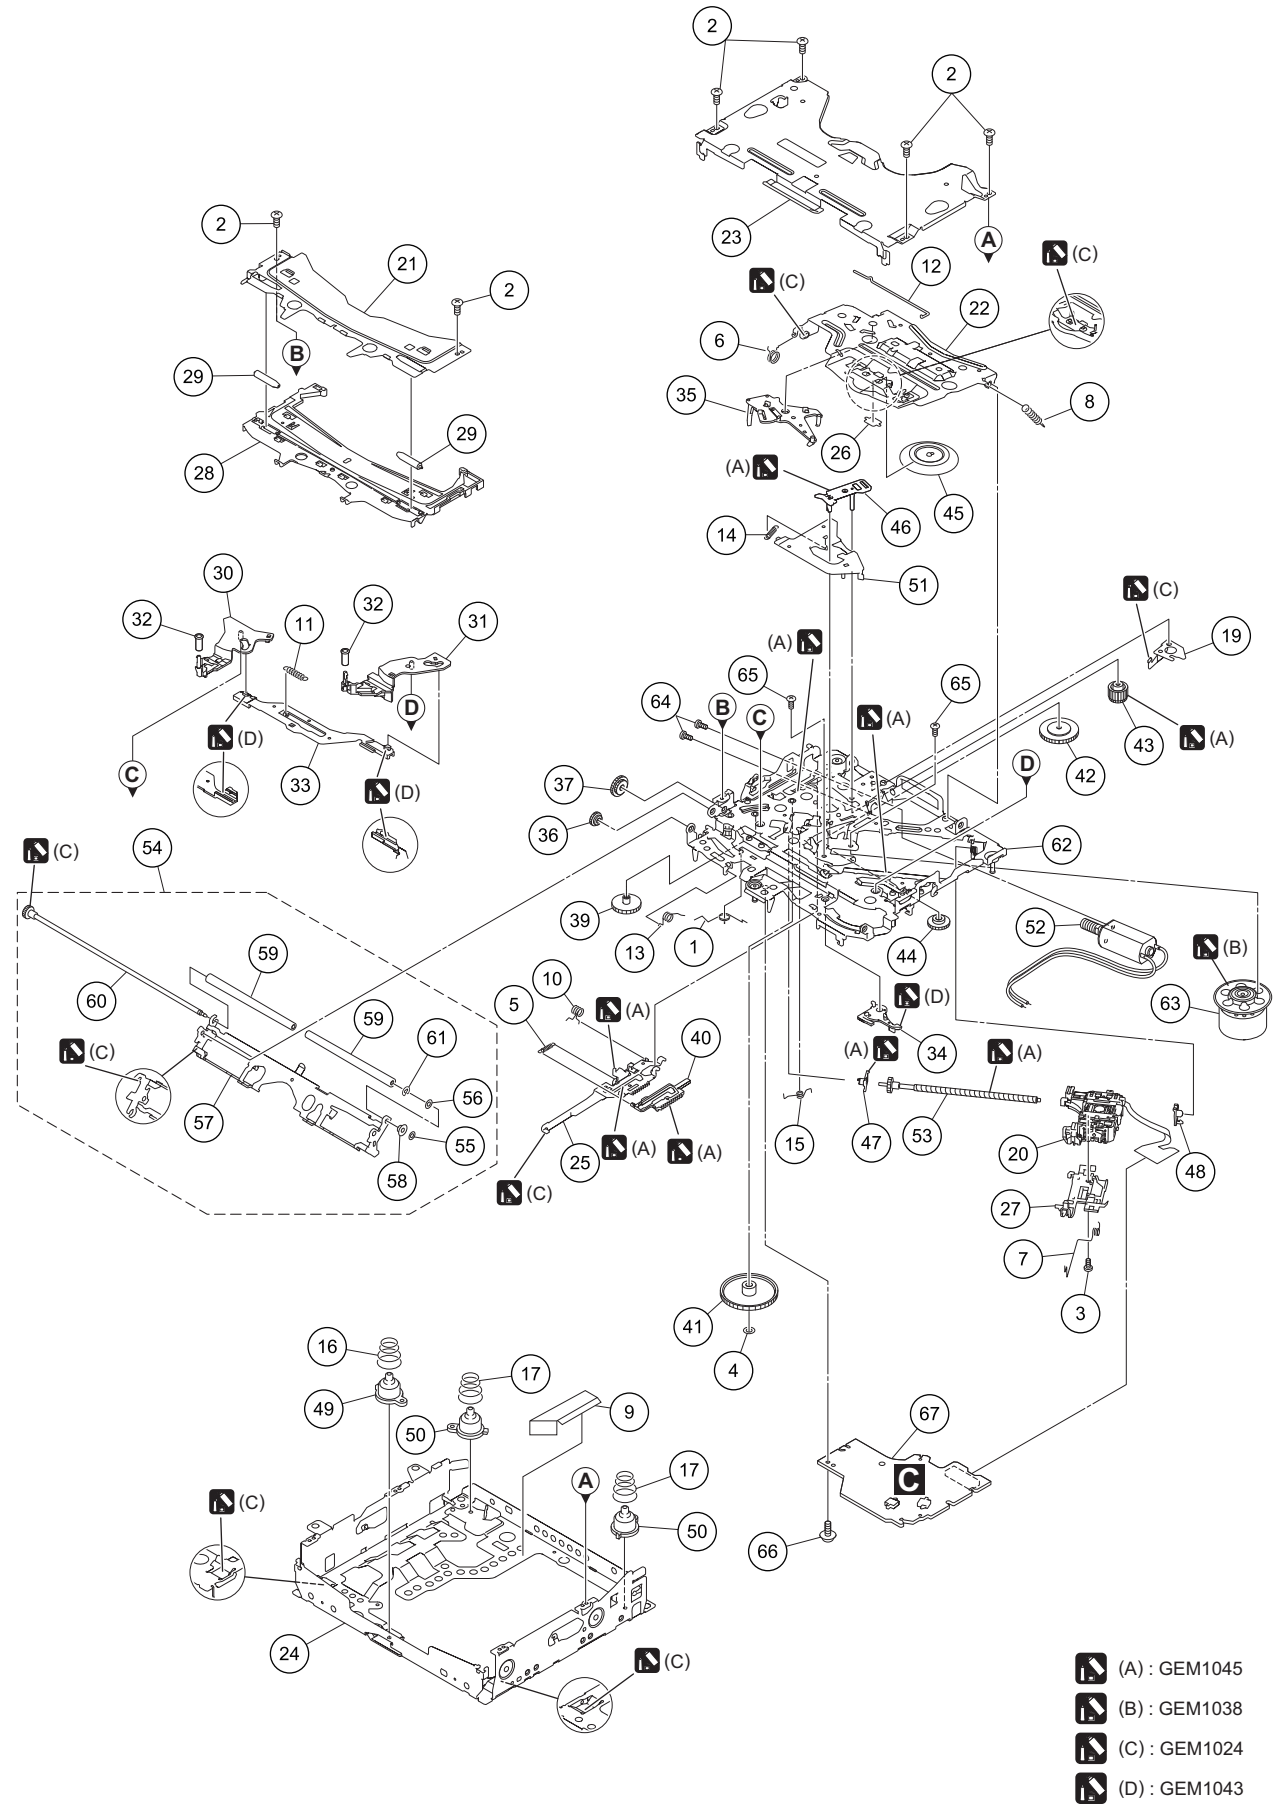

CD MECHANISM MODULE SECTION PARTS LIST

Mark No.	Description	Part No.
1	Spring	CBH3090
2	Screw	BSZ20P040FTC
3	Screw(M2 x 4)	CBA1835
4	Washer	CBF1038
5	Spring	CBH3010
6	Spring	CBH2855
7	Spring	CBH2856
8	Spring	CBH2860
9	Sheet	CNN3693
10	Spring	CBH3011
11	Spring	CBH3012
12	Spring	CBH3014
13	Spring	CBH3015
14	Spring	CBH3016
15	Spring	CBH3017
16	Spring	CBH3086
17	Spring	CBH3019
18	•••••	
19	Spring	CBL1822
20	Pickup Unit(P10.5)(Service)	CXX1942
21	Bracket	CND4553
22	Arm	CND4555
23	Frame	CND4557
24	Frame	CND5880
25	Lever	CND5398
26	Sheet	CNN2280
27	Rack	CNV8342
28	Guide	CNW2141
29	Roller	CNW1172
30	Arm	CNW2042
31	Arm	CNW1174
32	Roller	CNW1175
33	Lever	CNW1176
34	Arm	CNW1177
35	Arm	CNW1178
36	Gear	CNW1180
37	Gear	CNW1181
38	•••••	
39	Gear	CNW1183
40	Rack	CNW1184
41	Gear	CNW1185
42	Gear	CNW1186
43	Gear	CNW1187
44	Gear	CNW1188
45	Clamper	CNW1190
46	Arm	CNW1192
47	Holder	CNW1193
48	Holder	CNW1194
49	Damper	CNW1197
50	Damper	CNW1198
51	Arm	CNW1726
52	Motor Unit(M2)(LOAD/CRG)	CXC4026
53	Screw Unit	CXC8894
54	Arm Assy	CXC8896
55	Washer	CBF1037
56	Washer	CBF1038
57	Arm	CND4554
58	Collar	CNV6906
59	Roller	CNW1196
60	Gear Unit	CXC8893
61	Washer	YE15FTC
62	Chassis Unit	CXE3818
63	Motor Unit(M1)(SPDL)	CXE3767
64	Screw	JFZ20P025FTC
65	Screw	JGZ17P022FTC
66	Screw	EBA1028
67	CD Core Unit (S11STD-T)	CWX3937

12. ELECTRICAL PARTS LIST

NOTE:

- *Parts whose parts numbers are omitted are subject to being not supplied.*
- *The part numbers shown below indicate chip components.*

  Chip Resistor

  RS1/◯S◯◯◯J,RS1/◯◯S◯◯◯J

  Chip Capacitor (except for CQS.....)

  CKS....., CCS....., CSZS.....
- *The ⚠ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.*
- *Meaning of the figures and others in the parentheses in the parts list.*

Example) IC 301 is on the point (face A, 91 of x-axis, and 111 of y-axis) of the corresponding PC board.

IC 301 (A, 91, 111) IC NJM2068V

Unit Number : CWN5178
Unit Name : Mother Unit
Unit Number :
Unit Name : Keyboard Unit
Unit Number : CWX3937
Unit Name : CD Core Unit(S11STD-T)
Unit Number : CWN5179
Unit Name : USB Unit

A

Unit Number : CWN5178
Unit Name : Mother Unit

MISCELLANEOUS

Circuit Symbol and No.		Part No.
IC 101	(B,48,103) IC	NJM4558MD
IC 102	(A,47,121) IC	HA12241FP
IC 103	(A,95,145) IC	TDA7388A
IC 602	(B,42,63) IC	S-93C76ADFJ
IC 603	(A,89,87) IC	PN5040A8
IC 901	(A,148,34) Regulator IC	BD9781HFP
IC 902	(A,167,55) Regulator IC	TB2940HQ
IC 903	(A,160,87) IC	S-812C56AUA-C3K
IC 904	(B,132,51) IC	S-80930CNNB-G80
IC 905	(B,138,62) IC	S-1167B34-M5
IC 907	(A,130,80) IC	R5523N001B
IC 908	(B,140,80) IC	S-80930CNNB-G80
IC 909	(A,128,55) IC	S-1167B34-M5
IC 910	(B,133,60) IC	S-1167B34-M5
IC 912	(B,127,56) IC	BH12PB3WHFV
IC 915	(A,140,76) Regulator IC	NJM2846DL3-33
IC 1601	(A,91,37) IC	R5S72624P144FP
IC 1701	(B,92,54) IC	IS45S16400F-7TLA1
IC 1702	(B,89,34) Flash ROM Unit	PEH281A8
IC 2601	(B,82,19) IC	341S2313
IC 2701	(B,152,8) IC	TC7SH08FUS1

Circuit Symbol and No.		Part No.
Q 101	(B,51,93) Transistor	UMH3N
Q 102	(B,45,93) Transistor	RN4987
Q 103	(B,115,112) Transistor	LTC143EUB
Q 104	(B,111,111) Transistor	2SD1781K
Q 105	(B,107,118) Transistor	2SC4154-11
Q 107	(A,109,75) Transistor	ISA1602AM1
Q 108	(A,108,71) Transistor	ISA1602AM1
Q 109	(A,103,68) Transistor	ISA1602AM1
Q 110	(A,101,63) Transistor	2SC4154-11
Q 112	(B,106,109) Transistor	ISA1602AM1
Q 113	(B,108,114) Transistor	LTC144EUB
Q 401	(B,30,124) Transistor	2SC4154-11
Q 402	(B,16,76) Transistor	2SC4154-11
Q 403	(B,13,78) Transistor	2SC4154-11
Q 404	(A,13,71) Transistor	UMH4N
Q 601	(B,99,77) Transistor	2SD2318F5
Q 801	(B,138,102) Transistor	2SC4154-11
Q 802	(A,108,64) Transistor	LTA144EUB
Q 804	(B,64,103) Transistor	2SC4154-11
Q 805	(B,141,99) Transistor	ISA1602AM1
Q 808	(B,131,107) Transistor	2SC4154-11
Q 901	(B,152,27) Transistor	2SC4154-11
Q 902	(B,159,19) Transistor	SFT1305
Q 906	(B,161,88) Transistor	2SD1767
Q 908	(B,139,75) Transistor	RN4987
Q 909	(B,136,70) Chip Transistor	2SB1689
Q 911	(A,129,60) Transistor	2SB1132
Q 912	(B,144,57) Transistor	2SA2126
Q 913	(B,155,58) Transistor	ISA1602AM1
Q 914	(B,156,63) Transistor	2SC4154-11
Q 915	(B,154,66) Transistor	2SC4154-11
D 101	(B,109,111) Diode	HZU8R2(B3)
D 102	(A,55,123) Diode	UDZS18(B)
D 103	(A,61,123) Diode	UDZS18(B)
D 401	(B,14,82) Diode	CPH5512
D 402	(B,17,88) Diode	CPH5512
D 607	(B,103,83) Diode	1SS352
D 801	(B,124,126) Diode	1SS352
D 802	(B,132,114) Diode	1SS352
D 803	(A,67,120) Diode	1SS352
D 805	(A,38,121) Diode	1SS352

Circuit Symbol and No.		Part No.
D 807	(A,38,117) Diode	1SS352
D 808	(A,38,115) Diode	1SS352
D 809	(B,60,120) Diode	1SS352
D 810	(B,60,123) Diode	UDZS18(B)
D 811	(B,41,142) Diode	UDZS18(B)
D 812	(B,38,142) Diode	UDZS18(B)
D 816	(A,154,107) Diode	ST70-27F
D 901	(A,135,72) Diode	1SR154-400
D 902	(B,151,21) Diode	1SS352
D 903	(B,144,52) Diode	1SR154-400
D 904	(A,135,32) Diode	CMS05
D 907	(B,166,87) Diode	UDZS11(B)
D 910	(A,132,72) Diode	RF101L2S
D 911	(B,153,71) Diode	1SS352
D 912	(B,155,71) Diode	1SS352
D 913	(B,132,53) Diode	1SR154-400
D 914	(B,34,116) Diode	1SR154-400
D 915	(B,31,116) Diode	1SR154-400
D 916	(B,156,106) Diode	1SR154-400
D 917	(B,156,99) Diode	1SR154-400
D 921	(A,161,83) Diode	UDZS16(B)
D 922	(B,154,68) Diode	UDZS10(B)
D 923	(B,147,80) Diode	CMS03
D 924	(A,137,61) Diode	CRG03
D 925	(A,156,56) Diode	1SS352
L 401	(B,14,86) Inductor	LCTC6R8K1608
L 402	(B,13,86) Inductor	LCTC6R8K1608
L 403	(B,12,86) Inductor	LCTC6R8K1608
L 404	(A,22,114) Chip Coil	LCTAW330J2520
L 405	(A,10,88) Inductor	LCTAW2R2J2520
L 406	(A,14,52) Inductor	LCTAW2R2J2520
L 601	(B,72,86) Inductor	CTF1379
L 602	(B,72,94) Inductor	CTF1379
L 603	(A,72,78) Inductor	CTF1389
L 604	(A,90,104) Inductor	CTF1379
L 607	(A,77,70) Inductor	CTF1389
L 608	(A,79,70) Inductor	CTF1744
L 609	(A,82,69) Inductor	LCTAW1R2J2520
L 610	(A,103,106) Inductor	CTF1473
L 801	(A,134,110) Choke Coil 600 uH	CTH1466
L 902	(A,156,12) Inductor	CTF1688
L 903	(A,132,45) Inductor	CTH1253
L 905	(A,133,84) Inductor	CTF1745
L 906	(B,155,51) Inductor	CTF1295
L 907	(A,143,51) Inductor	CTF1788
L 1601	(A,113,25) Inductor	VTL1145
L 1602	(A,110,50) Inductor	CTF1410
L 1603	(A,71,44) Inductor	CTF1735
L 1604	(A,73,43) Inductor	CTF1735
L 1605	(A,71,43) Inductor	CTF1735
L 1701	(B,79,58) Inductor	VTL1145
L 2601	(B,81,24) Inductor	QTL1013
L 2602	(A,131,12) Inductor	CTF1745
L 2616	(A,114,21) Inductor	CTF1735
L 2617	(A,115,21) Inductor	CTF1735
L 2618	(A,116,21) Inductor	CTF1735
TH701	(A,124,93) Thermister	CCX1062
X 601	(A,81,63) Oscillator 74.1 MHz	CSS1758
X 602	(A,82,105) Oscillator 16.93 MHz	CSS1794
X 603	(A,110,85) Oscillator 4.687 5 MHz	CSS1765

Circuit Symbol and No.		Part No.
X 1601	(A,110,35) Oscillator 48.000 MHz	CSS1760
F 601	(B,73,90) Chip EMI Filter	DTL1106
F 602	(B,68,82) Chip EMI Filter	DTL1106
F 902	(A,75,106) Chip EMI Filter	DTL1106
F 903	(B,68,76) Chip EMI Filter	DTL1106
⚠ FU801	(A,87,118) Fuse 5 A	CEK1195
P401	(B,26,117) Surge Protector	IMSA-6802-01Y900
P402	(B,23,121) Surge Protector	IMSA-6802-01Y900
U 401	(A,39,78) FM/AM Tuner Unit	CWE2242
CN601	(A,75,15) Connector	CKS5561
CN801	(A,138,147) Connector	CKM1458
CN802	(A,40,144) Plug	CKM1514
CN901	(A,159,77) Connector	VKN1928
CN1601	(A,87,15) Connector	CKS5561
CN2601	(A,126,86) Connector	CKS3849
CN2602	(A,111,15) Connector	CKS6146
CN2701	(A,143,6) Connector	CKS6238
JA401	(A,15,140) Connector	CKS5700
JA801	(A,68,148) Connector	CKM1466
VL401	(A,27,115) Coil	CTB1115

RESISTORS

R 101	(B,43,97)	RS1/10SR123J
R 102	(B,53,97)	RS1/10SR123J
R 103	(B,43,98)	RS1/10SR102J
R 104	(B,53,98)	RS1/10SR102J
R 105	(B,46,99)	RS1/10SR3002D
R 106	(B,50,99)	RS1/10SR3002D
R 107	(B,46,98)	RS1/10SR3002D
R 108	(B,50,98)	RS1/10SR3002D
R 109	(B,43,102)	RS1/10SR1502D
R 110	(B,53,103)	RS1/10SR1502D
R 111	(B,46,107)	RS1/10SR2202D
R 112	(B,48,107)	RS1/10SR2202D
R 113	(B,44,107)	RS1/10SR2202D
R 114	(B,50,107)	RS1/10SR2202D
R 120	(B,48,114)	RS1/10SR0R0J
R 121	(B,48,113)	RS1/10SR0R0J
R 122	(B,48,116)	RS1/10SR0R0J
R 123	(A,71,113)	RS1/10SR242J
R 124	(A,80,113)	RS1/10SR242J
R 125	(A,77,113)	RS1/10SR242J
R 126	(A,74,113)	RS1/10SR242J
R 127	(A,70,116)	RS1/10SR102J
R 128	(A,81,116)	RS1/10SR102J
R 129	(A,76,116)	RS1/10SR102J
R 130	(A,75,116)	RS1/10SR102J
R 131	(A,81,124)	RS1/10SR754J
R 132	(A,82,124)	RS1/10SR754J
R 133	(B,109,106)	RS1/10SR103J
R 134	(B,111,106)	RS1/10SR103J
R 135	(B,111,108)	RS1/10SR331J
R 136	(B,113,107)	RS1/10SR222J
R 137	(B,115,107)	RS1/10SR103J
R 138	(A,45,115)	RS1/16SS101J
R 139	(A,100,67)	RS1/16SS472J
R 140	(A,107,77)	RS1/16SS333J
R 141	(A,107,72)	RS1/16SS473J
R 142	(A,101,74)	RS1/16SS473J

Circuit Symbol and No.		Part No.
R 143	(A,101,66)	RS1/16SS472J
R 145	(B,110,116)	RS1/10SR223J
R 146	(A,111,75)	RS1/16SS512J
R 147	(A,111,71)	RS1/10SR472J
R 149	(B,108,116)	RS1/10SR104J
R 152	(A,104,65)	RS1/10SR472J
R 153	(A,113,75)	RS1/16SS222J
R 154	(A,112,71)	RS1/10SR103J
R 155	(A,104,64)	RS1/10SR103J
R 158	(B,102,109)	RS1/10SR473J
R 159	(A,57,123)	RS1/4SA101J
R 160	(A,59,123)	RS1/4SA101J
R 161	(B,104,109)	RS1/10SR223J
R 162	(A,86,124)	RS1/10SR103J
R 163	(A,42,119)	RS1/16SS101J
R 339	(A,47,115)	RS1/16SS101J
R 401	(B,28,124)	RS1/16SS472J
R 402	(A,12,106)	RS1/16SS223J
R 403	(B,30,80)	RS1/16SS222J
R 404	(B,15,73)	RS1/16SS104J
R 405	(B,17,82)	RS1/16SS225J
R 406	(B,12,82)	RS1/16SS225J
R 407	(A,14,98)	RS1/16SS225J
R 408	(A,12,98)	RS1/16SS225J
R 409	(B,14,75)	RS1/16SS222J
R 410	(B,11,79)	RS1/16SS104J
R 411	(B,13,72)	RS1/16SS102J
R 412	(A,22,110)	RS1/16SS104J
R 413	(B,30,75)	RS1/16SS222J
R 414	(B,28,90)	RS1/10SR273J
R 415	(B,28,70)	RS1/10SR104J
R 416	(B,28,67)	RS1/10SR104J
R 417	(B,28,65)	RS1/10SR104J
R 418	(B,28,62)	RS1/10SR104J
R 419	(B,28,59)	RS1/10SR102J
R 420	(B,31,63)	RS1/10SR221J
R 421	(B,31,65)	RS1/10SR681J
R 422	(B,31,68)	RS1/10SR681J
R 423	(B,31,70)	RS1/10SR681J
R 424	(B,28,72)	RS1/10SR102J
R 425	(B,28,73)	RS1/10SR102J
R 426	(B,28,82)	RS1/10SR472J
R 607	(B,89,96)	RS1/16SS102J
R 609	(A,72,77)	RS1/16SS0R0J
R 610	(A,72,76)	RS1/16SS0R0J
R 611	(B,76,75)	RS1/16SS103J
R 612	(B,76,79)	RS1/16SS103J
R 613	(A,74,81)	RS1/16SS203J
R 616	(A,74,99)	RS1/16SS223J
R 617	(A,75,92)	RS1/16SS1002F
R 618	(B,74,86)	RS1/16SS1002F
R 619	(B,46,65)	RS1/10SR102J
R 620	(B,44,67)	RS1/10SR102J
R 621	(B,40,67)	RS1/10SR103J
R 622	(A,73,99)	RS1/16SS473J
R 623	(A,72,99)	RS1/16SS473J
R 624	(A,78,73)	RS1/16SS182J
R 625	(B,46,62)	RS1/10SR104J
R 626	(B,48,62)	RS1/10SR473J
R 627	(B,74,102)	RS1/16SS223J

Circuit Symbol and No.		Part No.
R 628	(B,74,103)	RS1/16SS223J
R 629	(A,78,100)	RS1/16SS223J
R 630	(A,82,71)	RS1/16SS470J
R 632	(B,81,76)	RS1/16SS302J
R 633	(A,83,71)	RS1/16SS101J
R 634	(A,79,105)	RS1/16SS221J
R 635	(A,85,73)	RS1/16SS472J
R 636	(B,87,74)	RS1/16SS222J
R 637	(A,89,67)	RS1/16SS102J
R 638	(A,89,70)	RS1/16SS101J
R 639	(A,90,72)	RS1/16SS102J
R 640	(A,91,72)	RS1/16SS102J
R 641	(A,91,71)	RS1/16SS473J
R 642	(B,90,74)	RS1/16SS102J
R 643	(B,91,97)	RS1/16SS222J
R 644	(B,92,97)	RS1/16SS0R0J
R 646	(A,93,105)	RS1/16SS473J
R 647	(A,92,103)	RS1/16SS102J
R 648	(A,94,105)	RS1/16SS101J
R 650	(A,93,103)	RS1/16SS102J
R 651	(A,92,72)	RS1/16SS473J
R 652	(A,94,70)	RS1/16SS102J
R 656	(A,101,69)	RS1/16SS102J
R 659	(B,121,100)	RS1/16SS473J
R 660	(A,95,103)	RS1/16SS101J
R 661	(A,96,103)	RS1/16SS222J
R 662	(A,94,72)	RS1/16SS0R0J
R 663	(A,97,105)	RS1/16SS473J
R 664	(A,97,103)	RS1/16SS101J
R 666	(B,84,97)	RS1/16SS473J
R 667	(A,120,94)	RS1/16SS472J
R 668	(A,95,72)	RS1/16SS0R0J
R 669	(B,118,71)	RS1/16SS473J
R 672	(A,118,97)	RS1/16SS472J
R 675	(A,101,70)	RS1/16SS473J
R 676	(A,107,86)	RS1/16SS0R0J
R 677	(B,101,83)	RS1/16SS102J
R 678	(A,106,107)	RS1/16SS473J
R 679	(A,109,106)	RS1/16SS473J
R 680	(A,108,105)	RS1/16SS473J
R 681	(A,109,104)	RS1/16SS473J
R 682	(B,116,88)	RS1/16SS101J
R 683	(B,115,87)	RS1/16SS0R0J
R 684	(B,114,89)	RS1/16SS101J
R 685	(B,114,87)	RS1/16SS101J
R 686	(A,109,103)	RS1/16SS101J
R 687	(A,109,101)	RS1/16SS101J
R 688	(A,109,100)	RS1/16SS102J
R 691	(B,128,83)	RS1/16SS102J
R 692	(A,118,100)	RS1/16SS101J
R 693	(A,118,99)	RS1/16SS101J
R 694	(A,118,95)	RS1/16SS101J
R 695	(A,118,96)	RS1/16SS101J
R 696	(A,108,93)	RS1/16SS102J
R 697	(A,120,95)	RS1/16SS101J
R 699	(A,107,74)	RS1/16SS102J
R 700	(A,110,73)	RS1/16SS102J
R 701	(A,112,73)	RS1/16SS102J
R 702	(A,106,71)	RS1/16SS102J
R 704	(A,112,67)	RS1/16SS102J

Circuit Symbol and No.		Part No.	Circuit Symbol and No.		Part No.
R 705	(A,103,71)	RS1/16SS102J	R 912	(A,134,63)	RS1/10SR0R0J
R 706	(B,105,92)	RS1/16SS221J	R 914	(A,139,29)	RS1/16SS1502D
R 707	(B,102,96)	RS1/16SS221J	R 915	(A,141,29)	RS1/16SS1803D
R 714	(B,98,95)	RS1/16SS473J	R 916	(A,141,28)	RS1/16SS4702D
R 715	(A,110,102)	RS1/16SS472J	R 917	(A,137,30)	RS1/16SS0R0J
R 716	(B,94,99)	RS1/16SS472J	R 920	(B,162,83)	RS1/10SR681J
R 719	(B,97,87)	RS1/16SS102J	R 923	(B,160,82)	RS1/10SR1R0J
R 720	(B,103,86)	RS1/16SS473J	R 925	(A,136,63)	RS1/10SR0R0J
R 721	(B,115,71)	RS1/16SS473J	R 926	(B,135,73)	RS1/10SR472J
R 722	(A,103,74)	RS1/16SS472J	R 927	(B,135,68)	RS1/10SR222J
R 723	(B,128,84)	RS1/16SS473J	R 928	(B,139,73)	RS1/10SR222J
R 724	(A,110,93)	RS1/16SS104J	R 929	(B,141,75)	RS1/10SR104J
R 726	(B,118,72)	RS1/16SS103J	R 930	(B,156,80)	RS1/8S511J
R 727	(B,117,73)	RS1/16SS122J	R 932	(A,131,67)	RS1/10S100J
R 728	(B,116,72)	RS1/16SS122J	R 937	(A,128,81)	RS1/10SR102J
R 729	(A,108,67)	RS1/16SS473J	R 938	(B,140,70)	RS1/10SR473J
R 731	(A,113,93)	RS1/16SS102J	R 939	(A,126,58)	RS1/16SS0R0J
R 732	(A,113,92)	RS1/16SS102J	R 940	(A,125,55)	RS1/16SS103J
R 733	(B,85,97)	RS1/16SS101J	R 941	(B,134,57)	RS1/16SS473J
R 734	(B,82,97)	RS1/16SS101J	R 951	(B,156,69)	RS1/10SR1802D
R 735	(A,95,107)	RS1/16SS473J	R 952	(B,156,71)	RS1/10SR4702D
R 736	(A,92,71)	RS1/16SS102J	R 953	(B,156,74)	RS1/10SR5602D
R 737	(A,104,101)	RS1/16SS473J	R 954	(B,153,36) 62 kohm	CCN1309
R 740	(A,99,70)	RS1/16SS473J	R 955	(B,153,34) 10 kohm	CCN1308
R 801	(B,141,97)	RS1/10SR103J	R 956	(B,150,57)	RS1/10SR223J
R 803	(B,140,102)	RS1/10SR473J	R 957	(B,152,57)	RS1/10SR224J
R 804	(B,142,102)	RS1/10SR103J	R 958	(B,154,56)	RS1/10SR182J
R 806	(B,144,99)	RS1/10SR473J	R 959	(B,152,59)	RS1/10SR220J
R 807	(B,144,102)	RS1/10SR102J	R 960	(A,162,91)	RS1/10SR225J
R 809	(B,66,103)	RS1/16SS511J	R 961	(B,155,60)	RS1/10SR472J
R 810	(B,67,103)	RS1/16SS392J	R 962	(B,156,77)	RS1/8S511J
R 811	(B,124,127)	RS1/10SR510J	R 972	(A,170,65)	RS1/16SS0R0J
R 812	(B,76,121)	RS1/10SR103J	R 973	(B,137,55)	RS1/10SR102J
R 813	(B,72,121)	RS1/10SR103J	R 1601	(A,79,23)	RS1/16SS104J
R 814	(B,69,121)	RS1/10SR103J	R 1602	(A,80,22)	RS1/16SS0R0J
R 815	(B,65,121)	RS1/10SR103J	R 1603	(A,74,47)	RS1/16SS101J
R 816	(B,64,123)	RS1/10SR183J	R 1604	(A,76,47)	RS1/16SS473J
R 817	(B,70,123)	RS1/10SR183J	R 1605	(A,73,45)	RS1/16SS473J
R 818	(B,71,123)	RS1/10SR183J	R 1608	(A,75,53)	RS1/16SS473J
R 819	(B,77,123)	RS1/10SR183J	R 1612	(A,75,50)	RS1/16SS473J
R 823	(B,131,100)	RS1/10SR0R0J	R 1613	(A,83,53)	RS1/16SS332J
R 825	(B,133,104)	RS1/10SR0R0J	R 1614	(B,95,45)	RS1/16SS101J
R 828	(B,135,100)	RS1/10SR471J	R 1615	(A,113,54)	RS1/16SS101J
R 829	(B,137,105)	RS1/10SR0R0J	R 1616	(A,113,53)	RS1/16SS101J
R 834	(A,68,125)	RS1/8SQ102J	R 1617	(A,114,52)	RS1/16SS101J
R 835	(A,38,123)	RS1/10SR0R0J	R 1618	(A,114,51)	RS1/16SS101J
R 836	(B,58,122)	RS1/8SQ102J	R 1619	(A,114,50)	RS1/16SS101J
R 837	(A,58,117) 68 ohm	CCN1318	R 1620	(A,114,49)	RS1/16SS101J
R 838	(A,34,121)	RS1/10SR102J	R 1621	(B,104,36)	RS1/16SS101J
R 840	(B,137,113)	RS1/8SQ472J	R 1624	(B,79,52)	RS1/16SS473J
R 901	(B,149,26)	RS1/10SR122J	R 1625	(B,80,49)	RS1/16SS473J
R 902	(A,141,35)	RS1/16SS753J	R 1626	(A,116,46)	RS1/16SS472J
R 903	(B,154,25)	RS1/10SR682J	R 1627	(A,115,46)	RS1/16SS472J
R 905	(B,154,29)	RS1/10SR122J	R 1628	(A,114,46)	RS1/16SS472J
R 906	(B,164,83)	RS1/10SR681J	R 1629	(A,100,20)	RS1/16SS105J
R 907	(B,150,26)	RS1/10SR3R3J	R 1630	(A,113,46)	RS1/16SS472J
R 908	(A,140,33)	RS1/16SS153J	R 1631	(B,91,15)	RS1/16SS102J
R 909	(B,165,83)	RS1/10SR681J	R 1632	(A,102,23)	RS1/16SS473J
R 910	(A,143,28)	RS1/16SS221J	R 1633	(B,103,29)	RS1/16SS473J
R 911	(B,154,62)	RS1/10SR824J	R 1634	(B,103,28)	RS1/16SS473J

Circuit Symbol and No.		Part No.
R 1637	(A,110,43)	RS1/16SS473J
R 1638	(A,106,42)	RS1/16SS5601F
R 1639	(B,104,37)	RS1/16SS472J
R 1640	(A,106,37)	RS1/16SS102J
R 1641	(A,114,35)	RS1/16SS473J
R 1642	(A,112,31)	RS1/16SS473J
R 1643	(A,112,30)	RS1/16SS473J
R 1644	(A,106,28)	RS1/16SS473J
R 1645	(A,108,28)	RS1/16SS473J
R 1646	(A,108,43)	RS1/16SS103J
R 1647	(A,106,40)	RS1/16SS101J
R 1648	(A,101,20)	RS1/16SS101J
R 1654	(A,95,19)	RS1/16SS101J
R 1655	(B,78,49)	RS1/16SS473J
R 1667	(A,65,40)	RS1/16SS472J
R 1668	(A,71,39)	RS1/16SS472J
R 1670	(B,78,51)	RS1/16SS473J
R 1671	(A,73,51)	RS1/16SS473J
R 1672	(A,113,45)	RS1/16SS473J
R 1701	(A,93,64)	RS1/16SS472J
R 1702	(A,95,64)	RS1/16SS472J
R 1703	(A,96,64)	RS1/16SS472J
R 1705	(B,105,57)	RS1/16SS220J
R 1706	(B,93,61)	RS1/16SS220J
R 1707	(B,95,61)	RS1/16SS220J
R 1708	(B,96,61)	RS1/16SS220J
R 1709	(B,97,61)	RS1/16SS220J
R 1710	(B,105,55)	RS1/16SS220J
R 1711	(B,105,54)	RS1/16SS220J
R 1712	(B,105,56)	RS1/16SS220J
R 1713	(B,99,61)	RS1/16SS220J
R 1714	(B,100,63)	RS1/16SS220J
R 1715	(B,101,61)	RS1/16SS220J
R 1716	(B,102,63)	RS1/16SS220J
R 1717	(B,97,45)	RS1/16SS472J
R 1718	(B,105,53)	RS1/16SS220J
R 1719	(B,107,52)	RS1/16SS220J
R 1720	(B,105,52)	RS1/16SS220J
R 1721	(B,107,51)	RS1/16SS220J
R 1722	(B,105,50)	RS1/16SS220J
R 1723	(B,105,49)	RS1/16SS220J
R 1724	(B,104,48)	RS1/16SS220J
R 1727	(B,83,41)	RS1/16SS220J
R 1728	(B,71,34)	RS1/16SS220J
R 1729	(B,84,41)	RS1/16SS220J
R 1730	(B,72,32)	RS1/16SS220J
R 1731	(B,85,41)	RS1/16SS220J
R 1732	(B,72,34)	RS1/16SS220J
R 1733	(B,86,41)	RS1/16SS220J
R 1734	(B,73,32)	RS1/16SS220J
R 1735	(B,87,41)	RS1/16SS220J
R 1736	(B,73,30)	RS1/16SS220J
R 1737	(B,88,41)	RS1/16SS220J
R 1738	(B,71,29)	RS1/16SS220J
R 1739	(B,89,41)	RS1/16SS220J
R 1740	(B,73,28)	RS1/16SS220J
R 1741	(B,90,41)	RS1/16SS220J
R 1742	(B,71,27)	RS1/16SS220J
R 1743	(B,77,29)	RS1/16SS220J
R 1745	(B,77,27)	RS1/16SS472J

Circuit Symbol and No.		Part No.
R 1746	(B,73,26)	RS1/16SS472J
R 1747	(B,98,63)	RS1/10SR473J
R 2601	(B,80,23)	RS1/16SS104J
R 2602	(B,102,14)	RS1/16SS472J
R 2603	(A,120,28)	RS1/16SS473J
R 2604	(B,107,15)	RS1/16SS473J
R 2605	(B,101,14)	RS1/16SS222J
R 2606	(B,111,15)	RS1/16SS105J
R 2607	(B,100,14)	RS1/16SS222J
R 2609	(A,119,28)	RS1/16SS103J
R 2610	(A,106,21)	RS1/16SS221J
R 2611	(A,107,21)	RS1/16SS221J
R 2612	(A,108,21)	RS1/16SS101J
R 2613	(A,109,21)	RS1/16SS221J
R 2614	(A,110,21)	RS1/16SS101J
R 2615	(A,111,21)	RS1/16SS102J
R 2619	(A,119,21)	RS1/16SS221J
R 2620	(B,78,17)	RS1/16SS104J
R 2621	(A,125,80)	RS1/16SS0R0J
R 2622	(A,123,80)	RS1/16SS0R0J
R 2623	(B,117,23)	RS1/16SS104J
R 2624	(B,81,14)	RS1/16SS103J
R 2625	(B,82,14)	RS1/16SS103J
R 2626	(B,78,18)	RS1/16SS101J
R 2627	(B,78,21)	RS1/16SS101J
R 2628	(B,85,22)	RS1/16SS102J
R 2629	(B,108,24)	RS1/16SS104J
R 2631	(B,86,20)	RS1/16SS105J
R 2701	(B,149,9)	RS1/10SR471J
R 2702	(B,136,8)	RS1/10SR471J
R 2703	(B,146,13)	RS1/10SR471J
R 2705	(B,144,13)	RS1/10SR471J
R 2707	(B,142,14)	RS1/10SR473J

CAPACITORS

C 101	(B,43,99)		CKSRYB105K10
C 102	(B,53,99)		CKSRYB105K10
C 103	(B,46,97)		CCSRCH330J50
C 104	(B,50,97)		CCSRCH330J50
C 105	(B,42,102)		CCSRCH330J50
C 106	(B,54,103)		CCSRCH330J50
C 107	(B,46,110)		CKSQYB225K16
C 108	(B,48,110)		CKSQYB225K16
C 109	(B,44,110)		CKSQYB225K16
C 110	(B,50,110)		CKSQYB225K16
C 111	(B,43,105)		CKSSYB104K10
C 112	(A,82,115)		CKSRYB473K50
C 113	(A,70,114)		CKSRYB102K50
C 114	(A,80,114)		CKSRYB102K50
C 115	(A,77,114)		CKSRYB102K50
C 116	(A,74,114)		CKSRYB102K50
C 117	(A,71,116)		CKSRYB102K50
C 118	(A,80,116)		CKSRYB102K50
C 119	(A,78,116)		CKSRYB102K50
C 120	(A,73,116)		CKSRYB102K50
C 121	(A,71,120)	0.22 uF/50 V	CCG1315
C 122	(A,81,120)	0.22 uF/50 V	CCG1315
C 123	(A,78,120)	0.22 uF/50 V	CCG1315
C 124	(A,74,120)	0.22 uF/50 V	CCG1315

Circuit Symbol and No.			Part No.	Circuit Symbol and No.			Part No.
C 125	(A,72,124)	0.22 uF/50 V	CCG1314	C 640	(A,75,80)		CKSSYB331K50
C 126	(A,79,124)	0.22 uF/50 V	CCG1314	C 642	(A,74,77)		CKSSYB102K50
C 127	(A,77,124)	0.22 uF/50 V	CCG1314	C 643	(A,74,76)		CKSSYB102K50
C 128	(A,74,124)	0.22 uF/50 V	CCG1314	C 644	(A,75,78)		CKSSYB104K10
C 129	(A,97,133)	33 uF/16 V	CCH1999	C 646	(A,78,72)		CKSSYB103K16
C 130	(B,89,127)	1 uF	CCG1305	C 647	(A,78,71)		CKSSYB105K6R3
C 131	(B,89,125)	1 uF	CCG1305	C 648	(A,80,72)		CKSRYB103K50
C 132	(A,112,75)		CKSRYB224K16	C 649	(A,80,67)		CCSSCK2R0C50
C 133	(A,87,133)	10 uF/16 V	CCH1998	C 650	(B,37,63)		CKSSYB104K10
C 134	(A,44,119)		CKSSYB104K10	C 651	(A,76,66)		CKSSYB103K16
C 135	(A,87,127)	Capacitor	CEHVW1R0M50	C 652	(A,81,102)		CKSSYB103K16
C 136	(B,115,126)		CKSRYB104K50	C 653	(A,84,66)		CKSSYB102K50
C 137	(B,118,126)		CKSRYB104K50	C 654	(A,82,66)		CCSSCH8R0D50
C 401	(B,11,76)		CKSSYB102K50	C 655	(B,80,74)		CKSSYB103K16
C 402	(B,24,126)		CCSQCH101J50	C 656	(A,79,106)		CCSSCH100D50
C 403	(B,27,126)		CKSQYB103K50	C 657	(B,94,82)		CKSQYB106K6R3
C 404	(B,26,115)		CKSSYB102K50	C 658	(A,82,103)		CKSRYB103K50
C 405	(B,23,115)		CKSSYB102K50	C 659	(A,84,106)		CCSSCH100D50
C 406	(A,13,74)		CKSSYB104K16	C 661	(B,82,77)		CKSSYB105K6R3
C 407	(A,14,95)		CKSSYB222K50	C 662	(A,84,103)		CKSSYB105K6R3
C 408	(A,22,111)		CKSSYB103K16	C 663	(A,86,103)		CKSSYB224K6R3
C 409	(A,13,81)		CEVW101M16	C 665	(B,86,74)		CKSSYB103K16
C 410	(A,13,86)		CKSRYB103K50	C 666	(A,87,103)		CKSSYB224K6R3
C 411	(A,13,88)		CKSRYB103K50	C 667	(B,89,74)		CKSSYB103K16
C 412	(B,28,89)		CKSSYB102K50	C 668	(A,88,103)		CKSSYB224K6R3
C 413	(B,28,68)		CCSRCH390J50	C 669	(A,90,102)		CKSSYB104K10
C 414	(B,28,63)		CCSRCH100D50	C 672	(B,102,94)		CKSSYB103K16
C 416	(A,11,59)	Capacitor	CEVW470M16	C 673	(A,105,83)		CKSSYB103K16
C 417	(A,12,52)		CKSSYB102K50	C 674	(B,104,86)	4.7 uF	CCG1201
C 420	(A,14,49)		CKSRYB105K10	C 675	(A,104,81)		CKSSYB103K16
C 421	(A,29,124)		CKSQYB102K50	C 676	(A,105,81)		CKSSYB103K16
C 601	(B,42,91)		CKSRYB105K10	C 677	(A,107,84)		CCSSCH220J50
C 602	(B,54,91)		CKSRYB105K10	C 678	(A,107,89)		CCSSCH220J50
C 603	(B,60,112)		CKSRYB105K16	C 679	(B,101,86)		CKSSYB103K16
C 604	(B,57,112)		CKSRYB105K16	C 680	(A,118,107)		CKSSYB102K50
C 605	(B,62,112)		CKSRYB105K16	C 681	(A,119,108)		CKSRYB105K10
C 606	(B,59,112)		CKSRYB105K16	C 682	(A,74,102)		CKSSYB104K10
C 611	(A,87,105)		CKSRYB105K10	C 683	(A,74,101)		CKSRYB105K10
C 613	(B,76,76)		CKSSYB562K25	C 684	(A,102,107)		CKSSYB102K50
C 614	(B,76,78)		CKSSYB562K25	C 685	(A,101,106)		CKSRYB105K10
C 615	(B,76,83)		CKSSYB105K6R3	C 686	(A,71,80)		CKSSYB104K10
C 616	(B,87,96)		CKSSYB102K50	C 687	(A,71,81)		CKSRYB105K10
C 619	(A,74,79)		CKSSYB105K6R3	C 688	(B,74,84)		CKSSYB104K10
C 620	(A,74,92)		CKSSYB104K10	C 693	(B,83,97)		CCSSCH121J50
C 621	(B,80,91)		CKSYB226K6R3	C 801	(B,138,101)		CKSRYB103K50
C 622	(B,77,92)		CKSSYB104K10	C 802	(B,121,127)		CKSRYB103K50
C 623	(B,83,92)		CKSQYB225K10	C 803	(B,58,147)		CKSQYB102K50
C 624	(B,75,90)		CKSSYB104K10	C 804	(B,46,142)		CKSQYB221K50
C 625	(B,80,86)		CKSYB226K6R3	C 805	(B,45,142)		CKSQYB102K50
C 626	(B,83,86)		CKSQYB225K10	C 806	(B,62,122)		CKSQYB102K50
C 627	(B,69,87)		CKSRYB105K10	C 807	(B,129,141)		CKSQYB102K50
C 628	(B,72,81)		CKSRYB105K10	C 808	(B,132,141)		CKSRYB183K50
C 630	(B,81,82)		CKSQYB225K10	C 810	(B,128,141)		CKSRYB183K50
C 631	(B,76,82)		CKSSYB104K10	C 811	(B,39,142)		CKSQYB221K50
C 632	(B,77,95)		CKSSYB104K10	C 812	(B,131,141)		CKSRYB183K50
C 633	(B,74,93)		CKSSYB104K10	C 813	(B,136,141)		CKSRYB183K50
C 634	(B,77,88)		CKSSYB104K10	C 814	(B,76,125)		CKSQYB102K50
C 637	(B,74,81)		CKSSYB105K6R3	C 815	(B,36,142)		CKSQYB221K50
C 638	(B,77,76)		CKSSYB331K50	C 817	(B,72,125)		CKSQYB102K50
C 639	(B,77,78)		CKSSYB331K50	C 818	(B,138,141)		CKSRYB183K50

Circuit Symbol and No.			Part No.
C 819	(B,69,125)		CKSQYB102K50
C 820	(B,84,117)	10 uF	CCG1236
C 821	(B,144,141)		CKSQYB473K50
C 822	(B,65,125)		CKSQYB102K50
C 823	(B,36,123)		CKSQYB102K50
C 824	(B,149,141)		CKSQYB102K50
C 825	(A,64,125)		CKSQYB221K50
C 827	(B,134,141)		CKSRYB183K50
C 828	(A,64,123)		CKSQYB221K50
C 829	(A,68,123)		CKSQYB473K50
C 831	(B,137,141)		CKSRYB183K50
C 834	(B,126,141)		CKSRYB183K50
C 838	(B,38,123)		CKSQYB102K50
C 841	(A,86,113)		CKSQYB104K50
C 845	(A,147,90)	3 300 uF/16 V	CCH2010(P35)
C 847	(B,139,112)		CKSRYB103K50
C 901	(A,150,45)	Capacitor	CEHVW221M16
C 902	(A,144,40)	10 uF	CCG1236
C 904	(B,135,50)		CKSSYB102K50
C 905	(A,139,35)		CKSRYB104K16
C 907	(B,135,51)		CKSRYB472K50
C 909	(A,156,19)		CEHVAW101M25
C 910	(A,140,31)		CKSSYB103K16
C 911	(A,163,21)		CKSRYB103K50
C 914	(A,163,27)	100 uF/25 V	CCH2000
C 915	(A,169,34)		CKSRYB103K50
C 916	(B,130,51)		CKSSYB223K16
C 919	(B,164,86)		CKSRYB103K50
C 920	(A,146,54)	10 uF	CCG1236
C 924	(A,129,33)	Capacitor	CEHVW221M16
C 925	(B,153,32)		CKSRYB102K50
C 926	(A,171,66)		CKSSYB102K50
C 927	(A,150,77)	Capacitor	CEHVW470M16
C 928	(B,135,72)	2.2 uF	CCG1205
C 929	(A,171,64)		CKSSYB102K50
C 932	(A,140,65)	4.7 uF	CCG1201
C 933	(B,138,58)		CKSRYB104K16
C 935	(B,139,64)		CKSSYB102K50
C 936	(B,142,79)		CKSSYB102K50
C 937	(B,138,67)	10 uF	CCG1192
C 941	(A,136,55)	10 uF	CCG1192
C 942	(B,138,80)		CKSRYB472K50
C 943	(A,132,77)		CKSRYB104K16
C 945	(B,138,70)		CKSRYB103K50
C 948	(B,140,77)		CKSSYB223K16
C 950	(A,131,83)		CKSRYB104K16
C 951	(B,153,40)	10 uF	DCH1165
C 952	(B,154,41)		CKSRYB103K50
C 954	(B,154,48)	10 uF	DCH1165
C 955	(B,153,50)		CKSRYB103K50
C 956	(A,131,54)	22 uF	DCH1256
C 957	(B,153,52)		CKSRYB103K50
C 959	(B,134,62)		CKSQYB225K10
C 960	(B,153,38)	10 uF	CCG1236
C 963	(B,131,57)	10 uF	CCG1192
C 964	(A,170,48)	10 uF	CCG1236
C 969	(B,129,59)		CKSQYB225K10
C 970	(A,170,61)	10 uF	CCG1236
C 974	(B,126,58)	10 uF	CCG1192
C 975	(A,146,66)		CEHAT471M16(P35)

Circuit Symbol and No.			Part No.
C 978	(A,138,68)		CKSRYB105K10
C 981	(A,132,23)	470 uF/25 V	CCH2002(P35)
C 982	(A,124,55)		CKSSYB105K6R3
C 983	(B,135,57)		CKSSYB102K50
C 984	(A,170,63)		CKSRYB102K50
C 985	(A,143,19)	2 200 uF/16 V	CCH2001(P35)
C 986	(A,151,26)		CKSRYB473K50
C 987	(A,154,70)		CEVW2R2M50
C 989	(A,161,91)		CKSRYB104K50
C 990	(A,154,65)	10 uF	DCH1165
C 991	(B,152,63)		CKSRYB103K50
C 992	(A,152,57)	100 uF/16 V	CCH1962
C 993	(B,152,60)		CCSRCH221J50
C 994	(A,170,44)	10 uF	DCH1165
C 995	(A,154,63)	10 uF	DCH1165
C 1617	(B,78,45)		CCSSCH220J50
C 1619	(A,76,43)		CKSSYB104K10
C 1620	(A,77,38)		CKSSYB104K10
C 1621	(A,76,30)		CKSSYB104K10
C 1622	(A,76,28)		CKSSYB104K10
C 1623	(A,76,42)		CKSSYB104K10
C 1624	(A,77,34)		CKSSYB104K10
C 1625	(A,80,53)		CKSSYB104K10
C 1626	(A,82,53)		CKSSYB104K10
C 1627	(A,83,23)		CKSSYB104K10
C 1628	(A,85,22)		CKSSYB104K10
C 1629	(A,85,53)		CKSSYB104K10
C 1630	(A,87,53)		CKSSYB104K10
C 1631	(A,89,23)		CKSSYB104K10
C 1632	(A,91,22)		CKSSYB104K10
C 1633	(A,91,53)		CKSSYB104K10
C 1634	(A,93,53)		CKSSYB104K10
C 1635	(A,95,23)		CKSSYB104K10
C 1636	(A,96,22)		CKSSYB104K10
C 1637	(A,98,53)		CKSSYB104K10
C 1638	(A,99,53)		CKSSYB104K10
C 1639	(A,100,22)		CKSSYB104K10
C 1640	(A,101,22)		CKSSYB104K10
C 1641	(A,100,21)		CKSSYB103K16
C 1642	(A,106,47)		CKSSYB104K10
C 1643	(A,105,47)		CKSSYB104K10
C 1644	(A,106,45)		CKSSYB104K10
C 1645	(A,106,43)		CKSSYB104K10
C 1646	(B,104,43)		CKSSYB104K10
C 1647	(B,104,41)		CKSSYB104K10
C 1648	(B,104,38)		CKSSYB104K10
C 1649	(B,104,35)		CKSSYB104K10
C 1650	(A,106,30)		CKSSYB104K10
C 1651	(A,106,26)		CKSSYB104K10
C 1652	(B,106,33)		CKSSYB104K10
C 1653	(A,111,26)	10 uF	CCG1192
C 1654	(A,106,52)	10 uF	CCG1192
C 1655	(A,107,37)		CCSSCH100D50
C 1656	(A,107,35)		CCSSCH100D50
C 1659	(A,108,42)		CKSSYB105K6R3
C 1660	(A,114,30)		CKSSYB102K50
C 1661	(A,115,26)	10 uF	CCG1192
C 1662	(A,110,47)	10 uF	CCG1192
C 1663	(A,71,47)		CCSSCH101J50
C 1664	(A,109,45)		CKSSYB102K50

Circuit Symbol and No.		Part No.
C 1701	(B,79,60)	CKSSYB102K50
C 1702	(B,82,61)	CKSSYB104K10
C 1703	(B,85,61)	CKSSYB104K10
C 1704	(B,90,61)	CKSSYB104K10
C 1705	(B,92,61)	CKSSYB104K10
C 1706	(B,103,61)	CKSSYB104K10
C 1707	(B,83,45)	CKSSYB104K10
C 1708	(B,88,45)	CKSSYB104K10
C 1709	(B,94,45)	CCSSCH180J50
C 1710	(B,103,31)	CKSSYB103K16
C 1711	(B,78,33)	CKSSYB104K10
C 1712	(B,76,33) 10 uF	CCG1192
C 2601	(B,87,20)	CKSSYB104K10
C 2602	(B,85,20)	CKSSYB103K16
C 2605	(B,105,24)	CKSSYB102K50
C 2608	(B,110,15)	CKSSYB102K50
C 2609	(B,115,24)	CCSSCH101J50
C 2610	(B,114,24)	CCSSCH101J50
C 2611	(B,113,24)	CCSSCH101J50
C 2612	(B,109,24)	CKSSYB103K16
C 2613	(A,129,15)	CKSSYB102K50
C 2640	(B,78,20)	CCSSCH470J50
C 2641	(B,78,19)	CCSSCH470J50
C 2642	(B,110,24)	CCSSCH470J50
C 2643	(B,107,24)	CCSSCH470J50
C 2701	(B,140,12)	CKSSYB102K50
C 2703	(B,145,8)	CCSRCH101J50
C 2705	(B,146,8)	CCSRCH101J50
C 2706	(B,147,9)	CCSRCH101J50
C 2707	(B,151,8)	CKSSYB104K10

B

Unit Number :
Unit Name : Keyboard Unit

MISCELLANEOUS

IC 2001	(B,157,69) IC	BU6886KVT
IC 2002	(B,60,37) IC	PE5752A8
Q 2024	(B,263,83) Transistor	2SB1132
Q 2028	(B,230,42) Transistor	2SB1198K
Q 2031	(B,167,44) Transistor	ISA1602AM1
Q 2035	(B,262,75) Transistor	LSC4081UB
Q 2038	(B,226,46) Transistor	LSC4081UB
D 2005	(B,159,52) Diode	RB751V-40
D 2010	(B,163,52) Diode	1SS352
D 2011	(B,165,55) Diode	HZU8R2(B1)
D 2108	(B,81,45) Diode	1SS352
D 2109	(B,84,45) Diode	1SS352
D 2110	(B,81,38) Diode	1SS352
D 2111	(B,81,36) Diode	1SS352
D 2112	(A,185,44) Chip LED	VMW1141CX-17
D 2113	(A,211,44) Chip LED	VMW1141CX-17
D 2114	(A,157,44) Chip LED	VMW1141CX-17
D 2115	(A,101,44) Chip LED	VMW1141CX-17
D 2116	(A,259,103) Chip LED	VMW1141CX-17
D 2117	(A,273,118) Chip LED	VMW1141CX-17
D 2118	(A,13,103) Chip LED	VMW1141CX-17
D 2119	(A,27,118) Chip LED	VMW1141CX-17
D 2120	(A,13,118) Chip LED	VMW1141CX-17

Circuit Symbol and No.		Part No.
D 2121	(A,27,103) Chip LED	VMW1141CX-17
D 2122	(A,259,118) Chip LED	VMW1141CX-17
D 2123	(A,273,103) Chip LED	VMW1141CX-17
D 2124	(A,74,44) Chip LED	VMW1141CX-17
D 2125	(A,129,44) Chip LED	VMW1141CX-17
D 2126	(A,111,17) Chip LED	VMW1141CX-17
D 2127	(A,175,17) Chip LED	VMW1141CX-17
D 2128	(A,27,21) Chip LED	VMW1141CX-17
D 2129	(A,260,68) Chip LED	VMW1141CX-17
D 2130	(A,26,68) Chip LED	VMW1141CX-17
D 2131	(A,76,110) Chip LED	VMW1141CX-17
D 2132	(A,63,109) Chip LED	VMW1141CX-17
D 2133	(A,223,109) Chip LED	VMW1141CX-17
D 2134	(A,210,110) Chip LED	VMW1141CX-17
D 2135	(A,26,44) Chip LED	VMW1141CX-17
D 2136	(A,260,44) Chip LED	VMW1141CX-17
D 2137	(A,259,21) Chip LED	VMW1141CX-17
D 2138	(A,57,81) LED	NSSB064R1A5222
D 2139	(A,57,70) LED	NSSB064R1A5222
D 2142	(A,229,70) LED	NSSB064R1A5222
D 2143	(A,229,81) LED	NSSB064R1A5222
L 2001	(B,158,48) Inductor	CTF1473
L 2002	(B,65,50) Inductor	CTF1473
X 2001	(B,61,49) Oscillator 20.000 MHz	CSS1747
S 2040	(A,20,111) Encoder(PWR/VOL)	CSD1172
S 2052	(A,266,111) Encoder(TUNE/SCROLL)	CSD1137
CN2001	(B,198,73) Connector	CKS6238
CN2002	(B,68,12) Connector	CKS5561
V 2001	(A,143,77) LCD	CAW1993

RESISTORS

R 2011	(B,152,60)	RS1/16SS184J
R 2012	(B,147,55)	RS1/16SS681J
R 2013	(B,148,55)	RS1/16SS221J
R 2014	(B,150,55)	RS1/16S681J
R 2016	(B,152,55)	RS1/16S681J
R 2022	(B,153,51)	RS1/16SS473J
R 2028	(B,48,38)	RS1/16S681J
R 2029	(B,159,59)	RS1/16SS182J
R 2030	(B,161,58)	RS1/16SS182J
R 2031	(B,161,59)	RS1/16SS182J
R 2032	(B,163,58)	RS1/16SS182J
R 2038	(B,167,51)	RS1/16SS681J
R 2042	(B,104,74)	RS1/10SR821J
R 2045	(B,247,78)	RS1/10SR181J
R 2051	(B,260,93)	RS1/10SR821J
R 2054	(B,262,90)	RS1/10SR821J
R 2057	(B,249,76)	RS1/10SR181J
R 2059	(B,55,116)	RS1/16SS100J
R 2060	(B,65,114)	RS1/16SS100J
R 2066	(B,237,18)	RS1/10SR181J
R 2070	(B,236,24)	RS1/10SR221J
R 2086	(B,24,94)	RS1/16SS100J
R 2087	(B,88,31)	RS1/10SR181J
R 2089	(B,15,93)	RS1/16SS100J
R 2091	(B,270,64)	RS1/10SR181J
R 2095	(B,270,55)	RS1/10SR181J
R 2099	(B,263,94)	RS1/16SS100J
R 2102	(B,243,115)	RS1/16SS100J

Circuit Symbol and No.		Part No.
R 2122	(B,124,26)	RS1/10SR102J
R 2125	(B,123,61)	RS1/10SR821J
R 2128	(B,76,32)	RS1/16SS473J
R 2129	(B,74,32)	RS1/16SS473J
R 2130	(B,73,32)	RS1/16SS473J
R 2131	(B,66,28)	RS1/16SS473J
R 2132	(B,66,25)	RS1/16SS473J
R 2133	(B,66,30)	RS1/16SS473J
R 2134	(B,66,27)	RS1/16SS473J
R 2135	(B,69,43)	RS1/16SS473J
R 2136	(B,69,42)	RS1/16SS102J
R 2137	(B,71,41)	RS1/16SS102J
R 2138	(B,69,40)	RS1/16SS102J
R 2139	(B,71,40)	RS1/16SS102J
R 2140	(B,71,39)	RS1/16SS102J
R 2141	(B,69,38)	RS1/16SS102J
R 2142	(B,71,37)	RS1/16SS102J
R 2143	(B,69,37)	RS1/16SS102J
R 2145	(B,69,33)	RS1/16SS102J
R 2148	(B,62,28)	RS1/16SS102J
R 2149	(B,62,26)	RS1/16SS102J
R 2150	(B,61,28)	RS1/16SS102J
R 2151	(B,61,26)	RS1/16SS102J
R 2153	(B,57,23)	RS1/16SS473J
R 2154	(B,59,28)	RS1/16SS102J
R 2155	(B,60,46)	RS1/16SS0R0J
R 2156	(B,58,26)	RS1/16SS102J
R 2157	(B,58,28)	RS1/16SS102J
R 2159	(B,57,26)	RS1/16SS102J
R 2160	(B,58,47)	RS1/16SS101J
R 2161	(B,55,50)	RS1/16SS102J
R 2162	(B,54,48)	RS1/16SS101J
R 2164	(B,50,37)	RS1/16SS102J
R 2165	(B,48,37)	RS1/16SS102J
R 2166	(B,50,35)	RS1/16SS102J
R 2167	(B,45,36)	RS1/16SS473J
R 2168	(B,44,37)	RS1/16SS473J
R 2170	(B,49,34)	RS1/16SS102J
R 2171	(B,50,34)	RS1/16SS102J
R 2173	(B,229,37)	RS1/10SR181J
R 2175	(B,230,45)	RS1/16SS103J
R 2182	(B,110,77)	RS1/10SR301J
R 2186	(B,229,34)	RS1/10SR131J
R 2187	(B,151,51)	RS1/16SS473J
R 2194	(B,166,41)	RS1/16SS222J
R 2196	(B,167,41)	RS1/16SS392J
R 2197	(B,170,41)	RS1/16SS822J
R 2198	(B,164,45)	RS1/16SS103J
R 2199	(B,167,47)	RS1/16SS103J
R 2202	(B,70,35)	RS1/16SS473J
R 2211	(B,50,40)	RS1/16SS102J
R 2212	(B,151,55)	RS1/16SS102J
R 2215	(B,53,50)	RS1/16SS0R0J
R 2220	(B,266,79)	RS1/16SS473J
R 2221	(B,265,76)	RS1/10SR681J
R 2222	(B,262,71)	RS1/16SS473J
R 2223	(B,262,70)	RS1/16SS103J
R 2228	(B,235,114)	RS1/16SS100J
R 2229	(B,219,103)	RS1/16SS100J
R 2230	(B,270,53)	RS1/10SR181J
R 2231	(B,270,62)	RS1/10SR181J
R 2232	(B,88,34)	RS1/10SR181J
R 2233	(B,236,21)	RS1/10SR221J
R 2234	(B,237,16)	RS1/10SR101J
R 2235	(B,249,74)	RS1/10SR101J
R 2236	(B,262,92)	RS1/10SR561J
R 2237	(B,260,96)	RS1/10SR561J
R 2238	(B,247,81)	RS1/10SR101J
R 2239	(B,102,74)	RS1/10SR561J
R 2240	(B,123,64)	RS1/10SR561J
R 2241	(B,124,29)	RS1/10SR561J
R 2242	(B,109,77)	RS1/10SR151J
R 2251	(B,223,49)	RS1/16SS103J
R 2252	(B,226,50)	RS1/16SS223J
R 2253	(B,227,43)	RS1/16SS392J
R 2254	(B,69,39)	RS1/16SS102J
R 2256	(B,85,55)	RS1/10SR181J
R 2258	(B,85,58)	RS1/10SR131J
R 2261	(B,53,47)	RS1/16SS101J
R 2262	(B,54,46)	RS1/16SS473J
R 2263	(B,46,48)	RS1/16SS0R0J
R 2264	(B,58,19)	RS1/16SS104J
R 2265	(B,264,76)	RS1/10SR681J
R 2267	(B,56,48)	RS1/16SS473J
R 2268	(B,57,49)	RS1/16SS473J

CAPACITORS

C 2001	(B,160,57)		CKSSYB103K16
C 2002	(B,157,58)		CKSSYB103K16
C 2003	(B,157,54)		CKSRYB474K10
C 2004	(B,153,53)		CCSSCH101J50
C 2005	(B,151,49)		CCSSCH101J50
C 2006	(B,151,48)		CKSSYB103K16
C 2007	(B,148,49)		CCSSCH101J50
C 2008	(B,148,51)		CCSSCH101J50
C 2009	(B,147,53)		CCSSCH101J50
C 2010	(B,163,56)		CKSSYB104K16
C 2011	(B,162,56)		CKSSYB104K16
C 2012	(B,161,56)		CKSSYB104K16
C 2013	(B,156,51)		CKSSYB102K50
C 2014	(B,156,50)		CKSRYB105K10
C 2015	(B,167,53)		CKSSYB104K16
C 2025	(B,63,20)		CCSSCH102J50
C 2026	(B,62,20)		CCSSCH102J50
C 2027	(B,61,20)		CCSSCH102J50
C 2028	(B,63,45)		CKSSYB103K16
C 2029	(B,59,20)		CCSSCH102J50
C 2030	(B,65,45)		CKSSYB103K16
C 2031	(B,53,43)	4.7 uF	CCG1201
C 2032	(B,60,51)		CKSSYB103K16
C 2033	(B,56,29)		CKSSYB103K16
C 2034	(B,50,38)		CKSSYB103K16
C 2035	(B,48,32)		CCSSCH102J50
C 2036	(B,42,37)		CCSSCH102J50
C 2037	(B,65,48)		CKSSYB104K16
C 2038	(B,53,32)		CKSSYB102K50
C 2042	(B,164,43)		CKSSYB102K50
C 2043	(B,170,39)		CKSRYB105K10
C 2044	(B,168,39)		CKSRYB105K10

Circuit Symbol and No.		Part No.
C 2055	(B,186,88)	CKSSYB102K50
C 2056	(B,188,88)	CKSSYB102K50
C 2057	(B,189,88)	CKSSYB102K50
C 2058	(B,191,88)	CKSSYB102K50
C 2059	(B,193,88)	CKSSYB102K50
C 2060	(B,194,88)	CKSSYB102K50
C 2061	(B,196,86)	CKSSYB102K50
C 2062	(B,197,86)	CKSSYB102K50
C 2063	(B,199,86)	CKSSYB102K50
C 2064	(B,201,86)	CKSSYB102K50
C 2065	(B,171,47)	CKSSYB103K16
C 2066	(B,195,80)	CKSSYB103K16
C 2068	(B,262,72)	CKSSYB223K16
C 2071	(B,72,43)	CKSSYB102K50
C 2072	(B,73,45)	CKSSYB102K50
C 2073	(B,74,43)	CKSSYB102K50
C 2074	(B,75,45)	CKSSYB102K50
C 2075	(B,77,45)	CKSSYB102K50
C 2076	(B,78,43)	CKSSYB102K50
C 2077	(B,79,45)	CKSSYB102K50
C 2078	(B,79,43)	CKSSYB102K50
C 2080	(B,226,48)	CKSSYB472K50
C 2081	(B,106,85)	CKSSYB102K50
C 2082	(B,108,85)	CKSSYB102K50
C 2083	(B,109,85)	CKSSYB102K50
C 2084	(B,111,85)	CKSSYB102K50
C 2085	(B,113,85)	CKSSYB102K50
C 2086	(B,114,85)	CKSSYB102K50
C 2087	(B,116,85)	CKSSYB102K50
C 2088	(B,117,85)	CKSSYB102K50
C 2089	(B,119,85)	CKSSYB102K50
C 2090	(B,121,85)	CKSSYB102K50

C

Unit Number : CWX3937
Unit Name : CD Core Unit(S11STD-T)

MISCELLANEOUS

IC 201	(A,29,34)	IC	PE5748A
IC 301	(A,65,28)	IC	BA5839FP
Q 101	(B,9,57)	Transistor	2SA1577
Q 102	(B,22,52)	Chip Digital Transistor	LTA123JUB
Q 201	(B,35,33)	Transistor	DTA114EK
TH201	(A,37,53)	Thermistor	CCX1063
X 201	(A,15,28)	Ceramic Resonator 16.934 MHz	CSS1603
S 901	(A,43,54)	Spring Switch(HOME)	CSN1080
S 903	(B,22,13)	Spring Switch(DSCSNS)	CSN1081
S 905	(B,12,26)	Spring Switch(8EJ)	CSN1081
CN101	(A,17,59)	Connector	CKS4808
CN701	(A,38,11)	Connector	CKS6146

RESISTORS

R 101	(B,6,60)	RS1/10SR2R4J
R 102	(B,8,60)	RS1/10SR2R4J
R 103	(B,9,60)	RS1/10SR2R7J
R 108	(B,20,54)	RS1/16SS105J
R 109	(B,11,53)	RS1/16SS222J
R 214	(A,39,42)	RS1/16SS103J
R 215	(A,39,41)	RS1/16SS393J
R 216	(A,31,45)	RS1/16SS122J
R 217	(A,34,47)	RS1/16SS562J
R 218	(A,31,47)	RS1/16SS472J
R 225	(A,34,24)	RS1/16SS0R0J
R 229	(A,32,45)	RS1/16SS471J
R 232	(A,19,22)	RS1/16SS0R0J
R 235	(A,46,33)	RS1/16SS103J
R 236	(A,47,33)	RS1/16SS103J
R 237	(B,25,26)	RS1/16SS221J
R 240	(B,27,31)	RS1/16SS473J
R 245	(B,29,31)	RS1/16SS104J
R 246	(A,38,45)	RS1/16S103J
R 253	(B,28,31)	RS1/16SS104J
R 254	(B,30,31)	RS1/16SS104J
R 260	(B,42,22)	RS1/16SS103J
R 262	(A,45,33)	RS1/16SS472J
R 263	(A,48,33)	RS1/16SS472J
R 264	(A,45,26)	RS1/16SS102J
R 281	(A,32,23)	RS1/16SS560J
R 282	(A,31,23)	RS1/16SS560J
R 283	(B,33,18)	RS1/16SS0R0J
R 291	(B,32,18)	RS1/16SS560J
R 292	(B,33,17)	RS1/16SS0R0J
R 293	(B,33,12)	RS1/16SS0R0J
R 294	(A,19,29)	RS1/16SS471J
R 299	(B,32,14)	RS1/16SS0R0J
R 305	(A,61,35)	RS1/16SS183J
R 306	(A,61,38)	RS1/16SS183J
R 307	(A,59,35)	RS1/16SS183J
R 308	(A,59,37)	RS1/16SS183J
R 309	(B,50,27)	RS1/16SS102J
R 310	(B,48,27)	RS1/16SS102J
R 701	(B,37,22)	RS1/16SS101J
R 702	(B,39,21)	RS1/16SS101J
R 706	(B,44,12)	RS1/16SS221J
R 708	(A,41,23)	RS1/16SS0R0J
R 709	(A,41,22)	RS1/16SS0R0J
R 722	(B,37,23)	RS1/16SS0R0J

CAPACITORS

C 104	(B,12,56)	CKSQYB475K6R3
C 112	(B,18,55)	CKSSYB102K50
C 203	(A,19,35)	CKSSYB104K10
C 209	(A,18,28)	CKSRYB104K16
C 210	(A,22,22)	CKSSYB104K10
C 211	(A,25,24)	CKSSYB104K10
C 212	(A,39,34)	CKSSYB104K10
C 213	(A,41,42)	CKSSYB332K50
C 214	(A,41,41)	CKSSYB473K16
C 215	(A,39,38)	CKSSYB104K10
C 216	(A,36,47)	CKSSYB182K50
C 217	(A,32,47)	CCSSCH560J50
C 218	(A,30,47)	CCSSCH4R0C50
C 219	(A,33,44)	CKSSYB104K10
C 220	(B,33,42)	CKSSYB104K10
C 221	(A,36,43)	CKSSYB104K10
C 222	(A,30,44)	CKSSYB104K10
C 223	(A,26,45)	CCSSCH680J50

Circuit Symbol and No.		Part No.
C 224	(A,24,45)	CCSSCH470J50
C 225	(A,21,44)	CKSSYB103K16
C 228	(A,33,47)	CCSSCH270J50
C 229	(B,29,41)	CKSSYB104K10
C 231	(B,45,28)	CKSSYB102K50
C 232	(B,46,28)	CKSSYB102K50
C 233	(B,26,26)	CKSSYB103K16
C 235	(A,38,47)	CKSSYB103K16
C 236	(B,27,42)	CKSSYB104K10
C 238	(A,16,36)	CKSRYB104K16
C 299	(A,18,34)	CKSSYB104K10
C 304	(A,61,36)	CKSSYB472K25
C 305	(A,59,36)	CKSSYB223K16
C 306	(A,69,21)	CKSRYB105K10
C 310	(A,54,30)	CKSSYB102K50
C 311	(A,55,32)	CKSSYB102K50
C 701	(A,48,20)	CKSSYB104K10
C 710	(B,43,11)	CKSSYB102K50

D

Unit Number : CWN5179
Unit Name : USB Unit

MISCELLANEOUS

D 1001	(B,26,13)	Diode	DZ2S068C
D 1002	(B,14,13)	Diode	DZ2S068C
L 1001	(B,20,13)	Inductor	CTF1713
CN1001	(B,17,4)	Connector	CKS3876
JA1001	(A,20,31)	Plug	CKM1604

RESISTORS

R 1001	(B,11,11)	RS1/10SR0R0J
R 1002	(B,11,12)	RS1/10SR0R0J
R 1003	(B,26,10)	RS1/10SR0R0J

CAPACITORS

C 1003	(B,22,10)	CKSQYB102K50

Miscellaneous Parts List

M 1	Motor Unit(SPDL)	CXE3767
M 2	Motor Unit(LOAD/CRG)	CXC4026
	Pickup Unit(P10.5)(Service)	CXX1942