


EXPLODED VIEW(MECHANISM)

B


Parts with exploded numbers larger than 700 are not supplied. 38

KVT-M700

EXPLODED VIEW (HIDEAWAY: X90-)

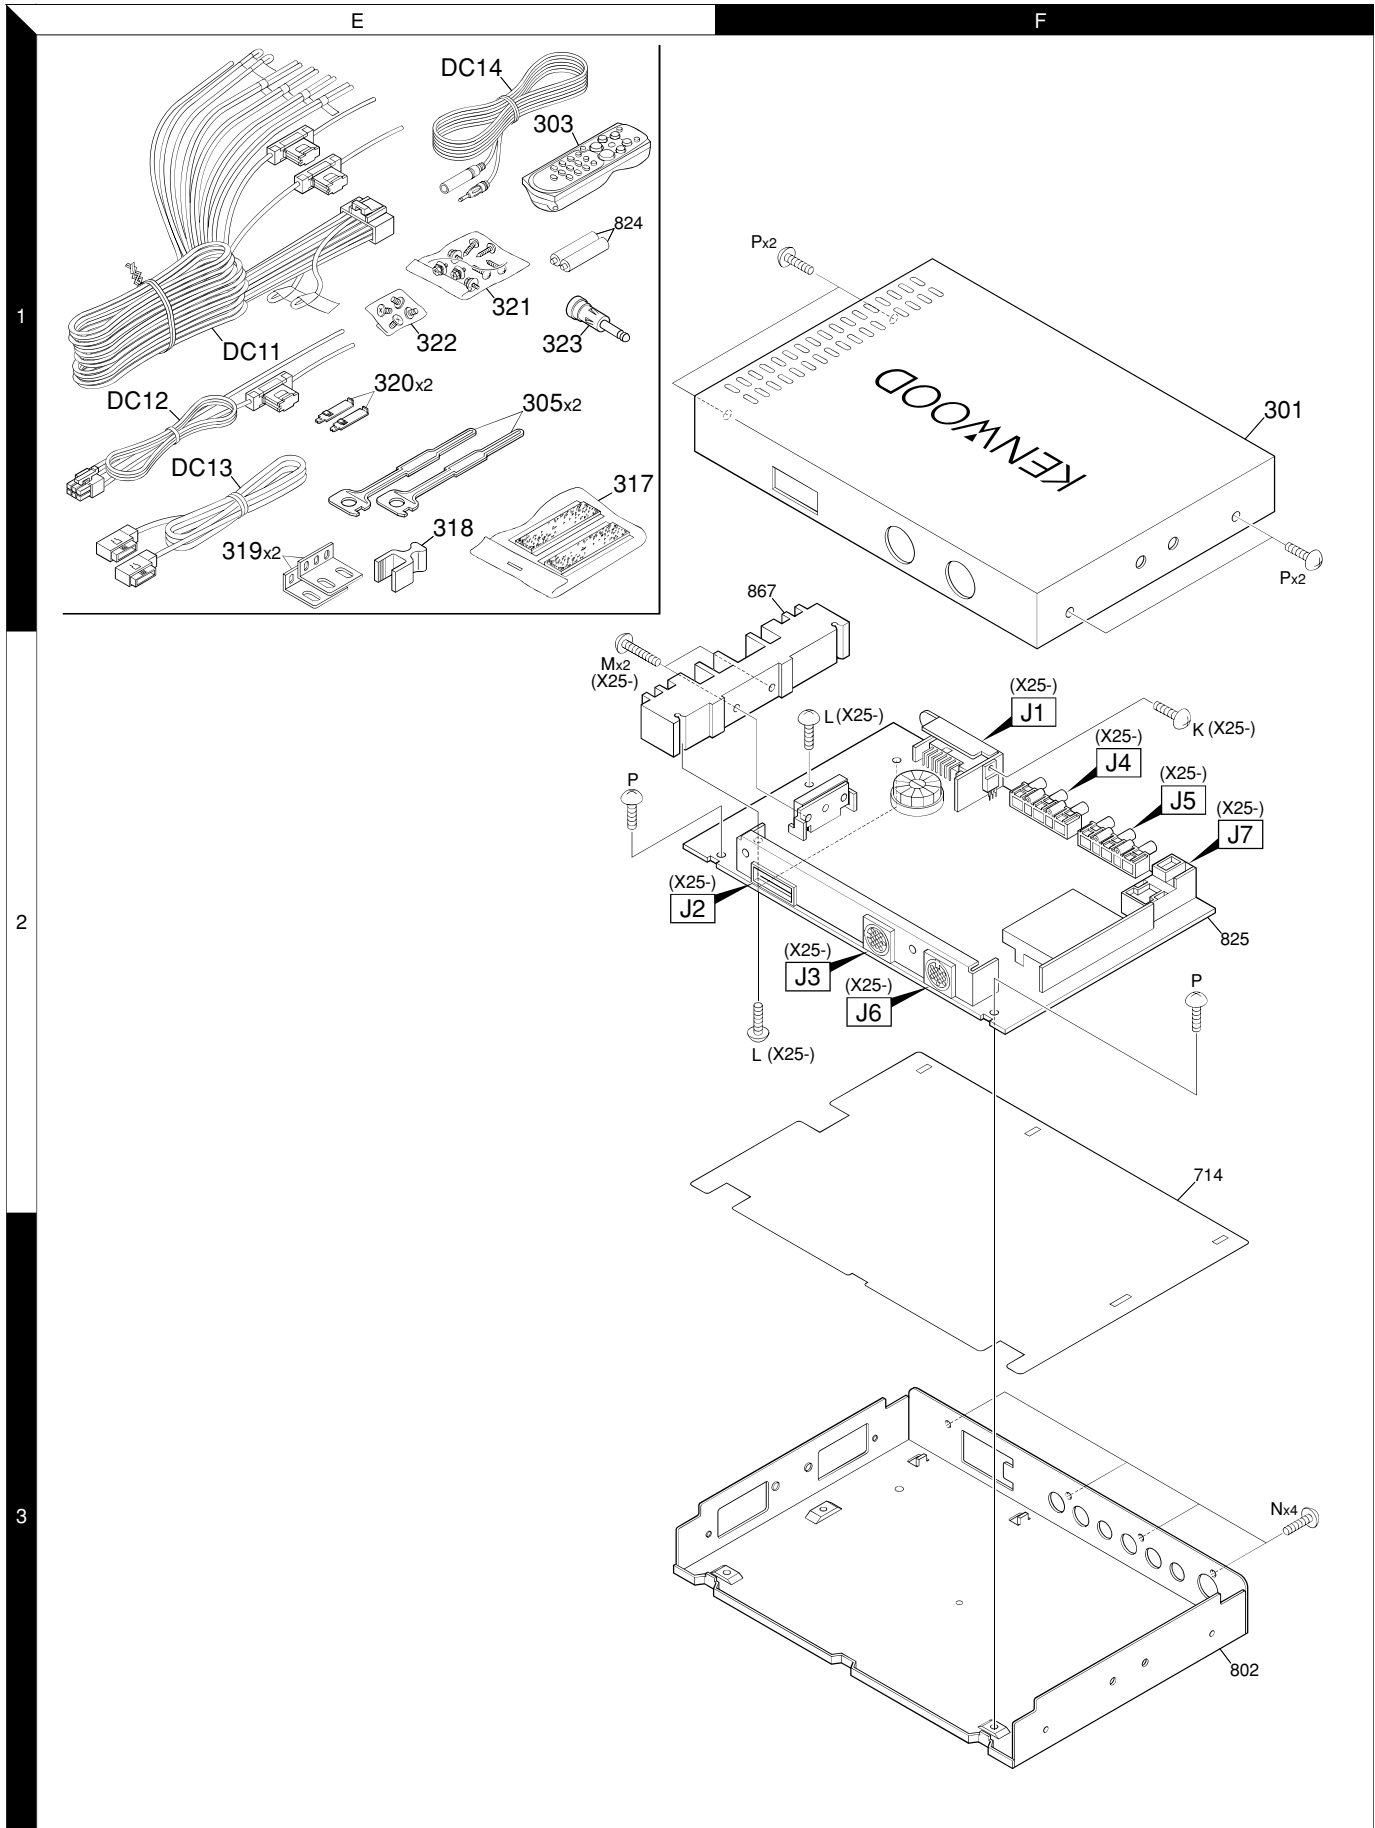

EXPLODED VIEW(UNIT)

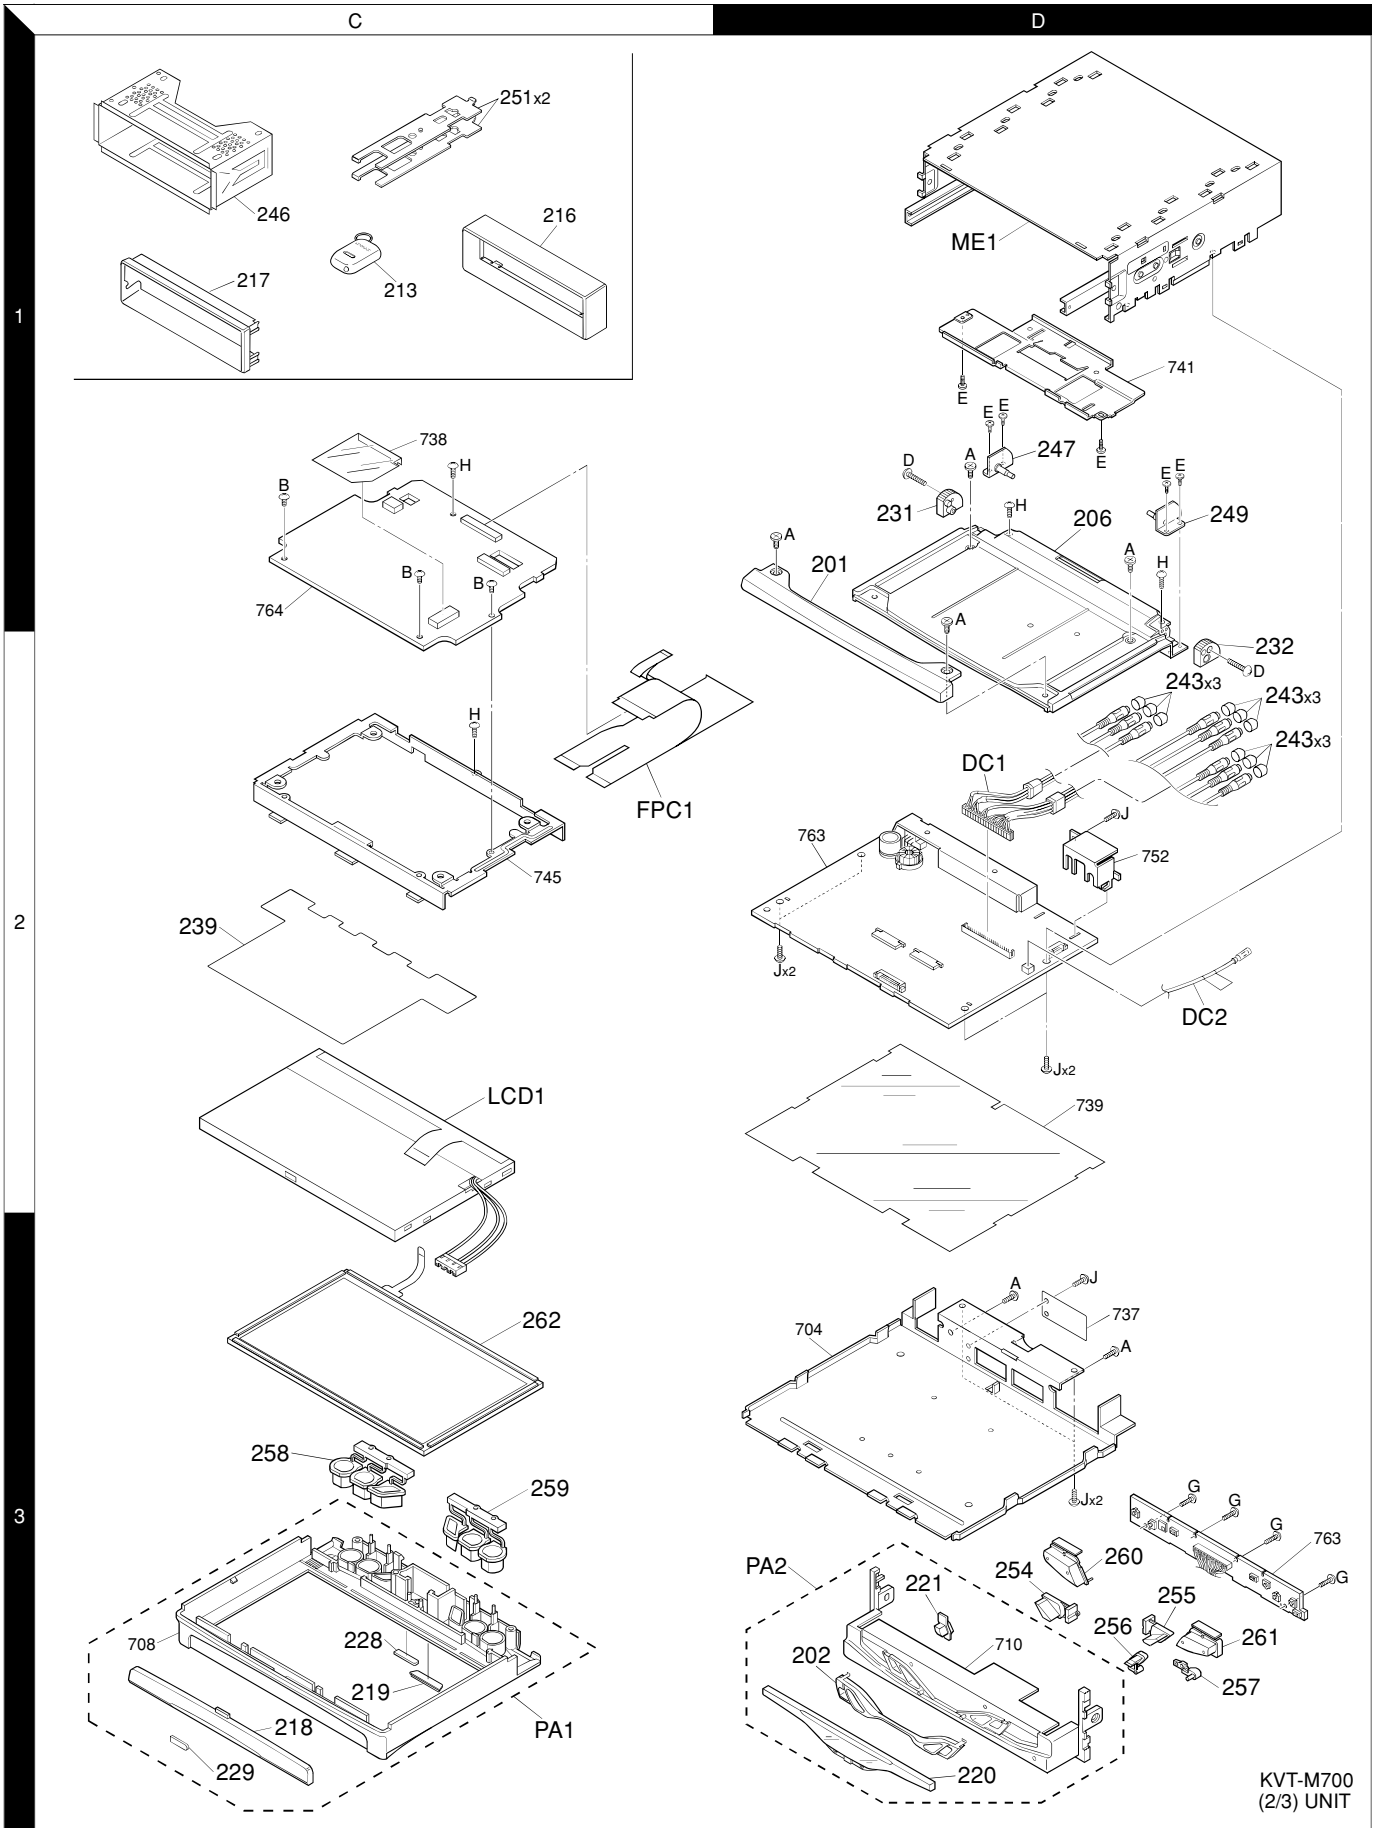

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
KVT-M700					
201	1D	*	A21-4185-02	DRESSING PANEL	KM1
201	1D	*	A21-4186-02	DRESSING PANEL	E1
202	3D	*	A21-4187-03	DRESSING PANEL	
206	1D		A46-1743-01	REAR COVER	
213	1D		A70-0886-15	REMOTE CONTROLLER ASSY	E1
PA1	3C	*	A64-2662-02	PANEL ASSY	K
PA1	3C	*	A64-2663-02	PANEL ASSY	E1
PA1	3C	*	A64-2712-02	PANEL ASSY	M1
PA2	3D	*	A64-2665-03	PANEL ASSY	K
PA2	3D	*	A64-2666-03	PANEL ASSY	E1
PA2	3D	*	A64-2714-03	PANEL ASSY	M1
216	3C		B07-3022-02	ESCUTCHEON	KM1
216	3C	*	B07-3052-02	ESCUTCHEON	E1
217	1C	*	B07-3053-02	ESCUTCHEON	E1
218	3C	*	B10-4225-03	FRONT GLASS	KM1
219	3C	*	B10-4226-04	FRONT GLASS	
220	3D	*	B10-4227-03	FRONT GLASS	K
220	3D	*	B10-4254-03	FRONT GLASS	M1
220	3D	*	B10-4255-03	FRONT GLASS	E1
221	3D	*	B10-4228-03	FRONT GLASS	
228	3C		B43-1270-04	KENWOOD BADGE	
229	3C		B43-1289-04	KENWOOD BADGE	KM1
-			B46-0100-50	WARRANTY CARD	
-			B46-0612-14	ID CARD	E1
-			B46-0631-13	USER CARD (eXcelon)	K
-		*	B46-0645-03	USER CARD (SIRIUS)	K
-		*	B64-2134-00	INST. MANUAL (ENGLISH)	K
-		*	B64-2135-00	INST. MANUAL (FRENCH)	K
-		*	B64-2136-00	INST. MANUAL (SPANISH)	K
-		*	B64-2137-00	INST. MANUAL (ENGLISH)	M1
-		*	B64-2138-00	INST. MANUAL (ENGLISH)	E1
-		*	B64-2139-00	INST. MANUAL (FRENCH)	E1
-		*	B64-2140-00	INST. MANUAL (GERMANY)	E1
-		*	B64-2211-00	INST. MANUAL (DUTCH)	E1
-		*	B64-2212-00	INST. MANUAL (ITALIAN)	E1
-		*	B64-2213-00	INST. MANUAL (SPANISH)	E1
-		*	B64-2214-00	INST. MANUAL (PORTUGUESE)	E1
-		*	B64-2302-00	INST. MANUAL (S-CHINESE)	M1
LCD1	2C		B38-1076-05	LIQUID CRYSTAL	
231	1D		D13-2215-04	GEAR	
232	1D		D13-2216-04	GEAR	
ME1	1D		D40-1164-25	MECHANISM ASSY	KM1
ME1	1D	*	D40-1173-05	MECHANISM ASSY	E1
DC1	2D	*	E30-6072-05	CORD WITH CONNECTOR	
DC2	1D	*	E30-6117-05	CORD WITH CONNECTOR	E1
239	2C		F09-1720-14	SHEET	
243	2D		F29-0049-05	INSULATING COVER	
-		*	H10-4819-02	POLYSTYRENE FOAMED FIXTURE	
-		*	H11-1530-04	POLYSTYRENE FOAMED BOARD	
-			H25-0338-04	PROTECTION BAG (250X350X0.03)	
-			H25-1115-04	PROTECTION BAG	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
-		*	H54-2464-03	ITEM CARTON CASE	K
-		*	H54-2465-03	ITEM CARTON CASE	M1
-		*	H54-2466-03	ITEM CARTON CASE	E1
246	1C		J21-9716-03	MOUNTING HARDWARE ASSY	
247	1D		J21-9780-14	MOUNTING HARDWARE ASSY	
249	1D		J21-9782-14	MOUNTING HARDWARE ASSY	
251	1C	*	J21-9839-04	MOUNTING HARDWARE	E1
FPC1	2C		J84-0134-05	FLEXIBLE PRINTED WIRING BOARD	
254	3D	*	K24-3854-03	KNOB (SRC)	
255	3D	*	K24-3855-03	KNOB (OPEN)	
256	3D	*	K24-3863-03	KNOB (ATT)	
257	3D	*	K24-3864-04	KNOB (RESET)	
258	3C		K25-1354-03	KNOB (L)	
259	3C	*	K25-1430-03	KNOB (R)	
260	3D	*	K25-1431-03	KNOB (VOL)	
261	3D	*	K25-1432-03	KNOB (SEEK)	
A	1D		N09-6011-05	MACHINE SCREW (M2.6X4.0 NI)	
B	2C		N09-6013-05	MACHINE SCREW (M2.6X3)	
D	1D		N35-2010-45	BINDING HEAD MACHINE SCREW	
E	1D		N39-2030-45	PAN HEAD MACHIN SCREW	
G	3D		N82-2008-46	BINDING HEAD TAPTITE SCREW	
H	1D		N82-2606-41	BINDING HEAD TAPTITE SCREW	
J	2J		N89-2606-46	BINDING HEAD TAPTITE SCREW	
262	3C		S79-0818-05	SWITCH ASSY	
VIDEO CONTROL UNIT (X14-692x-xx)					
D501			B30-1523-05	LED	
D502,503			B30-1417-05	LED	
D504,505			B30-1564-05	LED (BLUE)	
D506-511			B30-1442-05	LED	
C1			C90-2843-05	ELECTRO 2200UF	16WV
C2 -4			CK73GB1H103K	CHIP C 0.010UF	K
C5			CE04DW1C100M	ELECTRO 10UF	16WV
C7			CK73GB1H103K	CHIP C 0.010UF	K
C8			CE04DW0J331M	ELECTRO 330UF	6.3WV
C9			C90-2969-05	ELECTRO 150UF	16WV
C10			CE04NW1C101M	ELECTRO 100UF	16WV
C11			C90-2980-05	ELECTRO 220UF	16WV
C12			CK73GB1C104K	CHIP C 0.10UF	K
C13			CK73GB1H472K	CHIP C 4700PF	K
C14			C90-2968-05	ELECTRO 330UF	6.3WV
C15			CK73GB1H103K	CHIP C 0.010UF	K
C16			CE04NW0J221M	ELECTRO 220UF	6.3WV
C17			CK73GB1C104K	CHIP C 0.10UF	K
C18			CE04DW1A101M	ELECTRO 100UF	10WV
C19			CK73GB1H103K	CHIP C 0.010UF	K
C20			CE04DW1A101M	ELECTRO 100UF	10WV
C22, 23			C90-2963-05	ELECTRO 100UF	25WV
C24			C90-2957-05	ELECTRO 470UF	16WV
C25			CC73GCH1H101J	CHIP C 100PF	J
C26, 27			C90-2957-05	ELECTRO 470UF	16WV
C28			CK73GB1H682K	CHIP C 6800PF	K
C29			CE04NW1C101M	ELECTRO 100UF	16WV
C30			CK73GB1E223K	CHIP C 0.022UF	K

E : Europe K : North America M : Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Part No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

(X14-692x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C31			CE04NW1C100M	ELECTRO 10UF 16WV	
C32			CC73GCH1H561J	CHIP C 560PF J	
C33			CK73GB1E223K	CHIP C 0.022UF K	
C34 ,35			CE04NW1C101M	ELECTRO 100UF 16WV	
C36 ,37			CK73GB1H103K	CHIP C 0.010UF K	
C101,102			CE04NW0J470M	ELECTRO 47UF 6.3WV	
C103-106			CK73GB1H103K	CHIP C 0.010UF K	
C107,108			CE04NW1C100M	ELECTRO 10UF 16WV	
C109,110			CK73GB1H222K	CHIP C 2200PF K	
C111,112			CE04NW1E4R7M	ELECTRO 4.7UF 25WV	
C113,114			CE04NW1C100M	ELECTRO 10UF 16WV	
C115-118			CE04NW1E4R7M	ELECTRO 4.7UF 25WV	
C201-203			CK73GB1C104K	CHIP C 0.10UF K	E1
C204			CK73GB1H103K	CHIP C 0.010UF K	E1
C205-207			CK73GB1C104K	CHIP C 0.10UF K	E1
C208			CK73GB1A224K	CHIP C 0.22UF K	
C209			CK73GB1H103K	CHIP C 0.010UF K	
C210-213			CK73GB1A224K	CHIP C 0.22UF K	
C214,215			CE04NW0J470M	ELECTRO 47UF 6.3WV	
C216,217			CK73GB1C104K	CHIP C 0.10UF K	
C218			CE04DW0J331M	ELECTRO 330UF 6.3WV	
C219			CK73GB1H103K	CHIP C 0.010UF K	
C220			CE04NW0J470M	ELECTRO 47UF 6.3WV	
C221			CK73GB1C104K	CHIP C 0.10UF K	
C222			CK73GB1H103K	CHIP C 0.010UF K	
C223			CK73GB1C104K	CHIP C 0.10UF K	
C224,225			CK73GB1H103K	CHIP C 0.010UF K	
C226			CC73GCH1H561J	CHIP C 560PF J	
C227			CK73GB0J105K	CHIP C 1.0UF K	
C228			CE04NW0J470M	ELECTRO 47UF 6.3WV	
C231			CK73GB1C104K	CHIP C 0.10UF K	
C301			CK73GB1H103K	CHIP C 0.010UF K	
C302			CE04DW0J470M	ELECTRO 47UF 6.3WV	
C303			CK73GB1H103K	CHIP C 0.010UF K	
C304			CK73GB0J105K	CHIP C 1.0UF K	
C305,306			CK73GB1C104K	CHIP C 0.10UF K	
C307			CK73GB0J105K	CHIP C 1.0UF K	
C308,309			CK73GB1H103K	CHIP C 0.010UF K	
C310			CE04NW0J220M	ELECTRO 22UF 6.3WV	
C311			CE04NW1H010M	ELECTRO 1.0UF 50WV	
C312			C90-2945-05	ELECTRO 0.047F 5.5WV	
C501			CC73GCH1H221J	CHIP C 220PF J	
C502			CK73FB1A225K	CHIP C 2.2UF K	
C503,504			CK73GB1H103K	CHIP C 0.010UF K	
CN1			E40-3751-05	PIN ASSY	
CN2 ,3			E41-0166-05	FLAT CABLE CONNECTOR	
CN4			E40-9370-05	PIN ASSY	
CN5			E40-9409-05	PIN ASSY	
CN6			E40-3260-05	PIN ASSY	E1
J1			E08-0610-05	RECTANGULAR RECEPTACLE	
J2			E58-0900-05	RECTANGULAR RECEPTACLE	
J3		*	E58-0935-05	RECTANGULAR RECEPTACLE	
WH501		*	E39-0450-05	WIRING HARNESS	
F1 ,2			F53-0198-05	FUSE	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
E1 ,2			J19-2826-05	HOLDER	
L1			L33-1102-05	CHOKE COIL	
L2			L33-1106-05	CHOKE COIL	
L3			L40-1011-18	SMALL FIXED INDUCTOR	
L4			L33-1099-05	CHOKE COIL	
L5		*	L19-0715-05	TRANSFORMER FOR CONVERTER	
L6 ,7			L40-1011-18	SMALL FIXED INDUCTOR	
L8			L33-1106-05	CHOKE COIL	
L9			L33-1020-05	CHOKE COIL	
L10			L40-1011-18	SMALL FIXED INDUCTOR	
L201			L40-1005-34	SMALL FIXED INDUCTOR	
L301			L40-4795-34	SMALL FIXED INDUCTOR	
X301			L78-0821-05	RESONATOR	
CP301,302			R90-0724-05	MULTI-COMP 1K X4	
R1		*	RK73EB2E123J	CHIP R 12K J 1/4W	
R2			RK73GB2A183J	CHIP R 18K J 1/10W	
R3			RK73GB2A393J	CHIP R 39K J 1/10W	
R4			RK73GB2A223J	CHIP R 22K J 1/10W	
R5			RK73GB2A104J	CHIP R 100K J 1/10W	
R6			RK73GB2A473J	CHIP R 47K J 1/10W	
R7			RK73GB2A334J	CHIP R 330K J 1/10W	
R8			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R9			RK73GB2A101J	CHIP R 100 J 1/10W	
R10			RK73GB2A223J	CHIP R 22K J 1/10W	
R11			RK73GB2A104J	CHIP R 100K J 1/10W	
R12		*	RK73GB2A681J	CHIP R 680 J 1/10W	
R13			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R14			RN73GH1J112D	CHIP R 1.1K D 1/16W	
R15			RN73GH1J103D	CHIP R 10K D 1/16W	
R16			RN73GH1J471D	CHIP R 470 D 1/16W	
R17			R92-2021-05	CHIP R 2.2 J 1/2W	
R18			RK73GB2A471J	CHIP R 470 J 1/10W	
R19			R92-2021-05	CHIP R 2.2 J 1/2W	
R20 ,21		*	RK73GB2A122J	CHIP R 1.2K J 1/10W	
R22			RK73GH1J333D	METAL GLAZE RESISTOR	
R23			RK73GB2A471J	CHIP R 470 J 1/10W	
R24			RN73GH1J333D	CHIP R 33K D 1/16W	
R25			RK73GB2A824J	CHIP R 820K J 1/10W	
R26			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R27 ,28			RK73GB2A334J	CHIP R 330K J 1/10W	
R29			RN73GH1J222D	CHIP R 2.2K D 1/16W	
R30 ,31			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R32			RK73GB2A104J	CHIP R 100K J 1/10W	
R33			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R34			RN73GH1J512D	CHIP R 5.1K D 1/16W	
R35			RK73GB2A153J	CHIP R 15K J 1/10W	
R36			RK73GB2A183J	CHIP R 18K J 1/10W	
R37			RK73EB2E331J	CHIP R 330 J 1/4W	KM1
R38			RK73GB2A223J	CHIP R 22K J 1/10W	
R39			RK73GB2A101J	CHIP R 100 J 1/10W	
R101,102			RK73GB2A101J	CHIP R 100 J 1/10W	
R103,104			RK73GB2A223J	CHIP R 22K J 1/10W	
R105,106			RK73GB2A471J	CHIP R 470 J 1/10W	

E : Europe K : North America M : Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.Les articles non mentionnés dans le **Part No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

(X14-692x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R107,108			RK73EB2E100J	CHIP R 10 J 1/4W	
R109			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R110			RK73GB2A100J	CHIP R 10 J 1/10W	
R111,112			RK73EB2E101J	CHIP R 100 J 1/4W	
R113,114			RK73EB2E100J	CHIP R 10 J 1/4W	
R115,116			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R117,118			RK73EB2E100J	CHIP R 10 J 1/4W	
R119			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R201-210	*		RK73GB2A750J	CHIP R 75 J 1/10W	E1
R202	*		RK73GB2A750J	CHIP R 75 J 1/10W	KM1
R204	*		RK73GB2A750J	CHIP R 75 J 1/10W	KM1
R206-210	*		RK73GB2A750J	CHIP R 75 J 1/10W	KM1
R211			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R212	*		RK73GB2A681J	CHIP R 680 J 1/10W	
R213	*		RK73GB2A331J	CHIP R 330 J 1/10W	
R214			RK73GB2A103J	CHIP R 10K J 1/10W	
R215			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R216	*		RK73GB2A750J	CHIP R 75 J 1/10W	
R217	*		RK73GB2A561J	CHIP R 560 J 1/10W	
R218			RK73GB2A334J	CHIP R 330K J 1/10W	
R222			RK73GB2A103J	CHIP R 10K J 1/10W	
R223			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R301,302			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R303-305			RK73EB2E101J	CHIP R 100 J 1/4W	
R306,307			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R308			RK73GB2A104J	CHIP R 100K J 1/10W	
R309			RK73EB2E101J	CHIP R 100 J 1/4W	
R310			RK73EB2E470J	CHIP R 47 J 1/4W	
R311			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R312			RK73EB2E470J	CHIP R 47 J 1/4W	
R313-319			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R320-329			RK73EB2E101J	CHIP R 100 J 1/4W	
R330,331			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R332			RK73GB2A104J	CHIP R 100K J 1/10W	
R333-338			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R339,340			RK73GB2A101J	CHIP R 100 J 1/10W	
R341			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R342			RK73GB2A103J	CHIP R 10K J 1/10W	
R343			RK73GB2A473J	CHIP R 47K J 1/10W	
R344-346			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R347,348			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R349,350			RK73GB2A104J	CHIP R 100K J 1/10W	
R351			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R352			RK73GB2A225J	CHIP R 2.2M J 1/10W	
R353			RK73GB2A473J	CHIP R 47K J 1/10W	
R354-356			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R357			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R358			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R358,359			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R360-362			RK73GB2A101J	CHIP R 100 J 1/10W	K M1E1
R363,364			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R365,366			RK73GB2A223J	CHIP R 22K J 1/10W	
R367			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R368-370			RK73GB2A104J	CHIP R 100K J 1/10W	KE1
R368-371			RK73GB2A104J	CHIP R 100K J 1/10W	M1
Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R372			RK73GB2A104J	CHIP R 100K J 1/10W	K
R372,373			RK73GB2A104J	CHIP R 100K J 1/10W	E1
R374,375			RK73GB2A104J	CHIP R 100K J 1/10W	KM1
R375			RK73GB2A104J	CHIP R 100K J 1/10W	E1
R376,377			RK73GB2A103J	CHIP R 10K J 1/10W	
R378			RK73GB2A104J	CHIP R 100K J 1/10W	
R379-381			RK73EB2E101J	CHIP R 100 J 1/4W	
R382			RK73GB2A334J	CHIP R 330K J 1/10W	
R383			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R384			RK73EB2E101J	CHIP R 100 J 1/4W	
R385			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R386			RK73GB2A223J	CHIP R 22K J 1/10W	
R387,388			RK73GB2A334J	CHIP R 330K J 1/10W	
R389			RK73GB2A223J	CHIP R 22K J 1/10W	
R390			RK73GB2A103J	CHIP R 10K J 1/10W	
R391			RK73EB2E102J	CHIP R 1.0K J 1/4W	E1
R501			RK73EB2E221J	CHIP R 220 J 1/4W	
R502			RK73GB2A103J	CHIP R 10K J 1/10W	
R503			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R504	*		RK73EB2E821J	CHIP R 820 J 1/4W	
R505			RK73EB2E471J	CHIP R 470 J 1/4W	
R506			RK73EB2E221J	CHIP R 220 J 1/4W	
R507			RK73GB2A104J	CHIP R 100K J 1/10W	
R508			RK73FB2B101J	CHIP R 100 J 1/8W	
R509	*		RK73GB2A273J	CHIP R 27K J 1/10W	
R510			RK73EB2E331J	CHIP R 330 J 1/4W	
R511	*		RK73EB2E181J	CHIP R 180 J 1/4W	
R512			RK73EB2E331J	CHIP R 330 J 1/4W	
R513			RK73EB2E221J	CHIP R 220 J 1/4W	
R514			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R515			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R516			RK73EB2E221J	CHIP R 220 J 1/4W	
W1			R92-1252-05	CHIP R 0 OHM J 1/16W	
W201-203			R92-1252-05	CHIP R 0 OHM J 1/16W	KM1
S501			S70-0826-05	TACT SWITCH	
S502-504			S70-0860-05	TACT SWITCH	
S505,506			S70-0826-05	TACT SWITCH	
S507,508			S70-0860-05	TACT SWITCH	
D1			AM01Z	DIODE	
D2			MA8068-M	ZENER DIODE	
D3			DAN202U	DIODE	
D5			1SS184	DIODE	
D6 ,7			SB05-03C	DIODE	
D8			1SS184	DIODE	
D9			MA3220-L	ZENER DIODE	
D10			RB051L-40	DIODE	
D11			DA204U	DIODE	
D12			MA8056-M	ZENER DIODE	
D13			MA8082-M	ZENER DIODE	
D15			MA8056-M	ZENER DIODE	
D101-109			DA204U	DIODE	
D201-210			DA204U	DIODE	E1
D207-210			DA204U	DIODE	KM1
D211			DAP202U	DIODE	

E : Europe K : North America M : Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Part No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
D301			MA3062WA	ZENER DIODE	E1
D302			DAN202U	DIODE	
D303			MA3062-M	ZENER DIODE	
D304-309			MA3062WA	ZENER DIODE	
IC2			FA7611CE	ANALOGUE IC	
IC3 ,4			LB1836M-TE-L	ANALOGUE IC	E1
IC101,102			M5280FP	IC(ISOLATOR AMP)	
IC103,104			TC4052BF(N)	MOS-IC	
IC105			M5280FP	IC(ISOLATOR AMP)	
IC201			MM1234XFBE	ANALOGUE IC	
IC202			BA7649F	ANALOGUE IC	
IC203			MM1228XFBE	ANALOGUE IC	
IC204			BA7652AF	ANALOGUE IC	
IC205			MM1108XFFE	ANALOGUE IC	
IC301		*	UPD703033GC141	MI-COM IC	
IC302			S-80842ANNP	MOS-IC	
IC303			TC7SH08F	MOS-IC	
IC501			RS-171	ANALOGUE IC	
Q1			2SC4081	TRANSISTOR	
Q2			DTA124EUA	DIGITAL TRANSISTOR	
Q3			DTB123YK	DIGITAL TRANSISTOR	
Q4			DTA124EUA	DIGITAL TRANSISTOR	
Q5			2SC4081	TRANSISTOR	
Q6			DTC124EUA	DIGITAL TRANSISTOR	
Q7			2SC4979	TRANSISTOR	
Q8			2SA2013	TRANSISTOR	
Q9			2SC4081	TRANSISTOR	
Q10			2SA1576A	TRANSISTOR	
Q11			DTC124EUA	DIGITAL TRANSISTOR	
Q12			DTA124EUA	DIGITAL TRANSISTOR	
Q13			DTC124EUA	DIGITAL TRANSISTOR	
Q14			2SA1870	TRANSISTOR	
Q15			2SC4081	TRANSISTOR	
Q16			2SB1184	TRANSISTOR	
Q17			2SC4081	TRANSISTOR	
Q101,102			DTC143TUA	DIGITAL TRANSISTOR	
Q103			DTC144EUA	DIGITAL TRANSISTOR	
Q104			DTA124EUA	DIGITAL TRANSISTOR	
Q201			2SC4081	TRANSISTOR	
Q202			2SA1576A	TRANSISTOR	
Q203			2SC4081	TRANSISTOR	
Q204			DTA114YUA	DIGITAL TRANSISTOR	
Q301			DTC144EUA	DIGITAL TRANSISTOR	
Q302,303			DTA124EUA	DIGITAL TRANSISTOR	
Q304			DTA144EUA	DIGITAL TRANSISTOR	
Q305			DTC144EUA	DIGITAL TRANSISTOR	
Q306,307			2SC4081	TRANSISTOR	
Q308			2SA1576A	TRANSISTOR	
Q309			2SC4081	TRANSISTOR	
Q501,502			DTC124EUA	DIGITAL TRANSISTOR	
Q503			DTC114YUA	DIGITAL TRANSISTOR	
Q504			DTA124EUA	DIGITAL TRANSISTOR	
Q505-507			DTC114YUA	DIGITAL TRANSISTOR	

(X25-926x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
ELECTRIC UNIT (X25-926x-xx)					
C1 -4			C90-5296-05	NP-ELECT	0.22UF 50WV
C5			C90-2682-05	ELECTRO	47UF 16WV
C6			CK73GB1C104K	CHIP C	0.10UF K
C7			CK73GB1H103K	CHIP C	0.010UF K
C8			CE04DW1C100M	ELECTRO	10UF 16WV
C9 ,10			CE04NW1H010M	ELECTRO	1.0UF 50WV
C11			CK73GB1H103K	CHIP C	0.010UF K
C12			C90-2866-05	ELECTRO	220UF 16WV
C13			CE04NW1HR47M	ELECTRO	0.47UF 50WV
C14			CE04NW1C220M	ELECTRO	22UF 16WV
C15			C90-2935-05	ELECTRO	1.0UF 50WV
C16			CE04DW1A101M	ELECTRO	100UF 10WV
C17		*	C90-5428-05	ALUMINIUM ELECTROLYTIC C.	
C18			C90-2595-05	ELECTRO	4.7UF 16WV
C19			C90-2962-05	ELECTRO	100UF 16WV
C20			C90-2943-05	ELECTRO	0.1UF 50WV
C21 ,22			CK73EB1C225K	CHIP C	2.2UF K
C23			CK73GB1C683K	CHIP C	0.068UF K
C24			C90-2598-05	ELECTRO	3.3UF 25WV
C25 ,26			CK73EB1C225K	CHIP C	2.2UF K
C27			C90-2680-05	ELECTRO	22UF 16WV
C28			CK73GB1H103K	CHIP C	0.010UF K
C29			CK73FB1C105K	CHIP C	1.0UF K
C30			CK73GB1H103K	CHIP C	0.010UF K
C31			C90-2866-05	ELECTRO	220UF 16WV
C32			CK73FB1C105K	CHIP C	1.0UF K
C33			CK73GB1E473K	CHIP C	0.047UF K
C34			CK73GB1H103K	CHIP C	0.010UF K
C35			CK73GB1E223K	CHIP C	0.022UF K
C36			CK73GB1H103K	CHIP C	0.010UF K
C37			C90-2682-05	ELECTRO	47UF 16WV
C38			CK73GB1H103K	CHIP C	0.010UF K
C39			CK73FB1C105K	CHIP C	1.0UF K
C40			CC73GCH1H220J	CHIP C	22PF J
C41			CC73GCH1H270J	CHIP C	27PF J
C42			CK73FB1C105K	CHIP C	1.0UF K
C43			CK73GB1H103K	CHIP C	0.010UF K
C44 -47			CK73GB1C104K	CHIP C	0.10UF K
C48 ,49			CE04DW1E4R7M	ELECTRO	4.7UF 25WV
C50 ,51			CK73GB1H103K	CHIP C	0.010UF K
C52			CE04DW1H010M	ELECTRO	1.0UF 50WV
C53 -56			CK73FB1C334K	CHIP C	0.33UF K
C57			CE04DW1C100M	ELECTRO	10UF 16WV
C58 -61			CK73FB1C334K	CHIP C	0.33UF K
C62			C90-2682-05	ELECTRO	47UF 16WV
C63			CE04DW1C100M	ELECTRO	10UF 16WV
C64			CK73GB1H103K	CHIP C	0.010UF K
C65 ,66			CE04DW1C100M	ELECTRO	10UF 16WV
C67			CE04DW1A101M	ELECTRO	100UF 10WV
C68			CK73GB1H103K	CHIP C	0.010UF K
C69			CE04DW1C100M	ELECTRO	10UF 16WV
C70			CK73GB1H103K	CHIP C	0.010UF K
C71			CE04DW1C100M	ELECTRO	10UF 16WV

E : Europe K : North America M : Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

(X25-926x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C72			CK73GB1H153K	CHIP C 0.015UF K	
C73 ,74			CK73GB1H103K	CHIP C 0.010UF K	
C75 ,76			CE04DW1C100M	ELECTRO 10UF 16WV	
C77 ,78			C90-2850-05	ELECTRO 10UF 10WV	
C79			CK73GB1A474K	CHIP C 0.47UF K	
C80			CC73GCH1E102J	CHIP C 1000PF J	
C81			CE04NW1C100M	ELECTRO 10UF 16WV	
C82 ,83			CK73GB1A474K	CHIP C 0.47UF K	
C84			CE04DW1C100M	ELECTRO 10UF 16WV	
C85			CK73GB1C104K	CHIP C 0.10UF K	
C86			CK73GB1A474K	CHIP C 0.47UF K	
C87			CK73GB1H103K	CHIP C 0.010UF K	
C88			C90-2610-05	ELECTRO 2.2UF 50WV	
C89			CK73GB1C104K	CHIP C 0.10UF K	
C90			CE04DW1C100M	ELECTRO 10UF 16WV	
C91			CK73GB1H103K	CHIP C 0.010UF K	
C92			CE04NW1C100M	ELECTRO 10UF 16WV	
C93			CK73GB1A474K	CHIP C 0.47UF K	
C94			CK73GB1E333K	CHIP C 0.033UF K	
C95			CE04DW1C100M	ELECTRO 10UF 16WV	
C96			CC73GCH1H151J	CHIP C 150PF J	
C97 ,98			CK73GB1H103K	CHIP C 0.010UF K	
C99 ,100			CK73GB1A474K	CHIP C 0.47UF K	
C101			CK73GB1H103K	CHIP C 0.010UF K	
C102			CK73FB1C224K	CHIP C 0.22UF K	
C103			CE04NW1C470M	ELECTRO 47UF 16WV	
C104			CK73FB1C224K	CHIP C 0.22UF K	
C105			CE04NW1H4R7M	ELECTRO 4.7UF 50WV	
C106			CE04DW0J331M	ELECTRO 330UF 6.3WV	
C107			CE04NW1H4R7M	ELECTRO 4.7UF 50WV	
C108			CK73GB1H102K	CHIP C 1000PF K	
C109			CC73GCH1H221J	CHIP C 220PF J	
C110			CK73GB1H102K	CHIP C 1000PF K	
C111			CC73GCH1H221J	CHIP C 220PF J	
C112			CC73GCH1H121J	CHIP C 120PF J	
C113-118			CK73GB1H103K	CHIP C 0.010UF K	
C119			CC73GCH1H180J	CHIP C 18PF J	
C120			CE04DW1C100M	ELECTRO 10UF 16WV	
C121			CC73GCH1H331J	CHIP C 330PF J	
C122			CE04DW1C100M	ELECTRO 10UF 16WV	
C123			CC73GCH1H471J	CHIP C 470PF J	
C124			CK73GB1H152K	CHIP C 1500PF K	
C125			CK73GB1H682K	CHIP C 6800PF K	
C126			CC73GCH1H820J	CHIP C 82PF J	
C127			CK73GB1H102K	CHIP C 1000PF K	
C128			CK73GB1H222K	CHIP C 2200PF K	
C129,130			CC73GCH1H100D	CHIP C 10PF D	
C131			CE04DW1C100M	ELECTRO 10UF 16WV	
C132			CC73GCH1H060D	CHIP C 6.0PF D	
C133			CK73GB1E223K	CHIP C 0.022UF K	
C134			CK73GB1H103K	CHIP C 0.010UF K	
C135-142			CK73GB1E473K	CHIP C 0.047UF K	
C143,144			CE04NW1H010M	ELECTRO 1.0UF 50WV	
C145			CK73GB1H103K	CHIP C 0.010UF K	
C146			C90-2682-05	ELECTRO 47UF 16WV	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C147			CC73GCH1H050C	CHIP C 5.0PF C	
C148-153			CK73GB1H222K	CHIP C 2200PF K	
C154			CE04DW1C100M	ELECTRO 10UF 16WV	
C155			C90-2945-05	ELECTRO 0.047F 5.5WV	
CN1			E40-9706-05	PIN ASSY	
CN2 ,3			E40-9423-05	SOCKET FOR PIN ASSY	
CN4 ,5			E40-9421-05	PIN ASSY	
△ J1			E58-0863-15	RECTANGULAR RECEPTACLE	
J2		*	E58-0935-05	RECTANGULAR RECEPTACLE	
J3		*	E56-0842-05	CYLINDRICAL RECEPTACLE	
J4		*	E63-0881-05	PIN JACK	
J5		*	E63-0882-05	PIN JACK	
J6			E56-0825-05	CYLINDRICAL RECEPTACLE	
J7			E04-0312-05	RF COAXIAL CABLE RECEPTACLE	
P1 ,2			E23-0745-05	TERMINAL	
L1			L33-1102-05	CHOKE COIL	
L2			L40-2205-91	SMALL FIXED INDUCTOR(22UH,J)	
L3 -10			L40-4795-34	SMALL FIXED INDUCTOR	
L11			L33-1123-05	LINE FILTER COIL	
L12			L40-6891-58	SMALL FIXED INDUCTOR	
L13			L92-0075-05	CHIP FERRITE	
X1			L78-0821-05	RESONATOR	
X2			L78-0533-05	RESONATOR (32.768KHZ)	
X3			L77-2002-05	CRYSTAL RESONATOR	
K		2F	N30-3006-46	PAN HEAD MACHINE SCREW	
L		2E	N35-3008-45	BINDING HEAD MACHINE SCREW	
M		1E	N35-3020-46	BINDING HEAD MACHINE SCREW	
CP1			R90-1013-05	MULTI-COMP 2.2K X2	
R1 ,2			RK73GB2A223J	CHIP R 22K J 1/10W	
R3			RK73EB2E103J	CHIP R 10K J 1/4W	
R4			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R5			RK73GB2A223J	CHIP R 22K J 1/10W	
R6			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R7			RK73GB2A223J	CHIP R 22K J 1/10W	
R8			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R9			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R10			RK73GB2A101J	CHIP R 100 J 1/10W	
R11			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R12			RK73GB2A473J	CHIP R 47K J 1/10W	
R13 ,14			RK73GB2A223J	CHIP R 22K J 1/10W	
R15		*	RK73GB2A152J	CHIP R 1.5K J 1/10W	
R16			RK73GB2A103J	CHIP R 10K J 1/10W	
R17			RK73GB2A101J	CHIP R 100 J 1/10W	
R18			RK73GB2A103J	CHIP R 10K J 1/10W	
R20			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R21			RK73EB2E470J	CHIP R 47 J 1/4W	
R22			RK73EB2E101J	CHIP R 100 J 1/4W	
R23			RK73EB2E470J	CHIP R 47 J 1/4W	
R24			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R25			RK73GB2A223J	CHIP R 22K J 1/10W	
R26			R92-2063-05	CHIP R 680 J 1/2W	
R27			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R28			RK73GB2A104J	CHIP R 100K J 1/10W	

E : Europe K : North America M : Other Areas

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

(X25-926x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R30			RK73EB2E221J	CHIP R 220 J 1/4W	
R31 ,32			R92-0365-05	CHIP R 1.0K J 1/2W	
R33			RK73GB2A223J	CHIP R 22K J 1/10W	
R34 ,35		*	RK73FB2B472J	CHIP R 4.7K J 1/8W	K
R35		*	RK73FB2B472J	CHIP R 4.7K J 1/8W	M1E1
R36			R92-0366-05	CHIP R 560 J 1W	K
R37			RK73GB2A223J	CHIP R 22K J 1/10W	K
R38			RK73GB2A153J	CHIP R 15K J 1/10W	
R39			RK73GH1J243D	CHIP R 24K D 1/16W	
R40			RK73GH1J432D	CHIP R 4.3K D 1/16W	
R42		*	RK73FB2B561J	CHIP R 560 J 1/8W	
R43			RK73GB2A223J	CHIP R 22K J 1/10W	
R44			RK73GB2A183J	CHIP R 18K J 1/10W	
R45			RK73GB2A473J	CHIP R 47K J 1/10W	
R46			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R47			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R48			RK73GB2A183J	CHIP R 18K J 1/10W	
R49			RK73GB2A470J	CHIP R 47 J 1/10W	
R50			RK73GB2A473J	CHIP R 47K J 1/10W	
R51		*	RK73GB2A752J	CHIP R 7.5K J 1/10W	
R52			R92-3243-05	CARBON FILM RESISTOR	
R53			RK73GB2A912J	CHIP R 9.1K J 1/10W	
R54		*	RK73EB2E153J	CHIP R 15K J 1/4W	
R55			RK73GB2A913J	CHIP R 91K J 1/10W	
R56			RK73GB2A563J	CHIP R 56K J 1/10W	
R57			RK73GB2A470J	CHIP R 47 J 1/10W	
R58			RK73GB2A103J	CHIP R 10K J 1/10W	
R59			RK73GB2A104J	CHIP R 100K J 1/10W	KE1
R60 -64			RK73GB2A104J	CHIP R 100K J 1/10W	M1
R61 -64			RK73GB2A104J	CHIP R 100K J 1/10W	KE1
R65			RK73GB2A103J	CHIP R 10K J 1/10W	
R66			RK73GB2A104J	CHIP R 100K J 1/10W	KM1
R67 -69			RK73GB2A104J	CHIP R 100K J 1/10W	E1
R68 ,69			RK73GB2A104J	CHIP R 100K J 1/10W	KM1
R70 ,71			RK73GB2A913J	CHIP R 91K J 1/10W	
R72 ,73			RK73GB2A104J	CHIP R 100K J 1/10W	
R74 ,75			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R76			RK73GB2A104J	CHIP R 100K J 1/10W	
R77			RK73GB2A103J	CHIP R 10K J 1/10W	
R78			RK73FB2B223J	CHIP R 22K J 1/8W	
R79			RK73FB2B361J	CHIP R 360 J 1/8W	
R80			RK73GB2A473J	CHIP R 47K J 1/10W	
R81			RK73GB2A103J	CHIP R 10K J 1/10W	
R82			RK73FB2B473J	CHIP R 47K J 1/8W	
R83			RK73FB2B820J	CHIP R 82 J 1/8W	
R84			RK73FB2B103J	CHIP R 10K J 1/8W	
R85			RK73GB2A103J	CHIP R 10K J 1/10W	
R86			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R87			RK73GB2A103J	CHIP R 10K J 1/10W	
R88			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R89			RK73GB2A104J	CHIP R 100K J 1/10W	
R90			RK73FB2B103J	CHIP R 10K J 1/8W	
R91		*	RK73FB2B820J	CHIP R 82 J 1/8W	
R92			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R93		*	RK73FB2B473J	CHIP R 47K J 1/8W	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R94			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R95			RK73FB2B223J	CHIP R 22K J 1/8W	
R96			RK73FB2B361J	CHIP R 360 J 1/8W	
R97			RK73FB2B223J	CHIP R 22K J 1/8W	
R98			RK73FB2B361J	CHIP R 360 J 1/8W	
R99			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R100			RK73GB2A471J	CHIP R 470 J 1/10W	
R101		*	RK73FB2B473J	CHIP R 47K J 1/8W	
R102			RK73GB2A471J	CHIP R 470 J 1/10W	
R103		*	RK73FB2B820J	CHIP R 82 J 1/8W	
R104			RK73FB2B103J	CHIP R 10K J 1/8W	
R105			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R106			RK73FB2B103J	CHIP R 10K J 1/8W	
R107		*	RK73FB2B820J	CHIP R 82 J 1/8W	
R108			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R109		*	RK73FB2B473J	CHIP R 47K J 1/8W	
R110			RK73FB2B223J	CHIP R 22K J 1/8W	
R111			RK73FB2B361J	CHIP R 360 J 1/8W	
R112-115			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R116			RK73FB2B223J	CHIP R 22K J 1/8W	
R117			RK73FB2B361J	CHIP R 360 J 1/8W	
R118			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R119		*	RK73FB2B473J	CHIP R 47K J 1/8W	
R120		*	RK73FB2B820J	CHIP R 82 J 1/8W	
R121			RK73FB2B103J	CHIP R 10K J 1/8W	
R122			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R123			RK73FB2B103J	CHIP R 10K J 1/8W	
R124		*	RK73FB2B820J	CHIP R 82 J 1/8W	
R125		*	RK73FB2B473J	CHIP R 47K J 1/8W	
R126,127			RK73GB2A103J	CHIP R 10K J 1/10W	
R128			RK73FB2B223J	CHIP R 22K J 1/8W	
R129			RK73FB2B361J	CHIP R 360 J 1/8W	
R130			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R131			RK73GB2A682J	CHIP R 6.8K J 1/10W	
R132			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R133			RK73GB2A103J	CHIP R 10K J 1/10W	
R134			RK73EB2E100J	CHIP R 10 J 1/4W	
R135,136			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R137			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R138,139			RK73GB2A223J	CHIP R 22K J 1/10W	
R140			RK73EB2E100J	CHIP R 10 J 1/4W	
R141			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R142			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R143			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R144			RK73GB2A103J	CHIP R 10K J 1/10W	
R145			RK73EB2E101J	CHIP R 100 J 1/4W	
R146-148			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R149			RK73GB2A103J	CHIP R 10K J 1/10W	
R150			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R151			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R152			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R153			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R154			RK73GB2A333J	CHIP R 33K J 1/10W	
R155			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R156			RK73GB2A562J	CHIP R 5.6K J 1/10W	

E : Europe K : North America M : Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

(X25-926x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R157			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R158,159			RK73EB2E101J	CHIP R 100 J 1/4W	
R160-162			RK73GB2A103J	CHIP R 10K J 1/10W	
R163			RK73GB2A153J	CHIP R 15K J 1/10W	
R164			RK73GB2A103J	CHIP R 10K J 1/10W	
R165			RK73GB2A104J	CHIP R 100K J 1/10W	
R166			RK73GB2A103J	CHIP R 10K J 1/10W	
R167			RK73GB2A823J	CHIP R 82K J 1/10W	
R168,169			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R170,171			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R172,173			RK73EB2E102J	CHIP R 1.0K J 1/4W	
R174			RK73GB2A471J	CHIP R 470 J 1/10W	
R175			RK73GB2A104J	CHIP R 100K J 1/10W	
R176			RK73EB2E4R7J	CHIP R 4.7 J 1/4W	
R177			RK73GB2A104J	CHIP R 100K J 1/10W	
R178			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R179			RK73GB2A103J	CHIP R 10K J 1/10W	
R180,181			RK73GB2A104J	CHIP R 100K J 1/10W	
W1			R92-1252-05	CHIP R 0 OHM J 1/16W	E1
W1 -3			R92-1252-05	CHIP R 0 OHM J 1/16W	M1
W4 -11			R92-1252-05	CHIP R 0 OHM J 1/16W	KE1
W6 -11			R92-1252-05	CHIP R 0 OHM J 1/16W	M1
W12			R92-2053-05	CHIP R 0 J 1/8W	
D1 -8			1SR154-400	DIODE	
D9			MA8056-M	ZENER DIODE	
D10			RM10ZLF	DIODE	
D11 ,12			DAP202U	DIODE	
D14			MA3110-M	ZENER DIODE	
D15			MA8062-M	ZENER DIODE	
D16			MA3062WA	ZENER DIODE	
D17 ,18			1SR154-400	DIODE	K
D18			1SR154-400	DIODE	M1E1
D19			MA3062WA	ZENER DIODE	
D20			DAP202U	DIODE	
D21			MA3062WA	ZENER DIODE	
D22 ,23			1SR154-400	DIODE	K
D23			1SR154-400	DIODE	M1E1
D24 ,25			DA204U	DIODE	
D26			MA8056-M	ZENER DIODE	
D27			MA8047-M	ZENER DIODE	
D28			HZS7A3L	ZENER DIODE	
D29			MA8056-M	ZENER DIODE	
D30			DA204U	DIODE	
D31			DAN202U	DIODE	
D32			HZS7A3L	ZENER DIODE	
D33			DAN202U	DIODE	
D34 ,35			DAP202U	DIODE	
D38 -43			DA204U	DIODE	
D44			IMSA-6801	SURGE ABSORBER	
D45 -47			MA3062WA	ZENER DIODE	
D48			DAN202U	DIODE	
D49			MA3062WA	ZENER DIODE	
D50 -52			DA204U	DIODE	
D53			DAP202U	DIODE	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
D54			MA8068-M	ZENER DIODE	
IC1			TA8263BH	ANALOGUE IC	
IC2			M5237ML	IC(VOLTAGE REGULATOR)	
IC3			ICL7660SIBA	ANALOGUE IC	
IC4			HD74HC02FP	MOS-IC	
IC5			M5280FP	IC(ISOLATOR AMP)	
IC6			S-80842ANNP	MOS-IC	
IC7			TDA7401	ANALOGUE IC	
IC8			NJM4565M-TE2	ANALOGUE IC	
IC9		*	UPD703033GC140	MI-COM IC	
IC10			NJM4565M-TE2	ANALOGUE IC	
IC11			TDA7407	ANALOGUE IC	
IC12			NJM4565M-TE2	ANALOGUE IC	
IC13			TC4052BF(N)	MOS-IC	
IC14			NJM4565M-TE2	ANALOGUE IC	
IC15			M5280FP	IC(ISOLATOR AMP)	
IC16			TDA7479D	ANALOGUE IC	
IC17			NJM4565M-TE2	ANALOGUE IC	
IC18			M5280FP	IC(ISOLATOR AMP)	
Q1			2SC4081	TRANSISTOR	
Q2			DTC114YUA	DIGITAL TRANSISTOR	
Q3			2SB1443	TRANSISTOR	
Q4			2SA1576A	TRANSISTOR	
Q5			DTC114YUA	DIGITAL TRANSISTOR	
Q6 ,7			2SB1443	TRANSISTOR	
Q8			2SC4081	TRANSISTOR	
Q9 ,10			DTC114YUA	DIGITAL TRANSISTOR	K
Q10			DTC114YUA	DIGITAL TRANSISTOR	M1E1
Q11			2SB1565(E,F)	TRANSISTOR	
Q12			DTA124EUA	DIGITAL TRANSISTOR	
Q13			2SA1576A	TRANSISTOR	
Q14 ,15			2SB1188(Q,R)	TRANSISTOR	K
Q15			2SB1188(Q,R)	TRANSISTOR	M1E1
Q16			2SC4081	TRANSISTOR	
Q17			DTA123JK	DIGITAL TRANSISTOR	
Q18			DTC124EUA	DIGITAL TRANSISTOR	
Q19			2SA1576A	TRANSISTOR	
Q20			2SC4081	TRANSISTOR	
Q21			2SA1576A	TRANSISTOR	
Q22 ,23			2SC4081	TRANSISTOR	
Q24			2SA1576A	TRANSISTOR	
Q25			2SC4081	TRANSISTOR	
Q26			DTA124EUA	DIGITAL TRANSISTOR	
Q27			DTC143TUA	DIGITAL TRANSISTOR	
Q28			DTA124EUA	DIGITAL TRANSISTOR	
Q29			DTC143TUA	DIGITAL TRANSISTOR	
Q30			DTC124EUA	DIGITAL TRANSISTOR	
Q31 ,32			DTC143TUA	DIGITAL TRANSISTOR	
Q33			2SC4081	TRANSISTOR	
Q34			DTC143TUA	DIGITAL TRANSISTOR	
Q35			DTC124EUA	DIGITAL TRANSISTOR	
Q36			DTC143TUA	DIGITAL TRANSISTOR	
Q37 -39			DTC124EUA	DIGITAL TRANSISTOR	
Q40 ,41			2SB1188(Q,R)	TRANSISTOR	
Q42			2SC4081	TRANSISTOR	

E : Europe K : North America M : Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

(X35-423x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
Q43			DTA124EUA	DIGITAL TRANSISTOR	
Q44			DTC114EUA	DIGITAL TRANSISTOR	
Q45			2SC4081	TRANSISTOR	
TH1			PT722A100C	POSITIVE RESISTOR	
A1		*	W02-3318-05	FM FRONT-END ASSY	K
A1		*	W02-3319-05	FM FRONT-END ASSY	M1E1
VIDEO UNIT (X35-423x-xx)					
C10 -12			CK73GB1H103K	CHIP C 0.010UF	K
C21			CK73EB1C225K	CHIP C 2.2UF	K
C22			CK73GB1H103K	CHIP C 0.010UF	K
C23			C92-0628-05	CHIP-TAN 10UF	10WV
C201			CK73GB1C104K	CHIP C 0.10UF	K
C202			CC73GCH1H101J	CHIP C 100PF	J
C203,204			CK73GB1C104K	CHIP C 0.10UF	K
C207-209			CK73GB1C104K	CHIP C 0.10UF	K
C210			CC73GCH1H330J	CHIP C 33PF	J
C211			CC73GCH1H101J	CHIP C 100PF	J
C212			CC73GCH1H330J	CHIP C 33PF	J
C213,214			CK73GB1C104K	CHIP C 0.10UF	K
C215			CK73FB1C105K	CHIP C 1.0UF	K
C216,217			CK73GB1C104K	CHIP C 0.10UF	K
C218,219			CC73GCH1H330J	CHIP C 33PF	J
C220			CC73GCH1E102J	CHIP C 1000PF	J
C221,222			CK73GB1C104K	CHIP C 0.10UF	K
C223			CC73GCH1H561J	CHIP C 560PF	J
C224			CK73FB1H104K	CHIP C 0.10UF	K
C225			CK73GB1C104K	CHIP C 0.10UF	K
C226			CC73GCH1H101J	CHIP C 100PF	J
C227			CC73GCH1E102J	CHIP C 1000PF	J
C228			CK73FB1C105K	CHIP C 1.0UF	K
C229			CC73GCH1H331J	CHIP C 330PF	J
C230			CC73GCH1H221J	CHIP C 220PF	J
C231,232			CK73GB1C104K	CHIP C 0.10UF	K
C233			CK73DF1E106Z	CERAMIC 10UF	
C234			CK73EB1C225K	CHIP C 2.2UF	K
C235,236			CK73FB1C105K	CHIP C 1.0UF	K
C237,238			CK73GB1C104K	CHIP C 0.10UF	K
C239			CK73FB1H104K	CHIP C 0.10UF	K
C240			CK73EB1E105K	CHIP C 1.0UF	K
C241			CC73GCH1H120J	CHIP C 12PF	J
C242			CC73GCH1H390J	CHIP C 39PF	J
C243,244			CK73GB1C104K	CHIP C 0.10UF	K
C245			CK73GB1A224K	CHIP C 0.22UF	K
C246-248			CK73GB1C104K	CHIP C 0.10UF	K
C249			CK73DF1E106Z	CERAMIC 10UF	
C250			CK73DF1C106Z	CERAMIC 10UF	
C251,252			CK73GB1C104K	CHIP C 0.10UF	K
C253			CK73DF1C106Z	CERAMIC 10UF	
C254			CK73GB1H103K	CHIP C 0.010UF	K
C255			C92-0628-05	CHIP-TAN 10UF	10WV
C256			CC73GCH1H101J	CHIP C 100PF	J
C300			CK73DF1C106Z	CERAMIC 10UF	
C301			CK73GB1C104K	CHIP C 0.10UF	K
C302			CK73DF1C106Z	CERAMIC 10UF	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C303			CK73DF1E106Z	CERAMIC 10UF	
C304			CK73GB1H103K	CHIP C 0.010UF	K
C305			CK73DF1E106Z	CERAMIC 10UF	
C306			CK73GB1C104K	CHIP C 0.10UF	K
C307			CK73GB1H103K	CHIP C 0.010UF	K
C308,309			CK73DF1E106Z	CERAMIC 10UF	
C310			CK73GB1H103K	CHIP C 0.010UF	K
C326			CK73EB0J106K	CHIP C 10UF	K
C332			CK73GB1H103K	CHIP C 0.010UF	K
C333			CK73DF1E106Z	CERAMIC 10UF	
C400			CC73GCH1H331J	CHIP C 330PF	J
C401			CK73FB1C105K	CHIP C 1.0UF	K
C402			C92-1452-05	ELECTRO 100UF	10WV
C403			CK73GB1H103K	CHIP C 0.010UF	K
C404			CK73GB0J105K	CHIP C 1.0UF	K
C405			CK73GB1H153K	CHIP C 0.015UF	K
C406			CK73EB1A475K	CHIP C 4.7UF	K
C407			CC73GCH1H151J	CHIP C 150PF	J
C408			CC73GCH1E102J	CHIP C 1000PF	J
C409			CK73GB1H103K	CHIP C 0.010UF	K
C410			CK73GB1C104K	CHIP C 0.10UF	K
C411			CK73EB0J106K	CHIP C 10UF	K
C412			CK73GB1C104K	CHIP C 0.10UF	K
C500			CK73FB1C105K	CHIP C 1.0UF	K
C501			CC73GCH1H101J	CHIP C 100PF	J
C502			CK73FB1H104K	CHIP C 0.10UF	K
C503			CC73GCH1H101J	CHIP C 100PF	J
C504			C92-0628-05	CHIP-TAN 10UF	10WV
C505-507			CK73GB1C104K	CHIP C 0.10UF	K
C508			CC73GCH1H471J	CHIP C 470PF	J
C509			CK73GB1H103K	CHIP C 0.010UF	K
C511			CC73GCH1H331J	CHIP C 330PF	J
C512			CK73GB1H103K	CHIP C 0.010UF	K
C600		*	C93-1210-05	CERAMIC CAPACITOR	
C601,602			CK73FB1H104K	CHIP C 0.10UF	K
C603			C93-1106-05	CERAMIC 0.033UF	
C604			C93-1127-05	CERAMIC CAPACITOR	
C700			CK73GB1H103K	CHIP C 0.010UF	K
C701			CC73GCH1H180J	CHIP C 18PF	J
C702			CC73GCH1H220J	CHIP C 22PF	J
C704-716			CK73FB1C105K	CHIP C 1.0UF	K
C708-716			CK73FB1C105K	CHIP C 1.0UF	K
C717			CC73GCH1H270J	CHIP C 27PF	J
C717			CC73GCH1H470J	CHIP C 47PF	J
C718,719			CK73FB1C105K	CHIP C 1.0UF	K
C720			CK73EB1C225K	CHIP C 2.2UF	K
C724,725			CK73EB1C225K	CHIP C 2.2UF	K
C726			CK73GB1H103K	CHIP C 0.010UF	K
C727			C92-0628-05	CHIP-TAN 10UF	10WV
C728			CK73EB1A475K	CHIP C 4.7UF	K
C729			CK73FB1C105K	CHIP C 1.0UF	K
C730			CK73EB1C225K	CHIP C 2.2UF	K
C731-733			CK73GB1H223K	CHIP C 0.022UF	K
C734			CK73GB1C104K	CHIP C 0.10UF	K
C735			C92-0628-05	CHIP-TAN 10UF	10WV

E : Europe K : North America M : Other Areas

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

(X35-423x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
C736			CC73GCH1H180J	CHIP C 18PF J	M1E1
C737			CC73GCH1H270J	CHIP C 27PF J	
C738			C92-0628-05	CHIP-TAN 10UF 10WV	
C739			CK73FB1H104K	CHIP C 0.10UF K	
C740,741			CK73GB1H103K	CHIP C 0.010UF K	
C742			CK73EB1C225K	CHIP C 2.2UF K	
C744			C92-0628-05	CHIP-TAN 10UF 10WV	
C745			CK73FB1H104K	CHIP C 0.10UF K	
C747			CK73GB1A474K	CHIP C 0.47UF K	
C748,749			CK73FB1H104K	CHIP C 0.10UF K	
C750			C92-0628-05	CHIP-TAN 10UF 10WV	M1
C751			CK73GB1H103K	CHIP C 0.010UF K	
C801			CK73GB1H103K	CHIP C 0.010UF K	
CN10			E40-9786-05	FLAT CABLE CONNECTOR	
CN80			E41-0153-05	FLAT CABLE CONNECTOR	
CN200			E40-9699-05	FLAT CABLE CONNECTOR	
CN600			E41-0132-05	PIN ASSY	
F600			F53-0198-05	FUSE	
L10			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L32			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L200			L40-1505-34	SMALL FIXED INDUCTOR(15UH)	
L201,202			L40-2795-34	SMALL FIXED INDUCTOR(2.7UH)	
L300			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L302,303			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L304			L40-2795-34	SMALL FIXED INDUCTOR(2.7UH)	
L400			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L500			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
L600			L33-1812-05	CHOKE COIL	
L601,602			L19-0703-05	TRANSFORMER FOR CONVERTER	
L700		*	L40-4705-79	SMALL FIXED INDUCTOR(47UH)	
L701,702			L40-1001-78	SMALL FIXED INDUCTOR(10UH)	
X400			L78-0549-05	RESONATOR (50KHZ)	
X700		*	L77-2806-05	CRYSTAL RESONATOR(3.579545MHZ)	
X701		*	L77-2807-05	CRYSTAL RESONATOR(4.433619MHZ)	M1E1
CP200			R90-1038-05	MULTI-COMP 560 X4	
CP201,202			R90-1014-05	MULTI-COMP 100 X4	
R10 ,11			RK73GB2A333J	CHIP R 33K J 1/10W	
R12 -15			RK73GB2A100J	CHIP R 10 J 1/10W	
R20		*	RK73GB2A273J	CHIP R 27K J 1/10W	
R21			R92-1213-05	CHIP R 100 J 1/2W	
R22			RK73GB2A513J	CHIP R 51K J 1/10W	
R70 -76			RK73EB2E101J	CHIP R 100 J 1/4W	
R78 -85			RK73EB2E101J	CHIP R 100 J 1/4W	
R88		*	RK73GB2A750J	CHIP R 75 J 1/10W	
R90 -92			RK73EB2E101J	CHIP R 100 J 1/4W	K
R90 -97			RK73EB2E101J	CHIP R 100 J 1/4W	M1E1
R94 -97			RK73EB2E101J	CHIP R 100 J 1/4W	K
R207		*	RK73GB2A105J	CHIP R 1.0M J 1/10W	
R208		*	RK73GB2A391J	CHIP R 390 J 1/10W	
R209,210		*	RK73GB2A564J	CHIP R 560K J 1/10W	
R211			RN73GH1J362D	CHIP R 3.6K D 1/16W	
R212			RN73GH1J562D	CHIP R 5.6K D 1/16W	
R213			RK73GB2A473J	CHIP R 47K J 1/10W	
R214		*	RK73GB2A683J	CHIP R 68K J 1/10W	
R215			RK73GB2A243J	CHIP R 24K J 1/10W	
R216		*	RK73GB2A683J	CHIP R 68K J 1/10W	
R217		*	RK73GB2A105J	CHIP R 1.0M J 1/10W	
R218			RK73GB2A103J	CHIP R 10K J 1/10W	
R219			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R220			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R221			RK73GB2A101J	CHIP R 100 J 1/10W	
R222		*	RK73GB2A331J	CHIP R 330 J 1/10W	
R226			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R227			RK73GB2A822J	CHIP R 8.2K J 1/10W	
R228			RK73GB2A103J	CHIP R 10K J 1/10W	
R229			RN73GH1J242D	CHIP R 2.4K D 1/16W	
R230			RN73GH1J332D	CHIP R 3.3K D 1/16W	
R231			RK73GB2A224J	CHIP R 220K J 1/10W	
R232			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R302			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R303			RK73FB2B681J	CHIP R 680 J 1/8W	
R304			RK73GB2A472J	CHIP R 4.7K J 1/10W	
R305			RK73GB2A103J	CHIP R 10K J 1/10W	
R321		*	RK73GB2A821J	CHIP R 820 J 1/10W	
R325			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R326			RK73GB2A333J	CHIP R 33K J 1/10W	
R340		*	RK73FB2B220J	CHIP R 22 J 1/8W	
R341		*	RK73FB2B120J	CHIP R 12 J 1/8W	
R400			RK73GB2A361J	CHIP R 360 J 1/10W	
R401		*	RK73GB2A914J	CHIP R 910K J 1/10W	
R402		*	RK73GB2A102J	CHIP R 1.0K J 1/10W	
R403		*	RK73GB2A302J	CHIP R 3.0K J 1/10W	
R404		*	RK73GB2A182J	CHIP R 1.8K J 1/10W	
R404		*	RK73GB2A202J	CHIP R 2.0K J 1/10W	M1E1
R406			RK73GB2A361J	CHIP R 360 J 1/10W	
R406		*	RK73GB2A391J	CHIP R 390 J 1/10W	
R409,410		*	RK73GB2A561J	CHIP R 560 J 1/10W	
R412			RK73GB2A101J	CHIP R 100 J 1/10W	
R413			RK73GB2A471J	CHIP R 470 J 1/10W	
R414,415			RK73GB2A103J	CHIP R 10K J 1/10W	
R416			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R420			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R430,431			RK73GB2A471J	CHIP R 470 J 1/10W	
R498			RK73GB2A104J	CHIP R 100K J 1/10W	M1E1
R499			RK73GB2A473J	CHIP R 47K J 1/10W	
R502		*	RK73GB2A121J	CHIP R 120 J 1/10W	
R503			RK73EB2E472J	CHIP R 4.7K J 1/4W	
R504		*	RK73GB2A181J	CHIP R 180 J 1/10W	
R505			RK73GB2A103J	CHIP R 10K J 1/10W	
R506-509			RK73GB2A222J	CHIP R 2.2K J 1/10W	
R510			RK73GB2A102J	CHIP R 1.0K J 1/10W	
R511			RK73GB2A103J	CHIP R 10K J 1/10W	
R512		*	RK73GB2A821J	CHIP R 820 J 1/10W	
R513			RK73GB2A822J	CHIP R 8.2K J 1/10W	
R514			RK73GB2A471J	CHIP R 470 J 1/10W	
R515			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R516			RK73GB2A471J	CHIP R 470 J 1/10W	
R517			RK73GB2A392J	CHIP R 3.9K J 1/10W	

E : Europe K : North America M : Other Areas

△ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

(X35-423x-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
R518			RK73GB2A102J	CHIP R 1.0K J 1/10W	M1E1
R519			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R520			RK73GB2A471J	CHIP R 470 J 1/10W	
R521			RK73GB2A392J	CHIP R 3.9K J 1/10W	
R600			RK73FB2B102J	CHIP R 1.0K J 1/8W	
R601			RK73FB2B103J	CHIP R 10K J 1/8W	
R602			R92-3013-05	METAL R 1K	
R700			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R701			RK73GB2A471J	CHIP R 470 J 1/10W	
R702		*	RK73GB2A152J	CHIP R 1.5K J 1/10W	
R703		*	RK73GB2A242J	CHIP R 2.4K J 1/10W	M1E1
R707		*	RK73GB2A105J	CHIP R 1.0M J 1/10W	
R708			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R709			RK73GB2A103J	CHIP R 10K J 1/10W	
R710		*	RK73GB2A752J	CHIP R 7.5K J 1/10W	
R712-715			RK73GB2A101J	CHIP R 100 J 1/10W	
R716			RK73GB2A473J	CHIP R 47K J 1/10W	
R717,718			RK73GB2A101J	CHIP R 100 J 1/10W	
R719			RK73GB2A103J	CHIP R 10K J 1/10W	
R720		*	RK73GB2A561J	CHIP R 560 J 1/10W	
R721,722			RK73GB2A101J	CHIP R 100 J 1/10W	K
R725,726			RK73GB2A101J	CHIP R 100 J 1/10W	
R801			RK73GB2A272J	CHIP R 2.7K J 1/10W	
R802			RK73GB2A332J	CHIP R 3.3K J 1/10W	
R803			RK73GB2A562J	CHIP R 5.6K J 1/10W	
R804			RK73GB2A103J	CHIP R 10K J 1/10W	
R805		*	RK73GB2A273J	CHIP R 27K J 1/10W	
R806-809		*	RK73EB2E181J	CHIP R 180 J 1/4W	
R810		*	RK73GB2A273J	CHIP R 27K J 1/10W	
VR200			R32-0246-05	SEMI FIXED VARIABLE RESISTOR	
VR201			R32-0244-05	SEMI FIXED VARIABLE RESISTOR	K
VR302			R32-0235-05	SEMI FIXED VARIABLE RESISTOR	
W1 -3			R92-1252-05	CHIP R 0 OHM J 1/16W	
W202,203			R92-1252-05	CHIP R 0 OHM J 1/16W	
W400			R92-1252-05	CHIP R 0 OHM J 1/16W	
W498			R92-1252-05	CHIP R 0 OHM J 1/16W	
W704			R92-1252-05	CHIP R 0 OHM J 1/16W	
S1 -6			S70-0860-05	TACT SWITCH	
D10 ,11			MA3056WA	ZENER DIODE	
D20			MA8056-M	ZENER DIODE	
D200			MA716	DIODE	K
D202			MA152K	DIODE	
D203			MA335	VARIABLE CAPACITANCE DIODE	
D204,205			MA8051-M	ZENER DIODE	
D300			MA8082-M	ZENER DIODE	
D301			DAN202U	DIODE	
D501			MA8056-M	ZENER DIODE	
IC20		*	TPS818	ANALOGUE IC	
IC200			LZ9GJ24	MOS-IC	
IC201			NJM2107F	ANALOGUE IC	
IC202			TC74AC74FT	MOS-IC	K
IC301			NJM4580V	ANALOGUE IC	
IC400			NJW1303V	ANALOGUE IC	

E : Europe K : North America M : Other Areas

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation	
IC401		*	TC7W00FU	MOS-IC	M1E1	
IC402,403			TC7W34FU	MOS-IC		
IC500			MB90096-234	MOS-IC		
IC501			TC74HC07AFE	MOS-IC		
IC700			BR24C01AF-W	MEMORY IC		
IC701		*	AN2546FH-A	ANALOGUE IC		M1E1
IC702			TDA4665T	ANALOGUE IC		
IC703			NJU7200U30	ANALOGUE IC		
Q10 -12			DTC143ZUA	DIGITAL TRANSISTOR		
Q13 ,14			DTA143ZUA	DIGITAL TRANSISTOR		
Q200			2SC2411K	TRANSISTOR	M1E1	
Q201			DTC124EUA	DIGITAL TRANSISTOR		
Q300,301			2SC4081	TRANSISTOR		
Q302			2SA1577	TRANSISTOR		
Q303			2SC4097	TRANSISTOR		
Q401			2SC4081	TRANSISTOR		M1E1
Q403			2SA1576A	TRANSISTOR		
Q497			DTC144EUA	DIGITAL TRANSISTOR		
Q498			DTA144EUA	DIGITAL TRANSISTOR		
Q500			2SC4081	TRANSISTOR		
Q600			DTC124EUA	DIGITAL TRANSISTOR	M1E1	
Q601			DTA143EUA	DIGITAL TRANSISTOR		
Q602-604			2SC3303(Y-LB)	TRANSISTOR		
Q700			2SC4081	TRANSISTOR		
Q701			2SA1576A	TRANSISTOR		
Q801			DTC143ZUA	DIGITAL TRANSISTOR		M1E1
Q802			DTA144EUA	DIGITAL TRANSISTOR		
Q803			DTC143ZUA	DIGITAL TRANSISTOR		
Q804			DTC144EUA	DIGITAL TRANSISTOR		
HIDEAWAY UNIT (X90-366x-xx)						
301	1F	*	A01-2790-02	METALLIC CABINET	KM1	
303	1E	*	A70-2031-05	REMOTE CONTROLLER ASSY		
305	1E	*	D10-4589-04	LEVER		
305	1E		D10-4680-04	LEVER		
DC11	1E	*	E30-6043-05	DC CORD (with 3A,10A FUSE)		KM1
DC11	1E	*	E30-6044-05	DC CORD (with 3A,5A,10A FUSE)		
DC12	1E	*	E30-6041-05	DC CORD		KM1
DC13	1E	*	E30-6045-05	CORD WITH PLUG		
DC14	1E		E30-4631-05	CORD WITH PLUG		
-	1E		F52-0002-05	FUSE (3A MINI BLADE in DC11)		E1
-			F52-0004-05	FUSE (5A MINI BLADE in DC11)		
-			F52-0006-05	FUSE (10A MINI BLADE in DC11)		
317			H30-0051-05	MAGIC TAPE	KM1	
-			H12-2645-14	PACKING FIXTURE (TOP PLATE)		
-			H12-2662-03	PACKING FIXTURE (PACKING)		
-			H25-0336-04	PROTECTION BAG (170X250X0.03)		
-			H25-0338-04	PROTECTION BAG (250X350X0.03)		
-			H25-1111-04	PROTECTION BAG (280X450X0.03)		
318			1E	*	J19-5157-03	CONECTOR HOLDER
319	1E		J21-3801-04	MOUNTING HARDWARE		
320	1E		J21-9784-04	MOUNTING HARDWARE		
321	1F		N99-1558-05	SCREW SET		

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without **Part No.** are not supplied.Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.Teile ohne **Parts No.** werden nicht geliefert.

(D40-xxxx-xx)

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
322	1E		N99-1710-05	SCREW SET	KM1
N	3F		N83-3008-46	PAN HEAD TAPTITE SCREW	
P	2E		N89-3006-45	BINDING HEAD TAPTITE SCREW	
323	1E		T90-0512-05	ANTENNA ADAPTOR	E1
MECHANISM ASSY (D40-xxxx-xx)					
1	1B		A10-4926-08	CHASSIS ASSY	KM1
1	1B	*	A10-4957-08	CHASSIS ASSY	E1
2	2B		A11-1614-08	SUB CHASSIS	
6	2B		D10-4679-08	SLIDER ASSY	
7	3A		D09-0641-08	CLUTCH ASSY	
8	3B		D09-0642-08	CLUTCH ASSY	
9	1B		D13-2192-08	RACK (GEAR)	
10	3A		D13-2193-08	GEAR	
11	3A		D13-2194-08	GEAR	
12	3A		D13-2195-08	GEAR	
13	3B		D13-2196-08	GEAR	
14	3B		D13-2197-08	GEAR	
15	3B		D13-2198-08	GEAR	
16	3B		D13-2199-08	GEAR	
17	3B		D13-2200-08	GEAR	
19	3B		D13-2201-08	GEAR	
20	1A		D14-0718-08	ROLER	
21	3B		D13-2231-08	GEAR	
22	2B		D13-2229-08	GEAR	
23	2B		D32-0644-08	STOPER	
25	3A		E39-0441-08	WIRE HARNESS	
26	3A		E39-0433-08	WIRE HARNESS	
27	3B		E39-0434-08	WIRE HARNESS	
28	3B		E39-0435-08	WIRE HARNESS	
30	2A		G02-1431-08	SPRING	
31	2A		G16-1405-08	SHEET	
33	2A		G16-1414-08	SHEET	
34	3A		G16-1415-08	SHEET	
37	2B		G01-3127-08	SPRING	
38	2B		J12-1186-08	PIN	
39	3B		J19-5104-08	HOLDER	
40	3B		J19-5102-08	HOLDER	
41	2A		J19-5098-08	HOLDER	
42	2B		J19-5099-08	HOLDER	
43	3A		J21-9800-08	MOUNTING HARDWARE	
44	3B		J21-9801-08	MOUNTING HARDWARE	
45	3B		J26-4039-08	SENSOR ASSY	
46	3A		J74-1277-08	RIGID PRINTED WIRING BOARD	
47	2A		J90-1028-08	GUID	
48	2B		J90-1027-08	GUID	
VR1	3A		R31-0233-08	VARIABLE RESISTOR	
M1,2	3A		T42-1062-08	MOTOR ASSY	
A	2A		N09-4397-08	MACHINE SCREW	
B	1A		N09-4489-08	MACHINE SCREW	
C	1A		N09-6008-08	MACHINE SCREW	
D	2A		N09-6009-08	MACHINE SCREW	
E	2B		N09-4305-08	MACHINE SCREW	

Ref. No.	A d d	N e w	Parts No.	Description	Desti- nation
F	3B		N09-4376-08	MACHINE SCREW (2X3)	
G	3B		N09-4164-08	TAPTITE SCREW (2X3)	
J	3A		N19-1135-08	WASHER	
K	1A		N19-2131-08	WASHER	
L	3B		N29-0207-04	E RING	
M	3A		N09-6018-04	SCREW	

E : Europe K : North America M : Other Areas

⚠ indicates safety critical components.