


System Connections

(North American Model Only)

Connections

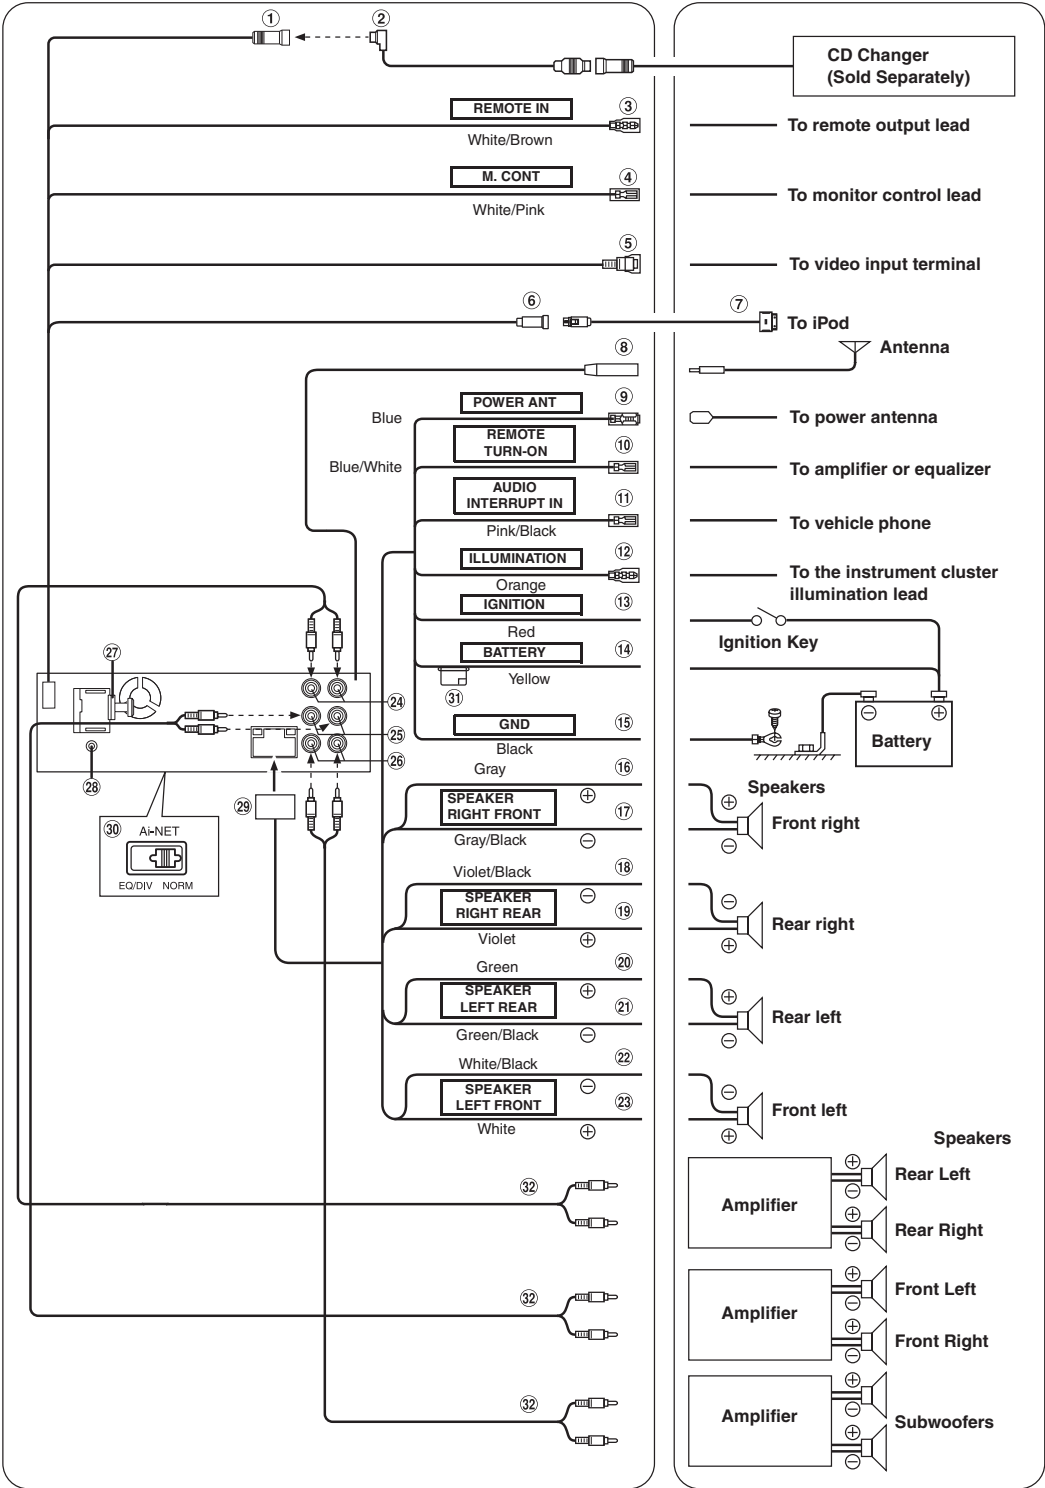

- ① **Ai-NET Connector**
Connect this to the output or input connector of another device (CD Changer, Equalizer, HD Radio™ TUNER MODULE, etc.) equipped with Ai-NET.


* *Interface adapter for iPod™ (KCA-420i) is not recommended for use with this product.*
 - You can input TV/video sound by connecting an optional Ai-NET/ RCA Interface cable (KCA-121B) to this component.
- ② **Ai-NET Cable (Included with CD Changer)**
- ③ **Remote Control Input Lead (White/Brown)**
Connect the external Alpine product to the remote control output lead.
- ④ **Monitor Control Lead (White/Pink)**
Connect this to the Monitor Control Lead of the touch panel-compatible monitor.
- ⑤ **Video Output Connector**
This connector is used in combination with the video inputs of another video product (Touch panel-compatible monitor, etc.)
- ⑥ **iPod Direct Connector**
Control iPod signals.
Connect this to an iPod, using the (also separately sold) FULL SPEED™ Connection Cable (KCE-422i).
- ⑦ **FULL SPEED™ Connection Cable (KCE-422i) (sold separately)**
- ⑧ **Antenna Receptacle**
- ⑨ **Power Antenna Lead (Blue)**
Connect this lead to the +B terminal of your power antenna, if applicable.
 - This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier or a signal processor, etc.*
- ⑩ **Remote Turn-On Lead (Blue/White)**
Connect this lead to the remote turn-on lead of your amplifier or signal processor.
- ⑪ **Audio Interrupt In Lead (Pink/Black)**
- ⑫ **Illumination Lead (Orange)**
This lead may be connected to the vehicle's instrument cluster illumination lead. This will allow the backlighting of the DVA-9861 to dim whenever the vehicle's lights are turned on.
- ⑬ **Switched Power Lead (Ignition) (Red)**
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+)12V only when the ignition is turned on or in the accessory position.
- ⑭ **Battery Lead (Yellow)**
Connect this lead to the positive (+) post of the vehicle's battery.
- ⑮ **Ground Lead (Black)**
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.
- ⑯ **Right Front (+) Speaker Output Lead (Gray)**
- ⑰ **Right Front (-) Speaker Output Lead (Gray/Black)**
- ⑱ **Right Rear (-) Speaker Output Lead (Violet/Black)**
- ⑲ **Right Rear (+) Speaker Output Lead (Violet)**
- ⑳ **Left Rear (+) Speaker Output Lead (Green)**
- ㉑ **Left Rear (-) Speaker Output Lead (Green/Black)**
- ㉒ **Left Front (-) Speaker Output Lead (White/Black)**
- ㉓ **Left Front (+) Speaker Output Lead (White)**
- ㉔ **Rear Output RCA Connectors**
RED is right and WHITE is left.
- ㉕ **Front Output RCA Connectors**
RED is right and WHITE is left.
- ㉖ **Subwoofer RCA Connectors**
RED is right and WHITE is left.
- ㉗ **Digital Output Terminal (Optical)**
Use when combining optical digital input compatible products.
- ㉘ **Steering Remote Control Interface Connector**
Connect to the steering remote control interface box.
 - Use a steering remote control extension cable if necessary.*
- ㉙ **Power Supply Connector**
- ㉚ **System Switch**
When connecting a processor or divider using Ai-NET, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.
 - Be sure to turn the power off to the unit before changing the switch position.*
- ㉛ **Fuse Holder (10A)**
- ㉜ **RCA Extension Cable (sold Separately)**

To prevent external noise from entering the audio system.

- Locate the unit and route the leads at least 10 cm away from the car harness.
- Keep the battery power leads as far away from other leads as possible.
- Connect the ground lead securely to a bare metal spot (remove any paint, dirt or grease if necessary) of the car chassis.
- If you add an optional noise suppressor, connect it as far away from the unit as possible. Your Alpine dealer carries various noise suppressors, contact them for further information.
- Your Alpine dealer knows best about noise prevention measures so consult your dealer for further information.


System Example

Connect the Ai-NET compatible digital audio processor (Fiber optic compatible) and touch panel-compatible monitor/changer.

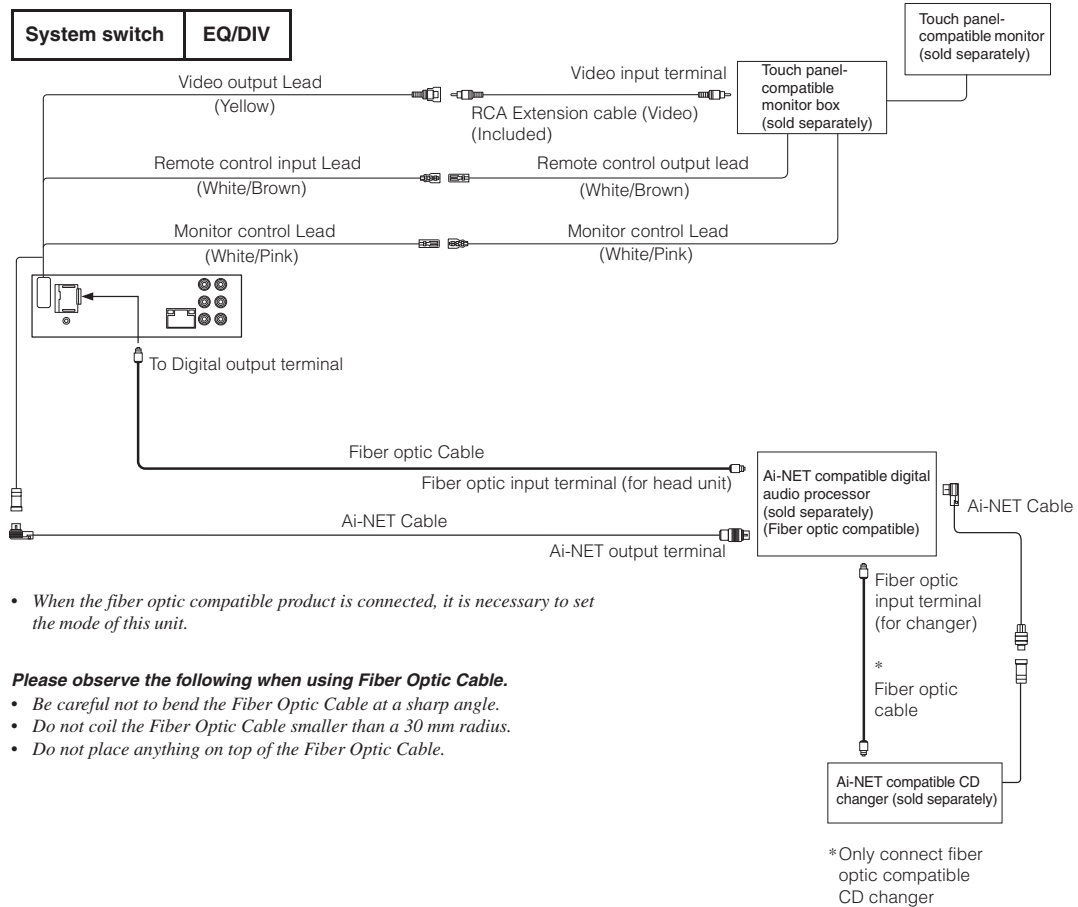

(General Foreign Model Only)

Connections

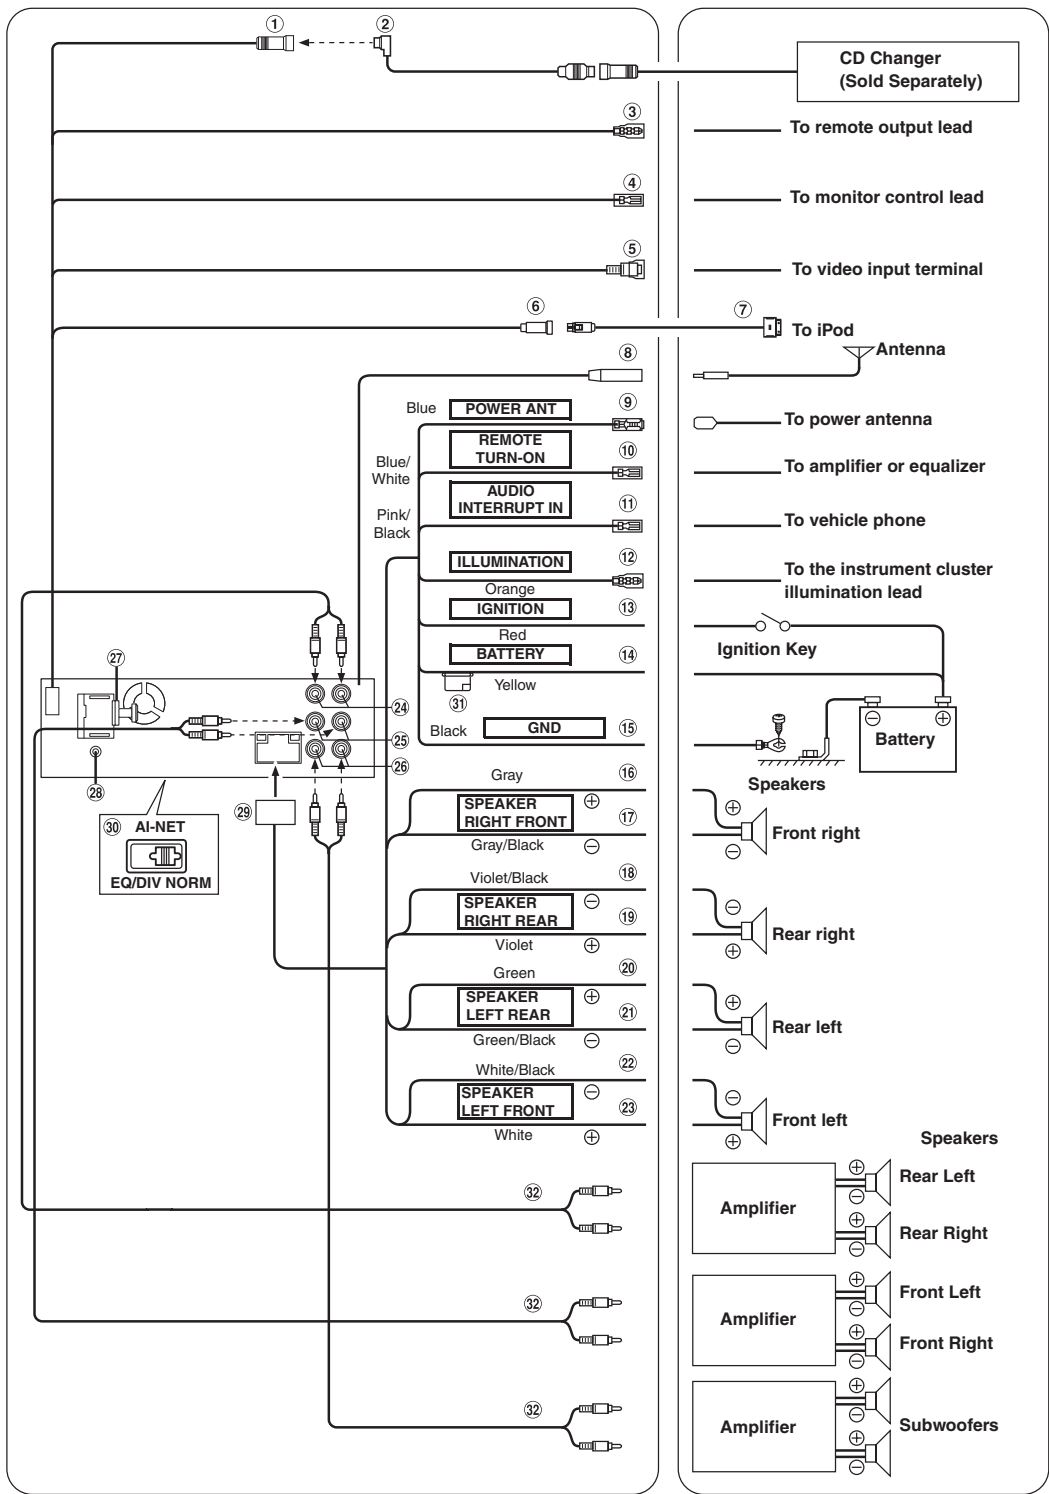

- ① **Ai-NET Connector**
Connect this to the output or input connector of another device (CD Changer, Equalizer, etc.) equipped with Ai-NET.


* *Interface adapter for iPod™ (KCA-420i) is not recommended for use with this product.*
• *You can input TV/video sound by connecting an optional Ai-NET/ RCA Interface cable (KCA-121B) to this component.*
- ② **Ai-NET Cable (Included with CD Changer)**
- ③ **Remote Control Input Lead (White/Brown)**
Connect the external Alpine product to the remote control output llead.
- ④ **Monitor Control Lead (White/Pink)**
Connect this to the Monitor Control Lead of the touch panel-compatible monitor.
- ⑤ **Video Output Connector**
This connector is used in combination with the video inputs of another video product (Touch panel compatible monitor, etc.)
- ⑥ **iPod Direct Connector**
Control iPod signals.
Connect this to an iPod, using the (also separately sold) FULL SPEED™ Connection Cable (KCE-422i).
- ⑦ **FULL SPEED™ Connection Cable (KCE-422i) (sold separately)**
- ⑧ **Antenna Receptacle**
- ⑨ **Power Antenna Lead (Blue)**
Connect this lead to the +B terminal of your power antenna, if applicable.
• *This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier or a signal processor, etc.*
- ⑩ **Remote Turn-On Lead (Blue/White)**
Connect this lead to the remote turn-on lead of your amplifier or signal processor.
- ⑪ **Audio Interrupt In Lead (Pink/Black)**
- ⑫ **Illumination Lead (Orange)**
This lead may be connected to the vehicle's instrument cluster illumination lead. This will allow the backlighting of the DVA-9861E to dim whenever the vehicle's lights are turned on.
- ⑬ **Switched Power Lead (Ignition) (Red)**
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+)12V only when the ignition is turned on or in the accessory position.
- ⑭ **Battery Lead (Yellow)**
Connect this lead to the positive (+) post of the vehicle's battery.
- ⑮ **Ground Lead (Black)**
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.
- ⑯ **Right Front (+) Speaker Output Lead (Gray)**
- ⑰ **Right Front (-) Speaker Output Lead (Gray/Black)**
- ⑱ **Right Rear (-) Speaker Output Lead (Violet/Black)**
- ⑲ **Right Rear (+) Speaker Output Lead (Violet)**
- ⑳ **Left Rear (+) Speaker Output Lead (Green)**
- ㉑ **Left Rear (-) Speaker Output Lead (Green/Black)**
- ㉒ **Left Front (-) Speaker Output Lead (White/Black)**
- ㉓ **Left Front (+) Speaker Output Lead (White)**
- ㉔ **Rear Output RCA Connectors**
RED is right and WHITE is left.
- ㉕ **Front Output RCA Connectors**
RED is right and WHITE is left.
- ㉖ **Subwoofer RCA Connectors**
RED is right and WHITE is left.
- ㉗ **Digital Output Terminal (Optical)**
Use when combining optical digital input compatible products.
- ㉘ **Steering Remote Control Interface Connector**
Connect to the steering remote control interface box.
• *Use a steering remote control extension cable if necessary.*
- ㉙ **Power Supply Connector**
- ㉚ **System Switch**
When connecting a processor or divider using Ai-NET, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.
• *Be sure to turn the power off to the unit before changing the switch position.*
- ㉛ **Fuse Holder (10A)**
- ㉜ **RCA Extension Cable (sold Separately)**

To prevent external noise from entering the audio system.


- Locate the unit and route the leads at least 10 cm away from the car harness.
- Keep the battery power leads as far away from other leads as possible.
- Connect the ground lead securely to a bare metal spot (remove any paint, dirt or grease if necessary) of the car chassis.
- If you add an optional noise suppressor, connect it as far away from the unit as possible. Your Alpine dealer carries various noise suppressors, contact them for further information.
- Your Alpine dealer knows best about noise prevention measures so consult your dealer for further information.

System Example

Connect the Ai-NET compatible digital audio processor (Fiber optic compatible) and touch panel compatible monitor/changer.

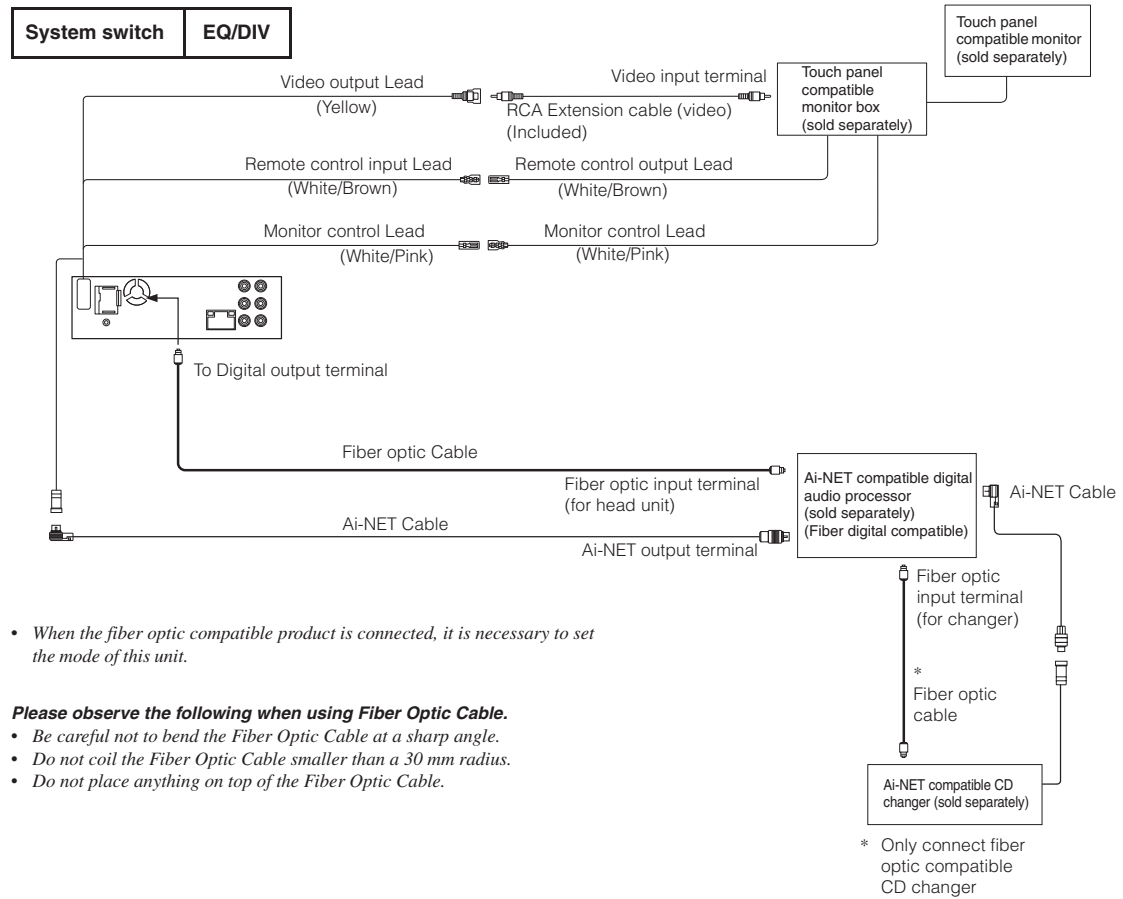

Extension Cable

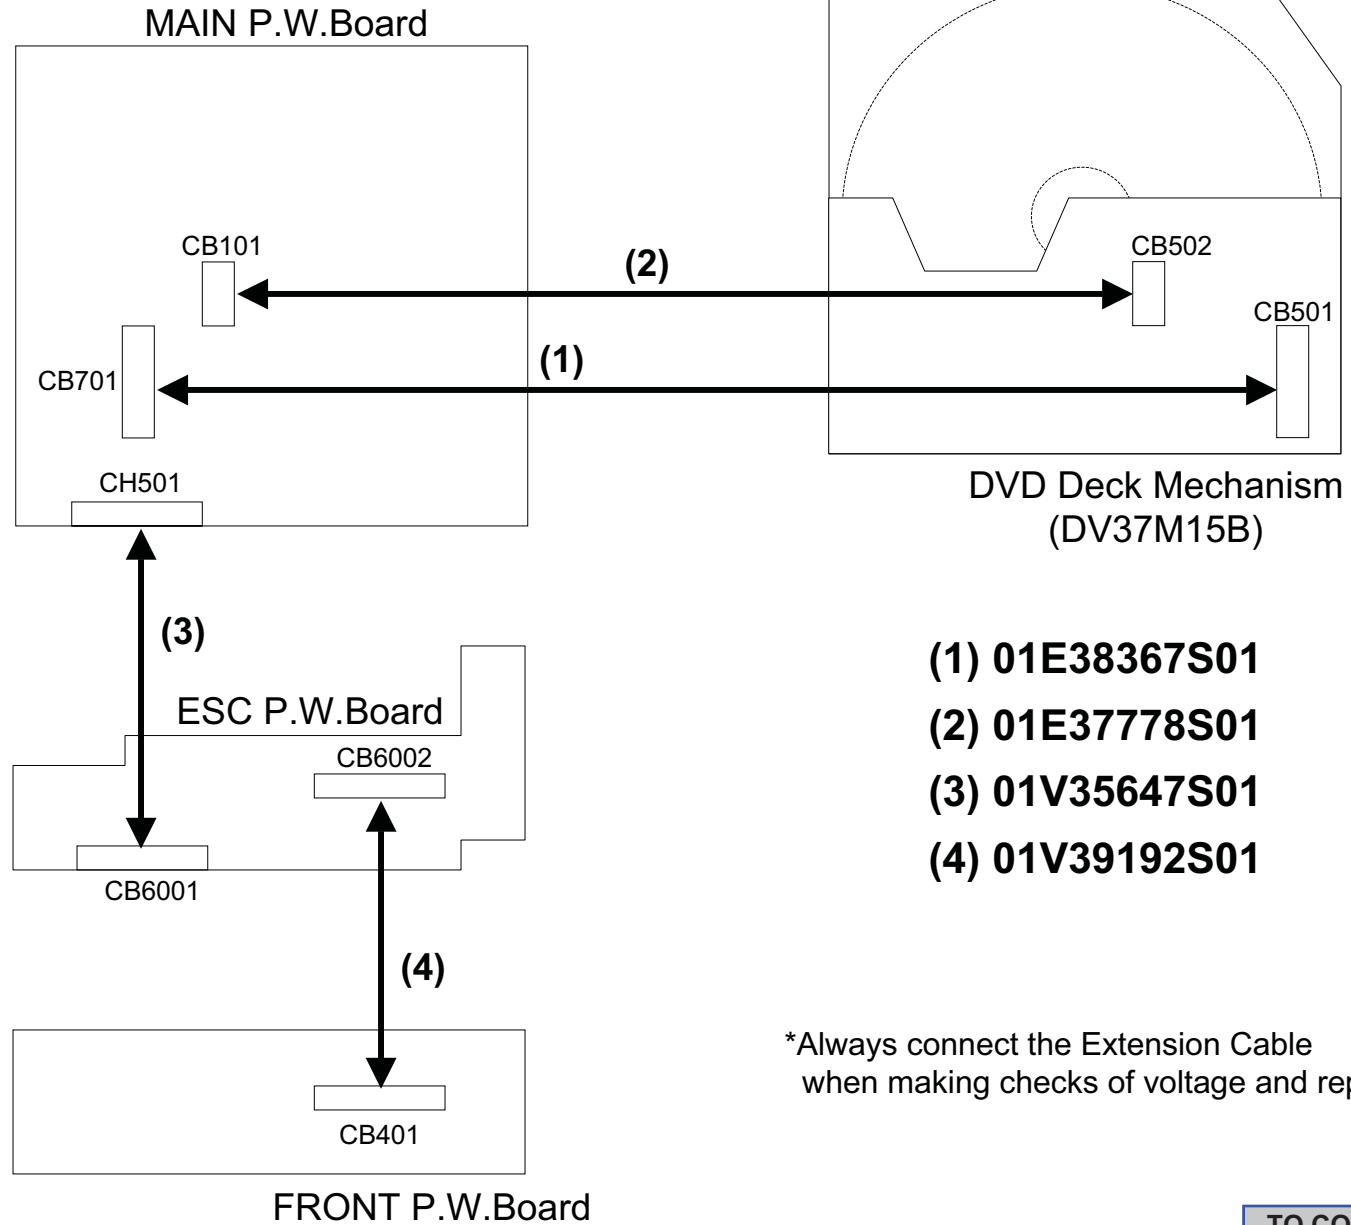

(1) 01E38367S01

(2) 01E37778S01

(3) 01V35647S01

(4) 01V39192S01

*Always connect the Extension Cable
when making checks of voltage and repair.

[TO CONTENTS](#)

Electrical Parts List

* Each parts on P.W.Board are described in order of the reference number.

NOTE : #1 : For North American Model Only,
 \$1 : For General Foreign (Region3) Model Only,
 %1 : For General Foreign (Region4) Model Only,
 &1 : For Chinese Model Only,
 Others : Common.

=====MAIN P.W.Board

C001	08S65671Y01	CAP,CER 226KX5R1A-CP
C002	08S65671Y01	CAP,CER 226KX5R1A-CP
C021	08S45676W85	CAP,CER 104K-B1C -CP
C022	08S45677W54	CAP,CER 561J-CH1H-CP
C023	08S65128F78	CAP,CER.223K-B1H -CP
C025	08S45676W84	CAP,CER 683K-B1C -CP
C027	08S65128F78	CAP,CER.223K-B1H -CP
C105	08S65670Y01	CAP,CER 106KX5R1C-CP
C107	08S65670Y01	CAP,CER 106KX5R1C-CP
C108	08S45676W80	CAP,CER 223K-B1E -CP
C109	08S45676W80	CAP,CER 223K-B1E -CP
C110	08S65670Y01	CAP,CER 106KX5R1C-CP
C111	08S45677W52	CAP,CER 471J-CH1H-CP
C112	08S65670Y03	CAP,CER 335KX5R1E-CP
C113	08S65670Y03	CAP,CER 335KX5R1E-CP
C114	08S45677W48	CAP,CER.331J-CH1H-CP
C115	08S45677W48	CAP,CER.331J-CH1H-CP
C116	08S45677W38	CAP,CER 121J-CH1H-CP
C117	08S45677W38	CAP,CER 121J-CH1H-CP
C118	08S45677W52	CAP,CER 471J-CH1H-CP
C125	08S45676W80	CAP,CER 223K-B1E -CP
C129	08S65670Y01	CAP,CER 106KX5R1C-CP
C130	08S45676W80	CAP,CER 223K-B1E -CP
C131	08S65670Y01	CAP,CER 106KX5R1C-CP
C201	08S45676W73	CAP,CER.103K-B1H -CP
C202	08S45676W84	CAP,CER 683K-B1C -CP
C203	08S45677W52	CAP,CER 471J-CH1H-CP
C204	08S45676W84	CAP,CER 683K-B1C -CP
C205	08S45677W52	CAP,CER 471J-CH1H-CP
C206	08S45676W83	CAP,CER 473K-B1C -CP
C207	08S45676W73	CAP,CER.103K-B1H -CP
C208	08S45676W83	CAP,CER 473K-B1C -CP
C209	08S45676W73	CAP,CER.103K-B1H -CP
C210	08S45676W85	CAP,CER 104K-B1C -CP
C211	08S45676W85	CAP,CER 104K-B1C -CP
C213	08S45677W60	CAP,CER 102J-CH1H-CP
C214	08S45677W60	CAP,CER 102J-CH1H-CP
C215	08S45677W60	CAP,CER 102J-CH1H-CP
C218	08S45677W60	CAP,CER 102J-CH1H-CP
C301	08S45677W60	CAP,CER 102J-CH1H-CP
C302	08S45677W16	CAP,CER.15RJ-CH1H-CP
C303	08S45677W16	CAP,CER.15RJ-CH1H-CP
C304	08S45677W25	CAP,CER 36RJ-CH1H-CP
C305	08S45677W25	CAP,CER 36RJ-CH1H-CP
C306	08S45677W16	CAP,CER.15RJ-CH1H-CP

DVA-9861/DVA-9861E

C307	08S45677W16	CAP,CER.15RJ-CH1H-CP
C308	08T65463Y01	CAP,CER 335K-B1A -CP
C309	08T65463Y01	CAP,CER 335K-B1A -CP
C310	08T65463Y01	CAP,CER 335K-B1A -CP
C311	08T65463Y01	CAP,CER 335K-B1A -CP
C314	08S65670Y02	CAP,CER 225KX5R1E-CP
C315	08S65670Y02	CAP,CER 225KX5R1E-CP
C316	08S65670Y02	CAP,CER 225KX5R1E-CP
C317	08S65670Y02	CAP,CER 225KX5R1E-CP
C318	08S65670Y02	CAP,CER 225KX5R1E-CP
C319	08S65670Y02	CAP,CER 225KX5R1E-CP
C327	08S45676W65	CAP,CER.222K-B1H -CP
C329	08S45676W85	CAP,CER 104K-B1C -CP
C330	08S65670Y01	CAP,CER 106KX5R1C-CP
C350	08-02764Z03	CAP,TF 224K-1E -CP
C351	08-02764Z03	CAP,TF 224K-1E -CP
C352	08-02764Z03	CAP,TF 224K-1E -CP
C353	08-02764Z03	CAP,TF 224K-1E -CP
C354	08S45677W60	CAP,CER 102J-CH1H-CP
C355	08S65674Y05	CAP,CER 105KX5R1C-CP
C356	08S45676W83	CAP,CER 473K-B1C -CP
C500	08S45676W85	CAP,CER 104K-B1C -CP
C5001	08S45677W36	CAP,CER.101J-CH1H-CP
C5004	08S45539Y04	CAP,CER 103KX7R2J-CP
C502	08S65676Y02	CAP,CER 475KX7R1A-CP
C503	08S45677W14	CAP,CER.12RJ-CH1H-CP
C5030	08S45677W20	CAP,CER.22RJ-CH1H-CP
C5031	08S45677W20	CAP,CER.22RJ-CH1H-CP
C5032	08S45677W20	CAP,CER.22RJ-CH1H-CP
C5033	08S45677W20	CAP,CER.22RJ-CH1H-CP
C504	08S45677W14	CAP,CER.12RJ-CH1H-CP
C505	08S45676W85	CAP,CER 104K-B1C -CP
C506	08S45676W83	CAP,CER 473K-B1C -CP
C507	08S65674Y02	CAP,CER 105KX5R1A-CP
C508	08S45677W60	CAP,CER 102J-CH1H-CP
C509	08S45676W80	CAP,CER 223K-B1E -CP
C510	08S45677W22	CAP,CER.27RJ-CH1H-CP
C511	08S45677W36	CAP,CER.101J-CH1H-CP
C515	08S45676W85	CAP,CER 104K-B1C -CP
C517	08S45676W80	CAP,CER 223K-B1E -CP
C520	08S45676W80	CAP,CER 223K-B1E -CP
C580	08S45676W85	CAP,CER 104K-B1C -CP
C606	08S45676W85	CAP,CER 104K-B1C -CP
C607	08S45676W80	CAP,CER 223K-B1E -CP
C608	08S45676W65	CAP,CER.222K-B1H -CP
C609	08S45677W36	CAP,CER.101J-CH1H-CP
C610	08S45676W80	CAP,CER 223K-B1E -CP
C700	08S65670Y01	CAP,CER 106KX5R1C-CP
C701	08S45676W80	CAP,CER 223K-B1E -CP
C702	08S45676W80	CAP,CER 223K-B1E -CP
C703	08S45676W80	CAP,CER 223K-B1E -CP
C704	08S45676W80	CAP,CER 223K-B1E -CP
C705	08S65670Y01	CAP,CER 106KX5R1C-CP
C706	08S45676W80	CAP,CER 223K-B1E -CP
C707	08S65128F69	CAP,CER.103K-B1H -CP
C708	08S45676W80	CAP,CER 223K-B1E -CP
C709	08S35374W07	CAP,CER 334K-B1C -CP

DVA-9861/DVA-9861E

C710	08S65670Y01	CAP,CER 106KX5R1C-CP
C711	08S65670Y01	CAP,CER 106KX5R1C-CP
C712	08S65670Y01	CAP,CER 106KX5R1C-CP
C713	08S65670Y01	CAP,CER 106KX5R1C-CP
C714	08S45676W80	CAP,CER 223K-B1E -CP
C715	08S65671Y01	CAP,CER 226KX5R1A-CP
C716	08S65671Y01	CAP,CER 226KX5R1A-CP
C717	08S65676Y05	CAP,CER 105KX7R1E-CP
C718	08S65671Y01	CAP,CER 226KX5R1A-CP
C719	08S65676Y05	CAP,CER 105KX7R1E-CP
C720	08S45676W80	CAP,CER 223K-B1E -CP
C721	08S45676W80	CAP,CER 223K-B1E -CP
C722	08S65128F69	CAP,CER.103K-B1H -CP
C723	08S65128F69	CAP,CER.103K-B1H -CP
C724	08S35349Y17	CAP,CER 225K-B0J -CP
C725	08S65128F88	CAP,CER 104K-B1H -CP
C726	08S45676W85	CAP,CER 104K-B1C -CP
C727	08S45677W60	CAP,CER 102J-CH1H-CP
C728	08S45676W85	CAP,CER 104K-B1C -CP
C729	08S35374W10	CAP,CER 225K-B1A -CP
C730	08S45676W85	CAP,CER 104K-B1C -CP
C731	08S45676W73	CAP,CER.103K-B1H -CP
C732	08S45676W85	CAP,CER 104K-B1C -CP
C733	08S45676W80	CAP,CER 223K-B1E -CP
C734	08S65128F88	CAP,CER 104K-B1H -CP
C736	08S65128F69	CAP,CER.103K-B1H -CP
C737	08S65128F69	CAP,CER.103K-B1H -CP
C738	08S45676W65	CAP,CER.222K-B1H -CP
C739	08S65128F69	CAP,CER.103K-B1H -CP
C740	08S65128F69	CAP,CER.103K-B1H -CP
C800	08T55390W34	CAP,TF 274J-1H -R5
C801	08S45676W73	CAP,CER.103K-B1H -CP
C802	08S45676W73	CAP,CER.103K-B1H -CP
C803	08S65667Y01	CAP,CER 224KX5R1C-CP
C805	08S45677W36	CAP,CER.101J-CH1H-CP
C806	08S45676W85	CAP,CER 104K-B1C -CP
C807	08S45676W85	CAP,CER 104K-B1C -CP
C808	08S65667Y01	CAP,CER 224KX5R1C-CP
C809	08S60102F44	CAP,CER 474K-B1E -CP
C810	08S45676W85	CAP,CER 104K-B1C -CP
C811	08S45676W85	CAP,CER 104K-B1C -CP
C812	08S65667Y01	CAP,CER 224KX5R1C-CP
C813	08S45676W85	CAP,CER 104K-B1C -CP
C814	08S45676W80	CAP,CER 223K-B1E -CP
C815	08S45676W85	CAP,CER 104K-B1C -CP
C816	08S45676W85	CAP,CER 104K-B1C -CP
C819	08S65674Y02	CAP,CER 105KX5R1A-CP
C820	08S65667Y01	CAP,CER 224KX5R1C-CP
C824	08S65128F78	CAP,CER.223K-B1H -CP
C826	08S45539Y04	CAP,CER 103KX7R2J-CP
C827	08S45539Y04	CAP,CER 103KX7R2J-CP
C828	08S45539Y04	CAP,CER 103KX7R2J-CP
C829	08S45539Y04	CAP,CER 103KX7R2J-CP
C830	08S45539Y04	CAP,CER 103KX7R2J-CP
C831	08S45676W80	CAP,CER 223K-B1E -CP
C839	08S45539Y04	CAP,CER 103KX7R2J-CP
CB101	09T15153Y24	FFC,FH12-24S -E7

DVA-9861/DVA-9861E

CB301	09T03498K02	WTB,53253-0210	-DB
CB302	09T03498K03	WTB,53253-0310	-DB
CB310	09T25436Y03	WTB,53253-0310	-DB
CB311	09T25436Y05	WTB,53253-0510	-DB
CB5001	09T03498K11	WTB,53253-1110	-DB
CB701	09T75225Y45	FFC,51374-4593	-ER
CB801	09T03498K02	WTB,53253-0210	-DB
CB803	09T55228W02	WTB,SC25-02WS	-DB
CH302	09-05504Z02	ASSY,OPT WIRE CDA	
CH501	09T75236Y20	BTB,BTFW20R-3RSTA-EJ	
D001	48T85357W01	DIO,1PS226	-CP
D301	48T25651W01	DIO,CP MA152WA	
D302	48T25651W01	DIO,CP MA152WA	
D303	48T25651W01	DIO,CP MA152WA	
D351	48T95572W01	DIO,SHT MA736-TX	-E1
D356	48T95572W01	DIO,SHT MA736-TX	-E1
D380	48T25665Y01	DIO,1SS355-TE17	-CP
D5000	48T85357W01	DIO,1PS226	-CP
D5001	48T85357W01	DIO,1PS226	-CP
D501	48T25651W02	DIO,MA152WK-TX	-CP
D502	48T25651W01	DIO,CP MA152WA	
D503	48T68828F11	DIO,1SS133 -RH	
D603	48T25651W02	DIO,MA152WK-TX	-CP
D701	48T25593Y01	DIO,S1G-6904	-E1
D702	48T95572W01	DIO,SHT MA736-TX	-E1
D800	48T25593Y01	DIO,S1G-6904	-E1
D802	48T44813F03	DIO,MA165	-R5
D803	48T25593Y01	DIO,S1G-6904	-E1
D804	48T25593Y01	DIO,S1G-6904	-E1
D806	48T25651W02	DIO,MA152WK-TX	-CP
D816	48T25593Y01	DIO,S1G-6904	-E1
D817	48T25064Y02	DIO,ZEN ZSH5MA27A-ED	
D818	48T25651W02	DIO,MA152WK-TX	-CP
E006	23S45639Y08	CAP,ELY 22R-1C	-R2
E101	23S45639Y08	CAP,ELY 22R-1C	-R2
E201	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E202	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E203	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E205	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E206	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E207	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E208	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E209	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E210	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E212	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E213	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E214	23S45639Y09	CAP,ELY 47R-1C	-R2
E215	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E216	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E217	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E218	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E219	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E220	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E221	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E222	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E223	23S65134W41	CAP,ELY 4R7-1E(3)-E2	
E224	23S65134W65	CAP,ELY 1R0-1H(3)-E2	

DVA-9861/DVA-9861E

E225	23S65134W65	CAP,ELY 1R0-1H(3)-E2
E301	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E302	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E303	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E304	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E305	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E306	23S65134W51	CAP,ELY 2R2-1V(3)-E2
E307	23S45639Y10	CAP,ELY 101-1C -R2
E351	23S65134W72	CAP,ELY 3R3-1H(4)-E2
E352	23S65134W72	CAP,ELY 3R3-1H(4)-E2
E353	23S65134W72	CAP,ELY 3R3-1H(4)-E2
E354	23S65134W72	CAP,ELY 3R3-1H(4)-E2
E355	23S65134W73	CAP,ELY 4R7-1H(5)-E3
E357	23S65134W34	CAP,ELY 47R-1C(6)-E6
E358	23S65134W34	CAP,ELY 47R-1C(6)-E6
E380	23S65134W65	CAP,ELY 1R0-1H(3)-E2
E500	23S45639Y06	CAP,ELY 221-1A -R2
E5001	23S65134W31	CAP,ELY 10R-1C(4)-E2
E5002	23S75372W05	CAP,ELY 22R-1C -R2
E5003	23S65134W31	CAP,ELY 10R-1C(4)-E2
E5004	23S65134W31	CAP,ELY 10R-1C(4)-E2
E5005	23S65134W31	CAP,ELY 10R-1C(4)-E2
E5006	23S65134W31	CAP,ELY 10R-1C(4)-E2
E501	23S45639Y03	CAP,ELY 331-0J -R2
E502	23S45639Y08	CAP,ELY 22R-1C -R2
E700	23S75244Y03	CAP,ELY 101-0J -E3
E701	23S75244Y22	CAP,ELY 471-1C -EA
E702	23S75244Y20	CAP,ELY 221-1C -E6
E703	23S45639Y08	CAP,ELY 22R-1C -R2
E704	23S65134W31	CAP,ELY 10R-1C(4)-E2
E709	23S65134W31	CAP,ELY 10R-1C(4)-E2
E710	23S75244Y20	CAP,ELY 221-1C -E6
E713	23S75244Y17	CAP,ELY 22R-1C -E2
E714	23S65134W24	CAP,ELY 221-1A(8)-E6
E715	23S75244Y17	CAP,ELY 22R-1C -E2
E716	23S45639Y10	CAP,ELY 101-1C -R2
E800	23S65134W36	CAP,ELY 221-1C(8)-EA
E801	23S75244Y14	CAP,ELY 681-1A -EA
E810	23S65134W32	CAP,ELY 22R-1C(5)-E3
E813	23T75325Y01	CAP,VB 332-1C +
F5001	65T75477Y05	FUSE,CCP2E 1.0A -CP
F801	65T75477Y13	FUSE,CCP2E 4.0A -CP
IC101	51T55240Y01	PCM1742KE -SE2
IC102	51T25576W07	NJM4580V-TE2 -SE2
IC105	51T25576W07	NJM4580V-TE2 -SE2
IC201	51T15731W10	TC7S66F-TE85L -CP
IC202	51T95043W01	BA3884F -SE9
IC203	51-05610Z01	BD3427K -QT
IC301	51T93340F02	NJM2060V-TE2 -SE2
IC302	51T15420Y01	BA4560F-E2 -SE2
IC310	51T65184Y01	TB2901H -ZS
IC326	51T25183Y02	TC7SET08FU-EL -CP
IC500	51T45703Y01	TA48M033F-TE16L -NE5
IC5001	51T15420Y01	BA4560F-E2 -SE2
#1	IC501	OFL,V1.00HBAL501A
\$1	IC501	OFL,V1.00HBAP503A
%1	IC501	OFL,V1.00HBAP504A

DVA-9861/DVA-9861E

&1	IC501	53-00011Z22	OFL,V1.00HBAC501A
	IC502	51T75063Y02	BD5224G-TR -CP
	IC503	51T15362Y01	TC74HCT7007AFTP2-SE6
	IC507	51T93332F01	IC,NJM2903M-TE3 -SE2
	IC605	51T93532F05	TC4S01F-TE85L -CP
	IC606	51T75134Y01	TC7WB66FK-TE85L -CP
	IC700	51T25259Y03	BA00ASFP-E2 -NE5
	IC701	51T65166Y01	MAX829EUK -CP
	IC702	51-01520Z01	PQ012FZ01ZPH -NE5
	IC703	51T45659Y02	BA00BC0WFP-E2 -NE5
	IC704	51T45659Y02	BA00BC0WFP-E2 -NE5
	IC705	51-02322Z01	NJM2860F3-05-TE1 -CP
	IC706	51-02921Z01	BD9778HFP -NEA
	IC707	51T75246Y01	NJM2575F1-TE1 -CP
	IC708	51T25183Y02	TC7SET08FU-EL -CP
	IC800	51T65147Y01	HA13165 -ZS
	L001	24T25164Y21	IND,FSLM2520 4R7J-CP
	L002	24T16403W29	COI,IND.15R-M -CP
	L003	24T65110W24	IND,LK2125 4R7K -CP
	L102	24T95456W27	FBI,BLM18PG181SH1-CP
	L103	24T95456W27	FBI,BLM18PG181SH1-CP
	L301	24T16271W21	IND,RCR-875D 102K +
	L700	24T25565Y09	IND,SLF12565 68RM-EA
	L701	24T16271W21	IND,RCR-875D 102K +
	L705	24T16271W21	IND,RCR-875D 102K +
	L706	24T95456W07	FBI,BLM18BD102SH1-CP
	Q001	48T64222F01	TR ,UN2211 10-10 -TX
	Q002	48T35548Y04	TR,2SB710A-S-TX -CP
	Q003	48T64222F12	TR,UN221L-TX -CP
	Q201	48T64222F01	TR ,UN2211 10-10 -TX
	Q202	48T45594W16	TR,XN1A311-TX -CP
	Q203	48T64222F02	TR ,UN2212 22-22 -TX
	Q301	48T25317Y01	TR,XN0F256-TX -CP
	Q302	48T25317Y01	TR,XN0F256-TX -CP
	Q303	48T25317Y01	TR,XN0F256-TX -CP
	Q380	48T64222F02	TR ,UN2212 22-22 -TX
	Q381	48T45594W12	TR ,XN1A312 -TX-CP
	Q382	48T94606F03	TR,DTC124EUA-T106-CP
	Q384	48T94606F03	TR,DTC124EUA-T106-CP
	Q385	48T94606F03	TR,DTC124EUA-T106-CP
	Q5001	48T45594W12	TR ,XN1A312 -TX-CP
	Q5003	48T84366F04	TR,2SB1243-QR-TV2-RD
	Q5005	48T64222F12	TR,UN221L-TX -CP
	Q502	48T45594W16	TR,XN1A311-TX -CP
	Q503	48T63420F01	TR,2SA1037AK-146 -CP
	Q504	48T64222F01	TR ,UN2211 10-10 -TX
	Q505	48T52437F01	TR ,2SB709A-QR/TX-CP
	Q506	48T52438F01	TR ,2SD601A-RS/TX-CP
	Q507	48T45594W12	TR ,XN1A312 -TX-CP
	Q508	48T64221F11	TR,UN211L-TX -CP
	Q602	48T52437F05	TR ,2SB709A-S /TX-CP
	Q603	48T64222F01	TR ,UN2211 10-10 -TX
	Q604	48T64222F02	TR ,UN2212 22-22 -TX
	Q700	48T64221F13	TR,UN211H-TX -CP
	Q701	48T45594W08	TR ,XN1212 -TX-CP
	Q706	48T64222F11	TR,UN221F-TX -CP
	Q800	48T45594W16	TR,XN1A311-TX -CP

DVA-9861/DVA-9861E

Q801	48T64222F12	TR,UN221L-TX -CP
Q802	48T45594W16	TR,XN1A311-TX -CP
Q803	48T45594W12	TR ,XN1A312 -TX-CP
Q804	48T45594W16	TR,XN1A311-TX -CP
Q805	48T64222F02	TR ,UN2212 22-22 -TX
Q806	48T84366F04	TR,2SB1243-QR-TV2-RD
Q807	48T64222F12	TR,UN221L-TX -CP
Q810	48T64221F11	TR,UN211L-TX -CP
Q814	48T84366F04	TR,2SB1243-QR-TV2-RD
Q815	48T64222F12	TR,UN221L-TX -CP
Q816	48T64222F02	TR ,UN2212 22-22 -TX
Q817	48T45594W16	TR,XN1A311-TX -CP
Q818	48T73023F01	TR ,2SD874A -E2
Q819	48T64221F11	TR,UN211L-TX -CP
R001	06S55361Y17	RES,RK 10RJ 1/4 -CP
R002	06S55365Y97	RES,RK 223J 1/10 -CP
R003	06S55366Y39	RES,RK JUMPER1/10-CP
R004	06S55366Y14	RES,RK 104J 1/10 -CP
R005	06S55366Y14	RES,RK 104J 1/10 -CP
R006	06S55365Y65	RES,RK 102J 1/10 -CP
R007	06S55365Y65	RES,RK 102J 1/10 -CP
R020	06S55365Y97	RES,RK 223J 1/10 -CP
R021	06S55365Y41	RES,RK 101J 1/10 -CP
R022	06S55365Y41	RES,RK 101J 1/10 -CP
R024	06S55365Y89	RES,RK 103J 1/10 -CP
R025	06S55361Y71	RES,RK 182J 1/4 -CP
R026	06S55361Y71	RES,RK 182J 1/4 -CP
R028	06S55366Y39	RES,RK JUMPER1/10-CP
R101	06S15593Y21	RES,RK 68RF 1/10 -CP
R103	06S55365Y25	RES,RK 22RJ 1/10 -CP
R104	06S55365Y25	RES,RK 22RJ 1/10 -CP
R105	06S55365Y25	RES,RK 22RJ 1/10 -CP
R106	06S55365Y25	RES,RK 22RJ 1/10 -CP
R108	06S55365Y25	RES,RK 22RJ 1/10 -CP
R111	06S15593Y63	RES,RK 392F 1/10 -CP
R112	06S15593Y63	RES,RK 392F 1/10 -CP
R113	06S15593Y81	RES,RK 223F 1/10 -CP
R114	06S15593Y81	RES,RK 223F 1/10 -CP
R115	06S15593Y57	RES,RK 222F 1/10 -CP
R116	06S15593Y57	RES,RK 222F 1/10 -CP
R117	06S15593Y73	RES,RK 103F 1/10 -CP
R118	06S15593Y73	RES,RK 103F 1/10 -CP
R119	06S15593Y88	RES,RK 433F 1/10 -CP
R120	06S15593Y88	RES,RK 433F 1/10 -CP
R121	06S55365Y66	RES,RK 112J 1/10 -CP
R122	06S55365Y66	RES,RK 112J 1/10 -CP
R125	06S15593Y17	RES,RK 47RF 1/10 -CP
R126	06S15593Y17	RES,RK 47RF 1/10 -CP
R127	06S15593Y71	RES,RK 822F 1/10 -CP
R128	06S15593Y71	RES,RK 822F 1/10 -CP
R129	06S15593Y50	RES,RK 112F 1/10 -CP
R201	06S55365Y97	RES,RK 223J 1/10 -CP
R202	06S55365Y65	RES,RK 102J 1/10 -CP
R203	06S70072F77	RES,CP .103-J-1/4-CP
R204	06S55366Y02	RES,RK 333J 1/10 -CP
R303	06S55365Y65	RES,RK 102J 1/10 -CP
R304	06S55366Y11	RES,RK 753J 1/10 -CP

DVA-9861/DVA-9861E

R305	06S55363Y49	RES,RK 221J 1/8 -CP
R306	06S55363Y41	RES,RK 101J 1/8 -CP
R307	06S55366Y11	RES,RK 753J 1/10 -CP
R308	06S55366Y11	RES,RK 753J 1/10 -CP
R309	06S55366Y11	RES,RK 753J 1/10 -CP
R310	06S55366Y11	RES,RK 753J 1/10 -CP
R311	06S55363Y49	RES,RK 221J 1/8 -CP
R312	06S55363Y49	RES,RK 221J 1/8 -CP
R313	06S55363Y49	RES,RK 221J 1/8 -CP
R314	06S55363Y41	RES,RK 101J 1/8 -CP
R315	06S55363Y41	RES,RK 101J 1/8 -CP
R316	06S55363Y41	RES,RK 101J 1/8 -CP
R317	06S55366Y11	RES,RK 753J 1/10 -CP
R318	06S55365Y95	RES,RK 183J 1/10 -CP
R319	06S55366Y11	RES,RK 753J 1/10 -CP
R320	06S55366Y11	RES,RK 753J 1/10 -CP
R321	06S55363Y49	RES,RK 221J 1/8 -CP
R322	06S55363Y49	RES,RK 221J 1/8 -CP
R323	06S55365Y95	RES,RK 183J 1/10 -CP
R324	06S55363Y41	RES,RK 101J 1/8 -CP
R325	06S55363Y41	RES,RK 101J 1/8 -CP
R326	06S55365Y29	RES,RK 33RJ 1/10 -CP
R330	06S55365Y41	RES,RK 101J 1/10 -CP
R332	06S55366Y31	RES,RK 514J 1/10 -CP
R335	06S55365Y97	RES,RK 223J 1/10 -CP
R336	06S55366Y11	RES,RK 753J 1/10 -CP
R337	06S55366Y11	RES,RK 753J 1/10 -CP
R338	06S55365Y97	RES,RK 223J 1/10 -CP
R339	06S55366Y11	RES,RK 753J 1/10 -CP
R340	06S55366Y11	RES,RK 753J 1/10 -CP
R341	06S55365Y95	RES,RK 183J 1/10 -CP
R342	06S55365Y95	RES,RK 183J 1/10 -CP
R343	06S55365Y95	RES,RK 183J 1/10 -CP
R344	06S55365Y95	RES,RK 183J 1/10 -CP
R345	06S55365Y98	RES,RK 243J 1/10 -CP
R346	06S55365Y98	RES,RK 243J 1/10 -CP
R347	06S55365Y95	RES,RK 183J 1/10 -CP
R348	06S55365Y95	RES,RK 183J 1/10 -CP
R380	06S45674W81	RES,RK 103J 1/10 -CP
R381	06S45674W81	RES,RK 103J 1/10 -CP
R382	06S35095Y08	RES,RK JUMPER 1/4-CP
R384	06S55365Y95	RES,RK 183J 1/10 -CP
R385	06S15593Y25	RES,RK 101F 1/10 -CP
R386	06S55365Y96	RES,RK 203J 1/10 -CP
R388	06S55366Y39	RES,RK JUMPER1/10-CP
R5001	06S55361Y65	RES,RK 102J 1/4 -CP
R5002	06S15594Y09	RES,RK 304F 1/10 -CP
R5003	06S15594Y07	RES,RK 244F 1/10 -CP
R5004	06S55366Y06	RES,RK 473J 1/10 -CP
R5005	06S55361Y65	RES,RK 102J 1/4 -CP
R5006	06S55361Y65	RES,RK 102J 1/4 -CP
R502	06S15593Y74	RES,RK 113F 1/10 -CP
R5020	06S55361Y89	RES,RK 103J 1/4 -CP
R5021	06S55361Y71	RES,RK 182J 1/4 -CP
R5022	06S55361Y71	RES,RK 182J 1/4 -CP
R5023	06S55361Y71	RES,RK 182J 1/4 -CP
R5024	06S55361Y71	RES,RK 182J 1/4 -CP

	R503	06S55365Y41	RES,RK 101J 1/10 -CP
	R5030	06S15593Y81	RES,RK 223F 1/10 -CP
	R5031	06S15593Y81	RES,RK 223F 1/10 -CP
	R5032	06S15593Y81	RES,RK 223F 1/10 -CP
	R5033	06S15593Y81	RES,RK 223F 1/10 -CP
	R5034	06S15593Y81	RES,RK 223F 1/10 -CP
	R5035	06S15593Y81	RES,RK 223F 1/10 -CP
	R5036	06S15593Y81	RES,RK 223F 1/10 -CP
	R5037	06S15593Y81	RES,RK 223F 1/10 -CP
	R5038	06S15593Y71	RES,RK 822F 1/10 -CP
	R5039	06S15593Y71	RES,RK 822F 1/10 -CP
	R504	06S55365Y97	RES,RK 223J 1/10 -CP
	R505	06S55365Y97	RES,RK 223J 1/10 -CP
	R506	06S55365Y97	RES,RK 223J 1/10 -CP
	R507	06S55365Y97	RES,RK 223J 1/10 -CP
#1	R508	06S55365Y97	RES,RK 223J 1/10 -CP
\$1	R508	06S55365Y97	RES,RK 223J 1/10 -CP
#1	R509	06S55365Y97	RES,RK 223J 1/10 -CP
&1	R509	06S55365Y97	RES,RK 223J 1/10 -CP
\$1	R510	06S55365Y97	RES,RK 223J 1/10 -CP
%1	R510	06S55365Y97	RES,RK 223J 1/10 -CP
%1	R511	06S55365Y97	RES,RK 223J 1/10 -CP
&1	R511	06S55365Y97	RES,RK 223J 1/10 -CP
	R512	06S15593Y74	RES,RK 113F 1/10 -CP
	R513	06S55365Y97	RES,RK 223J 1/10 -CP
	R515	06S15593Y81	RES,RK 223F 1/10 -CP
	R516	06S55365Y93	RES,RK 153J 1/10 -CP
	R517	06S55365Y65	RES,RK 102J 1/10 -CP
	R518	06S55365Y41	RES,RK 101J 1/10 -CP
	R520	06S15593Y81	RES,RK 223F 1/10 -CP
	R521	06S55366Y01	RES,RK 303J 1/10 -CP
	R522	06S15593Y81	RES,RK 223F 1/10 -CP
	R523	06S15593Y81	RES,RK 223F 1/10 -CP
	R524	06S15593Y77	RES,RK 153F 1/10 -CP
	R527	06S55366Y39	RES,RK JUMPER1/10-CP
	R528	06S55363Y65	RES,RK 102J 1/8 -CP
	R531	06S55365Y81	RES,RK 472J 1/10 -CP
	R532	06S55365Y65	RES,RK 102J 1/10 -CP
	R533	06S55365Y89	RES,RK 103J 1/10 -CP
	R534	06S55366Y06	RES,RK 473J 1/10 -CP
	R535	06S55365Y81	RES,RK 472J 1/10 -CP
	R536	06S15593Y74	RES,RK 113F 1/10 -CP
	R537	06S15593Y81	RES,RK 223F 1/10 -CP
	R538	06S55366Y30	RES,RK 474J 1/10 -CP
	R539	06S55361Y75	RES,RK 272J 1/4 -CP
	R540	06S15593Y81	RES,RK 223F 1/10 -CP
	R541	06S55365Y97	RES,RK 223J 1/10 -CP
	R542	06S55365Y89	RES,RK 103J 1/10 -CP
	R543	06S55363Y97	RES,RK 223J 1/8 -CP
	R544	06S55363Y65	RES,RK 102J 1/8 -CP
	R545	06S55363Y65	RES,RK 102J 1/8 -CP
	R546	06S15593Y63	RES,RK 392F 1/10 -CP
	R547	06S55365Y89	RES,RK 103J 1/10 -CP
	R549	06S55365Y41	RES,RK 101J 1/10 -CP
	R550	06S55365Y97	RES,RK 223J 1/10 -CP
	R551	06S55363Y65	RES,RK 102J 1/8 -CP
	R552	06S55363Y65	RES,RK 102J 1/8 -CP

DVA-9861/DVA-9861E

R553	06S55363Y65	RES,RK 102J 1/8 -CP
R554	06S55363Y65	RES,RK 102J 1/8 -CP
R555	06S55363Y65	RES,RK 102J 1/8 -CP
R556	06S55363Y65	RES,RK 102J 1/8 -CP
R557	06S55363Y65	RES,RK 102J 1/8 -CP
R558	06S55365Y93	RES,RK 153J 1/10 -CP
R559	06S35083Y45	RES,RK 473F 1/4 -CP
R560	06S55366Y01	RES,RK 303J 1/10 -CP
R561	06S55363Y73	RES,RK 222J 1/8 -CP
R562	06S55365Y99	RES,RK 273J 1/10 -CP
R563	06T45541Y01	RES,RS 12RJ 2W +
R564	06S55363Y65	RES,RK 102J 1/8 -CP
R565	06S55365Y85	RES,RK 682J 1/10 -CP
R566	06S55365Y89	RES,RK 103J 1/10 -CP
R567	06S55365Y85	RES,RK 682J 1/10 -CP
R568	06S55365Y81	RES,RK 472J 1/10 -CP
R569	06S55365Y85	RES,RK 682J 1/10 -CP
R570	06S55365Y67	RES,RK 122J 1/10 -CP
R571	06S55365Y89	RES,RK 103J 1/10 -CP
R572	06S55361Y31	RES,RK 39RJ 1/4 -CP
R573	06S55361Y31	RES,RK 39RJ 1/4 -CP
R574	06S55361Y31	RES,RK 39RJ 1/4 -CP
R575	06S55361Y31	RES,RK 39RJ 1/4 -CP
R576	06S55361Y17	RES,RK 10RJ 1/4 -CP
R577	06S55365Y73	RES,RK 222J 1/10 -CP
R578	06S55365Y69	RES,RK 152J 1/10 -CP
R579	06S55365Y89	RES,RK 103J 1/10 -CP
R584	06S55365Y69	RES,RK 152J 1/10 -CP
R585	06S55365Y73	RES,RK 222J 1/10 -CP
R587	06S55366Y39	RES,RK JUMPER1/10-CP
R588	06S55366Y39	RES,RK JUMPER1/10-CP
R589	06S55366Y06	RES,RK 473J 1/10 -CP
R590	06S55366Y06	RES,RK 473J 1/10 -CP
R591	06S55365Y97	RES,RK 223J 1/10 -CP
R592	06S55365Y41	RES,RK 101J 1/10 -CP
R593	06S55365Y41	RES,RK 101J 1/10 -CP
R594	06S55365Y65	RES,RK 102J 1/10 -CP
R595	06S55365Y65	RES,RK 102J 1/10 -CP
R596	06S55365Y41	RES,RK 101J 1/10 -CP
R597	06S55366Y39	RES,RK JUMPER1/10-CP
R600	06S55366Y39	RES,RK JUMPER1/10-CP
R601	06S55365Y41	RES,RK 101J 1/10 -CP
R602	06S55365Y65	RES,RK 102J 1/10 -CP
R603	06S55365Y41	RES,RK 101J 1/10 -CP
R604	06S55366Y39	RES,RK JUMPER1/10-CP
R605	06S55365Y65	RES,RK 102J 1/10 -CP
R606	06S55365Y65	RES,RK 102J 1/10 -CP
R607	06S55363Y65	RES,RK 102J 1/8 -CP
R612	06S55365Y65	RES,RK 102J 1/10 -CP
R613	06S55365Y65	RES,RK 102J 1/10 -CP
R620	06S55366Y30	RES,RK 474J 1/10 -CP
R621	06S55365Y97	RES,RK 223J 1/10 -CP
R622	06S55366Y39	RES,RK JUMPER1/10-CP
R623	06S55361Y41	RES,RK 101J 1/4 -CP
R624	06S55365Y73	RES,RK 222J 1/10 -CP
R625	06S55365Y97	RES,RK 223J 1/10 -CP
R626	06S55365Y77	RES,RK 332J 1/10 -CP

DVA-9861/DVA-9861E

R628	06S55365Y97	RES,RK 223J 1/10 -CP
R629	06S55365Y65	RES,RK 102J 1/10 -CP
R630	06S55365Y65	RES,RK 102J 1/10 -CP
R631	06S55365Y65	RES,RK 102J 1/10 -CP
R632	06S55365Y41	RES,RK 101J 1/10 -CP
R633	06S55365Y41	RES,RK 101J 1/10 -CP
R700	06S15593Y72	RES,RK 912F 1/10 -CP
R701	06S15593Y43	RES,RK 561F 1/10 -CP
R702	06S15593Y58	RES,RK 242F 1/10 -CP
R708	06S15593Y73	RES,RK 103F 1/10 -CP
R709	06S15593Y41	RES,RK 471F 1/10 -CP
R710	06S15593Y67	RES,RK 562F 1/10 -CP
R711	06S15593Y68	RES,RK 622F 1/10 -CP
R712	06S55361Y89	RES,RK 103J 1/4 -CP
R713	06S15593Y66	RES,RK 512F 1/10 -CP
R716	06S15593Y23	RES,RK 82RF 1/10 -CP
R718	06S55361Y10	RES,RK 5R1J 1/4 -CP
R719	06S35084Y65	RES,RK 512F 1/8 -CP
R720	06S45675W10	RES,RK 154J 1/10 -CP
R721	06S45348Y08	RES,RK 432F 1/4 -CP
R722	06S15593Y51	RES,RK 122F 1/10 -CP
R723	06S15593Y81	RES,RK 223F 1/10 -CP
R724	06S15593Y70	RES,RK 752F 1/10 -CP
R725	06S45674W33	RES,RK 101J 1/10 -CP
R726	06S15593Y99	RES,RK 124F 1/10 -CP
R727	06S15594Y06	RES,RK 224F 1/10 -CP
R728	06S15593Y91	RES,RK 563F 1/10 -CP
R729	06S55365Y96	RES,RK 203J 1/10 -CP
R800	06S55361Y89	RES,RK 103J 1/4 -CP
R801	06S55366Y06	RES,RK 473J 1/10 -CP
R802	06S15593Y66	RES,RK 512F 1/10 -CP
R803	06S15593Y66	RES,RK 512F 1/10 -CP
R804	06S55366Y14	RES,RK 104J 1/10 -CP
R805	06S55366Y06	RES,RK 473J 1/10 -CP
R806	06S55362Y01	RES,RK 303J 1/4 -CP
R807	06S35083Y28	RES,RK 182F 1/4 -CP
R808	06S35083Y32	RES,RK 392F 1/4 -CP
R809	06S55365Y93	RES,RK 153J 1/10 -CP
R810	06S55366Y01	RES,RK 303J 1/10 -CP
R812	06S55361Y71	RES,RK 182J 1/4 -CP
R813	06S55361Y71	RES,RK 182J 1/4 -CP
R814	06S15593Y83	RES,RK 273F 1/10 -CP
R815	06S55361Y71	RES,RK 182J 1/4 -CP
R816	06S35083Y45	RES,RK 473F 1/4 -CP
R818	06S55365Y98	RES,RK 243J 1/10 -CP
R819	06S55361Y71	RES,RK 182J 1/4 -CP
R822	06S55361Y89	RES,RK 103J 1/4 -CP
R823	06S55365Y93	RES,RK 153J 1/10 -CP
R824	06S55366Y01	RES,RK 303J 1/10 -CP
R829	06S55365Y01	RES,RK 2R2J 1/10 -CP
R830	06S55365Y01	RES,RK 2R2J 1/10 -CP
R831	06S70072F61	RES,CP .222-J-1/4-CP
R832	06S70072F61	RES,CP .222-J-1/4-CP
R833	06S55361Y89	RES,RK 103J 1/4 -CP
R834	06S55361Y89	RES,RK 103J 1/4 -CP
R835	06S55361Y54	RES,RK 361J 1/4 -CP
R836	06S55365Y01	RES,RK 2R2J 1/10 -CP

DVA-9861/DVA-9861E

R837	06S55361Y51	RES,RK 271J 1/4 -CP
R838	06S55361Y51	RES,RK 271J 1/4 -CP
R841	06S55361Y89	RES,RK 103J 1/4 -CP
R842	06S55366Y06	RES,RK 473J 1/10 -CP
R843	06S55361Y81	RES,RK 472J 1/4 -CP
RA501	06S45591W07	RES,ARY MNR101J 4-CP
RA502	06S45591W07	RES,ARY MNR101J 4-CP
RA503	06S45591W07	RES,ARY MNR101J 4-CP
RA504	06S45591W07	RES,ARY MNR101J 4-CP
RA505	06S45591W07	RES,ARY MNR101J 4-CP
RA507	06S45591W07	RES,ARY MNR101J 4-CP
SA001	48T81048F02	PTT,DSP-201M -RD
SA5000	48T25171Y02	VST,SA-C2012-101 -CP
SD700	48T75102Y01	DIO,SHT RSX301L-30E1
SD701	48T95294W01	DIO,SHT MA740-TX -CP
SW301	40T45282W02	SW,SLIDE SLD-42-508X
TH501	48T25250Y01	TMT,ERTJ1VV104J -CP
VT001	24T35286Y02	IND,MG56 332J -DB
XL501	91T25806W28	XTL,AT-51 5.000M -R5
Z326	91T75196Y03	EMI,BK1005LL100 -CP
Z501	91T65112W06	EMI,BK2125HM102 -CP
Z701	91T45556Y03	EMI,NFM21HC101U1H-CP
Z801	91T45556Y03	EMI,NFM21HC101U1H-CP
ZD800	48T25766W09	DIO,ZEN.HZS 6C3L -R5
ZD802	48T25766W27	DIO,ZEN.HZS11A1L -R5
ZD803	48T62934F19	DIO,ZEN.RD5.1MB2 -CP

=====FRONT P.W.Board

C401	08S45677W60	CAP,CER 102J-CH1H-CP
C402	08S45676W89	CAP,CER 473K-B1E -CP
C404	08T81833F08	CAP,CER 475K-B1A -CP
C405	08S45676W80	CAP,CER 223K-B1E -CP
C406	08S45676W80	CAP,CER 223K-B1E -CP
C407	08S35374W11	CAP,CER 475K-B0J -CP
C408	08S45676W89	CAP,CER 473K-B1E -CP
C409	08S45677W58	CAP,CER 821J-CH1H-CP
C423	08S45676W80	CAP,CER 223K-B1E -CP
D401	48T85357W01	DIO,1PS226 -CP
D402	48T81063F01	DIO,CP.MA159 / TX-CP
D404	48T81063F01	DIO,CP.MA159 / TX-CP
D406	48T85357W01	DIO,1PS226 -CP
D407	48T85357W01	DIO,1PS226 -CP
D408	48T85357W01	DIO,1PS226 -CP
D409	48T85357W01	DIO,1PS226 -CP
D410	48T85357W01	DIO,1PS226 -CP
D412	48T81063F01	DIO,CP.MA159 / TX-CP
IC401	51-04007Z01	PT6530LQ(L) -QT
IC402	51-05435Z01	SBX3055-02 -NE2
LD401	48-00415Z02	LED,WHT NESW505CT-E2
LD402	48-00415Z02	LED,WHT NESW505CT-E2
LD403	48-00415Z02	LED,WHT NESW505CT-E2
LD404	48-00415Z02	LED,WHT NESW505CT-E2
LD405	48T15521Y02	LED,RED SML-310LT-CP
LD406	48T15521Y02	LED,RED SML-310LT-CP
LD407	48T15521Y02	LED,RED SML-310LT-CP
LD435	48T15521Y07	LED,GRN 310PT-KL -CP
LD436	48T15521Y07	LED,GRN 310PT-KL -CP

DVA-9861/DVA-9861E

LD437	48T15521Y07	LED,GRN 310PT-KL -CP
LD438	48T15521Y07	LED,GRN 310PT-KL -CP
LD439	48T15521Y07	LED,GRN 310PT-KL -CP
LD440	48T15521Y07	LED,GRN 310PT-KL -CP
LD441	48T15521Y07	LED,GRN 310PT-KL -CP
LD442	48T15521Y07	LED,GRN 310PT-KL -CP
LD443	48T15521Y07	LED,GRN 310PT-KL -CP
LD444	48T15521Y07	LED,GRN 310PT-KL -CP
LD445	48T15521Y07	LED,GRN 310PT-KL -CP
LD446	48T15521Y07	LED,GRN 310PT-KL -CP
LD447	48T15521Y07	LED,GRN 310PT-KL -CP
LD448	48T15521Y07	LED,GRN 310PT-KL -CP
LD449	48T15521Y07	LED,GRN 310PT-KL -CP
LD450	48T15521Y07	LED,GRN 310PT-KL -CP
LD451	48T15521Y07	LED,GRN 310PT-KL -CP
LD472	48-05731Z01	LED,BLU SML012BCT-CP
LD473	48-05731Z01	LED,BLU SML012BCT-CP
Q407	48T62967F23	TR,DTC143TKA-T146-CP
Q408	48T62967F23	TR,DTC143TKA-T146-CP
Q411	48T52438F04	TR ,2SD601A-S /TX-CP
Q416	48T52438F04	TR ,2SD601A-S /TX-CP
Q417	48T62967F23	TR,DTC143TKA-T146-CP
Q419	48T63788F04	TR ,CP.2SD1328-T -TX
Q420	48T62967F23	TR,DTC143TKA-T146-CP
Q421	48T63788F04	TR ,CP.2SD1328-T -TX
Q423	48T73023F01	TR ,2SD874A -E2
R401	06S45674W93	RES,RK 333J 1/10 -CP
R403	06S70072F35	RES,CP .181-J-1/4-CP
R404	06S70072F35	RES,CP .181-J-1/4-CP
R405	06S64995F53	RES,RK 102J 1/8 -CP
R406	06S45675W06	RES,RK 104J 1/10 -CP
R408	06S70072F69	RES,CP .472-J-1/4-CP
R409	06S70072F31	RES,CP .121-J-1/4-CP
R410	06S45674W73	RES,RK 472J 1/10 -CP
R415	06S70072F51	RES,CP .821-J-1/4-CP
R420	06S55361Y62	RES,RK 751J 1/4 -CP
R422	06S45674W73	RES,RK 472J 1/10 -CP
R423	06S55361Y57	RES,RK 471J 1/4 -CP
R424	06S35095Y08	RES,RK JUMPER 1/4-CP
R433	06S64995F29	RES,RK 101J 1/8 -CP
R434	06S64995F53	RES,RK 102J 1/8 -CP
R435	06S64995F53	RES,RK 102J 1/8 -CP
R436	06S70072F53	RES,CP .102-J-1/4-CP
R438	06S64995F53	RES,RK 102J 1/8 -CP
R439	06S64995F53	RES,RK 102J 1/8 -CP
R440	06S64995F53	RES,RK 102J 1/8 -CP
R441	06S64995F53	RES,RK 102J 1/8 -CP
R442	06S64995F53	RES,RK 102J 1/8 -CP
R443	06S64995F53	RES,RK 102J 1/8 -CP
R448	06S45674W73	RES,RK 472J 1/10 -CP
R450	06S45674W61	RES,RK 152J 1/10 -CP
R451	06S35095Y08	RES,RK JUMPER 1/4-CP
R459	06S70072F53	RES,CP .102-J-1/4-CP
R468	06S70072F46	RES,CP .511-J-1/4-CP
R469	06S70072F46	RES,CP .511-J-1/4-CP
R470	06S70072F46	RES,CP .511-J-1/4-CP
R471	06S70072F46	RES,CP .511-J-1/4-CP

DVA-9861/DVA-9861E

R472	06S70072F46	RES,CP .511-J-1/4-CP
R473	06S70072F46	RES,CP .511-J-1/4-CP
R474	06S70072F46	RES,CP .511-J-1/4-CP
R475	06S70072F46	RES,CP .511-J-1/4-CP
R476	06S70072F51	RES,CP .821-J-1/4-CP
RA401	06S45591W06	RES,ARY MNR102J 4-CP
RA402	06S45591W06	RES,ARY MNR102J 4-CP
SW401	40T65353Y01	SW,TACT SKRSPACE010E2
SW402	40T65353Y01	SW,TACT SKRSPACE010E2
SW403	40T65353Y01	SW,TACT SKRSPACE010E2
SW404	40T65353Y01	SW,TACT SKRSPACE010E2
SW405	40T65353Y01	SW,TACT SKRSPACE010E2
SW406	40T65353Y01	SW,TACT SKRSPACE010E2
SW407	40T65353Y01	SW,TACT SKRSPACE010E2
SW408	40T65353Y01	SW,TACT SKRSPACE010E2
SW409	40T65353Y01	SW,TACT SKRSPACE010E2
SW410	40T65353Y01	SW,TACT SKRSPACE010E2
SW411	40T65353Y01	SW,TACT SKRSPACE010E2
SW412	40T65353Y01	SW,TACT SKRSPACE010E2
SW413	40T65353Y01	SW,TACT SKRSPACE010E2
SW414	40T65353Y01	SW,TACT SKRSPACE010E2
SW415	40T65353Y01	SW,TACT SKRSPACE010E2
SW416	40T65353Y01	SW,TACT SKRSPACE010E2
SW417	40T65353Y01	SW,TACT SKRSPACE010E2
SW418	40T65353Y01	SW,TACT SKRSPACE010E2
SW419	40T65353Y01	SW,TACT SKRSPACE010E2
ZD423	48-02645Z36	DIO,ZEN MAZ80820H-CP
=====ESC P.W.Board		
	CB6001	09T75237Y20
	LD6001	48T65688Y01
	LD6002	48-05183Z01
	LD6003	48-05183Z01
#1	Q6001	48T62967F25
\$1	Q6001	48T62967F25
%1	Q6001	48T62967F25
&1	Q6001	48-04929Z05
	R6001	06S70072F69
	R6002	06S55361Y93
	SW6002	40T65353Y01
	ZD6001	48-02645Z22
		BTB,BTFW20P-3SSTA-EJ
		LED,AMB SML-511DW-CP
		LED,AMB SML-A12DT-CP
		LED,AMB SML-A12DT-CP
		TR,DTC123JKA-T146-CP
		TR,DTC123JKA-T146-CP
		TR,DTC123JKA-T146-CP
		TR,KRC105S-RTK -CP
		RES,CP .472-J-1/4-CP
		RES,RK 153J 1/4 -CP
		SW,TACT SKRSPACE010E2
		DIO,ZEN MAZ80560L-CP
=====OPT P.W.Board		
	C7001	08S45676W80
	R7001	06S55361Y87
		CAP,CER 223K-B1E -CP
		RES,RK 822J 1/4 -CP
=====DV-MAIN P.W.Board		
	C501	08T81833F13
	C505	08T81833F13
	C601	08S45232Y05
	C602	08S45232Y05
	C603	08S45232Y05
	C604	08S45232Y05
	C605	08S45232Y05
	C606	08S45232Y05
	C607	08S45232Y05
	C608	08S45232Y05
		CAP,CER 106K-B1C -CP
		CAP,CER 106K-B1C -CP
		CAP,CER 102K-B1H -CP
		CAP,CER 102K-B1H -CP
		CAP,CER 102K-B1H -CP
		CAP,CER 102K-B1H -CP
		CAP,CER 102K-B1H -CP
		CAP,CER 102K-B1H -CP
		CAP,CER 102K-B1H -CP
		CAP,CER 102K-B1H -CP
		CAP,CER 102K-B1H -CP

DVA-9861/DVA-9861E

C609	08S45232Y05	CAP,CER 102K-B1H -CP
C610	08S45232Y05	CAP,CER 102K-B1H -CP
C611	08S45232Y05	CAP,CER 102K-B1H -CP
C612	08S45232Y05	CAP,CER 102K-B1H -CP
C613	08S45232Y05	CAP,CER 102K-B1H -CP
C614	08S45676W87	CAP,CER 333K-B1E -CP
C615	08S45232Y17	CAP,CER 104K-B0J -CP
C616	08S45232Y17	CAP,CER 104K-B0J -CP
C617	08S45232Y17	CAP,CER 104K-B0J -CP
C618	08S45676W70	CAP,CER 562K-B1H -CP
C619	08S45676W79	CAP,CER 183K-B1E -CP
C620	08S45232Y17	CAP,CER 104K-B0J -CP
C621	08S45232Y17	CAP,CER 104K-B0J -CP
C622	08S45232Y17	CAP,CER 104K-B0J -CP
C623	08S45232Y17	CAP,CER 104K-B0J -CP
C624	08S45232Y05	CAP,CER 102K-B1H -CP
C625	08S45232Y17	CAP,CER 104K-B0J -CP
C626	08S45232Y17	CAP,CER 104K-B0J -CP
C627	08S45232Y17	CAP,CER 104K-B0J -CP
C632	08S45232Y05	CAP,CER 102K-B1H -CP
C633	08S45232Y05	CAP,CER 102K-B1H -CP
C634	08S45232Y05	CAP,CER 102K-B1H -CP
C635	08S45232Y05	CAP,CER 102K-B1H -CP
C636	08S45232Y05	CAP,CER 102K-B1H -CP
C637	08S45232Y05	CAP,CER 102K-B1H -CP
C638	08S45232Y05	CAP,CER 102K-B1H -CP
C639	08S45232Y05	CAP,CER 102K-B1H -CP
C640	08S45232Y05	CAP,CER 102K-B1H -CP
C641	08S45232Y05	CAP,CER 102K-B1H -CP
C642	08S45232Y05	CAP,CER 102K-B1H -CP
C643	08S45232Y05	CAP,CER 102K-B1H -CP
C644	08S45232Y05	CAP,CER 102K-B1H -CP
C645	08S45232Y05	CAP,CER 102K-B1H -CP
C646	08S45232Y05	CAP,CER 102K-B1H -CP
C647	08S45232Y05	CAP,CER 102K-B1H -CP
C648	08S45232Y05	CAP,CER 102K-B1H -CP
C651	08S65670Y01	CAP,CER 106KX5R1C-CP
C652	08S65670Y01	CAP,CER 106KX5R1C-CP
C654	08S45232Y05	CAP,CER 102K-B1H -CP
C655	08S45232Y17	CAP,CER 104K-B0J -CP
C658	08S35374W12	CAP,CER 106K-B0J -CP
C671	08S45232Y11	CAP,CER 103K-B1C -CP
C672	08S45232Y17	CAP,CER 104K-B0J -CP
C673	08S45232Y17	CAP,CER 104K-B0J -CP
C674	08S45232Y17	CAP,CER 104K-B0J -CP
C675	08S45232Y17	CAP,CER 104K-B0J -CP
C676	08S45232Y17	CAP,CER 104K-B0J -CP
C677	08S45232Y17	CAP,CER 104K-B0J -CP
C678	08S45232Y09	CAP,CER 472K-B1E -CP
C679	08S45232Y17	CAP,CER 104K-B0J -CP
C680	08S35349Y16	CAP,CER 105K-B1A -CP
C681	08S35349Y16	CAP,CER 105K-B1A -CP
C682	08S45232Y17	CAP,CER 104K-B0J -CP
C683	08S45232Y17	CAP,CER 104K-B0J -CP
C684	08S45232Y17	CAP,CER 104K-B0J -CP
C685	08S45232Y17	CAP,CER 104K-B0J -CP
C688	08S45232Y07	CAP,CER 222K-B1H -CP

DVA-9861/DVA-9861E

C689	08S45232Y07	CAP,CER 222K-B1H -CP
C690	08S45232Y11	CAP,CER 103K-B1C -CP
C691	08S45231Y13	CAP,CER 10RD-CH1H-CP
C692	08S45231Y19	CAP,CER 33RJ-CH1H-CP
C693	08S45231Y22	CAP,CER 56RJ-CH1H-CP
C694	08S45231Y19	CAP,CER 33RJ-CH1H-CP
C696	08S45231Y22	CAP,CER 56RJ-CH1H-CP
C721	08S45232Y17	CAP,CER 104K-B0J -CP
C725	08S45232Y17	CAP,CER 104K-B0J -CP
C732	08S45232Y05	CAP,CER 102K-B1H -CP
C733	08S45232Y17	CAP,CER 104K-B0J -CP
C734	08S45232Y05	CAP,CER 102K-B1H -CP
C735	08S45232Y05	CAP,CER 102K-B1H -CP
C736	08S45232Y17	CAP,CER 104K-B0J -CP
C737	08S45232Y17	CAP,CER 104K-B0J -CP
C738	08S45232Y05	CAP,CER 102K-B1H -CP
C739	08S45232Y05	CAP,CER 102K-B1H -CP
C801	08T65555Y01	CAP,CER 226K-BJ0J-CP
C802	08T65555Y01	CAP,CER 226K-BJ0J-CP
C804	08S45676W80	CAP,CER 223K-B1E -CP
C811	08T65555Y01	CAP,CER 226K-BJ0J-CP
C812	08T65555Y01	CAP,CER 226K-BJ0J-CP
C814	08S45676W80	CAP,CER 223K-B1E -CP
C821	08S45232Y13	CAP,CER 223K-B1C -CP
C831	08S45232Y13	CAP,CER 223K-B1C -CP
C841	08S45232Y17	CAP,CER 104K-B0J -CP
C842	08T65555Y01	CAP,CER 226K-BJ0J-CP
C843	08S45232Y17	CAP,CER 104K-B0J -CP
C844	08T65555Y01	CAP,CER 226K-BJ0J-CP
C845	08S45232Y17	CAP,CER 104K-B0J -CP
C846	08S45232Y17	CAP,CER 104K-B0J -CP
C850	08S45232Y08	CAP,CER 332K-B1H -CP
C851	08S45232Y08	CAP,CER 332K-B1H -CP
C854	08S45232Y11	CAP,CER 103K-B1C -CP
C855	08S45232Y08	CAP,CER 332K-B1H -CP
C860	08T81833F13	CAP,CER 106K-B1C -CP
C861	08S45232Y17	CAP,CER 104K-B0J -CP
C862	08T81833F13	CAP,CER 106K-B1C -CP
C865	08S65668Y04	CAP,CER 104KX5R1A-CP
C867	08T81833F13	CAP,CER 106K-B1C -CP
C868	08S35374W10	CAP,CER 225K-B1A -CP
C869	08S35374W10	CAP,CER 225K-B1A -CP
C870	08S65668Y04	CAP,CER 104KX5R1A-CP
C871	08S45232Y11	CAP,CER 103K-B1C -CP
C872	08S45232Y17	CAP,CER 104K-B0J -CP
C874	08S45232Y17	CAP,CER 104K-B0J -CP
C875	08S45232Y17	CAP,CER 104K-B0J -CP
C876	08S45232Y11	CAP,CER 103K-B1C -CP
C878	08S45232Y08	CAP,CER 332K-B1H -CP
C880	08T81833F13	CAP,CER 106K-B1C -CP
C881	08S45231Y25	CAP,CER 101J-CH1H-CP
C882	08S45677W40	CAP,CER.151J-CH1H-CP
C883	08S45677W40	CAP,CER.151J-CH1H-CP
C884	08S45231Y25	CAP,CER 101J-CH1H-CP
C885	08S45677W40	CAP,CER.151J-CH1H-CP
C886	08S45677W40	CAP,CER.151J-CH1H-CP
C901	08S65667Y05	CAP,CER 105KX5R1A-CP

DVA-9861/DVA-9861E

C902	08S65667Y05	CAP,CER 105KX5R1A-CP
C903	08S45232Y11	CAP,CER 103K-B1C -CP
C904	08S45232Y17	CAP,CER 104K-B0J -CP
CB501	09T45442Y45	FFC,54104-4592 -EQ
CB502	09T15107Y24	FFC,52435-2491 -ED
CB504	09T15107Y10	FFC,52745-1090 -E9
CB801	09T15107Y28	FFC,52435-2891 -ED
CB861	09T15107Y24	FFC,52435-2491 -ED
D801	48-04465Z01	DIO,MA27111100L-TX-CP
D802	48-04465Z01	DIO,MA27111100L-TX-CP
IC601	51-03558Z02	MN35206UB -QT
IC721	53-07731Z44	OFL,V3.006DV37M15B
IC725	51-00726Z02	MB85R256PFCN-G -ST
IC731	51-04556Z01	UPD45128163G5-A75-ST
IC861	51T55021Y02	BD7905BFS-E2 -SEE
L501	24T65689Y01	FBI,FBMJ2125HS420-CP
L502	24T65689Y01	FBI,FBMJ2125HS420-CP
L503	24T65689Y01	FBI,FBMJ2125HS420-CP
L601	24T95456W27	FBI,BLM18PG181SH1-CP
L841	24T25164Y25	IND,FSLM2520 10RJ-CP
L912	24T65331Y07	IND,LEMF2520 10RK-CP
L922	24T65331Y07	IND,LEMF2520 10RK-CP
Q601	48T45251W03	TR ,UN5212 22-22 -CP
Q602	48T15656Y01	TR,2SC4617-TL -CP
Q801	48T75011W01	TR,2SD1782K-PQR-6-CP
Q802	48T55462Y01	TR,2SB1132-QR-100-E2
Q810	48T75366Y06	TR,FMC2-T148 -CP
Q811	48T75011W01	TR,2SD1782K-PQR-6-CP
Q812	48T55462Y01	TR,2SB1132-QR-100-E2
Q831	48T25137Y02	TR,UN9212J-TX -CP
Q832	48T25137Y06	TR,UN9216J-TX -CP
Q833	48T25137Y06	TR,UN9216J-TX -CP
R10	06S15616Y23	RES,RK JUMPER1/16-CP
R11	06S15616Y23	RES,RK JUMPER1/16-CP
R12	06S15616Y23	RES,RK JUMPER1/16-CP
R13	06S15616Y23	RES,RK JUMPER1/16-CP
R14	06S15616Y23	RES,RK JUMPER1/16-CP
R15	06S15616Y23	RES,RK JUMPER1/16-CP
R16	06S15616Y23	RES,RK JUMPER1/16-CP
R17	06S15616Y23	RES,RK JUMPER1/16-CP
R501	06S15615Y81	RES,RK 223J 1/16 -CP
R502	06S15615Y81	RES,RK 223J 1/16 -CP
R503	06S15615Y81	RES,RK 223J 1/16 -CP
R504	06S15615Y81	RES,RK 223J 1/16 -CP
R505	06S15615Y81	RES,RK 223J 1/16 -CP
R506	06S15615Y81	RES,RK 223J 1/16 -CP
R512	06S15615Y81	RES,RK 223J 1/16 -CP
R513	06S15615Y81	RES,RK 223J 1/16 -CP
R514	06S15615Y25	RES,RK 101J 1/16 -CP
R515	06S15615Y81	RES,RK 223J 1/16 -CP
R516	06S15615Y81	RES,RK 223J 1/16 -CP
R519	06S15615Y25	RES,RK 101J 1/16 -CP
R520	06S15615Y25	RES,RK 101J 1/16 -CP
R521	06S15615Y25	RES,RK 101J 1/16 -CP
R551	06S15615Y49	RES,RK 102J 1/16 -CP
R552	06S15615Y81	RES,RK 223J 1/16 -CP
R553	06S15615Y49	RES,RK 102J 1/16 -CP

DVA-9861/DVA-9861E

R561	06S15615Y17	RES,RK 47RJ 1/16 -CP
R562	06S15615Y25	RES,RK 101J 1/16 -CP
R563	06S15615Y25	RES,RK 101J 1/16 -CP
R564	06S15615Y25	RES,RK 101J 1/16 -CP
R565	06S15615Y25	RES,RK 101J 1/16 -CP
R566	06S15616Y23	RES,RK JUMPER1/16-CP
R567	06S15615Y23	RES,RK 82RJ 1/16 -CP
R568	06S15615Y25	RES,RK 101J 1/16 -CP
R569	06S15615Y17	RES,RK 47RJ 1/16 -CP
R570	06S15615Y17	RES,RK 47RJ 1/16 -CP
R571	06S15615Y17	RES,RK 47RJ 1/16 -CP
R572	06S15615Y17	RES,RK 47RJ 1/16 -CP
R573	06S15615Y17	RES,RK 47RJ 1/16 -CP
R574	06S15615Y17	RES,RK 47RJ 1/16 -CP
R575	06S15615Y17	RES,RK 47RJ 1/16 -CP
R576	06S15615Y25	RES,RK 101J 1/16 -CP
R577	06S15615Y21	RES,RK 68RJ 1/16 -CP
R601	06S15615Y65	RES,RK 472J 1/16 -CP
R604	06S15615Y81	RES,RK 223J 1/16 -CP
R611	06S15615Y81	RES,RK 223J 1/16 -CP
R613	06S15615Y81	RES,RK 223J 1/16 -CP
R614	06S15615Y81	RES,RK 223J 1/16 -CP
R617	06S15593Y53	RES,RK 152F 1/10 -CP
R618	06S15593Y97	RES,RK 104F 1/10 -CP
R619	06S15593Y59	RES,RK 272F 1/10 -CP
R620	06S15594Y02	RES,RK 154F 1/10 -CP
R625	06S15615Y81	RES,RK 223J 1/16 -CP
R626	06S15616Y23	RES,RK JUMPER1/16-CP
R627	06S15615Y13	RES,RK 33RJ 1/16 -CP
R628	06S15615Y13	RES,RK 33RJ 1/16 -CP
R629	06S15615Y13	RES,RK 33RJ 1/16 -CP
R630	06S15615Y81	RES,RK 223J 1/16 -CP
R634	06S15615Y81	RES,RK 223J 1/16 -CP
R635	06S15615Y81	RES,RK 223J 1/16 -CP
R636	06S15615Y81	RES,RK 223J 1/16 -CP
R637	06S15615Y81	RES,RK 223J 1/16 -CP
R638	06S15615Y81	RES,RK 223J 1/16 -CP
R639	06S15615Y81	RES,RK 223J 1/16 -CP
R641	06S15615Y25	RES,RK 101J 1/16 -CP
R642	06S15615Y25	RES,RK 101J 1/16 -CP
R643	06S15615Y25	RES,RK 101J 1/16 -CP
R644	06S15615Y25	RES,RK 101J 1/16 -CP
R645	06S15615Y25	RES,RK 101J 1/16 -CP
R646	06S15615Y25	RES,RK 101J 1/16 -CP
R647	06S15615Y25	RES,RK 101J 1/16 -CP
R648	06S15615Y25	RES,RK 101J 1/16 -CP
R649	06S15615Y25	RES,RK 101J 1/16 -CP
R650	06S15615Y25	RES,RK 101J 1/16 -CP
R651	06S15615Y25	RES,RK 101J 1/16 -CP
R652	06S15615Y25	RES,RK 101J 1/16 -CP
R653	06S15615Y25	RES,RK 101J 1/16 -CP
R654	06S15615Y25	RES,RK 101J 1/16 -CP
R655	06S15615Y25	RES,RK 101J 1/16 -CP
R656	06S15615Y25	RES,RK 101J 1/16 -CP
R659	06S15615Y21	RES,RK 68RJ 1/16 -CP
R660	06S15615Y21	RES,RK 68RJ 1/16 -CP
R661	06S15615Y21	RES,RK 68RJ 1/16 -CP

DVA-9861/DVA-9861E

R662	06S15615Y21	RES,RK 68RJ 1/16 -CP
R663	06S15615Y21	RES,RK 68RJ 1/16 -CP
R664	06S15615Y21	RES,RK 68RJ 1/16 -CP
R665	06S15615Y21	RES,RK 68RJ 1/16 -CP
R666	06S15615Y21	RES,RK 68RJ 1/16 -CP
R667	06S15615Y21	RES,RK 68RJ 1/16 -CP
R668	06S15615Y21	RES,RK 68RJ 1/16 -CP
R669	06S15615Y21	RES,RK 68RJ 1/16 -CP
R670	06S15615Y21	RES,RK 68RJ 1/16 -CP
R671	06S15615Y21	RES,RK 68RJ 1/16 -CP
R672	06S15615Y21	RES,RK 68RJ 1/16 -CP
R673	06S15615Y21	RES,RK 68RJ 1/16 -CP
R674	06S15615Y01	RES,RK 10RJ 1/16 -CP
R675	06S15615Y17	RES,RK 47RJ 1/16 -CP
R676	06S15615Y21	RES,RK 68RJ 1/16 -CP
R677	06S15615Y21	RES,RK 68RJ 1/16 -CP
R678	06S15615Y21	RES,RK 68RJ 1/16 -CP
R679	06S15615Y21	RES,RK 68RJ 1/16 -CP
R680	06S15615Y21	RES,RK 68RJ 1/16 -CP
R681	06S15615Y25	RES,RK 101J 1/16 -CP
R682	06S15615Y21	RES,RK 68RJ 1/16 -CP
R683	06S15615Y25	RES,RK 101J 1/16 -CP
R684	06S15615Y25	RES,RK 101J 1/16 -CP
R685	06S15615Y25	RES,RK 101J 1/16 -CP
R686	06S15615Y25	RES,RK 101J 1/16 -CP
R687	06S15615Y25	RES,RK 101J 1/16 -CP
R688	06S15615Y25	RES,RK 101J 1/16 -CP
R689	06S15615Y25	RES,RK 101J 1/16 -CP
R690	06S15615Y25	RES,RK 101J 1/16 -CP
R691	06S15615Y25	RES,RK 101J 1/16 -CP
R692	06S15615Y25	RES,RK 101J 1/16 -CP
R693	06S15615Y25	RES,RK 101J 1/16 -CP
R694	06S15615Y25	RES,RK 101J 1/16 -CP
R695	06S15615Y25	RES,RK 101J 1/16 -CP
R696	06S15615Y25	RES,RK 101J 1/16 -CP
R697	06S15615Y81	RES,RK 223J 1/16 -CP
R698	06S15615Y81	RES,RK 223J 1/16 -CP
R700	06S15616Y23	RES,RK JUMPER1/16-CP
R701	06S15616Y23	RES,RK JUMPER1/16-CP
R703	06S15615Y17	RES,RK 47RJ 1/16 -CP
R771	06S15615Y81	RES,RK 223J 1/16 -CP
R772	06S15615Y81	RES,RK 223J 1/16 -CP
R773	06S15615Y81	RES,RK 223J 1/16 -CP
R774	06S15615Y81	RES,RK 223J 1/16 -CP
R775	06S15615Y81	RES,RK 223J 1/16 -CP
R776	06S15615Y81	RES,RK 223J 1/16 -CP
R777	06S15615Y81	RES,RK 223J 1/16 -CP
R778	06S15615Y81	RES,RK 223J 1/16 -CP
R779	06S15615Y81	RES,RK 223J 1/16 -CP
R780	06S15615Y81	RES,RK 223J 1/16 -CP
R781	06S15615Y81	RES,RK 223J 1/16 -CP
R782	06S15615Y81	RES,RK 223J 1/16 -CP
R783	06S15615Y81	RES,RK 223J 1/16 -CP
R784	06S15615Y81	RES,RK 223J 1/16 -CP
R785	06S15615Y81	RES,RK 223J 1/16 -CP
R786	06S15615Y81	RES,RK 223J 1/16 -CP
R801	06S15615Y41	RES,RK 471J 1/16 -CP

DVA-9861/DVA-9861E

R802	06S15615Y41	RES,RK 471J 1/16 -CP
R803	06S15615Y09	RES,RK 22RJ 1/16 -CP
R804	06S45675W43	RES,RK JUMPER1/10-CP
R805	06S65522Y22	RES,RK 5R6F 1/4 -CP
R806	06S45675W06	RES,RK 104J 1/10 -CP
R811	06S15615Y41	RES,RK 471J 1/16 -CP
R812	06S15615Y41	RES,RK 471J 1/16 -CP
R813	06S15615Y09	RES,RK 22RJ 1/16 -CP
R814	06S45675W43	RES,RK JUMPER1/10-CP
R815	06S65522Y22	RES,RK 5R6F 1/4 -CP
R816	06S45675W06	RES,RK 104J 1/10 -CP
R821	06S65522Y22	RES,RK 5R6F 1/4 -CP
R822	06S35083Y52	RES,RK 1R0F 1/4 -CP
R825	06S15616Y23	RES,RK JUMPER1/16-CP
R826	06S15616Y23	RES,RK JUMPER1/16-CP
R827	06S15616Y23	RES,RK JUMPER1/16-CP
R830	06S15615Y25	RES,RK 101J 1/16 -CP
R831	06S15615Y49	RES,RK 102J 1/16 -CP
R832	06S15615Y23	RES,RK 82RJ 1/16 -CP
R833	06S15615Y23	RES,RK 82RJ 1/16 -CP
R835	06S15615Y25	RES,RK 101J 1/16 -CP
R844	06S15616Y23	RES,RK JUMPER1/16-CP
R849	06S15616Y23	RES,RK JUMPER1/16-CP
R850	06S15616Y23	RES,RK JUMPER1/16-CP
R851	06S15616Y23	RES,RK JUMPER1/16-CP
R852	06S15616Y23	RES,RK JUMPER1/16-CP
R853	06S15616Y23	RES,RK JUMPER1/16-CP
R854	06S15616Y23	RES,RK JUMPER1/16-CP
R855	06S15615Y25	RES,RK 101J 1/16 -CP
R856	06S15615Y73	RES,RK 103J 1/16 -CP
R857	06S15615Y73	RES,RK 103J 1/16 -CP
R858	06S15615Y25	RES,RK 101J 1/16 -CP
R859	06S15615Y25	RES,RK 101J 1/16 -CP
R860	06S15615Y73	RES,RK 103J 1/16 -CP
R861	06S45674W02	RES,RK 2R7J 1/10 -CP
R862	06S45674W02	RES,RK 2R7J 1/10 -CP
R863	06S45674W02	RES,RK 2R7J 1/10 -CP
R864	06S45674W02	RES,RK 2R7J 1/10 -CP
R865	06S45674W02	RES,RK 2R7J 1/10 -CP
R866	06S45674W02	RES,RK 2R7J 1/10 -CP
R867	06S45674W02	RES,RK 2R7J 1/10 -CP
R868	06S45674W02	RES,RK 2R7J 1/10 -CP
R869	06S45674W02	RES,RK 2R7J 1/10 -CP
R870	06S45674W02	RES,RK 2R7J 1/10 -CP
R876	06S15615Y33	RES,RK 221J 1/16 -CP
R877	06S15615Y27	RES,RK 121J 1/16 -CP
R878	06S15615Y73	RES,RK 103J 1/16 -CP
R880	06S15616Y23	RES,RK JUMPER1/16-CP
R881	06S15615Y73	RES,RK 103J 1/16 -CP
R882	06S15615Y81	RES,RK 223J 1/16 -CP
R883	06S15615Y25	RES,RK 101J 1/16 -CP
R884	06S15615Y73	RES,RK 103J 1/16 -CP
R885	06S15615Y81	RES,RK 223J 1/16 -CP
R886	06S15615Y25	RES,RK 101J 1/16 -CP
R889	06S15615Y25	RES,RK 101J 1/16 -CP
R890	06S15615Y81	RES,RK 223J 1/16 -CP
R891	06S15616Y23	RES,RK JUMPER1/16-CP

DVA-9861/DVA-9861E

R896	06S15615Y73	RES,RK 103J 1/16 -CP
R897	06S15615Y73	RES,RK 103J 1/16 -CP
R901	06S15616Y32	RES,RK 6R8J 1/16 -CP
R902	06-02713Z03	RES,RK 223D 1/16 -CP
R903	06S65415Y38	RES,RK 123F 1/16 -CP
R904	06S65415Y33	RES,RK 472F 1/16 -CP
R905	06S65415Y37	RES,RK 103F 1/16 -CP
R911	06-02741Z01	RES,RK 331D 1/16 -CP
R912	06-02741Z01	RES,RK 331D 1/16 -CP
R921	06S15593Y37	RES,RK 331F 1/10 -CP
R922	06S15593Y37	RES,RK 331F 1/10 -CP
R931	06S64996F43	RES,RK 1R5J 1/8 -CP
R932	06S64996F43	RES,RK 1R5J 1/8 -CP
R933	06S64996F43	RES,RK 1R5J 1/8 -CP
R934	06S64996F43	RES,RK 1R5J 1/8 -CP
R935	06S64996F43	RES,RK 1R5J 1/8 -CP
R936	06S64996F43	RES,RK 1R5J 1/8 -CP
TH601	48T75201Y03	TMT,NCP15XH103F0S-CP
TH602	48T75201Y03	TMT,NCP15XH103F0S-CP
VR901	18T25572Y11	VAR,RH03ADC 472-X-CP
XL601	91T75115Y01	XTL,FXO-64FL2 27M-E2
Z575	91T75196Y23	EMI,BK1005LL181 -CP
Z576	91T75196Y23	EMI,BK1005LL181 -CP
Z577	91T75196Y23	EMI,BK1005LL181 -CP
Z578	91T75196Y23	EMI,BK1005LL181 -CP
Z579	91T75196Y23	EMI,BK1005LL181 -CP
Z580	91T75196Y02	EMI,BK1005LL680 -CP
Z581	91T75196Y23	EMI,BK1005LL181 -CP
Z582	91T75196Y03	EMI,BK1005LL100 -CP
Z583	91T75196Y03	EMI,BK1005LL100 -CP
Z584	91T75196Y03	EMI,BK1005LL100 -CP
Z585	91T75196Y03	EMI,BK1005LL100 -CP
Z586	91T75196Y03	EMI,BK1005LL100 -CP
Z589	91T75196Y23	EMI,BK1005LL181 -CP

=====Miscellaneous

ANT001	01T02127K08	ASSY,ANT CABLE 9805A
CB401	09-04216Z01	BTB,DH16-P -B
CB802	09T35473Y16	WTB,F169B001-16 -DB
CB6002	09-04217Z01	BTB,DH16-S -B
ET5001	09-05982Z01	ASSY,ANID-0030-01A
IC7001	51T75111W01	TOTX193 -DS
JK301	09-02179Z01	RCA,NLT1989-0 -DB
JK602	09T03156K01	JAC,CK-3.5-14 -DB
LCD401	65-04381Z01	LCD,GTD-23090AAHK
M801	59-06122Z01	MOTOR,D02X-12TS4(EX)
SW420	40-04208Z01	ENC,EC11F152T402 -DB
SW501	40T16096W03	SW ,TACT SKHHLW
SW6001	40-03466Z01	SW,DETCT SPVM1101-E5

=====DV37M15B


HD101	EP-00830Z01	ED21A51L
M101	59-03798Z01	MOTOR,M1N10RB95G
M102	59-02071Z01	MOTOR,24C0303020
M103	59T65142Y01	MOTOR,MSDV020L01
SW406	40T15494Y12	SW,DETCT SPVG2303-E6
SW801	40T55230Y01	SW,DETCT ESE13V01CE5

DVA-9861/DVA-9861E

SW802	40T55230Y01	SW,DETCT ESE13V01CE5
SW803	40T55043Y02	SW,DETCT SPVL12 -E5
SW804	40T15494Y12	SW,DETCT SPVG2303-E6
SW805	40T55230Y01	SW,DETCT ESE13V01CE5

Exploded View (Cabinet)

DVA-9861/DVA-9861E

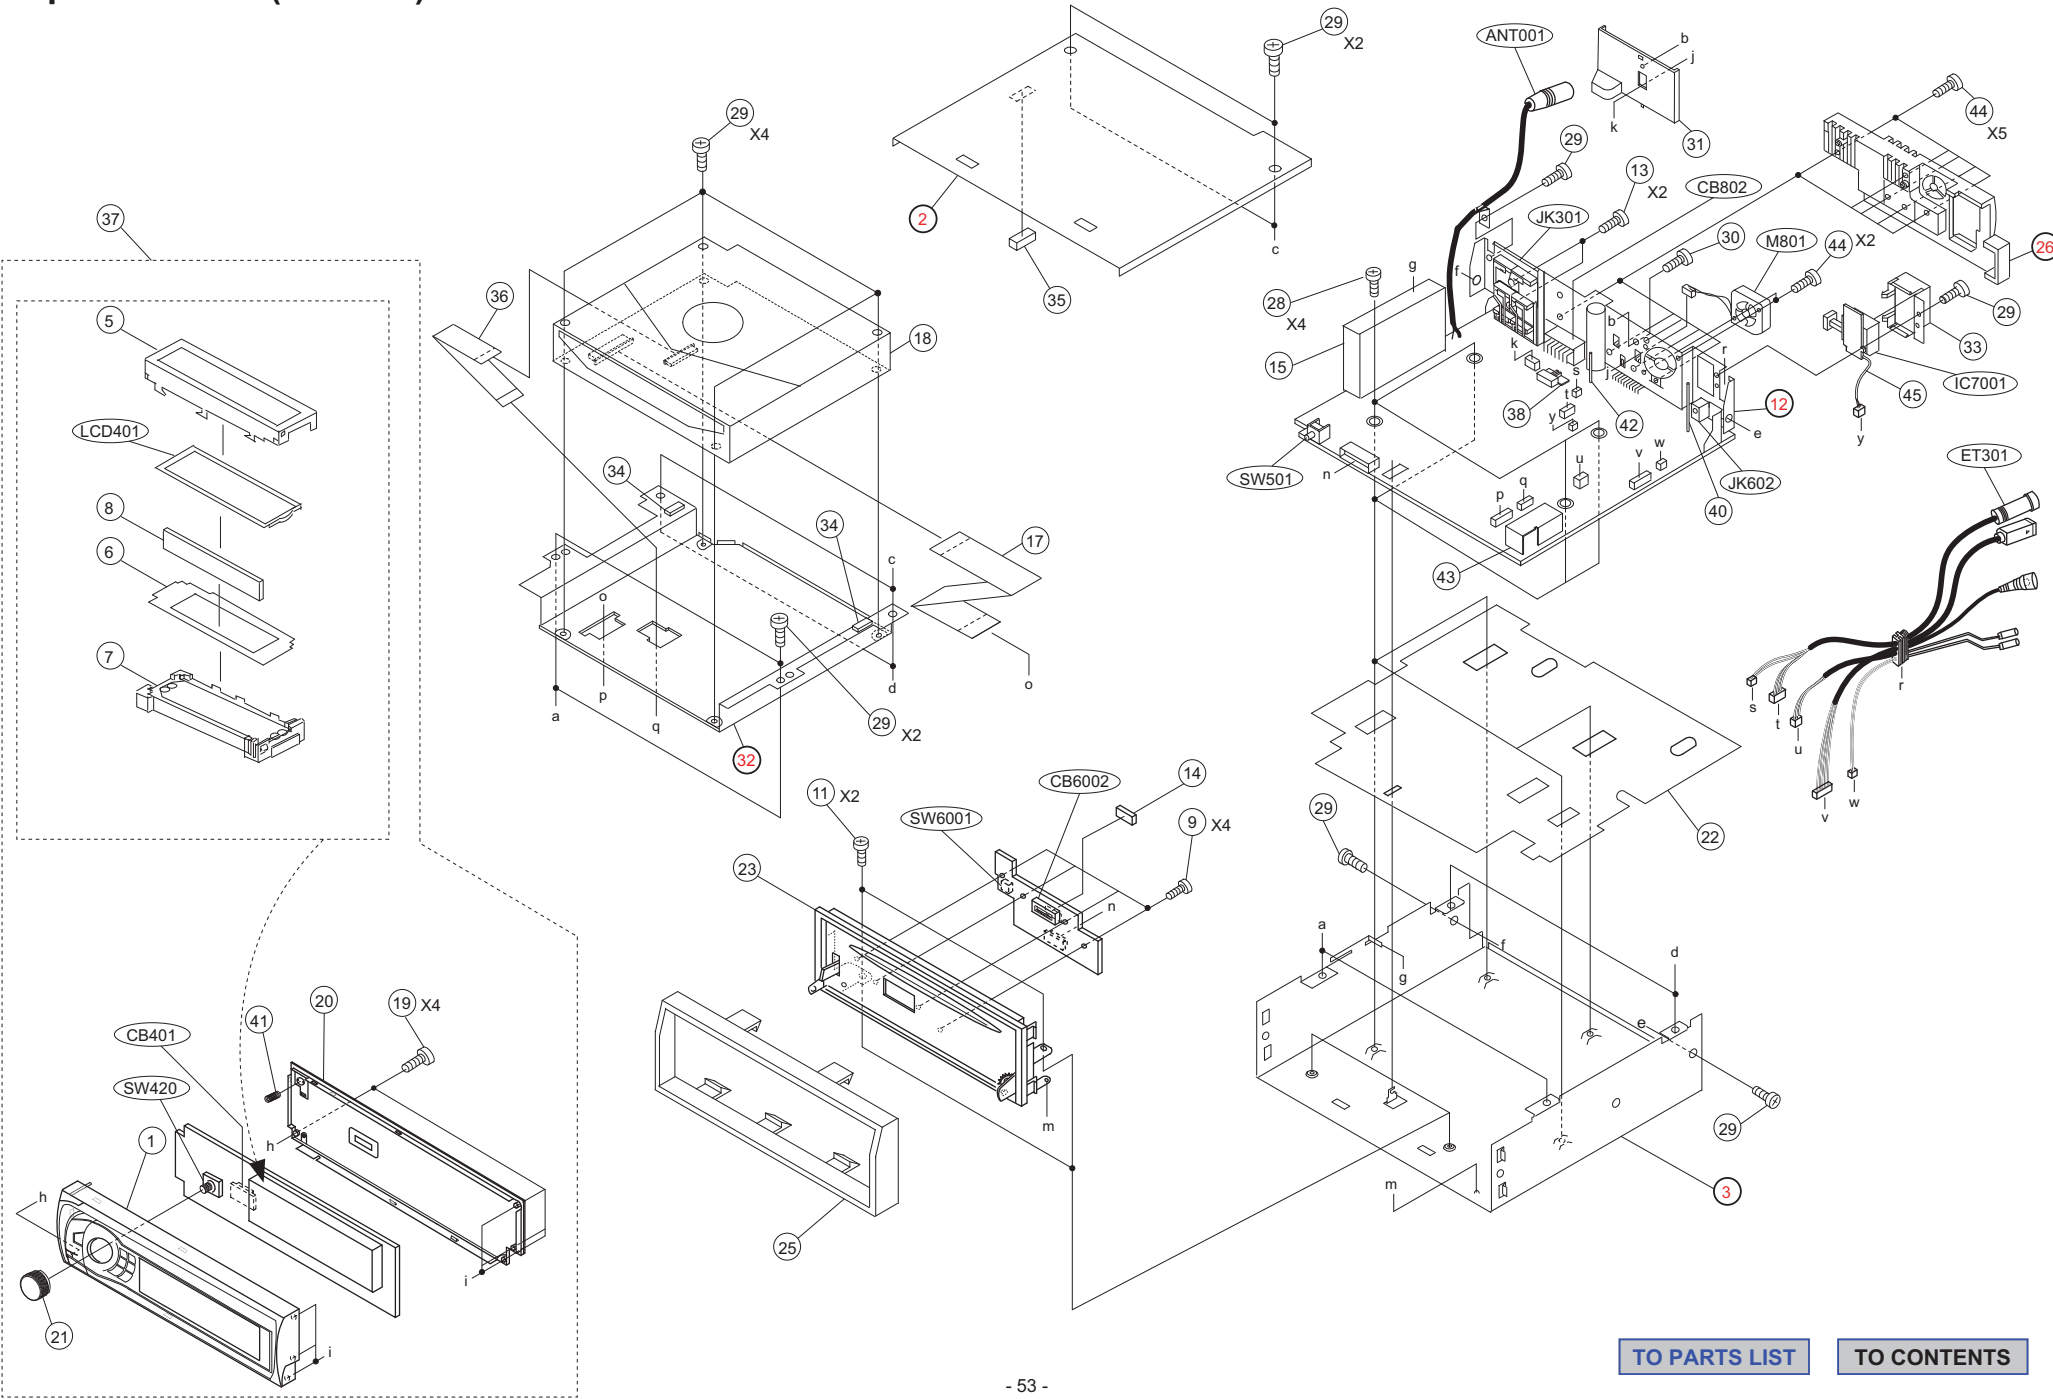

[TO PARTS LIST](#)

[TO CONTENTS](#)

Cabinet Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

#1 : For North American Model Only,
 \$1 : For General Foreign (Region3) Model Only,
 %1 : For General Foreign (Region4) Model Only,
 &1 : For Chinese Model Only,
 Others : Common.

#1	1	EN-05304Z01	NOSE,PIECE ASSY
\$1	1	EN-05304Z04	NOSE,PIECE ASSY
%1	1	EN-05304Z04	NOSE,PIECE ASSY
&1	1	EN-05304Z04	NOSE,PIECE ASSY
	2	-----	COVER, TOP
	3	-----	CHAS, BASE
	5	15-05230Z01	COVER, LCD
	6	26-05514Z01	REF, SHEET (FLAT)
	7	15-05233Z01	CASE, LCD ASSY
	8	75T03213K03	RUBBER, ELECTRIC
	9	03S60823Y33	SCR, P-T 2X4 ZN A
	11	03S94385F13	SCR, NYLOK M2.6X3
	12	-----	BKT, CHAS REAR
	13	03S60825Y04	SCR, B-T 3X8 ZN A
	14	75-06068Z11	CUS, RUB 12X6XT1.2
	15	TU-04070Z01	TUNER, TFTE1U112A
	17	30-05950Z08	SML2CD-45X112-BDX6
	18	DV-05029Z01	DV37M15B
	19	03S70691Y11	SCR, B-T 1.7X8 ZB A
	20	13-05224Z01	NOSE, BOTTOM
	21	36-05293Z01	KNOB, ROTARY ASSY
	22	14-05493Z01	INSULATOR, MAIN (FLAT)
	23	EN-05507Z01	NOSE, BASE ASSY
	25	33-05994Z02	FACE, PLATE
	26	-----	HEAT, SINK A
	28	03T25225Y01	SCR, GND
	29	03S60822Y10	SCR, S-T 2.6X5 ZN A
	30	03S60825Y09	SCR, B-T 3X6 ZN A
	31	15-05678Z01	COVER, IC
	32	-----	BKT, MECH DVD
	33	15-05285Z01	COVER, CONN
	34	75-06068Z14	CUS, RUB 12X6XT2.5
	35	75T25010Y33	CUSHION, SHLD5-5.5-25
	36	30-06763Z01	SML2SC-24(5)X112-BDX
#1	37	66-05403Z24	ASSY, NOSE UNIT HBAL501A
\$1	37	66-05403Z27	ASSY, NOSE UNIT HBAP503A
%1	37	66-05403Z28	ASSY, NOSE UNIT HBAP504A
&1	37	66-05403Z29	ASSY, NOSE UNIT HBAC501A
	38	36A04141K02	KNOB, SLIDE
	40	09T84840F02	LUG, STYLE 32MM
	41	41-05515Z01	SPRING, OPEN
	42	09T84840F01	LUG, STYLE 18MM
	43	15-07470Z01	SHIELD, DVD
	44	03S60822Y22	SCR, S-T 2.6X14 ZN A
	45	09-05504Z02	ASSY, OPT WIRE CDA

DVA-9861/DVA-9861E

DVA-9861/DVA-9861E



DVD Deck Mechanism Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

2	01A51490Y24	ASSY,RIV GUIDE TOP
3	-----	CHASSIS,TOP
4	41A60338Y01	SPRING,DRIVE F-L
5	41A60339Y01	SPRING,DRIVE F-R
6	41A60340Y01	SPRING,DRIVE R
7	41A60344Y01	SPRING,LEV ROLL-L
8	03S94385F19	SCR,NYLOK M2X2.5
9	43-03093Z03	ROLLER,DISC PIN
12	14-01064Z01	INSULATOR,PWB L2
13	-----	ASSY,RIV CHAS BASE
14	45C51003Y10	LEVER,TRIGER MAIN
15	41A51395Y01	SPRING,LEV TRG MAIN
16	45A50833Y11	LEVER,LINK SLDR(R)
17	45B51221Y11	SLIDER,LOCK(R2)
18	41A51396Y01	SPRING,SLD LOCK(R2)
19	45C51237Y10	SLIDER,LOCK(R1)
20	44A50829Y11	GEAR,LOAD(E)
21	45-01051Z03	SLIDER,DISC SW(L)
22	45-01052Z03	SLIDER,DISC SW(R)
23	45B50838Y11	LEVER,LOCK(RC)
24	41A60343Y01	SPRING,LEV LOCK-RC
26	41-02948Z01	SPRING,LEV DISC
27	04B41345P14	WASH,L. 2.1X4X0.25
28	75C60456Y04	DAMPER,DV-TM
29	75C60456Y05	DAMPER,DV-TM
30	14A51712Y01	INSULATOR,FPC
31	03S94385F07	SCR,NYLOK M2X2
32	45D51236Y10	SLIDER,LOCK(L)
33	01A51491Y11	ASSY,RIV LEV ASST
34	44-02001Z03	ASSY,SLIDER TRIGER 2
35	41A60348Y01	SPRING,SLD TRIGER
36	04B41345P15	WASH,1.2X3.5X0.35
37	49A51397Y03	ROLLER,DV-TM
38	43A51228Y11	BUSH,ARM GUIDE
39	45-02722Z03	LEVER,ROLLER(L)2
40	45-02723Z03	LEVER,ROLLER(R)2
41	41A60360Y01	SPRING,ARM GUIDE
42	45-01385Z03	ARM,DISC GUIDE
43	45B60959Y11	ARM,DISC GUIDE-L
44	45B60960Y11	ARM,DISC GUIDE-R
45	04S40075G09	WASH,2.6X4.7X0.25
46	14A61435Y01	INSULATOR,ARM DISC
47	47A51349Y01	SHAFT,ROLLER
48	44-01531Z03	GEAR,ROLLER-2
49	04B41345P02	WASH,1.7X3.5X0.25
50	07-01606Z03	ASSY,RIV BKT LD-F-3
51	47-01479Z01	SHAFT,LOAD
52	44A50827Y11	GEAR,LOAD(C)
53	44-01532Z03	GEAR,LOAD(F)-2
54	84-01207Z01	FPC,LOAD
55	07-01177Z03	ASSY,RIV BKT LOAD(R)
56	01A51487Y11	ASSY,RIV BKT LD-R2

DVA-9861/DVA-9861E

57	44A50825Y11	GEAR,LOAD(A)
58	44A50826Y11	GEAR,LOAD(B)
59	07B51226Y11	BKT,SHAFT LOAD
60	03S30688Y17	SCR,MCH M1.4X2
61	04B41345P11	WASH,1.2X2.5X0.25
62	45B51235Y10	SLIDER,ARM LIFT(R)
63	41A60336Y01	SPRING,CLAMP-R
64	41A60335Y01	SPRING,CLAMP-L
65	41A60337Y01	SPRING,CLAMP-RTL
66	-----	ASSY,RIV ARM CLAMP
67	43-01054Z03	STOPPER,CLAMP
68	43-01049Z02	TABLE,CLAMPER
69	-----	ASSY,RIV CHAS PICKUP
70	07-01053Z03	BKT,SPINDLE ADJUST
72	07A50823Y11	BKT,SHAFT PICKUP
73	47A51347Y01	SHAFT,PICKUP MAIN
74	47-01057Z01	SHAFT,PICKUP SUB
75	41B50836Y11	SPRING,NUT
76	15A51210Y11	COVER,MAIN
77	03S94385F09	SCR,NYLOK M2X3 P2
78	45C51234Y02	SLIDER,8CM
79	01B61577Y10	ASSY,RIV LEVER-8L
80	45A51231Y10	LEVER,TRIGER 8CM
81	45-02638Z03	LEVER,TRIGER SUB2
82	41A51394Y01	SPRING,LEV 8CM(L)
83	41A60346Y01	SPRING,LEV TRG-SUB
84	41A60347Y01	SPRING,SLD 8CM
86	07A60069Y11	BKT,SLIDER 8CM
87	15B61279Y11	SPACER,DAMPER
88	03S94385F98	SCR,NYLOK M2X2.5
89	14-01063Z01	INSULATOR,PWB R2