
Packing Assembly Parts List

Symbol No.	Part No.	Description
101-1	03S60820Y16	SCR,MCH 5X8 ZN A
101-2	03S60820Y17	SCR,MCH 5X8 ZN A
#1 101-3	60S70585F01	BAT,LIT.3V (CR2025)
102	15-05590Z01	CASE,INNER
#1 103	97-02173Z01	ASSY,SBNN00003A
#1 104	68-04123Z67	O/M AOAM AODL
$1 104	68-04123Z69	O/M AAO AODL
%1 104	68-04123Z69	O/M AAO AODL
&1 104	68-05946Z33	O/M AOCH
105	01T75479Y02	ASSY,REMOTE W200A
#1 106	09-05505Z01	ASSY,POW WIRE W100A
$1 106	09-05506Z01	ASSY,POW WIRE W100E
%1 106	09-05506Z01	ASSY,POW WIRE W100E
&1 106	09-05506Z01	ASSY,POW WIRE W100E
107	07-01964Z01	BKT,RELEASE
108	33-05591Z01	FACE,PLATE

NOTE : #1 : For North American Model Only,
$1 : For General Foreign (Region3) Model Only,
%1 : For General Foreign (Region4) Model Only,
&1 : For Chinese Model Only,
Others : Common.

Packing Method View

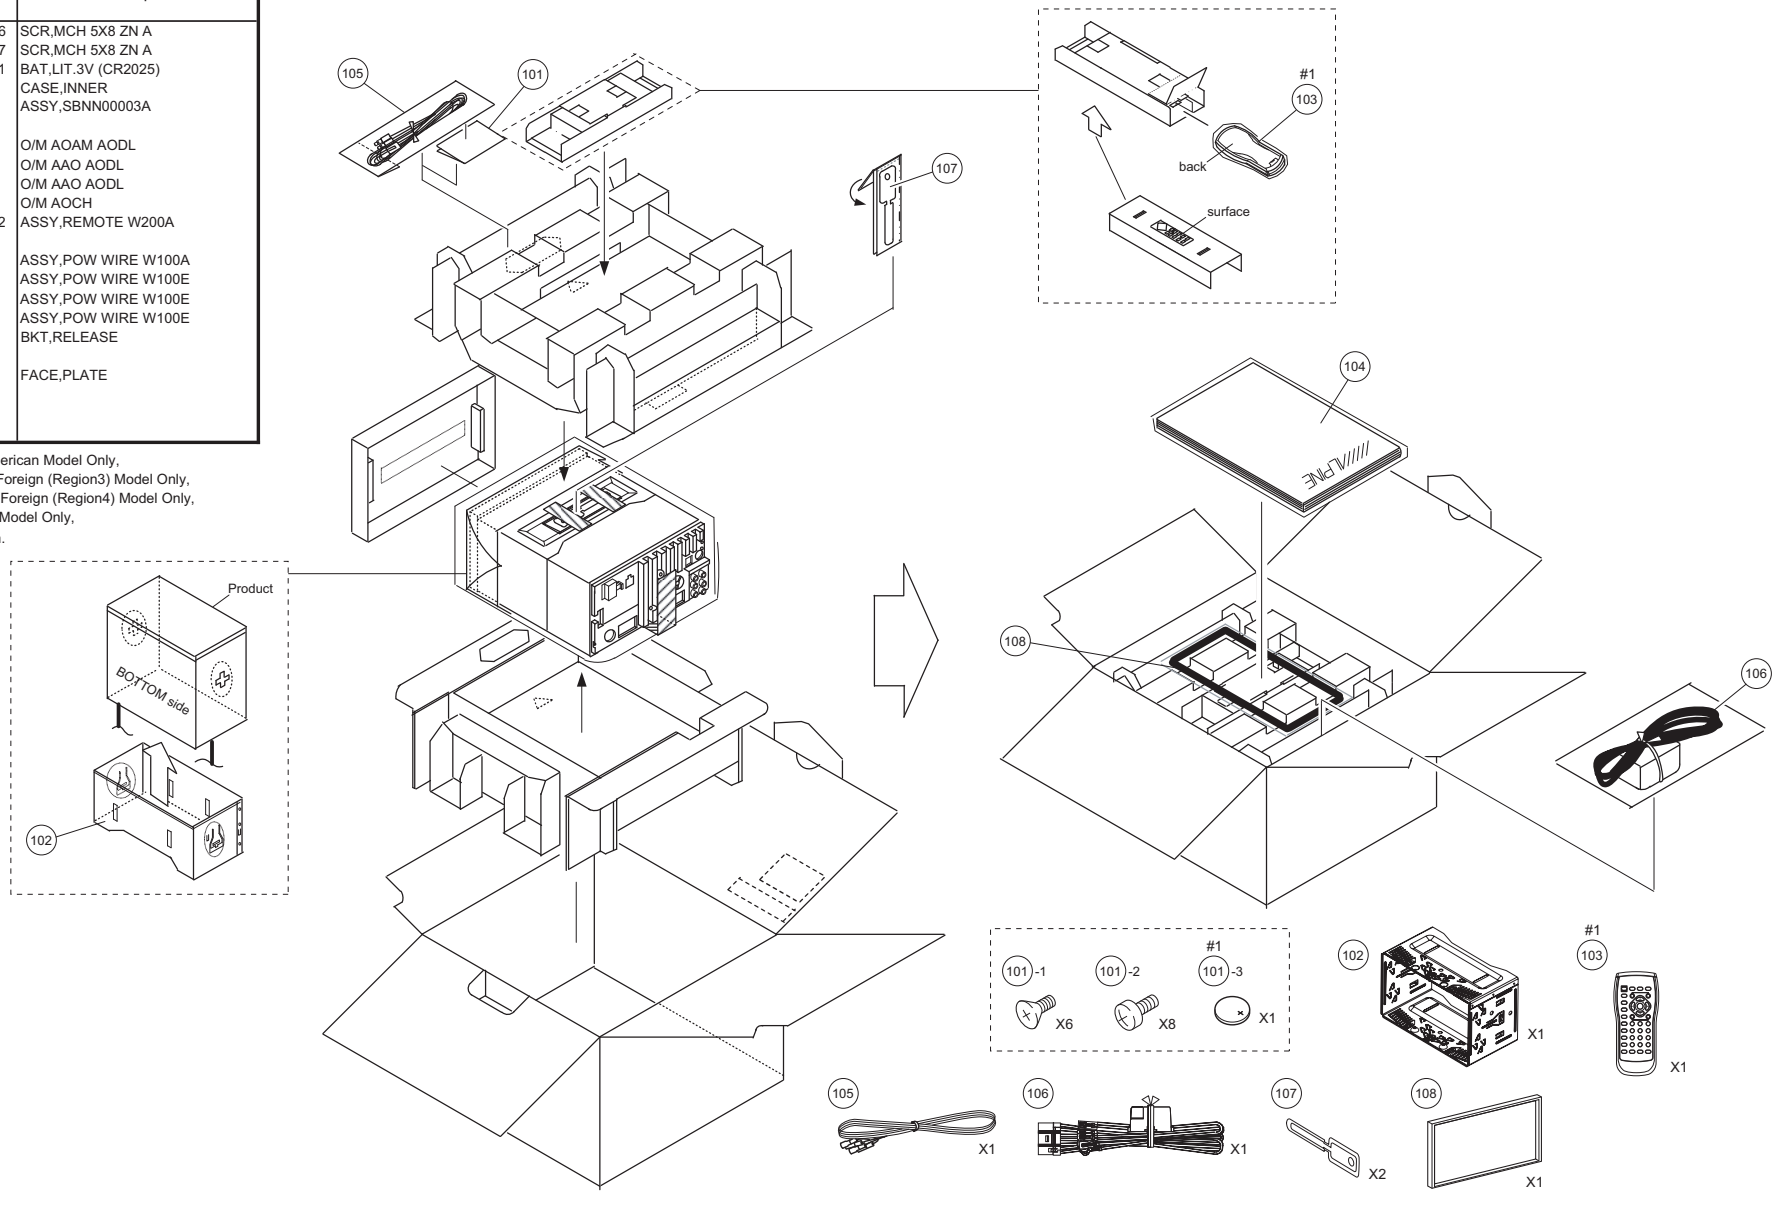


TO CONTENTS

System Connections

(North American Model Only)

Connections

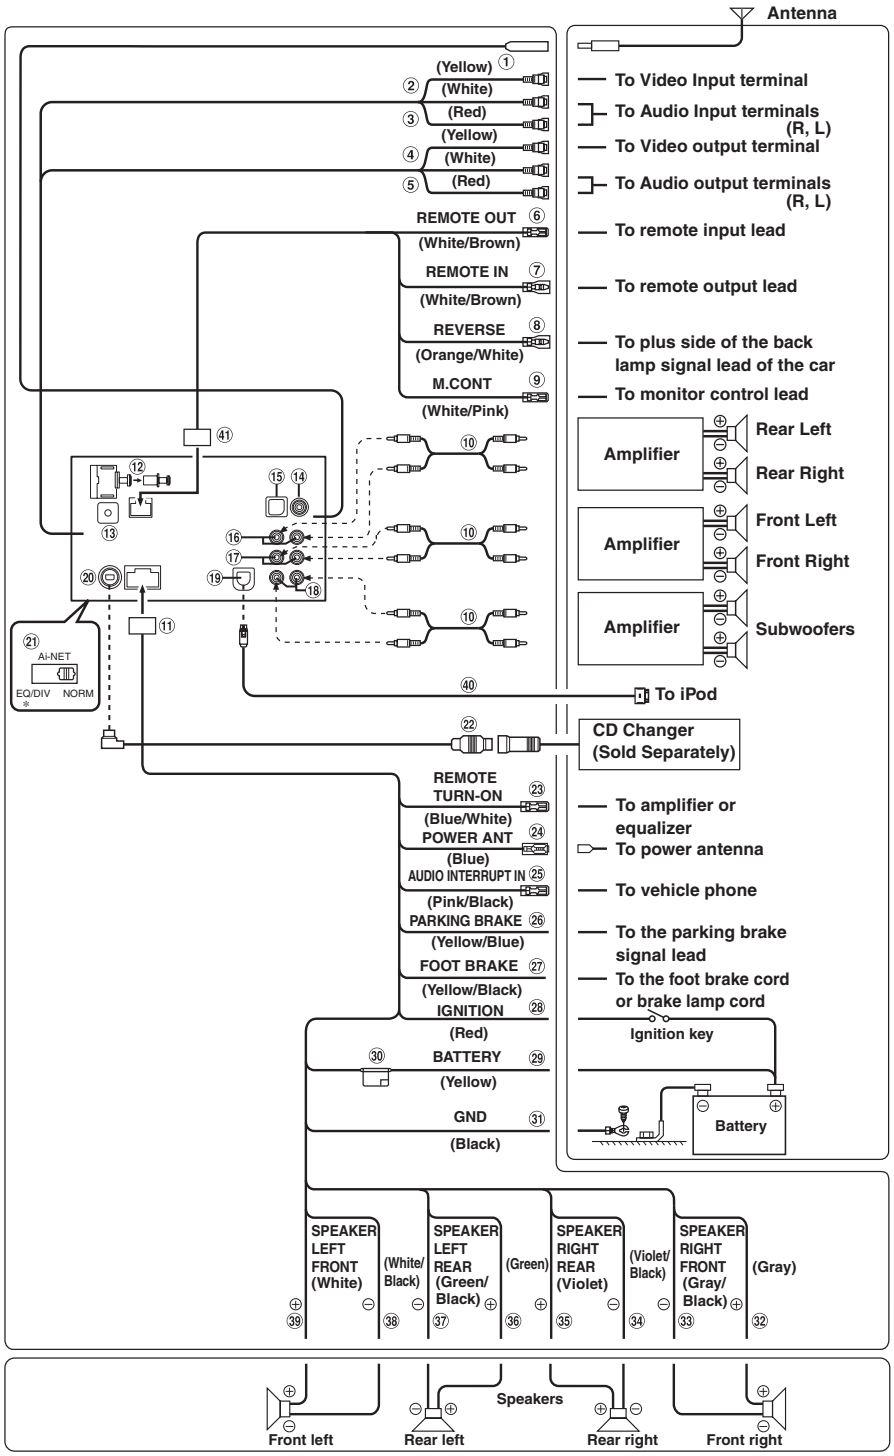

• *Set the system switch to "NORM" when only a changer is connected (when the Ai-NET compatible equalizer is not used).*

** The label is attached on the button of the unit.*

TO CONTENTS

① **Antenna Receptacle**

② **Video Output Connector (AUX OUTPUT) (Yellow)**
Output the video.

③ **Audio Output Connectors (AUX OUTPUT)**
RED is right and WHITE is left output the audio.

④ **Video Input Connector (AUX INPUT) (Yellow)**
Input the video.

⑤ **Audio Input Connectors (AUX INPUT)**
RED is right and WHITE is left input the audio

⑥ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

⑦ **Remote Control Input Lead (White/Brown)**
Connect the external Alpine product to the remote control output lead.

⑧ **Reverse Lead (Orange/White)**
Use only when a back-up camera is connected. Connect to the plus side of the car's reverse lamp that lights when the transmission is shifted into reverse (R).
Switches the video picture to the back-up camera. This is linked with putting the car into reverse (R).

⑨ **Monitor Control Lead (White/Pink)**
Connect this to the Monitor Control Lead of the touch panel-compatible rear monitor

⑩ **RCA Extension Cable (sold separately)**

⑪ **Power Supply Connector**

⑫ **Digital Output Terminal (Optical)**
Use when combining fiber digital input compatible products.

⑬ **Steering Remote Control Interface Connector**
To steering remote control interface box.
For details about connections, consult your nearest Alpine dealer.

⑭ **CAMERA Input Terminal**
Use when connecting a back-up camera.

⑮ **RGB Input Terminal**
Connect this to the RGB output terminal of the Navigation System.

⑯ **Rear Output RCA Connectors**
RED is right and WHITE is left.

⑰ **Front Output RCA Connectors**
RED is right and WHITE is left.

⑱ **Subwoofer RCA Connectors**
RED is right and WHITE is left.

⑲ **iPod Direct Connector**
iPod control signals.
Connect this to an iPod, using the (also separately sold) FULL SPEED™ Connection Cable (KCE-422i).

⑳ **Ai-NET Connector**
Connect this to the output or input connector of another device (CD Changer, Equalizer, HD Radio™ TUNER MODULE, etc.) equipped with Ai-NET.
- *Interface adapter for iPod (KCA-420i) is not recommended for use with this product.*
- *You can input TV/video sound by connecting an optional Ai-NET/RCA Interface cable (KCA-121B) to this component.*

㉑ **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.
- *Be sure to turn the power off to the unit before changing the switch position.*

㉒ **Ai-NET Cable (Included with CD Changer)**

㉓ **Remote Turn-On Lead (Blue/White)**
Connect this lead to the remote turn-on lead of your amplifier or signal processor.

㉔ **Power Antenna Lead (Blue)**
Connect this lead to the +B terminal of your power antenna, if applicable.
- *This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier or a signal processor, etc.*

㉕ **Audio Interrupt In Lead (Pink/Black)**

㉖ **Parking Brake Lead (Yellow/Blue)**
Connect this lead to the power supply side of the parking brake switch to transmit the parking brake status signals to the IVA-W200.

㉗ **Foot Brake Lead (Yellow/Black)**
Connect to the vehicle's foot brake lead or brake lamp lead.

㉘ **Switched Power Lead (Ignition) (Red)**
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+) 12V only when the ignition is turned on or in the accessory position.

㉙ **Battery Lead (Yellow)**
Connect this lead to the positive (+) post of the vehicle's battery.

㉚ **Fuse Holder (10A)**

㉛ **Ground Lead (Black)**
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

㉜ **Right Front (+) Speaker Output Lead (Gray)**

㉝ **Right Front (–) Speaker Output Lead (Gray/Black)**

㉞ **Right Rear (–) Speaker Output Lead (Violet/Black)**

㉟ **Right Rear (+) Speaker Output Lead (Violet)**

㊱ **Left Rear (+) Speaker Output Lead (Green)**

㊲ **Left Rear (–) Speaker Output Lead (Green/Black)**

㊳ **Left Front (–) Speaker Output Lead (White/Black)**

㊴ **Left Front (+) Speaker Output Lead (White)**


㊵ **FULL SPEED™ Connection Cable (KCE-422i) (sold separately)**

㊶ **Remote IN/OUT Connector**

TO CONTENTS

System Example

Connect the Ai-NET compatible audio processor (Fiber digital compatible), Navigation system, DVD player and changer.

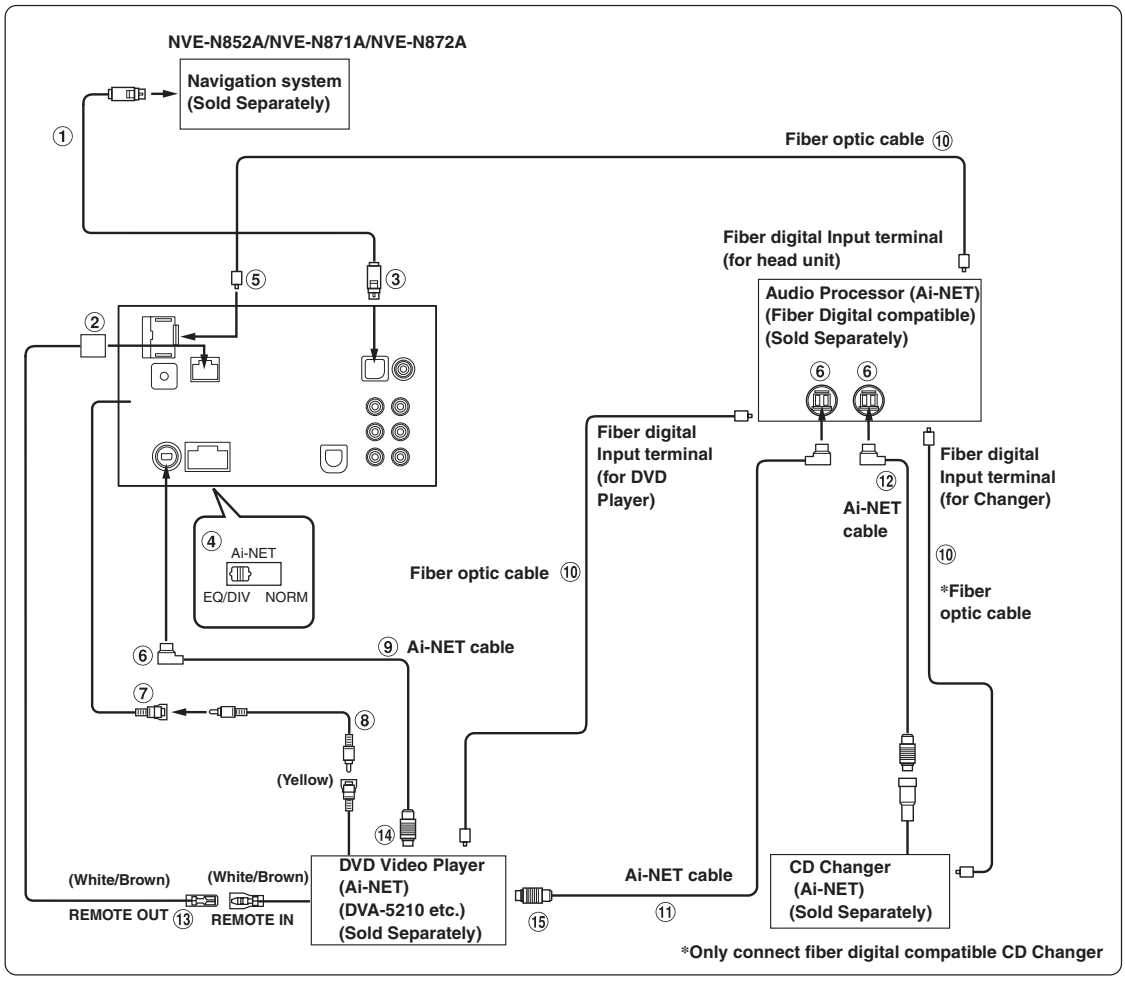

- *When the fiber optic compatible product is connected, it is necessary to set the mode of this unit.*
- *When the NVA-N751AS is connected for the Navigation System, use the RGB conversion cable KWE-503N (Sold separately).*

Please observe the following when using Fiber Optic Cable.

- *Do not coil the Fiber Optic Cable smaller than a 30 mm radius.*
- *Do not place anything on top of the Fiber Optic Cable.*
- *Be careful not to bend the Fiber Optic Cable at a sharp angle.*

TO CONTENTS

① **RGB Cable (Included with NVE-N852A/NVE-N872A, not included with NVE-N871A)**

② **Remote IN/OUT Connector**

③ **RGB Input Terminal**
Connect this to the RGB output terminal of the Navigation System.

④ **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.
- *Be sure to turn the power off to the unit before changing the switch position.*

⑤ **Digital Output Terminal**

⑥ **Ai-NET Connector**
Connect this to the output or input connector of other product equipped with Ai-NET.

⑦ **AUX Video Input Terminal**
Connect the video output lead of a DVD video player or DVD changer to this terminal.

⑧ **RCA Extension Cable (Included with DVD video player)**

⑨ **Ai-NET Cable (Included with DVD video player)**

⑩ **Fiber Optic Cable (Sold Separately)**

⑪ **Ai-NET Cable (Included with Audio Processor)**

⑫ **Ai-NET Cable (Included with CD Changer)**


⑬ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

⑭ **To Ai-NET Connector (Gray)**

⑮ **To Ai-NET Connector (Black)**

TO CONTENTS

When Connecting External Equipment

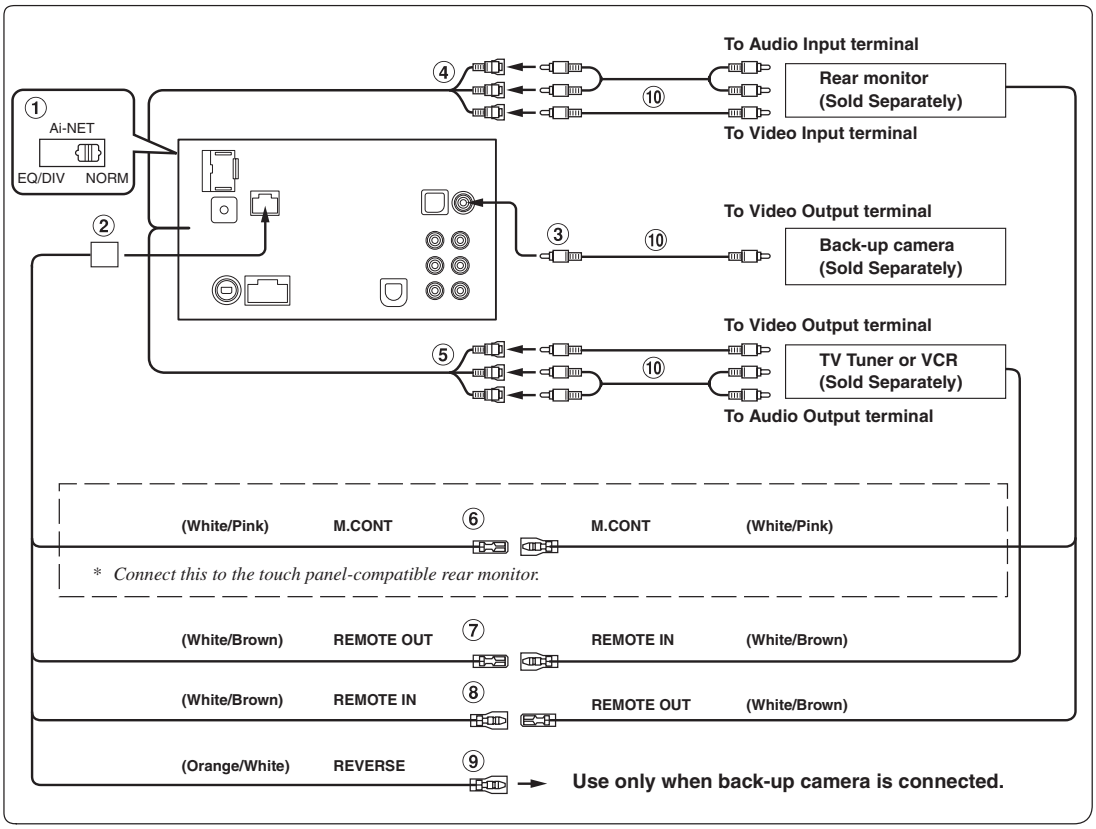

① **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.
- *Be sure to turn the power off to the unit before changing the switch position.*

② **Remote IN/OUT Connector**

③ **CAMERA Input Terminal**
Use when connecting a back-up camera.

④ **AUX Video/Audio Output Terminal**
Use when connecting an optional monitor etc.

⑤ **AUX Video/Audio Input Terminal**

⑥ **Monitor Control Lead (White/Pink)**
Connect this to the Monitor Control Lead of the touch panel-compatible rear monitor.

⑦ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

⑧ **Remote Control Input Lead (White/Brown)**


⑨ **Reverse Lead (Orange/White)**
Connect to the plus side of the car's reverse lamp which lights when the transmission is shifted into reverse (R). Switches the video picture to the back-up camera. This is linked to putting the car into reverse (R).

⑩ **RCA Extension Cable (Sold separately)**

TO CONTENTS

(General Foreign Model Only)

Connections

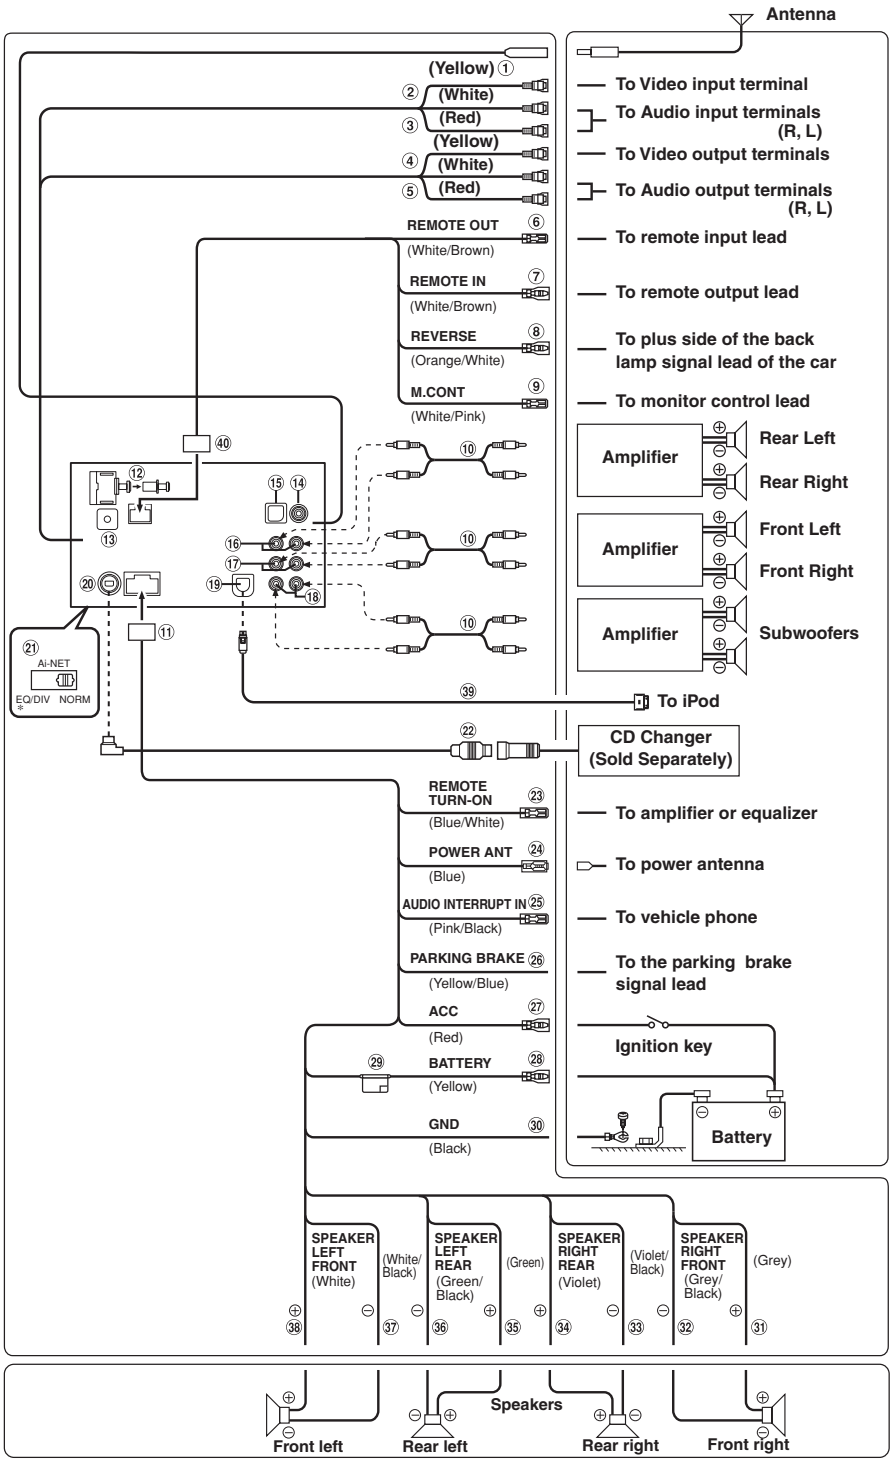

- *Set the system switch to "NORM" when only a changer is connected (when the Ai-NET compatible equalizer is not used).*

* *The label is attached on the button of the unit.*

TO CONTENTS

① **Antenna Receptacle**

② **Video Output Connector (AUX OUTPUT) (Yellow)**
Output the video.

③ **Audio Output Connectors (AUX OUTPUT)**
RED is right and WHITE is left output the audio.

④ **Video Input Connector (AUX INPUT) (Yellow)**
Input the video.

⑤ **Audio Input Connectors (AUX INPUT)**
RED is right and WHITE is left input the audio

⑥ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

⑦ **Remote Control Input Lead (White/Brown)**
Connect the external Alpine product to the remote control output lead.

⑧ **Reverse Lead (Orange/White)**
Use only when a back-up camera is connected. Connect to the plus side of the car's reverse lamp that lights when the transmission is shifted into reverse (R).
Switches the video picture to the back-up camera. This is linked with putting the car into reverse (R).

⑨ **Monitor Control Lead (White/Pink)**
Connect this to the Monitor Control Lead of the touch panelcompatible rear monitor.

⑩ **RCA Extension Cable (sold separately)**

⑪ **Power Supply Connector**

⑫ **Digital Output Terminal (Optical)**
Use when combining fiber digital input compatible products.

⑬ **Steering Remote Control Interface Connector**
To steering remote control interface box.
For details about connections, consult your nearest Alpine dealer.

⑭ **CAMERA Input Terminal**
Use when connecting a back-up camera.

⑮ **RGB Input Terminal**
Connect this to the RGB output terminal of the Navigation System.

⑯ **Rear Output RCA Connectors**
RED is right and WHITE is left.

⑰ **Front Output RCA Connectors**
RED is right and WHITE is left.

⑱ **Subwoofer RCA Connectors**
RED is right and WHITE is left.

⑲ **iPod Direct Connector**
iPod control signals.
Connect this to an iPod, using the (also separately sold) FULL SPEED™ Connection Cable (KCE-422i).

⑳ **Ai-NET Connector**
Connect this to the output or input connector of another device (CD Changer, Equalizer, HD Radio™ TUNER MODULE, etc.) equipped with Ai-NET.
- *Interface adapter for iPod (KCA-420i) is not recommended for use with this product.*
- *You can input TV/video sound by connecting an optional Ai-NET/RCA Interface cable (KCA-121B) to this component.*

㉑ **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.
- *Be sure to turn the power off to the unit before changing the switch position.*

㉒ **Ai-NET Cable (Included with CD Changer)**

㉓ **Remote Turn-On Lead (Blue/White)**
Connect this lead to the remote turn-on lead of your amplifier or signal processor.

㉔ **Power Antenna Lead (Blue)**
Connect this lead to the +B terminal of your power antenna, if applicable.
- *This lead should be used only for controlling the vehicle's power antenna. Do not use this lead to turn on an amplifier or a signal processor, etc.*

㉕ **Audio Interrupt In Lead (Pink/Black)**

㉖ **Parking Brake Lead (Yellow/Blue)**
Connect this lead to the power supply side of the parking brake switch to transmit the parking brake status signals to the IVA-W200E.

㉗ **Switched Power Lead (Ignition) (Red)**
Connect this lead to an open terminal on the vehicle's fuse box or another unused power source which provides (+) 12V only when the ignition is turned on or in the accessory position.

㉘ **Battery Lead (Yellow)**
Connect this lead to the positive (+) post of the vehicle's battery.

㉙ **Fuse Holder (10A)**

㉚ **Ground Lead (Black)**
Connect this lead to a good chassis ground on the vehicle. Make sure the connection is made to bare metal and is securely fastened using the sheet metal screw provided.

㉛ **Right Front (+) Speaker Output Lead (Grey)**

㉜ **Right Front (–) Speaker Output Lead (Grey/Black)**

㉝ **Right Rear (–) Speaker Output Lead (Violet/Black)**

㉞ **Right Rear (+) Speaker Output Lead (Violet)**

㉟ **Left Rear (+) Speaker Output Lead (Green)**

㊱ **Left Rear (–) Speaker Output Lead (Green/Black)**

㊲ **Left Front (–) Speaker Output Lead (White/Black)**

㊳ **Left Front (+) Speaker Output Lead (White)**


㊴ **FULL SPEED™ Connection Cable (KCE-422i) (sold separately)**

㊵ **Remote IN/OUT Connector**

TO CONTENTS

System Example

Connect the Ai-NET compatible audio processor (Fiber digital compatible), Navigation system, DVD player and changer.

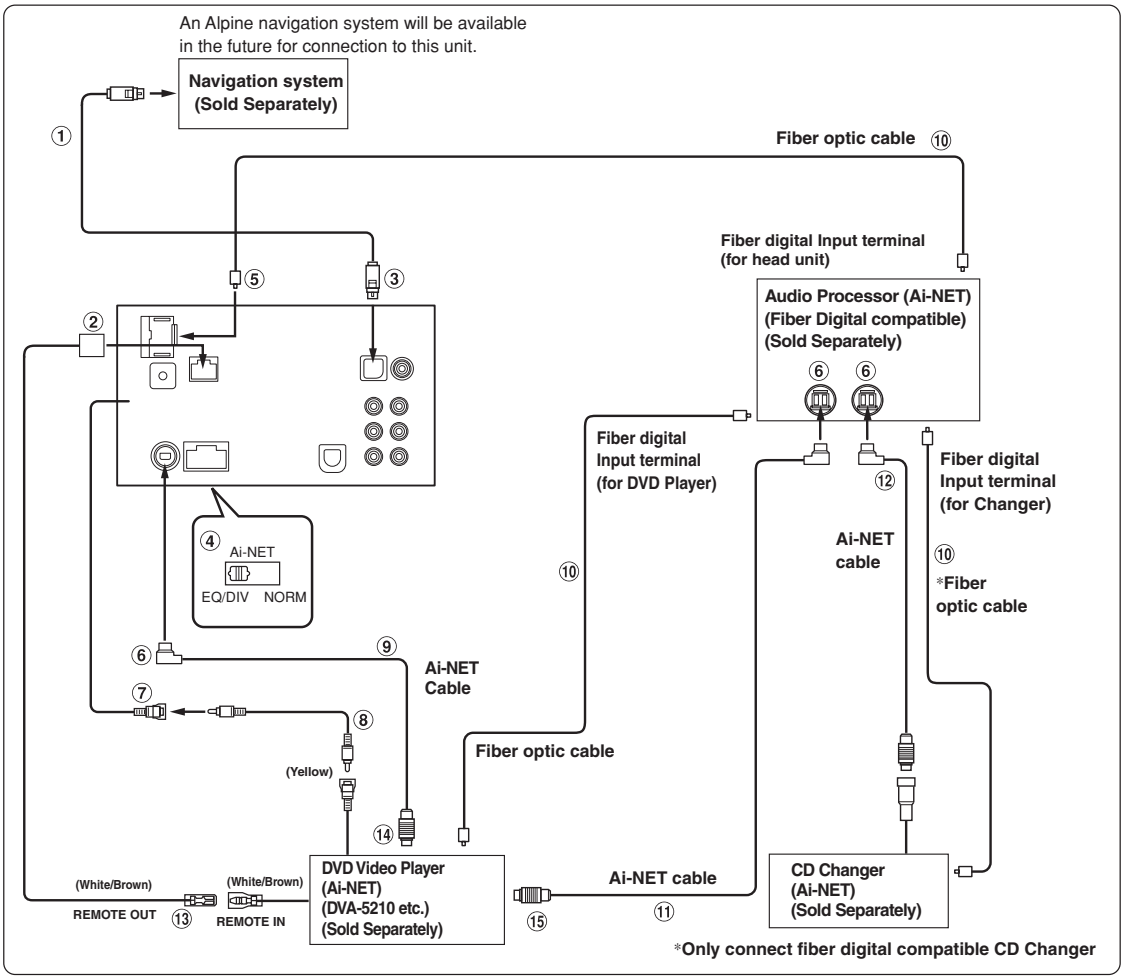

- *When the fiber optic compatible product is connected, it is necessary to set the mode of this unit.*

Please observe the following when using Fiber Optic Cable.

- *Do not coil the Fiber Optic Cable smaller than a 30 mm radius.*
- *Do not place anything on top of the Fiber Optic Cable.*
- *Be careful not to bend the Fiber Optic Cable at a sharp angle.*

TO CONTENTS

① **RGB Cable (Included with Navigation or sold separately)**

② **Remote IN/OUT Connector**

③ **RGB Input Terminal**
Connect this to the RGB output terminal of the Navigation System.

④ **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.

- *Be sure to turn the power off to the unit before changing the switch position.*

⑤ **Digital Output Terminal**

⑥ **Ai-NET Connector**
Connect this to the output or input connector of other product equipped with Ai-NET.

⑦ **AUX Video Input Terminal**
Connect the video output lead of a DVD video player or DVD changer to this terminal.

⑧ **RCA Extension Cable (Included with DVD video player)**

⑨ **Ai-NET Cable (Included with DVD video player)**

⑩ **Fiber optic Cable (Sold Separately)**

⑪ **Ai-NET Cable (Included with Audio processor)**

⑫ **Ai-NET Cable (Included with CD Changer)**


⑬ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

⑭ **To Ai-NET Connector (Grey)**

⑮ **To Ai-NET Connector (Black)**

TO CONTENTS

When Connecting External Equipment

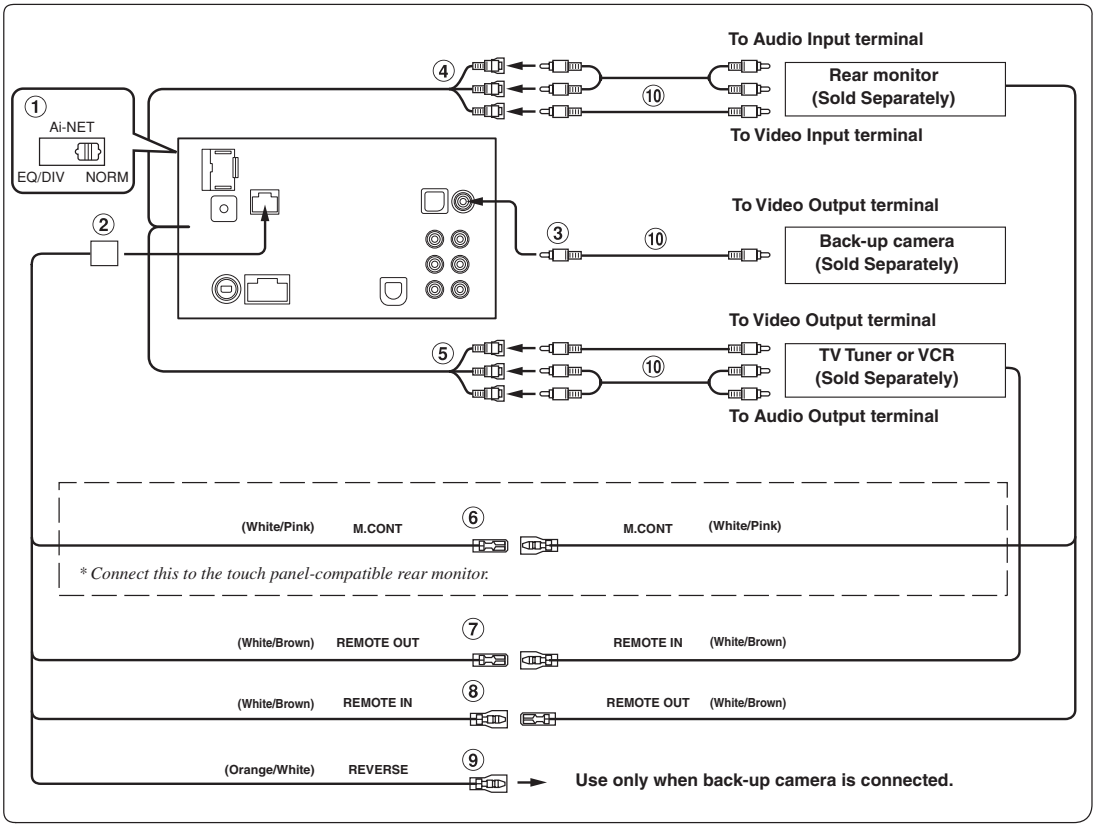

① **System Switch**
When connecting an equalizer or divider using Ai-NET feature, place this switch in the EQ/DIV position. When no device is connected, leave the switch in the NORM position.

- *Be sure to turn the power off to the unit before changing the switch position.*

② **Remote IN/OUT Connector**

③ **CAMERA Input Terminal**
Use when connecting a back-up camera.

④ **AUX Video/Audio Output Terminal**
Use when connecting an optional monitor etc.

⑤ **AUX Video/Audio Input Terminal**

⑥ **Monitor Control Lead (White/Pink)**
Connect this to the Monitor Control Lead of the touch panel-compatible rear monitor.

⑦ **Remote Control Output Lead (White/Brown)**
Connect this lead to the remote control input lead. This lead outputs the controlling signals from the remote control.

⑧ **Remote Control Input Lead (White/Brown)**


⑨ **Reverse Lead (Orange/White)**
Connect to the plus side of the car's reverse lamp which lights when the transmission is shifted into reverse (R). Switches the video picture to the back-up camera. This is linked to putting the car into reverse (R).

⑩ **RCA Extension Cable (Sold separately)**

TO CONTENTS

Extension Cable

*Always connect the Extension Cable
when making checks of voltage and repair.

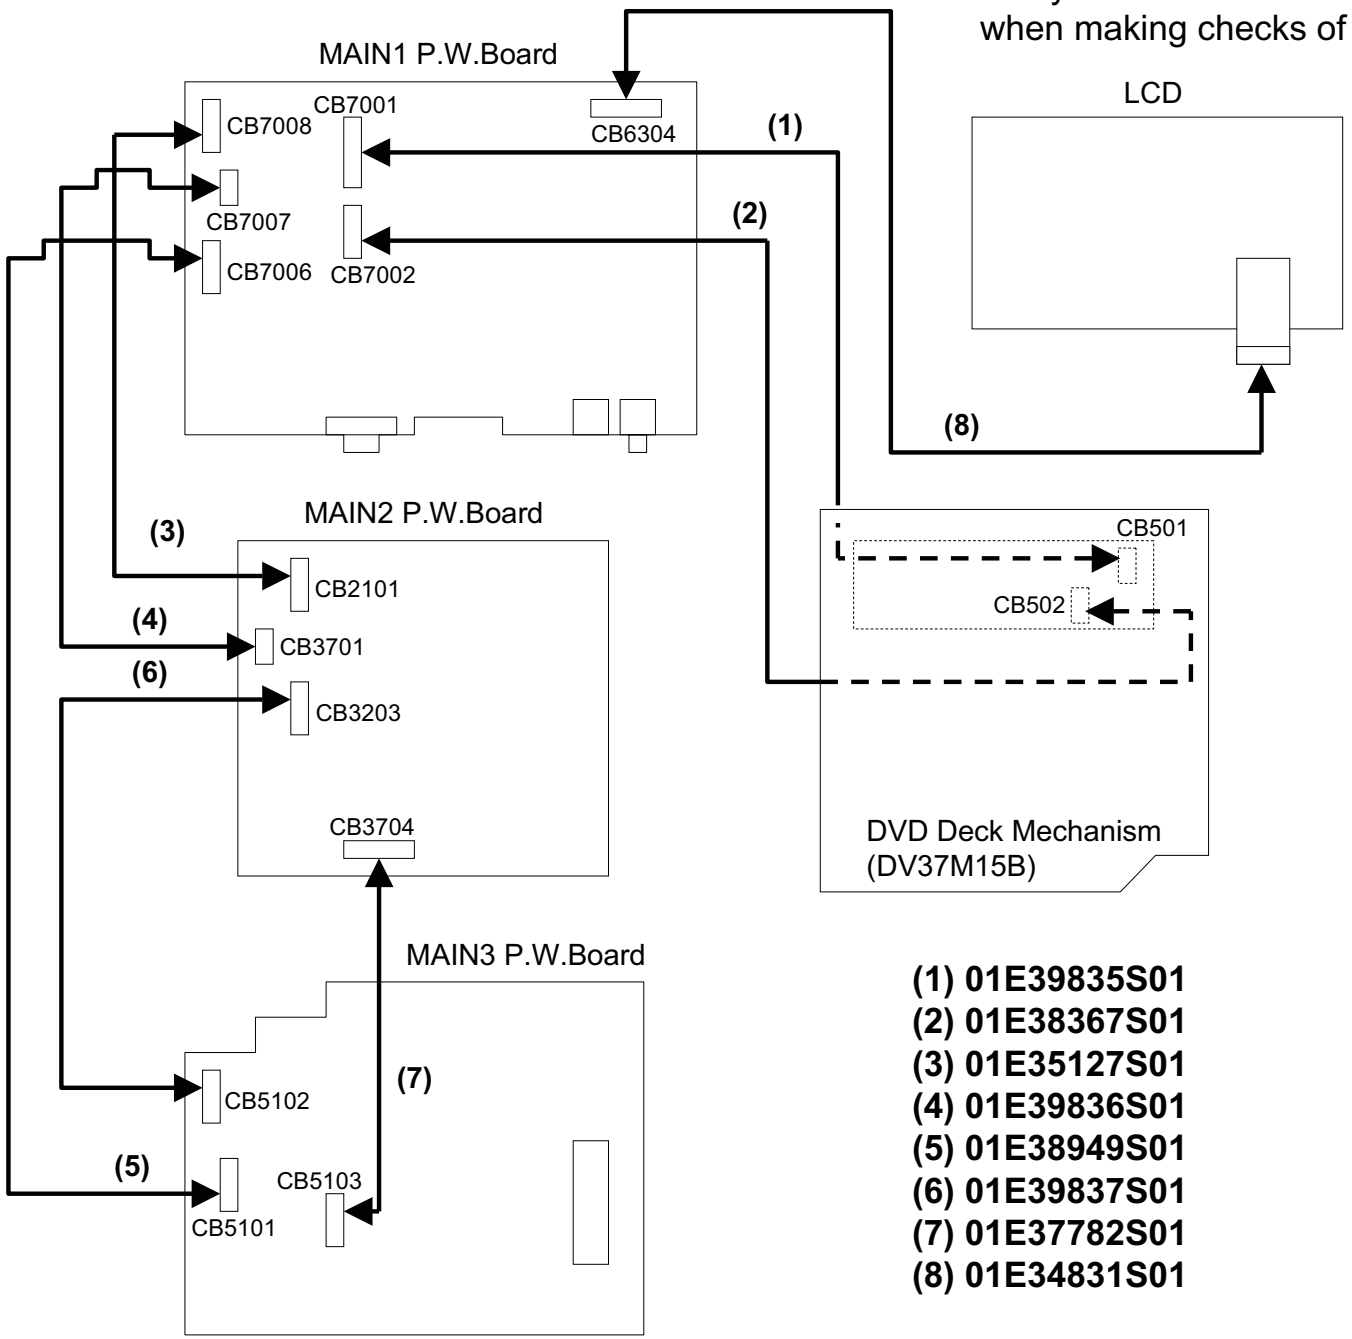

(1) 01E39835S01
(2) 01E38367S01
(3) 01E35127S01
(4) 01E39836S01
(5) 01E38949S01
(6) 01E39837S01
(7) 01E37782S01
(8) 01E34831S01

TO CONTENTS

Electrical Parts List

* Each parts on P.W.Board are described in order of the reference number.

NOTE : #1 : For North American Model Only,
$1 : For General Foreign (Region3) Model Only,
%1 : For General Foreign (Region4) Model Only,
&1 : For Chinese Model Only,
Others : Common.

=======MAIN1 P.W.Board

C2510	08S65674Y05	CAP,CER 105KX5R1C-CP
C2511	08S65674Y05	CAP,CER 105KX5R1C-CP
C2512	08S45676W80	CAP,CER 223K-B1E -CP
C2513	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2514	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2515	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2516	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2517	08S65674Y05	CAP,CER 105KX5R1C-CP
C2518	08S65674Y05	CAP,CER 105KX5R1C-CP
C2519	08S65674Y05	CAP,CER 105KX5R1C-CP
C2520	08S65674Y05	CAP,CER 105KX5R1C-CP
C2521	08S45676W80	CAP,CER 223K-B1E -CP
C2522	08S45676W85	CAP,CER 104K-B1C -CP
C2551	08S45677W44	CAP,CER.221J-CH1H-CP
C2601	08S45676W80	CAP,CER 223K-B1E -CP
C2602	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2603	08S45677W22	CAP,CER.27RJ-CH1H-CP
C2604	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2605	08S65674Y05	CAP,CER 105KX5R1C-CP
C2606	08S65674Y05	CAP,CER 105KX5R1C-CP
C3308	08S65128F69	CAP,CER.103K-B1H -CP
C3309	08S45676W80	CAP,CER 223K-B1E -CP
C3312	08S45676W80	CAP,CER 223K-B1E -CP
C3313	08S35374W07	CAP,CER 334K-B1C -CP
C3315	08S65670Y01	CAP,CER 106KX5R1C-CP
C3317	08S65670Y01	CAP,CER 106KX5R1C-CP
C3319	08S45676W80	CAP,CER 223K-B1E -CP
C3328	08S65128F69	CAP,CER.103K-B1H -CP
C3329	08S65128F69	CAP,CER.103K-B1H -CP
C3332	08S45676W80	CAP,CER 223K-B1E -CP
C3333	08S45676W80	CAP,CER 223K-B1E -CP
C3334	08S65670Y01	CAP,CER 106KX5R1C-CP
C3335	08S65670Y01	CAP,CER 106KX5R1C-CP
C3337	08S65670Y01	CAP,CER 106KX5R1C-CP
C3341	08S65670Y01	CAP,CER 106KX5R1C-CP
C3342	08S65670Y01	CAP,CER 106KX5R1C-CP
C4001	08S45676W85	CAP,CER 104K-B1C -CP
C4002	08S45676W85	CAP,CER 104K-B1C -CP
C4003	08S45676W85	CAP,CER 104K-B1C -CP
C4004	08S65674Y05	CAP,CER 105KX5R1C-CP
C4005	08S65674Y05	CAP,CER 105KX5R1C-CP
C4006	08S65674Y05	CAP,CER 105KX5R1C-CP
C4007	08S45676W80	CAP,CER 223K-B1E -CP
C4008	08S45676W80	CAP,CER 223K-B1E -CP
C4301	08S45676W85	CAP,CER 104K-B1C -CP

C4302	08S45677W36	CAP,CER.101J-CH1H-CP
C4303	08S45677W36	CAP,CER.101J-CH1H-CP
C4304	08S65670Y01	CAP,CER 106KX5R1C-CP
C4305	08S65670Y01	CAP,CER 106KX5R1C-CP
C4306	08S45676W80	CAP,CER 223K-B1E -CP
C4307	08S45677W36	CAP,CER.101J-CH1H-CP
C4308	08S35349Y15	CAP,CER 474K-B1A -CP
C4309	08S35349Y16	CAP,CER 105K-B1A -CP
C4310	08S45676W85	CAP,CER 104K-B1C -CP
C4311	08S35349Y16	CAP,CER 105K-B1A -CP
C4312	08S45677W34	CAP,CER.82RJ-CH1H-CP
C4313	08S45677W05	CAP,CER.3R0C-CH1H-CP
C4314	08S45676W71	CAP,CER.682K-B1H -CP
C4317	08S45677W60	CAP,CER 102J-CH1H-CP
C4319	08S45676W73	CAP,CER.103K-B1H -CP
C4320	08S45676W73	CAP,CER.103K-B1H -CP
C4321	08S45676W73	CAP,CER.103K-B1H -CP
C4322	08S35349Y16	CAP,CER 105K-B1A -CP
C4323	08S45676W73	CAP,CER.103K-B1H -CP
C4324	08S65670Y01	CAP,CER 106KX5R1C-CP
C4325	08S45676W73	CAP,CER.103K-B1H -CP
C4326	08S45676W85	CAP,CER 104K-B1C -CP
C4327	08S45677W05	CAP,CER.3R0C-CH1H-CP
C4328	08T55390W17	CAP,PF 103J-1H -R5
C4330	08S45676W85	CAP,CER 104K-B1C -CP
C4331	08S45676W85	CAP,CER 104K-B1C -CP
C4332	08S45676W85	CAP,CER 104K-B1C -CP
C4336	08S45676W80	CAP,CER 223K-B1E -CP
C4341	08S45676W73	CAP,CER.103K-B1H -CP
C4342	08S45676W73	CAP,CER.103K-B1H -CP
C4343	08S45676W73	CAP,CER.103K-B1H -CP
C4344	08S65670Y01	CAP,CER 106KX5R1C-CP
C4345	08S65670Y01	CAP,CER 106KX5R1C-CP
C4346	08S65670Y01	CAP,CER 106KX5R1C-CP
C4347	08S65670Y01	CAP,CER 106KX5R1C-CP
C4349	08S45677W36	CAP,CER.101J-CH1H-CP
C4351	08S45676W80	CAP,CER 223K-B1E -CP
C4352	08S45676W80	CAP,CER 223K-B1E -CP
C4353	08S45676W80	CAP,CER 223K-B1E -CP
C4359	08S45676W80	CAP,CER 223K-B1E -CP
C4364	08S45676W80	CAP,CER 223K-B1E -CP
C4365	08S45676W80	CAP,CER 223K-B1E -CP
C4366	08S35374W11	CAP,CER 475K-B0J -CP
C4367	08S35374W11	CAP,CER 475K-B0J -CP
C4368	08S35374W11	CAP,CER 475K-B0J -CP
C4370	08S60102F48	CAP,CER 105K-B1E -CP
C4371	08S45676W85	CAP,CER 104K-B1C -CP
C4372	08S45676W80	CAP,CER 223K-B1E -CP
C4373	08S45676W80	CAP,CER 223K-B1E -CP
C4374	08S65670Y01	CAP,CER 106KX5R1C-CP
C4375	08S45676W80	CAP,CER 223K-B1E -CP
C4376	08S65670Y01	CAP,CER 106KX5R1C-CP
C4377	08S65670Y01	CAP,CER 106KX5R1C-CP
C4378	08S65670Y01	CAP,CER 106KX5R1C-CP
C4380	08S45676W80	CAP,CER 223K-B1E -CP
C4382	08S65670Y01	CAP,CER 106KX5R1C-CP
C4397	08S45676W85	CAP,CER 104K-B1C -CP

C4398	08S45676W80	CAP,CER 223K-B1E -CP
C4399	08S35349Y16	CAP,CER 105K-B1A -CP
C4403	08S45677W28	CAP,CER 47RJ-CH1H-CP
C4404	08S45677W28	CAP,CER 47RJ-CH1H-CP
C4405	08S45677W28	CAP,CER 47RJ-CH1H-CP
C4900	08S45676W80	CAP,CER 223K-B1E -CP
C4901	08S45676W85	CAP,CER 104K-B1C -CP
C4902	08S60102F48	CAP,CER 105K-B1E -CP
C4905	08S45677W38	CAP,CER 121J-CH1H-CP
C4907	08S45676W80	CAP,CER 223K-B1E -CP
C4908	08S45676W80	CAP,CER 223K-B1E -CP
C4909	08S45676W85	CAP,CER 104K-B1C -CP
C4910	08S45676W80	CAP,CER 223K-B1E -CP
C4911	08S45676W80	CAP,CER 223K-B1E -CP
C4912	08S65670Y01	CAP,CER 106KX5R1C-CP
C4913	08S65670Y01	CAP,CER 106KX5R1C-CP
C4914	08S45676W80	CAP,CER 223K-B1E -CP
C4915	08S45676W80	CAP,CER 223K-B1E -CP
C4916	08S65670Y01	CAP,CER 106KX5R1C-CP
C4917	08S45676W73	CAP,CER.103K-B1H -CP
C4918	08S45676W85	CAP,CER 104K-B1C -CP
C4919	08S45676W73	CAP,CER.103K-B1H -CP
C4920	08S45676W85	CAP,CER 104K-B1C -CP
C5032	08S45677W14	CAP,CER.12RJ-CH1H-CP
C5033	08S45677W14	CAP,CER.12RJ-CH1H-CP
C5300	08S45676W80	CAP,CER 223K-B1E -CP
C5301	08S35374W11	CAP,CER 475K-B0J -CP
C5302	08S45676W73	CAP,CER.103K-B1H -CP
C5303	08S45676W73	CAP,CER.103K-B1H -CP
C5304	08S45676W85	CAP,CER 104K-B1C -CP
C5305	08S45676W73	CAP,CER.103K-B1H -CP
C5306	08S45677W60	CAP,CER 102J-CH1H-CP
C5307	08S45677W60	CAP,CER 102J-CH1H-CP
C5308	08S45676W83	CAP,CER 473K-B1C -CP
C5311	08S45677W60	CAP,CER 102J-CH1H-CP
C5401	08S45676W80	CAP,CER 223K-B1E -CP
C6301	08S45676W85	CAP,CER 104K-B1C -CP
C6302	08S45676W65	CAP,CER.222K-B1H -CP
C6303	08S65670Y01	CAP,CER 106KX5R1C-CP
C6304	08S45676W85	CAP,CER 104K-B1C -CP
C6305	08S65670Y01	CAP,CER 106KX5R1C-CP
C6306	08S45676W73	CAP,CER.103K-B1H -CP
C6307	08S45676W80	CAP,CER 223K-B1E -CP
C6311	08S65670Y01	CAP,CER 106KX5R1C-CP
C6312	08S65670Y01	CAP,CER 106KX5R1C-CP
C6313	08S65670Y01	CAP,CER 106KX5R1C-CP
C6314	08S60102F48	CAP,CER 105K-B1E -CP
C6320	08S45677W18	CAP,CER.18RJ-CH1H-CP
C6321	08S45677W18	CAP,CER.18RJ-CH1H-CP
C6322	08S45677W18	CAP,CER.18RJ-CH1H-CP
C6345	08T65555Y01	CAP,CER 226K-BJ0J-CP
C6346	08T65555Y01	CAP,CER 226K-BJ0J-CP
C6347	08T65555Y01	CAP,CER 226K-BJ0J-CP
C6348	08T65555Y01	CAP,CER 226K-BJ0J-CP
C6349	08T65555Y01	CAP,CER 226K-BJ0J-CP
C6350	08T65555Y01	CAP,CER 226K-BJ0J-CP
C6351	08S45676W80	CAP,CER 223K-B1E -CP

C7006	08S45676W65	CAP,CER.222K-B1H -CP
C7007	08S45676W65	CAP,CER.222K-B1H -CP
C7008	08S35350Y05	CAP,CER 105K-B1A -CP
C7009	08S45676W65	CAP,CER.222K-B1H -CP
C7010	08S45676W80	CAP,CER 223K-B1E -CP
C7011	08S45677W60	CAP,CER 102J-CH1H-CP
C7012	08T81833F13	CAP,CER 106K-B1C -CP
C7013	08S45677W60	CAP,CER 102J-CH1H-CP
C7014	08S35350Y05	CAP,CER 105K-B1A -CP
C7015	08S45677W60	CAP,CER 102J-CH1H-CP
C7016	08T65463Y01	CAP,CER 335K-B1A -CP
C7017	08T65463Y01	CAP,CER 335K-B1A -CP
C7018	08S45677W52	CAP,CER 471J-CH1H-CP
C7019	08S45677W52	CAP,CER 471J-CH1H-CP
C7020	08S45677W38	CAP,CER 121J-CH1H-CP
C7021	08S45677W38	CAP,CER 121J-CH1H-CP
C7022	08S45677W44	CAP,CER.221J-CH1H-CP
C7023	08S45677W44	CAP,CER.221J-CH1H-CP
C7024	08S45677W16	CAP,CER.15RJ-CH1H-CP
C7025	08S45677W16	CAP,CER.15RJ-CH1H-CP
C7026	08S45676W80	CAP,CER 223K-B1E -CP
C7027	08S45676W80	CAP,CER 223K-B1E -CP
C7028	08T81833F13	CAP,CER 106K-B1C -CP
C7029	08T81833F13	CAP,CER 106K-B1C -CP
C7030	08T81833F13	CAP,CER 106K-B1C -CP
C7031	08S45676W80	CAP,CER 223K-B1E -CP
C7032	08T81833F13	CAP,CER 106K-B1C -CP
C7033	08S45676W65	CAP,CER.222K-B1H -CP
C7034	08S45676W65	CAP,CER.222K-B1H -CP
C7035	08S35349Y16	CAP,CER 105K-B1A -CP
C7036	08T81833F12	CAP,CER 106K-B1A -CP
C7037	08T81833F12	CAP,CER 106K-B1A -CP
C7038	08T81833F10	CAP,CER 106K-B0J -CP
C7039	08S45676W85	CAP,CER 104K-B1C -CP
CB6301	09T03498K03	WTB,53253-0310 -DB
CB6304	09T45391Y50	FFC,IMSA9632S-50Y-EQ
CB7001	09T45507Y45	FFC,IMSA9631S-45Y-EQ
CB7002	09T45507Y24	FFC,IMSA9631S-24Y-ED
CB7006	09T45507Y30	FFC,IMSA9631S-30Y-ED
CB7007	09T45507Y14	FFC,IMSA9631S-14Y-E9
CB7008	09T45507Y50	FFC,IMSA9631S-50Y-EQ
CB7009	09T03498K07	WTB,53253-0710 -DB
CH6301	09-05504Z01	ASSY,OPT WIRE W100
D2510	48T25651W01	DIO,CP MA152WA
D5301	48T45701Y01	DIO,MA2S728-TX -CP
D5302	48T45701Y01	DIO,MA2S728-TX -CP
D5401	48T25665Y01	DIO,1SS355-TE17 -CP
D6301	48T45254W03	DIO,SI-MA142WK -CP
E2510	23S45639Y08	CAP,ELY 22R-1C -R2
E2511	23S45639Y08	CAP,ELY 22R-1C -R2
E2601	23S45639Y08	CAP,ELY 22R-1C -R2
E2602	23S45639Y08	CAP,ELY 22R-1C -R2
E4001	23S45639Y07	CAP,ELY 10R-1C -R2
E4002	23S45639Y08	CAP,ELY 22R-1C -R2
E4003	23S45639Y07	CAP,ELY 10R-1C -R2
E4004	23S45639Y07	CAP,ELY 10R-1C -R2
E4005	23S45639Y07	CAP,ELY 10R-1C -R2

	E4006	23S45639Y07	CAP,ELY 10R-1C -R2
	E4007	23S95415W02	CAP,ELY 471-1A -R2
	E4008	23S45639Y07	CAP,ELY 10R-1C -R2
	E4009	23S82372F08	CAP,ELY.10R-1C-BP-R2
	E4010	23S45639Y23	CAP,ELY 2R2-1H -R2
	E4011	23S45639Y07	CAP,ELY 10R-1C -R2
	E4012	23S45639Y23	CAP,ELY 2R2-1H -R2
	E4013	23S65134W31	CAP,ELY 10R-1C(4)-E2
	E4014	23S45639Y08	CAP,ELY 22R-1C -R2
	E4015	23S45639Y13	CAP,ELY 4R7-1V -R2
	E4301	23S45639Y10	CAP,ELY 101-1C -R2
	E4302	23S45639Y09	CAP,ELY 47R-1C -R2
	E4304	23S45639Y09	CAP,ELY 47R-1C -R2
	E4305	23S45639Y11	CAP,ELY 33R-1E -R2
	E5300	23S45639Y03	CAP,ELY 331-0J -R2
	E6301	23S65134W31	CAP,ELY 10R-1C(4)-E2
	E6302	23T55378W03	CAP,KMG 471-1A -R2
	E6303	23S45639Y10	CAP,ELY 101-1C -R2
	F6301	65T35516Y06	FUSE,TF16N 1.00A -CP
	IC2500	51T25576W07	NJM4580V-TE2 -SE2
	IC2650	51T15647Y01	NJM4558V-TE2 -SE2
	IC3304	51T25259Y03	BA00ASFP-E2 -NE5
	IC3305	51T75197W07	AN77L07M-E1 -NE2
	IC3309	51T25259Y03	BA00ASFP-E2 -NE5
	IC3310	51T25259Y03	BA00ASFP-E2 -NE5
	IC4001	51T15567Y01	NJM2535V-TE2 -SE2
	IC4002	51-04557Z01	CXA2089Q -QT
	IC4301	51T25404Y02	TC7W53FU-TE12L -SE1
	IC4302	51T65666Y02	NJM2880U33-TE1 -NE2
	IC4303	51T15567Y01	NJM2535V-TE2 -SE2
	IC4304	51T35360Y01	TC7WH08FU-L -SE1
	IC4305	51-02431Z01	RB5P0090M -QT
	IC4307	51T25238Y02	TC7SH32FU-TE85L -CP
	IC4312	51T65562Y04	LC74735NWH-8A05-E-QT
#1	IC4314	53-05431Z86	OFL,V1.000RAAL502A_R
$1	IC4314	53-05431Z90	OFL,V1.000RAAP603A_R
%1	IC4314	53-05431Z92	OFL,V1.000RAAP604A_R
&1	IC4314	53-05431Z94	OFL,V1.000RAAC602A_R
	IC4322	51T25183Y02	TC7SET08FU-EL -CP
	IC4900	51T15523Y01	TLC2932 -SE5
	IC4901	51T35464Y01	TC74VHC4040FT-EL-SE5
	IC4902	51T15191Y01	TC74VHC08FT-EL -SE5
	IC4903	51T15206Y01	TC7WH04FU-TE12L -SE1
	IC4905	51T25473Y01	TC7S32FU-TE85L -CP
	IC4906	51T65414Y02	NJM2871F03-TE1 -CP
	IC4909	51T15763Y01	TC7W74FU-TE12L -SE1
#1	IC5301	53-07407Z78	OFL,V1.00RAAL502A_F
$1	IC5301	53-07407Z79	OFL,V1.00RAAP603A_F
%1	IC5301	53-07407Z80	OFL,V1.00RAAP604A_F
&1	IC5301	53-07407Z81	OFL,V1.00RAAC602A_F
	IC5302	51T75063Y02	BD5224G-TR -CP
	IC5303	51T25183Y02	TC7SET08FU-EL -CP
	IC5401	51-00982Z01	TC74VHCT14AFT-EL-SE5
	IC6301	51T25183Y02	TC7SET08FU-EL -CP
	IC6302	51T93532F05	TC4S01F-TE85L -CP
	IC6303	51T25183Y02	TC7SET08FU-EL -CP
	IC7001	51T55240Y01	PCM1742KE -SE2

IC7005	51T25576W07	NJM4580V-TE2 -SE2
L4305	24T25164Y25	IND,FSLM2520 10RJ-CP
L4306	24T95456W12	FBI,BLM18AG102SH1-CP
L4307	24T95456W12	FBI,BLM18AG102SH1-CP
L4900	24T95456W12	FBI,BLM18AG102SH1-CP
L4901	24T95456W12	FBI,BLM18AG102SH1-CP
L4904	06S55366Y39	RES,RK JUMPER1/10-CP
L7001	24T65689Y01	FBI,FBMJ2125HS420-CP
L7002	24T65689Y01	FBI,FBMJ2125HS420-CP
L7003	24T95456W27	FBI,BLM18PG181SH1-CP
L7004	24T95456W27	FBI,BLM18PG181SH1-CP
L7005	24T95456W12	FBI,BLM18AG102SH1-CP
L7006	24T95456W12	FBI,BLM18AG102SH1-CP
LD3301	48T65205Y05	LED,BLU SML311BBT-CP
Q2510	48T25317Y01	TR,XN0F256-TX -CP
Q2511	48T64222F02	TR ,UN2212 22-22 -TX
Q3306	48T75011W01	TR,2SD1782K-PQR-6-CP
Q3307	48T45594W12	TR ,XN1A312 -TX-CP
Q3308	48T45594W12	TR ,XN1A312 -TX-CP
Q3309	48T63419F04	TR,CP.2SA1036K-HR-96
Q3310	48T63419F04	TR,CP.2SA1036K-HR-96
Q3311	48T94606F02	TR,DTC114YUA-T106-CP
Q3312	48T64222F11	TR,UN221F-TX -CP
Q3313	48T94606F02	TR,DTC114YUA-T106-CP
Q4001	48T52437F01	TR ,2SB709A-QR/TX-CP
Q4002	48T52438F01	TR ,2SD601A-RS/TX-CP
Q4003	48T52438F01	TR ,2SD601A-RS/TX-CP
Q4303	48T94581F01	TR,2SA1576A-T106 -CP
Q4304	48T64221F02	TR ,UN2112 22-22 -TX
Q4307	48T94606F05	TR,DTC114TUA-T106-CP
Q4315	48T45594W12	TR ,XN1A312 -TX-CP
Q5401	48T45251W08	TR,UN521L-TX -CP
Q6301	48T45251W06	TR ,UN5211 10-10 -CP
Q6302	48T94581F01	TR,2SA1576A-T106 -CP
Q6304	48T94582F01	TR ,CP 2SC4081-Q
Q6305	48T94582F01	TR ,CP 2SC4081-Q
Q6306	48T94582F01	TR ,CP 2SC4081-Q
Q6307	48T94582F01	TR ,CP 2SC4081-Q
Q6309	48T94581F01	TR,2SA1576A-T106 -CP
Q6310	48T94581F01	TR,2SA1576A-T106 -CP
Q6311	48T94581F01	TR,2SA1576A-T106 -CP
Q6312	48T94581F01	TR,2SA1576A-T106 -CP
Q6314	48T94582F01	TR ,CP 2SC4081-Q
Q6315	48T94582F01	TR ,CP 2SC4081-Q
Q6316	48T94582F01	TR ,CP 2SC4081-Q
Q6317	48T94582F01	TR ,CP 2SC4081-Q
Q6318	48T75205Y01	TR,FMC2A-T148 -CP
Q6319	48T75205Y01	TR,FMC2A-T148 -CP
Q7001	48T63420F04	TR,2SA1037AK-S146-CP
Q7002	48T63420F04	TR,2SA1037AK-S146-CP
R1031	06S55361Y65	RES,RK 102J 1/4 -CP
R1032	06S55361Y65	RES,RK 102J 1/4 -CP
R1033	06S55361Y65	RES,RK 102J 1/4 -CP
R2508	06S55366Y06	RES,RK 473J 1/10 -CP
R2509	06S55361Y89	RES,RK 103J 1/4 -CP
R2510	06S55365Y85	RES,RK 682J 1/10 -CP
R2511	06S55365Y85	RES,RK 682J 1/10 -CP

R2512	06S15593Y81	RES,RK 223F 1/10 -CP
R2513	06S55366Y05	RES,RK 433J 1/10 -CP
R2514	06S55366Y05	RES,RK 433J 1/10 -CP
R2515	06S15593Y81	RES,RK 223F 1/10 -CP
R2516	06S55363Y47	RES,RK 181J 1/8 -CP
R2517	06S15593Y81	RES,RK 223F 1/10 -CP
R2518	06S15593Y81	RES,RK 223F 1/10 -CP
R2519	06S55363Y47	RES,RK 181J 1/8 -CP
R2520	06S15593Y81	RES,RK 223F 1/10 -CP
R2521	06S15593Y81	RES,RK 223F 1/10 -CP
R2522	06S15593Y81	RES,RK 223F 1/10 -CP
R2523	06S15593Y81	RES,RK 223F 1/10 -CP
R2524	06S55361Y41	RES,RK 101J 1/4 -CP
R2525	06S55361Y41	RES,RK 101J 1/4 -CP
R2551	06S55361Y30	RES,RK 36RJ 1/4 -CP
R2552	06S55361Y31	RES,RK 39RJ 1/4 -CP
R2601	06S55365Y85	RES,RK 682J 1/10 -CP
R2602	06S55365Y85	RES,RK 682J 1/10 -CP
R2603	06S15593Y81	RES,RK 223F 1/10 -CP
R2604	06S15593Y79	RES,RK 183F 1/10 -CP
R2605	06S15593Y81	RES,RK 223F 1/10 -CP
R2606	06S15593Y97	RES,RK 104F 1/10 -CP
R2607	06S15593Y81	RES,RK 223F 1/10 -CP
R2608	06S15593Y81	RES,RK 223F 1/10 -CP
R3301	06S55365Y81	RES,RK 472J 1/10 -CP
R3302	06S55365Y98	RES,RK 243J 1/10 -CP
R3303	06S15593Y47	RES,RK 821F 1/10 -CP
R3304	06S55361Y52	RES,RK 301J 1/4 -CP
R3305	06S55365Y98	RES,RK 243J 1/10 -CP
R3306	06S15593Y47	RES,RK 821F 1/10 -CP
R3315	06S15593Y73	RES,RK 103F 1/10 -CP
R3316	06S15593Y34	RES,RK 241F 1/10 -CP
R3317	06S15593Y60	RES,RK 302F 1/10 -CP
R3331	06S15593Y73	RES,RK 103F 1/10 -CP
R3332	06S15593Y34	RES,RK 241F 1/10 -CP
R3333	06S15593Y60	RES,RK 302F 1/10 -CP
R3334	06S15593Y79	RES,RK 183F 1/10 -CP
R3335	06S15593Y61	RES,RK 332F 1/10 -CP
R3337	06S55365Y97	RES,RK 223J 1/10 -CP
R3338	06S55365Y97	RES,RK 223J 1/10 -CP
R3344	06S55366Y39	RES,RK JUMPER1/10-CP
R3346	06S55366Y39	RES,RK JUMPER1/10-CP
R3350	06S15593Y69	RES,RK 682F 1/10 -CP
R4000	06S55366Y39	RES,RK JUMPER1/10-CP
R4001	06S55366Y38	RES,RK 105J 1/10 -CP
R4002	06S55366Y38	RES,RK 105J 1/10 -CP
R4003	06S55366Y38	RES,RK 105J 1/10 -CP
R4004	06S55365Y39	RES,RK 82RJ 1/10 -CP
R4005	06S55365Y38	RES,RK 75RJ 1/10 -CP
R4006	06S55366Y39	RES,RK JUMPER1/10-CP
R4007	06S55366Y39	RES,RK JUMPER1/10-CP
R4008	06S55365Y41	RES,RK 101J 1/10 -CP
R4009	06S55365Y41	RES,RK 101J 1/10 -CP
R4010	06S55365Y41	RES,RK 101J 1/10 -CP
R4011	06S55365Y41	RES,RK 101J 1/10 -CP
R4012	06S55365Y65	RES,RK 102J 1/10 -CP
R4013	06S55365Y65	RES,RK 102J 1/10 -CP

R4014	06S55365Y41	RES,RK 101J 1/10 -CP
R4022	06S55362Y39	RES,RK JUMPER 1/4-CP
R4026	06S55361Y30	RES,RK 36RJ 1/4 -CP
R4028	06S55361Y31	RES,RK 39RJ 1/4 -CP
R4029	06S55366Y39	RES,RK JUMPER1/10-CP
R4030	06S55366Y39	RES,RK JUMPER1/10-CP
R4038	06S55365Y41	RES,RK 101J 1/10 -CP
R4039	06S55361Y51	RES,RK 271J 1/4 -CP
R4301	06S55365Y67	RES,RK 122J 1/10 -CP
R4302	06S55365Y65	RES,RK 102J 1/10 -CP
R4303	06S55366Y38	RES,RK 105J 1/10 -CP
R4304	06S55366Y38	RES,RK 105J 1/10 -CP
R4305	06S55365Y59	RES,RK 561J 1/10 -CP
R4306	06S55365Y51	RES,RK 271J 1/10 -CP
R4307	06S55366Y38	RES,RK 105J 1/10 -CP
R4308	06S55365Y65	RES,RK 102J 1/10 -CP
R4309	06S55366Y38	RES,RK 105J 1/10 -CP
R4311	06S55365Y59	RES,RK 561J 1/10 -CP
R4312	06S55365Y97	RES,RK 223J 1/10 -CP
R4313	06S55365Y71	RES,RK 182J 1/10 -CP
R4314	06S55365Y89	RES,RK 103J 1/10 -CP
R4315	06S55366Y38	RES,RK 105J 1/10 -CP
R4316	06S55365Y89	RES,RK 103J 1/10 -CP
R4317	06S55365Y89	RES,RK 103J 1/10 -CP
R4318	06S55365Y41	RES,RK 101J 1/10 -CP
R4319	06S55365Y58	RES,RK 511J 1/10 -CP
R4320	06S15593Y50	RES,RK 112F 1/10 -CP
R4321	06S15593Y51	RES,RK 122F 1/10 -CP
R4322	06S55365Y83	RES,RK 562J 1/10 -CP
R4323	06S55365Y87	RES,RK 822J 1/10 -CP
R4324	06S55365Y41	RES,RK 101J 1/10 -CP
R4325	06S55365Y41	RES,RK 101J 1/10 -CP
R4326	06S55365Y41	RES,RK 101J 1/10 -CP
R4327	06S55365Y65	RES,RK 102J 1/10 -CP
R4328	06S55366Y39	RES,RK JUMPER1/10-CP
R4329	06S15615Y25	RES,RK 101J 1/16 -CP
R4330	06S15615Y25	RES,RK 101J 1/16 -CP
R4334	06S55365Y81	RES,RK 472J 1/10 -CP
R4335	06S55365Y41	RES,RK 101J 1/10 -CP
R4336	06S55365Y41	RES,RK 101J 1/10 -CP
R4337	06S55365Y41	RES,RK 101J 1/10 -CP
R4339	06S55366Y39	RES,RK JUMPER1/10-CP
R4340	06S55366Y39	RES,RK JUMPER1/10-CP
R4341	06S55366Y39	RES,RK JUMPER1/10-CP
R4343	06S15593Y79	RES,RK 183F 1/10 -CP
R4344	06S55366Y39	RES,RK JUMPER1/10-CP
R4345	06S55366Y39	RES,RK JUMPER1/10-CP
R4346	06S55365Y41	RES,RK 101J 1/10 -CP
R4347	06S55366Y39	RES,RK JUMPER1/10-CP
R4348	06S55366Y39	RES,RK JUMPER1/10-CP
R4349	06S55366Y39	RES,RK JUMPER1/10-CP
R4350	06S55362Y39	RES,RK JUMPER 1/4-CP
R4351	06S55365Y29	RES,RK 33RJ 1/10 -CP
R4356	06S55365Y89	RES,RK 103J 1/10 -CP
R4358	06S55365Y41	RES,RK 101J 1/10 -CP
R4359	06S55365Y41	RES,RK 101J 1/10 -CP
R4360	06S55365Y41	RES,RK 101J 1/10 -CP

	R4367	06S55365Y41	RES,RK 101J 1/10 -CP
	R4370	06S55365Y49	RES,RK 221J 1/10 -CP
	R4371	06S55365Y49	RES,RK 221J 1/10 -CP
	R4372	06S55365Y49	RES,RK 221J 1/10 -CP
	R4373	06S55365Y74	RES,RK 242J 1/10 -CP
	R4374	06S55366Y39	RES,RK JUMPER1/10-CP
	R4375	06S55366Y39	RES,RK JUMPER1/10-CP
	R4376	06S55366Y39	RES,RK JUMPER1/10-CP
	R4381	06S55366Y06	RES,RK 473J 1/10 -CP
	R4387	06S55365Y41	RES,RK 101J 1/10 -CP
	R4900	06S15593Y58	RES,RK 242F 1/10 -CP
	R4901	06S15593Y46	RES,RK 751F 1/10 -CP
	R4902	06S15593Y33	RES,RK 221F 1/10 -CP
	R4904	06S55366Y39	RES,RK JUMPER1/10-CP
	R4905	06S15615Y25	RES,RK 101J 1/16 -CP
	R4906	06S15615Y25	RES,RK 101J 1/16 -CP
	R4907	06S15615Y25	RES,RK 101J 1/16 -CP
	R4908	06S15615Y25	RES,RK 101J 1/16 -CP
	R4909	06S15615Y25	RES,RK 101J 1/16 -CP
	R4910	06S15615Y25	RES,RK 101J 1/16 -CP
	R4911	06S15615Y25	RES,RK 101J 1/16 -CP
	R4913	06S15615Y25	RES,RK 101J 1/16 -CP
	R4916	06S15615Y25	RES,RK 101J 1/16 -CP
	R4917	06S15615Y25	RES,RK 101J 1/16 -CP
	R4918	06S15615Y25	RES,RK 101J 1/16 -CP
	R5305	06S55366Y39	RES,RK JUMPER1/10-CP
	R5306	06S55365Y97	RES,RK 223J 1/10 -CP
	R5307	06S45674W33	RES,RK 101J 1/10 -CP
	R5308	06S55366Y14	RES,RK 104J 1/10 -CP
%1	R5309	06S55365Y89	RES,RK 103J 1/10 -CP
&1	R5309	06S55365Y89	RES,RK 103J 1/10 -CP
#1	R5310	06S55365Y89	RES,RK 103J 1/10 -CP
$1	R5310	06S55365Y89	RES,RK 103J 1/10 -CP
$1	R5311	06S55365Y89	RES,RK 103J 1/10 -CP
&1	R5311	06S55365Y89	RES,RK 103J 1/10 -CP
#1	R5312	06S55365Y89	RES,RK 103J 1/10 -CP
%1	R5312	06S55365Y89	RES,RK 103J 1/10 -CP
	R5313	06S15593Y77	RES,RK 153F 1/10 -CP
	R5314	06S55365Y41	RES,RK 101J 1/10 -CP
	R5315	06S55366Y06	RES,RK 473J 1/10 -CP
	R5316	06S55365Y41	RES,RK 101J 1/10 -CP
	R5317	06S55365Y41	RES,RK 101J 1/10 -CP
	R5318	06S55365Y41	RES,RK 101J 1/10 -CP
	R5319	06S15593Y81	RES,RK 223F 1/10 -CP
	R5320	06S55365Y41	RES,RK 101J 1/10 -CP
	R5321	06S55365Y41	RES,RK 101J 1/10 -CP
	R5322	06S55366Y39	RES,RK JUMPER1/10-CP
	R5323	06S55365Y41	RES,RK 101J 1/10 -CP
	R5324	06S55365Y41	RES,RK 101J 1/10 -CP
	R5325	06S15593Y49	RES,RK 102F 1/10 -CP
	R5326	06S55366Y14	RES,RK 104J 1/10 -CP
	R5327	06S55365Y41	RES,RK 101J 1/10 -CP
	R5328	06S45674W33	RES,RK 101J 1/10 -CP
	R5329	06S45674W33	RES,RK 101J 1/10 -CP
	R5330	06S45674W33	RES,RK 101J 1/10 -CP
	R5336	06S15593Y63	RES,RK 392F 1/10 -CP
	R5337	06S15593Y81	RES,RK 223F 1/10 -CP

R5338	06S55365Y65	RES,RK 102J 1/10 -CP
R5339	06S55365Y97	RES,RK 223J 1/10 -CP
R5340	06S55365Y41	RES,RK 101J 1/10 -CP
R5341	06S55365Y85	RES,RK 682J 1/10 -CP
R5342	06S55365Y85	RES,RK 682J 1/10 -CP
R5343	06S55365Y89	RES,RK 103J 1/10 -CP
R5344	06S55365Y89	RES,RK 103J 1/10 -CP
R5345	06S15593Y73	RES,RK 103F 1/10 -CP
R5346	06S55365Y41	RES,RK 101J 1/10 -CP
R5347	06S55365Y41	RES,RK 101J 1/10 -CP
R5348	06S55361Y75	RES,RK 272J 1/4 -CP
R5349	06S55365Y41	RES,RK 101J 1/10 -CP
R5350	06S55365Y65	RES,RK 102J 1/10 -CP
R5351	06S55365Y65	RES,RK 102J 1/10 -CP
R5352	06S55365Y65	RES,RK 102J 1/10 -CP
R5401	06S55366Y06	RES,RK 473J 1/10 -CP
R5402	06S55366Y39	RES,RK JUMPER1/10-CP
R5403	06S55361Y33	RES,RK 47RJ 1/4 -CP
R5404	06S55361Y89	RES,RK 103J 1/4 -CP
R5405	06S55361Y33	RES,RK 47RJ 1/4 -CP
R5406	06S55361Y73	RES,RK 222J 1/4 -CP
R5501	06S55366Y06	RES,RK 473J 1/10 -CP
R5502	06S55365Y41	RES,RK 101J 1/10 -CP
R5503	06S55365Y41	RES,RK 101J 1/10 -CP
R5504	06S55365Y86	RES,RK 752J 1/10 -CP
R6205	06S55361Y65	RES,RK 102J 1/4 -CP
R6206	06S55361Y65	RES,RK 102J 1/4 -CP
R6207	06S55361Y65	RES,RK 102J 1/4 -CP
R6301	06S55361Y29	RES,RK 33RJ 1/4 -CP
R6304	06S55365Y97	RES,RK 223J 1/10 -CP
R6305	06S55366Y31	RES,RK 514J 1/10 -CP
R6306	06S55365Y77	RES,RK 332J 1/10 -CP
R6307	06S55365Y65	RES,RK 102J 1/10 -CP
R6308	06S55365Y73	RES,RK 222J 1/10 -CP
R6309	06S55365Y97	RES,RK 223J 1/10 -CP
R6310	06S55366Y30	RES,RK 474J 1/10 -CP
R6313	06S55361Y30	RES,RK 36RJ 1/4 -CP
R6314	06S55361Y31	RES,RK 39RJ 1/4 -CP
R6315	06S55361Y30	RES,RK 36RJ 1/4 -CP
R6316	06S55361Y31	RES,RK 39RJ 1/4 -CP
R6317	06S55361Y30	RES,RK 36RJ 1/4 -CP
R6318	06S55361Y31	RES,RK 39RJ 1/4 -CP
R6322	06S15593Y89	RES,RK 473F 1/10 -CP
R6323	06S15593Y89	RES,RK 473F 1/10 -CP
R6324	06S15593Y89	RES,RK 473F 1/10 -CP
R6327	06S15593Y81	RES,RK 223F 1/10 -CP
R6328	06S15593Y79	RES,RK 183F 1/10 -CP
R6329	06S15593Y81	RES,RK 223F 1/10 -CP
R6330	06S15593Y79	RES,RK 183F 1/10 -CP
R6331	06S15593Y81	RES,RK 223F 1/10 -CP
R6332	06S15593Y79	RES,RK 183F 1/10 -CP
R6333	06S15593Y85	RES,RK 333F 1/10 -CP
R6334	06S15593Y91	RES,RK 563F 1/10 -CP
R6341	06S15593Y41	RES,RK 471F 1/10 -CP
R6342	06S15593Y47	RES,RK 821F 1/10 -CP
R6343	06S15593Y41	RES,RK 471F 1/10 -CP
R6344	06S15593Y47	RES,RK 821F 1/10 -CP

R6345	06S15593Y41	RES,RK 471F 1/10 -CP
R6346	06S15593Y47	RES,RK 821F 1/10 -CP
R6347	06S15593Y53	RES,RK 152F 1/10 -CP
R6348	06S15593Y55	RES,RK 182F 1/10 -CP
R6350	06S15594Y04	RES,RK 184F 1/10 -CP
R6351	06S15594Y04	RES,RK 184F 1/10 -CP
R6352	06S15594Y04	RES,RK 184F 1/10 -CP
R6355	06S15593Y42	RES,RK 511F 1/10 -CP
R6356	06S15593Y49	RES,RK 102F 1/10 -CP
R6357	06S15593Y42	RES,RK 511F 1/10 -CP
R6358	06S15593Y49	RES,RK 102F 1/10 -CP
R6359	06S15593Y42	RES,RK 511F 1/10 -CP
R6360	06S15593Y49	RES,RK 102F 1/10 -CP
R6361	06S15593Y51	RES,RK 122F 1/10 -CP
R6362	06S15593Y56	RES,RK 202F 1/10 -CP
R6364	06S15593Y25	RES,RK 101F 1/10 -CP
R6365	06S15593Y25	RES,RK 101F 1/10 -CP
R6366	06S15593Y25	RES,RK 101F 1/10 -CP
R6367	06S15593Y25	RES,RK 101F 1/10 -CP
R6369	06S15593Y53	RES,RK 152F 1/10 -CP
R6370	06S15593Y53	RES,RK 152F 1/10 -CP
R6371	06S15593Y53	RES,RK 152F 1/10 -CP
R6372	06S15593Y49	RES,RK 102F 1/10 -CP
R6416	06S55365Y65	RES,RK 102J 1/10 -CP
R6417	06S55362Y39	RES,RK JUMPER 1/4-CP
R6418	06S55365Y41	RES,RK 101J 1/10 -CP
R6419	06S15593Y25	RES,RK 101F 1/10 -CP
R6420	06S55365Y41	RES,RK 101J 1/10 -CP
R6421	06S55365Y41	RES,RK 101J 1/10 -CP
R7002	06S55362Y39	RES,RK JUMPER 1/4-CP
R7003	06S45674W17	RES,RK 22RJ 1/10 -CP
R7004	06S45674W17	RES,RK 22RJ 1/10 -CP
R7006	06S15593Y51	RES,RK 122F 1/10 -CP
R7007	06S15593Y51	RES,RK 122F 1/10 -CP
R7010	06S15593Y89	RES,RK 473F 1/10 -CP
R7011	06S15593Y89	RES,RK 473F 1/10 -CP
R7012	06S15593Y75	RES,RK 123F 1/10 -CP
R7013	06S15593Y75	RES,RK 123F 1/10 -CP
R7014	06S15593Y72	RES,RK 912F 1/10 -CP
R7015	06S15593Y72	RES,RK 912F 1/10 -CP
R7016	06S15593Y89	RES,RK 473F 1/10 -CP
R7017	06S15593Y89	RES,RK 473F 1/10 -CP
R7018	06S55365Y37	RES,RK 68RJ 1/10 -CP
R7019	06S15593Y53	RES,RK 152F 1/10 -CP
R7020	06S15593Y53	RES,RK 152F 1/10 -CP
R7021	06S15593Y17	RES,RK 47RF 1/10 -CP
R7022	06S15593Y17	RES,RK 47RF 1/10 -CP
R7023	06S15593Y69	RES,RK 682F 1/10 -CP
R7024	06S15593Y69	RES,RK 682F 1/10 -CP
R7025	06S15593Y69	RES,RK 682F 1/10 -CP
R7026	06S15593Y69	RES,RK 682F 1/10 -CP
R7027	06S55365Y29	RES,RK 33RJ 1/10 -CP
R7028	06S55365Y29	RES,RK 33RJ 1/10 -CP
R7029	06S55365Y29	RES,RK 33RJ 1/10 -CP
R7030	06S55365Y29	RES,RK 33RJ 1/10 -CP
R7031	06S55365Y29	RES,RK 33RJ 1/10 -CP
R7032	06S55361Y25	RES,RK 22RJ 1/4 -CP

R7033	06S55361Y25	RES,RK 22RJ 1/4 -CP
R7034	06S55361Y25	RES,RK 22RJ 1/4 -CP
R7035	06S55361Y25	RES,RK 22RJ 1/4 -CP
R7036	06S55365Y97	RES,RK 223J 1/10 -CP
R7037	06S45674W45	RES,RK 331J 1/10 -CP
R7038	06S45674W45	RES,RK 331J 1/10 -CP
R7039	06S45674W45	RES,RK 331J 1/10 -CP
R7040	06S45674W45	RES,RK 331J 1/10 -CP
R7042	06S55361Y25	RES,RK 22RJ 1/4 -CP
R7043	06S45674W97	RES,RK 473J 1/10 -CP
R7044	06S55366Y39	RES,RK JUMPER1/10-CP
RA4301	06S45591W07	RES,ARY MNR101J 4-CP
RA4302	06S45591W07	RES,ARY MNR101J 4-CP
RA4303	06S45591W07	RES,ARY MNR101J 4-CP
RA4304	06S45591W07	RES,ARY MNR101J 4-CP
RA4305	06S45591W07	RES,ARY MNR101J 4-CP
RA4306	06S45591W07	RES,ARY MNR101J 4-CP
RA4307	06S45591W07	RES,ARY MNR101J 4-CP
RA4308	06S45591W07	RES,ARY MNR101J 4-CP
RA5304	06S45591W07	RES,ARY MNR101J 4-CP
RA5305	06S45591W07	RES,ARY MNR101J 4-CP
RA5306	06S45591W07	RES,ARY MNR101J 4-CP
RA5307	06S45591W07	RES,ARY MNR101J 4-CP
RA5308	06S45591W07	RES,ARY MNR101J 4-CP
RA5309	06S45591W07	RES,ARY MNR101J 4-CP
RA5311	06S45591W07	RES,ARY MNR101J 4-CP
RA5312	06S45591W07	RES,ARY MNR101J 4-CP
SA301	48T25171Y02	VST,SA-C2012-101 -CP
SA302	48T25171Y02	VST,SA-C2012-101 -CP
SA303	48T25171Y02	VST,SA-C2012-101 -CP
TH5301	48T25250Y01	TMT,ERTJ1VV104J -CP
XL4301	91T35643Y01	XTL,DSX151GA 3.57-E9
XL4302	91T35643Y02	XTL,DSX151GA 4.43-E9
XL5031	91T55360Y07	XTL,AT-51 5.000M -R5
Z4301	91T45556Y06	EMI,NFM21HC102R1H-CP
Z4302	91T45556Y06	EMI,NFM21HC102R1H-CP
Z4303	91T45556Y06	EMI,NFM21HC102R1H-CP
Z4304	91T45556Y06	EMI,NFM21HC102R1H-CP
Z4900	91T45160Y01	EMI,CNH31R473S -CP
Z5303	91T65112W06	EMI,BK2125HM102 -CP
Z6302	91T45556Y06	EMI,NFM21HC102R1H-CP
Z6304	91T45556Y06	EMI,NFM21HC102R1H-CP
Z6305	91T15509Y08	EMI,BK1608HM102 -CP
Z6306	91T15509Y08	EMI,BK1608HM102 -CP
Z6307	91T15509Y08	EMI,BK1608HM102 -CP
Z7001	91T15509Y10	EMI,BK1608LL121 -CP
ZD1031	48T15541Y53	DIO,ZEN MAZS0560H-CP
ZD1032	48T15541Y53	DIO,ZEN MAZS0560H-CP
ZD1033	48T15541Y53	DIO,ZEN MAZS0560H-CP
ZD6201	48T15541Y51	DIO,ZEN MAZS0560L-CP
ZD6203	48T15541Y51	DIO,ZEN MAZS0560L-CP
ZD6204	48T15541Y53	DIO,ZEN MAZS0560H-CP

=======MAIN2 P.W.Board

C3100	08S45676W80	CAP,CER 223K-B1E -CP
C3101	08S65667Y01	CAP,CER 224KX5R1C-CP
C3103	08S45676W80	CAP,CER 223K-B1E -CP

C3104	08S45676W80	CAP,CER 223K-B1E -CP
C3105	08S45677W36	CAP,CER.101J-CH1H-CP
C3106	08S45676W85	CAP,CER 104K-B1C -CP
C3107	08S65667Y01	CAP,CER 224KX5R1C-CP
C3108	08S60102F44	CAP,CER 474K-B1E -CP
C3109	08S45676W85	CAP,CER 104K-B1C -CP
C3110	08S45676W85	CAP,CER 104K-B1C -CP
C3111	08S65667Y01	CAP,CER 224KX5R1C-CP
C3112	08S45676W85	CAP,CER 104K-B1C -CP
C3113	08S45676W85	CAP,CER 104K-B1C -CP
C3114	08S45676W85	CAP,CER 104K-B1C -CP
C3115	08S45676W85	CAP,CER 104K-B1C -CP
C3116	08S45676W73	CAP,CER.103K-B1H -CP
C3117	08S45676W85	CAP,CER 104K-B1C -CP
C3701	08S45676W73	CAP,CER.103K-B1H -CP
C3702	08S45676W85	CAP,CER 104K-B1C -CP
C3703	08S45677W60	CAP,CER 102J-CH1H-CP
C3704	08S45676W91	CAP,CER 154K-B1A -CP
C3706	08S45676W65	CAP,CER.222K-B1H -CP
C3707	08S45676W65	CAP,CER.222K-B1H -CP
C3708	08S35349Y17	CAP,CER 225K-B0J -CP
C3709	08S45676W73	CAP,CER.103K-B1H -CP
C3710	08S45676W85	CAP,CER 104K-B1C -CP
C3711	08S45677W60	CAP,CER 102J-CH1H-CP
C3712	08S45676W91	CAP,CER 154K-B1A -CP
C3714	08S65128F69	CAP,CER.103K-B1H -CP
C3715	08S45676W80	CAP,CER 223K-B1E -CP
C3716	08S65670Y01	CAP,CER 106KX5R1C-CP
C3717	08S65670Y01	CAP,CER 106KX5R1C-CP
C3718	08S65670Y01	CAP,CER 106KX5R1C-CP
C3719	08S65670Y01	CAP,CER 106KX5R1C-CP
C3720	08S45676W80	CAP,CER 223K-B1E -CP
C3721	08S45676W80	CAP,CER 223K-B1E -CP
C3722	08S45676W80	CAP,CER 223K-B1E -CP
C3723	08S45676W80	CAP,CER 223K-B1E -CP
C3724	08S45676W80	CAP,CER 223K-B1E -CP
C3725	08S45677W60	CAP,CER 102J-CH1H-CP
C3726	08S45677W60	CAP,CER 102J-CH1H-CP
C3727	08S45677W60	CAP,CER 102J-CH1H-CP
C3728	08S45677W60	CAP,CER 102J-CH1H-CP
C3729	08S45677W60	CAP,CER 102J-CH1H-CP
C3730	08S45677W44	CAP,CER.221J-CH1H-CP
C3731	08S45677W60	CAP,CER 102J-CH1H-CP
C3732	08S45677W44	CAP,CER.221J-CH1H-CP
C3733	08S45676W65	CAP,CER.222K-B1H -CP
C3734	08S45676W65	CAP,CER.222K-B1H -CP
C3735	08S35349Y17	CAP,CER 225K-B0J -CP
C3736	08S45676W80	CAP,CER 223K-B1E -CP
C3737	08S45676W80	CAP,CER 223K-B1E -CP
C3801	08S45676W85	CAP,CER 104K-B1C -CP
C3802	08S45676W85	CAP,CER 104K-B1C -CP
C3803	08S35350Y03	CAP,CER 224K-B1C -CP
C3804	08S45677W48	CAP,CER.331J-CH1H-CP
C3805	08S35349Y17	CAP,CER 225K-B0J -CP
C3806	08S45676W73	CAP,CER.103K-B1H -CP
C3807	08S45676W73	CAP,CER.103K-B1H -CP
C3808	08S45676W85	CAP,CER 104K-B1C -CP

C3810	08S45676W73	CAP,CER.103K-B1H -CP
C3811	08S45676W73	CAP,CER.103K-B1H -CP
C3812	08S65128F88	CAP,CER 104K-B1H -CP
C3813	08S45676W85	CAP,CER 104K-B1C -CP
C3814	08S35374W10	CAP,CER 225K-B1A -CP
C3815	08S45676W80	CAP,CER 223K-B1E -CP
C3817	08S45676W80	CAP,CER 223K-B1E -CP
C3818	08S45676W80	CAP,CER 223K-B1E -CP
C3819	08S65669Y01	CAP,CER 334KX7R1E-CP
C3820	08S45676W80	CAP,CER 223K-B1E -CP
C3821	08S45676W80	CAP,CER 223K-B1E -CP
CB2101	09T45507Y50	FFC,IMSA9631S-50Y-EQ
CB3203	09T45507Y20	FFC,IMSA9631S-20Y-E9
CB3701	09T45507Y14	FFC,IMSA9631S-14Y-E9
CB3702	09T03498K04	WTB,53253-0410 -DB
CB3703	09T03498K06	WTB,53253-0610 -DB
CB3704	09T25436Y08	WTB,53253-0810 -DB
CH3704	09-05503Z01	ASSY,BAT WIRE W100
D3100	48T25593Y01	DIO,S1G-6904 -E1
D3101	48T25593Y01	DIO,S1G-6904 -E1
D3701	48T25593Y01	DIO,S1G-6904 -E1
D3702	48T25593Y01	DIO,S1G-6904 -E1
E3100	23S65134W24	CAP,ELY 221-1A(8)-E6
E3101	23S65134W15	CAP,ELY 331-0J(8)-E6
E3103	23S65134W36	CAP,ELY 221-1C(8)-EA
E3104	23S65134W26	CAP,ELY 471-1A(8)-EA
E3105	23S65134W24	CAP,ELY 221-1A(8)-E6
E3106	23S65134W26	CAP,ELY 471-1A(8)-EA
E3107	23S65134W26	CAP,ELY 471-1A(8)-EA
E3108	23S65134W38	CAP,ELY 471-1C(1)-EA
E3701	23S75244Y20	CAP,ELY 221-1C -E6
E3702	23S75244Y22	CAP,ELY 471-1C -EA
E3703	23S65134W15	CAP,ELY 331-0J(8)-E6
E3704	23S65134W15	CAP,ELY 331-0J(8)-E6
E3705	23S65134W14	CAP,ELY 221-0J(8)-E6
E3706	23S75244Y20	CAP,ELY 221-1C -E6
E3707	23S75244Y22	CAP,ELY 471-1C -EA
E3802	23S65134W49	CAP,ELY 331-1E(1)-EA
E3803	23S65134W49	CAP,ELY 331-1E(1)-EA
E3804	23S75244Y19	CAP,ELY 101-1C -E6
IC3100	51T65147Y01	HA13165 -ZS
IC3101	51-05862Z01	NJM2845DL1-33-TE1NE5
IC3701	51-02921Z01	BD9778HFP -NEA
IC3702	51-02921Z01	BD9778HFP -NEA
IC3703	51T15206Y01	TC7WH04FU-TE12L -SE1
IC3704	51T35360Y01	TC7WH08FU-L -SE1
IC3706	51T25259Y03	BA00ASFP-E2 -NE5
IC3707	51-05862Z02	NJM2845DL1-25-TE1NE5
IC3708	51-05862Z01	NJM2845DL1-33-TE1NE5
IC3709	51-01521Z01	PQ015YZ01ZPH -NE5
IC3801	51T25449Y01	AN8018SA-E1 -SE2
IC3802	51-02322Z01	NJM2860F3-05-TE1 -CP
L3701	24T25565Y09	IND,SLF12565 68RM-EA
L3702	24T25565Y09	IND,SLF12565 68RM-EA
L3703	24T25565Y09	IND,SLF12565 68RM-EA
L3704	24T25565Y09	IND,SLF12565 68RM-EA
L3705	24T95456W12	FBI,BLM18AG102SH1-CP

L3801	24T95202W21	IND,CDRH64B 471M -E6
L3802	24T95202W19	IND,CDRH64B 331M -E6
Q3100	48T64222F12	TR,UN221L-TX -CP
Q3101	48T63419F04	TR,CP.2SA1036K-HR-96
Q3102	48T45594W16	TR,XN1A311-TX -CP
Q3103	48T94606F02	TR,DTC114YUA-T106-CP
Q3104	48T45594W12	TR ,XN1A312 -TX-CP
Q3105	48T45594W16	TR,XN1A311-TX -CP
Q3106	48T64222F02	TR ,UN2212 22-22 -TX
Q3701	48T45594W08	TR ,XN1212 -TX-CP
Q3702	48T45594W08	TR ,XN1212 -TX-CP
Q3703	48T25137Y02	TR,UN9212J-TX -CP
Q3704	48T25137Y02	TR,UN9212J-TX -CP
Q3801	48T62967F25	TR,DTC123JKA-T146-CP
Q3802	48T73022F01	TR ,2SB766A
Q3803	48T25137Y02	TR,UN9212J-TX -CP
Q3804	48T73022F01	TR ,2SB766A
Q3805	48T73023F01	TR ,2SD874A -E2
Q3806	48T45251W08	TR,UN521L-TX -CP
Q3807	48T45251W08	TR,UN521L-TX -CP
R3100	06S15593Y47	RES,RK 821F 1/10 -CP
R3101	06S15593Y61	RES,RK 332F 1/10 -CP
R3102	06S15593Y61	RES,RK 332F 1/10 -CP
R3103	06S55365Y98	RES,RK 243J 1/10 -CP
R3104	06S55362Y01	RES,RK 303J 1/4 -CP
R3105	06S55366Y06	RES,RK 473J 1/10 -CP
R3107	06S35083Y42	RES,RK 273F 1/4 -CP
R3108	06S35083Y45	RES,RK 473F 1/4 -CP
R3110	06S15593Y81	RES,RK 223F 1/10 -CP
R3111	06S15593Y73	RES,RK 103F 1/10 -CP
R3112	06S15593Y69	RES,RK 682F 1/10 -CP
R3719	06S15593Y72	RES,RK 912F 1/10 -CP
R3720	06S15593Y35	RES,RK 271F 1/10 -CP
R3721	06S15593Y59	RES,RK 272F 1/10 -CP
R3722	06S55361Y37	RES,RK 68RJ 1/4 -CP
R3723	06S55361Y30	RES,RK 36RJ 1/4 -CP
R3724	06S55361Y31	RES,RK 39RJ 1/4 -CP
R3725	06S15593Y99	RES,RK 124F 1/10 -CP
R3726	06S15594Y06	RES,RK 224F 1/10 -CP
R3727	06S15594Y14	RES,RK 474F 1/10 -CP
R3728	06S45674W33	RES,RK 101J 1/10 -CP
R3729	06S15593Y79	RES,RK 183F 1/10 -CP
R3730	06S15593Y62	RES,RK 362F 1/10 -CP
R3731	06S15593Y35	RES,RK 271F 1/10 -CP
R3732	06S45674W09	RES,RK 10RJ 1/10 -CP
R3733	06S45674W09	RES,RK 10RJ 1/10 -CP
R3734	06S15593Y99	RES,RK 124F 1/10 -CP
R3735	06S15594Y06	RES,RK 224F 1/10 -CP
R3736	06S15594Y14	RES,RK 474F 1/10 -CP
R3737	06S45674W33	RES,RK 101J 1/10 -CP
R3738	06S15593Y79	RES,RK 183F 1/10 -CP
R3739	06S15593Y61	RES,RK 332F 1/10 -CP
R3740	06S15593Y52	RES,RK 132F 1/10 -CP
R3741	06S45674W09	RES,RK 10RJ 1/10 -CP
R3742	06S45674W09	RES,RK 10RJ 1/10 -CP
R3743	06S55361Y85	RES,RK 682J 1/4 -CP
R3744	06S15593Y69	RES,RK 682F 1/10 -CP

R3745	06S55361Y85	RES,RK 682J 1/4 -CP
R3746	06S15593Y59	RES,RK 272F 1/10 -CP
R3747	06S15594Y03	RES,RK 164F 1/10 -CP
R3748	06S15593Y50	RES,RK 112F 1/10 -CP
R3749	06S55365Y97	RES,RK 223J 1/10 -CP
R3750	06S55365Y97	RES,RK 223J 1/10 -CP
R3751	06S55365Y97	RES,RK 223J 1/10 -CP
R3752	06S55366Y39	RES,RK JUMPER1/10-CP
R3753	06S55366Y39	RES,RK JUMPER1/10-CP
R3754	06S55366Y39	RES,RK JUMPER1/10-CP
R3755	06S55366Y39	RES,RK JUMPER1/10-CP
R3756	06S15594Y03	RES,RK 164F 1/10 -CP
R3757	06S15593Y50	RES,RK 112F 1/10 -CP
R3758	06S55365Y97	RES,RK 223J 1/10 -CP
R3759	06S55365Y97	RES,RK 223J 1/10 -CP
R3760	06S55365Y97	RES,RK 223J 1/10 -CP
R3764	06S55366Y14	RES,RK 104J 1/10 -CP
R3800	06S15593Y57	RES,RK 222F 1/10 -CP
R3801	06S55361Y41	RES,RK 101J 1/4 -CP
R3802	06S55361Y99	RES,RK 273J 1/4 -CP
R3803	06S55361Y62	RES,RK 751J 1/4 -CP
R3804	06S55361Y62	RES,RK 751J 1/4 -CP
R3805	06S55361Y62	RES,RK 751J 1/4 -CP
R3806	06S15593Y51	RES,RK 122F 1/10 -CP
R3807	06S15593Y93	RES,RK 683F 1/10 -CP
R3808	06S15593Y73	RES,RK 103F 1/10 -CP
R3809	06S15593Y93	RES,RK 683F 1/10 -CP
R3810	06S15593Y55	RES,RK 182F 1/10 -CP
R3811	06S45674W81	RES,RK 103J 1/10 -CP
R3812	06S15593Y84	RES,RK 303F 1/10 -CP
R3813	06S55365Y73	RES,RK 222J 1/10 -CP
R3814	06S15594Y06	RES,RK 224F 1/10 -CP
R3815	06S55366Y02	RES,RK 333J 1/10 -CP
R3816	06S55365Y65	RES,RK 102J 1/10 -CP
R3817	06S15593Y73	RES,RK 103F 1/10 -CP
R3818	06S15593Y41	RES,RK 471F 1/10 -CP
R3819	06S15593Y83	RES,RK 273F 1/10 -CP
R3820	06S55365Y65	RES,RK 102J 1/10 -CP
R3821	06S55365Y91	RES,RK 123J 1/10 -CP
R3822	06S15593Y93	RES,RK 683F 1/10 -CP
R3823	06S55361Y59	RES,RK 561J 1/4 -CP
R3824	06S55365Y59	RES,RK 561J 1/10 -CP
R3825	06S55365Y94	RES,RK 163J 1/10 -CP
R3826	06S55361Y69	RES,RK 152J 1/4 -CP
R3827	06S55364Y39	RES,RK JUMPER 1/8-CP
R6604	06S15593Y89	RES,RK 473F 1/10 -CP
R6605	06S15593Y79	RES,RK 183F 1/10 -CP
SA3701	48T25171Y02	VST,SA-C2012-101 -CP
SD3701	48T75102Y01	DIO,SHT RSX301L-30E1
SD3702	48T75102Y01	DIO,SHT RSX301L-30E1
SD3801	48T15702W01	DIO,CP SB05-05CP
SD3802	48T15702W01	DIO,CP SB05-05CP
TH3801	48T75484Y01	TMT,PRG21AR420MB1-CP
TH3802	48T75484Y01	TMT,PRG21AR420MB1-CP
VR3801	18T25572Y09	VAR,RH03ADC 222-X-CP
VR3804	18T55283W11	VAR,RH03APA 472 -CP
ZD3100	48T25766W09	DIO,ZEN.HZS 6C3L -R5

ZD3801	48T62934F13	DIO,ZEN.RD4.3MB2 -CP

=======MAIN3 P.W.Board

BZ5201	50T15447Y02	BUZZER,PKM13EPY -R5
C1006	08S45677W42	CAP,CER.181J-CH1H-CP
C1007	08S45677W54	CAP,CER 561J-CH1H-CP
C1008	08S65128F78	CAP,CER.223K-B1H -CP
C1009	08S65128F78	CAP,CER.223K-B1H -CP
C1010	08S45676W84	CAP,CER 683K-B1C -CP
C1014	08S65128F78	CAP,CER.223K-B1H -CP
C2001	08S45676W73	CAP,CER.103K-B1H -CP
C2002	08S65674Y05	CAP,CER 105KX5R1C-CP
C2003	08S65674Y05	CAP,CER 105KX5R1C-CP
C2004	08S45677W60	CAP,CER 102J-CH1H-CP
C2006	08S65674Y05	CAP,CER 105KX5R1C-CP
C2007	08S65674Y05	CAP,CER 105KX5R1C-CP
C2008	08S65674Y05	CAP,CER 105KX5R1C-CP
C2009	08S65674Y05	CAP,CER 105KX5R1C-CP
C2010	08S45676W80	CAP,CER 223K-B1E -CP
C2011	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2012	08S65674Y05	CAP,CER 105KX5R1C-CP
C2013	08S65674Y05	CAP,CER 105KX5R1C-CP
C2014	08S45676W80	CAP,CER 223K-B1E -CP
C2015	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2016	08S65128F90	CAP,CER 473K-B1H -CP
C2017	08-02764Z03	CAP,TF 224K-1E -CP
C2018	08-02764Z03	CAP,TF 224K-1E -CP
C2019	08-02764Z03	CAP,TF 224K-1E -CP
C2020	08-02764Z03	CAP,TF 224K-1E -CP
C2023	08T81833F07	CAP,CER 105K-B1C -CP
C2024	08S45676W85	CAP,CER 104K-B1C -CP
C2026	08S45677W60	CAP,CER 102J-CH1H-CP
C2027	08S35349Y13	CAP,CER 684K-B1A -CP
C2028	08S45676W85	CAP,CER 104K-B1C -CP
C2030	08S65667Y03	CAP,CER 474KX5R1A-CP
C2031	08S65667Y03	CAP,CER 474KX5R1A-CP
C2032	08S45676W65	CAP,CER.222K-B1H -CP
C2052	08S45676W80	CAP,CER 223K-B1E -CP
C2053	08S45676W85	CAP,CER 104K-B1C -CP
C2054	08S45539Y04	CAP,CER 103KX7R2J-CP
C2059	08T81833F13	CAP,CER 106K-B1C -CP
C2060	08T81833F13	CAP,CER 106K-B1C -CP
C2061	08S45677W20	CAP,CER.22RJ-CH1H-CP
C2062	08S45676W80	CAP,CER 223K-B1E -CP
C2063	08S45677W20	CAP,CER.22RJ-CH1H-CP
C3001	08S45676W75	CAP,CER.153K-B1H -CP
C3002	08S45676W75	CAP,CER.153K-B1H -CP
C3003	08S45677W60	CAP,CER 102J-CH1H-CP
C3004	08S45677W60	CAP,CER 102J-CH1H-CP
C3005	08S45676W75	CAP,CER.153K-B1H -CP
C3006	08S45676W75	CAP,CER.153K-B1H -CP
C3007	08S45676W75	CAP,CER.153K-B1H -CP
C3010	08S65128F69	CAP,CER.103K-B1H -CP
C3011	08S45676W80	CAP,CER 223K-B1E -CP
C3012	08S65128F88	CAP,CER 104K-B1H -CP
C3013	08S45676W85	CAP,CER 104K-B1C -CP
C3025	08S65128F69	CAP,CER.103K-B1H -CP

	C3026	08S45676W80	CAP,CER 223K-B1E -CP
	C3032	08T55390W34	CAP,TF 274J-1H -R5
	C3050	08S65128F90	CAP,CER 473K-B1H -CP
	C3051	08S45539Y04	CAP,CER 103KX7R2J-CP
	C3052	08S45539Y04	CAP,CER 103KX7R2J-CP
	C3053	08S45539Y04	CAP,CER 103KX7R2J-CP
	C3055	08S45539Y04	CAP,CER 103KX7R2J-CP
#1	C3056	08S45539Y04	CAP,CER 103KX7R2J-CP
	C3057	08S45676W80	CAP,CER 223K-B1E -CP
	C3058	08S45676W80	CAP,CER 223K-B1E -CP
#1	C3059	08S45676W85	CAP,CER 104K-B1C -CP
	C3060	08S45676W80	CAP,CER 223K-B1E -CP
	C3062	08S65128F88	CAP,CER 104K-B1H -CP
	C3064	08S45676W80	CAP,CER 223K-B1E -CP
	C3070	08S45676W80	CAP,CER 223K-B1E -CP
	C3071	08S45676W80	CAP,CER 223K-B1E -CP
	C3072	08S45676W80	CAP,CER 223K-B1E -CP
	C3073	08S45676W80	CAP,CER 223K-B1E -CP
	C3074	08S45676W80	CAP,CER 223K-B1E -CP
	C3075	08S45676W80	CAP,CER 223K-B1E -CP
	C3077	08S45676W80	CAP,CER 223K-B1E -CP
	C4022	08S45677W36	CAP,CER.101J-CH1H-CP
	C4023	08S45677W36	CAP,CER.101J-CH1H-CP
	C4024	08S45539Y04	CAP,CER 103KX7R2J-CP
	C5002	08S35374W11	CAP,CER 475K-B0J -CP
	C5003	08S45677W14	CAP,CER.12RJ-CH1H-CP
	C5004	08S45677W14	CAP,CER.12RJ-CH1H-CP
	C5005	08S45676W80	CAP,CER 223K-B1E -CP
	C5008	08S45676W80	CAP,CER 223K-B1E -CP
	C5020	08S45676W80	CAP,CER 223K-B1E -CP
	C5021	08S45677W22	CAP,CER.27RJ-CH1H-CP
	C5022	08S45677W22	CAP,CER.27RJ-CH1H-CP
	C5031	08S45676W80	CAP,CER 223K-B1E -CP
	CB3001	09T03498K02	WTB,53253-0210 -DB
	CB3051	09T25436Y02	WTB,53253-0210 -DB
	CB5101	09T75225Y30	FFC,51374-3093 -ES
	CB5102	09T75225Y20	FFC,51374-2093 -E7
	CB5103	09T25436Y08	WTB,53253-0810 -DB
	D1001	48T85357W01	DIO,1PS226 -CP
	D2001	48T25651W01	DIO,CP MA152WA
	D2002	48T25651W01	DIO,CP MA152WA
	D2003	48T25651W01	DIO,CP MA152WA
	D2011	48T95572W01	DIO,SHT MA736-TX -E1
	D2016	48T95572W01	DIO,SHT MA736-TX -E1
	D2020	48T25593Y01	DIO,S1G-6904 -E1
	D3001	48T25274Y01	DIO,MA4S159-TX -CP
	D3002	48T25665Y01	DIO,1SS355-TE17 -CP
	D3003	48T25665Y01	DIO,1SS355-TE17 -CP
	D3025	48T25651W02	DIO,MA152WK-TX -CP
	D3032	48T25593Y01	DIO,S1G-6904 -E1
	D3051	48T25651W02	DIO,MA152WK-TX -CP
	D3052	48T25651W02	DIO,MA152WK-TX -CP
	D3055	48-04465Z01	DIO,MA2711100L-TX-CP
	D3070	48T25651W02	DIO,MA152WK-TX -CP
	D4005	48T85357W01	DIO,1PS226 -CP
	D4006	48T85357W01	DIO,1PS226 -CP
	D5002	48T68828F11	DIO,1SS133 -RH

D5003	48T45701Y01	DIO,MA2S728-TX -CP
D5004	48T45701Y01	DIO,MA2S728-TX -CP
E1001	23S75244Y20	CAP,ELY 221-1C -E6
E2001	23S55039Y06	CAP,ELY 101-1C -R2
E2004	23S55039Y14	CAP,ELY 2R2-1H -R2
E2005	23S55039Y14	CAP,ELY 2R2-1H -R2
E2006	23S55039Y02	CAP,ELY 10R-1C -R2
E2010	23S65134W52	CAP,ELY 3R3-1V(3)-E2
E2011	23S65134W52	CAP,ELY 3R3-1V(3)-E2
E2012	23S65134W52	CAP,ELY 3R3-1V(3)-E2
E2013	23S65134W52	CAP,ELY 3R3-1V(3)-E2
E2014	23S65134W52	CAP,ELY 3R3-1V(3)-E2
E2015	23S65134W52	CAP,ELY 3R3-1V(3)-E2
E2016	23S65134W65	CAP,ELY 1R0-1H(3)-E2
E2017	23S55039Y03	CAP,ELY 22R-1C -R2
E2018	23S55039Y07	CAP,ELY 4R7-1V -R2
E2019	23S55039Y03	CAP,ELY 22R-1C -R2
E2020	23S55039Y03	CAP,ELY 22R-1C -R2
E2022	23S75244Y16	CAP,ELY 10R-1C -E2
E2023	23S75244Y16	CAP,ELY 10R-1C -E2
E2024	23S75244Y16	CAP,ELY 10R-1C -E2
E2025	23S75244Y16	CAP,ELY 10R-1C -E2
E2026	23S95415W05	CAP,ELY 47R-1C -R2
E2027	23S65134W73	CAP,ELY 4R7-1H(5)-E3
E2060	23S55039Y03	CAP,ELY 22R-1C -R2
E2061	23S55039Y15	CAP,ELY 3R3-1H -R2
E2062	23S55039Y15	CAP,ELY 3R3-1H -R2
E2063	23S55039Y03	CAP,ELY 22R-1C -R2
E2064	23S82372F10	CAP,ELY.3R3-1E-BP-R2
E2065	23S82372F10	CAP,ELY.3R3-1E-BP-R2
E3001	23S65134W35	CAP,ELY 101-1C(8)-E6
E3002	23S75244Y19	CAP,ELY 101-1C -E6
E3003	23S45639Y02	CAP,ELY 47R-0J -R2
E3004	23S65134W34	CAP,ELY 47R-1C(6)-E6
E3025	23S65134W12	CAP,ELY 47R-0J(5)-E3
E3050	23T35505W09	CAP,ELY 472-1C +
E3053	23S75244Y18	CAP,ELY 47R-1C -E3
E4021	23S65134W31	CAP,ELY 10R-1C(4)-E2
E4022	23S65134W31	CAP,ELY 10R-1C(4)-E2
E4023	23S65134W31	CAP,ELY 10R-1C(4)-E2
E4024	23S65134W31	CAP,ELY 10R-1C(4)-E2
E5001	23S45639Y03	CAP,ELY 331-0J -R2
E5004	23S55039Y03	CAP,ELY 22R-1C -R2
F2001	65T75477Y13	FUSE,CCP2E 4.0A -CP
F4001	65T75477Y05	FUSE,CCP2E 1.0A -CP
IC2001	51T65381Y01	TDA7412 -QT
IC2002	51T25576W07	NJM4580V-TE2 -SE2
IC2003	51T25576W07	NJM4580V-TE2 -SE2
IC2006	51T65184Y01	TB2901H -ZS
IC2007	51T93333F01	NJM2904M-TE3 -SE2
IC2010	51T25576W07	NJM4580V-TE2 -SE2
IC3001	51T25259Y03	BA00ASFP-E2 -NE5
IC3002	51T25448Y01	BA6219BFP-Y-E2 -SE9
IC3003	51T25259Y03	BA00ASFP-E2 -NE5
IC3004	51T45594Y01	TDA3664 -NE2
IC3025	51T25259Y03	BA00ASFP-E2 -NE5
IC3070	51T15614Y01	TC74HC4051AFT-EL-SE5

	IC3071	51T15614Y01	TC74HC4051AFT-EL-SE5
	IC3072	51T15194Y01	TC74VHCT08AFT-EL-SE5
	IC3075	51T35360Y01	TC7WH08FU-L -SE1
#1	IC5001	53-00011Z01	OFL,V1.00RAAL502A
$1	IC5001	53-00011Z02	OFL,V1.00RAAP603A
%1	IC5001	53-00011Z03	OFL,V1.00RAAP604A
&1	IC5001	53-00011Z04	OFL,V1.00RAAC602A
	IC5004	51T15362Y01	TC74HCT7007AFTP2-SE6
	IC5005	51T55070W05	MB88385CPF-ER -SE9
	IC5007	51T65778Y01	BR24L02F-W-E2 -SE2
	L1001	24T35286Y02	IND,MG56 332J -DB
	L1002	24T25164Y21	IND,FSLM2520 4R7J-CP
	L1003	24T16403W29	COI,IND.15R-M -CP
	Q1001	48T64222F01	TR ,UN2211 10-10 -TX
	Q1002	48T35548Y04	TR,2SB710A-S-TX -CP
	Q1003	48T64222F12	TR,UN221L-TX -CP
	Q1004	48T45594W16	TR,XN1A311-TX -CP
	Q2002	48T25317Y01	TR,XN0F256-TX -CP
	Q2003	48T25317Y01	TR,XN0F256-TX -CP
	Q2004	48T25317Y01	TR,XN0F256-TX -CP
	Q2005	48T64222F01	TR ,UN2211 10-10 -TX
	Q2006	48T64222F02	TR ,UN2212 22-22 -TX
	Q2007	48T64222F02	TR ,UN2212 22-22 -TX
	Q2009	48T64222F01	TR ,UN2211 10-10 -TX
	Q3001	48T45594W16	TR,XN1A311-TX -CP
	Q3002	48T45594W16	TR,XN1A311-TX -CP
	Q3003	48T45251W03	TR ,UN5212 22-22 -CP
	Q3004	48T35548Y04	TR,2SB710A-S-TX -CP
	Q3005	48T45594W12	TR ,XN1A312 -TX-CP
	Q3006	48T45594W12	TR ,XN1A312 -TX-CP
	Q3007	48T45251W03	TR ,UN5212 22-22 -CP
	Q3008	48T45251W03	TR ,UN5212 22-22 -CP
	Q3032	48T62967F25	TR,DTC123JKA-T146-CP
	Q3033	48T84366F05	TR,2SB1243-R-TV2 -RD
	Q3051	48T64221F11	TR,UN211L-TX -CP
#1	Q3052	48T64222F02	TR ,UN2212 22-22 -TX
	Q3053	48T64221F11	TR,UN211L-TX -CP
	Q3055	48T73023F01	TR ,2SD874A -E2
	Q3057	48T45594W16	TR,XN1A311-TX -CP
	Q3070	48T64221F11	TR,UN211L-TX -CP
	Q4012	48T45594W12	TR ,XN1A312 -TX-CP
	Q4014	48T84366F04	TR,2SB1243-QR-TV2-RD
	Q4015	48T62967F25	TR,DTC123JKA-T146-CP
	Q5003	48T45594W16	TR,XN1A311-TX -CP
	Q5004	48T64221F11	TR,UN211L-TX -CP
	Q5201	48T45251W01	TR ,UN5213 47-47 -CP
	R1001	06S55361Y17	RES,RK 10RJ 1/4 -CP
	R1002	06S45674W89	RES,RK 223J 1/10 -CP
	R1003	06S45674W57	RES,RK 102J 1/10 -CP
	R1004	06S55365Y65	RES,RK 102J 1/10 -CP
	R1005	06S55366Y14	RES,RK 104J 1/10 -CP
	R1006	06S55366Y14	RES,RK 104J 1/10 -CP
	R1007	06S55366Y39	RES,RK JUMPER1/10-CP
	R1008	06S55366Y39	RES,RK JUMPER1/10-CP
	R1009	06S55365Y65	RES,RK 102J 1/10 -CP
	R1010	06S55365Y41	RES,RK 101J 1/10 -CP
	R1011	06S55365Y41	RES,RK 101J 1/10 -CP

R1013	06S55365Y65	RES,RK 102J 1/10 -CP
R1014	06S15593Y73	RES,RK 103F 1/10 -CP
R1015	06S55366Y39	RES,RK JUMPER1/10-CP
R1016	06S55366Y14	RES,RK 104J 1/10 -CP
R1017	06S55366Y39	RES,RK JUMPER1/10-CP
R1018	06S55361Y71	RES,RK 182J 1/4 -CP
R1019	06S45674W89	RES,RK 223J 1/10 -CP
R1020	06S55361Y71	RES,RK 182J 1/4 -CP
R1021	06S55365Y89	RES,RK 103J 1/10 -CP
R2000	06S64995F29	RES,RK 101J 1/8 -CP
R2001	06S55365Y65	RES,RK 102J 1/10 -CP
R2002	06S55365Y65	RES,RK 102J 1/10 -CP
R2003	06S55363Y48	RES,RK 201J 1/8 -CP
R2004	06S55365Y73	RES,RK 222J 1/10 -CP
R2005	06S55365Y83	RES,RK 562J 1/10 -CP
R2006	06S55365Y83	RES,RK 562J 1/10 -CP
R2007	06S64995F29	RES,RK 101J 1/8 -CP
R2008	06S55363Y48	RES,RK 201J 1/8 -CP
R2009	06S55363Y48	RES,RK 201J 1/8 -CP
R2010	06S55365Y83	RES,RK 562J 1/10 -CP
R2011	06S64995F29	RES,RK 101J 1/8 -CP
R2012	06S55366Y08	RES,RK 563J 1/10 -CP
R2013	06S55366Y08	RES,RK 563J 1/10 -CP
R2014	06S55365Y83	RES,RK 562J 1/10 -CP
R2015	06S55363Y48	RES,RK 201J 1/8 -CP
R2016	06S64995F29	RES,RK 101J 1/8 -CP
R2017	06S64995F37	RES,RK 221J 1/8 -CP
R2018	06S55365Y83	RES,RK 562J 1/10 -CP
R2019	06S64995F29	RES,RK 101J 1/8 -CP
R2020	06S55366Y08	RES,RK 563J 1/10 -CP
R2021	06S55366Y08	RES,RK 563J 1/10 -CP
R2022	06S55365Y83	RES,RK 562J 1/10 -CP
R2023	06S64995F29	RES,RK 101J 1/8 -CP
R2024	06S64995F37	RES,RK 221J 1/8 -CP
R2025	06S55366Y39	RES,RK JUMPER1/10-CP
R2026	06S55365Y66	RES,RK 112J 1/10 -CP
R2027	06S55365Y66	RES,RK 112J 1/10 -CP
R2029	06S55365Y97	RES,RK 223J 1/10 -CP
R2031	06S55366Y10	RES,RK 683J 1/10 -CP
R2032	06S55366Y10	RES,RK 683J 1/10 -CP
R2033	06S55365Y97	RES,RK 223J 1/10 -CP
R2038	06S55365Y65	RES,RK 102J 1/10 -CP
R2039	06S55365Y65	RES,RK 102J 1/10 -CP
R2040	06S55365Y93	RES,RK 153J 1/10 -CP
R2041	06S55365Y89	RES,RK 103J 1/10 -CP
R2042	06S45674W33	RES,RK 101J 1/10 -CP
R2043	06S55366Y39	RES,RK JUMPER1/10-CP
R2044	06S55365Y65	RES,RK 102J 1/10 -CP
R2045	06S55365Y65	RES,RK 102J 1/10 -CP
R2046	06S55366Y06	RES,RK 473J 1/10 -CP
R2047	06S55365Y49	RES,RK 221J 1/10 -CP
R2049	06S55366Y08	RES,RK 563J 1/10 -CP
R2050	06S55361Y51	RES,RK 271J 1/4 -CP
R2051	06S55361Y51	RES,RK 271J 1/4 -CP
R2053	06S55365Y65	RES,RK 102J 1/10 -CP
R2054	06S55365Y89	RES,RK 103J 1/10 -CP
R2055	06S55365Y97	RES,RK 223J 1/10 -CP

	R2056	06S55366Y08	RES,RK 563J 1/10 -CP
	R2059	06S55366Y39	RES,RK JUMPER1/10-CP
	R2060	06S55366Y39	RES,RK JUMPER1/10-CP
	R2062	06S55365Y93	RES,RK 153J 1/10 -CP
	R2063	06S55365Y93	RES,RK 153J 1/10 -CP
	R2064	06S55365Y93	RES,RK 153J 1/10 -CP
	R2065	06S55365Y97	RES,RK 223J 1/10 -CP
	R2066	06S55365Y93	RES,RK 153J 1/10 -CP
	R2067	06S55365Y97	RES,RK 223J 1/10 -CP
	R3000	06S55366Y39	RES,RK JUMPER1/10-CP
	R3001	06S55361Y29	RES,RK 33RJ 1/4 -CP
	R3002	06S55361Y29	RES,RK 33RJ 1/4 -CP
	R3003	06S55361Y29	RES,RK 33RJ 1/4 -CP
	R3004	06S55361Y29	RES,RK 33RJ 1/4 -CP
	R3005	06S55361Y29	RES,RK 33RJ 1/4 -CP
	R3006	06S55361Y29	RES,RK 33RJ 1/4 -CP
	R3007	06S15593Y57	RES,RK 222F 1/10 -CP
	R3008	06S15593Y77	RES,RK 153F 1/10 -CP
	R3009	06S15593Y59	RES,RK 272F 1/10 -CP
	R3010	06S15593Y75	RES,RK 123F 1/10 -CP
	R3011	06S15593Y56	RES,RK 202F 1/10 -CP
	R3012	06S15593Y57	RES,RK 222F 1/10 -CP
	R3014	06S55365Y97	RES,RK 223J 1/10 -CP
	R3015	06S55365Y73	RES,RK 222J 1/10 -CP
	R3016	06S55366Y06	RES,RK 473J 1/10 -CP
	R3019	06S55365Y41	RES,RK 101J 1/10 -CP
	R3020	06S55365Y41	RES,RK 101J 1/10 -CP
	R3021	06S55365Y92	RES,RK 133J 1/10 -CP
	R3022	06S55365Y89	RES,RK 103J 1/10 -CP
	R3023	06S55361Y70	RES,RK 162J 1/4 -CP
	R3024	06S15593Y69	RES,RK 682F 1/10 -CP
	R3025	06S15593Y53	RES,RK 152F 1/10 -CP
	R3026	06S15593Y59	RES,RK 272F 1/10 -CP
	R3027	06S55365Y98	RES,RK 243J 1/10 -CP
	R3028	06S55361Y70	RES,RK 162J 1/4 -CP
	R3029	06S55361Y70	RES,RK 162J 1/4 -CP
	R3030	06S55361Y70	RES,RK 162J 1/4 -CP
	R3031	06S55361Y70	RES,RK 162J 1/4 -CP
	R3032	06S55361Y89	RES,RK 103J 1/4 -CP
	R3051	06S45674W85	RES,RK 153J 1/10 -CP
	R3052	06S45674W85	RES,RK 153J 1/10 -CP
	R3053	06S55361Y89	RES,RK 103J 1/4 -CP
	R3054	06S55366Y01	RES,RK 303J 1/10 -CP
	R3055	06S55366Y06	RES,RK 473J 1/10 -CP
#1	R3056	06S55361Y89	RES,RK 103J 1/4 -CP
	R3057	06S55366Y01	RES,RK 303J 1/10 -CP
	R3058	06S55361Y89	RES,RK 103J 1/4 -CP
	R3061	06S35083Y31	RES,RK 332F 1/4 -CP
	R3062	06S35083Y35	RES,RK 682F 1/4 -CP
	R3063	06S55361Y58	RES,RK 511J 1/4 -CP
	R3064	06S55362Y39	RES,RK JUMPER 1/4-CP
	R3066	06S55365Y01	RES,RK 2R2J 1/10 -CP
	R3070	06S55365Y97	RES,RK 223J 1/10 -CP
	R3071	06S55365Y41	RES,RK 101J 1/10 -CP
	R3072	06S55365Y97	RES,RK 223J 1/10 -CP
	R3073	06S55366Y06	RES,RK 473J 1/10 -CP
	R3074	06S45674W89	RES,RK 223J 1/10 -CP

	R3075	06S55361Y89	RES,RK 103J 1/4 -CP
	R3076	06S55365Y41	RES,RK 101J 1/10 -CP
	R3077	06S45674W82	RES,RK 113J 1/10 -CP
	R3080	06S55361Y89	RES,RK 103J 1/4 -CP
	R3084	06S55362Y39	RES,RK JUMPER 1/4-CP
	R4043	06S55361Y65	RES,RK 102J 1/4 -CP
	R4044	06S55362Y39	RES,RK JUMPER 1/4-CP
	R4045	06S55362Y39	RES,RK JUMPER 1/4-CP
	R4046	06S55361Y65	RES,RK 102J 1/4 -CP
	R4047	06S55366Y06	RES,RK 473J 1/10 -CP
	R4048	06S55361Y65	RES,RK 102J 1/4 -CP
	R4052	06S55361Y71	RES,RK 182J 1/4 -CP
	R4053	06S55361Y71	RES,RK 182J 1/4 -CP
	R4054	06S55361Y71	RES,RK 182J 1/4 -CP
	R4055	06S55361Y89	RES,RK 103J 1/4 -CP
	R4056	06S55361Y71	RES,RK 182J 1/4 -CP
	R4057	06S15594Y12	RES,RK 394F 1/10 -CP
	R4058	06S15594Y02	RES,RK 154F 1/10 -CP
	R5001	06S55366Y06	RES,RK 473J 1/10 -CP
	R5002	06S15593Y49	RES,RK 102F 1/10 -CP
	R5003	06S55365Y41	RES,RK 101J 1/10 -CP
	R5004	06S55365Y41	RES,RK 101J 1/10 -CP
	R5005	06S55365Y83	RES,RK 562J 1/10 -CP
	R5006	06S55365Y83	RES,RK 562J 1/10 -CP
	R5007	06S55366Y39	RES,RK JUMPER1/10-CP
	R5010	06S55365Y65	RES,RK 102J 1/10 -CP
	R5012	06S55365Y41	RES,RK 101J 1/10 -CP
	R5013	06S45674W81	RES,RK 103J 1/10 -CP
	R5014	06S45674W81	RES,RK 103J 1/10 -CP
	R5015	06S55365Y97	RES,RK 223J 1/10 -CP
	R5016	06S55366Y06	RES,RK 473J 1/10 -CP
	R5017	06S55365Y82	RES,RK 512J 1/10 -CP
	R5018	06S55365Y82	RES,RK 512J 1/10 -CP
	R5020	06S55365Y41	RES,RK 101J 1/10 -CP
	R5021	06S55365Y41	RES,RK 101J 1/10 -CP
	R5022	06S55365Y41	RES,RK 101J 1/10 -CP
	R5023	06S55365Y97	RES,RK 223J 1/10 -CP
	R5024	06S55365Y97	RES,RK 223J 1/10 -CP
	R5025	06S15593Y81	RES,RK 223F 1/10 -CP
	R5026	06S15593Y81	RES,RK 223F 1/10 -CP
	R5027	06S15593Y74	RES,RK 113F 1/10 -CP
	R5028	06S15593Y74	RES,RK 113F 1/10 -CP
	R5029	06S55365Y41	RES,RK 101J 1/10 -CP
	R5031	06S15593Y81	RES,RK 223F 1/10 -CP
	R5032	06S55365Y65	RES,RK 102J 1/10 -CP
	R5033	06S55365Y65	RES,RK 102J 1/10 -CP
	R5034	06S55365Y85	RES,RK 682J 1/10 -CP
	R5035	06S15593Y81	RES,RK 223F 1/10 -CP
%1	R5036	06S15593Y73	RES,RK 103F 1/10 -CP
&1	R5036	06S15593Y73	RES,RK 103F 1/10 -CP
$1	R5037	06S15593Y73	RES,RK 103F 1/10 -CP
&1	R5037	06S15593Y73	RES,RK 103F 1/10 -CP
#1	R5038	06S15593Y73	RES,RK 103F 1/10 -CP
$1	R5038	06S15593Y73	RES,RK 103F 1/10 -CP
#1	R5039	06S15593Y73	RES,RK 103F 1/10 -CP
%1	R5039	06S15593Y73	RES,RK 103F 1/10 -CP
	R5040	06S55365Y41	RES,RK 101J 1/10 -CP

R5041	06S55365Y41	RES,RK 101J 1/10 -CP
R5043	06S55365Y41	RES,RK 101J 1/10 -CP
R5044	06S55365Y41	RES,RK 101J 1/10 -CP
R5045	06S15593Y49	RES,RK 102F 1/10 -CP
R5047	06S15593Y96	RES,RK 913F 1/10 -CP
R5048	06S15594Y04	RES,RK 184F 1/10 -CP
R5049	06S15593Y96	RES,RK 913F 1/10 -CP
R5051	06S15593Y96	RES,RK 913F 1/10 -CP
R5053	06S15594Y04	RES,RK 184F 1/10 -CP
R5054	06S15594Y04	RES,RK 184F 1/10 -CP
R5070	06S55365Y69	RES,RK 152J 1/10 -CP
R5071	06S55365Y73	RES,RK 222J 1/10 -CP
R5072	06S55361Y17	RES,RK 10RJ 1/4 -CP
R5073	06S55361Y46	RES,RK 161J 1/4 -CP
R5074	06S55361Y46	RES,RK 161J 1/4 -CP
R5075	06S55361Y46	RES,RK 161J 1/4 -CP
R5076	06S55361Y46	RES,RK 161J 1/4 -CP
R5077	06S55365Y69	RES,RK 152J 1/10 -CP
R5078	06S55365Y73	RES,RK 222J 1/10 -CP
R5079	06S55365Y81	RES,RK 472J 1/10 -CP
R5081	06S55365Y81	RES,RK 472J 1/10 -CP
R5082	06S55365Y85	RES,RK 682J 1/10 -CP
R5084	06S55361Y17	RES,RK 10RJ 1/4 -CP
R5090	06S55365Y41	RES,RK 101J 1/10 -CP
R5123	06S55365Y97	RES,RK 223J 1/10 -CP
R5124	06S55365Y97	RES,RK 223J 1/10 -CP
R5201	06S55365Y89	RES,RK 103J 1/10 -CP
R5202	06S55361Y65	RES,RK 102J 1/4 -CP
R5203	06S55365Y41	RES,RK 101J 1/10 -CP
R5204	06S55365Y41	RES,RK 101J 1/10 -CP
R5205	06S55361Y49	RES,RK 221J 1/4 -CP
RA5001	06S45591W07	RES,ARY MNR101J 4-CP
RA5002	06S45591W15	RES,ARY MNR472J 4-CP
SA1001	48T81048F02	PTT,DSP-201M -RD
SA2001	48T25171Y02	VST,SA-C2012-101 -CP
SA2002	48T25171Y02	VST,SA-C2012-101 -CP
SA2003	48T25171Y02	VST,SA-C2012-101 -CP
SA4001	48T25171Y02	VST,SA-C2012-101 -CP
SW2001	40T45282W02	SW,SLIDE SLD-42-508X
XL5001	91T55360Y07	XTL,AT-51 5.000M -R5
XL5003	91T65149Y01	XTL,CMR310T 4.00M-E9
Z5001	91T65112W06	EMI,BK2125HM102 -CP
ZD3001	48-02645Z25	DIO,ZEN MAZ80620L-CP
ZD3050	48-02592Z01	DIO,ZEN Z5W27VJ -EA
ZD3052	48T25766W24	DIO,ZEN.HZS 9C1L -R5
ZD5001	48T15541Y52	DIO,ZEN MAZS0560M-CP
ZD5002	48T35392Y06	DIO,ZEN RLZ7.5A -CP
ZD5003	48T35392Y06	DIO,ZEN RLZ7.5A -CP

=======LCD P.W.Board

C8002	08T65231Y01	CAP,CER 226K-BJ1A-CP
C8003	08S45676W85	CAP,CER 104K-B1C -CP
C8004	08S35374W12	CAP,CER 106K-B0J -CP
C8005	08S45676W85	CAP,CER 104K-B1C -CP
C8006	08S35374W12	CAP,CER 106K-B0J -CP
C8007	08S45677W34	CAP,CER.82RJ-CH1H-CP
C8008	08S45677W52	CAP,CER 471J-CH1H-CP

C8009	08S45676W80	CAP,CER 223K-B1E -CP
C8010	08S45676W80	CAP,CER 223K-B1E -CP
C8011	08S35349Y16	CAP,CER 105K-B1A -CP
C8014	08S45676W85	CAP,CER 104K-B1C -CP
C8016	08S45676W80	CAP,CER 223K-B1E -CP
C8018	08S45676W85	CAP,CER 104K-B1C -CP
C8021	08S45676W80	CAP,CER 223K-B1E -CP
C8023	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8024	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8027	08S45676W80	CAP,CER 223K-B1E -CP
C8028	08S65674Y05	CAP,CER 105KX5R1C-CP
C8029	08S45676W80	CAP,CER 223K-B1E -CP
C8030	08S45676W80	CAP,CER 223K-B1E -CP
C8031	08S65670Y01	CAP,CER 106KX5R1C-CP
C8032	08S65670Y01	CAP,CER 106KX5R1C-CP
C8033	08S65128F57	CAP,CER.102K-B1H -CP
C8034	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8035	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8036	08S35349Y12	CAP,CER 105K-B0J -CP
C8037	08S45676W80	CAP,CER 223K-B1E -CP
C8038	08S45676W99	CAP,CER 561K-B1H -CP
C8039	08S45676W85	CAP,CER 104K-B1C -CP
C8040	08S65670Y01	CAP,CER 106KX5R1C-CP
C8041	08S65670Y01	CAP,CER 106KX5R1C-CP
C8042	08S65670Y01	CAP,CER 106KX5R1C-CP
C8044	08S65670Y01	CAP,CER 106KX5R1C-CP
C8045	08S45676W80	CAP,CER 223K-B1E -CP
C8046	08S45676W85	CAP,CER 104K-B1C -CP
C8047	08S45676W85	CAP,CER 104K-B1C -CP
C8048	08S45677W60	CAP,CER 102J-CH1H-CP
C8049	08S45677W36	CAP,CER.101J-CH1H-CP
C8050	08S45677W48	CAP,CER.331J-CH1H-CP
C8051	08S45677W44	CAP,CER.221J-CH1H-CP
C8052	08S65676Y05	CAP,CER 105KX7R1E-CP
C8053	08S45676W80	CAP,CER 223K-B1E -CP
C8054	08S45676W93	CAP,CER 224K-B1A -CP
C8055	08S45676W85	CAP,CER 104K-B1C -CP
C8056	08S65128F57	CAP,CER.102K-B1H -CP
C8057	08S65128F57	CAP,CER.102K-B1H -CP
C8058	08S65128F57	CAP,CER.102K-B1H -CP
C8059	08S45677W24	CAP,CER 33RJ-CH1H-CP
C8060	08S45676W85	CAP,CER 104K-B1C -CP
C8061	08S65670Y01	CAP,CER 106KX5R1C-CP
C8201	08S45676W73	CAP,CER.103K-B1H -CP
C8202	08S45676W85	CAP,CER 104K-B1C -CP
C8203	08S45676W73	CAP,CER.103K-B1H -CP
C8204	08T65231Y01	CAP,CER 226K-BJ1A-CP
C8205	08S35349Y17	CAP,CER 225K-B0J -CP
C8206	08S65669Y02	CAP,CER 474KX7R1E-CP
C8207	08S35349Y16	CAP,CER 105K-B1A -CP
C8208	08S45676W85	CAP,CER 104K-B1C -CP
C8210	08S45676W65	CAP,CER.222K-B1H -CP
C8211	08S45676W63	CAP,CER 152K-B1H -CP
C8213	08S45676W89	CAP,CER 473K-B1E -CP
C8214	08S45677W44	CAP,CER.221J-CH1H-CP
C8215	08S45676W73	CAP,CER.103K-B1H -CP
C8216	08S45676W85	CAP,CER 104K-B1C -CP

C8217	08T65231Y01	CAP,CER 226K-BJ1A-CP
C8218	08S65676Y03	CAP,CER 225KX7R1C-CP
C8219	08T81833F12	CAP,CER 106K-B1A -CP
C8220	08T95444W05	CAP,CER 22RJ-SL3F-E2
C8221	08S45676W89	CAP,CER 473K-B1E -CP
C8223	08S45676W73	CAP,CER.103K-B1H -CP
C8224	08S45676W85	CAP,CER 104K-B1C -CP
C8227	08S45677W50	CAP,CER 391J-CH1H-CP
C8228	08S45677W60	CAP,CER 102J-CH1H-CP
C8229	08S45677W60	CAP,CER 102J-CH1H-CP
C8230	08S45677W60	CAP,CER 102J-CH1H-CP
C8231	08S45677W60	CAP,CER 102J-CH1H-CP
CB4501	09T15548Y02	WTB,SM(2)B-SRSS -E2
CB4503	09T45391Y13	FFC,IMSA9632S-13Y-E9
CB8001	09T45507Y50	FFC,IMSA9631S-50Y-EQ
CB8002	09T45391Y32	FFC,IMSA9632S-32Y-ED
CB8201	09T85214W02	WTB,SM02(8)B-BHS -E9
CB8202	09T55175Y04	FFC,IMSA9617S-04Y-E9
D4502	48T25665Y01	DIO,1SS355-TE17 -CP
D8001	48T15540Y01	DIO,MA2S111-TX -CP
D8201	48T25665Y01	DIO,1SS355-TE17 -CP
D8202	48T25665Y01	DIO,1SS355-TE17 -CP
D8203	48T25665Y01	DIO,1SS355-TE17 -CP
D8204	48T15707Y01	DIO,MA133-TX -CP
D8205	48T15707Y01	DIO,MA133-TX -CP
IC8001	51T45577Y01	LZ9GH29 -QT
IC8201	51T93332F02	NJM2903V-TE2 -SE2
IC8202	51-02203Z01	OZ964ISN-L -SE5
IC8203	51T25491Y01	NJM2107F-TE1 -CP
IC8204	51T25406Y01	TC7W34FU-TE12L -SE1
IC8206	51T15194Y01	TC74VHCT08AFT-EL-SE5
L8001	24T95458W01	FBI,BLM31PG500SH1-CP
L8002	24T25164Y27	IND,FSLM2520 15RJ-CP
L8003	24-02145Z09	IND,NLCV32T 22RK -CP
L8004	24S45109Y08	IND,MA2125 15RK -CP
L8005	24T25164Y18	IND,FSLM2520 2R7J-CP
L8006	24T65418Y03	IND,NLV25T 2R2J -CP
L8007	24T45379Y03	IND,D53LC 3R3M -E2
Q4502	48T73022F01	TR ,2SB766A
Q4503	48T94582F01	TR ,CP 2SC4081-Q
Q8001	48T52439F01	TR,2SD602A-RS-TX -CP
Q8201	48T94582F01	TR ,CP 2SC4081-Q
Q8202	48T64222F01	TR ,UN2211 10-10 -TX
Q8203	48T64222F11	TR,UN221F-TX -CP
Q8204	48T64222F11	TR,UN221F-TX -CP
Q8205	48T75460Y01	FET,SP8M3-TB -E2
Q8206	48T75460Y01	FET,SP8M3-TB -E2
Q8208	48T52439F01	TR,2SD602A-RS-TX -CP
Q8209	48T64221F02	TR ,UN2112 22-22 -TX
Q8210	48T35548Y04	TR,2SB710A-S-TX -CP
Q8211	48T35548Y04	TR,2SB710A-S-TX -CP
Q8212	48T52439F01	TR,2SD602A-RS-TX -CP
Q8213	48T63788F01	TR ,CP.2SD1328 -TX
Q8214	48T64222F11	TR,UN221F-TX -CP
Q8215	48T64222F11	TR,UN221F-TX -CP
R4513	06S55365Y53	RES,RK 331J 1/10 -CP
R4514	06S55365Y97	RES,RK 223J 1/10 -CP

R4515	06S55366Y06	RES,RK 473J 1/10 -CP
R4516	06S55366Y06	RES,RK 473J 1/10 -CP
R4518	06S15593Y25	RES,RK 101F 1/10 -CP
R4521	06S55366Y39	RES,RK JUMPER1/10-CP
R8011	06S45674W33	RES,RK 101J 1/10 -CP
R8012	06S45674W33	RES,RK 101J 1/10 -CP
R8013	06S45674W33	RES,RK 101J 1/10 -CP
R8014	06S45674W33	RES,RK 101J 1/10 -CP
R8015	06S45674W33	RES,RK 101J 1/10 -CP
R8016	06S45674W33	RES,RK 101J 1/10 -CP
R8017	06S45674W97	RES,RK 473J 1/10 -CP
R8021	06S15593Y73	RES,RK 103F 1/10 -CP
R8022	06S15594Y06	RES,RK 224F 1/10 -CP
R8023	06S55366Y38	RES,RK 105J 1/10 -CP
R8024	06S15593Y43	RES,RK 561F 1/10 -CP
R8026	06S15593Y65	RES,RK 472F 1/10 -CP
R8027	06S15593Y73	RES,RK 103F 1/10 -CP
R8028	06S15593Y79	RES,RK 183F 1/10 -CP
R8029	06S15593Y89	RES,RK 473F 1/10 -CP
R8030	06S55365Y55	RES,RK 391J 1/10 -CP
R8031	06S15594Y16	RES,RK 564F 1/10 -CP
R8032	06S15593Y62	RES,RK 362F 1/10 -CP
R8034	06S15593Y93	RES,RK 683F 1/10 -CP
R8035	06S15593Y67	RES,RK 562F 1/10 -CP
R8036	06S15594Y16	RES,RK 564F 1/10 -CP
R8037	06S45674W33	RES,RK 101J 1/10 -CP
R8038	06S15593Y89	RES,RK 473F 1/10 -CP
R8039	06S15593Y82	RES,RK 243F 1/10 -CP
R8040	06S55366Y10	RES,RK 683J 1/10 -CP
R8041	06S55366Y38	RES,RK 105J 1/10 -CP
R8042	06S15593Y81	RES,RK 223F 1/10 -CP
R8044	06S15593Y70	RES,RK 752F 1/10 -CP
R8045	06S15593Y21	RES,RK 68RF 1/10 -CP
R8046	06S55365Y83	RES,RK 562J 1/10 -CP
R8047	06S55365Y87	RES,RK 822J 1/10 -CP
R8048	06S55365Y95	RES,RK 183J 1/10 -CP
R8049	06S15593Y59	RES,RK 272F 1/10 -CP
R8050	06S15593Y61	RES,RK 332F 1/10 -CP
R8051	06S45674W33	RES,RK 101J 1/10 -CP
R8052	06S15593Y37	RES,RK 331F 1/10 -CP
R8053	06S45674W33	RES,RK 101J 1/10 -CP
R8054	06S45674W33	RES,RK 101J 1/10 -CP
R8201	06S15593Y80	RES,RK 203F 1/10 -CP
R8202	06S15593Y49	RES,RK 102F 1/10 -CP
R8203	06S15593Y73	RES,RK 103F 1/10 -CP
R8204	06S15593Y77	RES,RK 153F 1/10 -CP
R8205	06S15593Y97	RES,RK 104F 1/10 -CP
R8207	06S15593Y77	RES,RK 153F 1/10 -CP
R8209	06S15593Y57	RES,RK 222F 1/10 -CP
R8210	06S15593Y82	RES,RK 243F 1/10 -CP
R8211	06S15593Y09	RES,RK 22RF 1/10 -CP
R8212	06S15593Y73	RES,RK 103F 1/10 -CP
R8219	06S15594Y02	RES,RK 154F 1/10 -CP
R8221	06S15593Y90	RES,RK 513F 1/10 -CP
R8223	06S15593Y90	RES,RK 513F 1/10 -CP
R8224	06S15593Y57	RES,RK 222F 1/10 -CP
R8225	06S15593Y73	RES,RK 103F 1/10 -CP

R8226	06S15593Y70	RES,RK 752F 1/10 -CP
R8229	06S15593Y73	RES,RK 103F 1/10 -CP
R8230	06S15594Y22	RES,RK 105F 1/10 -CP
R8231	06S15593Y81	RES,RK 223F 1/10 -CP
R8232	06S15593Y09	RES,RK 22RF 1/10 -CP
R8233	06S15593Y97	RES,RK 104F 1/10 -CP
R8234	06S15593Y97	RES,RK 104F 1/10 -CP
R8235	06S15593Y01	RES,RK 10RF 1/10 -CP
R8236	06S15593Y57	RES,RK 222F 1/10 -CP
R8237	06S15593Y57	RES,RK 222F 1/10 -CP
R8238	06S15593Y25	RES,RK 101F 1/10 -CP
R8239	06S15593Y25	RES,RK 101F 1/10 -CP
R8240	06S45674W49	RES,RK 471J 1/10 -CP
R8241	06S15593Y33	RES,RK 221F 1/10 -CP
R8242	06S15593Y51	RES,RK 122F 1/10 -CP
R8243	06S15593Y95	RES,RK 823F 1/10 -CP
R8244	06S15593Y85	RES,RK 333F 1/10 -CP
R8245	06S15593Y89	RES,RK 473F 1/10 -CP
R8246	06S15593Y79	RES,RK 183F 1/10 -CP
R8247	06S15593Y65	RES,RK 472F 1/10 -CP
R8248	06S15593Y65	RES,RK 472F 1/10 -CP
R8249	06S15593Y57	RES,RK 222F 1/10 -CP
R8250	06S15593Y57	RES,RK 222F 1/10 -CP
R8251	06S45674W81	RES,RK 103J 1/10 -CP
R8252	06S45674W81	RES,RK 103J 1/10 -CP
R8253	06S45674W81	RES,RK 103J 1/10 -CP
R8254	06S45674W81	RES,RK 103J 1/10 -CP
R8255	06S15593Y97	RES,RK 104F 1/10 -CP
R8256	06S15593Y79	RES,RK 183F 1/10 -CP
R8257	06S55365Y41	RES,RK 101J 1/10 -CP
R8258	06S55365Y41	RES,RK 101J 1/10 -CP
RA8001	06S45591W14	RES,ARY MNR471J 4-CP
RA8002	06S45591W07	RES,ARY MNR101J 4-CP
RA8003	06S45591W07	RES,ARY MNR101J 4-CP
SD8001	48T25247Y01	DIO,SHT MA716-TX -CP
T8201	25-05839Z01	TRANS,ETJV18ZE3GAB-T
TH8201	48T25250Y06	TMT,ERTJ1VR223G -CP
TH8202	48T25250Y08	TMT,ERTJ1VR103G -CP
VD8001	48T25248Y01	DIO,VAR MA335-TX -CP
VR8001	18T55283W19	VAR,RH03APA 104 -CP
VR8002	18T25572Y09	VAR,RH03ADC 222-X-CP
VR8003	18T55283W19	VAR,RH03APA 104 -CP
Z8001	91T15509Y08	EMI,BK1608HM102 -CP
Z8002	91T15509Y08	EMI,BK1608HM102 -CP
Z8003	91T15509Y08	EMI,BK1608HM102 -CP
Z8004	91T15509Y08	EMI,BK1608HM102 -CP
Z8005	91T15509Y08	EMI,BK1608HM102 -CP
Z8006	91T15509Y08	EMI,BK1608HM102 -CP
Z8007	91T15509Y08	EMI,BK1608HM102 -CP
Z8008	91T15509Y08	EMI,BK1608HM102 -CP
Z8009	91T15509Y08	EMI,BK1608HM102 -CP
Z8010	91T15509Y08	EMI,BK1608HM102 -CP
Z8011	91T15509Y08	EMI,BK1608HM102 -CP
Z8012	91T15509Y08	EMI,BK1608HM102 -CP
Z8013	91T15509Y08	EMI,BK1608HM102 -CP
ZD8001	48T15541Y49	DIO,ZEN MAZS0510M-CP
ZD8201	48T62934F22	DIO,ZEN.RD5.6MB2 -CP

ZD8202	48T62934F22	DIO,ZEN.RD5.6MB2 -CP
ZD8203	48T15541Y53	DIO,ZEN MAZS0560H-CP
ZD8204	48T15541Y53	DIO,ZEN MAZS0560H-CP

=======SW P.W.Board

C4501	08S35374W12	CAP,CER 106K-B0J -CP
C4502	08S45676W84	CAP,CER 683K-B1C -CP
C4503	08S35349Y12	CAP,CER 105K-B0J -CP
CB4502	09T45391Y13	FFC,IMSA9632S-13Y-E9
IC4501	51T55628Y01	RS-671 -NE2
IC4502	51T75076Y01	TPS851 -CP
LD4501	48-01404Z03	LED,BLU SML512BC4TCP
LD4502	48-01404Z03	LED,BLU SML512BC4TCP
LD4503	48-01404Z03	LED,BLU SML512BC4TCP
LD4504	48-01404Z03	LED,BLU SML512BC4TCP
LD4505	48-01404Z03	LED,BLU SML512BC4TCP
LD4506	48-01404Z03	LED,BLU SML512BC4TCP
LD4507	48T25534Y02	LED,RED BR1111C -CP
R4501	06S55363Y33	RES,RK 47RJ 1/8 -CP
R4502	06S55361Y54	RES,RK 361J 1/4 -CP
R4503	06S55361Y54	RES,RK 361J 1/4 -CP
R4504	06S15593Y83	RES,RK 273F 1/10 -CP
R4505	06S15593Y71	RES,RK 822F 1/10 -CP
R4506	06S45674W57	RES,RK 102J 1/10 -CP
R4507	06S15593Y63	RES,RK 392F 1/10 -CP
R4508	06S64995F21	RES,RK 47RJ 1/8 -CP
R4509	06S15593Y59	RES,RK 272F 1/10 -CP
R4511	06S45675W36	RES,RK 335J 1/10 -CP
R4512	06S45674W57	RES,RK 102J 1/10 -CP
R4513	06S55361Y62	RES,RK 751J 1/4 -CP
R4520	06S55361Y63	RES,RK 821J 1/4 -CP
R4521	06S55361Y77	RES,RK 332J 1/4 -CP
SW4501	40T65353Y01	SW,TACT SKRPACE010E2
SW4502	40T65353Y01	SW,TACT SKRPACE010E2
SW4503	40T65353Y01	SW,TACT SKRPACE010E2
SW4504	40T65353Y01	SW,TACT SKRPACE010E2
SW4505	40T65353Y01	SW,TACT SKRPACE010E2
SW4506	40T65353Y01	SW,TACT SKRPACE010E2

=======OPT P.W.Board

C6500	08S45676W80	CAP,CER 223K-B1E -CP
R6500	06S55361Y87	RES,RK 822J 1/4 -CP

=======DV-MAIN P.W.Board

C501	08T81833F13	CAP,CER 106K-B1C -CP
C505	08T81833F13	CAP,CER 106K-B1C -CP
C601	08S45232Y05	CAP,CER 102K-B1H -CP
C602	08S45232Y05	CAP,CER 102K-B1H -CP
C603	08S45232Y05	CAP,CER 102K-B1H -CP
C604	08S45232Y05	CAP,CER 102K-B1H -CP
C605	08S45232Y05	CAP,CER 102K-B1H -CP
C606	08S45232Y05	CAP,CER 102K-B1H -CP
C607	08S45232Y05	CAP,CER 102K-B1H -CP
C608	08S45232Y05	CAP,CER 102K-B1H -CP
C609	08S45232Y05	CAP,CER 102K-B1H -CP
C610	08S45232Y05	CAP,CER 102K-B1H -CP
C611	08S45232Y05	CAP,CER 102K-B1H -CP

C612	08S45232Y05	CAP,CER 102K-B1H -CP
C613	08S45232Y05	CAP,CER 102K-B1H -CP
C614	08S45676W87	CAP,CER 333K-B1E -CP
C615	08S45232Y17	CAP,CER 104K-B0J -CP
C616	08S45232Y17	CAP,CER 104K-B0J -CP
C617	08S45232Y17	CAP,CER 104K-B0J -CP
C618	08S45676W70	CAP,CER 562K-B1H -CP
C619	08S45676W79	CAP,CER 183K-B1E -CP
C620	08S45232Y17	CAP,CER 104K-B0J -CP
C621	08S45232Y17	CAP,CER 104K-B0J -CP
C622	08S45232Y17	CAP,CER 104K-B0J -CP
C623	08S45232Y17	CAP,CER 104K-B0J -CP
C624	08S45232Y05	CAP,CER 102K-B1H -CP
C625	08S45232Y17	CAP,CER 104K-B0J -CP
C626	08S45232Y17	CAP,CER 104K-B0J -CP
C627	08S45232Y17	CAP,CER 104K-B0J -CP
C632	08S45232Y05	CAP,CER 102K-B1H -CP
C633	08S45232Y05	CAP,CER 102K-B1H -CP
C634	08S45232Y05	CAP,CER 102K-B1H -CP
C635	08S45232Y05	CAP,CER 102K-B1H -CP
C636	08S45232Y05	CAP,CER 102K-B1H -CP
C637	08S45232Y05	CAP,CER 102K-B1H -CP
C638	08S45232Y05	CAP,CER 102K-B1H -CP
C639	08S45232Y05	CAP,CER 102K-B1H -CP
C640	08S45232Y05	CAP,CER 102K-B1H -CP
C641	08S45232Y05	CAP,CER 102K-B1H -CP
C642	08S45232Y05	CAP,CER 102K-B1H -CP
C643	08S45232Y05	CAP,CER 102K-B1H -CP
C644	08S45232Y05	CAP,CER 102K-B1H -CP
C645	08S45232Y05	CAP,CER 102K-B1H -CP
C646	08S45232Y05	CAP,CER 102K-B1H -CP
C647	08S45232Y05	CAP,CER 102K-B1H -CP
C648	08S45232Y05	CAP,CER 102K-B1H -CP
C651	08S65670Y01	CAP,CER 106KX5R1C-CP
C652	08S65670Y01	CAP,CER 106KX5R1C-CP
C654	08S45232Y05	CAP,CER 102K-B1H -CP
C655	08S45232Y17	CAP,CER 104K-B0J -CP
C658	08S35374W12	CAP,CER 106K-B0J -CP
C671	08S45232Y11	CAP,CER 103K-B1C -CP
C672	08S45232Y17	CAP,CER 104K-B0J -CP
C673	08S45232Y17	CAP,CER 104K-B0J -CP
C674	08S45232Y17	CAP,CER 104K-B0J -CP
C675	08S45232Y17	CAP,CER 104K-B0J -CP
C676	08S45232Y17	CAP,CER 104K-B0J -CP
C677	08S45232Y17	CAP,CER 104K-B0J -CP
C678	08S45232Y09	CAP,CER 472K-B1E -CP
C679	08S45232Y17	CAP,CER 104K-B0J -CP
C680	08S35349Y16	CAP,CER 105K-B1A -CP
C681	08S35349Y16	CAP,CER 105K-B1A -CP
C682	08S45232Y17	CAP,CER 104K-B0J -CP
C683	08S45232Y17	CAP,CER 104K-B0J -CP
C684	08S45232Y17	CAP,CER 104K-B0J -CP
C685	08S45232Y17	CAP,CER 104K-B0J -CP
C688	08S45232Y07	CAP,CER 222K-B1H -CP
C689	08S45232Y07	CAP,CER 222K-B1H -CP
C690	08S45232Y11	CAP,CER 103K-B1C -CP
C691	08S45231Y13	CAP,CER 10RD-CH1H-CP

C692	08S45231Y19	CAP,CER 33RJ-CH1H-CP
C693	08S45231Y22	CAP,CER 56RJ-CH1H-CP
C694	08S45231Y19	CAP,CER 33RJ-CH1H-CP
C696	08S45231Y22	CAP,CER 56RJ-CH1H-CP
C721	08S45232Y17	CAP,CER 104K-B0J -CP
C725	08S45232Y17	CAP,CER 104K-B0J -CP
C732	08S45232Y05	CAP,CER 102K-B1H -CP
C733	08S45232Y17	CAP,CER 104K-B0J -CP
C734	08S45232Y05	CAP,CER 102K-B1H -CP
C735	08S45232Y05	CAP,CER 102K-B1H -CP
C736	08S45232Y17	CAP,CER 104K-B0J -CP
C737	08S45232Y17	CAP,CER 104K-B0J -CP
C738	08S45232Y05	CAP,CER 102K-B1H -CP
C739	08S45232Y05	CAP,CER 102K-B1H -CP
C801	08T65555Y01	CAP,CER 226K-BJ0J-CP
C802	08T65555Y01	CAP,CER 226K-BJ0J-CP
C804	08S45676W80	CAP,CER 223K-B1E -CP
C811	08T65555Y01	CAP,CER 226K-BJ0J-CP
C812	08T65555Y01	CAP,CER 226K-BJ0J-CP
C814	08S45676W80	CAP,CER 223K-B1E -CP
C821	08S45232Y13	CAP,CER 223K-B1C -CP
C831	08S45232Y13	CAP,CER 223K-B1C -CP
C841	08S45232Y17	CAP,CER 104K-B0J -CP
C842	08T65555Y01	CAP,CER 226K-BJ0J-CP
C843	08S45232Y17	CAP,CER 104K-B0J -CP
C844	08T65555Y01	CAP,CER 226K-BJ0J-CP
C845	08S45232Y17	CAP,CER 104K-B0J -CP
C846	08S45232Y17	CAP,CER 104K-B0J -CP
C850	08S45232Y08	CAP,CER 332K-B1H -CP
C851	08S45232Y08	CAP,CER 332K-B1H -CP
C854	08S45232Y11	CAP,CER 103K-B1C -CP
C855	08S45232Y08	CAP,CER 332K-B1H -CP
C860	08T81833F13	CAP,CER 106K-B1C -CP
C861	08S45232Y17	CAP,CER 104K-B0J -CP
C862	08T81833F13	CAP,CER 106K-B1C -CP
C865	08S65668Y04	CAP,CER 104KX5R1A-CP
C867	08T81833F13	CAP,CER 106K-B1C -CP
C868	08S35374W10	CAP,CER 225K-B1A -CP
C869	08S35374W10	CAP,CER 225K-B1A -CP
C870	08S65668Y04	CAP,CER 104KX5R1A-CP
C871	08S45232Y11	CAP,CER 103K-B1C -CP
C872	08S45232Y17	CAP,CER 104K-B0J -CP
C874	08S45232Y17	CAP,CER 104K-B0J -CP
C875	08S45232Y17	CAP,CER 104K-B0J -CP
C876	08S45232Y11	CAP,CER 103K-B1C -CP
C878	08S45232Y08	CAP,CER 332K-B1H -CP
C880	08T81833F13	CAP,CER 106K-B1C -CP
C881	08S45231Y25	CAP,CER 101J-CH1H-CP
C882	08S45677W40	CAP,CER.151J-CH1H-CP
C883	08S45677W40	CAP,CER.151J-CH1H-CP
C884	08S45231Y25	CAP,CER 101J-CH1H-CP
C885	08S45677W40	CAP,CER.151J-CH1H-CP
C886	08S45677W40	CAP,CER.151J-CH1H-CP
C901	08S65667Y05	CAP,CER 105KX5R1A-CP
C902	08S65667Y05	CAP,CER 105KX5R1A-CP
C903	08S45232Y11	CAP,CER 103K-B1C -CP
C904	08S45232Y17	CAP,CER 104K-B0J -CP

CB501	09T45442Y45	FFC,54104-4592 -EQ
CB502	09T15107Y24	FFC,52435-2491 -ED
CB504	09T15107Y10	FFC,52745-1090 -E9
CB801	09T15107Y28	FFC,52435-2891 -ED
CB861	09T15107Y24	FFC,52435-2491 -ED
D801	48-04465Z01	DIO,MA2711100L-TX-CP
D802	48-04465Z01	DIO,MA2711100L-TX-CP
IC601	51-03558Z02	MN35206UB -QT
IC721	53-07956Z14	OFL,V3.007DV37M15B
IC725	51-00726Z02	MB85R256PFCN-G -ST
IC731	51-04556Z01	UPD45128163G5-A75-ST
IC861	51T55021Y02	BD7905BFS-E2 -SEE
L501	24T65689Y01	FBI,FBMJ2125HS420-CP
L502	24T65689Y01	FBI,FBMJ2125HS420-CP
L503	24T65689Y01	FBI,FBMJ2125HS420-CP
L601	24T95456W27	FBI,BLM18PG181SH1-CP
L841	24T25164Y25	IND,FSLM2520 10RJ-CP
L912	24T65331Y07	IND,LEMF2520 10RK-CP
L922	24T65331Y07	IND,LEMF2520 10RK-CP
Q601	48T45251W03	TR ,UN5212 22-22 -CP
Q602	48T15656Y01	TR,2SC4617-TL -CP
Q801	48T75011W01	TR,2SD1782K-PQR-6-CP
Q802	48T55462Y01	TR,2SB1132-QR-100-E2
Q810	48T75366Y06	TR,FMC2-T148 -CP
Q811	48T75011W01	TR,2SD1782K-PQR-6-CP
Q812	48T55462Y01	TR,2SB1132-QR-100-E2
Q831	48T25137Y02	TR,UN9212J-TX -CP
Q832	48T25137Y06	TR,UN9216J-TX -CP
Q833	48T25137Y06	TR,UN9216J-TX -CP
R10	06S15616Y23	RES,RK JUMPER1/16-CP
R11	06S15616Y23	RES,RK JUMPER1/16-CP
R12	06S15616Y23	RES,RK JUMPER1/16-CP
R13	06S15616Y23	RES,RK JUMPER1/16-CP
R14	06S15616Y23	RES,RK JUMPER1/16-CP
R15	06S15616Y23	RES,RK JUMPER1/16-CP
R16	06S15616Y23	RES,RK JUMPER1/16-CP
R17	06S15616Y23	RES,RK JUMPER1/16-CP
R501	06S15615Y81	RES,RK 223J 1/16 -CP
R502	06S15615Y81	RES,RK 223J 1/16 -CP
R503	06S15615Y81	RES,RK 223J 1/16 -CP
R504	06S15615Y81	RES,RK 223J 1/16 -CP
R505	06S15615Y81	RES,RK 223J 1/16 -CP
R506	06S15615Y81	RES,RK 223J 1/16 -CP
R512	06S15615Y81	RES,RK 223J 1/16 -CP
R513	06S15615Y81	RES,RK 223J 1/16 -CP
R514	06S15615Y25	RES,RK 101J 1/16 -CP
R515	06S15615Y81	RES,RK 223J 1/16 -CP
R516	06S15615Y81	RES,RK 223J 1/16 -CP
R519	06S15615Y25	RES,RK 101J 1/16 -CP
R520	06S15615Y25	RES,RK 101J 1/16 -CP
R521	06S15615Y25	RES,RK 101J 1/16 -CP
R551	06S15615Y49	RES,RK 102J 1/16 -CP
R552	06S15615Y81	RES,RK 223J 1/16 -CP
R553	06S15615Y49	RES,RK 102J 1/16 -CP
R561	06S15615Y17	RES,RK 47RJ 1/16 -CP
R562	06S15615Y25	RES,RK 101J 1/16 -CP
R563	06S15615Y25	RES,RK 101J 1/16 -CP

R564	06S15615Y25	RES,RK 101J 1/16 -CP
R565	06S15615Y25	RES,RK 101J 1/16 -CP
R566	06S15616Y23	RES,RK JUMPER1/16-CP
R567	06S15615Y23	RES,RK 82RJ 1/16 -CP
R568	06S15615Y25	RES,RK 101J 1/16 -CP
R569	06S15615Y17	RES,RK 47RJ 1/16 -CP
R570	06S15615Y17	RES,RK 47RJ 1/16 -CP
R571	06S15615Y17	RES,RK 47RJ 1/16 -CP
R572	06S15615Y17	RES,RK 47RJ 1/16 -CP
R573	06S15615Y17	RES,RK 47RJ 1/16 -CP
R574	06S15615Y17	RES,RK 47RJ 1/16 -CP
R575	06S15615Y17	RES,RK 47RJ 1/16 -CP
R576	06S15615Y25	RES,RK 101J 1/16 -CP
R577	06S15615Y21	RES,RK 68RJ 1/16 -CP
R601	06S15615Y65	RES,RK 472J 1/16 -CP
R604	06S15615Y81	RES,RK 223J 1/16 -CP
R611	06S15615Y81	RES,RK 223J 1/16 -CP
R613	06S15615Y81	RES,RK 223J 1/16 -CP
R614	06S15615Y81	RES,RK 223J 1/16 -CP
R617	06S15593Y53	RES,RK 152F 1/10 -CP
R618	06S15593Y97	RES,RK 104F 1/10 -CP
R619	06S15593Y59	RES,RK 272F 1/10 -CP
R620	06S15594Y02	RES,RK 154F 1/10 -CP
R625	06S15615Y81	RES,RK 223J 1/16 -CP
R626	06S15616Y23	RES,RK JUMPER1/16-CP
R627	06S15615Y13	RES,RK 33RJ 1/16 -CP
R628	06S15615Y13	RES,RK 33RJ 1/16 -CP
R629	06S15615Y13	RES,RK 33RJ 1/16 -CP
R630	06S15615Y81	RES,RK 223J 1/16 -CP
R634	06S15615Y81	RES,RK 223J 1/16 -CP
R635	06S15615Y81	RES,RK 223J 1/16 -CP
R636	06S15615Y81	RES,RK 223J 1/16 -CP
R637	06S15615Y81	RES,RK 223J 1/16 -CP
R638	06S15615Y81	RES,RK 223J 1/16 -CP
R639	06S15615Y81	RES,RK 223J 1/16 -CP
R641	06S15615Y25	RES,RK 101J 1/16 -CP
R642	06S15615Y25	RES,RK 101J 1/16 -CP
R643	06S15615Y25	RES,RK 101J 1/16 -CP
R644	06S15615Y25	RES,RK 101J 1/16 -CP
R645	06S15615Y25	RES,RK 101J 1/16 -CP
R646	06S15615Y25	RES,RK 101J 1/16 -CP
R647	06S15615Y25	RES,RK 101J 1/16 -CP
R648	06S15615Y25	RES,RK 101J 1/16 -CP
R649	06S15615Y25	RES,RK 101J 1/16 -CP
R650	06S15615Y25	RES,RK 101J 1/16 -CP
R651	06S15615Y25	RES,RK 101J 1/16 -CP
R652	06S15615Y25	RES,RK 101J 1/16 -CP
R653	06S15615Y25	RES,RK 101J 1/16 -CP
R654	06S15615Y25	RES,RK 101J 1/16 -CP
R655	06S15615Y25	RES,RK 101J 1/16 -CP
R656	06S15615Y25	RES,RK 101J 1/16 -CP
R659	06S15615Y21	RES,RK 68RJ 1/16 -CP
R660	06S15615Y21	RES,RK 68RJ 1/16 -CP
R661	06S15615Y21	RES,RK 68RJ 1/16 -CP
R662	06S15615Y21	RES,RK 68RJ 1/16 -CP
R663	06S15615Y21	RES,RK 68RJ 1/16 -CP
R664	06S15615Y21	RES,RK 68RJ 1/16 -CP

R665	06S15615Y21	RES,RK 68RJ 1/16 -CP
R666	06S15615Y21	RES,RK 68RJ 1/16 -CP
R667	06S15615Y21	RES,RK 68RJ 1/16 -CP
R668	06S15615Y21	RES,RK 68RJ 1/16 -CP
R669	06S15615Y21	RES,RK 68RJ 1/16 -CP
R670	06S15615Y21	RES,RK 68RJ 1/16 -CP
R671	06S15615Y21	RES,RK 68RJ 1/16 -CP
R672	06S15615Y21	RES,RK 68RJ 1/16 -CP
R673	06S15615Y21	RES,RK 68RJ 1/16 -CP
R674	06S15615Y01	RES,RK 10RJ 1/16 -CP
R675	06S15615Y17	RES,RK 47RJ 1/16 -CP
R676	06S15615Y21	RES,RK 68RJ 1/16 -CP
R677	06S15615Y21	RES,RK 68RJ 1/16 -CP
R678	06S15615Y21	RES,RK 68RJ 1/16 -CP
R679	06S15615Y21	RES,RK 68RJ 1/16 -CP
R680	06S15615Y21	RES,RK 68RJ 1/16 -CP
R681	06S15615Y25	RES,RK 101J 1/16 -CP
R682	06S15615Y21	RES,RK 68RJ 1/16 -CP
R683	06S15615Y25	RES,RK 101J 1/16 -CP
R684	06S15615Y25	RES,RK 101J 1/16 -CP
R685	06S15615Y25	RES,RK 101J 1/16 -CP
R686	06S15615Y25	RES,RK 101J 1/16 -CP
R687	06S15615Y25	RES,RK 101J 1/16 -CP
R688	06S15615Y25	RES,RK 101J 1/16 -CP
R689	06S15615Y25	RES,RK 101J 1/16 -CP
R690	06S15615Y25	RES,RK 101J 1/16 -CP
R691	06S15615Y25	RES,RK 101J 1/16 -CP
R692	06S15615Y25	RES,RK 101J 1/16 -CP
R693	06S15615Y25	RES,RK 101J 1/16 -CP
R694	06S15615Y25	RES,RK 101J 1/16 -CP
R695	06S15615Y25	RES,RK 101J 1/16 -CP
R696	06S15615Y25	RES,RK 101J 1/16 -CP
R697	06S15615Y81	RES,RK 223J 1/16 -CP
R698	06S15615Y81	RES,RK 223J 1/16 -CP
R700	06S15616Y23	RES,RK JUMPER1/16-CP
R701	06S15616Y23	RES,RK JUMPER1/16-CP
R703	06S15615Y17	RES,RK 47RJ 1/16 -CP
R771	06S15615Y81	RES,RK 223J 1/16 -CP
R772	06S15615Y81	RES,RK 223J 1/16 -CP
R773	06S15615Y81	RES,RK 223J 1/16 -CP
R774	06S15615Y81	RES,RK 223J 1/16 -CP
R775	06S15615Y81	RES,RK 223J 1/16 -CP
R776	06S15615Y81	RES,RK 223J 1/16 -CP
R777	06S15615Y81	RES,RK 223J 1/16 -CP
R778	06S15615Y81	RES,RK 223J 1/16 -CP
R779	06S15615Y81	RES,RK 223J 1/16 -CP
R780	06S15615Y81	RES,RK 223J 1/16 -CP
R781	06S15615Y81	RES,RK 223J 1/16 -CP
R782	06S15615Y81	RES,RK 223J 1/16 -CP
R783	06S15615Y81	RES,RK 223J 1/16 -CP
R784	06S15615Y81	RES,RK 223J 1/16 -CP
R785	06S15615Y81	RES,RK 223J 1/16 -CP
R786	06S15615Y81	RES,RK 223J 1/16 -CP
R801	06S15615Y41	RES,RK 471J 1/16 -CP
R802	06S15615Y41	RES,RK 471J 1/16 -CP
R803	06S15615Y09	RES,RK 22RJ 1/16 -CP
R804	06S45675W43	RES,RK JUMPER1/10-CP

R805	06S65522Y22	RES,RK 5R6F 1/4 -CP
R806	06S45675W06	RES,RK 104J 1/10 -CP
R811	06S15615Y41	RES,RK 471J 1/16 -CP
R812	06S15615Y41	RES,RK 471J 1/16 -CP
R813	06S15615Y09	RES,RK 22RJ 1/16 -CP
R814	06S45675W43	RES,RK JUMPER1/10-CP
R815	06S65522Y22	RES,RK 5R6F 1/4 -CP
R816	06S45675W06	RES,RK 104J 1/10 -CP
R821	06S65522Y22	RES,RK 5R6F 1/4 -CP
R822	06S35083Y52	RES,RK 1R0F 1/4 -CP
R825	06S15616Y23	RES,RK JUMPER1/16-CP
R826	06S15616Y23	RES,RK JUMPER1/16-CP
R827	06S15616Y23	RES,RK JUMPER1/16-CP
R830	06S15615Y25	RES,RK 101J 1/16 -CP
R831	06S15615Y49	RES,RK 102J 1/16 -CP
R832	06S15615Y23	RES,RK 82RJ 1/16 -CP
R833	06S15615Y23	RES,RK 82RJ 1/16 -CP
R835	06S15615Y25	RES,RK 101J 1/16 -CP
R844	06S15616Y23	RES,RK JUMPER1/16-CP
R849	06S15616Y23	RES,RK JUMPER1/16-CP
R850	06S15616Y23	RES,RK JUMPER1/16-CP
R851	06S15616Y23	RES,RK JUMPER1/16-CP
R852	06S15616Y23	RES,RK JUMPER1/16-CP
R853	06S15616Y23	RES,RK JUMPER1/16-CP
R854	06S15616Y23	RES,RK JUMPER1/16-CP
R855	06S15615Y25	RES,RK 101J 1/16 -CP
R856	06S15615Y73	RES,RK 103J 1/16 -CP
R857	06S15615Y73	RES,RK 103J 1/16 -CP
R858	06S15615Y25	RES,RK 101J 1/16 -CP
R859	06S15615Y25	RES,RK 101J 1/16 -CP
R860	06S15615Y73	RES,RK 103J 1/16 -CP
R861	06S45674W02	RES,RK 2R7J 1/10 -CP
R862	06S45674W02	RES,RK 2R7J 1/10 -CP
R863	06S45674W02	RES,RK 2R7J 1/10 -CP
R864	06S45674W02	RES,RK 2R7J 1/10 -CP
R865	06S45674W02	RES,RK 2R7J 1/10 -CP
R866	06S45674W02	RES,RK 2R7J 1/10 -CP
R867	06S45674W02	RES,RK 2R7J 1/10 -CP
R868	06S45674W02	RES,RK 2R7J 1/10 -CP
R869	06S45674W02	RES,RK 2R7J 1/10 -CP
R870	06S45674W02	RES,RK 2R7J 1/10 -CP
R876	06S15615Y33	RES,RK 221J 1/16 -CP
R877	06S15615Y27	RES,RK 121J 1/16 -CP
R878	06S15615Y73	RES,RK 103J 1/16 -CP
R880	06S15616Y23	RES,RK JUMPER1/16-CP
R881	06S15615Y73	RES,RK 103J 1/16 -CP
R882	06S15615Y81	RES,RK 223J 1/16 -CP
R883	06S15615Y25	RES,RK 101J 1/16 -CP
R884	06S15615Y73	RES,RK 103J 1/16 -CP
R885	06S15615Y81	RES,RK 223J 1/16 -CP
R886	06S15615Y25	RES,RK 101J 1/16 -CP
R889	06S15615Y25	RES,RK 101J 1/16 -CP
R890	06S15615Y81	RES,RK 223J 1/16 -CP
R891	06S15616Y23	RES,RK JUMPER1/16-CP
R896	06S15615Y73	RES,RK 103J 1/16 -CP
R897	06S15615Y73	RES,RK 103J 1/16 -CP
R901	06S15616Y32	RES,RK 6R8J 1/16 -CP

R902	06-02713Z03	RES,RK 223D 1/16 -CP
R903	06S65415Y38	RES,RK 123F 1/16 -CP
R904	06S65415Y33	RES,RK 472F 1/16 -CP
R905	06S65415Y37	RES,RK 103F 1/16 -CP
R911	06-02741Z01	RES,RK 331D 1/16 -CP
R912	06-02741Z01	RES,RK 331D 1/16 -CP
R921	06S15593Y37	RES,RK 331F 1/10 -CP
R922	06S15593Y37	RES,RK 331F 1/10 -CP
R931	06S64996F43	RES,RK 1R5J 1/8 -CP
R932	06S64996F43	RES,RK 1R5J 1/8 -CP
R933	06S64996F43	RES,RK 1R5J 1/8 -CP
R934	06S64996F43	RES,RK 1R5J 1/8 -CP
R935	06S64996F43	RES,RK 1R5J 1/8 -CP
R936	06S64996F43	RES,RK 1R5J 1/8 -CP
TH601	48T75201Y03	TMT,NCP15XH103F0S-CP
TH602	48T75201Y03	TMT,NCP15XH103F0S-CP
VR901	18T25572Y11	VAR,RH03ADC 472-X-CP
XL601	91T75115Y01	XTL,FXO-64FL2 27M-E2
Z575	91T75196Y23	EMI,BK1005LL181 -CP
Z576	91T75196Y23	EMI,BK1005LL181 -CP
Z577	91T75196Y23	EMI,BK1005LL181 -CP
Z578	91T75196Y23	EMI,BK1005LL181 -CP
Z579	91T75196Y23	EMI,BK1005LL181 -CP
Z580	91T75196Y02	EMI,BK1005LL680 -CP
Z581	91T75196Y23	EMI,BK1005LL181 -CP
Z582	91T75196Y03	EMI,BK1005LL100 -CP
Z583	91T75196Y03	EMI,BK1005LL100 -CP
Z584	91T75196Y03	EMI,BK1005LL100 -CP
Z585	91T75196Y03	EMI,BK1005LL100 -CP
Z586	91T75196Y03	EMI,BK1005LL100 -CP
Z589	91T75196Y23	EMI,BK1005LL181 -CP

=======Miscellaneous


ANT1001	09-05941Z01	ASSY,ANT CABLE W100A
CB1031	09T13515W06	WTB,5569-06A1 -DB
CB3050	09T35473Y16	WTB,F169B001-16 -DB
CH3001	09-07002Z01	ASSY,ANIA-0001-01A
DIN2001	09T55071W11	CON,TCP9389-11 -DT
DIN4001	09-05377Z01	DIN,TC7753-019117-DB
DIN6201	09T15462Y02	DIN,TCS7741-01WA –DB
ET3702	09-05997Z01	ASSY,ANID-0029-01A
FR4501	50-02759Z01	ASSY,AFL12A901A
IC6500	51T75111W01	TOTX193 -DS
JK2001	09T03083K01	RCA,AV6-901C -DB
JK2522	09-07595Z01	RCA,AV-8.4-4E-002-DB
JK6301	09T55293Y01	JAC,HSJ6061-01-440DB
LCD8002	65-01708Z01	ASSY,LB065WQ2
M3001	59-02037Z01	MOTOR,FF-180SH-13260
M3051	59T55190Y19	MOTOR,F2510CT-12UCV
SW5121	40T15494Y15	SW,DETCT SPVG1107-E6
SW5124	40T15494Y14	SW,DETCT SPVG2106-E6

=======DV37M15B

HD101	EP-00830Z01	ED21A51L
M101	59-03798Z01	MOTOR,M1N10RB95G
M102	59-02071Z01	MOTOR,24C0303020
M103	59T65142Y01	MOTOR,MSDV020L01

SW406	40T15494Y12	SW,DETCT SPVG2303-E6
SW801	40T55230Y01	SW,DETCT ESE13V01CE5
SW802	40T55230Y01	SW,DETCT ESE13V01CE5
SW803	40T55043Y02	SW,DETCT SPVL12 -E5
SW804	40T15494Y12	SW,DETCT SPVG2303-E6
SW805	40T55230Y01	SW,DETCT ESE13V01CE5


Exploded View (Cabinet)(1/3)

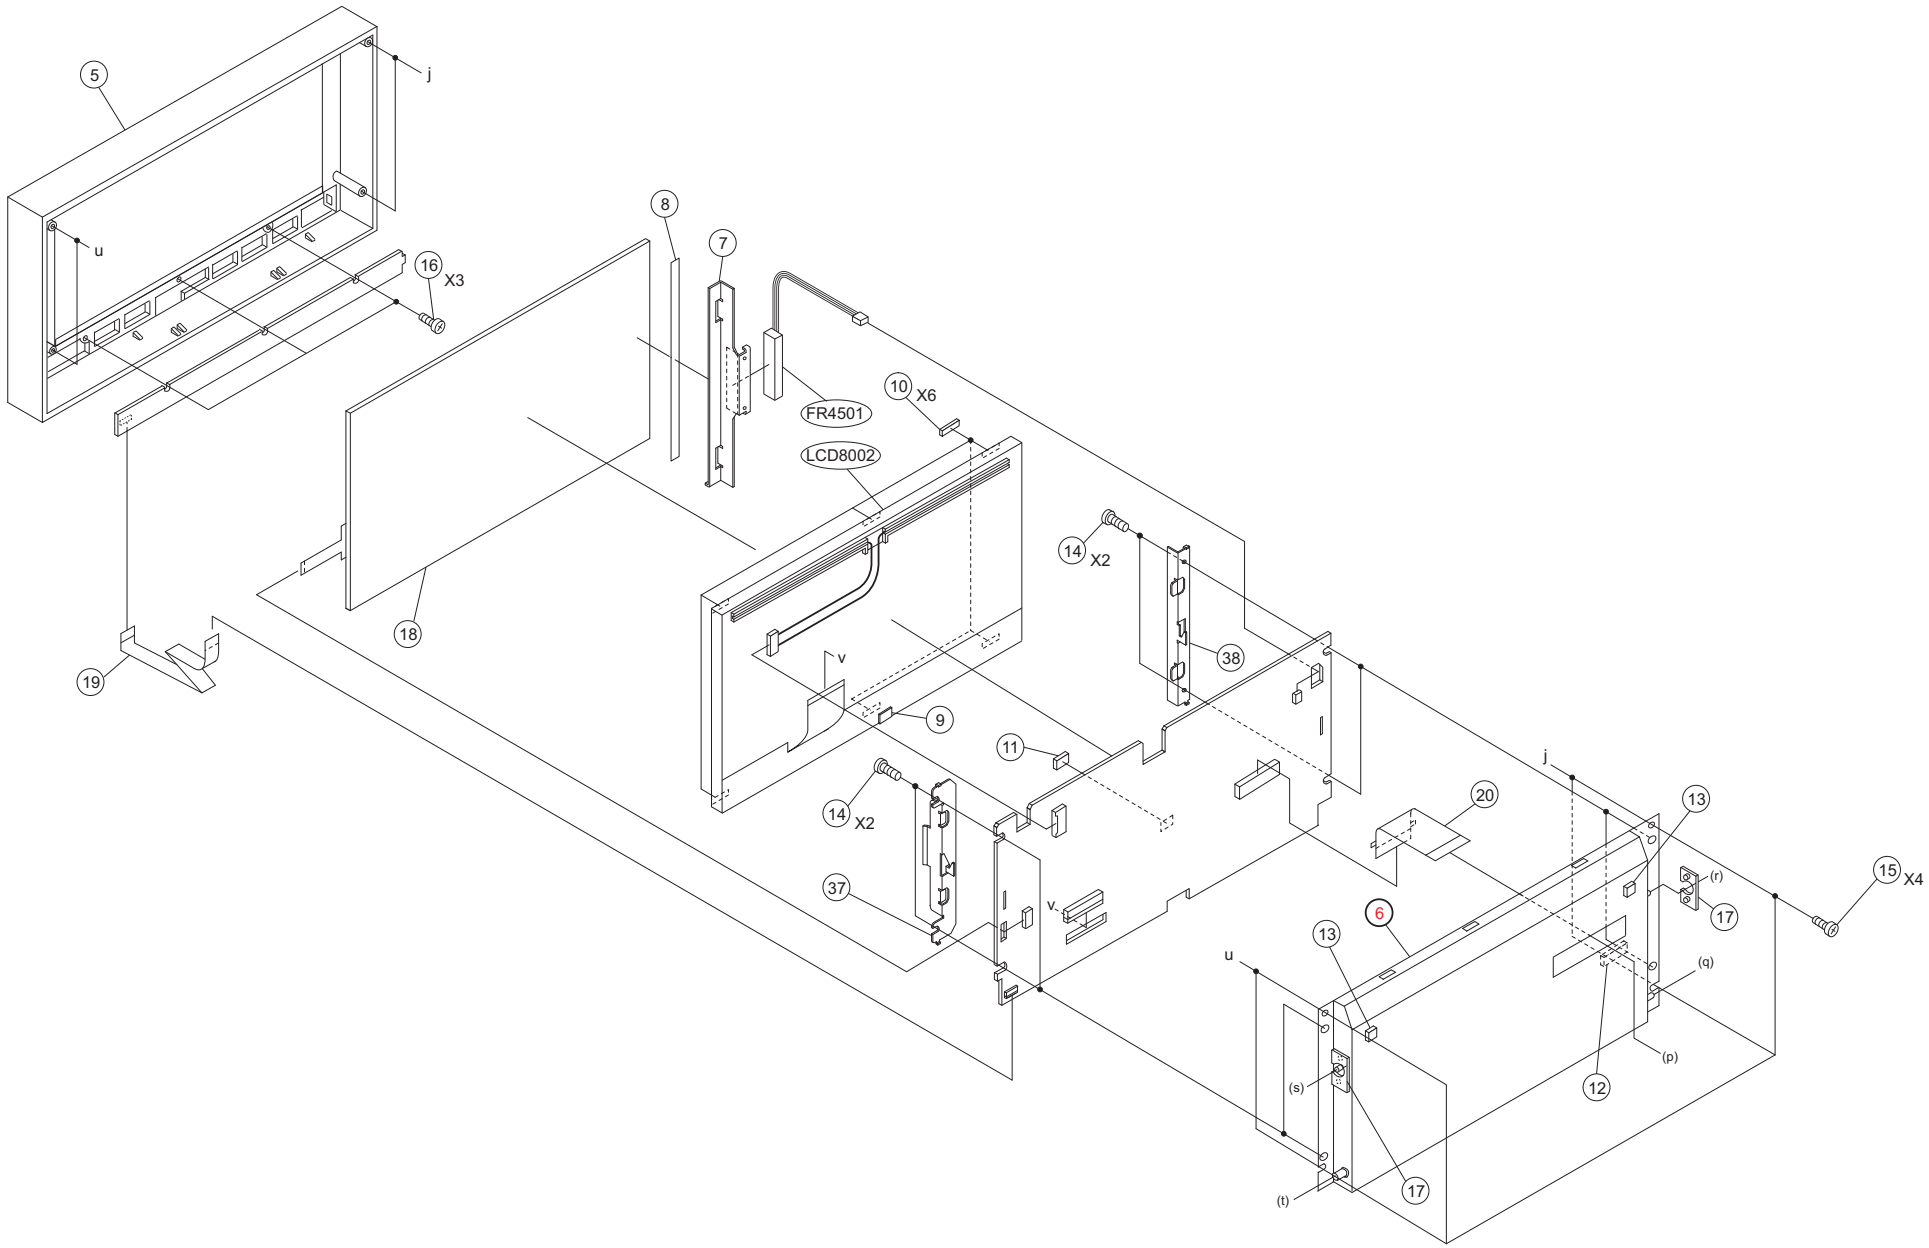

NOTE : The place of the connection of (p) , (q) , (r) , (s) (t) as shown in ( ), is mentioned in the "Exploded View (Cabinet) (2/3)".

TO PARTS LIST TO CONTENTS

Exploded View (Cabinet)(2/3)

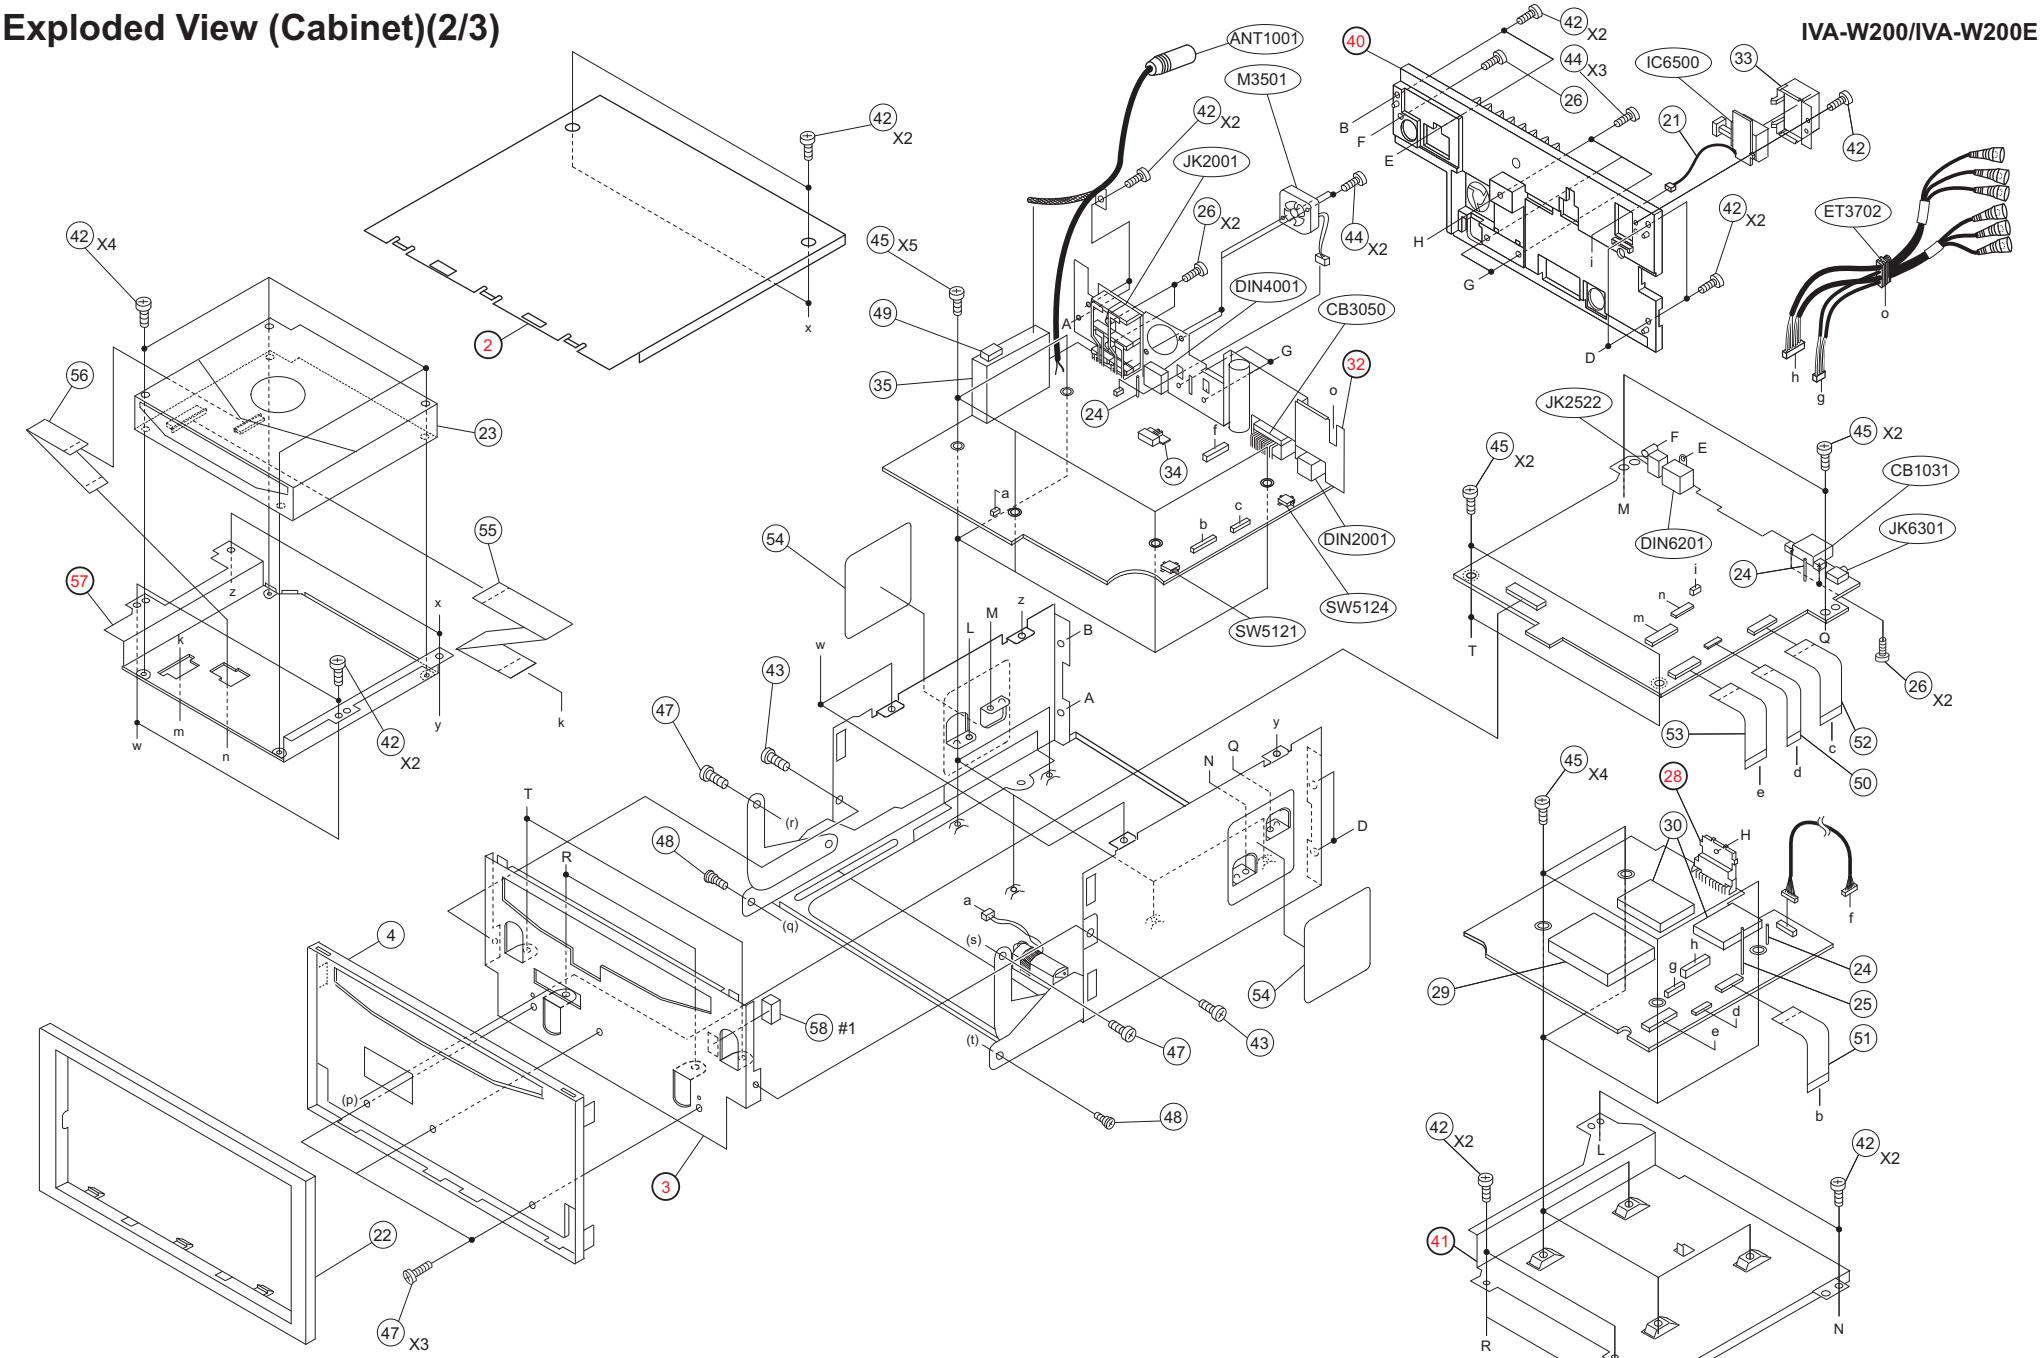


NOTE 1 : The place of the connection of (p) , (q) , (r) , (s) , (t) as shown in ( ), is mentioned in the "Exploded View (Cabinet) (1/3)".

NOTE2 : #1 : North American Model Only
Others : Common.

TO PARTS LIST TO CONTENTS

Exploded View (Cabinet)(3/3)

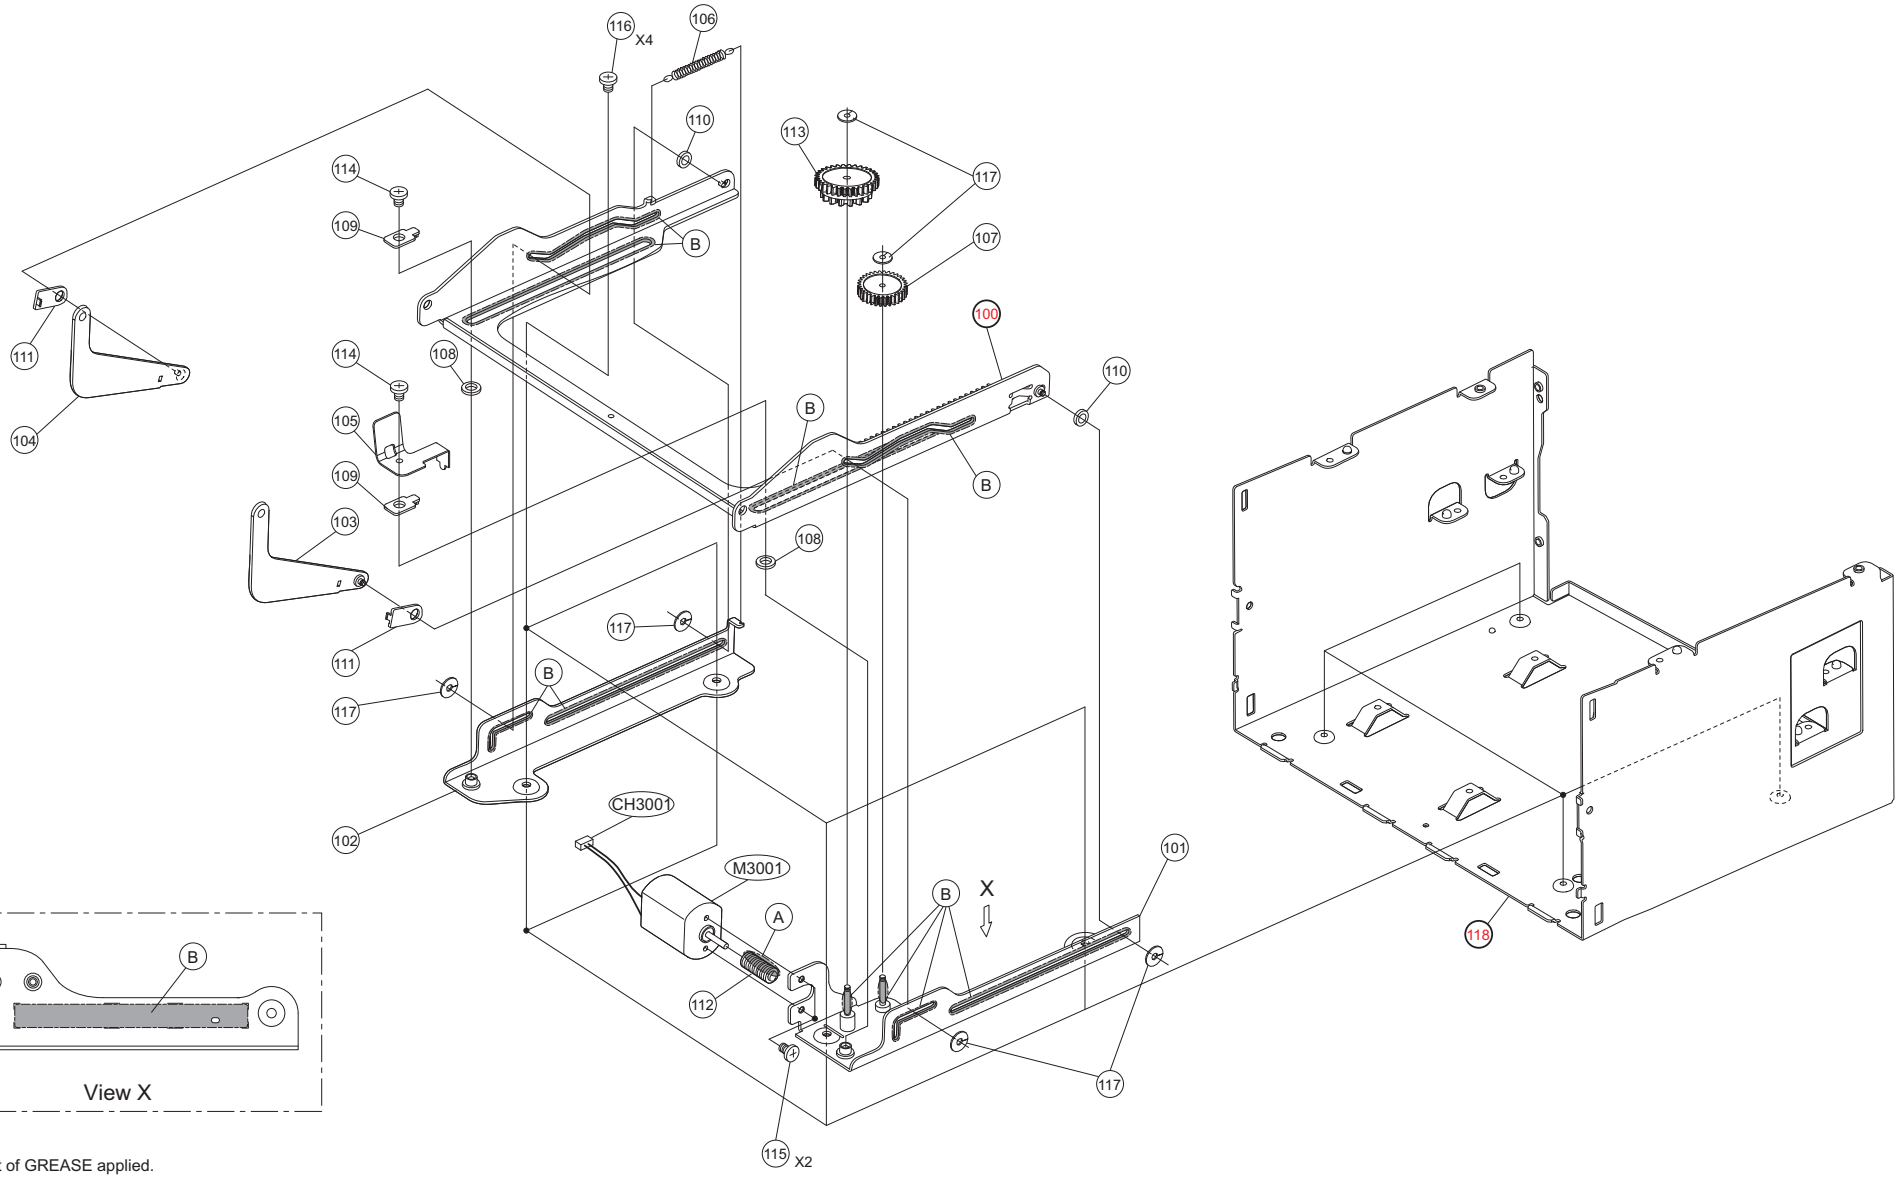

.....paint of GREASE applied.

Ⓐ	GREASE,G-8007(11S41558Y01)
Ⓑ	GREASE,G-1017(11T65588Y01)

TO PARTS LIST TO CONTENTS

Cabinet Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.


#1 : For North American Model Only,
$1 : For General Foreign (Region3) Model Only,
%1 : For General Foreign (Region4) Model Only,
&1 : For Chinese Model Only,
Others : Common.

	2	- - - - - - - - - - -	COVER,TOP
	3	- - - - - - - - - - -	BKT,ESC
#1	4	EN-05951Z01	NOSE,BASE ASSY
$1	4	EN-05951Z03	NOSE,BASE ASSY
%1	4	EN-05951Z03	NOSE,BASE ASSY
&1	4	EN-05951Z03	NOSE,BASE ASSY
#1	5	EN-05626Z01	NOSE,MONITER ASSY
$1	5	EN-05626Z03	NOSE,MONITER ASSY
%1	5	EN-05626Z03	NOSE,MONITER ASSY
&1	5	EN-05626Z03	NOSE,MONITER ASSY
	6	- - - - - - - - - - -	ASSY,RIB BKT MONITOR
	7	07-05631Z01	BKT,FORCE
	8	14S31545Y99	INS,CVR 88X3.5XT0.2
	9	14S50096Y06	INS,CVR 10X5XT0.188
	10	75S61553Y94	CUS,RUB 15X2XT1.3
	11	75S61553Y96	CUS,RUB 10X6XT1.5
	12	75S61553Y97	CUS,RUB 28X7XT7
	13	75-06068Z06	CUS,RUB 7X7XT2
	14	03S60822Y06	SCR,S-T 2.6X4 ZN A
	15	03-02876Z12	SCR,WEV 1.7X5 ZB A
	16	03S60823Y40	SCR,P-T 1.7X4 ZN A
	17	43-05906Z01	BUSH,MONITOR
	18	40-05563Z01	ASSY,N010-0526-T941
	19	30-06285Z01	SML2CD-13X39-BDX10
	20	84-06271Z01	LCD 50PIN FPC W100
	21	09-05504Z01	ASSY,OPT WIRE W100
	22	33-05591Z01	FACE,PLATE
	23	DV-05029Z01	DV37M15B
	24	09T84840F01	LUG,STYLE 18MM
	25	09T84840F02	LUG,STYLE 32MM
	26	03S60825Y04	SCR,B-T 3X8 ZN A
	28	- - - - - - - - - - -	BKT,IC
	29	15-07468Z01	SHIELD,DVD FRONT
	30	15-07469Z01	SHIELD,DVD BACK
	32	- - - - - - - - - - -	BKT,CHAS REAR
	33	15C04072K01	COVER,CONN D-OUT
	34	36A04141K02	KNOB,SLIDE
	35	TU-04070Z01	TUNER,TFTE1U112A(TU1001)
	37	07-05629Z01	BKT,LCD L
	38	07-05630Z01	BKT,LCD R
	40	- - - - - - - - - - -	HEAT,SINK A
	41	- - - - - - - - - - -	BKT,CASE
	42	03S60822Y12	SCR,S-T 2.6X6 ZN A
	43	03S60820Y40	SCR,MCH 2.6X4 ZNNA
	44	03S60822Y22	SCR,S-T 2.6X14 ZN A
	45	03T25225Y01	SCR,GND

	47	03-00712Z72	SCR,MCH 2X3.5 ZBNA
	48	03-00354Z01	SCR,MCH 2X3.5 ABCA
	49	75T25010Y26	CUSHION,SHLD5-5.5-20
	50	30-06286Z01	SML2CD-14X44-ADX6
	51	30-06287Z01	SML2CD-20X54-ADX6
	52	30-06288Z01	SML2CD-30X70-ADX6
	53	30-06289Z01	SML2CD-50X48-ADX6
	54	54-06870Z01	LABEL.CHAS
	55	30-06291Z01	SML2CD-45X142-ADX6
	56	30-06290Z01	SML2SC-24(5)X132-BDX
	57	- - - - - - - - - - -	BKT,DVD MECH
#1	58	75T25010Y31	CUSHION,SHLD10-8-20
	100	- - - - - - - - - - -	ASSY,RIV BKT SLIDER
	101	07-05888Z01	ASSY,RIV BASE R
	102	07-05893Z01	ASSY,RIV BASE L
	103	07-05895Z01	ASSY,RIV ARM R
	104	07-05898Z01	ASSY,RIV ARM L
	105	41-05899Z01	SPRING,WORM
	106	41-05900Z01	SPRING,SLIDER
	107	44-05901Z01	GEAR,DRIVE
	108	43-05902Z01	BUSH,SLIDER LOW
	109	43-05903Z01	BUSH,SLIDER UP
	110	43-05904Z01	BUSH,SLIDER REAR
	111	43-05905Z01	BUSH,ARM
	112	44-02799Z02	GEAR,WORM
	113	44-05907Z01	GEAR,CLUTCH ASSY
	114	03S60820Y18	SCR,MCH 2X3.5 ZNSA
	115	03S60827Y13	SCR,P-L 2X2.2 ZN A
	116	03S94385F13	SCR,NYLOK M2.6X3
	117	04B41345P23	WASH,1.7X5X0.35
	118	- - - - - - - - - - -	CHAS,BASE

Exploded View(DVD Deck Mechanism)

(DV37M15B)

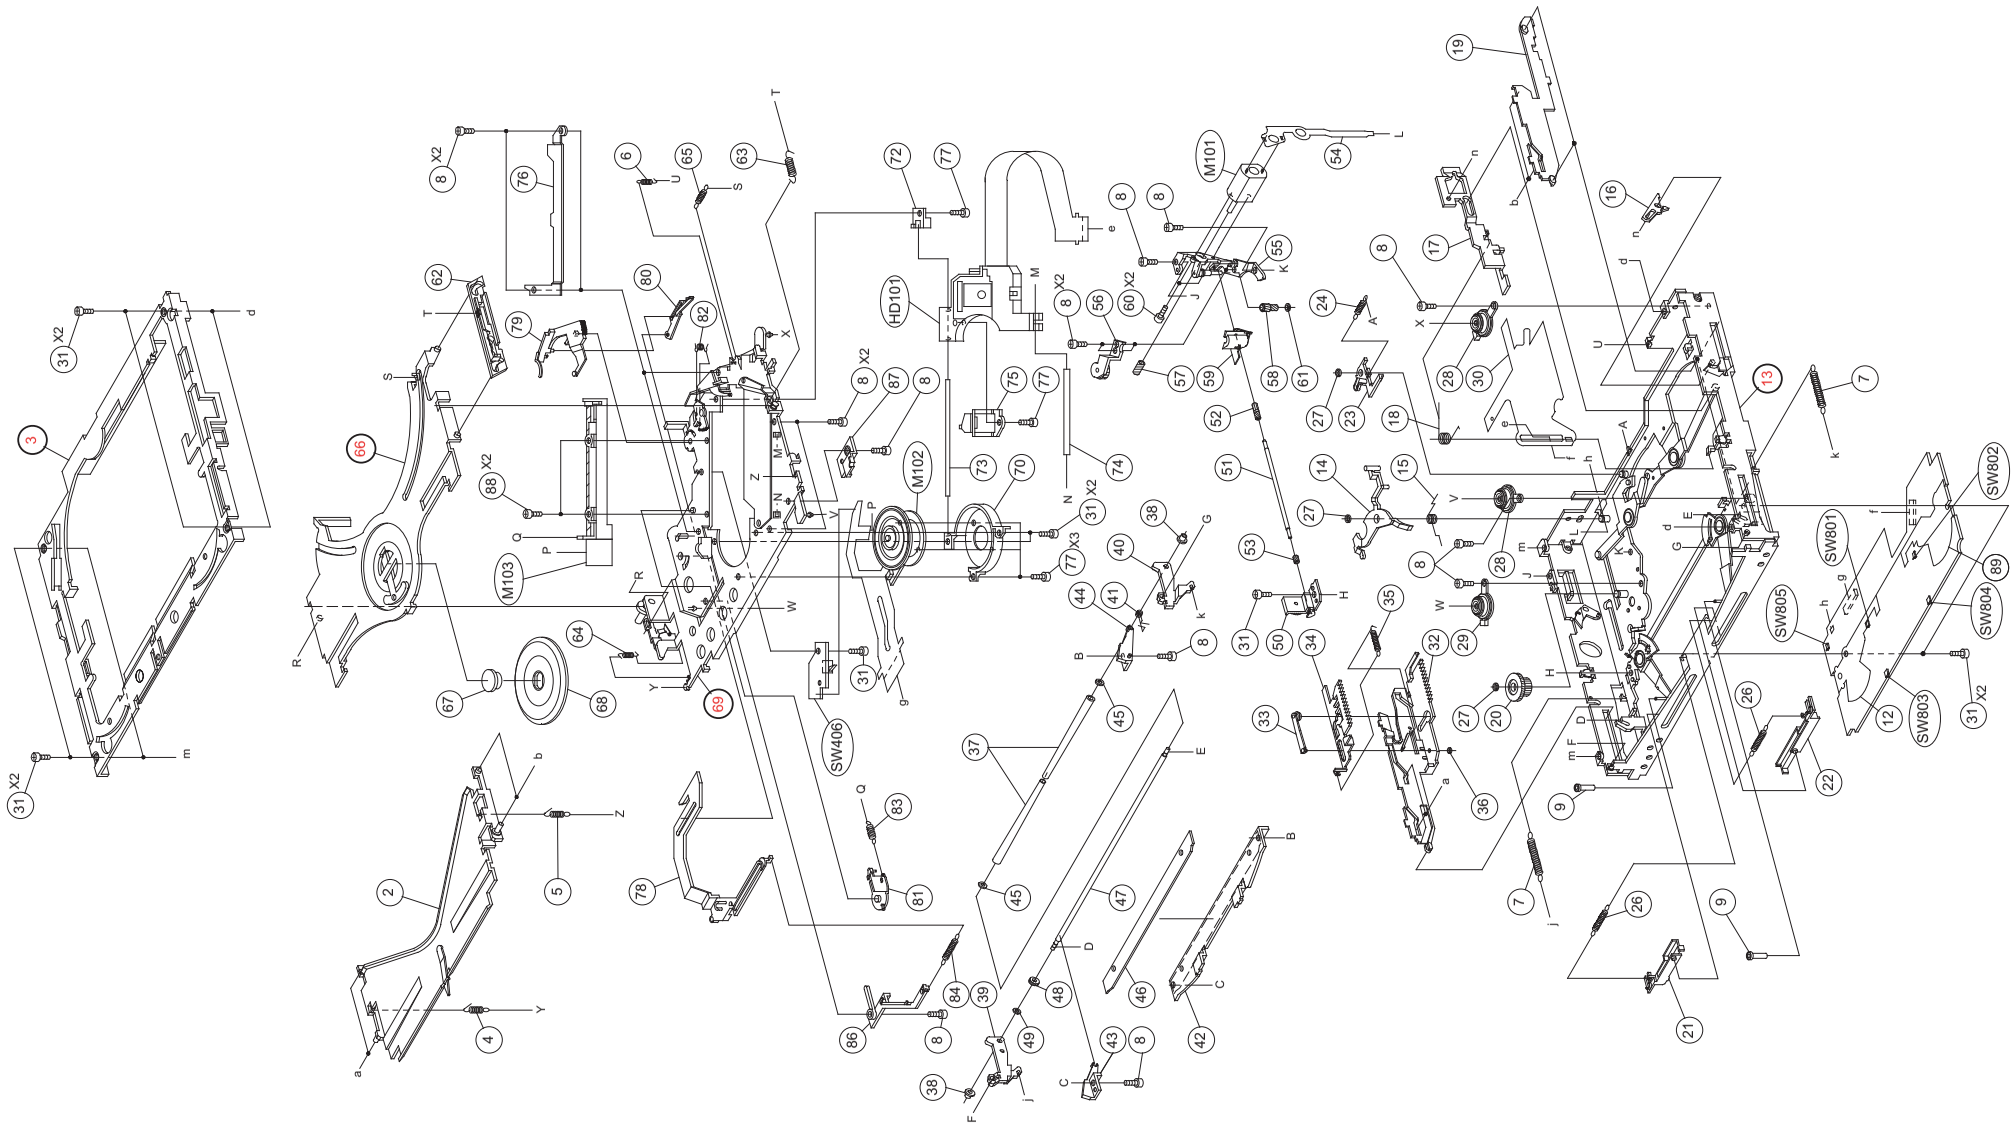

TO PARTS LIST TO CONTENTS

DVD Deck Mechanism Assembly Parts List

NOTE : The part that has not PART NUMBER will not be supplied.

2	01A51490Y24	ASSY,RIV GUIDE TOP
3	- - - - - - - - - - -	CHASSIS,TOP
4	41A60338Y01	SPRING,DRIVE F-L
5	41A60339Y01	SPRING,DRIVE F-R
6	41A60340Y01	SPRING,DRIVE R
7	41A60344Y01	SPRING,LEV ROLL-L
8	03S94385F19	SCR,NYLOK M2X2.5
9	43-03093Z03	ROLLER,DISC PIN
12	14-01064Z01	INSULATOR,PWB L2
13	- - - - - - - - - - -	ASSY,RIV CHAS BASE
14	45C51003Y10	LEVER,TRIGER MAIN
15	41A51395Y01	SPRING,LEV TRG MAIN
16	45A50833Y11	LEVER,LINK SLDR(R)
17	45B51221Y11	SLIDER,LOCK(R2)
18	41A51396Y01	SPRING,SLD LOCK(R2)
19	45C51237Y10	SLIDER,LOCK(R1)
20	44A50829Y11	GEAR,LOAD(E)
21	45-01051Z03	SLIDER,DISC SW(L)
22	45-01052Z03	SLIDER,DISC SW(R)
23	45B50838Y11	LEVER,LOCK(RC)
24	41A60343Y01	SPRING,LEV LOCK-RC
26	41-02948Z01	SPRING,LEV DISC
27	04B41345P14	WASH,L. 2.1X4X0.25
28	75C60456Y04	DAMPER,DV-TM
29	75C60456Y05	DAMPER,DV-TM
30	14A51712Y01	INSULATOR,FPC
31	03S94385F07	SCR,NYLOK M2X2
32	45D51236Y10	SLIDER,LOCK(L)
33	01A51491Y11	ASSY,RIV LEV ASST
34	44-02001Z03	ASSY,SLIDER TRIGER 2
35	41A60348Y01	SPRING,SLD TRIGER
36	04B41345P15	WASH,1.2X3.5X0.35
37	49A51397Y03	ROLLER,DV-TM
38	43A51228Y11	BUSH,ARM GUIDE
39	45-02722Z03	LEVER,ROLLER(L)2
40	45-02723Z03	LEVER,ROLLER(R)2
41	41A60360Y01	SPRING,ARM GUIDE
42	45-01385Z03	ARM,DISC GUIDE
43	45B60959Y11	ARM,DISC GUIDE-L
44	45B60960Y11	ARM,DISC GUIDE-R
45	04S40075G09	WASH,2.6X4.7X0.25
46	14A61435Y01	INSULATOR,ARM DISC
47	47A51349Y01	SHAFT,ROLLER
48	44-01531Z03	GEAR,ROLLER-2
49	04B41345P02	WASH,1.7X3.5X0.25
50	07-01606Z03	ASSY,RIV BKT LD-F-3
51	47-01479Z01	SHAFT,LOAD
52	44A50827Y11	GEAR,LOAD(C)
53	44-01532Z03	GEAR,LOAD(F)-2
54	84-01207Z01	FPC,LOAD
55	07-01177Z03	ASSY,RIV BKT LOAD(R)
56	01A51487Y11	ASSY,RIV BKT LD-R2

57	44A50825Y11	GEAR,LOAD(A)
58	44A50826Y11	GEAR,LOAD(B)
59	07B51226Y11	BKT,SHAFT LOAD
60	03S30688Y17	SCR,MCH M1.4X2
61	04B41345P11	WASH,1.2X2.5X0.25
62	45B51235Y10	SLIDER,ARM LIFT(R)
63	41A60336Y01	SPRING,CLAMP-R
64	41A60335Y01	SPRING,CLAMP-L
65	41A60337Y01	SPRING,CLAMP-RTL
66	- - - - - - - - - - -	ASSY,RIV ARM CLAMP
67	43-01054Z03	STOPPER,CLAMP
68	43-01049Z02	TABLE,CLAMPER
69	- - - - - - - - - - -	ASSY,RIV CHAS PICKUP
70	07-01053Z03	BKT,SPINDLE ADJUST
72	07A50823Y11	BKT,SHAFT PICKUP
73	47A51347Y01	SHAFT,PICKUP MAIN
74	47-01057Z01	SHAFT,PICKUP SUB
75	41B50836Y11	SPRING,NUT
76	15A51210Y11	COVER,MAIN
77	03S94385F09	SCR,NYLOK M2X3 P2
78	45C51234Y02	SLIDER,8CM
79	01B61577Y10	ASSY,RIV LEVER-8L
80	45A51231Y10	LEVER,TRIGER 8CM
81	45-02638Z03	LEVER,TRIGER SUB2
82	41A51394Y01	SPRING,LEV 8CM(L)
83	41A60346Y01	SPRING,LEV TRG-SUB
84	41A60347Y01	SPRING,SLD 8CM
86	07A60069Y11	BKT,SLIDER 8CM
87	15B61279Y11	SPACER,DAMPER
88	03S94385F98	SCR,NYLOK M2X2.5
89	14-01063Z01	INSULATOR,PWB R2